



US008912988B2

(12) **United States Patent**
Tomida et al.

(10) **Patent No.:** **US 8,912,988 B2**
(45) **Date of Patent:** **Dec. 16, 2014**

(54) **EL DISPLAY PANEL, POWER SUPPLY LINE DRIVE APPARATUS, AND ELECTRONIC DEVICE**

(71) Applicant: **Sony Corporation**, Tokyo (JP)

(72) Inventors: **Masatsugu Tomida**, Kanagawa (JP);
Mitsuru Asano, Kanagawa (JP)

(73) Assignee: **Sony Corporation**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/269,644**

(22) Filed: **May 5, 2014**

(65) **Prior Publication Data**

US 2014/0240206 A1 Aug. 28, 2014

Related U.S. Application Data

(63) Continuation of application No. 12/589,609, filed on Aug. 20, 2012, which is a continuation of application No. 12/213,143, filed on Jun. 16, 2008, now Pat. No. 8,269,696.

(30) **Foreign Application Priority Data**

Jun. 30, 2007 (JP) 2007-173590

(51) **Int. Cl.**
G09G 3/30 (2006.01)
G09G 3/32 (2006.01)

(52) **U.S. Cl.**
CPC **G09G 3/30** (2013.01); **G09G 3/3233** (2013.01); **G09G 3/3266** (2013.01); **G09G 2300/0426** (2013.01); **G09G 2300/0819** (2013.01); **G09G 2300/0842** (2013.01); **G09G 2300/0866** (2013.01); **G09G 2310/0256** (2013.01); **G09G 2320/043** (2013.01); **G09G 2320/045** (2013.01); **G09G 2330/02** (2013.01)
USPC **345/76**; 315/169.3

(58) **Field of Classification Search**
CPC H01L 27/3244; H01L 27/3297; H01L 23/5283; H01L 23/5286; G09G 2330/02; G09G 2330/028; G09G 2310/0291; G09G 3/22; G09G 3/30; G09G 3/32; G09G 3/3208; G09G 3/3233; G09G 2300/0426; G09G 2300/0819; G09G 2300/0842; G09G 2300/0866; G09G 2310/0256; G09G 2320/043; G09G 2320/045; G09G 3/3266
USPC 345/76-83, 204; 315/169.3
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,028,580 A 2/2000 Kosegawa et al.
6,489,689 B2 12/2002 Nojiri
7,102,202 B2 9/2006 Kobayashi et al.
7,109,952 B2 9/2006 Kwon
7,256,774 B1 8/2007 Senda et al.
7,315,296 B2 1/2008 Koyama et al.

(Continued)

FOREIGN PATENT DOCUMENTS

JP 02-051252 A 2/1990
JP 11-338439 A 12/1999

(Continued)

OTHER PUBLICATIONS


Japanese Office Action issued Feb. 28, 2012 for corresponding Japanese Application No. 2007-173590.

Primary Examiner — Stephen Sherman
(74) *Attorney, Agent, or Firm* — Rader, Fishman & Grauer PLLC

(57) **ABSTRACT**

Disclosed herein is an electroluminescence display panel including a pixel circuit, a signal line, a scan line, a drive power supply line, a common power supply line, a power supply line drive circuit, a high-potential power supply line, and a low-potential power supply line.

11 Claims, 34 Drawing Sheets

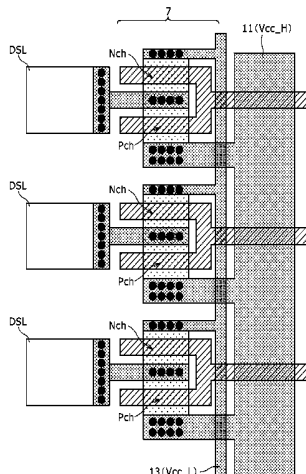

(56)

References Cited

U.S. PATENT DOCUMENTS

7,868,883 B2 1/2011 Mochizuki et al.
2005/0206590 A1 9/2005 Sasaki et al.
2005/0225518 A1 10/2005 Yamada et al.

FOREIGN PATENT DOCUMENTS

JP 2003-255856 A 9/2003
JP 2003-271095 A 9/2003

JP 2004-021219 A 1/2004
JP 2004-029791 A 1/2004
JP 2004-055529 A 2/2004
JP 2004-093682 A 3/2004
JP 2004-118015 A 4/2004
JP 2004-145300 A 5/2004
JP 2004-145301 A 5/2004
JP 2005-309003 A 11/2005
JP 2006-003889 A 1/2006
JP 2006-349753 A 12/2006
JP 2007-041346 A 2/2007
WO WO-2008/038635 A1 4/2008

FIG. 1
RELATED ART

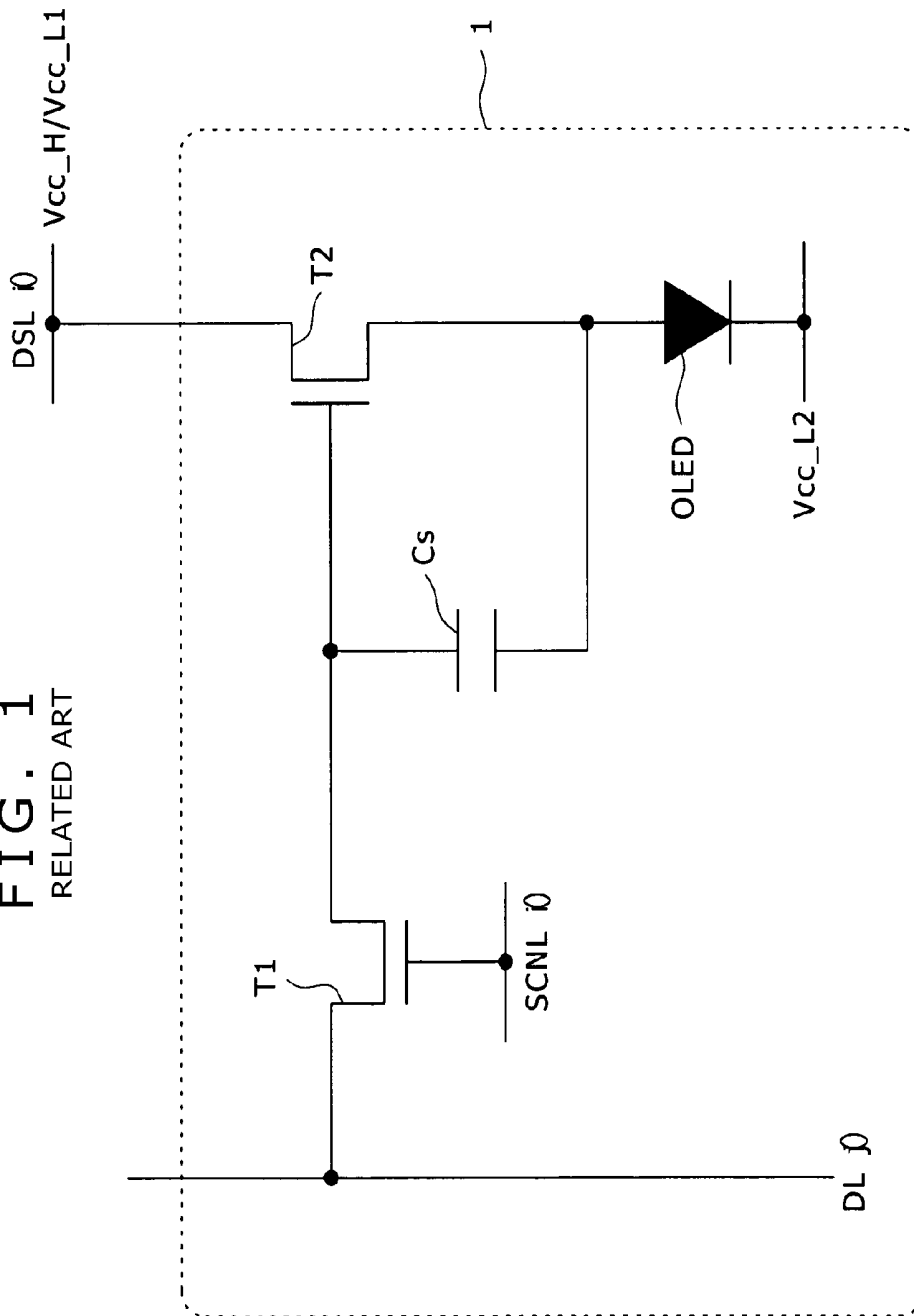


FIG. 2

RELATED ART

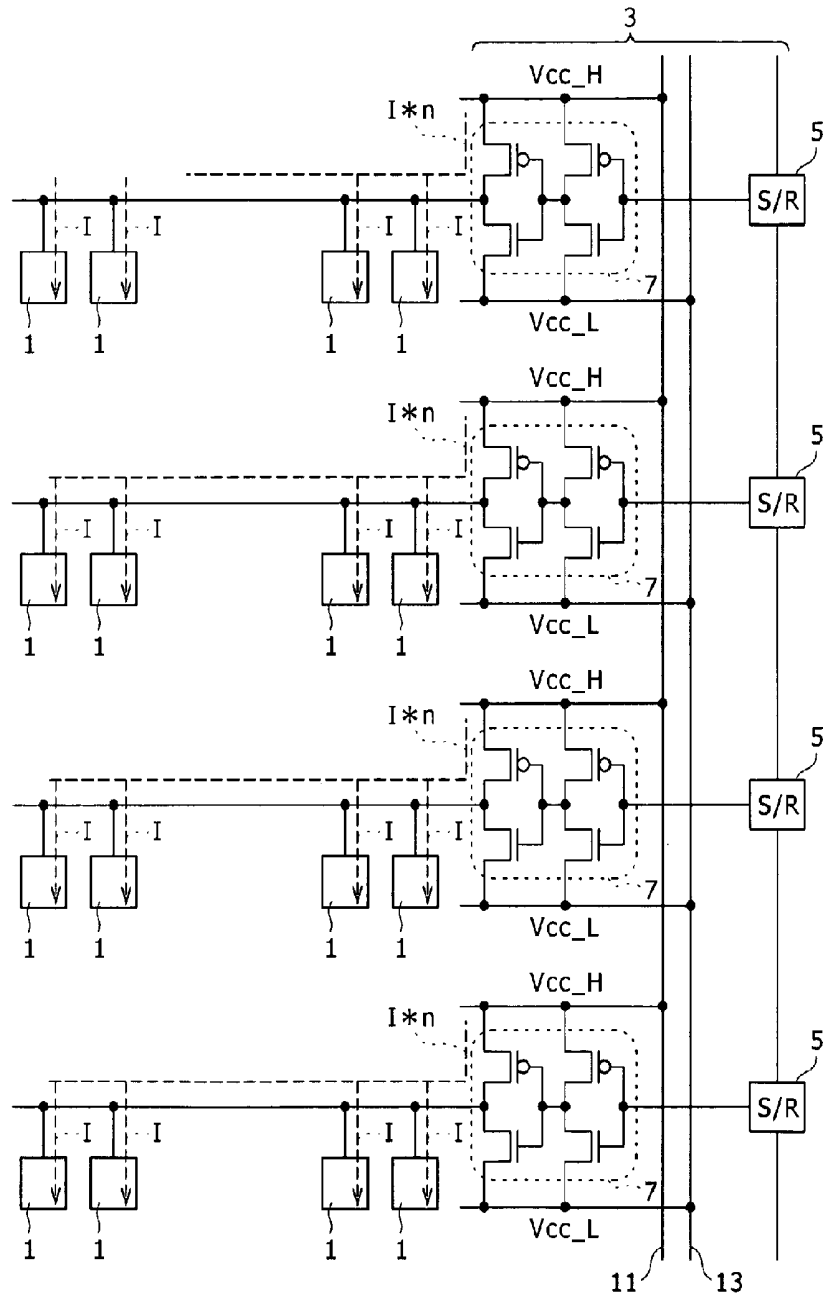


FIG. 3

RELATED ART

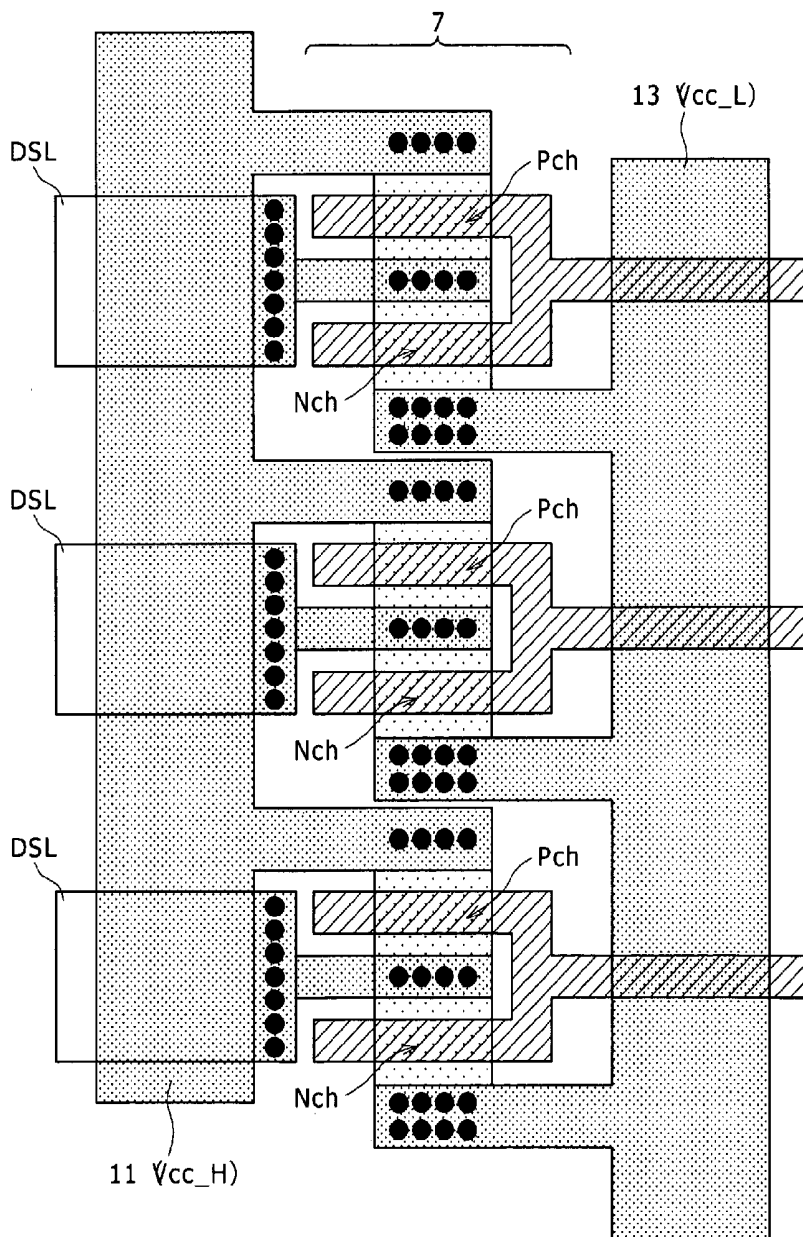
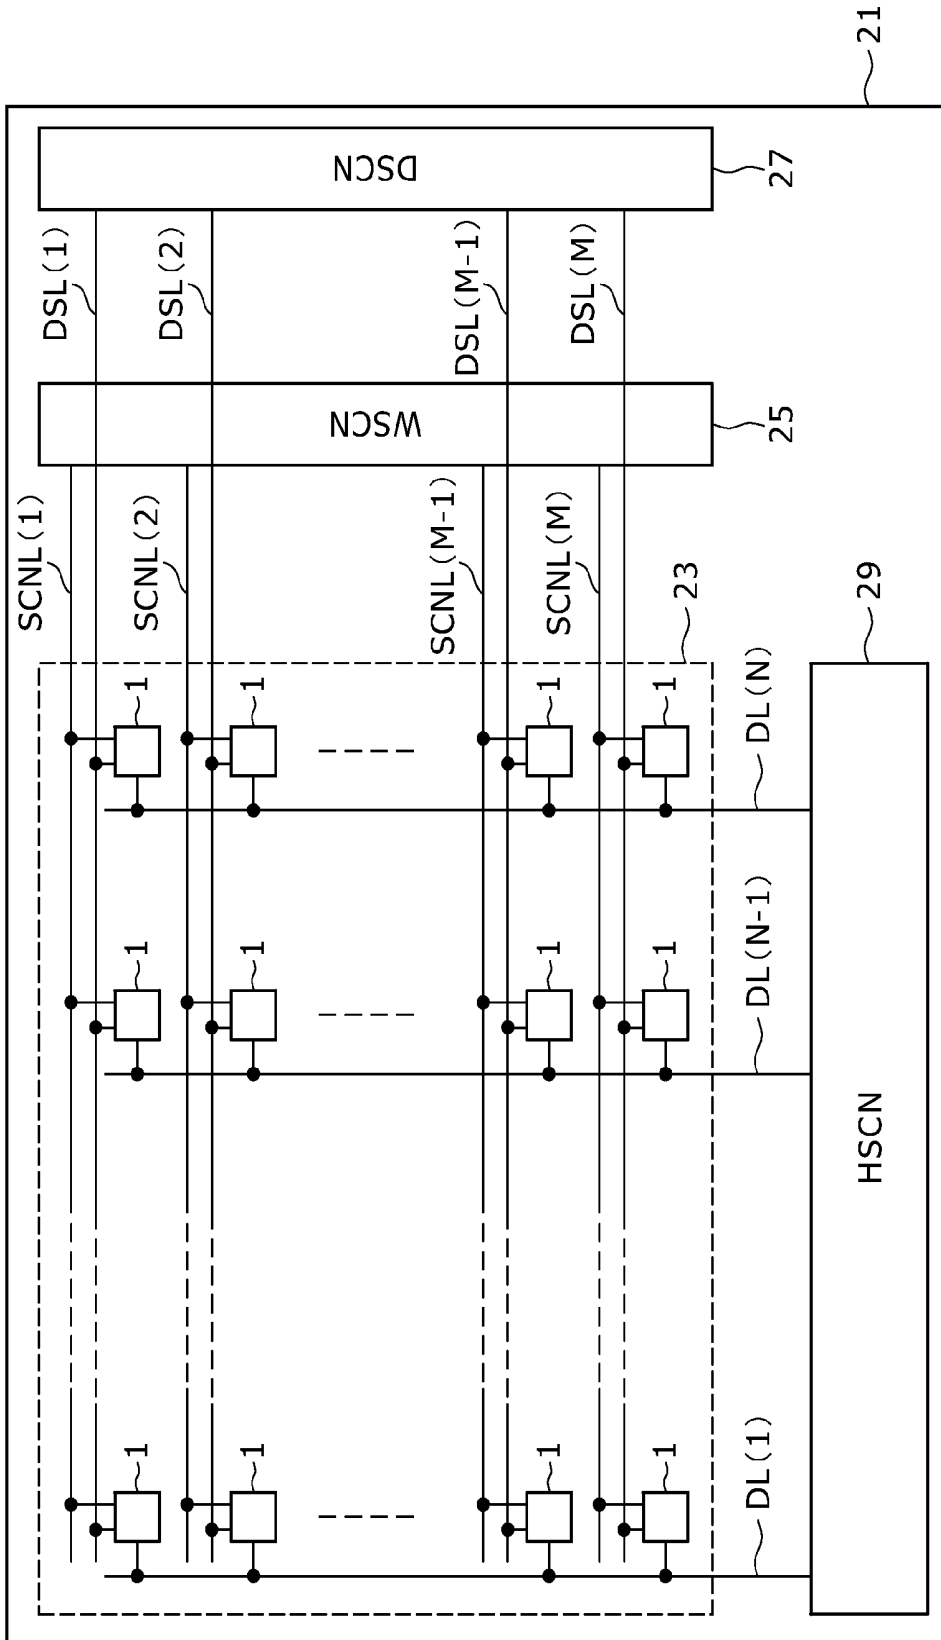


FIG. 4



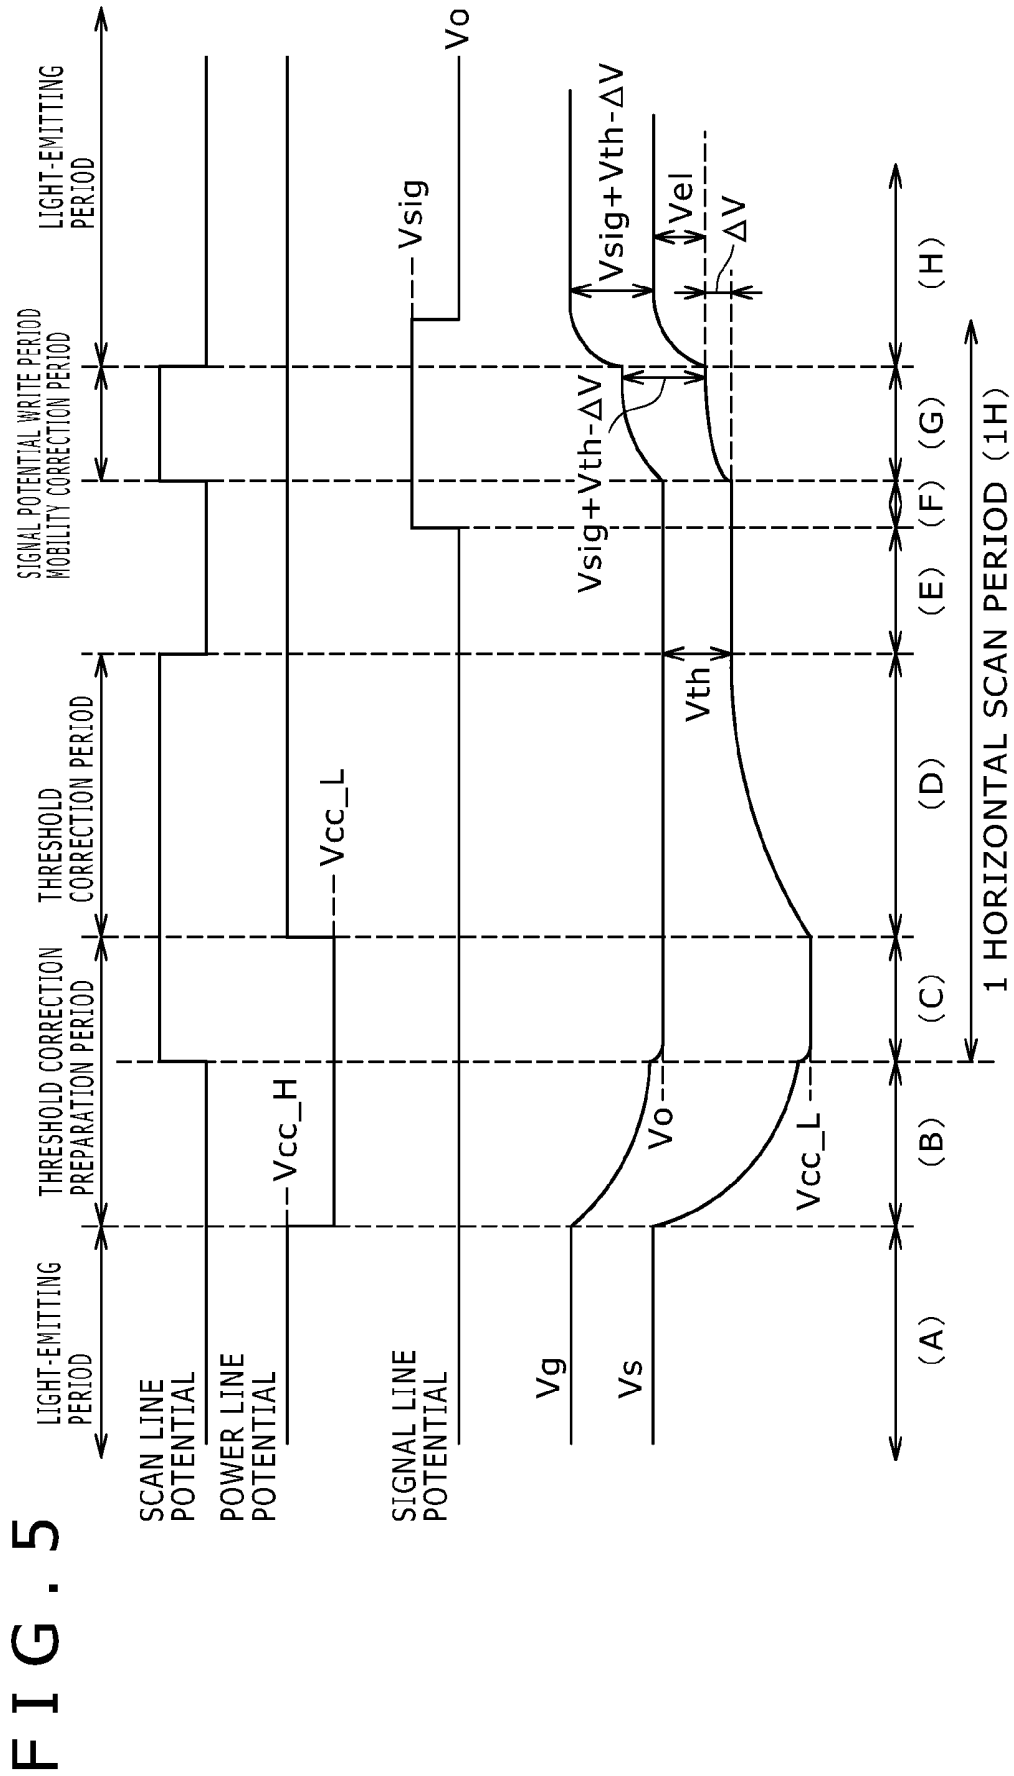


FIG. 6A

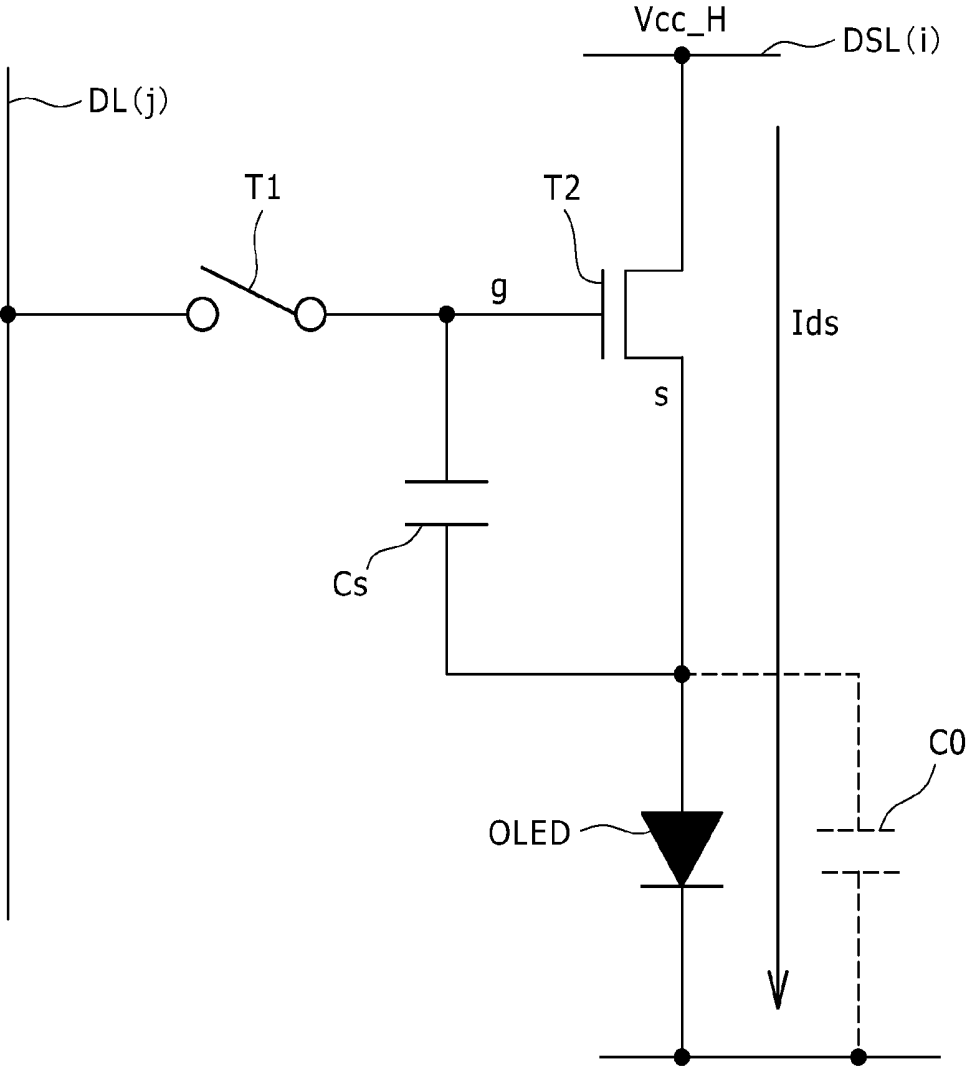


FIG. 6 B

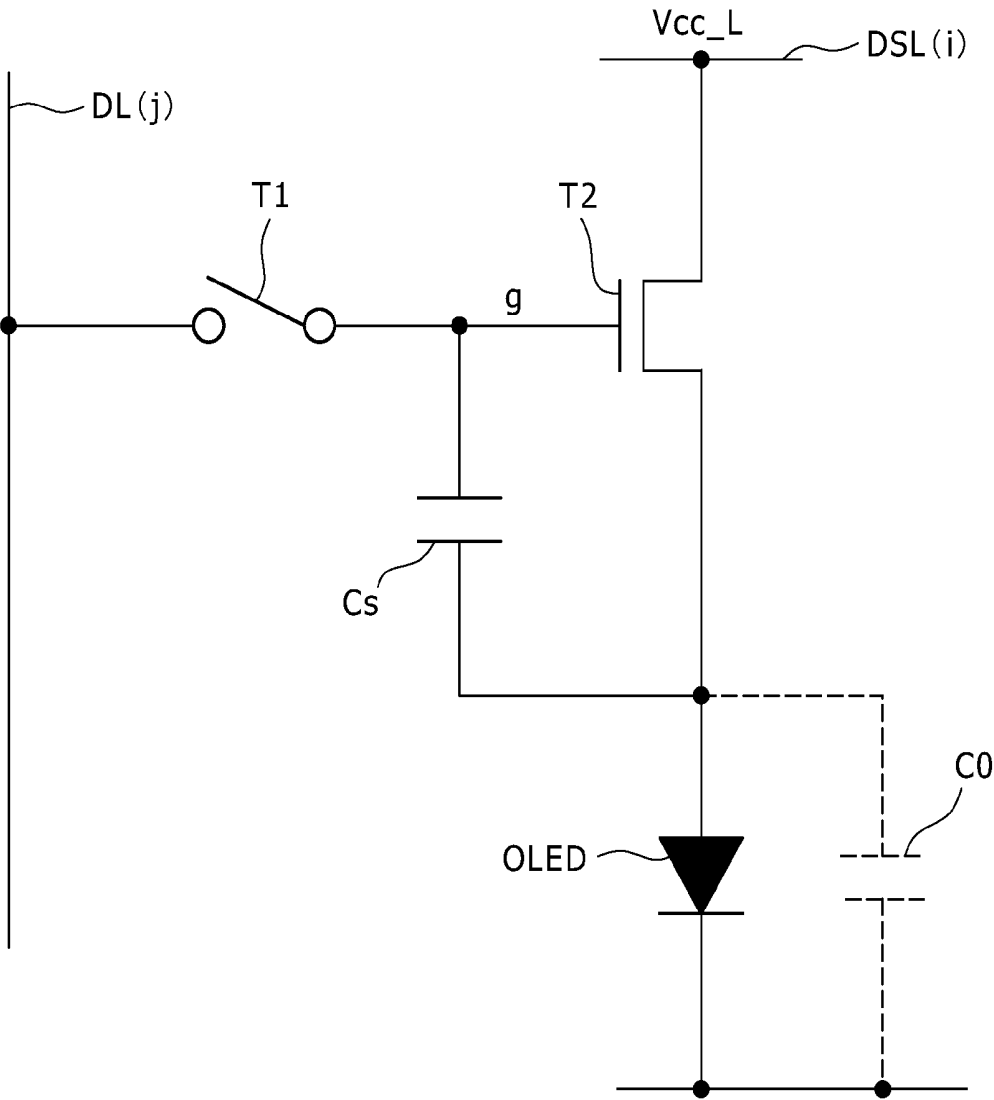


FIG. 6C

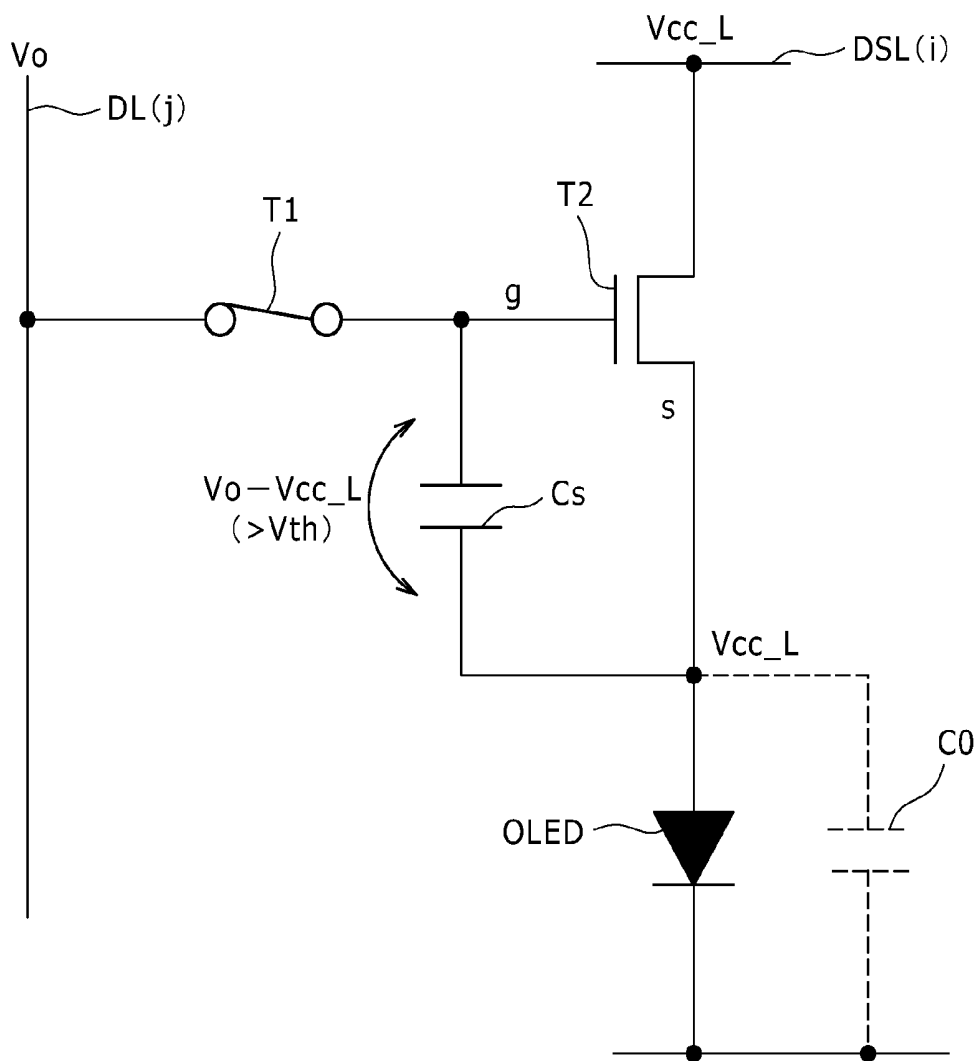


FIG. 6D

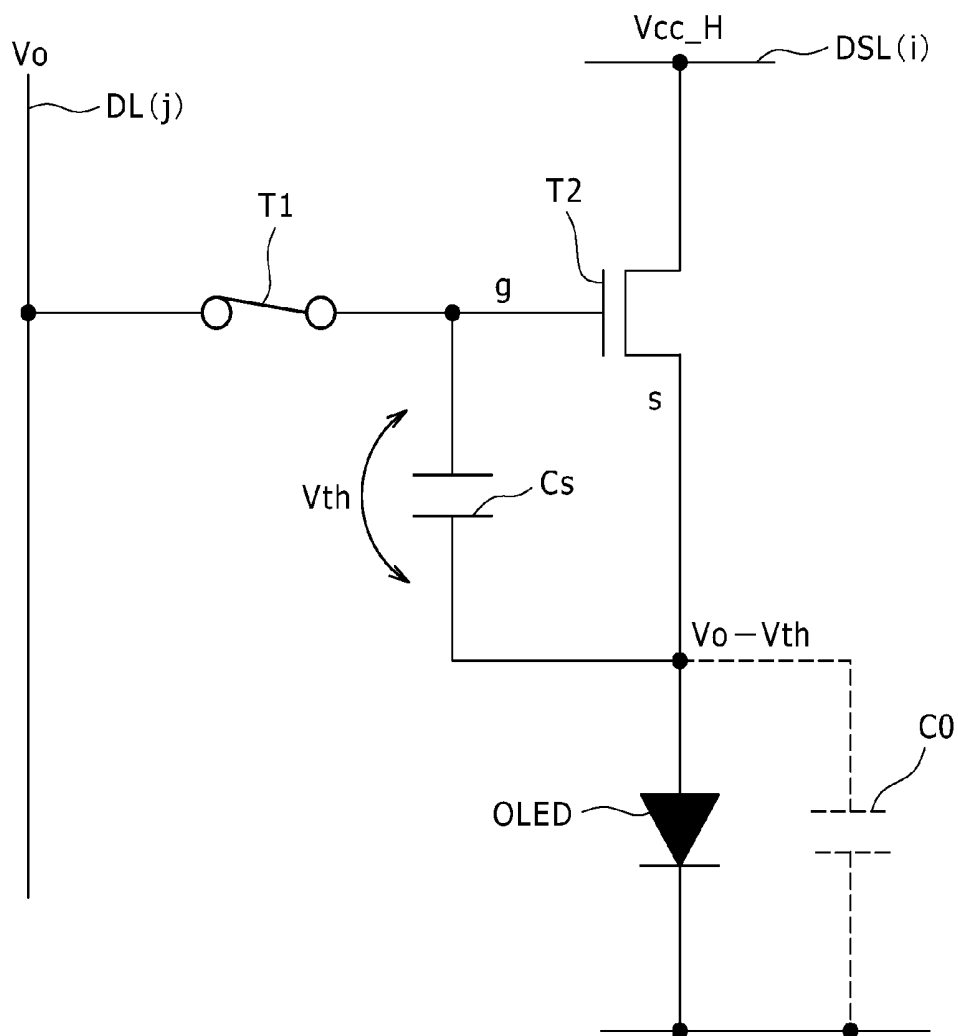


FIG. 6E

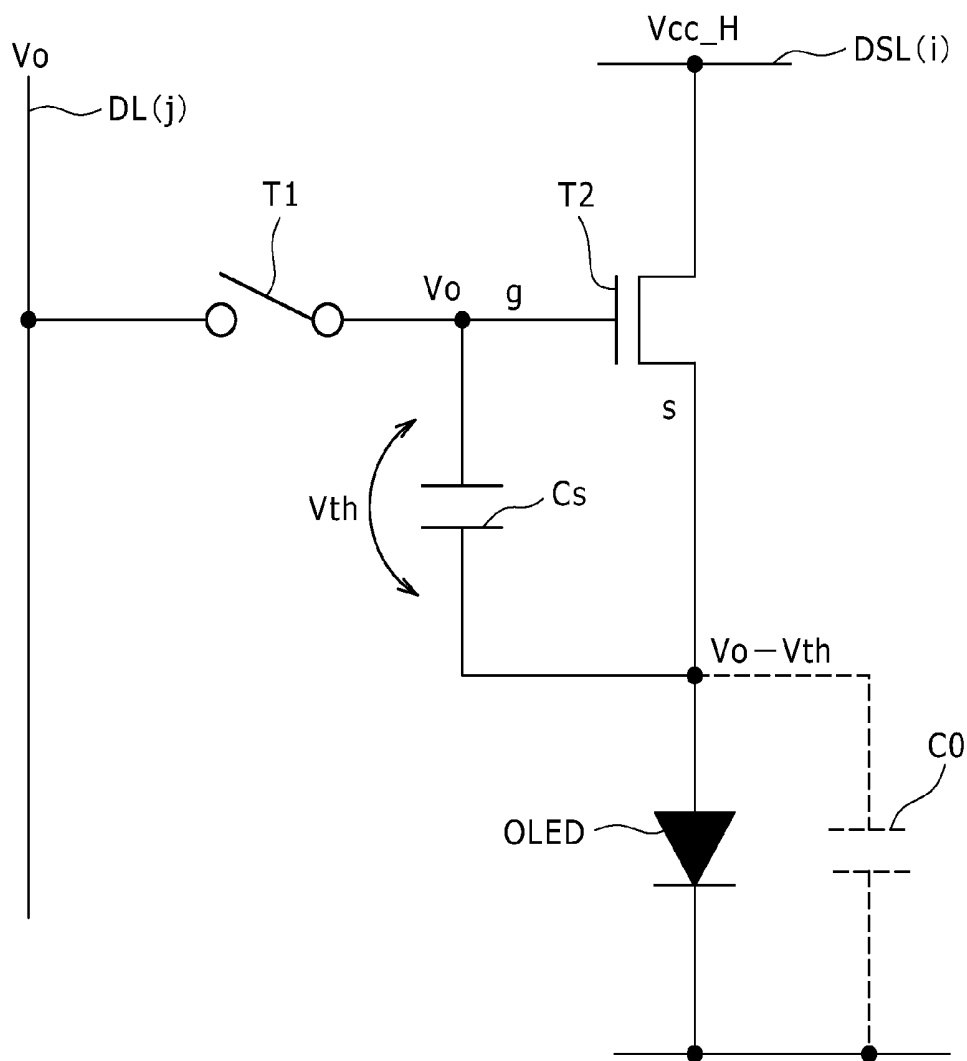


FIG. 6F

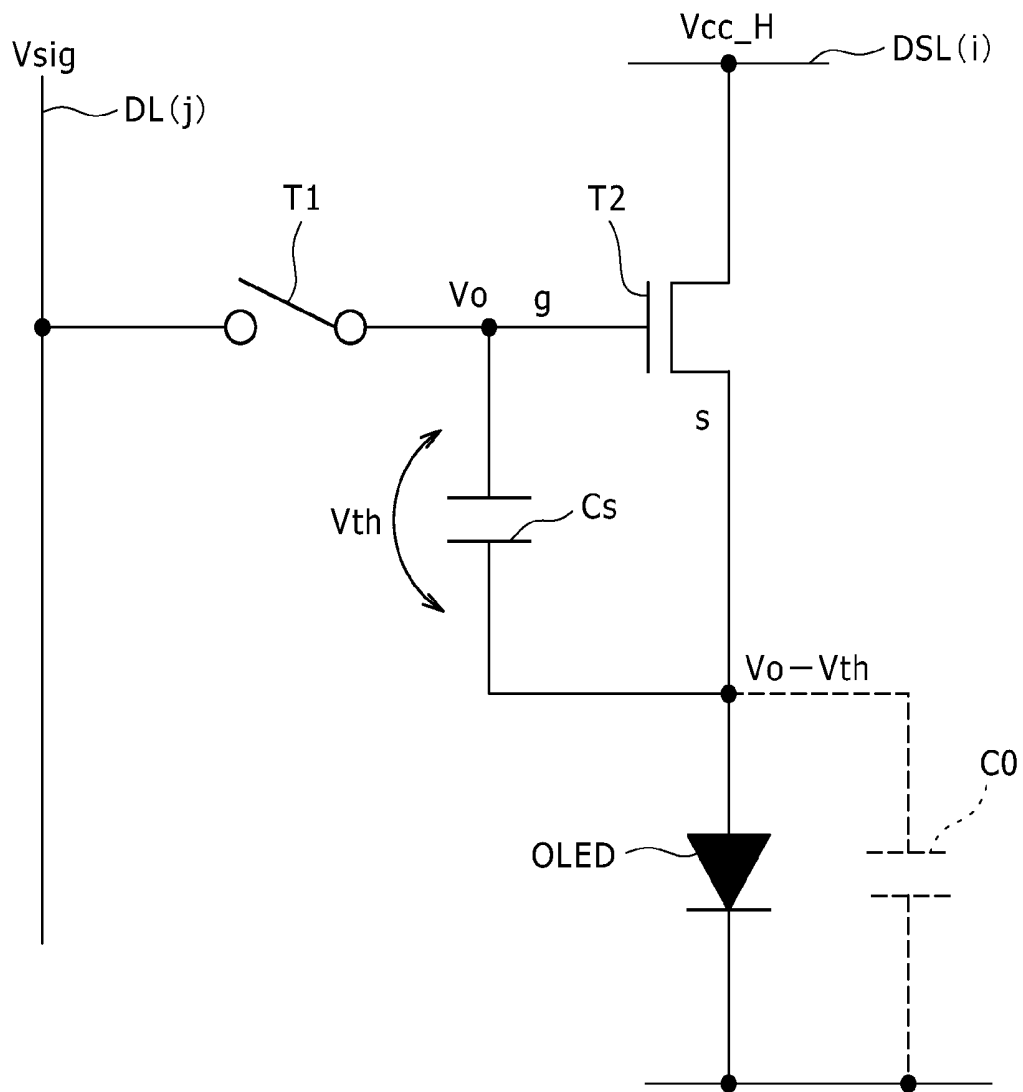


FIG. 6G

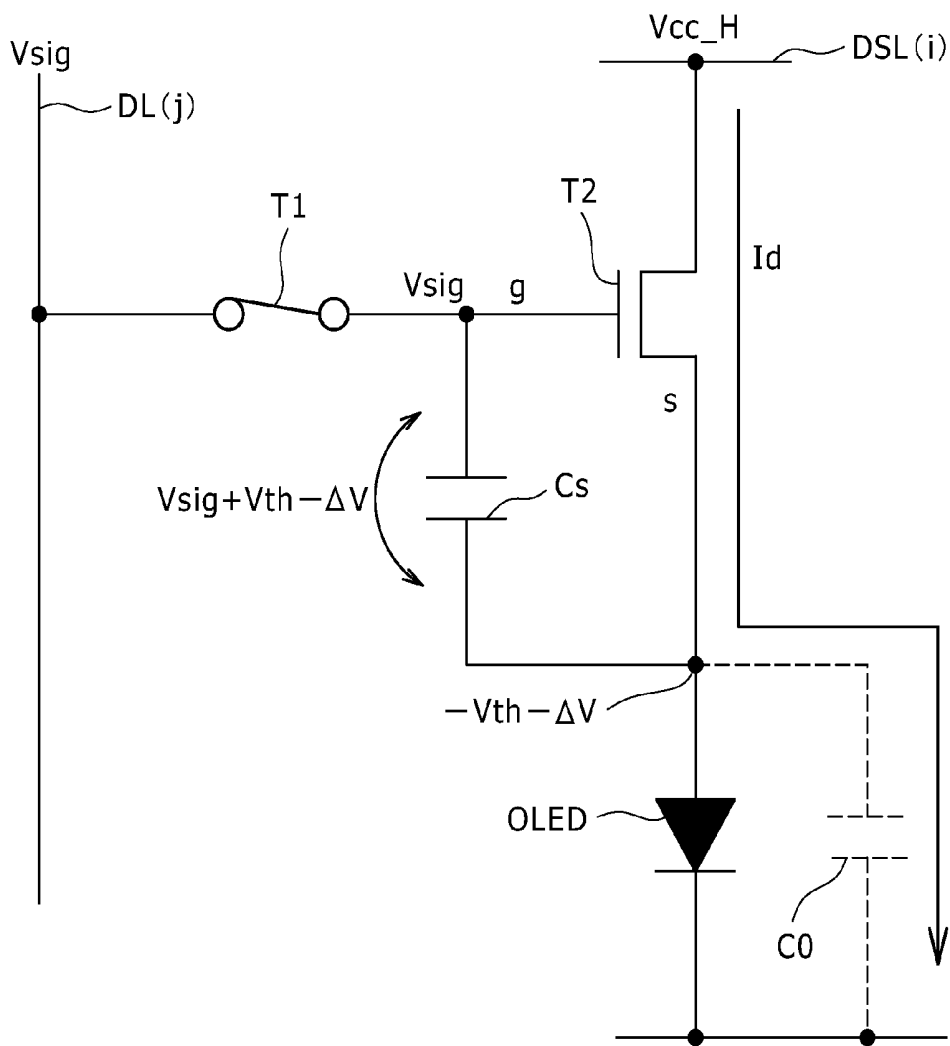


FIG. 6H



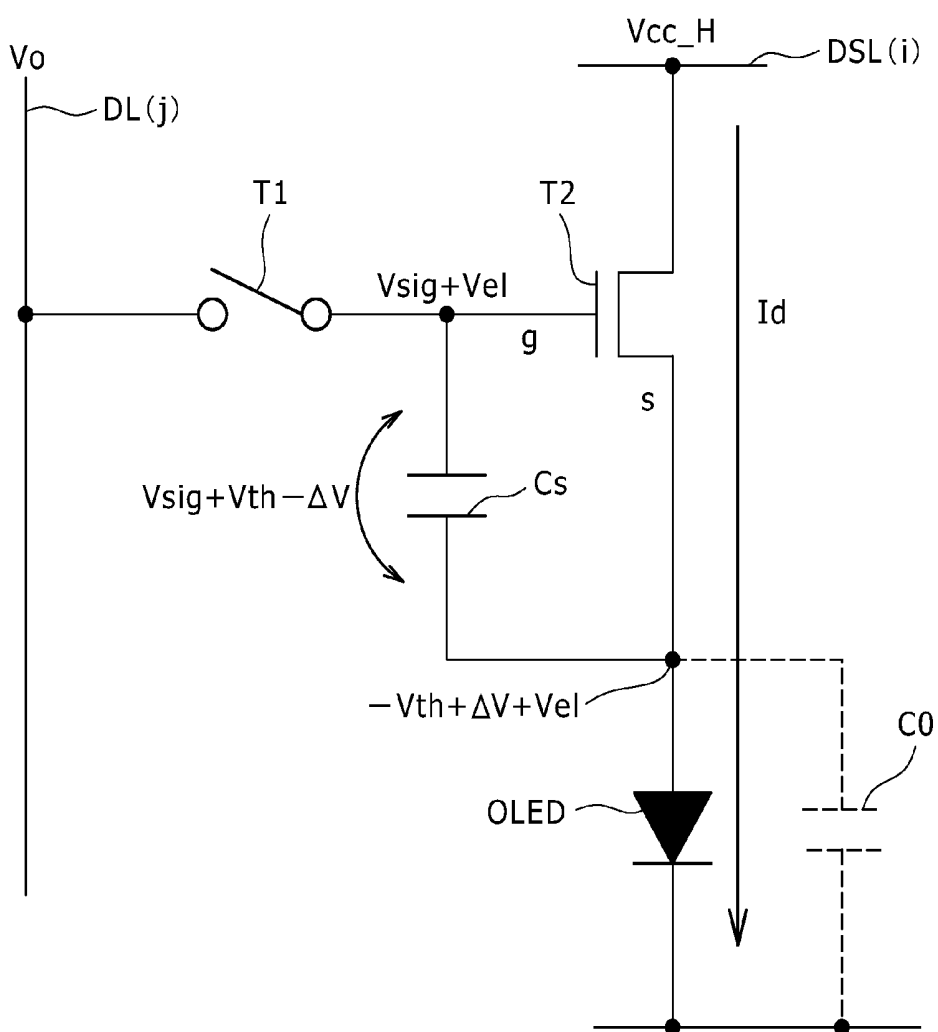


FIG. 7

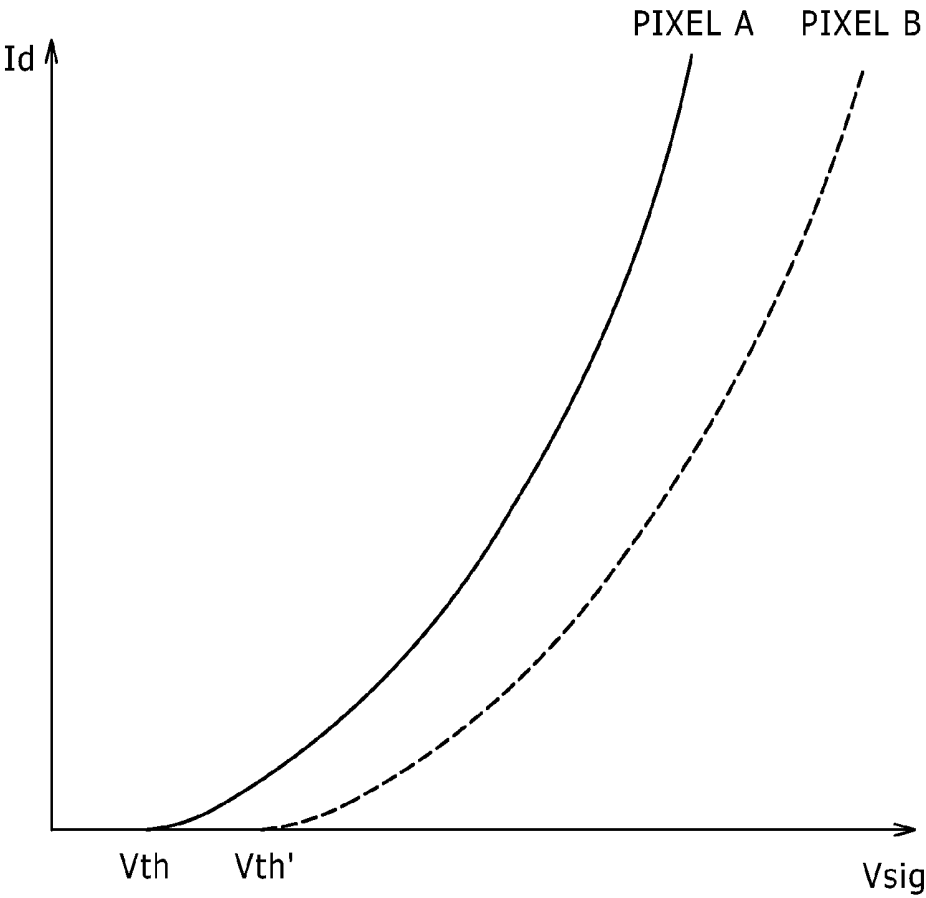


THRESHOLD NOT CORRECTED +
MOBILITY μ NOT CORRECTED

FIG. 8

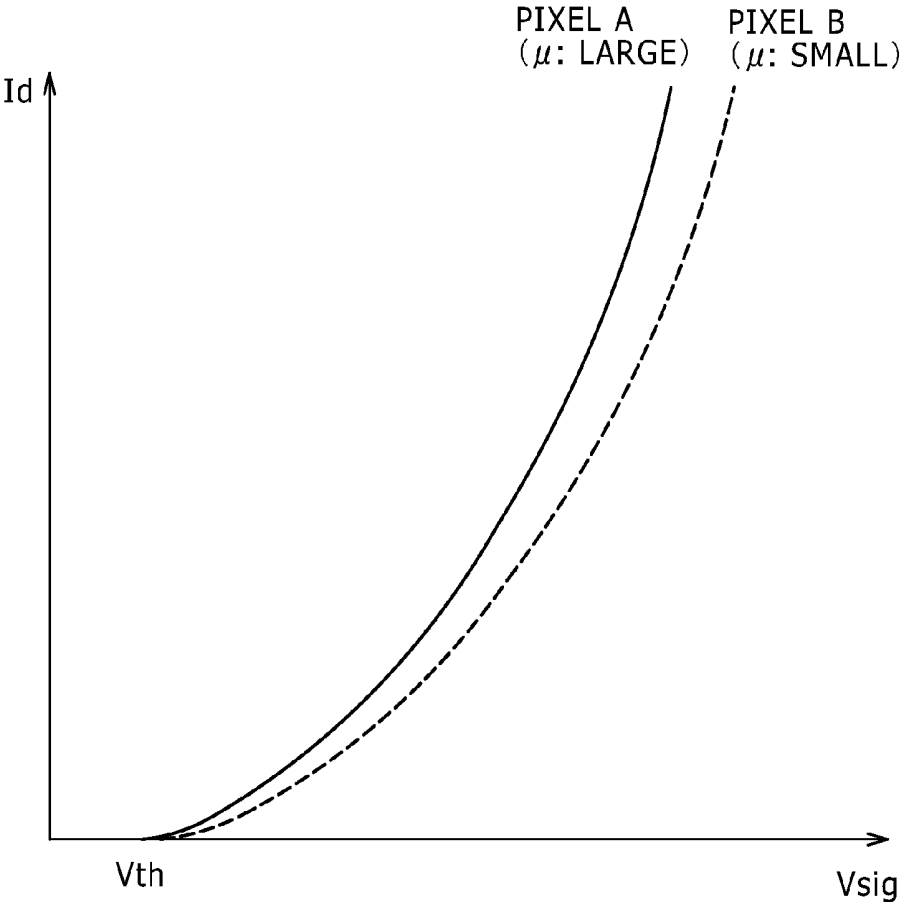

THRESHOLD CORRECTED +
MOBILITY μ NOT CORRECTED

FIG. 9

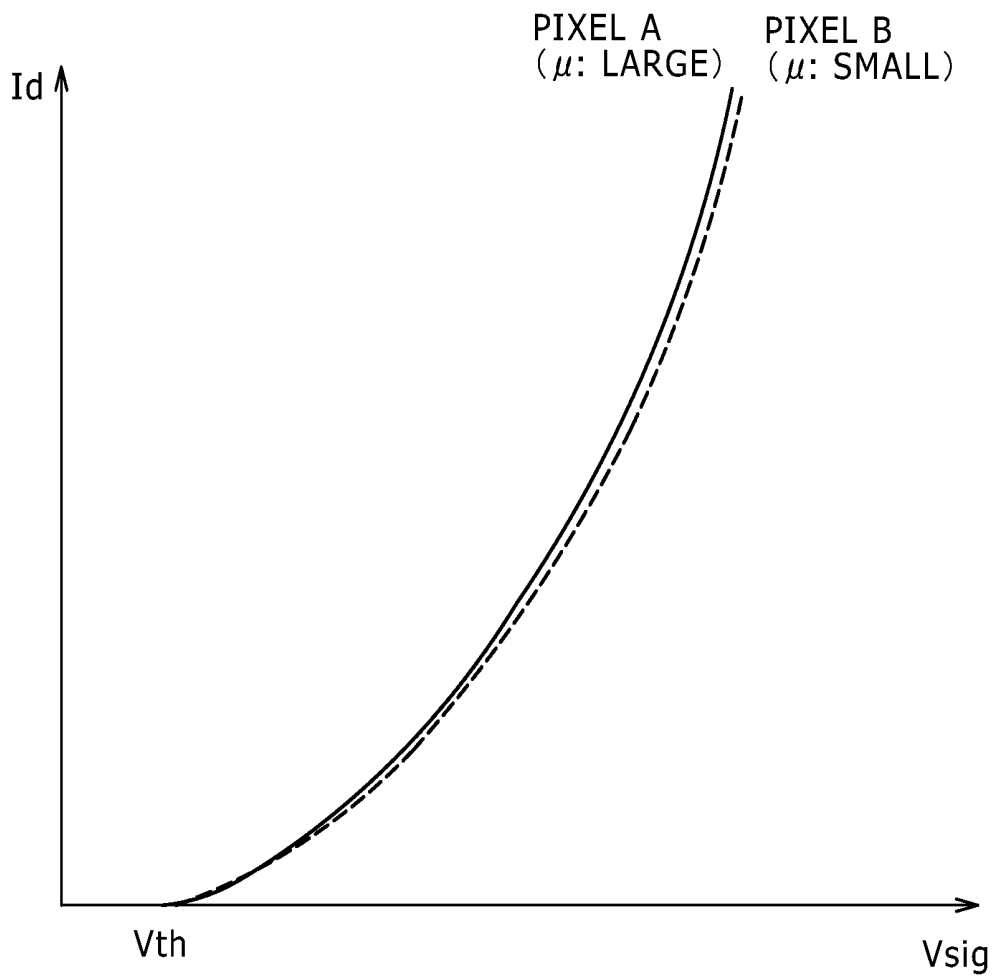

THRESHOLD CORRECTED + MOBILITY μ CORRECTED

FIG. 10

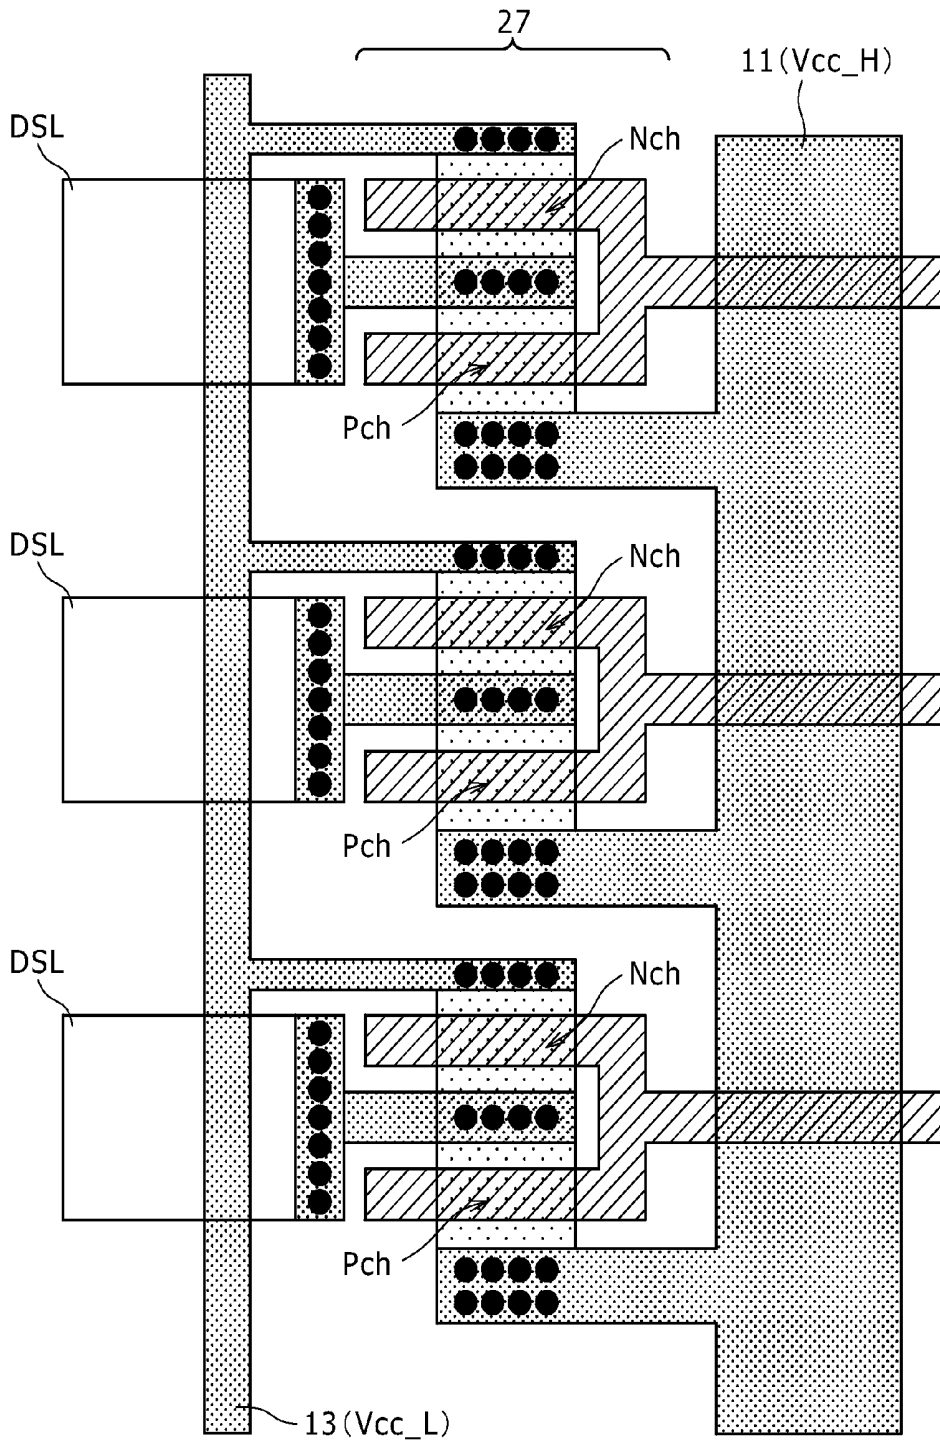


FIG. 11

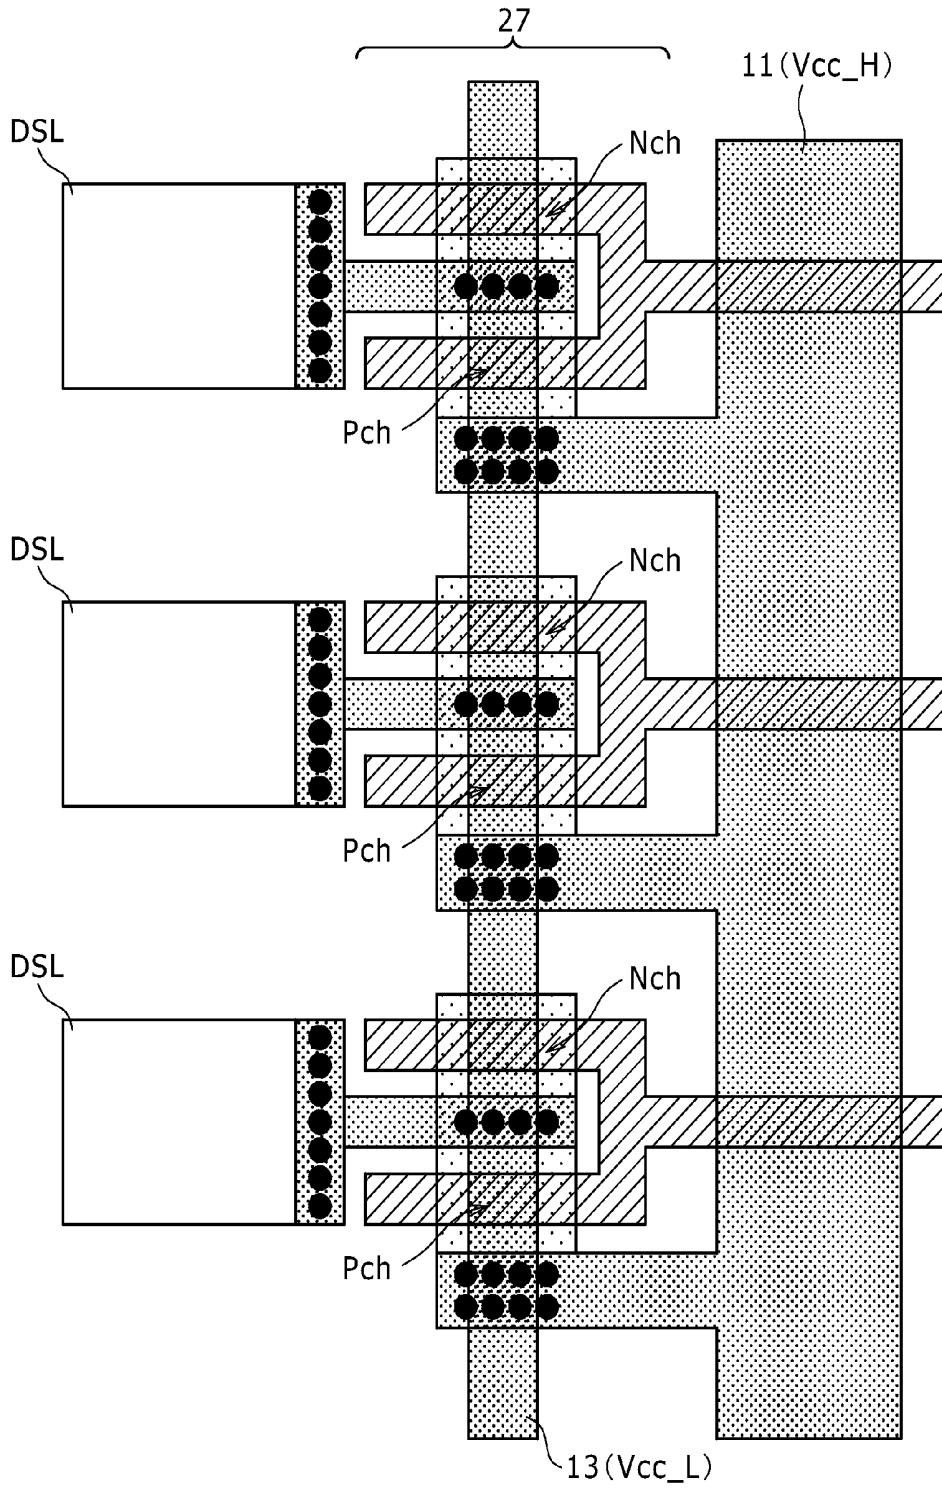


FIG. 12

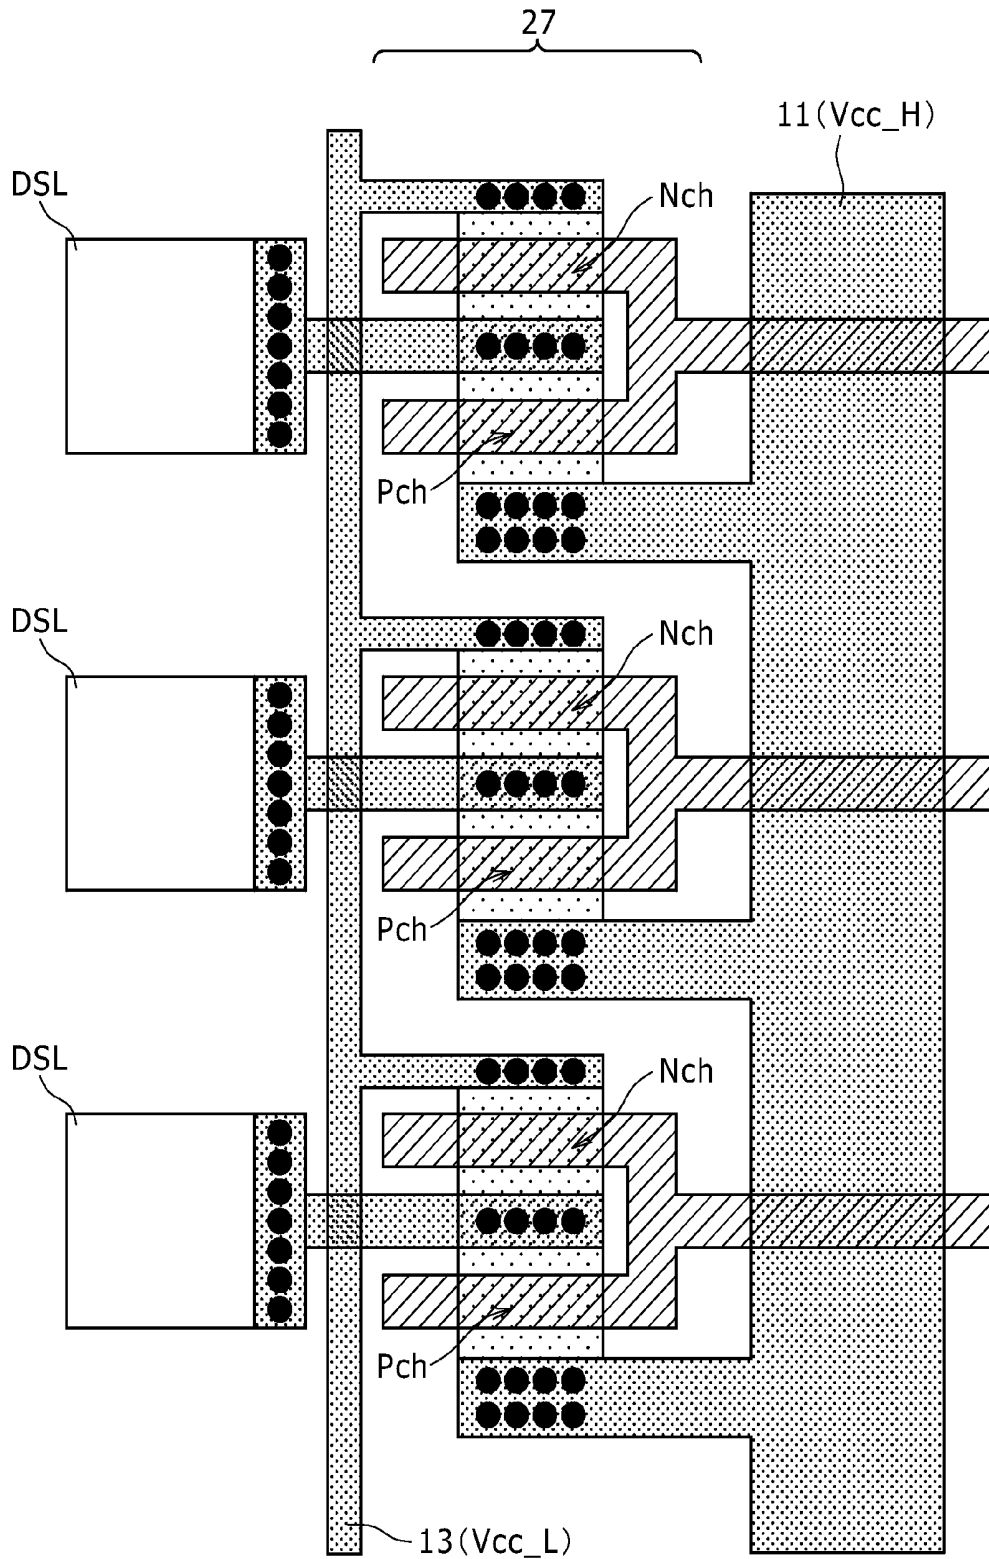


FIG. 13

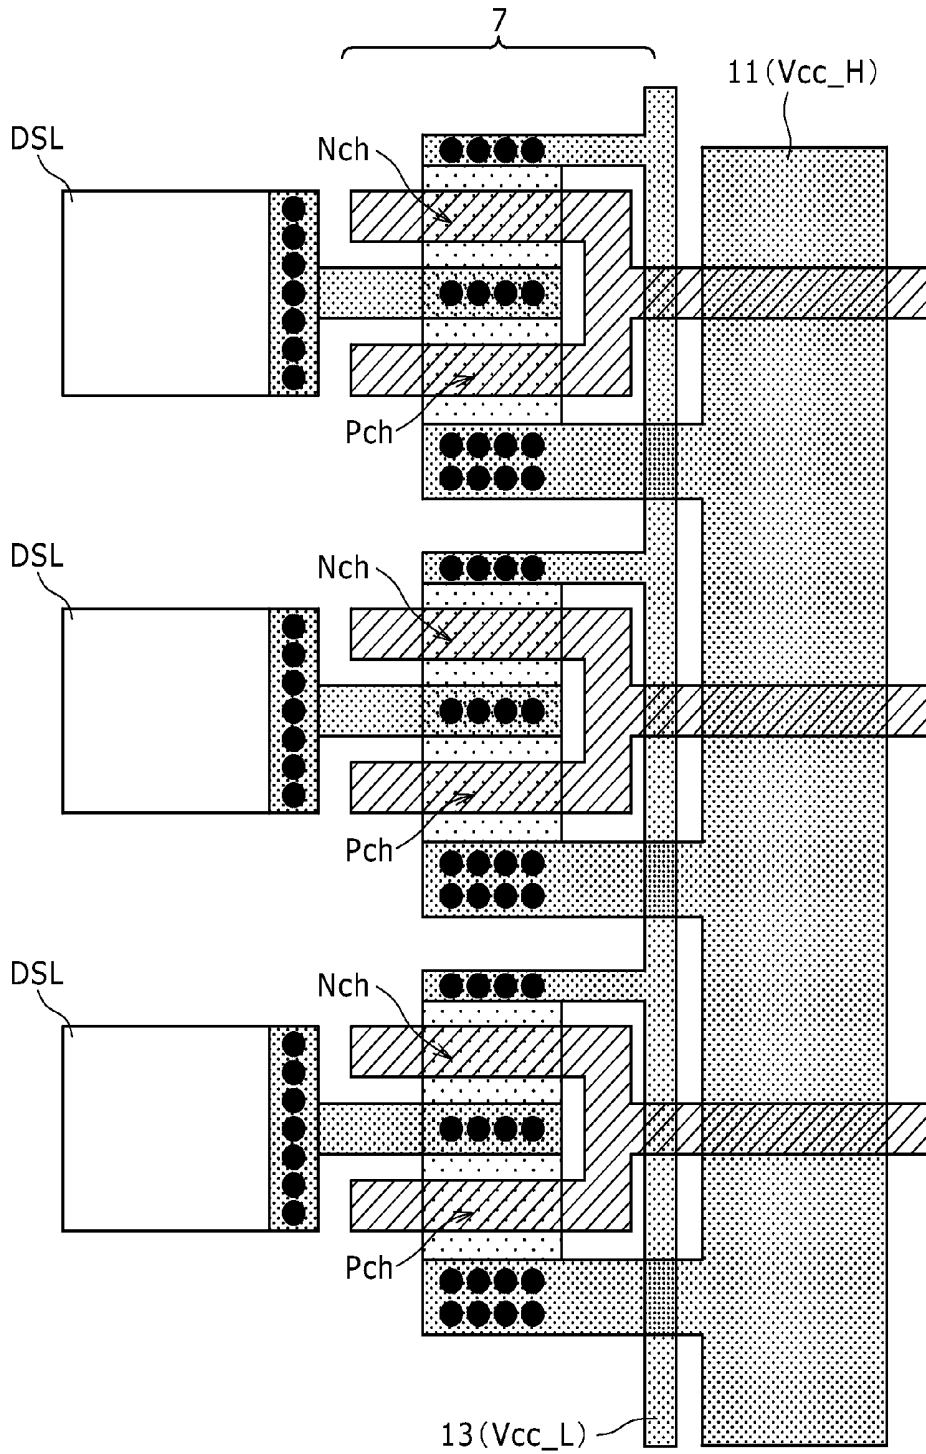


FIG. 14

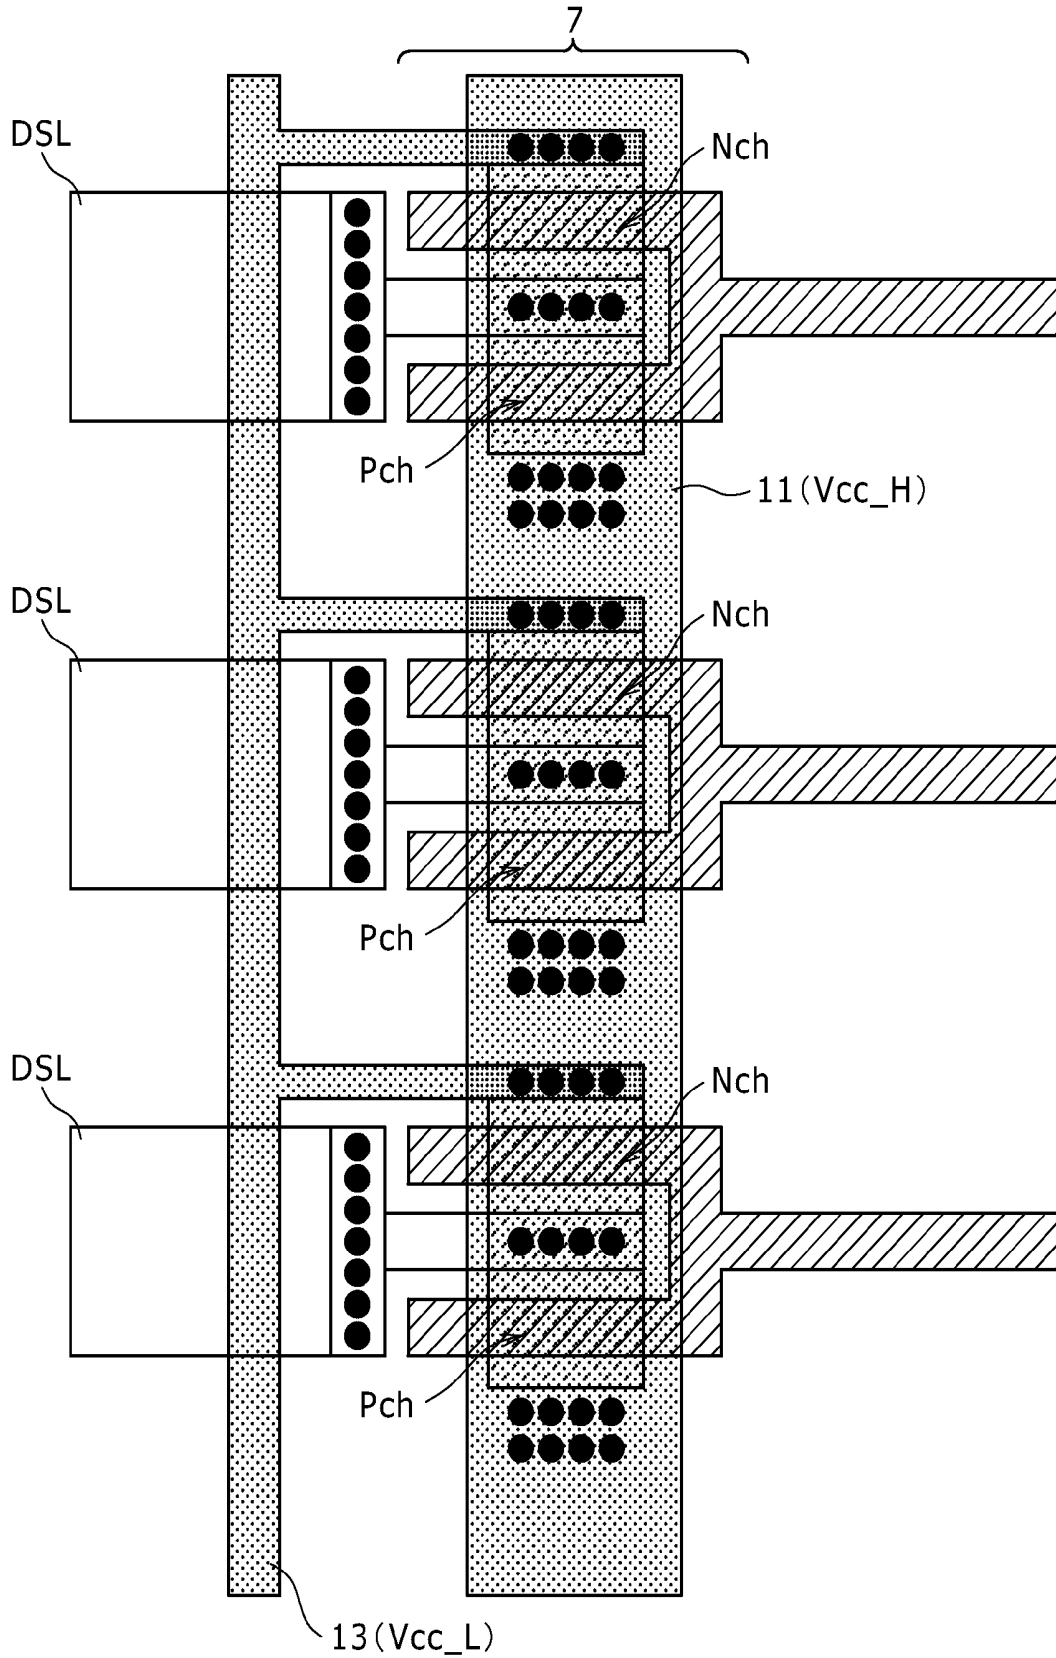


FIG. 15

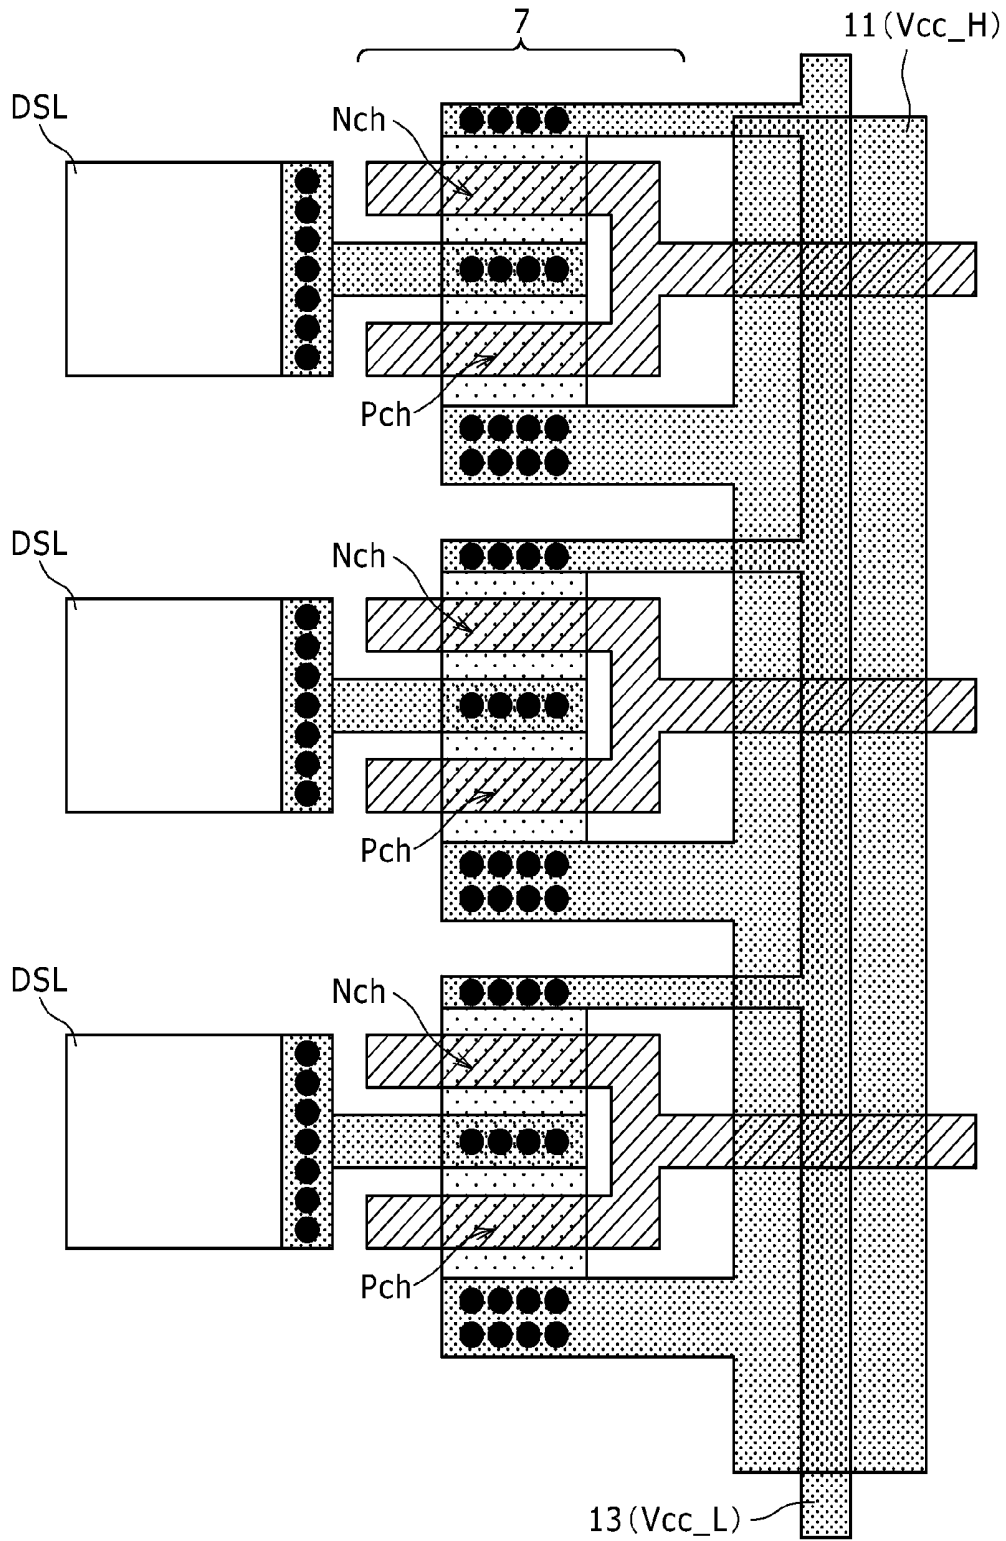


FIG. 16

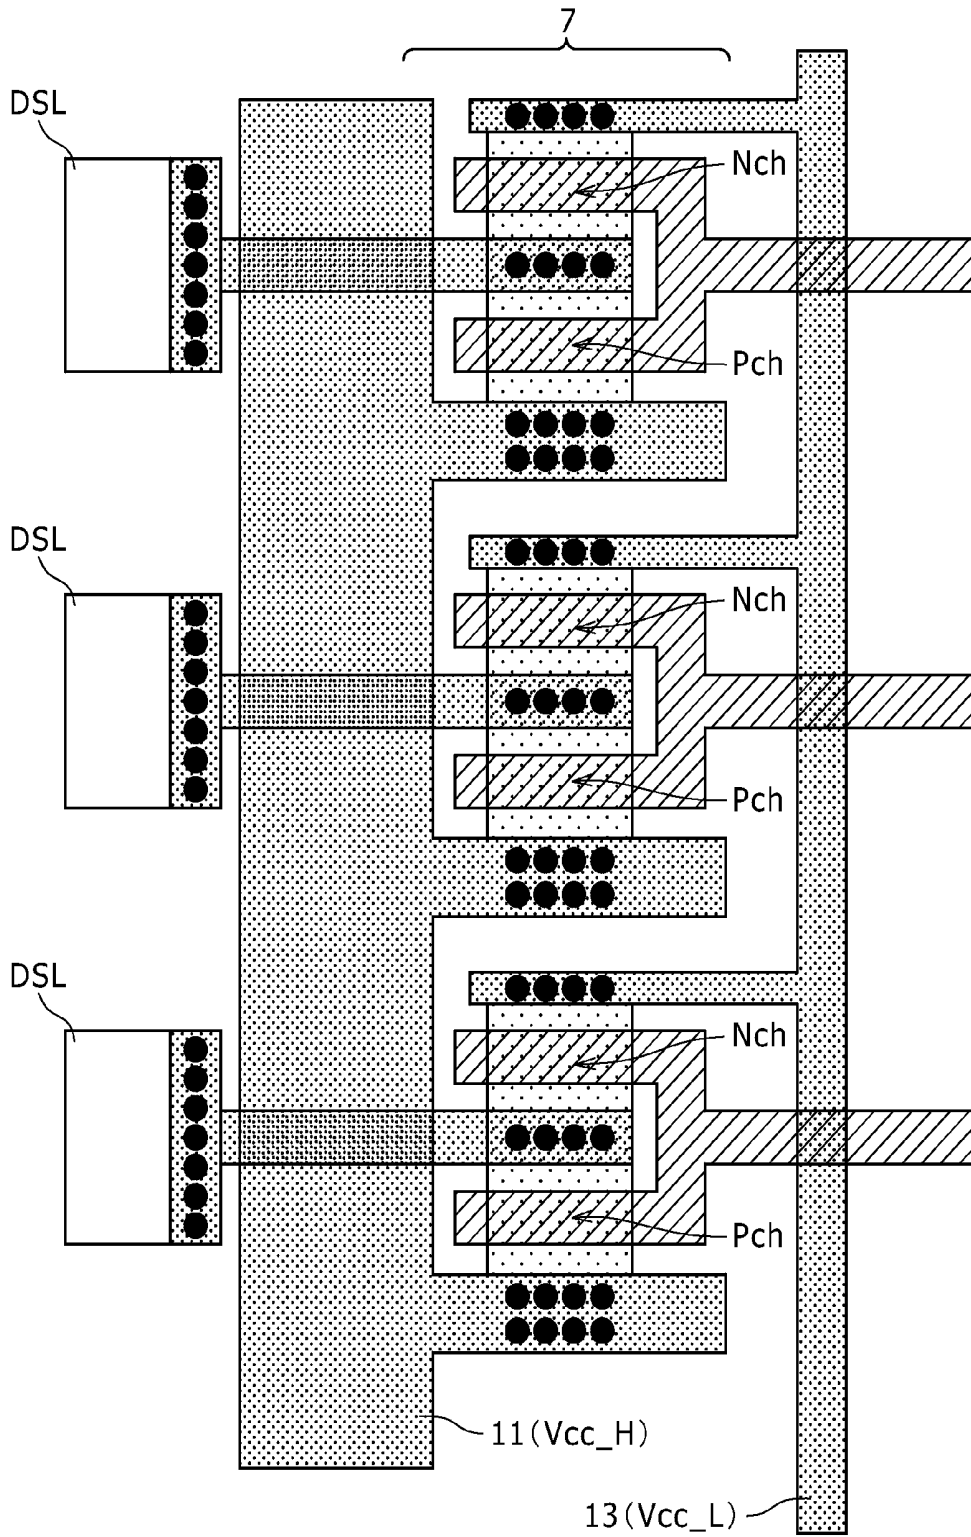


FIG. 17

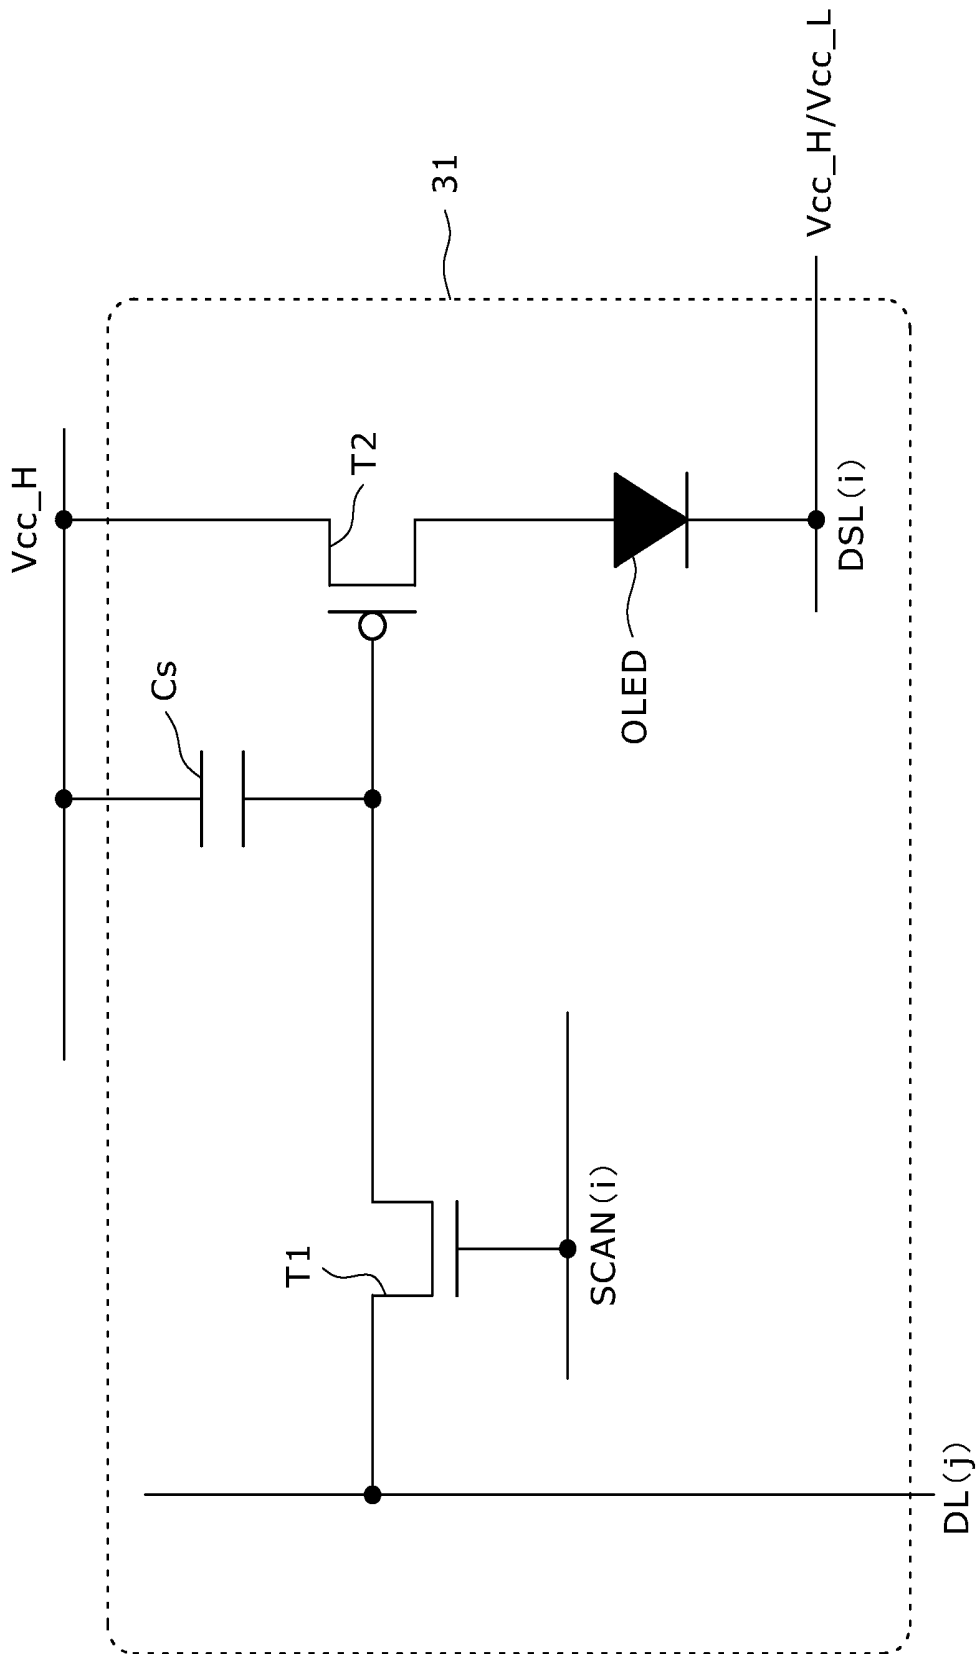


FIG. 18

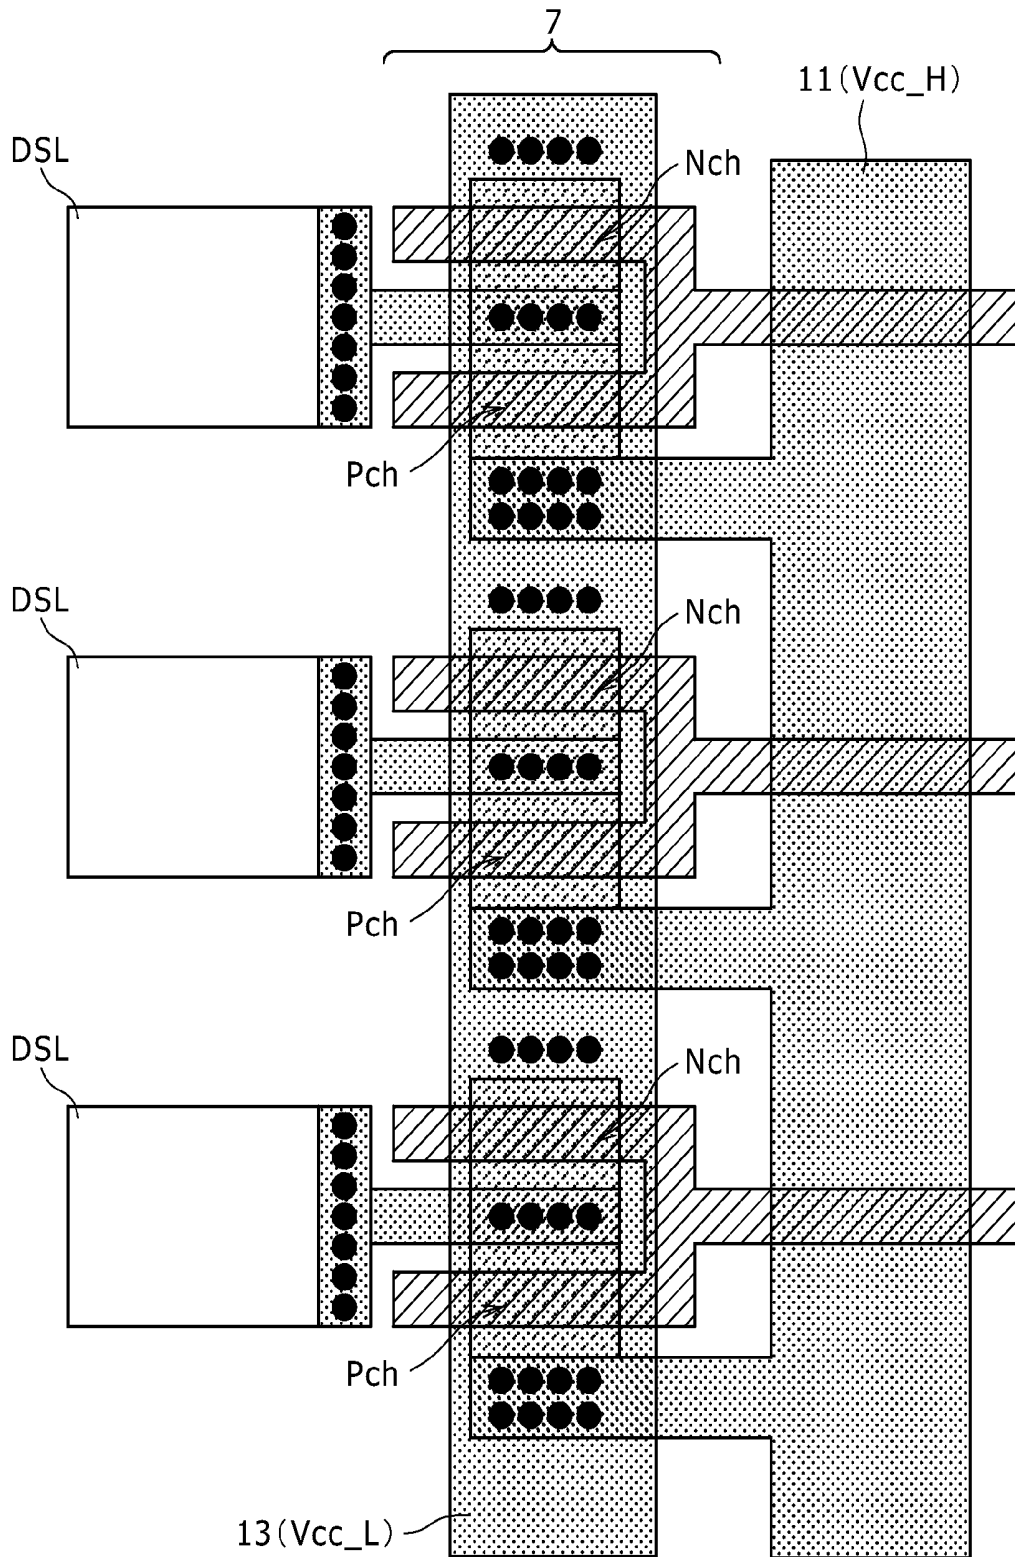


FIG. 19

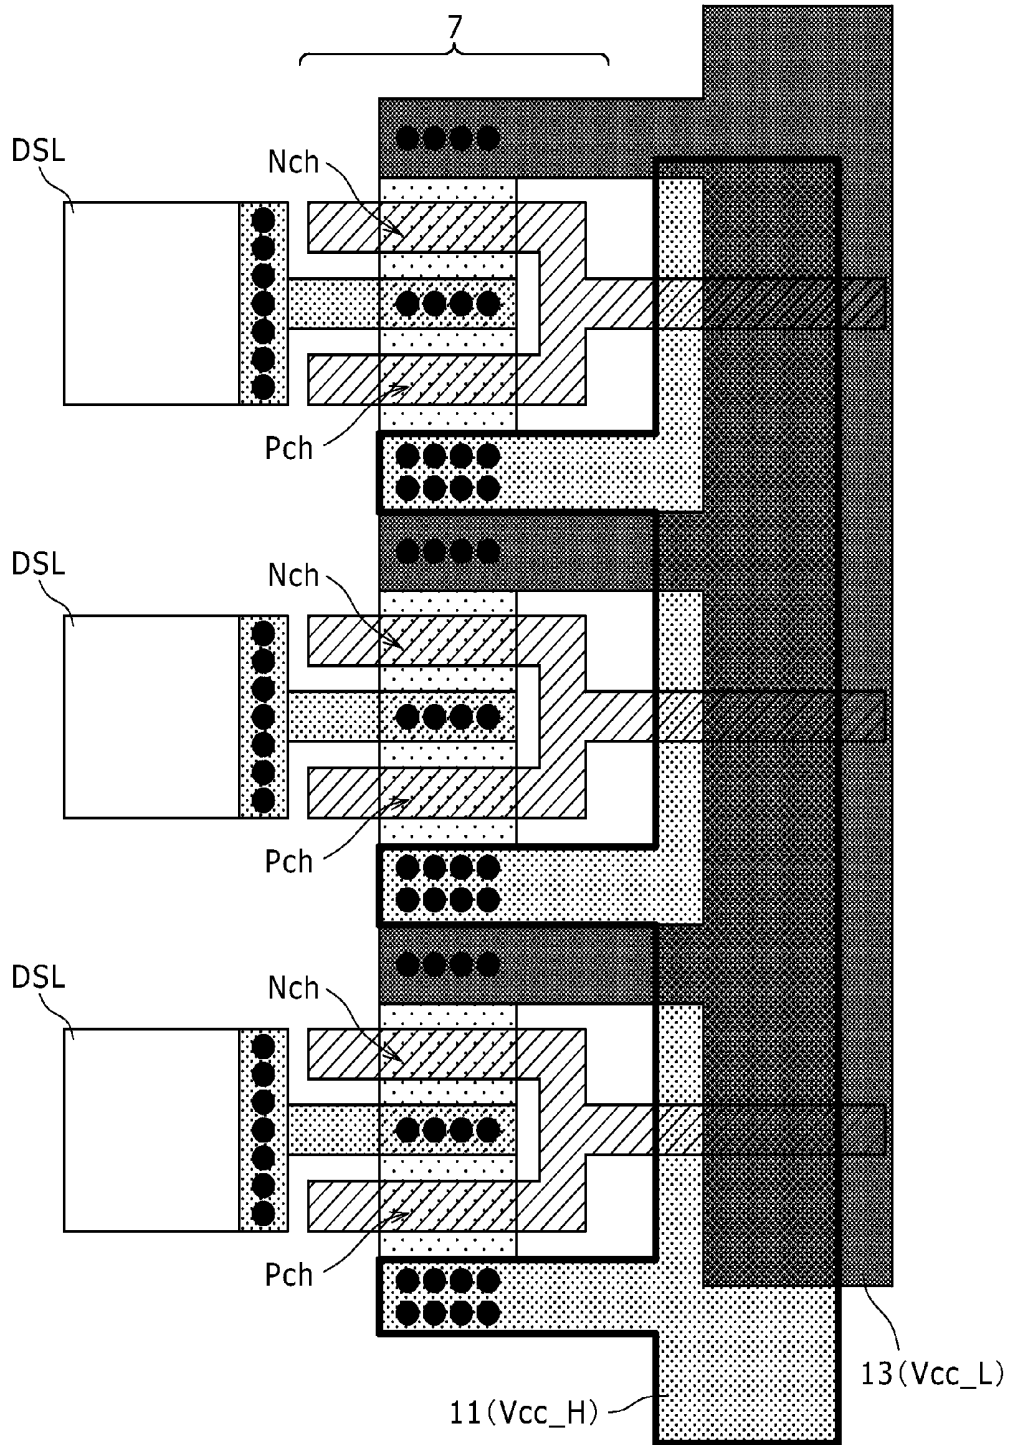


FIG. 20

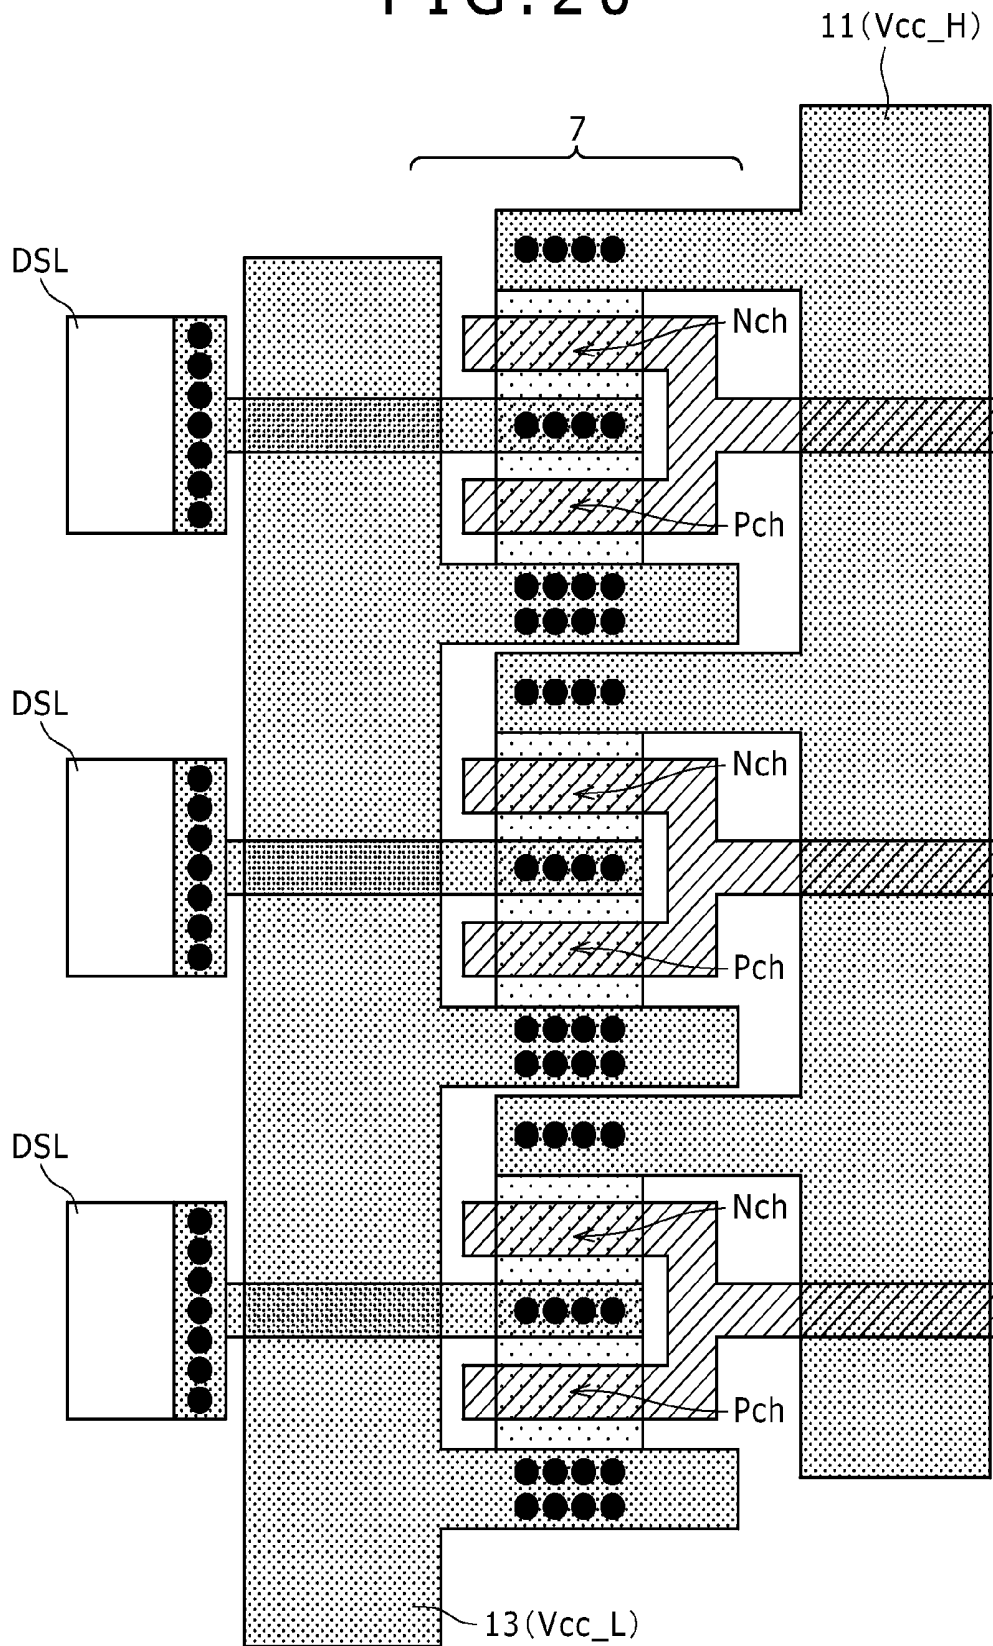


FIG. 21

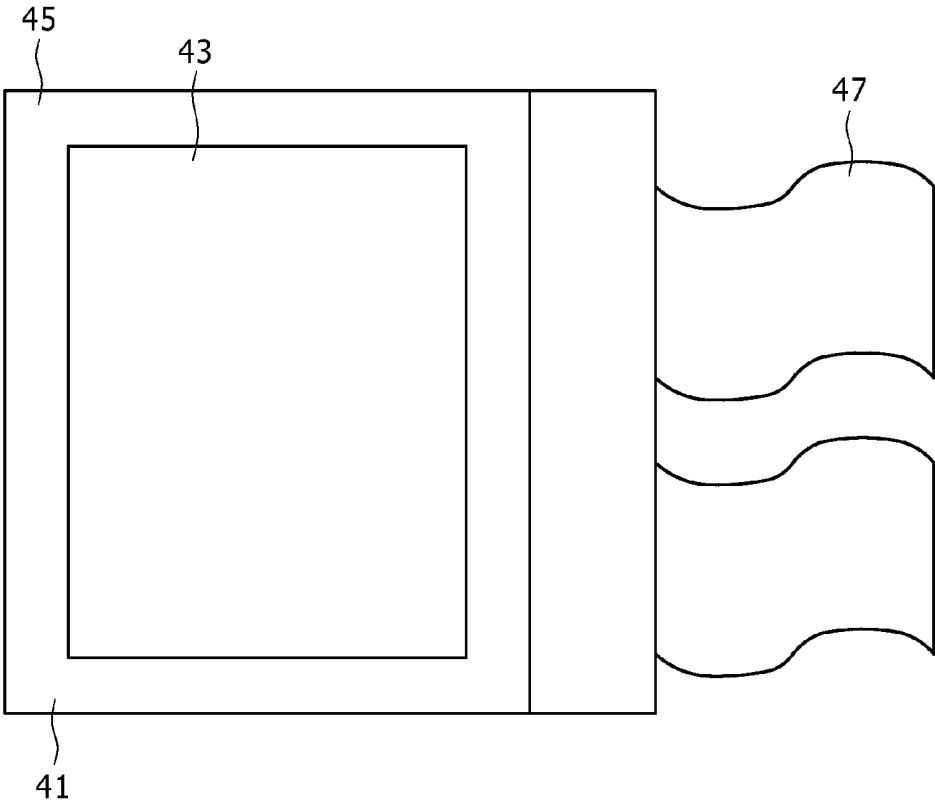


FIG. 22

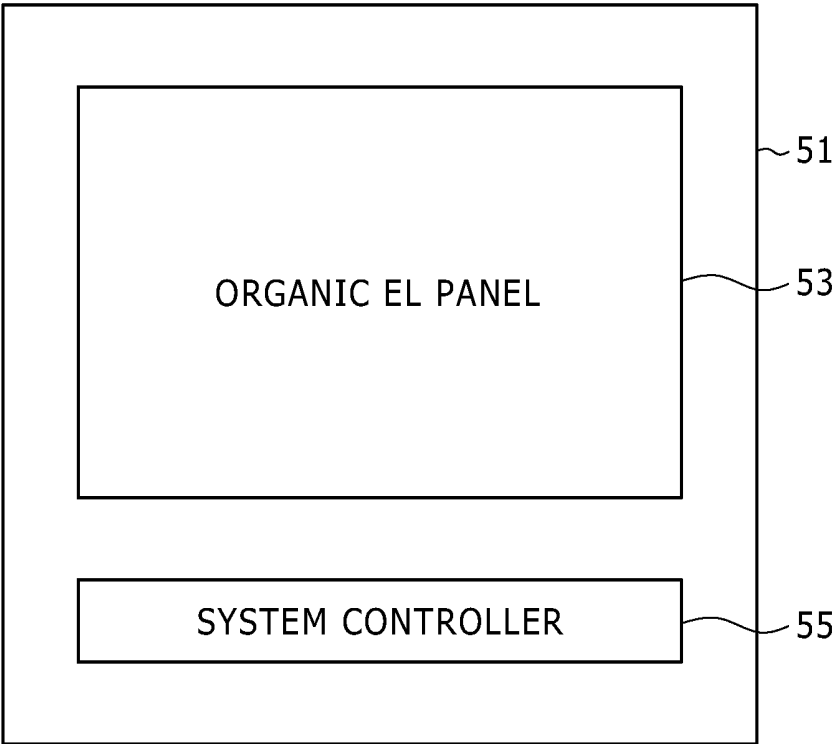


FIG. 23

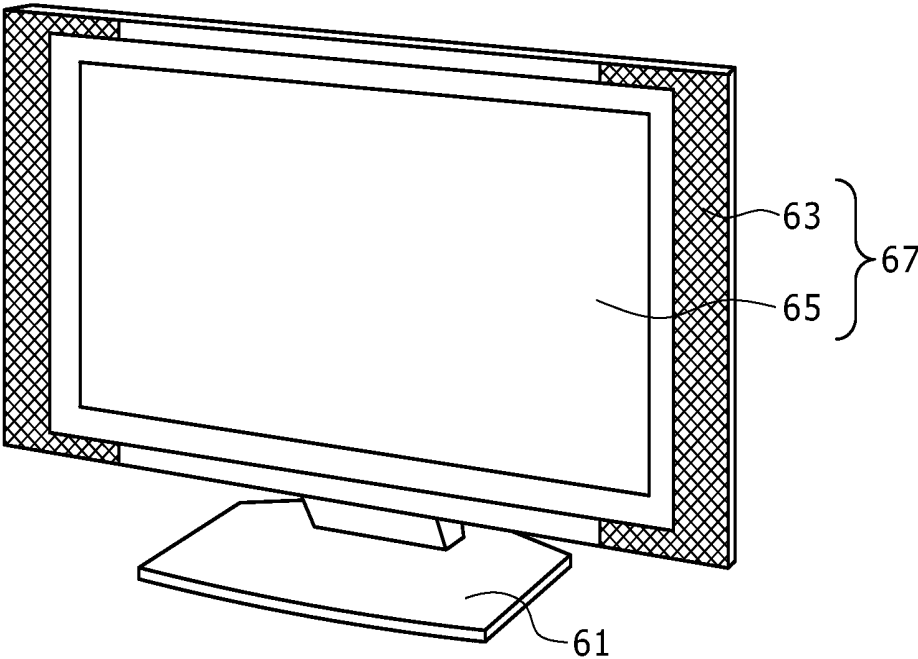


FIG. 24A

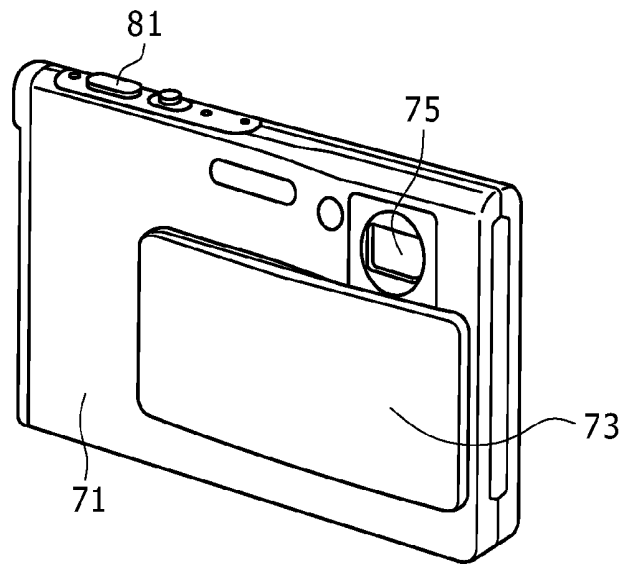


FIG. 24B

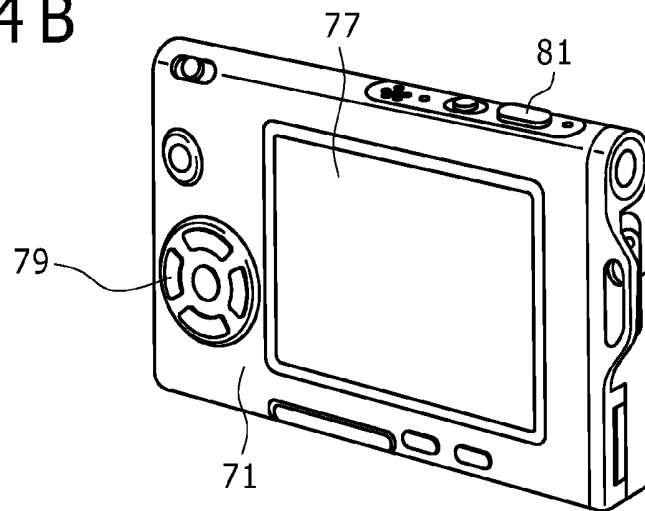


FIG. 25

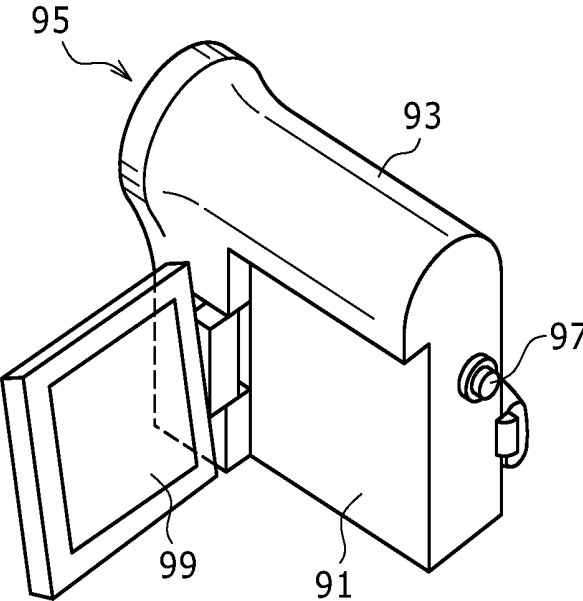


FIG. 26A

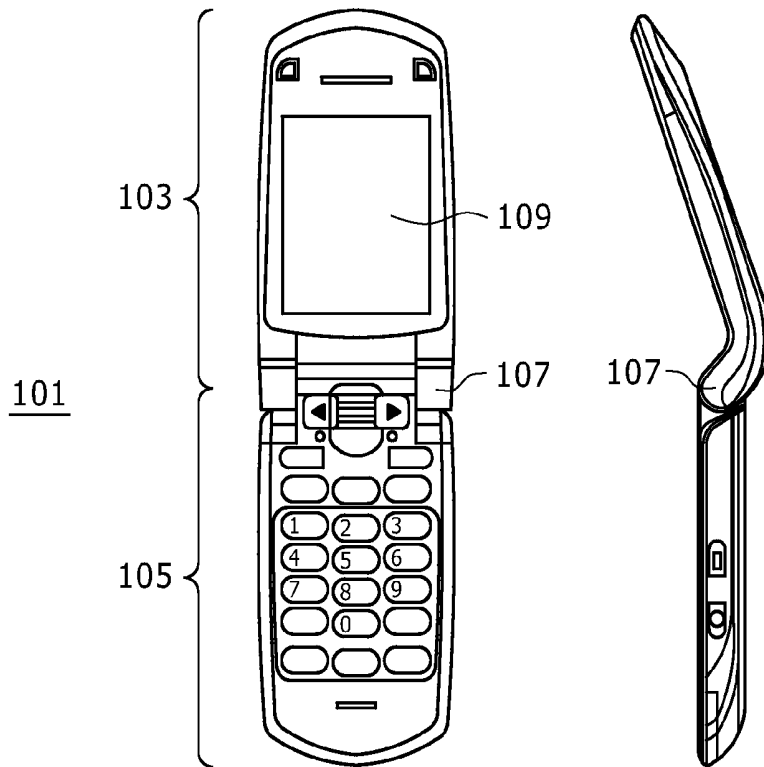


FIG. 26B


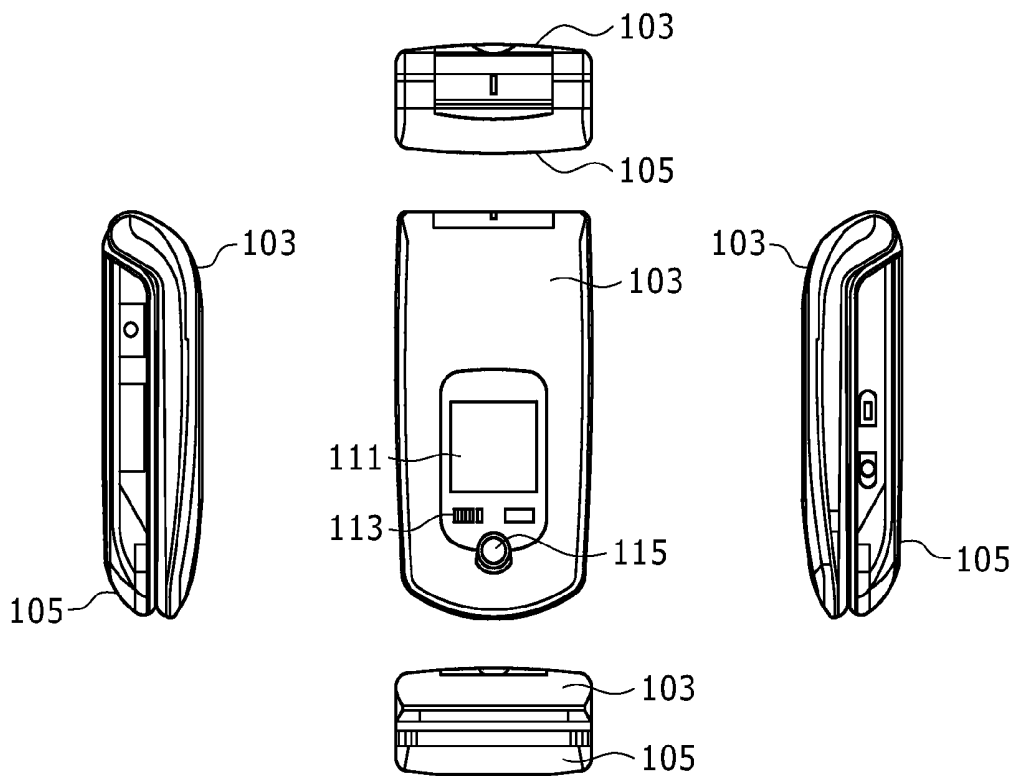


FIG. 27

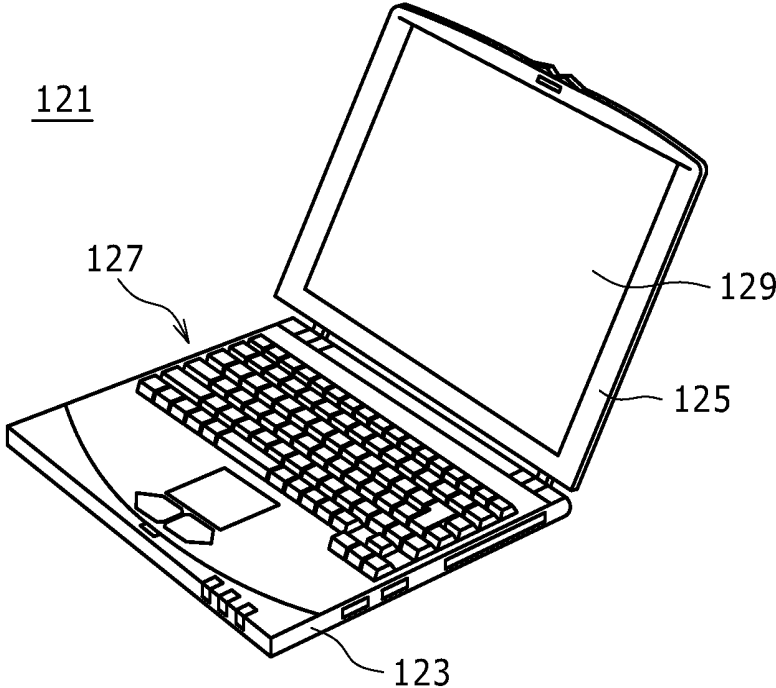

EL DISPLAY PANEL, POWER SUPPLY LINE DRIVE APPARATUS, AND ELECTRONIC DEVICE

CROSS REFERENCES TO RELATED APPLICATIONS

This is a Continuation Application of U.S. application Ser. No. 13/589,609, filed on Aug. 20, 2012, which is a Continuation Application of U.S. application Ser. No. 12/213,143, filed Jun. 16, 2008, now U.S. Pat. No. 8,269,696, issued on Sep. 18, 2012. The present invention contains subject matter related to Japanese Patent Application JP 2007-173590 filed in the Japan Patent Office on Jun. 30, 2007, the entire contents of which being incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a technology for enhancing the yield of EL (Electro Luminescence) display panels and has modes of as an EL display panel, a power supply line drive apparatus, and an electronic device. It should be noted that the EL display panel denotes a self-illuminant display apparatus with EL devices arranged in matrix on a substrate made of glass or other materials.

2. Description of the Related Art

Recently, organic EL panels on which organic EL devices are arranged in matrix have been drawing attention. This is because organic EL panels are excellent in moving picture display characteristics as well as easy in reducing apparatus weight and film thickness.

Currently, two organic EL panel driving schemes are available; passive matrix driving and active matrix driving. Especially, organic EL panels based on the active matrix driving in which an active element (a thin-film transistor) and a hold capacity are arranged for every pixel circuit are under brisk development.

The following shows documents associated with the active matrix driving, for example.

Patent Document 1: Japanese Patent Laid-Open No. 2003-255856

Patent Document 2: Japanese Patent Laid-Open No. 2003-271095

Patent Document 3: Japanese Patent Laid-Open No. 2004-029791

Patent Document 4: Japanese Patent Laid-Open No. 2004-093682

As shown in the above-mentioned Patent Documents, the active matrix driving is of various types. Described in what follows is one of these driving schemes that controls the on state and the off state of each organic EL device by digitally driving one of two power supply lines for supplying a power supply potential to each pixel circuit.

Now, referring to FIG. 1, there is shown an exemplary pixel circuit of the above-mentioned type. A pixel circuit 1 is made up of two N-type thin-film transistors T1 and T2. Of these two transistors, the thin-film transistor T1 is a switching transistor that controls writing of a signal line voltage Vsig to a storage capacity Cs.

On the other hand, the thin-film transistor T2 is a driving transistor that supplies drive current Ids of a magnitude corresponding to a hold voltage Vgs of a storage capacity Cs to an organic EL device D1. The thin-film transistors T1 and T2 are connected to a signal line as follows.

A gate electrode of the thin-film transistor T1 is connected to a scan line SCNL(i) (i being a serial number indicative of

row position) that gives a signal line potential write timing. In FIG. 1, a write timing signal is indicated by SCNL(i).

One main electrode of the thin-film transistor T1 is connected to a signal line DL(j) (j being a serial number indicative of a column position) and the other main electrode is connected to a gate electrode of the thin-film transistor T2 and an electrode of the storage capacity Cs.

One main electrode of the thin-film transistor T2 is connected to a drive power supply line DSL(i) (i being a serial number indicative of row position) and the other main electrode is connected to a positive electrode (or an anode electrode) of an organic EL device OLED. In FIG. 1, power supply potential of a high potential (also referred to as a high power supply potential) to be applied to a drive power supply line DSL(i) is indicated by Vcc_H and a power supply potential of low potential (also referred to as a low power supply potential) is indicated by Vcc_L1.

It should be noted that a negative electrode (or a cathode electrode) of the organic EL device OLED is connected to a common power supply line (or a ground line). In FIG. 1, a power supply potential of low potential to be applied to the common power supply line is indicated by Vcc_L2. Meanwhile, the organic EL device OLED is a current-driven element. Therefore, it is desired to flow a current (I*n) obtained by multiplying current I flowing through one pixel circuit by the number of pixels (or n times) to the drive power supply line DSL(i) that is emitting light.

Hence, a wiring resistance of the drive power supply line DSL(i) located on a route along which the power supply potential of high potential is supplied has to be relatively small. If the wiring resistance is large, a voltage drop difference occurs across the drive power supply line DSL(i) to cause problems of a luminance difference depending on the location of scan line and generating heat in the power supply line, for example.

If the number of stages of scan lines making up a valid display area is V, then it is desired to flow current (I*n*V) obtained by multiplying the number of pixels (n times) of current I flowing to one pixel circuit by the number of stages (V times) to a high-potential power supply line that supplies high-potential power supply potential Vcc_H to each drive power supply line DSL(i).

Consequently, it is technically necessary for both the drive power supply line DSL(i) and the high-potential power supply line to be relatively large in wiring width so as to lower the wiring resistance. The following describes these technological requirements with reference to FIGS. 2 and 3. FIG. 2 shows a connection relationship between the pixel circuit 1 and a power supply line drive circuit 3. FIG. 3 shows a wiring pattern of a connected portion between the drive power supply lines DSL and a power supply line drive circuit 7 (or an output stage buffer circuit).

The power supply line drive circuit 3 is made up of a shift register 5 that transfers a power supply line drive pulse to a next scan line for each horizontal scan interval and a buffer circuit 7 (2-stage configuration of input-stage buffer circuit and output-stage buffer circuit).

The two stages of buffer circuits making up the buffer circuit 7 are each configured by a CMOS inverter circuit. In the case of FIG. 2, each p-channel MOS transistor is connected to a high-potential power supply line 11 and each n-channel MOS transistor is connected to a low-potential power supply line 13.

Consequently, if the power supply drive pulse is at H level, high-potential power supply potential Vcc_H is supplied to the drive power supply line DSL(i); if the power supply line

drive pulse is at L level, low-potential power supply potential Vcc_L is supplied to the drive power supply line DSL(i).

Meanwhile, if the drive power supply line DSL(i) wide in wiring and the high-potential power supply line 11 are arranged in a crossed manner, a resultant cross area becomes wide. And, this cross appears for every drive power supply line DSL(i). Therefore, let one cross area be S, then a cross area of the entire organic EL panel becomes as large as S*V (V being the number of scan lines or the number of vertical resolutions).

Thus, the wiring pattern shown in FIG. 3 that may not avoid the increase in cross area involves a problem of causing an inter-layer short circuit due to dust or the like. This, in turn, may raise the defect rate of organic EL panels. In addition, the above-mentioned wiring pattern causes an increased capacity that is parasitic to the cross portion, thereby increasing the distortion of a potential waveform of the drive power supply line DSL(i).

SUMMARY OF THE INVENTION

(1) Layout Pattern 1

In carrying out the invention and according to one mode thereof, there is provided an EL (Electro Luminescence) display panel having:

(a) a pixel circuit, arranged on a pixel array block in matrix, configured to drivingly control an electro-luminescence element by active matrix driving;

(b) a signal line configured, connected to the pixel circuit of the pixel array block in unit of row, to supply pixel data corresponding to each pixel circuit to each pixel circuit in column unit, the signal line being provided in a number equal to the number of columns;

(c) a scan line, connected to the pixel circuit of the pixel array block, configured to control a timing of writing pixel data to each pixel circuit in row unit, the scan line being provided in a number equal to the number of row;

(d) a drive power supply line, connected to the pixel circuit of the pixel array block, configured to control a light-on state and a light-off of the pixel circuit in row unit by two types of power supply potentials, a high potential and a low potential, the drive power supply line being provided in a number equal to the number of row;

(e) a common power supply line, commonly connected to all pixel circuits of the pixel array, configured to supply the high-potential power supply potential in a fixed manner;

(f) a power supply line drive circuit configured to supply one of the high-potential power supply potential and the low-potential power supply potential to corresponding the drive power supply line on the basis of a power supply drive pulse;

(g) a high-potential power supply line arranged at a position where the high-potential power supply line does not cross the drive power line, the high-potential power supply line being a high-potential power supply line supplying a high-potential power supply potential to the power supply line drive circuit; and

(h) a low-potential power supply line configured to supply a low-potential power supply potential to the power supply line drive circuit.

(2) Layout Pattern 2

In carrying out the invention and according to another mode thereof, there is provided an EL display panel having:

(a) a pixel circuit, arranged on a pixel array block in matrix, configured to drivingly control an electro-luminescence element by active matrix driving;

(b) a signal line, connected to the pixel circuit of the pixel array block in unit of row, configured to supply pixel data corresponding to each pixel circuit to each pixel circuit in column unit, the signal line being provided in a number equal to the number of columns;

(c) a scan line, connected to the pixel circuit of the pixel array block, configured to control a timing of writing pixel data to each pixel circuit in row unit, the scan line being provided in a number equal to the number of row;

(d) a drive power supply line, connected to the pixel circuit of the pixel array block, configured to control a light-on state and a light-off of the pixel circuit in row unit by two types of power supply potentials, a high potential and a low potential, the drive power supply line being provided in a number equal to the number of row;

(e) a common power supply line, commonly connected to all pixel circuits of the pixel array, configured to supply the low-potential power supply potential in a fixed manner;

(f) a power supply line drive circuit configured to supply one of the high-potential power supply potential and the low-potential power supply potential to corresponding the drive power supply line on the basis of a power supply drive pulse;

(g) a low-potential power supply line configured to supply a low-potential power supply potential to the power supply line drive circuit, the low-potential power supply line being wired at a position where the low-potential power supply line does not cross the drive power supply line; and

(h) a high-potential power supply line configured to supply a high-potential power supply potential to the power supply line drive circuit, the high-potential power supply line being wired at a position where the high-potential power supply line does not cross the drive power supply line.

As described and according to the invention, use of the layout patterns proposed herein can eliminate the cross between a drive power supply line that is drivingly controlled in a binary manner by a high-potential power supply and a low-potential power supply and a high-potential power supply line. This novel configuration minimizes the possibility of causing an inter-layer short circuit due to dust or the like, thereby significantly enhancing the yield of in manufacturing EL panels.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a circuit diagram illustrating an exemplary pixel circuit;

FIG. 2 is a circuit diagram illustrating a connection relationship of pixel circuit and drive power supply circuit;

FIG. 3 is a schematic diagram illustrating wiring patterns of connection portions between drive power supply line and power supply line drive circuit;

FIG. 4 is a circuit diagram illustrating an exemplary configuration of a display panel of active matrix drive type;

FIG. 5 is a timing chart indicative of an example of active matrix drive operation of a pixel circuit using a power supply line;

FIG. 6A is a circuit diagram illustrating a state in the pixel circuit corresponding to period (A) of FIG. 5;

FIG. 6B is a circuit diagram illustrating a state in the pixel circuit corresponding to period (B) of FIG. 5;

FIG. 6C is a circuit diagram illustrating a state in the pixel circuit corresponding to period (C) of FIG. 5;

FIG. 6D is a circuit diagram illustrating a state in the pixel circuit corresponding to period (D) of FIG. 5;

FIG. 6E is a circuit diagram illustrating a state in the pixel circuit corresponding to period (E) of FIG. 5;

FIG. 6F is a circuit diagram illustrating a state in the pixel circuit corresponding to period (F) of FIG. 5;

FIG. 6G is a circuit diagram illustrating a state in the pixel circuit corresponding to period (G) of FIG. 5;

FIG. 6H is a circuit diagram illustrating a state in the pixel circuit corresponding to period (H) of FIG. 5;

FIG. 7 is a graph indicative of a relationship of data voltage and drain current with none of threshold correction and mobility correction executed;

FIG. 8 is a graph indicative of a relationship of data voltage and drain current with merely threshold correction executed;

FIG. 9 is a graph indicative of a relationship of data voltage and drain current with both threshold correction and mobility correction executed;

FIG. 10 is a schematic diagram illustrating a layout pattern corresponding to pattern example 1;

FIG. 11 is a schematic diagram illustrating a layout pattern corresponding to pattern example 2;

FIG. 12 is a schematic diagram illustrating a layout pattern corresponding to pattern example 3;

FIG. 13 is a schematic diagram illustrating a layout pattern corresponding to pattern example 4;

FIG. 14 is a schematic diagram illustrating a layout pattern corresponding to pattern example 5;

FIG. 15 is a schematic diagram illustrating a layout pattern corresponding to pattern example 6;

FIG. 16 is a schematic diagram illustrating a layout pattern corresponding to pattern example 7;

FIG. 17 is a circuit diagram illustrating another exemplary pixel circuit;

FIG. 18 is a schematic diagram illustrating a layout pattern corresponding to pattern example 8;

FIG. 19 is a schematic diagram illustrating a layout pattern corresponding to pattern example 9;

FIG. 20 is a schematic diagram illustrating a layout pattern corresponding to pattern example 10;

FIG. 21 is a schematic diagram illustrating an exemplary configuration of a display module;

FIG. 22 is a schematic diagram illustrating an exemplary functional configuration of electronic equipment;

FIG. 23 is a schematic diagram illustrating an exemplary electronic equipment product;

FIGS. 24A and 24B are schematic diagrams illustrating an exemplary electronic equipment product;

FIG. 25 is a schematic diagram illustrating an exemplary electronic equipment product;

FIGS. 26A and 26B are schematic diagrams illustrating an exemplary electronic equipment product; and

FIG. 27 is a schematic diagram illustrating an exemplary electronic equipment product.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

This invention will be described in further detail by way of embodiments thereof, organic EL (Electro Luminescence) panels of active matrix type, with reference to the accompanying drawings. It should be noted that any portion that is not illustrated or written herein is applied with known technologies in the technical field concerned. It should also be noted that the embodiments described below are illustrative only and therefore not limited thereto.

(A) Structure Of The Organic EL Panel

Now, referring to FIG. 4, there is shown an exemplary structure of an organic EL panel for realizing active matrix driving of the pixel circuit 1 by driving, in a binary manner,

one of two power supply lines for supplying a power supply potential to the pixel circuit 1.

An organic EL panel 21 is mainly made up of a pixel array block 23, a scan line drive circuit 25, a power supply line drive circuit 27 (corresponding to reference numeral 3 shown in FIG. 2), and a data line drive circuit 29. In the present embodiment, the pixel array block 23 with the pixel circuit 1 arranged in matrix in accordance with a screen resolution is for color display and arranged inside a valid screen accordance with the arrangement of luminescent color.

However, if an organic EL device having a structure in which organic luminescent layers of two or more colors are laminated makes up the pixel circuit 1, one pixel circuit 1 corresponds to two or more luminescent colors. The scan line drive circuit 25 is a circuit device configured to give, in a row unit (or a scan line unit) a write timing of a signal potential applied to signal line DL(j) to the pixel circuit 1.

It should be noted that a write timing signal is supplied to scan line SCNL(i) of a next stage for each horizontal scan interval.

The power supply line drive circuit 27 is a circuit device configured to drivingly control drive power supply line DSL(i). As described with reference to FIG. 2, the power supply line drive circuit 27 is made up of the shift register 5 corresponding to each scan line and a power supply line drive circuit 7.

It is possible for the power supply line drive circuit 27 to be formed not merely integrally on a same substrate as the pixel array block 23 but also as a device module discrete from the organic EL panel 21. A detail configuration of this power supply line drive circuit 27 will be described later.

The data line drive circuit 29 is a circuit device configured to drivingly control signal line DS(j). A signal voltage to be applied to signal line DL(j) is a threshold voltage V_0 of corrective operation to be described later or a pixel position data voltage V_{sig} to be specified by a write timing signal.

(B) Drive Operation Of The Pixel Circuit

Referring to FIG. 5, there is shown an exemplary active matrix driving of the pixel circuit 1 by use of a power supply line. In the drive operation example shown in FIG. 5, a threshold correction operation and a mobility correction operation of the thin-film transistor T2 operating as a drive transistor are executed within one horizontal scan period (1H).

It should be noted that FIG. 5 shows potential changes of scan line SCNL(i), signal line DL(j), and drive power supply line DSL(i) along the same time axis. FIG. 5 also shows a change of gate potential V_g and a change of source potential V_s of the thin-film transistor T2 accompanying the potential changes of these lines. Besides, FIG. 5 shows a transition of potential changes, in 8 periods of (A) through (H) for the purpose of convenience.

(i) Light Emission Period

In period (A), the organic EL device OLED is in a light-emitting state. After this period, a new field of line sequential scan starts.

(ii) Threshold Correction Preparation Period

When a new field starts, a preparation for threshold correction is executed over periods (B) and (C). In period (B), drain current supply to the organic EL device OLED is stopped, upon which the organic EL device OLED stops emitting light. At this moment, the light-emitting voltage V_{el} of the organic EL device OLED undergoes a transition so as to draw toward zero.

In accordance with this drop of light-emitting voltage V_{el} , the source potential V_s of the thin-film transistor T2 makes a transition to almost the same potential as lower power supply potential V_{cc_L} for initialization. It should be noted that the

gate potential V_g of the thin-film transistor T2 is initialized to reference potential V_0 that is applied along the signal line DL(j) in the following period (C).

Executing these two initializing operations complete the initialization setting of the hold voltage of the hold capacity Cs. Namely, the hold voltage of the hold capacity Cs is initialized to a voltage ($V_0 - V_{cc_L}$) larger than the threshold voltage V_{th} of the thin-film transistor T2. This is a threshold correction preparing operation.

(iii) Threshold Correcting Operation

Subsequently, a threshold correcting operation is executed for period (D). In this period (D) too, the reference potential V_0 is given to the gate potential V_g . In this state, a high power supply potential V_{cc_H} is applied to the drive power supply line DSL(i).

As a result, the drain current flows to the signal line DL(j) through the hold capacity Cs to lower hold voltage V_{gs} of the hold capacity Cs. Accordingly, the source potential V_s of the thin-film transistor T2 rises.

It should be noted that the drop of the hold voltage V_{gs} of the hold capacity Cs stops when the hold voltage V_{gs} reaches the threshold voltage V_{th} upon which the thin-film transistor T2 cuts off. Thus, the threshold correcting operation for setting the hold voltage V_{gs} of the hold capacity Cs to the threshold voltage V_{th} unique to the thin-film transistor T2 is completed.

(iv) Signal Potential Write and Mobility Correction Preparing Operation

When a threshold correcting operation has been completed, a preparation for signal write and mobility correction is executed over periods (E) and (F). It should be noted that this preparing operation may be omitted. In period (E), the drive potential of scan line SCNL(i) is switched to low to float the thin-film transistor T2.

In period (F), the data voltage V_{sig} corresponding to pixel data is applied to the signal line DL(j). This period (F) is provided in consideration of a delay in the rise of the signal line potential due to the effect of the capacity component parasitic to the signal line DL(j). The existence of this period allows a write operation to be started with the potential of the signal line DL(j) stabilized in the next period (G).

(v) Signal Potential Write and Mobility Correcting Operation

In period (G), a signal potential write operation and a mobility correcting operation are executed. Namely, the drive potential of the scan line SCNL(i) is switched to high, applying the data potential V_{sig} to the gate potential of the thin-film transistor T2. When the data potential V_{sig} is applied, the hold voltage V_{gs} held in the hold capacity Cs makes a transition to $V_{sig} + V_{th}$. Thus, because the hold voltage V_{gs} gets larger than the threshold voltage V_{th} , the thin-film transistor T2 is turned on.

When the thin-film transistor T2 has been turned on, the drain current starts flowing to the organic EL device OLED. However, in the stage where the drain current starts flowing, the organic EL device OLED is still in a cutoff state (or high impedance). Therefore, in proportion to the mobility of the thin-film transistor T2, the drain current flows so as to charge parasitic capacity C0 of the organic EL device OLED.

The anode potential of the organic EL device OLED (namely, the source potential V_s of the thin-film transistor T2) rises by the charge voltage ΔV of this parasitic capacity C0. By this charge voltage ΔV , the hold voltage V_{gs} of the hold capacity Cs lowers. Namely, the hold voltage V_{gs} changes to $V_{sig} + V_{th} - \Delta V$. Thus, an operation in which the hold voltage V_{gs} is corrected by the charge voltage ΔV of the parasitic capacity C0 corresponds to the mobility correcting operation.

It should be noted that a bootstrap operation of the hold capacity Cs raises the gate potential V_g of the thin-film transistor T2 by the same rise as that of the source potential V_s . To be more precise, the gate potential V_g rises by a potential obtained by multiplying the rise of the source potential V_s by gain g (<1).

(vi) Light-Emitting Period

In period (H), the drive potential of the scan line SCNL(i) is changed to low to put the gate electrode of the thin-film transistor T2 into a floating state. At this moment, the thin-film transistor T2 supplies a drain current equivalent to hold voltage V_{gs} after mobility correction ($=V_{sig} + V_{th} - \Delta V$) to the organic EL device OLED.

Consequently, the organic EL device OLED starts light emission. At this moment, the anode potential (the source potential V_s of the thin-film transistor T2) of the organic EL device OLED rises to the light-emitting voltage V_{el} in accordance with the magnitude of the drain current. At this moment, the gate potential V_g of the thin-film transistor T2 also rises by the light-emitting voltage V_{el} by the bootstrap operation of the hold capacity Cs. The gate potential V_g rises by a potential obtained by multiplying the rise of the source potential V_s by gain g (<1).

(C) Changes Of Connection State And Potential In Pixel Circuit

The following schematically describes the potential state changes inside the pixel circuit 1 corresponding to the period described with reference to FIG. 5. The following description is made by use of same reference numbers as the corresponding periods. Namely, the following description is made with reference to FIGS. 6A through 6H. It should be noted that, with FIGS. 6A through 6H, the thin-film transistor T1 that operates as a sampling transistor is indicated as a switch and the parasitic capacity of the organic EL device OLED is explicitly indicated as C0.

(i) Light-Emitting Period

FIG. 6A shows corresponds to an operation state of period (A) shown in FIG. 5. In period (A) that is a light-emitting period, high power supply potential V_{cc_H} for light emitting is applied to the drive power supply line DSL (i). At this moment, the thin-film transistor T2 supplies drain current I_{ds} corresponding to the hold voltage V_{gs} ($>V_{th}$) of the hold capacity Cs to the organic EL device OLED. The light-emitting state of the organic EL device OLED continues until the end of period (A).

(ii) Threshold Correction Preparing Period

FIG. 6B corresponds to an operation state of period (B) shown in FIG. 5. In period (B), the potential of the drive power supply line DSL(i) is switched from the light-emitting high power supply potential V_{cc_H} to the low power supply potential V_{cc_L} . This switching blocks the supplying of drain current I_{ds} .

As a result, the gate potential V_g and the source potential V_s of the thin-film transistor T2 lower in cooperation with the lowering of the light-emitting voltage V_{el} of the organic EL device OLED. Then, the source potential V_s lowers to nearly the same level as the low power supply potential V_{cc_L} applied to the drive power supply line DSL(i). It should be noted that the low power supply potential V_{cc_L} is sufficiently lower than the reference potential V_0 for initialization to be applied to the signal line DL(j).

FIG. 6C corresponds to an operation state of period (C) shown in FIG. 5. In period (C), the potential of scan line SCNL(i) changes to high. Consequently, the thin-film transistor T1 is turned on, upon which the gate potential V_g of the thin-film transistor T2 is set to the reference potential V_0 for initialization applied to the signal line DL(j).

When period (C) ends, the hold voltage V_{gs} of the hold capacity C_s is initialized to a voltage greater than the threshold voltage V_{th} of the thin-film transistor T2. At this moment, a high potential is applied to the common power supply line to which the cathode electrode of the organic EL device OLED is connected, thereby reversely biasing the organic EL device OLED. Consequently, the drain current I_{ds} flows to the signal line DL(j) through the hold capacity C_s and the thin-film transistor T1.

(iii) Threshold Correcting Operation

FIG. 6D corresponds to an operation state of period (D) shown in FIG. 5. In period (D), the potential of the drive power supply line DSL(i) is switched from the low power supply potential V_{cc_L} for initialization to the high power supply potential V_{cc_H} for light emitting. It should be noted that the thin-film transistor T1 for sampling is maintained in the on state.

As a result, merely the source potential V_s starts rising with the gate potential V_g of the thin-film transistor T2 kept at the initializing reference potential V_o . At any point of time up to the end of period (D), the hold voltage V_{gs} of the hold capacity C_s reaches the threshold voltage V_{th} . Consequently, the thin-film transistor T2 turns off. The source potential V_s at this moment goes lower than the gate potential $V_g (=V_o)$ by the threshold voltage V_{th} .

(iv) Preparing Operation for Signal Potential Write and Mobility Correction

FIG. 6E corresponds to an operation state of period (E) shown in FIG. 5. In Period (E), the potential of the scan line SCNL(i) changes to low. Consequently, the thin-film transistor T2 is turned off to put the gate electrode of the thin-film transistor T2 as a drive transistor into a floating state.

However, the cutoff state of the thin-film transistor T2 is maintained. Therefore, the drain current I_{ds} does not flow. FIG. 6F corresponds to an operation state of period (F) shown in FIG. 5. In period (F), the potential of signal line DL(j) changes from the initialization reference potential V_o to the data potential V_{sig} . It should be noted however that the thin-film transistor T1 that functions as a sampling transistor remains in the off state.

(v) Signal Potential Write and Mobility Correction

FIG. 6G corresponds to an operation state of period (G). In period (G), the potential of scan line SCNL(i) changes to high. Consequently, the sampling transistor T1 is turned on, upon which the gate electrode of the thin-film transistor T2 goes to signal potential V_{sig} .

Also, in period (G), the power supply line DSL(i) changes to the light-emitting high power supply potential V_{cc_H} . As a result, the thin-film transistor T2 is turned on, upon which the drain current I_{ds} flows. However, the organic EL device OLED is initially in the cutoff state (or the high impedance state). Hence, the drain current I_{ds} flows not into the organic EL device OLED but into the parasitic capacity C_s as shown in FIG. 6G.

As the parasitic capacity C_s is charged, the source potential V_s of the thin-film transistor T2 starts rising. Then, the hold voltage V_{gs} of the hold capacity C_s goes $V_{sig}+V_{th}-\Delta V$. Thus, the sampling of signal potential V_{sig} and the correction by charge voltage ΔV are executed in parallel. It should be noted that, as the data potential V_{sig} is larger, the drain current I_{ds} gets larger, thereby making the absolute value of charge voltage ΔV larger.

Consequently, the mobility correction in accordance with any light-emitting level is made practicable. It should be noted that, if the signal potential V_{sig} is constant, as mobility

μ of the thin-film transistor T2 is larger, the absolute value of charge voltage ΔV gets larger, thereby making a feedback larger.

(vi) Signal Potential Write and Mobility Correction

FIG. 6H corresponds to an operation state of period (H) shown in FIG. 5. The potential of scan line SCNL(i) changes to low again. Consequently, the thin-film transistor T1 is turned off to put the gate electrode of the thin-film transistor T2 into a floating state.

It should be noted that the potential of the power supply line DSL(i) is maintained at the light-emitting high power supply potential V_{cc_HH} , so that the drain current I_{ds} corresponding to the hold voltage $V_{gs} (=V_{sig}+V_{th}-\Delta V)$ of the hold capacity C_s is continuously supplied to the organic EL device OLED. This supply of the drain current causes the organic EL device OLED to start emitting light. At the same time, light-emitting voltage V_{el} corresponding to the magnitude of the drain current I_{ds} occurs between both the electrodes of the organic EL device OLED.

Namely, the source voltage V_s of the thin-film transistor T2 rises. Also, a bootstrap operation of the hold capacity C_s causes the gate potential V_g to rise by the amount of rise of the source potential V_s . Consequently, the hold capacity C_s comes to hold the same hold voltage $V_{gs} (=V_{sig}+V_{th}-\Delta V)$ as that before the bootstrap operation. As a result, the light-emitting operation caused by the drain current I_{ds} with the mobility corrected is continued.

(B-3) Correction Effect

Here, the effect of correction is confirmed. FIG. 7 shows the current-voltage characteristic of the thin-film transistor T2. Especially, the drain current I_{ds} at the time when the thin-film transistor T2 is operating in a saturation region is given by the following equation.

$$I_{ds}=(\frac{1}{2})\cdot\mu\cdot(W/L)\cdot C_{ox}\cdot(V_{gs}-V_{th})^2 \quad (1)$$

In the above-mentioned relation, μ is representative of mobility. W is representative of gate width. L is representative of gate length. C_{ox} is representative of gate oxide film capacitance per unit area. As seen from the above-mentioned transistor characteristics relation, when the threshold voltage V_{th} fluctuates, the drain current I_{ds} fluctuates if the hold voltage V_{gs} is constant. FIG. 7 shows a relationship between the data voltage V_{sig} and the drain current I_{ds} at a time when neither threshold correction nor mobility correction is executed.

In the case of the above-mentioned example of correcting operation, however, the hold voltage V_{gs} at the time of light emission is given by $V_{sig}+V_{th}-\Delta V$. Therefore, the equation (1) above can be represented as follows.

$$I_{ds}=(\frac{1}{2})\cdot\mu\cdot(W/L)\cdot C_{ox}\cdot(V_{sig}-\Delta V)^2 \quad (2)$$

As seen from equation (2), threshold voltage V_{th} is deleted from the equation. Namely, it is understood that the dependence on the threshold voltage V_{th} was removed by the above-mentioned correcting operation.

This denotes that, if there exist a variation in the threshold voltage V_{th} of the thin-film transistor T2 that constitutes the pixel circuit 1, such a variation will not affect the drain current I_{ds} . FIG. 8 shows a relation between the data voltage V_{sig} and the drain current I_{ds} at a time when merely the threshold correction is executed.

It should be noted that, with pixels having different motilities μ , the drain currents I_{ds} thereof will take different values if the data voltage V_{sig} is the same. In the case of FIG. 8, pixel A is greater in mobility μ than pixel B. Hence, if the data voltage V_{sig} is the same, the drain current I_{ds} of pixel A is greater than the drain current I_{ds} of pixel B. However, the

charge voltage ΔV occurring in the parasitic capacity C_0 in the same correction period depends on mobility μ .

Namely, the charge voltage ΔV of the pixel having greater mobility μ is greater than the charge voltage ΔV of the pixel having smaller mobility μ . In equation (2) above, the charge voltage ΔV acts on the direction in which the drain current I_{ds} lowers. As a result, the effect of the variation in the mobility μ appearing in the drain current I_{ds} is suppressed. Namely, as shown in FIG. 9, the same drain current I_{ds} can flow to any data current V_{sig} .

(D) Layout Pattern Examples

(D-1) Pattern Example 1

The following describes a layout pattern of the high-potential power supply line 11 that is suitable when a pixel array block is made up of the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 10 shows a layout pattern that is proposed as the pattern example 1. In this pattern example, the low-potential power supply line 13 that is not desired to increase the wiring width thereof is arranged on the valid pixel area side so as to cross the drive power supply line DSL(i). On the other hand, the high-potential power supply line 11 that is desired to increase the wiring width thereof is arranged so as to cross the output wiring of the preceding buffer circuit that constitutes the power supply line drive circuit 27.

In pattern example 1, the waveform of power supply drive pulse may also remain blunt due to the parasitic capacitance at the cross between the high-potential power supply line 11 thick in wiring width and the output wiring of the preceding buffer circuit. However, if the waveform of the supply line drive pulse is made blunt, the blunt waveform can be reshaped in the subsequent output buffer circuit. Therefore, the driving of the drive power supply line DSL(i) will not be affected.

Also, use of a positional relation in which there is no cross between the high-potential power supply line 11 and the drive power supply line DSL(i) can make smaller the cross area between wirings that may generate a large potential alternately. This configuration can minimize the possibility of causing an inter-layer short circuit due to dust or the like, thereby significantly improving the yield of the production of organic EL panels.

(D-2) Pattern Example 2

The following also describes a layout pattern example of the high-potential power supply line 11 that is suitable when a pixel array block is made up by the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 11 shows a layout pattern proposed as the pattern example 2. The pattern example 2 is a variation of the pattern example 1. Namely, merely the positional arrangement of the low-potential power supply line 13 that need not be increased in wiring width is changed in the pattern example 2.

In the case of the pattern example 2, the low-potential power supply line 13 and the drive power supply line DSL(i) are arranged so as not to cross each other. To be more specific, the low-potential power supply line 13 is arranged so as to overlap the output buffer of the power supply line drive circuit 27.

In this wiring example, the number of layers increases from 2 to 3; however, the cross portion between the digitally driven power supply line DSL(i) and the low-potential power supply line 13 can be eliminated. As a result, this configuration can still decrease the possibility of an inter-layer short circuit due to dust or the like, thereby still significantly improving the yield of the production of organic EL panels.

(D-3) Pattern Example 3

The following also describes a layout pattern example of the high-potential power supply line 11 that is suitable when

a pixel array block is made up by the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 12 shows a layout pattern proposed as the pattern example 3. The pattern example 3 is another variation of the pattern example 1. Namely, merely the positional arrangement of the low-potential power supply line 13 not desired to increase the wiring width thereof is changed.

In the case of pattern example 3, the low-potential power supply line 13 is arranged so as not to cross the drive power supply line DSL(i). To be more specific, the low-potential power supply line 13 is arranged at an intermediate position between the output buffer circuit of the power supply line drive circuit 27 and the drive power supply line DSL(i). Namely, the low-potential power supply line 13 is arranged so as to cross an extraction wire for connecting the output terminal of the output buffer circuit with the drive power supply line DSL(i).

In this wiring example, the low-potential power supply line 13 crosses the digitally driven wiring (the extraction wire); however, the cross area is also small because this extraction wire is small in wiring width. As a result, this configuration can still further decrease the possibility of an inter-layer short circuit due to dust or the like, thereby still further significantly improving the yield of the production of organic EL panels.

(D-4) Pattern Example 4

The following also describes a layout pattern example of the high-potential power supply line 11 that is suitable when a pixel array block is made up by the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 13 shows a layout pattern proposed as the pattern example 4. The pattern example 4 is still another variation of the pattern example 1. Namely, merely the positional arrangement of the low-potential power supply line 13 not desired to increase the wiring width thereof is changed.

In the case of the pattern example 4, the low-potential power supply line 13 is arranged so as not to cross the drive power supply line DSL(i). To be more specific, the low-potential power supply line 13 is arranged at an intermediate position between the output buffer circuit of the power supply line drive circuit 27 and the high-potential power supply line 11(i).

In this wiring example, like the case of the high-potential power supply line 11 thick in wiring width, the waveform of power supply drive pulse may also remain blunt due to the parasitic capacitance at the cross between the low-potential power supply line 13 and the output wiring of the preceding buffer circuit.

However, because the wiring width of the low-potential power supply line 13 is small and the parasitic capacity is low, and, if the waveform get blunt, the blunt waveform can be reshaped, thereby involving no problem in operation. Obviously, in this case can also improve the yield of the production of organic EL panels.

(D-5) Pattern Example 5

The following also describes a layout pattern example of the high-potential power supply line 11 that is suitable when a pixel array block is made up by the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 14 shows a layout pattern proposed as the pattern example 5. The pattern example 5 is yet another variation of the pattern example 1. Namely, merely the positional arrangement of the high-potential power supply line 11 is changed.

To be more specific, the high-potential power supply line 11 is arranged so as to overlap the output buffer circuit of the power supply line drive circuit 27.

13

In this wiring example, the number of wiring layers increases from 2 to 3; however, the cross portion between the digitally driven power supply line DSL(i) and the low-potential power supply line 13 can be eliminated. As a result, this configuration can still decrease the possibility of an inter-layer short circuit due to dust or the like, thereby still significantly improving the yield of the production of organic EL panels.

(D-6) Pattern Example 6

The following also describes a layout pattern example of the high-potential power supply line 11 that is suitable when a pixel array block is made up by the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 15 shows a layout pattern proposed as the pattern example 6. The pattern example 6 is a different variation of the pattern example 1. To be more specific, the low-potential power supply line 13 is arranged so as to overlap the high-potential power supply line 11 arranged in front of the output buffer circuit of the power supply line drive circuit 27.

In this wiring example, a high voltage is applied between the power supply lines; however, this high voltage is a static voltage, so that an effect of the waveform to the operation of the drive power supply line DSL(i) need not be considered. In addition, because the power supply line need not be offset-arranged on the plane, the area of the organic EL panel can be reduced if slightly.

(D-7) Pattern Example 7

The following also describes a layout pattern example of the high-potential power supply line 11 that is suitable when a pixel array block is made up by the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 16 shows a layout pattern proposed as the pattern example 7. In the pattern example 7, the high-potential power supply line 11 and the low-potential power supply line 13 are arranged in a manner opposite to the pattern example 1. However, if the high-potential power supply line 11 crosses the drive power supply line DSL(i), the above-mentioned technical problems may not be solved.

Therefore, the extraction wire connected the output terminal of the output buffer circuit of the power supply line drive circuit 27 to the drive power supply line DSL(i) is elongated so as to be crossed with the high-potential power supply line 11.

In this wiring example, the high-potential power supply line 11 crosses the digitally driven wiring (namely, the extraction wire); however, the cross area is also small because this extraction wire is small in wiring width. As a result, this configuration can still further decrease the possibility of an inter-layer short circuit due to dust or the like, thereby still further significantly improving the yield of the production of organic EL panels.

(D-8) Pattern Example 8

The following describes a layout pattern example of the high-potential power supply line 11 and the low-potential power supply line 13 that is suitable when the pixel array block is constituted by a pixel circuit 31 having the configuration shown in FIG. 17. The pixel circuit 31 in this example is made up of the thin-film transistor T2 with the drive transistor is of p type. Accordingly, the other electrode of the hold capacity Cs is connected to the common power supply line that supplies high power supply potential Vcc_H to all pixels.

It should be noted that, in the case of FIG. 17, the drive power supply line DSL(i) corresponds to a power supply line to which the cathode electrode of the organic EL device OLED is connected. Therefore, in the case of FIG. 17, the operation in the pixel circuit 31 is controlled by digitally

14

driving the drive power supply line DSL(i) to which the cathode electrode is connected.

Obviously, in this case too, the common signal line to which high power supply potential Vcc_H is applied is relatively large in wire width in preparation for the supply of a large current. Also, the signal width of the drive power supply line DSL(i) is large to cope with the drawing of a large current.

FIG. 18 shows a layout pattern proposed as the pattern example 8. In the pattern example 8, not merely the high-potential power supply line 11 but also the low-potential power supply line 13 have to have a relatively thick wiring width, so that these power supply lines have to be arranged so as not to cross the drive power supply line DSL(i).

Namely, in the case of FIG. 18, the high-potential power supply line 11 is arranged so as to be crossed with the output wiring of the preceding buffer circuit constituting of the power supply line drive circuit 27, while the low-potential power supply line 13 is arranged so as to be overlapped on the top layer of the preceding buffer circuit constituting the power supply line drive circuit 27. This arrangement minimizes the possibility of a short circuit due to dust or the like, thereby significantly improving the yield of the production of organic EL panels.

(D-9) Pattern Example 9

The following describes a layout pattern example of the high-potential power supply line 11 and the low-potential power supply line 13 that is suitable when the pixel array block is constituted by the pixel circuit 31 having the configuration shown in FIG. 17.

FIG. 19 shows a layout pattern proposed as the pattern example 9. In the pattern example 9, the high-potential power supply line 11 and the low-potential power supply line 13 are arranged so as to be overlapped with each other at a preceding position of the output buffer of the power supply line drive circuit 27. Either of these power supply lines may be the other in overlapping. It should be noted that, in this case, a parasitic capacity is generated at the portion in which the power supply lines having thick wire width overlap with each other. However, this parasitic capacity will not affect the power supply drive pulse because these power supply lines supply fixed potentials.

(D-10) Pattern Example 10

The following describes a layout pattern example of the high-potential power supply line 11 and the low-potential power supply line 13 that is suitable when the pixel array block is constituted by the pixel circuit 31 having the configuration shown in FIG. 17.

FIG. 20 shows a layout pattern proposed as the pattern example 10. In the pattern example 10, the high-potential power supply line 11 is arranged in front of the output buffer of the power supply line drive circuit 27 and the low-potential power supply line 13 is arranged so as to be crossed with the extraction wire connecting the output buffer of the power supply line drive circuit 27 to the drive power supply line DSL(i).

It should be noted that the positions of the high-potential power supply line 11 and the low-potential power supply line 13 may be replaced with each other. In this wiring example too, the cross area between the drive power supply line DSL(i) and the power supply line can be made small. Therefore, this arrangement minimizes the possibility of short circuit due to dust or the like, thereby significantly improving the yield of the production of organic EL panels.

(D-11) Others

It should be noted that the above-mentioned layout patterns are illustrative and therefore it is practicable to use other layouts.

(E) Other Embodiments

(E-1) Product Examples

(a) Drive IC

In the above, embodiments in which the pixel array block and the drive circuit are formed on one panel. It is also practicable to manufacture the scan line drive circuits **25**, the power supply line drive circuit **27**, and the data line drive circuit **29** separately from the pixel array block **23** and separately distribute organic EL panels formed with the pixel array block **23**. For example, these drive circuits may be manufactured as drive ICs (Integrated Circuits) to be mounted on each organic EL panel formed with the pixel array block **23**.

(b) Display Module

The organic EL panel **21** in the above-mentioned embodiments may also be distributed in the form of a display module **41** having an external view shown in FIG. **21**.

The display module **41** has a construction in which an opposite block **43** is laminated on the surface of a support base **45**. With the opposite block **43**, a color filter, a protection film, and a light-resistant film are arranged on the surface of a base that is made of glass or another transparent material.

It should be noted that the display module **41** may have an FPC (Flexible Printed Circuit) **47** or the like for interfacing between the outside and the support base **45**.

(c) Electronic Devices

The organic EL panels in the above-mentioned embodiments may be distributed in the form of a product mounted on electronic devices. FIG. **22** shows a conceptual configuration example of an electronic device **51**. The electronic device **51** is made up of an organic EL panel **53** and a system control block **55**. Contents of processing to be executed by the system control block **55** depend on the product form of the electronic device **51**.

It should be noted that the electronic device **51** is not limited to devices of a particular field as long as the electronic device **51** has capabilities of displaying images or video that generated inside the electronic device **51** or supplied from the outside. For the electronic device **51** of this type, a television receiver is assumed, for example. FIG. **23** shows an exemplary external view of a television receiver **61**.

On the front side of a housing of the television receiver **61**, a display screen **67** made up of a front panel **63** and a filter glass **65** is arranged. The portion of the display screen **67** corresponds to the organic EL panel described above with reference to embodiments.

In addition, for the electronic device **51** of this type, a digital camera is assumed, for example. FIG. **24** show external views example of a digital camera **71**. FIG. **24A** shows the front side (the side of a subject to be taken). FIG. **24B** shows an external view example of the rear side (the side of photographer).

The digital camera **71** has a protection cover **73**, a taking lens block **75**, a display screen **77**, a control switch **79**, and a shutter button **81**. The portion of the display screen **77** corresponds to the organic EL panel described above with reference to embodiments.

Besides, for the electronic device **51** of this type, a video camera is assumed, for example. FIG. **25** shows an external view example of a video camera **91**. The video camera **91** has a taking lens **95** for taking a subject on the front side of a body **93**, a shooting start/stop switch **97**, and a display screen **99**. Of

these components, the portion of the display screen **89** corresponds to the organic EL panel described above with reference to embodiments.

Moreover, for the electronic device **51** of this type, a portable terminal device is assumed, for example. FIG. **26** show external views example of a mobile phone **101**, for example, as a portable terminal device. The mobile phone **101** shown in FIG. **26** is of folding type. FIG. **26A** shows an external view example in which the mobile phone is in the opened state. FIG. **26B** shows an external view example in which the mobile phone is in the closed state.

The mobile phone **101** has an upper housing **103**, a lower housing **105**, a link block **107** (a hinge block in this example), a display screen **109**, an auxiliary display screen **111**, a picture light **113**, and a taking lens **115**. Of these components, the portions of the display screen **109** and the auxiliary display screen **111** correspond to the organic EL panel described above with reference to embodiments.

Also, for the electronic device **51** of this type, a computer is assumed, for example. FIG. **27** shows an external view example of a note-type computer **121**. The note-type computer **121** has a lower housing **123**, an upper housing **125**, a keyboard **127**, and a display screen **129**. Of these components, the portion of the display screen **129** corresponds to the organic EL panel described above with reference to embodiments.

In addition to the above-mentioned devices, audio players, game machines, electronic books, and electronic dictionaries, for example, are assumed for the electric device **51**.

(C-2) Other Display Device Examples

The above-mentioned driving method is also applicable to other than the organic EL panel. For example, the above-mentioned driving method is applicable to inorganic EL panels, LED-type display panels, and EL light-emitting type display panels with light-emitting elements having diode structure arranged on the screen.

(C-3) Others

While preferred embodiments of the present invention have been described using specific terms, such description is for illustrative purpose, and it is to be understood that changes and variations may be made without departing from the spirit or scope of the following claims.

It should be understood by those skilled in the art that various modifications, combinations, sub-combinations and alterations may occur depending on design requirements and other factor in so far as they are within the scope of the appended claims or the equivalents thereof.

What is claimed is:

1. An electroluminescence display device comprising a plurality of pixel circuits and a pixel driving circuit, wherein each of the plurality of pixel circuits includes an electroluminescence element, and wherein in a layout pattern of the pixel driving circuit:
 - an output line is electrically directly connected to a first source/drain region of a first transistor of a buffer circuit and a first source/drain region of a second transistor of the buffer circuit, a row of pixel circuits being electrically directly connected to said output line;
 - a different output line is electrically directly connected to a first source/drain region of a third transistor of a different buffer circuit and a first source/drain region of a fourth transistor of the different buffer circuit, a different row of pixel circuits being electrically directly connected to said different output line;
 - a high-potential power supply line is electrically directly connected a second source/drain region of the first

17

- transistor to a second source/drain region of the third transistor, said high-potential power supply line not crossing said output line or said different output line; a low-potential power supply line is electrically directly connected a second source/drain region of the second transistor to a second source/drain region of the fourth transistor, said low-potential power supply line not crossing said output line or said different output line, wherein the high-potential power supply line and the low-potential power supply line are extending in a column direction, and wherein the high-potential power supply line and the low-potential power supply line are disposed on an input side of the buffer circuit.
2. The electroluminescence display device according to claim 1, wherein the first transistor and the second transistor are configured to be switched complementally.
3. The electroluminescence display device according to claim 1, wherein the low-potential power supply line is disposed between the high-potential power supply line and the buffer circuit.
4. The electroluminescence display device according to claim 1, wherein the pixel driving circuit is configured to supply a control signal to the pixel circuit.
5. The electroluminescence display device according to claim 4, wherein the control signal is configured to control between an ON-state and an OFF-state of the electroluminescence element.
6. An electronic device comprising:
the electroluminescence display device according to claim 1;
a system control block; and
an operation input block for said system control block.
7. An electroluminescence display device comprising a plurality of pixel circuits and a pixel driving circuit, wherein each of the plurality of pixel circuits includes an electroluminescence element, and wherein in a layout pattern of the pixel driving circuit:
an output line is electrically directly connected to a first source/drain region of a first transistor of a buffer circuit and a first source/drain region of a second

18

- transistor of the buffer circuit, a row of pixel circuits being electrically directly connected to said output line;
a different output line is electrically directly connected to a first source/drain region of a third transistor of a different buffer circuit and a first source/drain region of a fourth transistor of the different buffer circuit, a different row of pixel circuits being electrically directly connected to said different output line;
a first supply line is electrically directly connected a second source/drain region of the first transistor to a second source/drain region of the third transistor, said first supply line not crossing said output line or said different output line;
a second supply line is electrically directly connected a second source/drain region of the second transistor to a second source/drain region of the fourth transistor, said second supply line not crossing said output line or said different output line,
wherein the first supply line and the second supply line are extending in a column direction, and
wherein a gate electrode of the first transistor and a gate electrode of the third transistor overlap the first supply line and the second supply line.
8. The electroluminescence display device according to claim 7, wherein the first transistor and the second transistor are configured to be switched Complementally.
9. The electroluminescence display device according to claim 7, wherein the pixel driving circuit is configured to supply a control signal to the pixel circuit.
10. The electroluminescence display device according to claim 7, wherein the control signal is configured to control between an ON-state and an OFF-state of the electroluminescence element.
11. An electronic device comprising:
the electroluminescence display device according to claim 7;
a system control block; and
an operation input block for said system control block.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 8,912,988 B2
APPLICATION NO. : 14/269644
DATED : December 16, 2014
INVENTOR(S) : Masatsugu Tomida et al.


Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page Item (63) Related U.S. Application Data section:

“12/589,609” should be corrected to -- 13/589,609 --.

Signed and Sealed this
Fifth Day of May, 2015



Michelle K. Lee
Director of the United States Patent and Trademark Office

专利名称(译)	EL显示面板，电源线驱动装置和电子设备		
公开(公告)号	US8912988	公开(公告)日	2014-12-16
申请号	US14/269644	申请日	2014-05-05
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	索尼公司		
[标]发明人	TOMIDA MASATSUGU ASANO MITSURU		
发明人	TOMIDA, MASATSUGU ASANO, MITSURU		
IPC分类号	G09G3/32 G09G3/30		
CPC分类号	G09G2320/043 G09G2300/0842 G09G2300/0866 G09G2310/0256 G09G2300/0426 G09G3/3266 G09G3/3233 G09G3/30 G09G2300/0819 G09G2320/045 G09G2330/02 G09G3/3275 G09G2310/0286 G09G2310/08 G09G2330/021 H01L27/3276		
代理机构(译)	RADER, FISHMAN & 格劳尔PLLC		
审查员(译)	SHERMAN, STEPHEN		
优先权	2007173590 2007-06-30 JP		
其他公开文献	US20140240206A1		
外部链接	Espacenet USPTO		

摘要(译)

本发明公开了一种电致发光显示面板，包括像素电路，信号线，扫描线，驱动电源线，公共电源线，电源线驱动电路，高电位电源线，低电平 - 电位线。

