



US 20150069362A1

(19) **United States**
(12) **Patent Application Publication**
ITO

(10) **Pub. No.: US 2015/0069362 A1**
(43) **Pub. Date: Mar. 12, 2015**

(54) **ORGANIC ELECTROLUMINESCENT DISPLAY DEVICE HAVING AN INPUT FUNCTION**

(52) **U.S. Cl.**
CPC *H01L 27/323* (2013.01); *H01L 27/3251* (2013.01); *H01L 27/3279* (2013.01); *H01L 27/3223* (2013.01); *H01L 27/322* (2013.01)
USPC **257/40**

(71) Applicant: **Japan Display Inc.**, Tokyo (JP)

(72) Inventor: **Ryoichi ITO**, Tokyo (JP)

(21) Appl. No.: **14/480,875**

(22) Filed: **Sep. 9, 2014**

(30) **Foreign Application Priority Data**

Sep. 11, 2013 (JP) 2013-188128

Publication Classification

(51) **Int. Cl.**
H01L 27/32 (2006.01)

(57) **ABSTRACT**

An organic electroluminescent display device includes a first substrate having a pixel area including a plurality of pixels each including a plurality of sub pixels, a light emitting devices are provided in correspondence with the sub pixels, and a partition layer covering a peripheral portion of each of the sub pixels; and a second substrate having a sensing unit including a first electrode pattern extending in one direction and a second electrode pattern extending in a direction intersecting the one direction, and the first electrode pattern and the second electrode pattern is provided out of contact from each other. The first electrode pattern is located to overlap the partition layer so as to enclose the sub pixels. The first electrode pattern included in the sensing unit encloses the sub pixels, and thus light is prevented from leaking to adjacent sub pixels.

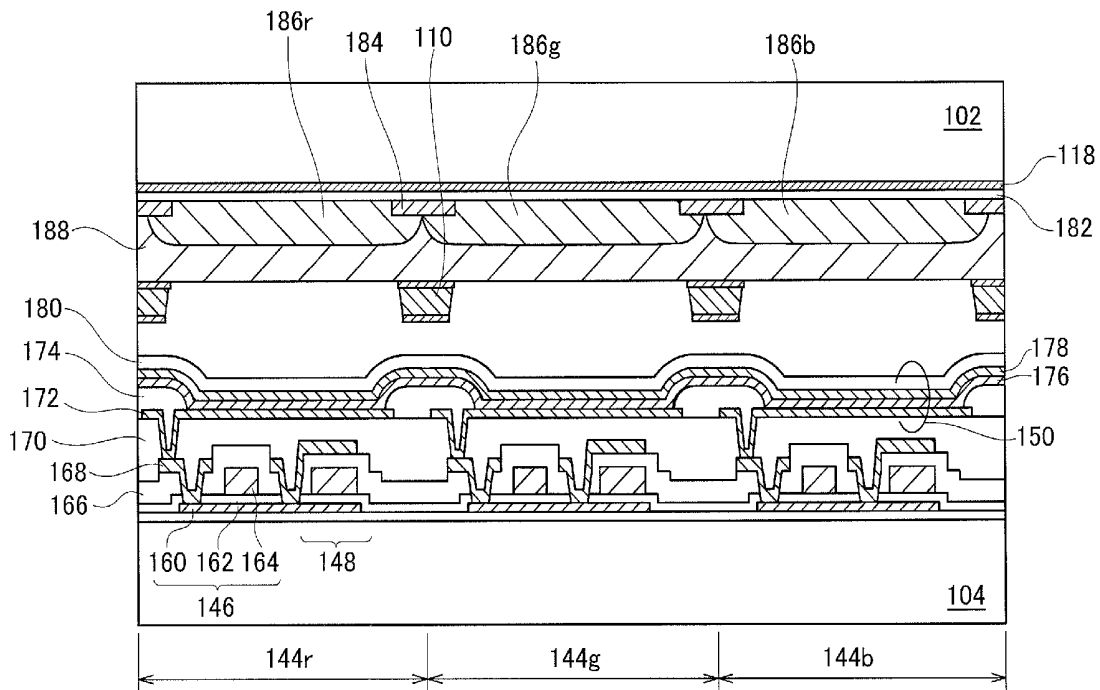


FIG. 1

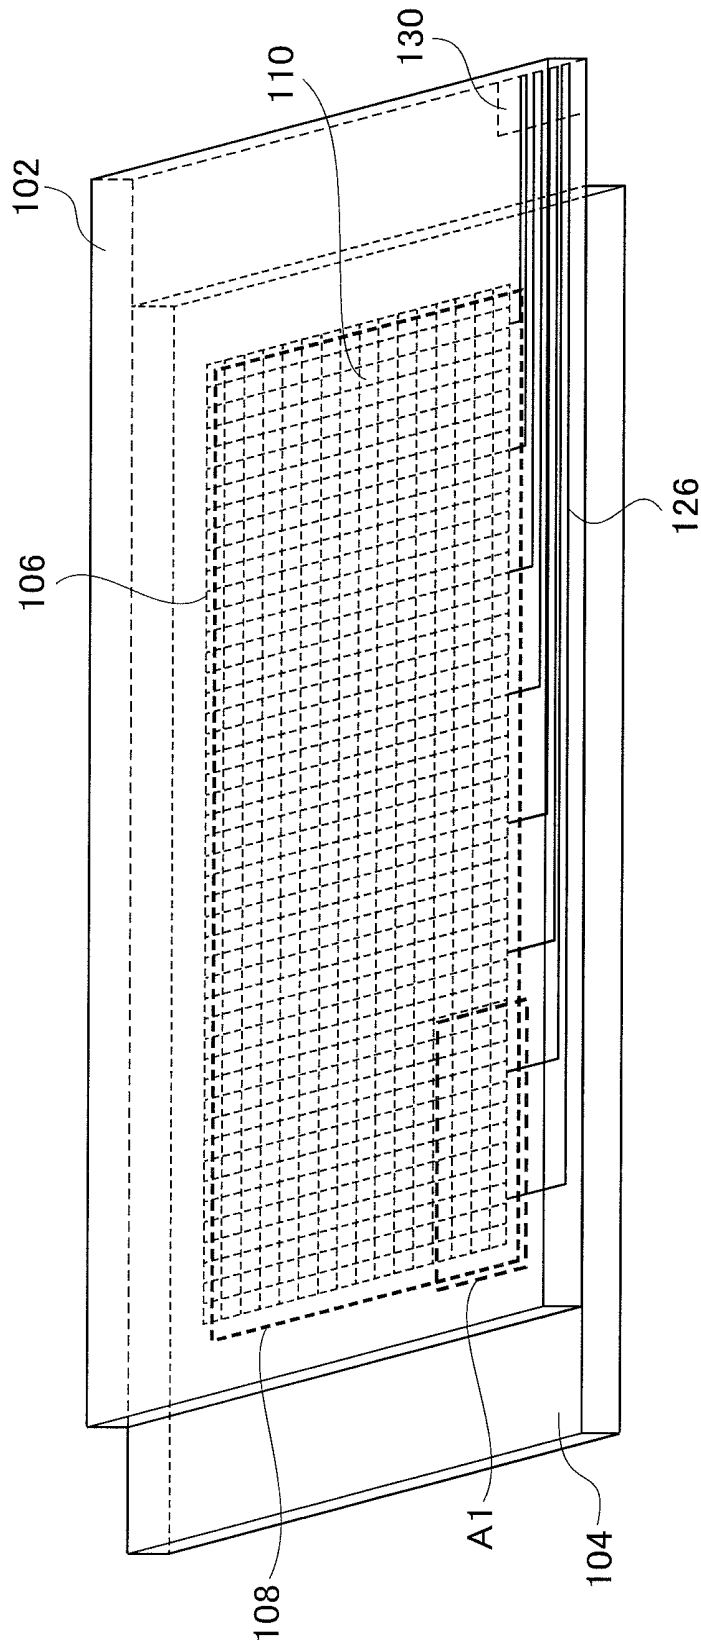


FIG. 2A

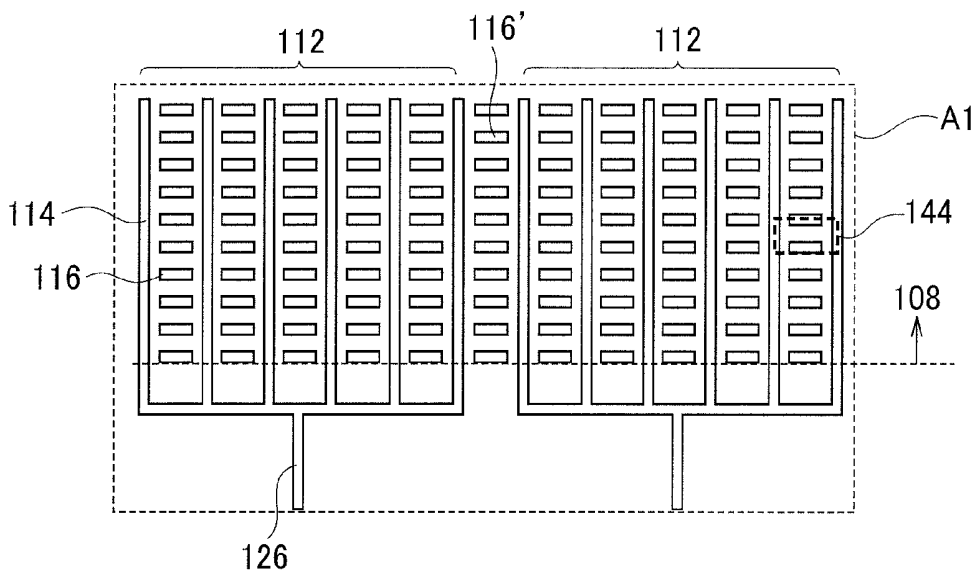


FIG. 2B

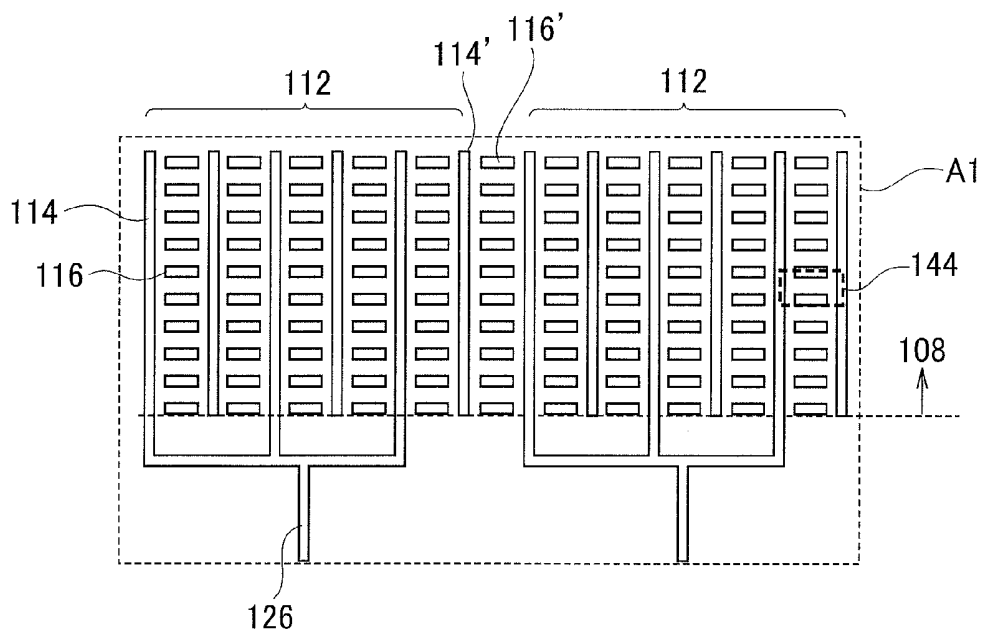


FIG. 3

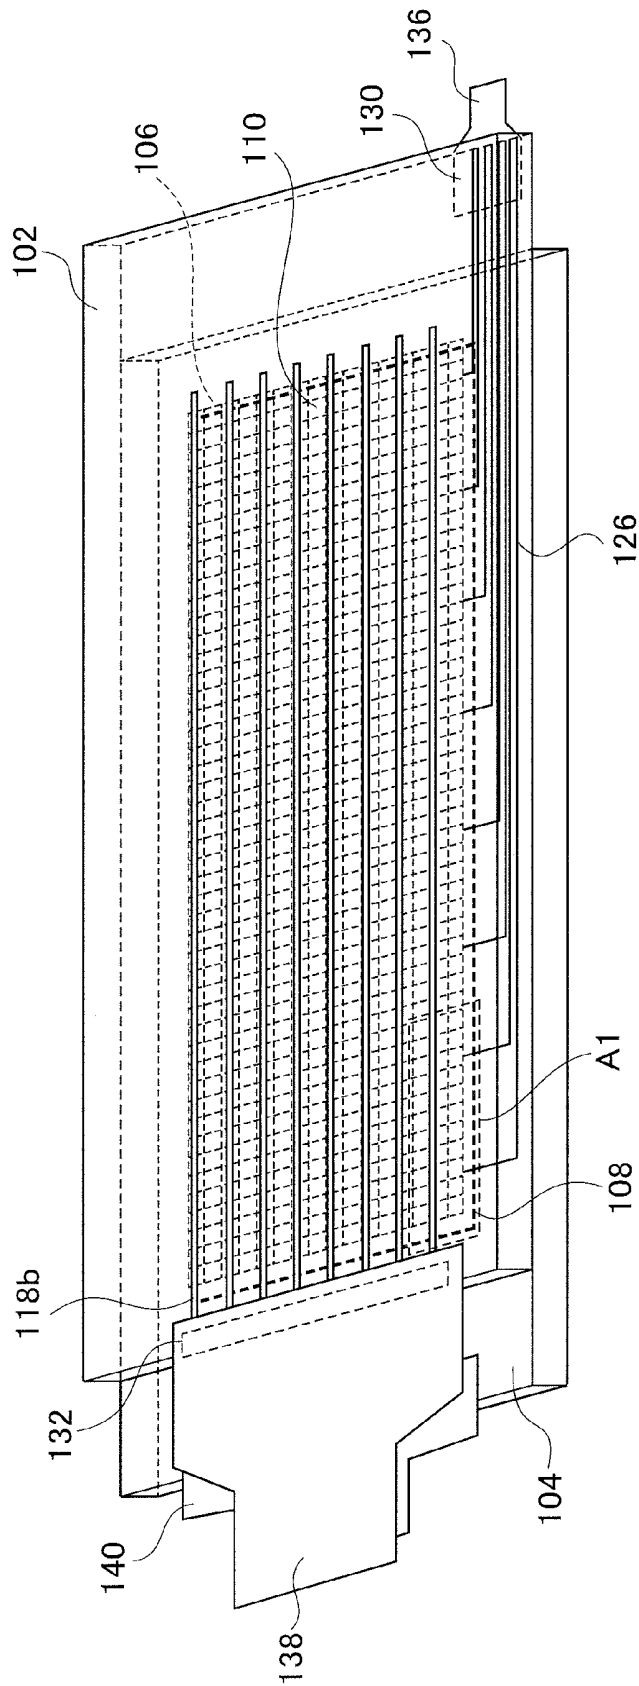


FIG. 4

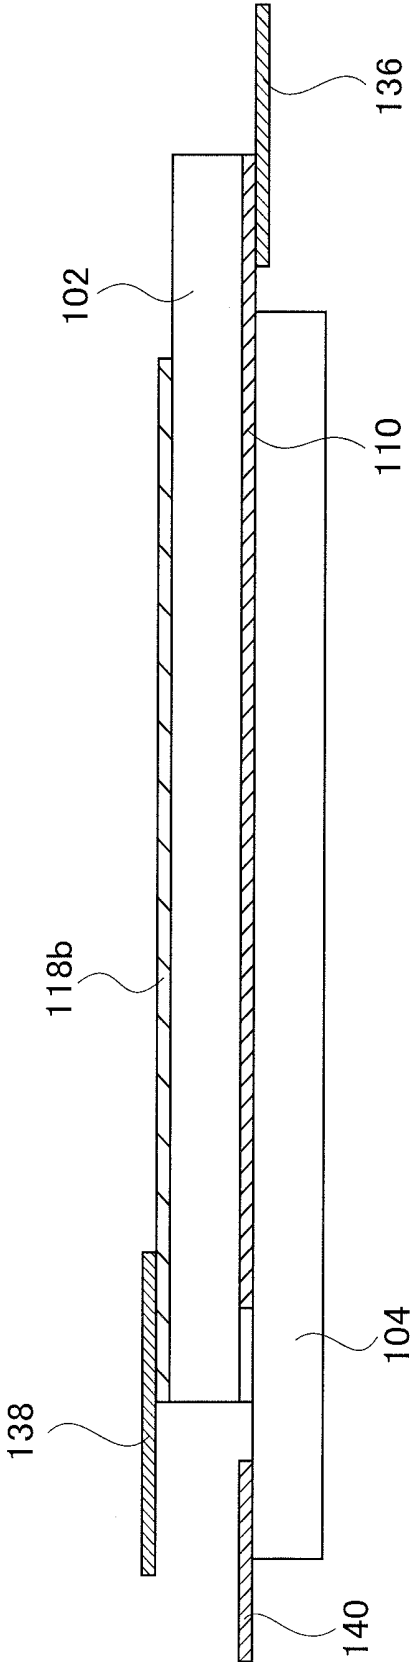


FIG. 5

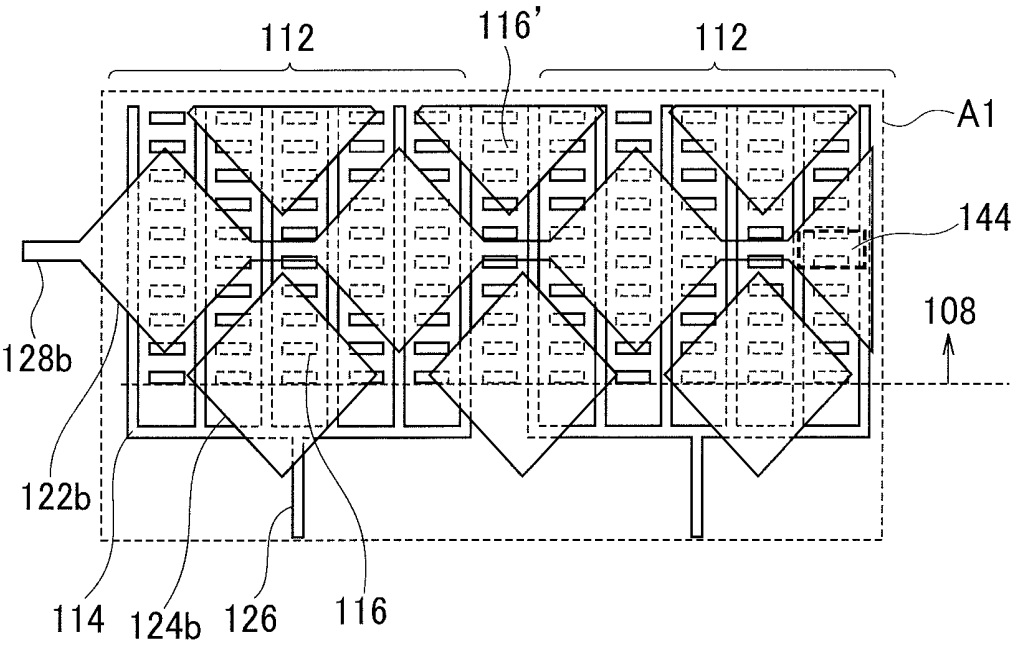


FIG. 7A

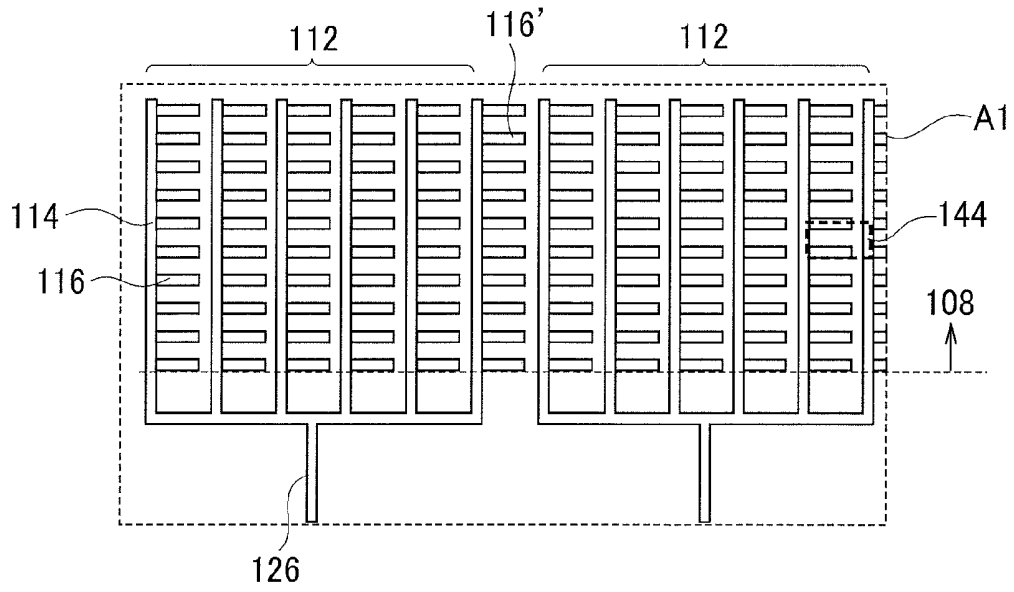


FIG. 7B

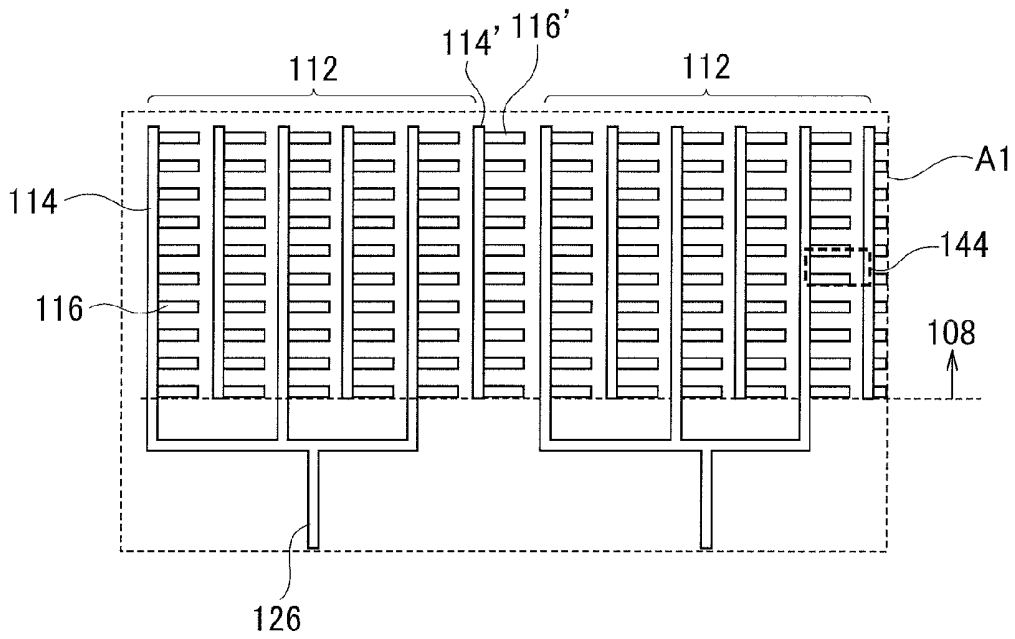


FIG. 8

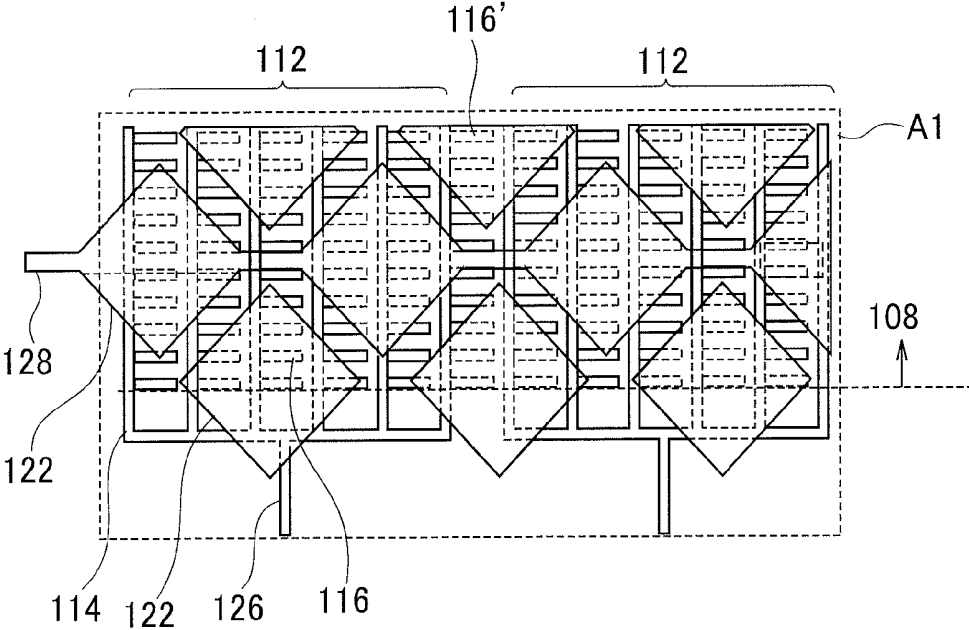


FIG. 9

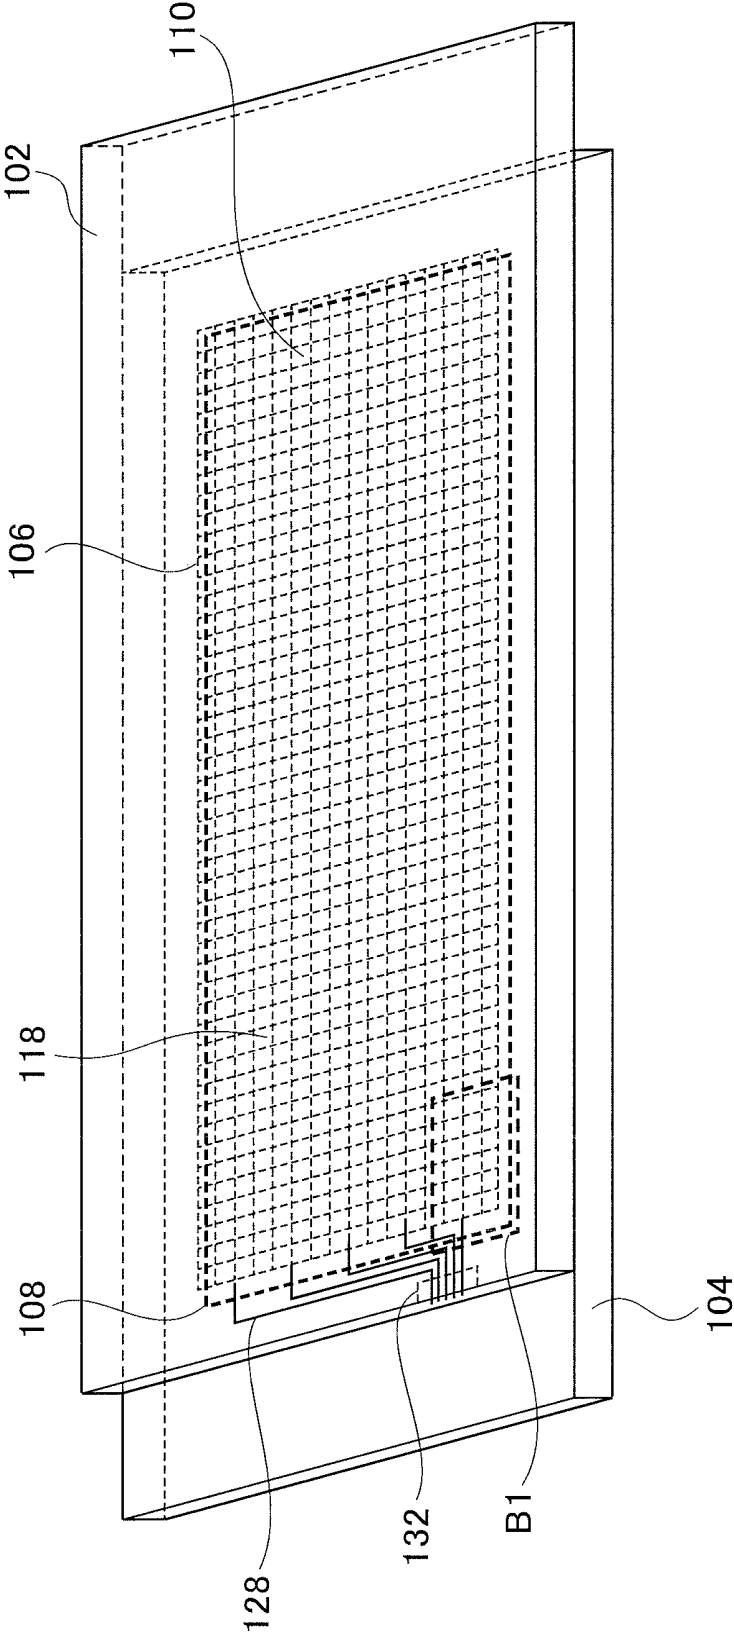


FIG. 10A

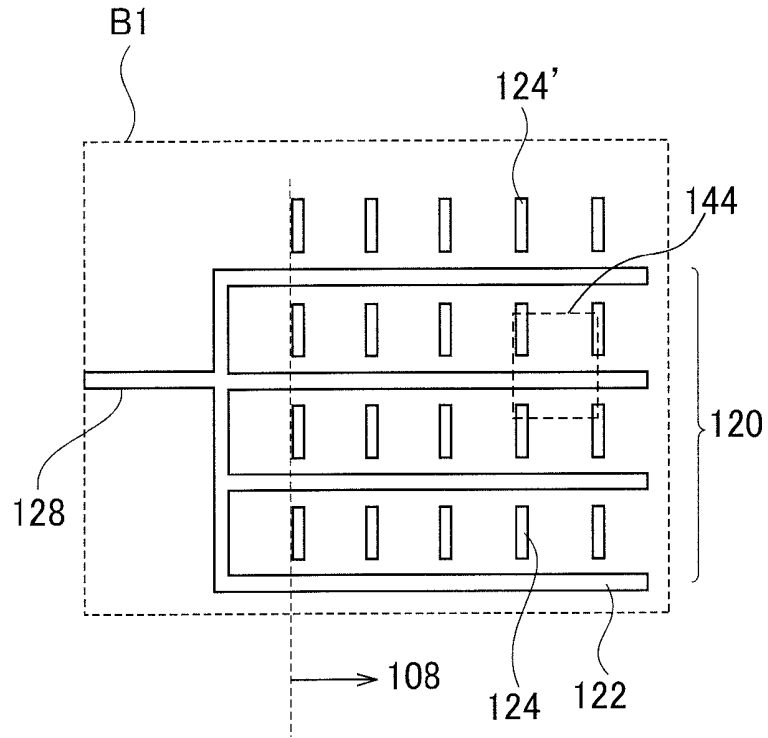


FIG. 10B

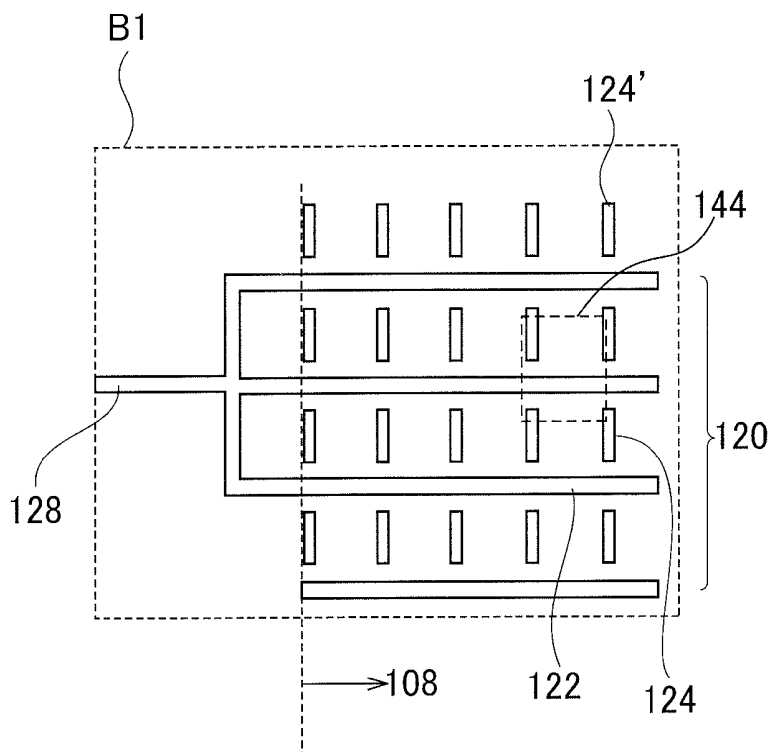


FIG. 11

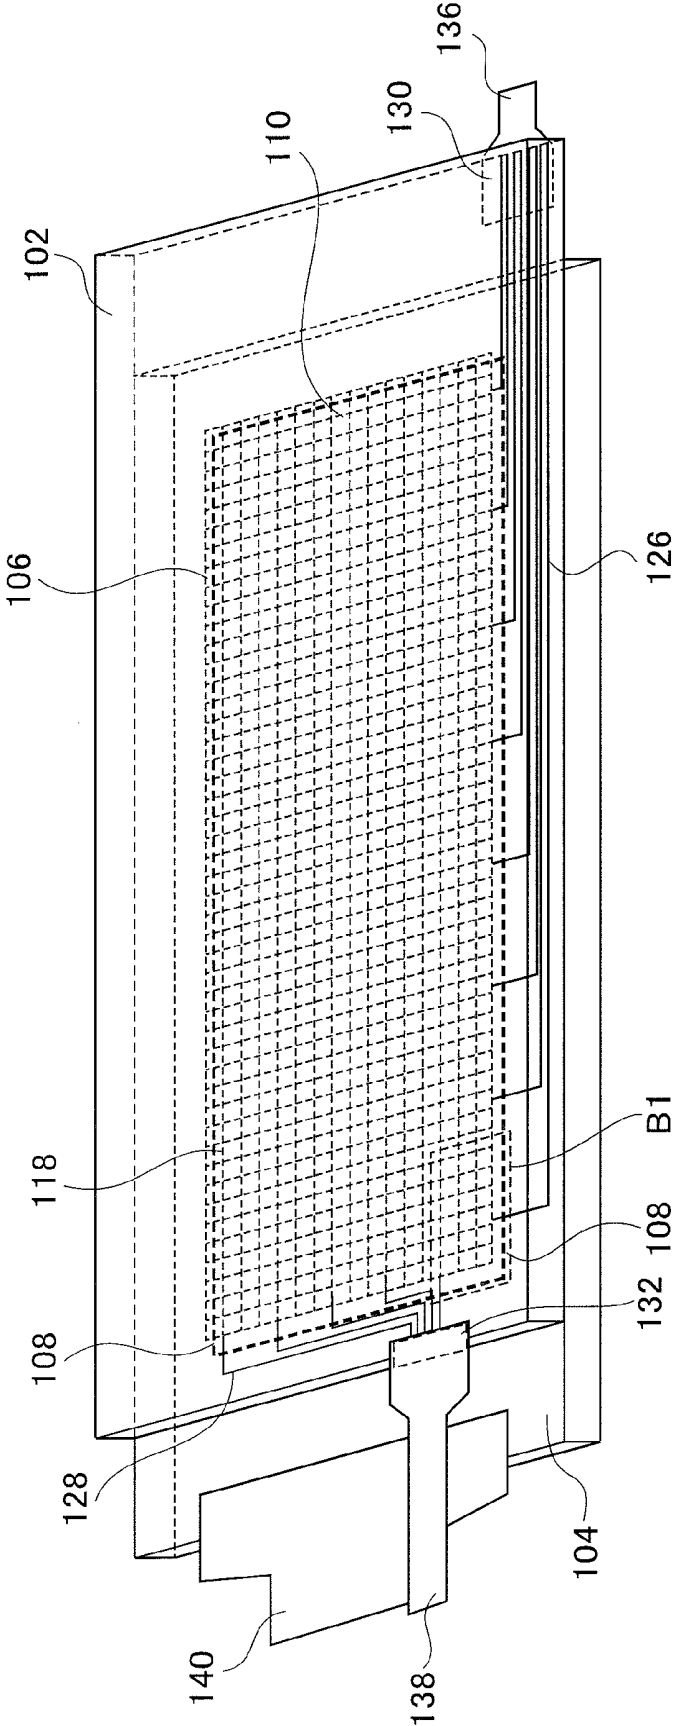


FIG. 12

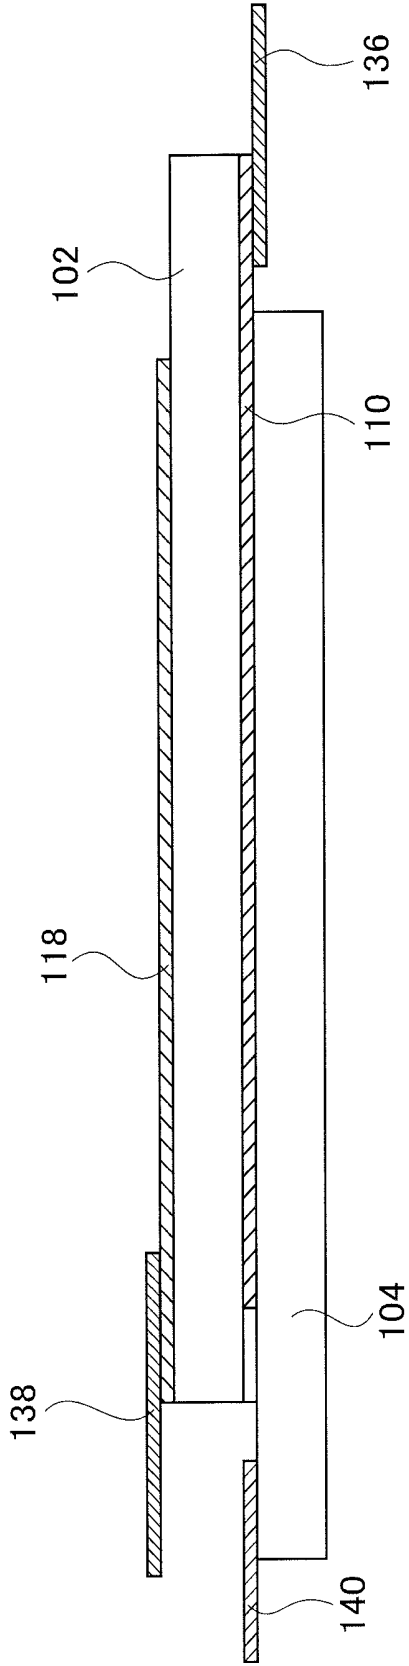


FIG. 13

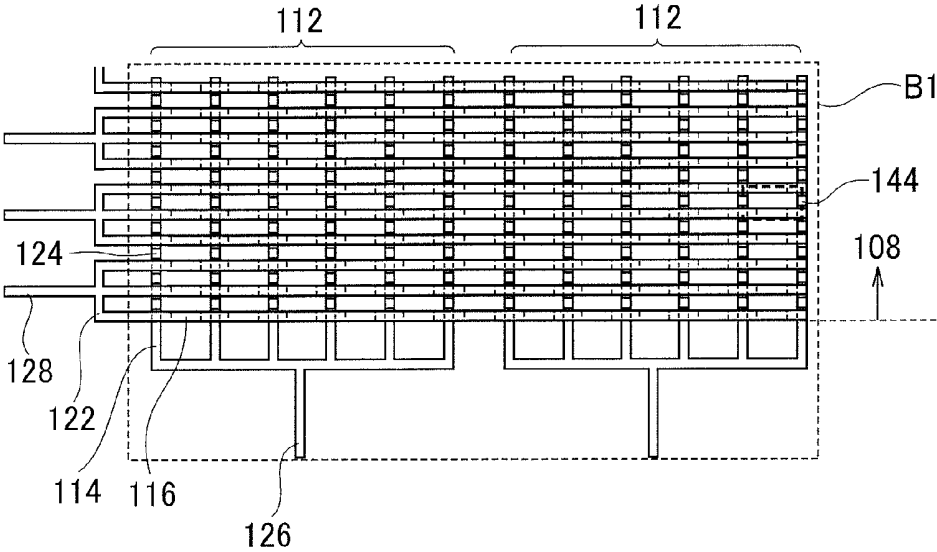


FIG. 14

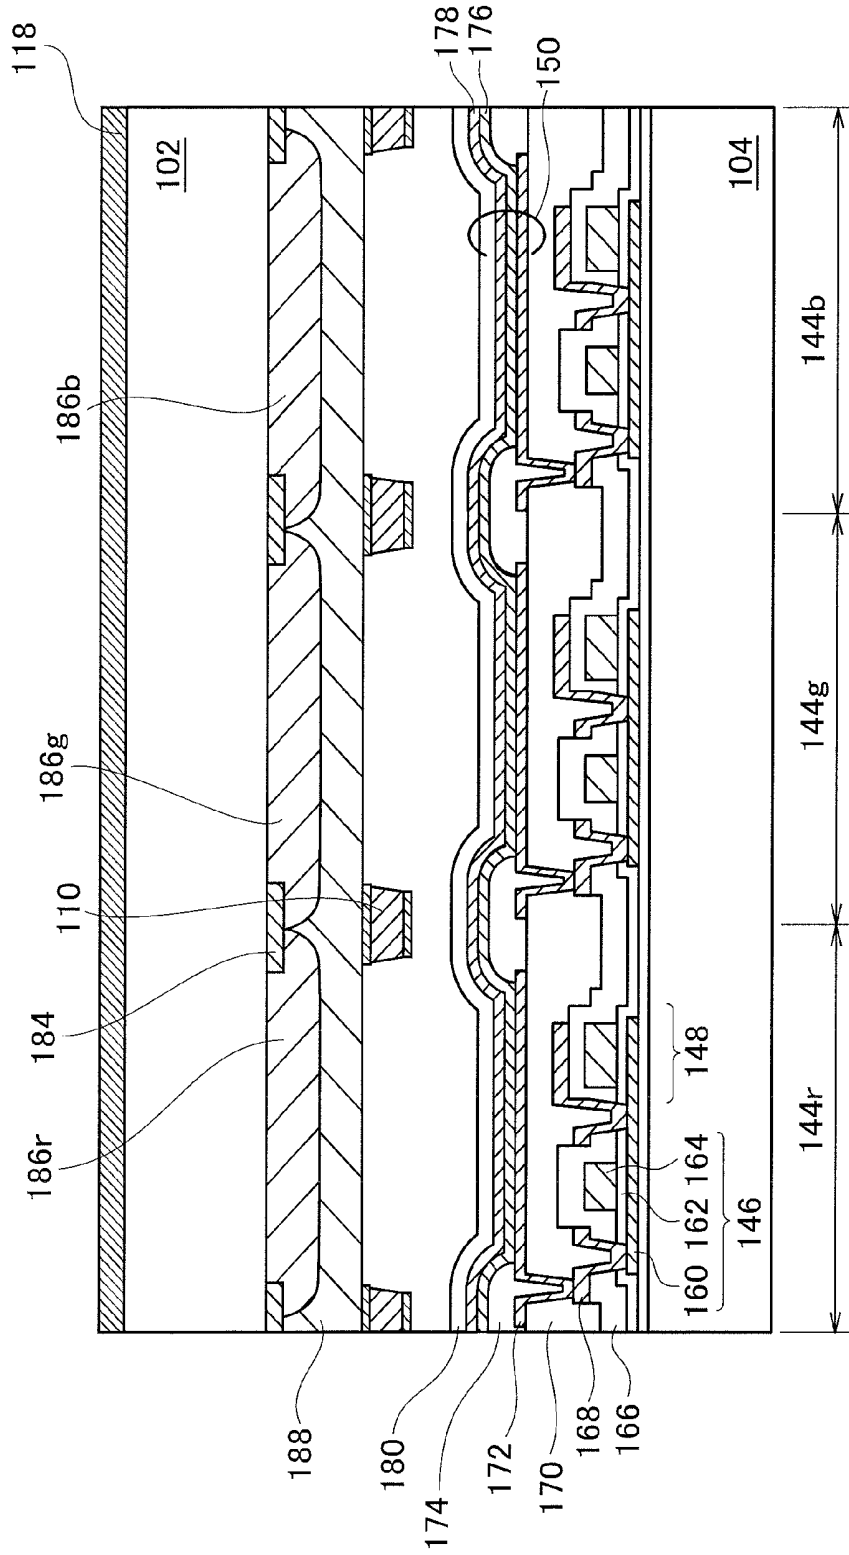


FIG. 15

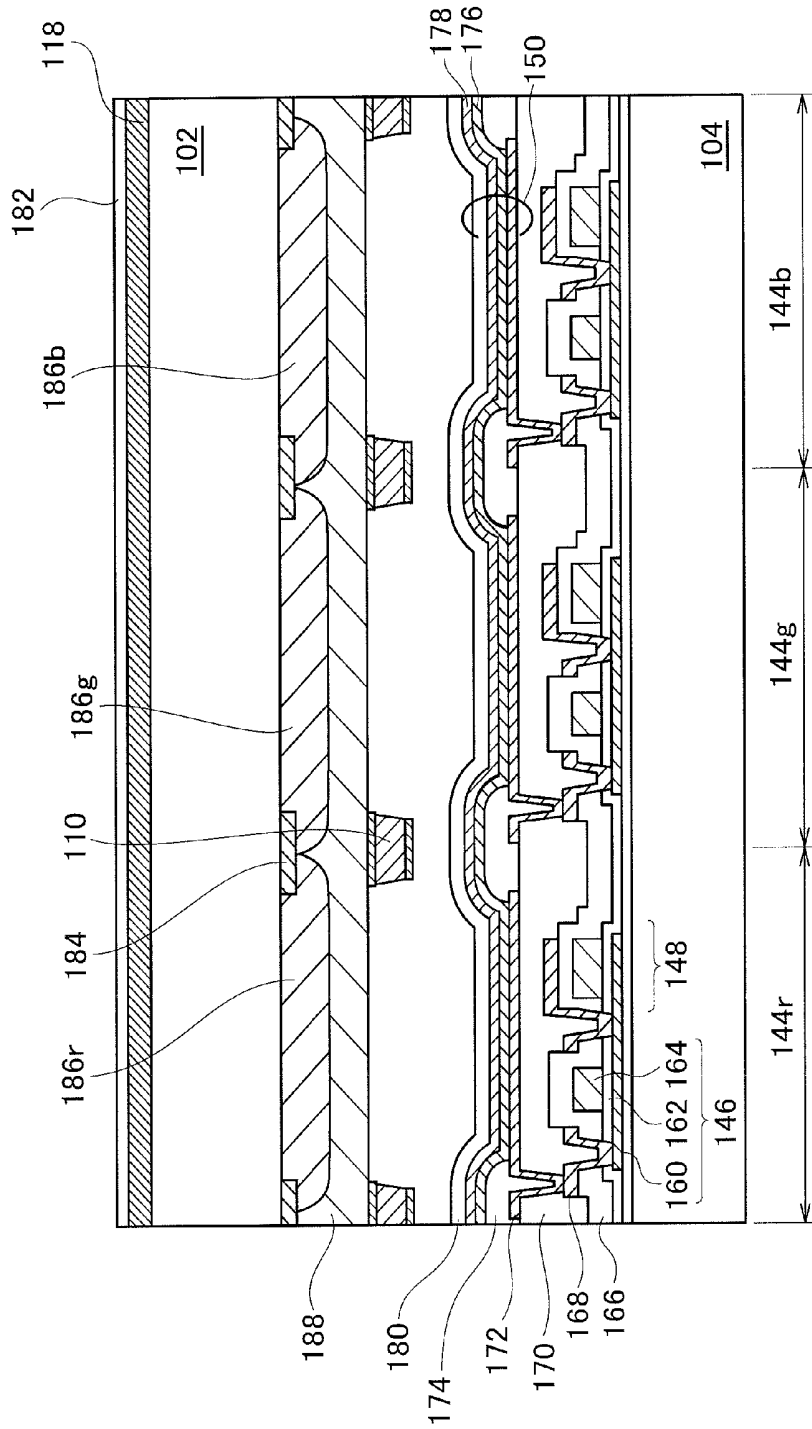


FIG. 16A

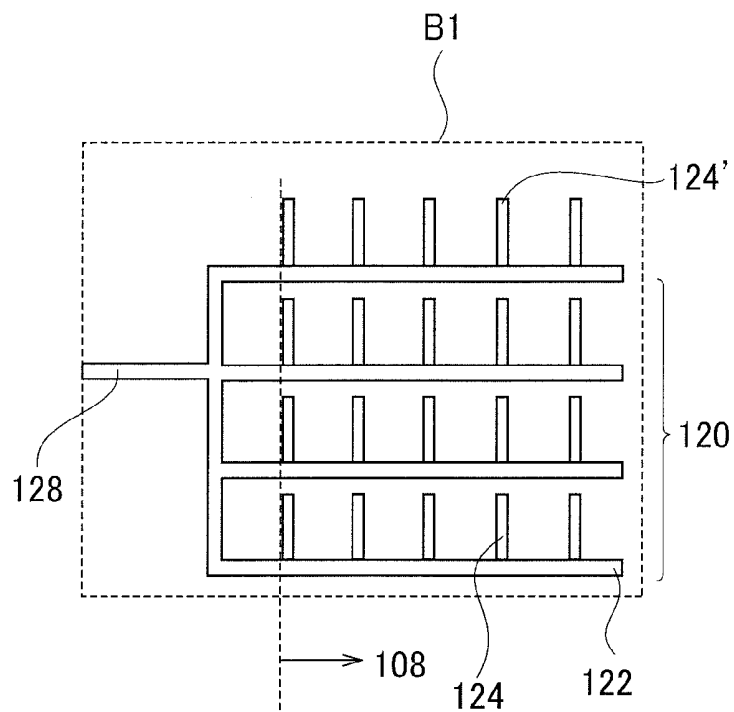


FIG. 16B

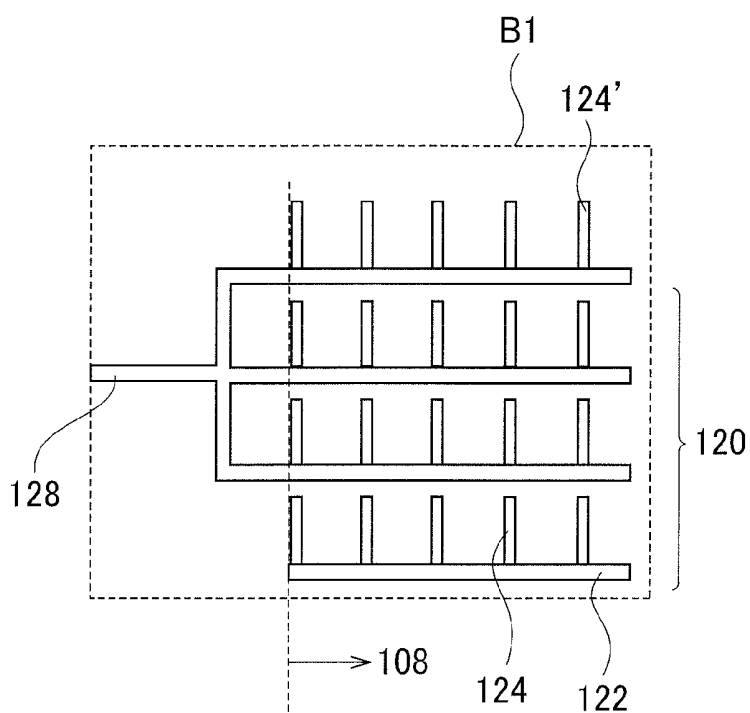


FIG. 17

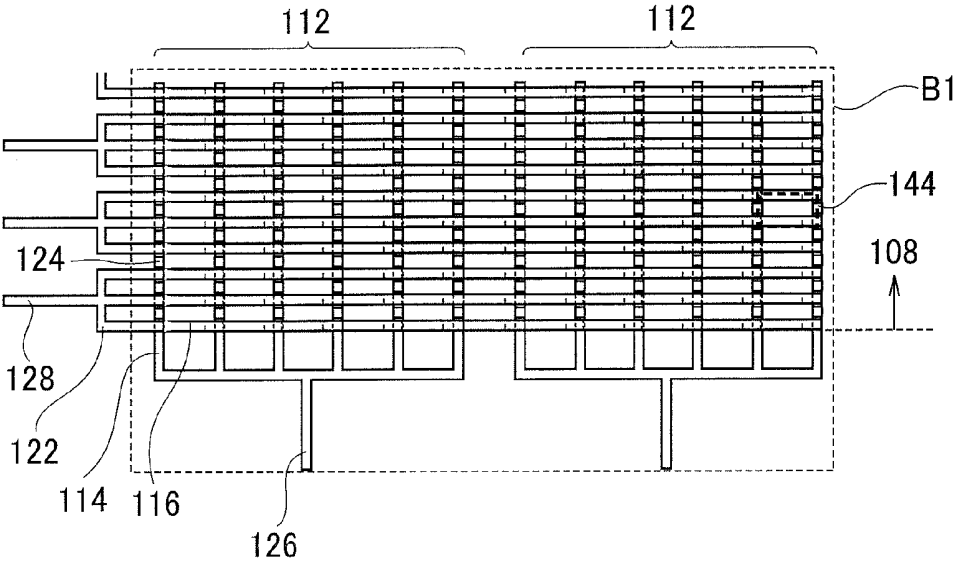


FIG. 18

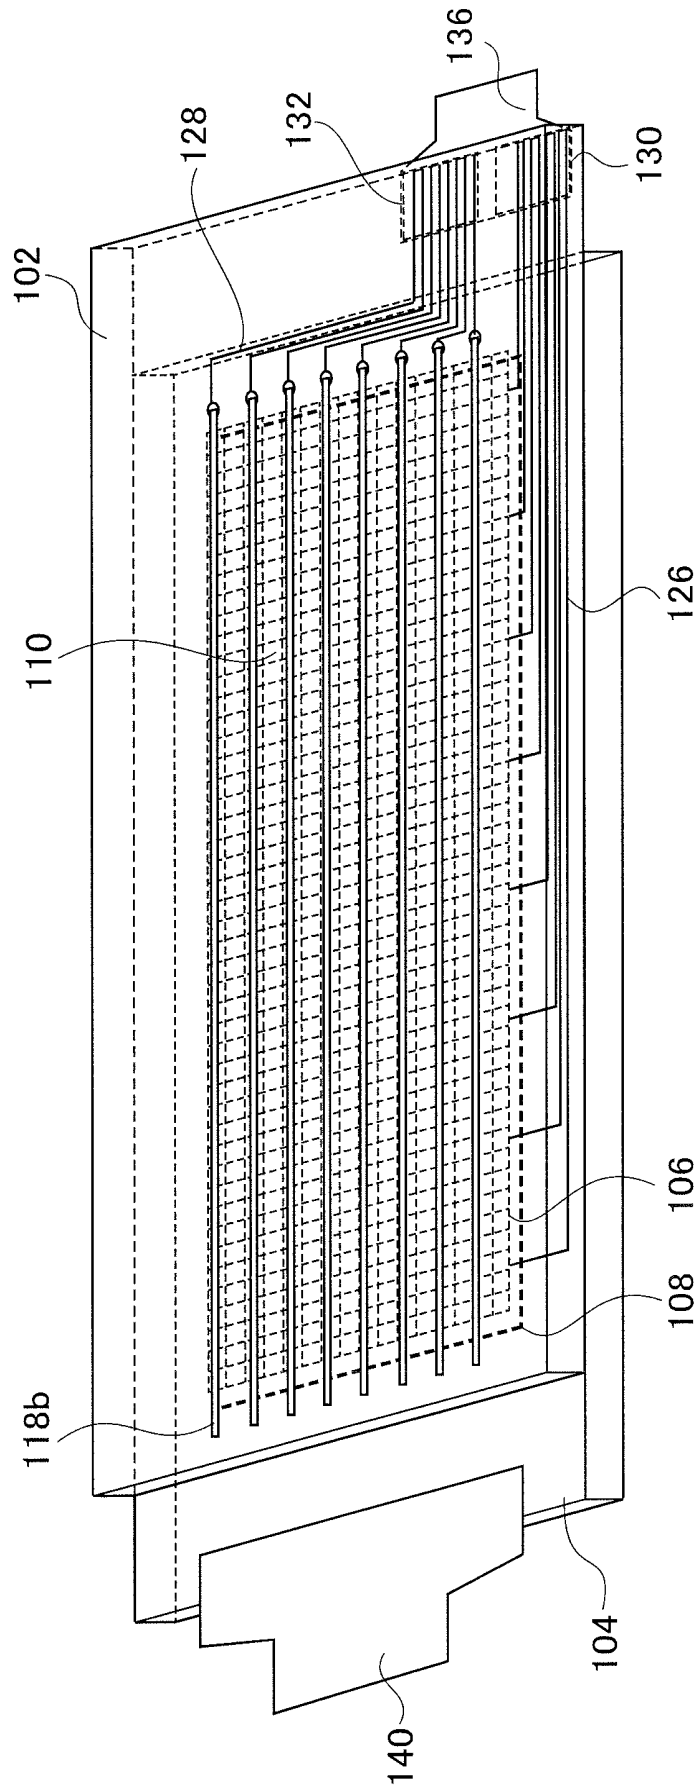


FIG. 19

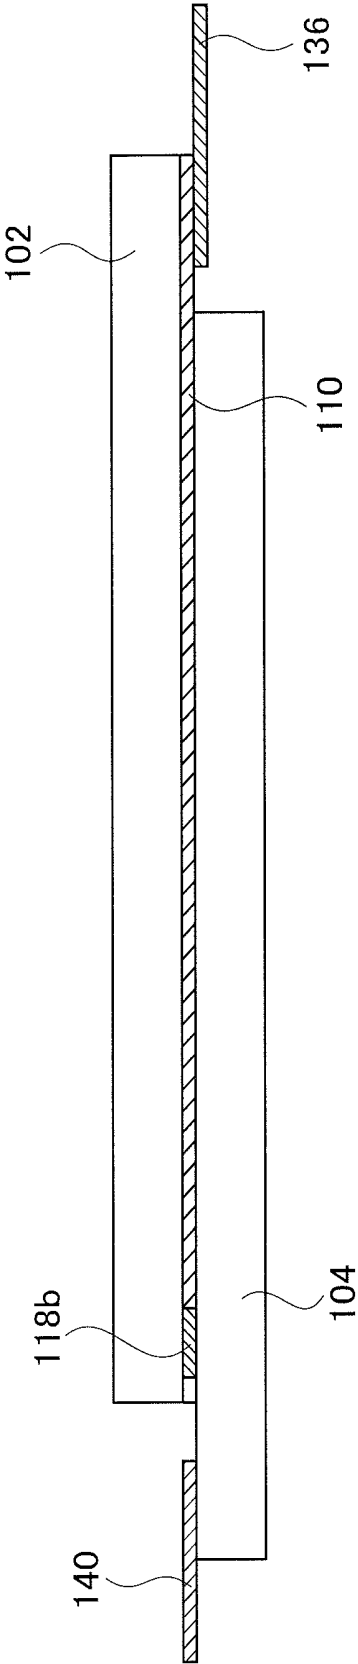


FIG. 20

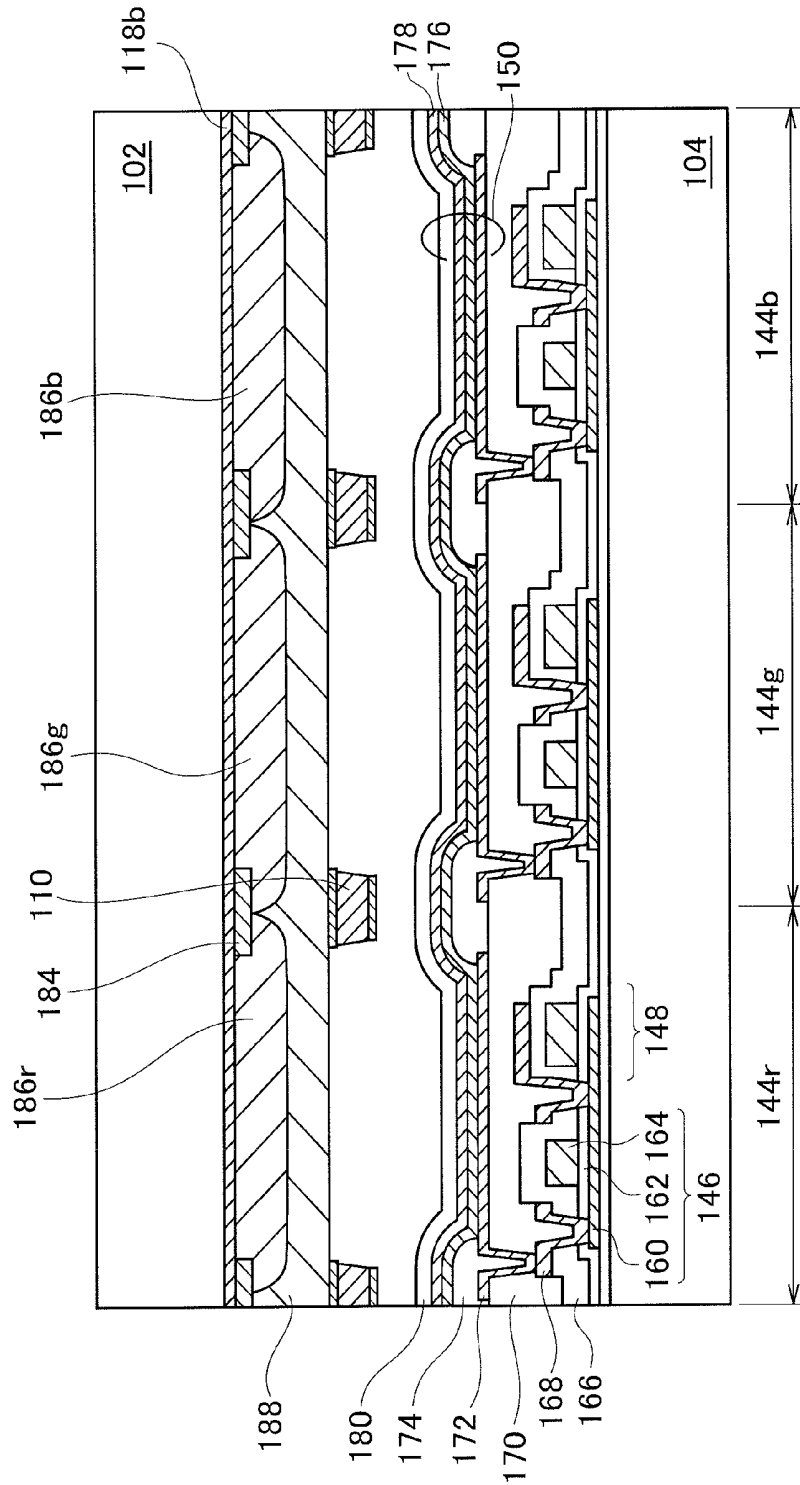


FIG. 21

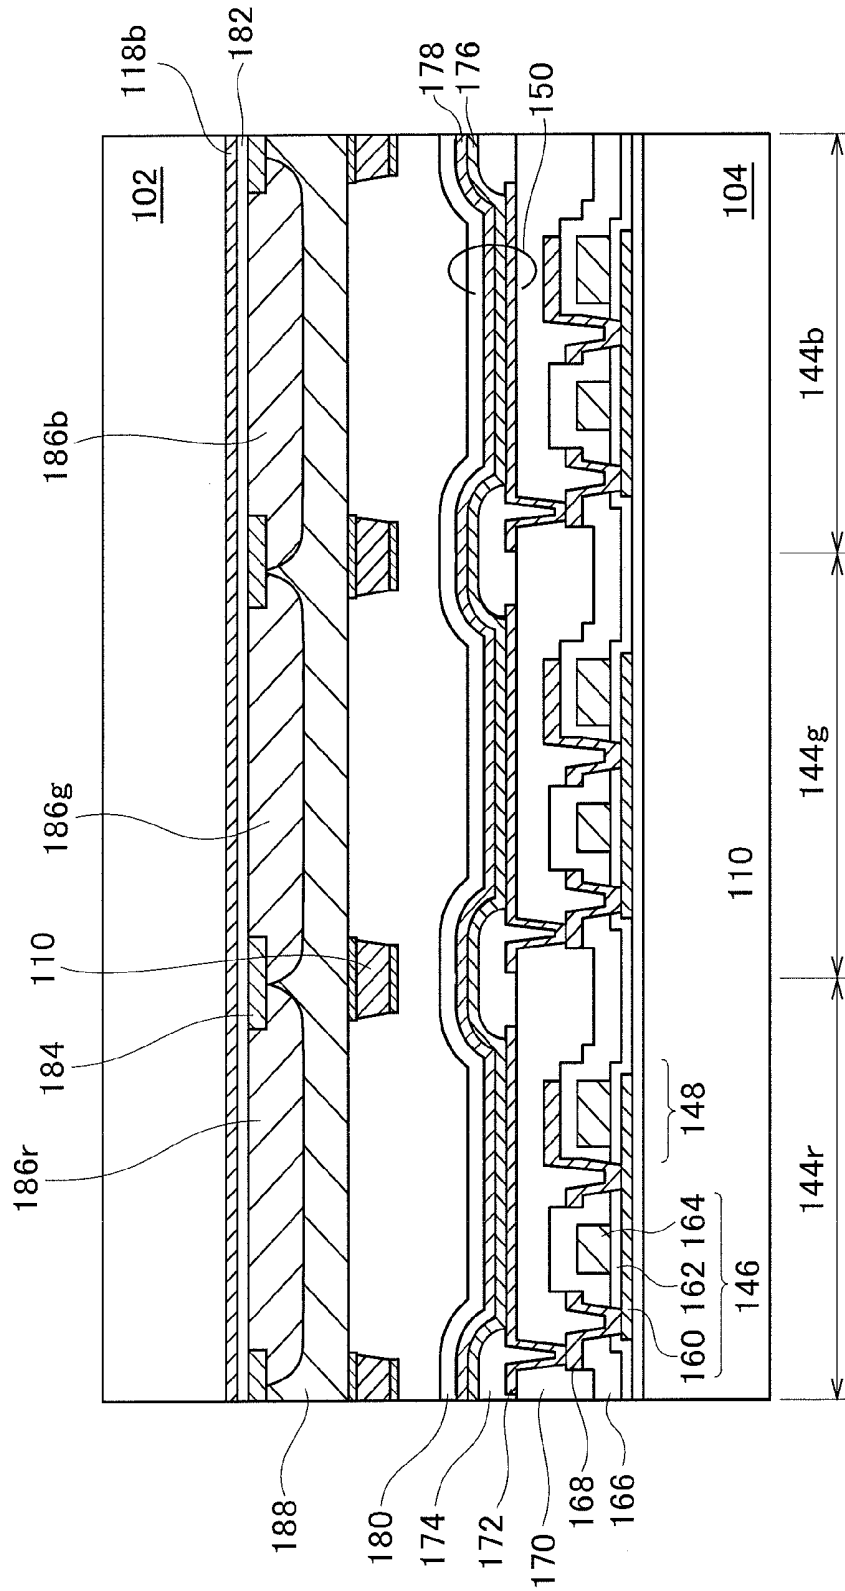


FIG. 22

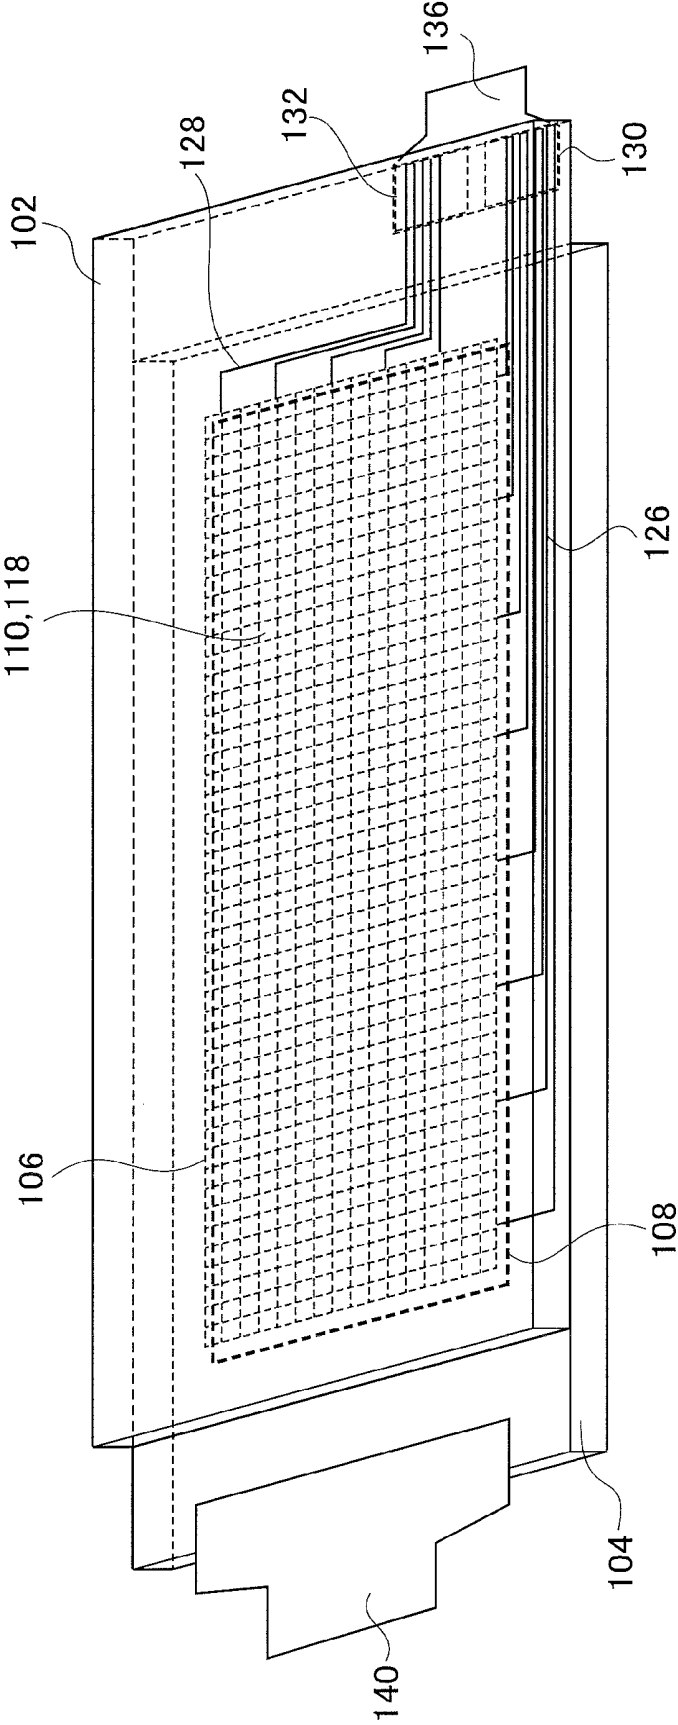


FIG. 23

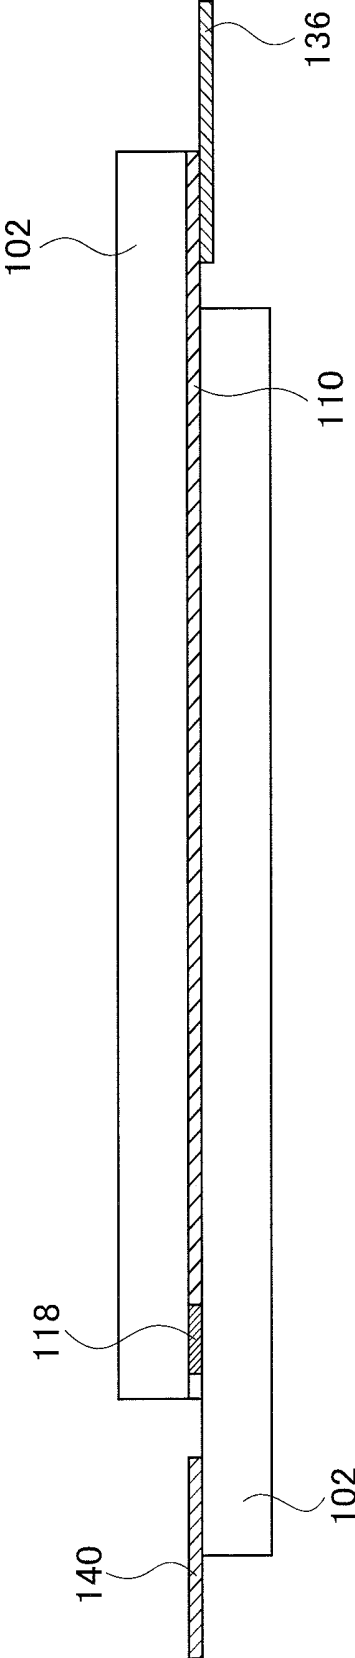


FIG. 24

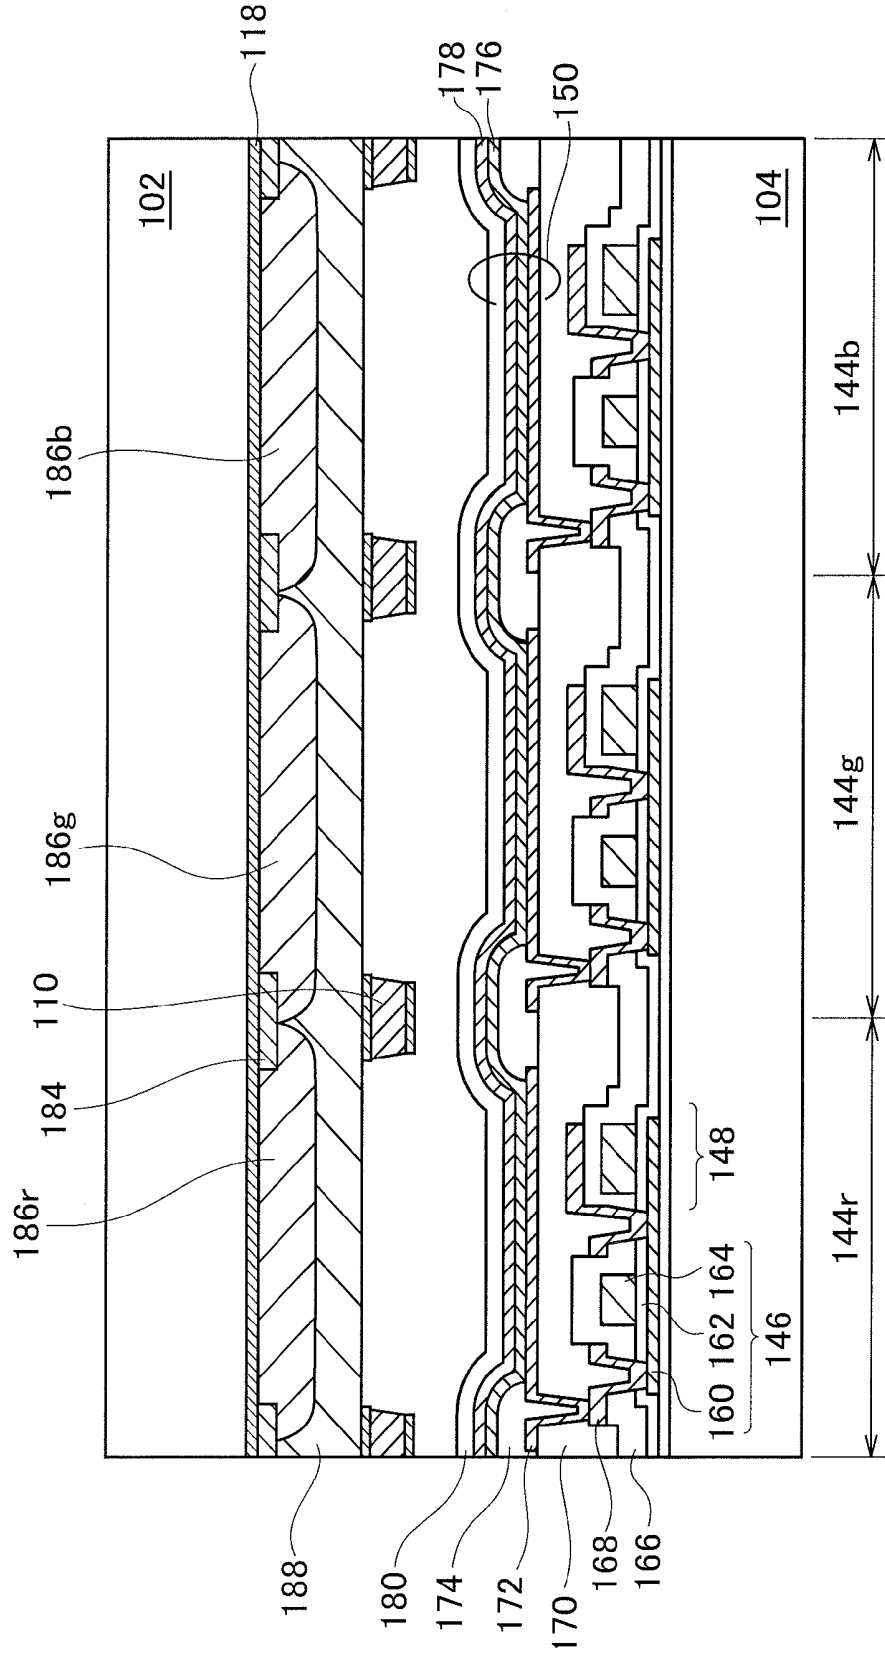


FIG. 25

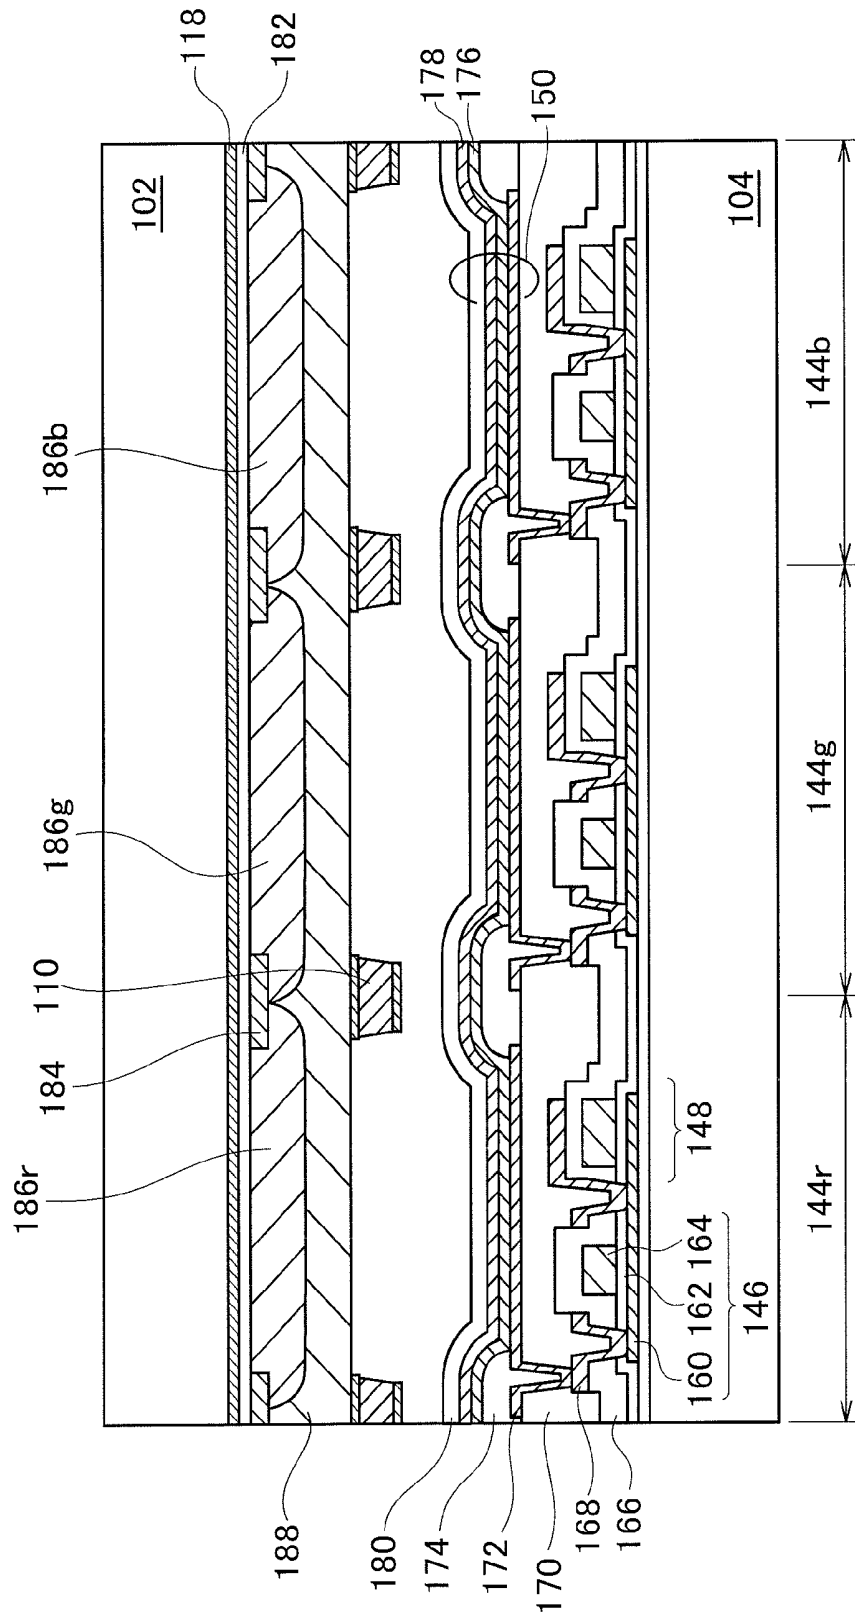


FIG. 26

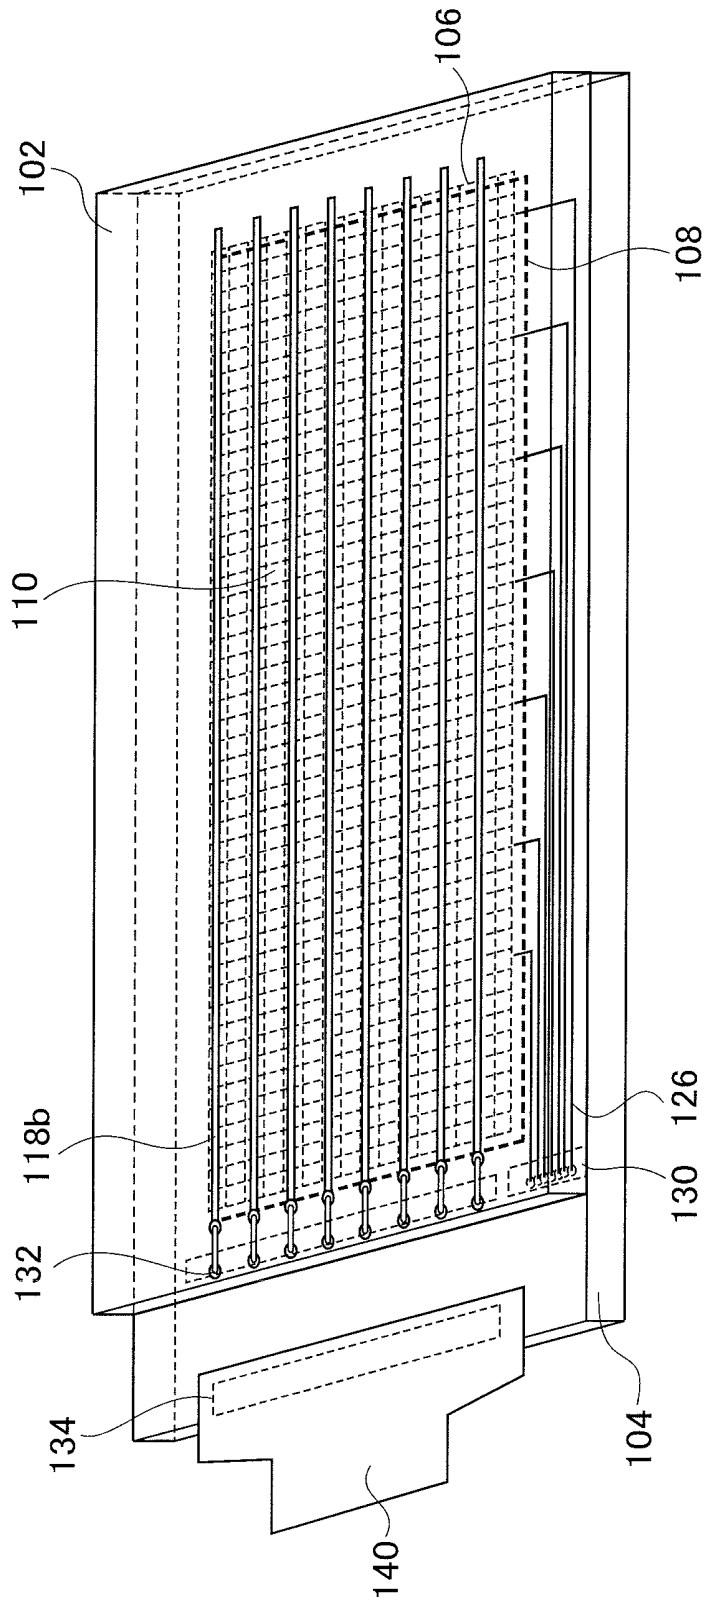


FIG. 27

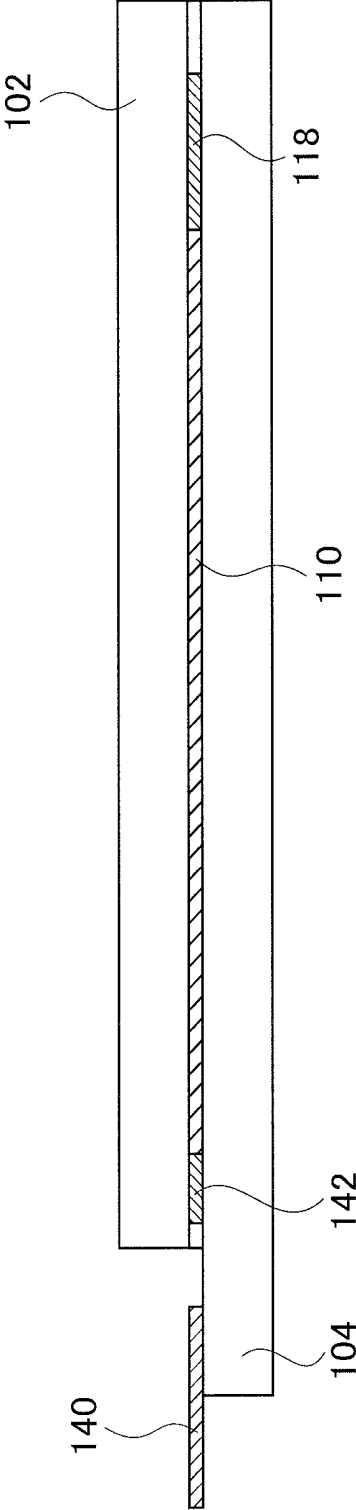


FIG. 28


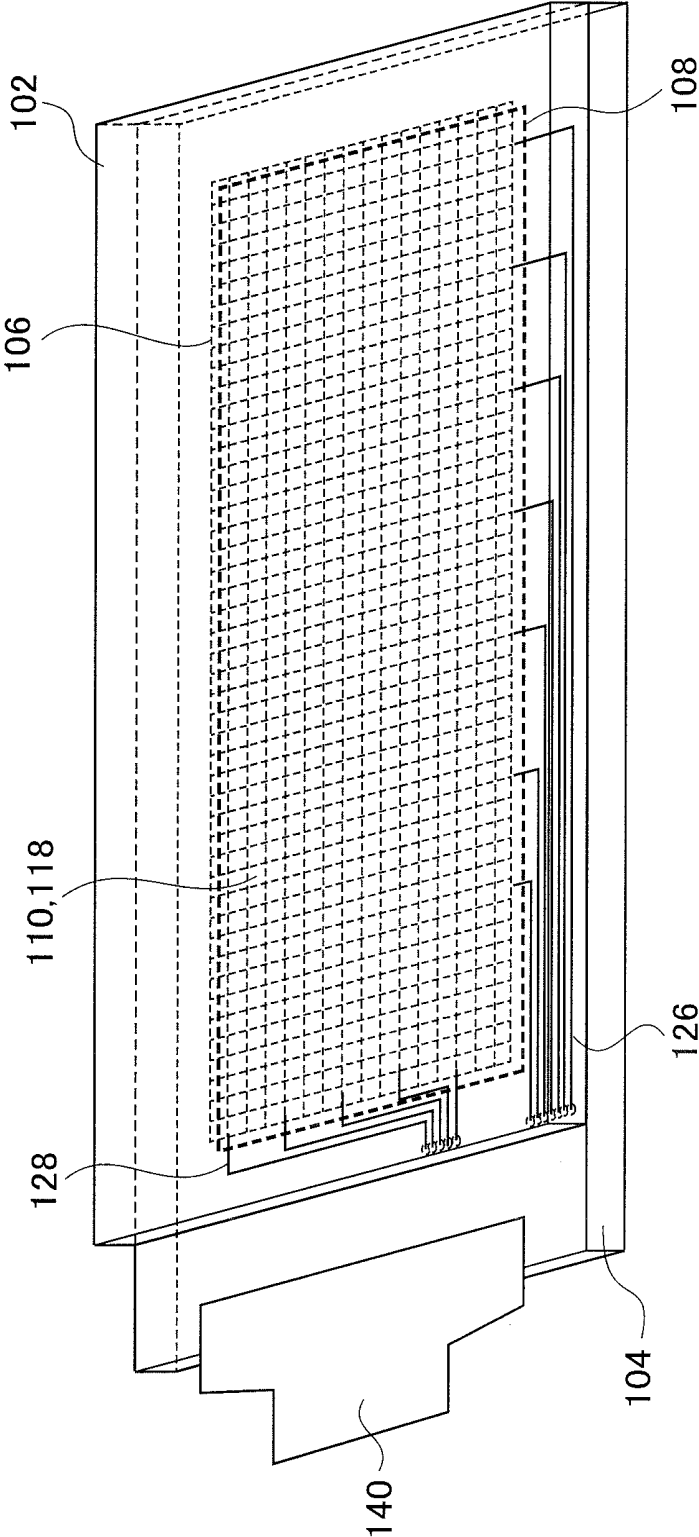


FIG. 29

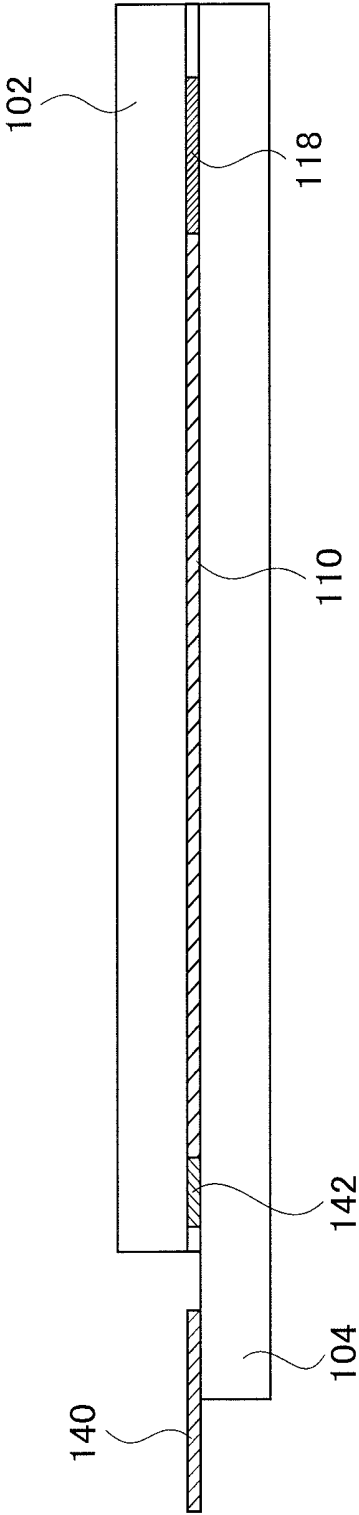

ORGANIC ELECTROLUMINESCENT DISPLAY DEVICE HAVING AN INPUT FUNCTION

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is based upon and claims the benefit of priority from the prior Japanese Patent Application No. 2013-188128, filed on Sep. 11, 2013, the entire contents of which are incorporated herein by reference.

FIELD

[0002] The present invention relates to an organic electroluminescent display device having an input function.

BACKGROUND

[0003] Organic electroluminescent display devices including a substrate which has light emitting devices each controlled independently and provided in accordance with pixels, and also including a counter substrate located to face the substrate, in which light emitted by the light emitting device in each pixel is visually recognized through the counter substrate to provide information display or the like are now being developed. Such an organic electroluminescent display device is of a top emission type, and in the case where light emitted by the light emitting device is so-called white light, the counter substrate includes a color filter.

[0004] In an organic electroluminescent display device that provides color display, one pixel includes, for example, a red pixel, a green pixel and a blue pixel. The light emitting intensity of the light emitting device of the color pixel of each color is changed in one pixel, so that the color tone is changed to provide color display. Therefore, the red pixel, the green pixel and the blue pixel included in one pixel are each referred to also as a "sub pixel".

[0005] The color filter is provided over the side of the pixel on which the light is output from the light emitting device. In the color filter, color layers (color filter layers) having different transmission spectra are defined in correspondence with the sub pixels. At a border between the color filter layers having different transmission spectra, a light shielding layer is provided.

[0006] The light shielding layer is provided in order to demarcate the sub pixels having different color elements so that color mixture which would otherwise occur between adjacent pixels (or sub pixels) is prevented. For example, Japanese Laid-Open Patent Publications No. 2002-299044 and Japanese Laid-Open Patent Publications No. 2007-220395 each disclose an organic electroluminescent display device in which a light shielding layer is provided to enclose a light emitting area of each pixel in order to prevent light leaks between adjacent pixels (sub pixels).

[0007] Recently, electronic devices including a graphical user interface which displays an image such as an icon or the like on a display screen and is operated by a touch on the image have been widely used. A display panel also having as an input function that is used in such an electronic device is also referred to as a touch panel (or touch screen). A mainstream touch panel is of an electrostatic capacitance system, which detects a change in the electrostatic capacitance of the sensor electrode and converts such an electrostatic capacitance into an input signal.

[0008] Japanese Laid-Open Patent Publication No. 2008-216543 discloses an organic electroluminescent display device having such an input function. In this organic electroluminescent display device, a part of the sensor electrode that detects a touch also acts as a light shielding layer.

[0009] The light shielding layer disclosed in each of Japanese Laid-Open Patent Publications Nos. 2002-299044 and 2007-220395 is provided only for the purpose of shielding light. In order to provide such an organic electroluminescent display device with a touch input function, a touch panel of an electrostatic capacitance system needs to be externally attached thereto. An organic electroluminescent display device having such an externally attached touch panel is increased in the size or the thickness and in the weight, and cannot be applied for an electronic device that needs to be thinner and more lightweight.

[0010] In the organic electroluminescent display device disclosed in Japanese Laid-Open Patent Publication No. 2008-216543, the light shielding layer also acts as a sensor electrode. However, the part acting as the sensor electrode is separated from a lattice portion that blocks light. Namely, a part of the light shielding unit acts as the sensor electrode. In other words, the light shielding unit includes a sensor electrode unit acting as the sensor electrode and a unit that does not act as the sensor electrode and acts only as a light shielding layer.

[0011] Therefore, the part also acting as the sensor electrode in a touch detection zone needs to be separated from the part acting only as the light shielding layer. In such a separation area, light leaks. In the case where the light shielding layer, which originally should block light, has such a separation area, display lines are recognized due to a luminance difference or the like and thus image quality is deteriorated.

SUMMARY

[0012] An organic electroluminescent display device in an embodiment according to the present invention includes a first substrate having a pixel area including a plurality of pixels each including a plurality of sub pixels, a light emitting devices are provided in correspondence with the sub pixels, and a partition layer covering a peripheral portion of each of the sub pixels; and a second substrate having a sensing unit including a first electrode pattern extending in one direction and a second electrode pattern extending in a direction intersecting the one direction, and the first electrode pattern and the second electrode pattern is provided out of contact from each other. The first substrate and the second substrate are located to face each other such that the pixel area and the first electrode pattern face each other; and the first electrode pattern is located to overlap the partition layer so as to enclose the sub pixels.

[0013] In another embodiment of the organic electroluminescent display device according to the present invention, it is preferable that a side surface of the first electrode pattern is inclined such that an open area in the first electrode pattern is opened toward the first substrate from the second substrate. In the structure in which the side surface of the first electrode pattern is inclined, it is preferable that the side surface of the first electrode pattern is a light-reflecting surface. In this case, it is preferable that the first electrode pattern includes at least an aluminum layer or an aluminum alloy layer, and the light-reflecting surface is formed of the aluminum layer or the aluminum alloy layer.

[0014] In still another embodiment of the organic electroluminescent display device according to the present invention, the first electrode pattern includes a plurality of first electrodes extending in the one direction and first inter-electrode patterns provided between the first electrodes while being out of contact from each other.

[0015] In still another embodiment of the organic electroluminescent display device according to the present invention, it is preferable that the first electrode pattern and the second electrode pattern have different patterns, and the second electrode pattern includes large square or rectangular shapes covering periods of the first electrode pattern.

[0016] In still another embodiment of the organic electroluminescent display device according to the present invention, it is preferable that the first electrode pattern and the second electrode pattern have substantially the same pattern as each other and are provided to overlap each other.

[0017] In still another embodiment of the organic electroluminescent display device according to the present invention, it is preferable that the second substrate includes a color filter layer between the first electrode pattern and the second electrode pattern, at a position overlapping each of the sub pixels.

BRIEF EXPLANATION OF DRAWINGS

[0018] FIG. 1 is a perspective view showing an overview of an organic electroluminescent display device in an embodiment according to the present invention;

[0019] FIG. 2A is a plan view showing a structure of electrodes in a sensing unit of the organic electroluminescent display device in the embodiment according to the present invention;

[0020] FIG. 2B is a plan view showing a structure of electrodes in the sensing unit of the organic electroluminescent display device in the embodiment according to the present invention;

[0021] FIG. 3 is a perspective view showing an overview of a module of the organic electroluminescent display device in the embodiment according to the present invention;

[0022] FIG. 4 is a cross-sectional view showing the overview of the module of the organic electroluminescent display device in the embodiment according to the present invention;

[0023] FIG. 5 is a plan view showing a structure of electrodes in the sensing unit of the organic electroluminescent display device in the embodiment according to the present invention;

[0024] FIG. 6 is a cross-sectional view showing details of a pixel area of the organic electroluminescent display device in the embodiment according to the present invention;

[0025] FIG. 7A is a plan view showing a structure of electrodes in a sensing unit of an organic electroluminescent display device in an embodiment according to the present invention;

[0026] FIG. 7B is a plan view showing a structure of electrodes in a sensing unit of an organic electroluminescent display device in an embodiment according to the present invention;

[0027] FIG. 8 is a plan view showing a structure of electrodes in a sensing unit of an organic electroluminescent display device in an embodiment according to the present invention;

[0028] FIG. 9 is a perspective view showing an overview of an organic electroluminescent display device in an embodiment according to the present invention;

[0029] FIG. 10A is a plan view showing a structure of electrodes in a sensing unit of the organic electroluminescent display device in the embodiment according to the present invention;

[0030] FIG. 10B is a plan view showing a structure of electrodes in a sensing unit of the organic electroluminescent display device in the embodiment according to the present invention;

[0031] FIG. 11 is a perspective view showing an overview of a module of the organic electroluminescent display device in the embodiment according to the present invention;

[0032] FIG. 12 is a cross-sectional view showing the overview of the module of the organic electroluminescent display device in the embodiment according to the present invention;

[0033] FIG. 13 is a plan view showing a structure of electrodes in the sensing unit of the organic electroluminescent display device in the embodiment according to the present invention;

[0034] FIG. 14 is a cross-sectional view showing details of a pixel area of the organic electroluminescent display device in the embodiment according to the present invention;

[0035] FIG. 15 is a cross-sectional view showing details of a pixel area of the organic electroluminescent display device in the embodiment according to the present invention;

[0036] FIG. 16A is a plan view showing a structure of electrodes in a sensing unit of an organic electroluminescent display device in an embodiment according to the present invention;

[0037] FIG. 16B is a plan view showing a structure of electrodes in a sensing unit of an organic electroluminescent display device in an embodiment according to the present invention;

[0038] FIG. 17 is a plan view showing a structure of electrodes in a sensing unit of an organic electroluminescent display device in an embodiment according to the present invention;

[0039] FIG. 18 is a perspective view showing an overview of a module of an organic electroluminescent display device in an embodiment according to the present invention;

[0040] FIG. 19 is a cross-sectional view showing the overview of the module of the organic electroluminescent display device in the embodiment according to the present invention;

[0041] FIG. 20 is a cross-sectional view showing details of a pixel area of the organic electroluminescent display device in the embodiment according to the present invention;

[0042] FIG. 21 is a cross-sectional view showing details of a pixel area of the organic electroluminescent display device in the embodiment according to the present invention;

[0043] FIG. 22 is a perspective view showing an overview of a module of an organic electroluminescent display device in an embodiment according to the present invention;

[0044] FIG. 23 is a cross-sectional view showing the overview of the module of the organic electroluminescent display device in the embodiment according to the present invention;

[0045] FIG. 24 is a cross-sectional view showing details of a pixel area of the organic electroluminescent display device in the embodiment according to the present invention;

[0046] FIG. 25 is a cross-sectional view showing details of a pixel area of the organic electroluminescent display device in the embodiment according to the present invention;

[0047] FIG. 26 is a perspective view showing an overview of a module of an organic electroluminescent display device in an embodiment according to the present invention;

[0048] FIG. 27 is a cross-sectional view showing the overview of the module of the organic electroluminescent display device in the embodiment according to the present invention;

[0049] FIG. 28 is a perspective view showing an overview of a module of an organic electroluminescent display device in an embodiment according to the present invention; and

[0050] FIG. 29 is a cross-sectional view showing the overview of the module of the organic electroluminescent display device in the embodiment according to the present invention.

DESCRIPTION OF EMBODIMENTS

[0051] Hereinafter, embodiments of the present invention will be described with reference to the drawings or the like. The present invention can be carried out in many different embodiments, and is not to be interpreted as being limited to any of the following embodiments.

[0052] In the following description of the present invention, elements having the same or similar functions will bear identical reference signs in different figures. For such elements, the same description will not be repeated unless there is a specific reason. In the present specification, in the case where certain components or areas are present “over” or “under” and “above” or “below” other components or areas, as long as there are no particular limitations, this includes not only the case where components or areas are directly above or directly below other components or areas but also the case where components or areas are above or below other components or areas with other structural components provided in between.

Embodiment 1

[0053] In this embodiment, an organic electroluminescent display device having an input function in which a part of electrodes that form a sensor plane of an input sensor also acts as a light shielding wall between sub pixels will be described.

(1) Organic Electroluminescent Display Device

[0054] FIG. 1 shows an overview of an organic electroluminescent display device in this embodiment. The organic electroluminescent display device includes a second substrate 102 and a first substrate 104. The second substrate 102 and the first substrate 104 are located to face each other and secured to each other with a sealing member (not shown). In the following description, the first substrate comprises a substrate provided with the devices such as a transistor and the light emitting element, and the second substrate includes a substrate disposed to face the first substrate.

[0055] The organic electroluminescent display device includes a sensing unit 106 and a display pixel area 108. Owing to this, the organic electroluminescent display device in this embodiment has an input function. The display pixel area 108 and the sensing unit 106 are located to overlap each other. The sensing unit 106 includes a first electrode pattern extending in one direction (e.g., Y direction) and a second electrode pattern extending in a direction intersecting the one direction (e.g., X direction). In FIG. 1, the first electrode pattern 110 in the sensing unit 106 is shown whereas the second electrode pattern is omitted for the sake of simplicity.

[0056] Along a peripheral edge of the second substrate 102, a plurality of first lines 126 electrically connected to the first electrode pattern 110 are provided and integrated together. In an end area of the second substrate 102, a first terminal portion 130 connected to the first lines 126 is provided.

[0057] The display pixel area 108 includes a plurality of pixels provided in the display substrate 104. In the display pixel area 108, the pluralities of pixels are arrayed in, for example, a matrix. Each of the plurality of pixels includes a plurality of sub pixels. Each of the sub pixels acts as a color element structured to emit light of a single color (or light of a specific wavelength range) such as a red sub pixel, a green sub pixel or a blue sub pixel, and may be regarded as a minimum unit of the display pixel area 108. The plurality of sub pixels that emit light of different colors are put together to form one pixel. Thus, the display pixel area 108 can provide color display.

(2) Electrode Pattern in the Sensing Unit

[0058] With reference to FIG. 2A, the first electrode pattern 110 in area A1 enclosed by the dashed line in FIG. 1 will be described in detail. FIG. 2A is an enlarged view of area A1, and is a plan view showing a preferable embodiment of the first electrode pattern 110 (FIG. 1).

[0059] The first electrode pattern 110 (FIG. 1) includes a plurality of thin linear first electrodes 114 extending in one direction (e.g., Y direction) at generally an equal interval in the display pixel area 108. Among the plurality of first electrodes 114, optional several, or several tens of, first electrodes 114 are coupled together outside the display pixel area 108, and are electrically connected to each of the first lines 126. For the sake of convenience, a group of the first electrode 114 that are connected to one first line 126 will be referred to as a “first electrode block 112”.

[0060] The first electrode block 112 includes a plurality of first electrodes 114 arrayed at a predetermined interval. Between adjacent first electrodes 114, first inter-electrode patterns 116 are provided. The first inter-electrode patterns 116 each have a short and linear shape extending in a direction intersecting the one direction (e.g., X direction), and are arrayed in the one direction (Y direction) generally at an equal interval.

[0061] The interval between adjacent first electrodes 114 and the interval between adjacent first inter-electrode patterns 116 are optional. Preferably, as shown in FIG. 2A, any two adjacent first electrodes 114 and any two adjacent first inter-electrode patterns 116 are located to enclose a sub pixel 144 in the display pixel area 108. In other words, in the display pixel area 108, it is preferable that sub pixels 144 are located to be each enclosed by two adjacent first electrodes 114 and two adjacent first inter-electrode patterns 116.

[0062] The first electrode pattern 110 (FIG. 1) is preferably formed of a non-transmissive conductive material, for example, a metal material such as aluminum (Al), titanium (Ti), molybdenum (Mo), tungsten (W) or the like. In this manner, the first electrode pattern 110 can have a function of a light shielding layer. Namely, the sub pixels 144 are each enclosed by the first electrodes 114 and the first inter-electrode patterns 116, so that light output areas of the sub pixels 144 are demarcated to prevent light from one sub pixel from leaking toward an adjacent sub pixel.

[0063] For the sake of convenience, the first electrodes 114 coupled together outside the display pixel area 108 and the first inter-electrode patterns 116 provided between such first electrodes 114 are grouped as the first electrode block 112. A plurality of such first electrode blocks 112 are arrayed at a predetermined interval.

[0064] Between any two adjacent first electrode blocks 112, a blank area where no electrode pattern is provided

would be present. If such a blank area is provided between two adjacent first electrode blocks **112**, display non-uniformity (display lines) may be visually recognized by a user viewing a display screen in an oblique direction in the state where the organic electroluminescent display device exhibits a display function or an input function.

[0065] In order to avoid this, in this embodiment, patterns that are the same as the first inter-electrode patterns **116** are located in the blank area. Since the patterns that are the same as the first inter-electrode patterns **116** (dummy patterns) are provided in the blank area, the first electrode pattern **110** (FIG. 1) is guaranteed to have a periodicity and thus the inconvenience that display non-uniformity (display lines) is visually recognized can be solved.

[0066] In this embodiment, first inter-electrode patterns **116'**, which are the dummy patterns, are provided between the first electrode blocks **112**. The first inter-electrode patterns **116'** each have a cut-off portion at both of two ends thereof so as not to be in contact with the first electrodes **114**. Since the first inter-electrode patterns **116'** have the cut-off patterns and thus are not in contact with the first electrodes **114**, short-circuit between adjacent blocks, which would be otherwise caused by pattern defect or the like, can be decreased.

[0067] FIG. 2B shows another preferable embodiment of the first electrode pattern **110** (FIG. 1). In FIG. 2B, the first electrode pattern **110** (FIG. 1) includes the first electrodes **114** and the first inter-electrode patterns **116**. The first electrodes **114** and the first inter-electrode patterns **116** have substantially the same structure as that shown in FIG. 2A, except that a smaller number of the first electrodes **114** are coupled together (are connected to each of the first lines **126**) outside the display pixel area **108**. In the embodiment shown in FIG. 2B, every other first electrode **114** is connected to the first line **126**.

[0068] In FIG. 2B, it is preferable that dummy patterns, namely, a first electrode **114'** and the inter-electrode patterns **116'**, are provided between adjacent first electrode blocks **112**. Namely, it is preferable that the first electrode **114'** and/or the first inter-electrode patterns **116'** are provided between any two adjacent first electrode blocks **112** such that the first electrode pattern **110** (FIG. 1) has a periodicity. Owing to provision of such dummy patterns, it can be made difficult for the first electrode pattern **110** to be visually recognized.

[0069] For the first electrode pattern **110** (FIG. 1) in this embodiment, the number of first electrodes **114** to be connected to the first line **126** in each first electrode block **112** may be optional. The number of electrodes that are actually used for sensing in one electrode block may be adjusted, so that the periodicity of the pattern can be maintained while the value of the electrostatic capacitance can be adjusted. Owing to this, the sensitivity of the sensing unit **106** (FIG. 1) can be adjusted.

(3) Structure of the Module

[0070] FIG. 3 shows an embodiment of a module in which flexible printed circuit boards (hereinafter, referred to as "FPC") are attached to the organic electroluminescent display device shown in FIG. 1. FIG. 4 is a schematic cross-sectional view of the module shown in FIG. 3. Hereinafter, the module will be described with reference to FIG. 3 and FIG. 4.

[0071] The sensing unit **106** in the second substrate **102** includes the first electrode pattern **110** and a second electrode pattern **118b**. The first electrode pattern **110** is provided at a

surface of the second substrate **102** facing the first substrate **104**, and the second electrode pattern **118b** is provided at a surface of the second substrate **102** opposite to the first electrode pattern **110**. The display pixel area **108** is provided to overlap the sensing unit **106**. The display pixel area **108** includes the plurality of sub pixels, and the sub pixels emit light toward the second substrate **102**. Therefore, the display screen formed of the display pixel area **108** is over the second substrate **102**.

[0072] A first FPC **136** is connected to the first terminal portion **130** of the second substrate **102** that is connected to the first electrode pattern **110** by the first lines **126**. A second FPC **138** is connected to a second terminal portion **132** of the second substrate **102** that is connected to the second electrode pattern **118b**. A third FPC **140** is attached to the first substrate **104**.

[0073] As shown in FIG. 2A or FIG. 2B, the first electrode pattern **110** includes the plurality of first electrode blocks **112**. Each of the plurality of first electrode blocks **112** is connected to one first line **126**. The plurality of first lines **126** are integrated together and connected to the first terminal portion **130** along the peripheral edge of the second substrate **102**. Since the first lines **126** are integrated, the first terminal portion **130** can have a smaller width, and thus the first FPC **136** can be smaller. The second FPC **138** connected to the second electrode pattern **118b** has substantially the same width as that of the second electrode pattern **118b** and is connected to the second electrode pattern **118b** in the second terminal portion **132**.

[0074] With reference to FIG. 5, the first electrode pattern **110** in area A1 enclosed by the dashed line and the second electrode pattern **118b** that are shown in FIG. 3 will be described in detail. As shown in FIG. 5, the first electrode pattern **110** extends in one direction (Y direction for the sake of convenience in FIG. 5), whereas the second electrode pattern **118b** extends in a direction intersecting the one direction (X direction for the sake of convenience in FIG. 5).

[0075] FIG. 5 shows a detailed structure of an electrostatic system of the electrode pattern of the sensing unit (FIG. 3). The electrostatic sensor detects a change in the electrostatic capacitance of the first electrode pattern **110** (FIG. 3) and the second electrode pattern **118b** (FIG. 3) and thus can detect at which position in the plane the electrostatic capacitance has been changed. For example, the electrostatic sensor detects a change in the Y direction by the first electrode pattern **110** (FIG. 3) and detects a change in the X direction by the second electrode pattern **118b** (FIG. 3), and thus can detect which position in the plane of the sensing unit **106** (FIG. 3) has been touched by the user's finger.

[0076] The first electrodes **114** and the first inter-electrode patterns **116** included in the first electrode pattern **110** (FIG. 3) enclose the sub pixels **114** as shown in FIG. 2A or FIG. 2B, and are linear and periodically provided generally in accordance with the pitch of the sub pixels **144**. By contrast, a plurality of second electrodes **122b** in the second electrode pattern **118** (FIG. 3) are planar. A series of such second electrodes **122b**, among the plurality of second electrodes **122b**, are electrically connected in the X direction via connection portions and connected to a second line **128b**. The planar electrodes **122b** each have a size that covers a plurality of sub pixels, namely, covers each of periods of the periodical first electrode pattern **110**. The first electrodes **114** and the first inter-electrode patterns **116** of the first electrode pattern **110** (FIG. 3) are provided at such a small pattern as to enclose

individual pixel electrodes **144**. The pitch may be changed in accordance with the size of the display screen and the number of pixels, and is about several hundred micrometers. By contrast, the second electrodes **122b** of the second electrode pattern **118b** (FIG. 3) may be generally as large as several millimeters because it is merely needed to specify the position of an icon displayed over the display screen.

[0077] Light output from the sub pixels **144** is transmitted through the second substrate (FIG. 3). Therefore, it is preferable that the second electrode pattern **118** (FIG. 3) is formed of a transparent conductive material whereas the first electrode pattern **110** (FIG. 3) is formed of a non-transmissive metal material. The transparent conductive material is, for example, indium tin oxide (ITO), a composite material of indium tin oxide and zinc oxide (IZO), or the like.

[0078] The first electrodes **114** and the first inter-electrode patterns **116** of the first electrode pattern **110** (FIG. 3) and the second electrodes **122b** of the second electrode **118b** (FIG. 3) are much smaller than, for example, the finger of the user. Therefore, it is not needed to detect a touch by use of all the electrodes. For example, as shown in FIG. 5, second inter-electrode patterns **124b** may be provided on both sides of each second electrode **122b**. The second inter-electrode patterns **124b** are not electrically connected to the second electrodes **122b** and thus do not contribute to sensing, but form a periodical pattern like the second electrodes **122b**. This makes it difficult for the second electrode pattern **118b** to be visually recognized. Namely, the provision of the second inter-electrode patterns **124b** contributes to make the second electrode pattern **118b** externally invisible. By contrast, the pitch of the first electrodes **114** and the first inter-electrode patterns **116** of the first electrode pattern **110** (FIG. 3) are too small to be visually recognized and do not cover the sub pixels **144**, and thus do not influence the display.

[0079] As described above, the first electrode pattern **110** enclose the sub pixels **144**, and the second electrodes **122b** facing the first electrode pattern **110** each have a large square or rectangular shape. Owing to such a structure, the same sensing function as that of the conventional device can be provided while the light shielding function between adjacent sub pixels is provided by the first electrode pattern **110**.

(4) Details of the Display Pixel Area

[0080] FIG. 6 shows the display pixel area of the organic electroluminescent display device in this embodiment in detail. FIG. 6 shows a cross-sectional structure of a first sub pixel **144r**, a second sub pixel **144g** and a third sub pixel **144b**. The first sub pixel **144r** is a red sub pixel, the second sub pixel **144g** is a green sub pixel, and the third sub pixel **144b** is a blue sub pixel. These sub pixels have basically the same structure.

[0081] Each sub pixel includes a transistor **146**, a storage capacitance **148** and a light emitting device **150**. The transistor **146** includes a semiconductor layer **160**, a gate insulating layer **162** and a gate electrode **164**. A source or drain electrode **168** is connected to a pixel electrode **172**. Between the gate electrode **164** and the source or drain electrode **168**, a first interlayer insulating layer **166** is provided. Between the source or drain electrode **168** and the pixel electrode **172**, a second interlayer insulating layer **170** is provided. The light emitting device **150** is formed of a stack of the pixel electrode **172**, a light emitting layer **176** and a counter electrode **178**. The light emitting layer **176** contains an organic electroluminescence material.

[0082] Over the first substrate **104**, a partition layer **174** is provided to demarcate the sub pixels **144**. A passivation layer **180** is provided over the counter electrode **178** and protects the light electrode device **150** against deterioration due to moisture or the like. Over the second substrate **102**, the first electrode pattern **110** is provided at the surface thereof facing the first substrate **102**. Over the opposite surface of the second substrate **102**, the second electrode pattern **118b** is provided. The first substrate **102** and the second substrate **104** face each other while having a gap therebetween. The gap may be filled with a filling material.

[0083] Over the second substrate **102**, a color filter layer **186r** that transmits red light, a color filter layer **186g** that transmits green light and a color filter layer **186b** that transmits blue light are provided in correspondence with the first sub pixel **144r**, the second sub pixel **144g** and the third sub pixel **144b**. In the case where the color filter layers are provided over the second substrate **102**, it is not necessary that the light emitting devices **150** for the first sub pixel **144r**, the second sub pixel **144g** and the third sub pixel **144b** emit light of different spectra from each other. The light emitting devices **150** provided for the respective sub pixels may emit white light. Owing to this, the light emitting layer **176** do not need to contain different materials in correspondence with the first sub pixel **144r**, the second sub pixel **144g** and the third sub pixel **144b**, and the light emitting layer **176** can be provided commonly for all the sub pixels. This is advantageous to decrease the size of the sub pixels (or pixels). The light emitting layer **176** can emit white light by having a structure including a stack of light emitting layers that respectively emit red (R) light, green (G) light blue (B) light, or a stack of light emitting layers that respectively emit blue (B) light and yellow (Y) light.

[0084] A light shielding layer **184** is provided at a border between the color filter layer **186r** that transmits red light, the color filter layer **186g** that transmits green light and the color filter layer **186b** that transmits blue light. An overcoat layer **188** is provided to cover the color filter layer **186r**, the color filter layer **186g** and the color filter layer **186b** in order to flatten the surface.

[0085] The first electrode pattern **110** is provided at the surface that is generally flattened by the overcoat layer **188**. Since the first electrode pattern **110** is provided on such a flat surface, the electrostatic capacitance is prevented from being deviated part by part in a static state.

[0086] As described above, the first electrode pattern **110** is provided so as to enclose the sub pixels **144**, and therefore generally overlap the light shielding layer **184**. In other words, the partition layer **174** provided over the first substrate **104** is located to enclose the pixel electrodes **172**, and therefore the first electrodes **114** and the first inter-electrode patterns **116** of the first electrode pattern **110** are located to be held between the light shielding layer **184** and the partition layer **174**. Such an arrangement of the first electrode pattern **110** does not decrease the numerical aperture of the pixels.

[0087] As shown in FIG. 6, it is preferable that the first electrode pattern **110** provided over the overcoat layer **188** protrudes toward the first substrate **104**. In other words, it is preferable that the first electrode pattern **110** is as close as possible to the light emitting device **150** provided in each sub pixel **144**.

[0088] Light emitted by the light emitting device **150** is output in a generally vertical direction (toward the second substrate **102** in FIG. 6) and also in an oblique direction. If, for

example, among the light output from the second sub pixel **144g**, an oblique light component is incident over the color filter layer **816r** or the color filter layer **186b** corresponding to the first sub pixel **144r** or the third sub pixel **144b**, color mixture occurs. This results in decrease in the color reproducibility and also in the contrast.

[0089] However, in the structure in which the first electrode pattern **110** is provided so as to enclose each sub pixel **144** so as to prevent the oblique light component from being leaked to an adjacent sub pixel, such an inconvenience can be solved.

[0090] In this case, it is preferable that side surfaces of the first electrode pattern **110** is inclined such that an open area in the first electrode pattern **110** is opened toward the first substrate **102** from the second substrate **102**. Owing to such a structure, projected areas of the side surfaces of the first electrode pattern **110** are increased as seen from the light emitting devices **150**. As a result, the oblique light component from each light emitting device **150** can be blocked by the side surfaces of the first electrode pattern **110** and prevented from leaking to an adjacent sub pixel.

[0091] It is also preferable that at least a part of the side surfaces of the first electrode pattern **110** is a light-reflecting surface. As schematically shown in FIG. 6, since a part of the side surfaces of the first electrode pattern **110** is a light-reflecting surface, the oblique light component from a sub pixel can be reflected by the light-reflecting surface and used as light output from this sub pixel. Since the oblique light component is included in the light output from this sub pixel, the light emitted from the light emitting device **150** can be effectively utilized. Since the first electrode pattern **110** enclosing the sub pixels **144** is formed of a light-reflective metal material, the side surface also acts as a light-reflecting surface, which effectively utilize light emitted from the sub pixel and also prevents light from leaking to an adjacent sub pixel.

[0092] In order to exhibit a function as an electrode, a function as a light shielding wall and also a function as a light-reflecting surface, the first electrode pattern **110** preferably includes an aluminum layer or an aluminum alloy layer. In this case, in order to form the first electrode pattern **110** having an inclining light-reflecting surface, the aluminum layer or the aluminum alloy layer may be taper-etched. Aluminum or an aluminum alloy has a low resistance, and therefore does not decrease the response speed when used for an electrode for sensing. Aluminum or an aluminum alloy also has a higher reflectance for light in a visible range than that of titanium or molybdenum, and therefore is preferable for forming a light-reflecting surface. The first electrode pattern **110** may be formed of an aluminum or aluminum alloy single layer, but it is preferable that the aluminum or aluminum alloy single layer is sandwiched between metal layers of titanium or the like having a relatively low light reflectance in order to decrease the amount of stray light.

[0093] As described above, in this embodiment, the first electrode pattern is provided so as to enclose the sub pixels, and thus the inter-pixel (inter-sub pixel) color mixture can be prevented. This can improve the image quality. This structure can also increase the light extraction efficiency of light from the light emitting device in each pixel. This can decrease the power consumption.

[0094] Even in the case where the first electrode pattern is a precise pattern enclosing the sub pixels, the number of lines usable as detection lines may be appropriately adjusted, so that the electrostatic capacitance of the sensing electrodes can

be adjusted and thus the sensitivity of the sensing electrodes can be adjusted. This can increase the S/N ratio of a touch sensor unit.

MODIFICATION EXAMPLE 1

[0095] FIG. 7A and FIG. 7B each show another preferable embodiment of the first electrode pattern **110**. In FIG. 7A, the first electrode pattern **110** (FIG. 3) includes the first electrodes **114** and the first inter-electrode patterns **116** in the display pixel area **108**. The first electrodes **114** extend in one direction (Y direction for the sake of convenience in FIG. 7A), whereas the first inter-electrode patterns **116** extend in a direction intersecting the one direction (X direction for the sake of convenience in FIG. 7A). The first inter-electrode patterns **116** each have a cut-off portion at an end thereof, and is connected to the first electrode pattern **110** at the other end thereof.

[0096] In FIG. 7B, the first electrodes **114** and the first inter-electrode patterns **116** of the first electrode pattern **110** (FIG. 3) have substantially the same structure as that in FIG. 7A, except that a smaller number of the first electrodes **114** are coupled together (are connected to each of the first lines **126**) outside the display pixel area **108**. In the embodiment shown in FIG. 7B, every other first electrode **114** is connected to the first line **126**.

[0097] Owing to such a structure, the value of the electrostatic capacitance of the first electrode pattern **110** (FIG. 3) can be adjusted, and thus the sensitivity of the sensing unit can be adjusted. In this case, it is preferable that dummy patterns are provided between adjacent first electrode blocks **112** so that display non-uniformity (display lines) is not visually recognized. In FIG. 7A, the first inter-electrode patterns **116'** are provided between adjacent first electrode blocks **112**. In FIG. 7B, the first electrode **114'** and the first inter-electrode pattern **116'** are provided between adjacent first electrode blocks **112**. Owing to provision of such dummy patterns, the first electrode pattern **110** is guaranteed to have a periodicity, and display non-uniformity (display lines), which could otherwise occur when a viewer views the display screen in an oblique direction, can be suppressed.

[0098] In FIG. 7A and FIG. 7B, the first electrodes **114** and the first inter-electrode patterns **116** enclose the sub pixels **144**. The present invention is not limited to such a structure. The first electrodes **114** and the first inter-electrode patterns **116** may enclose pixels (display unit formed of a plurality of sub pixels).

[0099] FIG. 8 shows a detailed structure of the first electrode pattern **110** (FIG. 3) and the second electrode pattern **118b** (FIG. 3) shown in FIG. 7A. In FIG. 8, the first electrodes **114** of the first electrode pattern **110** (FIG. 3) extend in one direction (Y direction for the sake of convenience in FIG. 8), whereas the second electrode pattern **118b** (FIG. 3) extends in a direction intersecting the one direction (X direction for the sake of convenience in FIG. 8). The second electrode pattern **118b** (FIG. 3) have substantially the same structure as that described above with reference to FIG. 5.

[0100] With the first electrode pattern **110** (FIG. 3) shown in FIG. 7A or FIG. 7B, a region of the first electrode pattern **110** that encloses each sub pixel **144** has only two cut-off portions. This can reinforce the function as the light shielding wall and/or the light-reflecting surface between adjacent sub pixels. Therefore, the problem of the color mixture between adjacent sub pixels can be solved. As a result, the utilization factor of the light emitted by the light emitting devices can be

further increased, and the contrast and also the visual recognizability can be further improved.

Embodiment 2

[0101] In this embodiment, an organic electroluminescent display device having an input function in which the resistance of electrodes included in a sensing unit is decreased will be described.

(1) Organic Electroluminescent Display Device

[0102] FIG. 9 shows a structure of a second electrode pattern 118 in the sensing unit 106 of an organic electroluminescent display device in this embodiment. The second electrode pattern 118 is provided at a surface of the second substrate opposite to the first substrate 104. The first electrode pattern 110 is substantially the same as that in Embodiment 1, and is omitted in FIG. 9.

[0103] The second electrode pattern 118 is connected to second lines 128. The second lines 128 are each a metal line, and are integrated together and connected to a second terminal portion 132 provided in an end area of the second substrate 102. Since the second electrode pattern 118 and the second terminal portion 132 are connected to each other by the second lines 128, the second terminal portion 132 can have a smaller width.

(2) Electrode Pattern in the Sensing Unit

[0104] With reference to FIG. 10A, the second electrode pattern 118 in area B1 enclosed by the dashed line in FIG. 9 will be described in detail. FIG. 10A is a partial enlarged view of the second electrode pattern 118.

[0105] FIG. 10A shows a preferable embodiment of the second electrode pattern 118 (FIG. 9). The second electrode pattern 118 (FIG. 9) includes a plurality of thin linear second electrodes 122 extending in one direction (X direction for the sake of convenience in FIG. 10A) and arrayed in the Y direction at generally an equal interval in the display pixel area 108. Among the plurality of second electrodes 122, a group of second electrodes 122 are coupled together outside the display pixel area 108 and are electrically connected to each of the second lines 128.

[0106] Between adjacent second electrodes 122, second inter-electrode patterns 124 are provided. The second inter-electrode patterns 124 each have a short and linear shape extending in a direction intersecting the one direction (Y direction for the sake of convenience in FIG. 10A) and are arrayed in the X direction generally at an equal interval.

[0107] The interval between adjacent second electrodes 122 and the interval between adjacent second inter-electrode patterns 124 of the second electrode pattern (FIG. 9) are optional. Preferably, as shown in FIG. 10A, any two adjacent second electrodes 122 and any two adjacent second inter-electrode patterns 124 are provided so as to enclose a sub pixel 144 in the display pixel area 108. In other words, it is preferable that sub pixels 144 are provided so as to each enclosed by two adjacent second electrodes 122 and two adjacent second inter-electrode patterns 124.

[0108] For the sake of convenience, the second electrodes 122 coupled together outside the display pixel area 108 and the second inter-electrode patterns 124 provided between such second electrodes 122 are grouped as a second electrode block 120. A plurality of such second electrode blocks 120 are arrayed at a predetermined interval in the sensing unit 106

(FIG. 9). Since the second electrode blocks 120 are located at the predetermined interval, there is a blank area between any two adjacent second electrode blocks 120.

[0109] If such a blank area is provided in a separation area between two adjacent second electrode blocks 120 (inter-block area), display non-uniformity (display lines) is visually recognized by a user viewing a display screen in an oblique direction in the state where the organic electroluminescent display device exhibits a display function or an input function. However, in the case where patterns that are the same as the second inter-electrode patterns 124 (dummy patterns) are provided in the inter-block area, such an inconvenience can be solved.

[0110] Second inter-electrode patterns 124' provided between adjacent second electrode blocks 120 each have a cut-off portion at both of two ends thereof so as not to be in contact with the second electrodes 122. Owing to this, short-circuit between adjacent blocks, which would be otherwise caused by pattern defect or the like, can be decreased.

[0111] The second electrode pattern 118 (FIG. 9) is formed of a metal material. The second electrode pattern 118 (FIG. 9) is located over the viewing side of the display screen, and therefore is preferably formed of a conductive material having a low light reflectance. As a conductive material having a low light reflectance, a metal material such as, for example, titanium (Ti), tungsten (W), molybdenum (Mo) or the like is usable.

[0112] In the case where the second electrode pattern 118 (FIG. 9) is formed of a conductive material, for example, a metal material as described above, the second lines 128 that connect the second electrode pattern 118 (FIG. 9) to the second terminal portion 132 can also be formed in the same layer.

[0113] FIG. 10B shows another preferable embodiment of the second electrode pattern 122 (FIG. 9). In FIG. 10B, the second electrodes 122 and the second inter-electrode patterns 124 of the second electrode pattern 118 have substantially the same structure as that in FIG. 10A, except that a smaller number of the second electrodes 122 are coupled together and connected to each of the second lines 128 outside the display pixel area 108. In the embodiment shown in FIG. 10B, the number of the second electrodes 122 coupled together is less than the number of the second electrodes 122 coupled together in FIG. 10A by one.

[0114] For the second electrode pattern 118 (FIG. 9) in this embodiment, the number of second electrodes 122 to be connected to the second line 128 in each second electrode block 120 may be optional. Owing to this, the value of the electrostatic capacitance of the second electrode pattern 118 (FIG. 9) can be adjusted, and thus the sensitivity of the sensing unit can be adjusted. In this case also, it is preferable that the dummy patterns are provided between adjacent second electrode blocks 120.

(3) Structure of the Module

[0115] FIG. 11 shows an embodiment of a module in which FPCs are attached to the organic electroluminescent display device in this embodiment. FIG. 12 is a schematic cross-sectional view of the module shown in FIG. 11. Hereinafter, the module will be described with reference to FIG. 11 and FIG. 12.

[0116] FIG. 11 shows a structure in which the first electrode pattern 110 and the second electrode pattern 118 are provided in the second substrate 104. The first electrode pattern 110 is

provided at a surface of the second substrate **102** facing the first substrate **104**, and the second electrode pattern **118** is provided at a surface of the second substrate **102** opposite to the first electrode pattern **110**.

[0117] The first FPC **136** is connected to the first terminal portion **130** of the second substrate **102** that is connected to the first electrode pattern **110** by the first lines **126**. The second FPC **138** is connected to the second terminal portion **132** of the second substrate **102** that is connected to the second electrode pattern **118**. The third FPC **140** is attached to the first substrate **104**.

[0118] The second electrode pattern **118** is formed of a conductive material, for example, a metal material having a lower resistance than that of a transparent conductive member such as indium tin oxide (ITO), a composite material of indium tin oxide and zinc oxide (IZO), or the like. Owing to this, the resistance of the second lines **128** connected to the second terminal portion **132** can be also made low. Since the second lines **128** are formed of a metal material, the second lines **128** can be made precise and integrated together. This can decrease the width of the second terminal portion **132**. Since the width of the second terminal portion **132** is decreased, the second FPC **138** can be reduced in size.

[0119] The second FPC **138** and the third FPC **140** are attached to the same side of the panel as each other. Therefore, in the case where the second FPC **138** is reduced in size, these two FPCs are prevented from interfering with each other when this module is incorporated into a device. Namely, this module can be attached to a small space, which can reduce the size of the device including the module.

[0120] Since the second electrode pattern **118** is formed of a conductive material having a lower resistance than that of a transparent conductive material such as indium tin oxide (ITO) or the like, the resistance of the second electrode pattern **118** can be made low. The sensing unit **106** functions by detecting a change in the electrostatic capacitance. Therefore, the reduction in the resistance of the second electrode pattern **118** can increase the response speed. Even when the organic electroluminescent display device is made large (even when the screen of the organic electroluminescent display device is made large), the response speed of the sensing unit **106** can be prevented from being decreased. In the structure in which the second electrode pattern **118** extends in a longitudinal direction of the panel as shown in FIG. **11**, the effect provided by the reduction in the resistance of the second electrode pattern **118** is more conspicuous.

[0121] With reference to FIG. **13**, the first electrode pattern **110** in area B1 enclosed by the dashed line and the second electrode pattern **118** that are shown in FIG. **11** will be described in detail. As shown in FIG. **13**, the first electrodes **114** of the first electrode pattern **110** extend in one direction (Y direction for the sake of convenience in FIG. **13**), whereas the second electrodes **122** of the second electrode pattern **118** extend in a direction intersecting the one direction (X direction for the sake of convenience in FIG. **13**).

[0122] The first electrode pattern **110** and the second electrode pattern **118** are both provided so as to enclose the sub pixels **114**. Therefore, even if the first electrode pattern **110** and the second electrode pattern **118** have a cut-off portion, the sub pixels **144** can be enclosed with no cut-off portion by locating the first electrode pattern **110** and the second electrode pattern **118** to overlap each other in a generally aligned manner. This can increase the inter-pixel (inter-sub pixel) light shielding property.

[0123] In FIG. **13**, the first electrode pattern **110** (FIG. **11**) and the second electrode pattern **118** (FIG. **11**) both enclose the sub pixels **114**. The present invention is not limited to such a structure. The first electrode pattern **110** (FIG. **11**) and the second electrode pattern **118** (FIG. **11**) may enclose pixels (display unit formed of a plurality of sub pixels).

(4) Details of the Display Pixel Area

[0124] With reference to FIG. **14**, a structure of the pixel area of the organic electroluminescent display device in this embodiment will be described. The structure of the first substrate **104** is the same as that described above with reference to FIG. **6** in Embodiment 1 and will not be described again.

[0125] Over the second substrate **102**, the first electrode pattern **110** is provided over an outer surface of the overcoat layer **188**. The first electrode pattern **110** is provided to overlap the light shielding layer **184** and/or the partition layer **174** so as to enclose the sub pixels **144**. In other words, the first electrode pattern **110** is located to be held between the light shielding layer **184** and/or the partition layer **174**. In FIG. **14**, the first electrode pattern **110** (the first electrodes **114**) extends in a direction perpendicular to the plane of the paper sheet of FIG. **14**.

[0126] The second electrode pattern **118** is provided at the surface of the second substrate **102** opposite to the first electrode pattern **110**. The second electrode pattern **118** (the second electrodes **122**) extend in a direction intersecting the first electrode pattern **110**.

[0127] The second electrode pattern **118** is located over a visually recognizable plane of the display screen. In this case, the second electrode pattern **118** may be formed of a metal material as described above, so that the reflectance can be decreased and background reflection over the display screen can be decreased. It is preferable that the second electrode pattern **118** is formed of a metal material such as, for example, titanium (Ti), tungsten (W), molybdenum (Mo) or the like as a conductive material having a low reflectance.

[0128] FIG. **15** shows a structure including a protection film **182** provided over the second electrode pattern **118** in addition to the structure shown in FIG. **14**. The protection film **182** is preferably provided generally over the entire surface of the second substrate **102** so as to cover the second electrode pattern **118** except for the second terminal portion **132**. Since the protection film **182** is provided over the second electrode pattern **118**, the effects of protecting the second electrode pattern **118** against corrosion, scratches or the like can be provided. The protection film **182** is preferably formed of an insulating material such as silicon oxide, silicon nitride or the like. The protection film **182** may include a plurality of films having different refractive indices to act as a reflection preventive film.

[0129] As described above, in this embodiment, the second electrode pattern is formed of a conductive material having a low resistance, and thus the resistance of the electrodes included in the sensing unit can be decreased. This can increase the response speed of the sensing unit. In other words, even when the organic electroluminescent display device is made large (even when the display screen of the organic electroluminescent display device is made large), the response speed of the sensing unit **106** is prevented from being decreased.

[0130] Even in the case where the second electrode pattern is a precise pattern enclosing the sub pixels, the number of lines usable as detection lines may be appropriately adjusted,

so that the electrostatic capacitance of the sensing electrodes can be adjusted and thus the sensitivity of the sensing electrodes can be adjusted. This can increase the S/N ratio of a touch sensor unit.

[0131] In this embodiment, the second electrode pattern is provided so as to enclose the sub pixels like the first electrode pattern. Therefore, light leaks are prevented, and image quality deterioration, which would be caused by the inter-sub pixel color mixture, can be prevented.

MODIFICATION EXAMPLE 2

[0132] FIG. 16A and FIG. 16B each show another preferable embodiment of the second electrode pattern 118 (FIG. 11). In FIG. 16A, the second electrode pattern 118 (FIG. 11) includes the second electrodes 122 and the second inter-electrode patterns 124 in the display pixel area 108. The second electrodes 122 extend in one direction (X direction for the sake of convenience in FIG. 16A), whereas the second inter-electrode patterns 124 extend in a direction intersecting the one direction (Y direction for the sake of convenience in FIG. 16A). The second inter-electrode patterns 124 each have a cut-off portion at an end thereof, and is connected to the second electrode pattern 118 at the other end thereof.

[0133] In FIG. 16B, the second electrodes 122 and the second inter-electrode patterns 124 of the second electrode pattern 118 (FIG. 11) have substantially the same structure as that in FIG. 16A, except that a smaller number of the second electrodes 122 are coupled together (are connected to each of the second lines 128) outside the display pixel area 108. In the embodiment shown in FIG. 16B, every third second electrode 122 is not connected to the second line 128.

[0134] Owing to such a structure, the value of the electrostatic capacitance of the second electrode pattern 118 (FIG. 11) can be adjusted, and thus the sensitivity of the sensing unit can be adjusted. In this case, it is preferable that dummy patterns that do not actually act as electrodes are provided between adjacent second electrode blocks 120.

[0135] Namely, between any two adjacent second electrode blocks 120, it is preferable that second inter-electrode patterns 124' are provided as dummy patterns as shown in FIG. 16A, or that the second inter-electrode patterns 124' and a second electrode 122' are provided as dummy patterns as shown in FIG. 16B. What dummy patterns are to be provided may be appropriately determined in consideration of the periodicity of the second electrode blocks 120. Owing to provision of such dummy patterns between adjacent second electrode blocks 120, the second electrode pattern 118 is guaranteed to have a periodicity and display non-uniformity (display lines), which could otherwise occur when a viewer views the display screen in an oblique direction, can be suppressed.

[0136] FIG. 17 shows a detailed structure of the second electrode pattern 118 (FIG. 11) and the first electrode pattern 110 (FIG. 11) that are shown in FIG. 16A. In FIG. 17, the second electrodes 122 of the second electrode pattern 118 (FIG. 11) extend in one direction (X direction for the sake of convenience in FIG. 17), whereas the first electrodes 114 of the first electrode pattern 110 (FIG. 11) extend in a direction intersecting the one direction (Y direction for the sake of convenience in FIG. 17).

[0137] The first electrode pattern 110 (FIG. 11) and the second electrode pattern 118 (FIG. 11) are both provided so as to enclose the sub pixels 114. Therefore, even if the first electrode pattern 110 (FIG. 11) and the second electrode

pattern 118 (FIG. 11) have a cut-off portion, the sub pixels 114 can be enclosed with no cut-off portion by locating the first electrode pattern 110 and the second electrode pattern 118 to overlap each other in a generally aligned manner. This can increase the inter-pixel (inter-sub pixel) light shielding property.

[0138] In FIG. 17, the first electrode pattern 110 (FIG. 11) and the second electrode pattern 118 (FIG. 11) are both provided so as to enclose the sub pixels 114. The present invention is not limited to such a structure. The first electrode pattern 110 (FIG. 11) and the second electrode pattern 118 (FIG. 11) may be provided so as to enclose pixels (display unit formed of a plurality of sub pixels).

Embodiment 3

[0139] In this embodiment, an organic electroluminescent display device having an input function in which the second electrode pattern in the sensing unit has a different structure from that in Embodiment 1 and Embodiment 2 will be described.

(1) Structure of the Module

[0140] FIG. 18 shows a structure of a module of an organic electroluminescent display device having an input function in this embodiment. FIG. 19 is a schematic cross-sectional view of the module shown in FIG. 18. The module in this embodiment will be described with reference to FIG. 18 and FIG. 19. The structure of the first substrate 104 is the same as that described above in Embodiment 1 and will not be described again.

[0141] The sensing unit 106 of the organic electroluminescent display device includes the first electrode pattern 110 and the second electrode pattern 118b. The first electrode pattern 110 and the second electrode pattern 118b are both provided in an inner area held between the first substrate 104 and the second substrate 102.

[0142] The first electrode pattern 110 has substantially the same structure as that in Embodiment 1. The second electrode pattern 118b is provided at the same surface of the second substrate 102 as the first electrode pattern 110, but has substantially the same structure as that in Embodiment 1 except for this point.

[0143] The second substrate 102 includes the first terminal portion 130 electrically connected to the first electrode pattern 110 and the second terminal portion 132 electrically connected to the second electrode pattern 118b in the same surface. The first electrode pattern 110 and the first terminal portion 130 are connected to each other by the first lines 126. The second electrode pattern 118b and the second terminal portion 132 are connected to each other by the second lines 128. Since the first terminal portion 130 and the second terminal portion 132 are provided in the same surface, these terminal portions can be close to each other. With such an arrangement, one FPC can be used commonly for the terminal portions 130 and 132.

(2) Details of the Display Pixel Area

[0144] With reference to FIG. 20, a structure of the pixel area of the organic electroluminescent display device in this embodiment will be described.

[0145] The second electrode pattern 118b is provided so as not to be in contact with the first electrode pattern 110 at the surface of the second substrate 104 facing the first substrate

102. Namely, the second electrode pattern **118b** is provided to overlap the first electrode pattern **110** while having an insulating layer therebetween.

[0146] As shown in, for example, FIG. **20**, the overcoat layer **188** formed of an insulating material may be provided between the second electrode pattern **118b** and the first electrode pattern **110**, so that the second electrode pattern **118b** and the first electrode pattern **110** are not in direct contact with each other. In addition to the overcoat layer **188**, the color filter layers **186** and/or the light shielding layer **184** may be provided between the first electrode pattern **110** and the second electrode pattern **118b**. In this case, the light shielding layer **184** is preferably formed of an insulating layer so as not to be conductive with the second electrode pattern **118b**.

[0147] As described above, the overcoat layer **118** and the color filter layers **186** are provided between the first electrode pattern **110** and the second electrode pattern **118b**. Owing to this, shortcircuit, which would otherwise occur between the first electrode pattern **110** and the second electrode pattern **118b**, can be prevented.

[0148] FIG. **21** shows a structure including the protection film **182** provided in contact with the second electrode pattern **118b**. In the case where, for example, the light shielding layer **184** is formed of a conductive metal material, provision of the protection film **182** can prevent the second electrode pattern **118b** from being conductive with the light shielding layer **184**.

[0149] The second electrode pattern **118b** is formed of a transparent conductive material. The second electrode pattern **118b** and the first electrode pattern **110** overlapping each other have substantially the same planar structure as that shown in FIG. **5**. Therefore, the effects of suppressing the color mixture and the increasing the light utilization factor are also provided as in Embodiment 1.

[0150] In this embodiment, the first electrode pattern **110** and the second electrode pattern **118b** are provided in the inner area of the panel (as held between the first substrate **104** and the second substrate **102**) while having the insulating layer therebetween. This structure can decrease the thickness or the size of the organic electroluminescent display device. In addition, the second electrode pattern **118b** is not exposed over the outer surface of the panel. Therefore, the second electrode pattern **118b** is protected against damage or deterioration, and thus the reliability is improved.

[0151] In this embodiment, the first electrode pattern is provided closer to the first substrate and the second electrode pattern is provided closer to the second substrate while having the insulating layer therebetween. Alternatively, the positions of the first electrode pattern and the second electrode pattern may be replaced with each other.

Embodiment 4

[0152] In this embodiment, an organic electroluminescent display device having an input function in which the second electrode pattern in the sensing unit has a different structure from that in Embodiment 3 will be described.

(1) Structure of the Module

[0153] FIG. **22** shows a structure of a module of an organic electroluminescent display device having an input function in this embodiment. FIG. **23** is a schematic cross-sectional view of the module shown in FIG. **22**. The module in this embodiment will be described with reference to FIG. **22** and FIG. **23**.

The structure of the first substrate **104** is the same as that described above in Embodiment 1 and will not be described again.

[0154] The sensing unit **106** of the organic electroluminescent display device includes the first electrode pattern **110** and the second electrode pattern **118**. The first electrode pattern **110** and the second electrode pattern **118** are both provided in the inner area held between the first substrate **104** and the second substrate **102**.

[0155] The first electrode pattern **110** has substantially the same structure as that in Embodiment 1. The second electrode pattern **118** has substantially the same structure as that in Embodiment 2. The first electrode pattern **110** and the second electrode pattern **118** overlapping each other have substantially the same planar structure as that shown in FIG. **13**. The first electrode pattern **110** and the second electrode pattern **118** are provided so as to enclose the sub pixels.

[0156] In the organic electroluminescent display device shown in FIG. **22**, the second electrode pattern **118** is formed of a metal material, and therefore the second lines **128** and the second terminal portion **132** can also be formed of a metal material. Therefore, the second terminal portion **132** can be located close to the first terminal portion **130**. With such an arrangement, one FPC can be used commonly for the terminal portions **130** and **132**. Therefore, the number of the FPCs required for the module can be decreased.

(2) Details of the Display Pixel Area

[0157] With reference to FIG. **24**, a structure of the pixel area of the organic electroluminescent display device in this embodiment will be described. Embodiment 4 is different from Embodiment 3 in the structure of the second electrode pattern **118**. Therefore, the second electrode pattern **118** will be described below.

[0158] The second electrode pattern **118** is formed of a metal material such as, for example, titanium (Ti), tungsten (W), molybdenum (Mo) or the like as a conductive material having a low reflectance. The second electrode pattern **118** shown in FIG. **24** has substantially the same planar structure as that shown in FIG. **10A** or FIG. **10B**. The insulating layer is provided between the second electrode pattern **118** and the first electrode pattern **110**. The insulating layer may be provided only for insulating the second electrode pattern **118** and the second electrode pattern **110** from each other, or may also act as the overcoat layer **188**. The color filter layers **186** or the light shielding layer **184** may also be provided between the second electrode pattern **118** and the second electrode pattern **110**.

[0159] FIG. **25** shows a structure including the protection film **182** provided to be in contact with the second electrode pattern **118**. In the case where, for example, the light shielding layer **184** is formed of a conductive metal material, provision of the protection film **182** can prevent the second electrode pattern **118** from being conductive with the light shielding layer **184**.

[0160] The second electrode pattern **118** is formed of a transparent conductive material. The second electrode pattern **118** and the first electrode pattern **110** overlapping each other have substantially the same planar structure as that shown in FIG. **13**. Therefore, the effects of suppressing the color mixture and the increasing the light utilization factor are also provided as in Embodiment 2.

[0161] In this embodiment, the first electrode pattern **110** and the second electrode pattern **118** are provided in the inner

area of the panel (as being held between the first substrate **104** and the second substrate **102**) while having the insulating layer therebetween. This structure can decrease the thickness or the size of the organic electroluminescent display device. In addition, the second electrode pattern **118** is not exposed over the outer surface of the panel. Therefore, the second electrode pattern **118** is protected against damage or deterioration, and thus the reliability is improved. Since the second electrode pattern **118** is provided so as to enclose the pixel electrodes like the first electrode pattern **110**, the light leaks are prevented, and image quality deterioration, which would be caused by the inter-sub pixel color mixture, can be prevented.

Embodiment 5

[**0162**] In this embodiment, an organic electroluminescent display device having an input function in which the first electrode pattern and the second electrode pattern in the sensing unit are both provided in the inner area between the first substrate and the second substrate and the lines connected to the electrode patterns have a different structure from that in the above embodiments will be described.

[**0163**] FIG. **26** shows a structure of a module of an organic electroluminescent display device having an input function in this embodiment. FIG. **27** is a schematic cross-sectional view of the module shown in FIG. **26**. The module in this embodiment will be described with reference to FIG. **26** and FIG. **27**. The structure of the first substrate **104** is the same as that described above in Embodiment 1 and will not be described again. The details of the first electrode pattern **110** and the second electrode pattern **118b** are substantially the same as those in Embodiment 1 and will not be described again.

[**0164**] As shown in FIG. **26**, the first electrode pattern **110** and the second electrode pattern **118b** are both provided at the same surface of the second substrate **102** (surface facing the first substrate **104**). The first lines **126** and the second lines **128b** are located to be drawn to an end area of the second substrate **102**. The first terminal portion **130** and the second terminal portion **132** having a contact with the first substrate **104** are provided in the end area of the second substrate **102**.

[**0165**] The first terminal portion **130** and the second terminal portion **132** are connected by a connection electrode **142** to predetermined lines provided over the first substrate **104**. The first terminal portion **130** and the second terminal portion **132** are connected to a third terminal portion **134** by the lines in the first substrate **104**. Owing to such a structure, the first electrode pattern **110**, the second electrode pattern **118b**, and the connection terminals with an external circuit are all connected to the third terminal portion **134**. Therefore, merely one FPC is needed for connection with the external circuit, which can decrease the size of the display panel.

[**0166**] In FIG. **26**, the first terminal portion **130** and the second terminal portion **132** are provided in the end area close to the third terminal portion **134** provided in the first substrate **104**. The first terminal portion **130** and the second terminal portion **132** are not limited to being located in such an area, and may be provided in any area where the first terminal portion **130** and the second terminal portion **132** can contact the first substrate **104** easily. It should be noted that in the case where the first terminal portion **130** and the second terminal portion **132** are provided in an end area close to the third terminal portion **134**, the length of the lines required to be drawn in the first substrate **104** can be shortened.

[**0167**] FIG. **28** shows an organic electroluminescent display device in which the lines connected to the electrode patterns have a different structure from that in the above embodiments, and FIG. **29** is a schematic cross-sectional view thereof. The first electrode pattern **110** and the second electrode pattern **118** are substantially the same as those in Embodiment 2, and will not be described in detail.

[**0168**] In the structure shown in FIG. **28** and FIG. **29**, output terminals of the first electrode pattern **110** and the second electrode pattern **118** can be located in the inner area of the panel. Therefore, the number of flexible printed circuit boards required for forming a module can be decreased. This can decrease the size of the organic electroluminescent display device.

[**0169**] As described so far, a display device in an embodiment according to the present invention is applicable to any of various electronic devices that require a graphical user interface. The display device in an embodiment according to the present invention is applicable for, for example, computer devices and mobile electronic devices which are operated by a touch over an image over the display screen, and also electronic devices for special purposes including TVs, image monitors, information panels, digital signage, ticket vending machines, cash dispensers and the like.

1. An organic electroluminescent display device, comprising:

- a first substrate having a pixel area including a plurality of pixels each including a plurality of sub pixels, a light emitting devices are provided in correspondence with the sub pixels, and a partition layer covering a peripheral portion of each of the sub pixels; and
- a second substrate having a sensing unit including a first electrode pattern extending in one direction and a second electrode pattern extending in a direction intersecting the one direction, and the first electrode pattern and the second electrode pattern is provided out of contact from each other;

wherein:

- the first substrate and the second substrate are located to face each other such that the pixel area and the first electrode pattern face each other; and
- the first electrode pattern is located to overlap the partition layer so as to enclose the sub pixels.

2. The organic electroluminescent display device according to claim 1, wherein a side surface of the first electrode pattern is inclined such that an open area in the first electrode pattern is opened toward the first substrate from the second substrate.

3. The organic electroluminescent display device according to claim 2, wherein the side surface of the first electrode pattern has a light-reflecting surface.

4. The organic electroluminescent display device according to claim 3, wherein the first electrode pattern includes at least an aluminum layer or an aluminum alloy layer, and the light-reflecting surface is formed of the aluminum layer or the aluminum alloy layer.

5. The organic electroluminescent display device according to claim 1, wherein the first electrode pattern includes a plurality of first electrodes extending in the one direction and first inter-electrode patterns provided between the first electrodes while being out of contact from each other.

6. The organic electroluminescent display device according to claim 5, wherein a group of at least two of the plurality of the first electrodes of the first electrode pattern are included

in a first electrode block and connected to a first line, and the first electrode pattern includes a plurality of the first electrode blocks.

7. The organic electroluminescent display device according to claim 6, wherein the first electrode pattern includes a dummy pattern between each two adjacent first electrode blocks among the plurality of first electrode blocks.

8. The organic electroluminescent display device according to claim 1, wherein the first electrode pattern and the second electrode pattern have different patterns, and the second electrode pattern includes planar shapes covering periods of the first electrode pattern.

9. The organic electroluminescent display device according to claim 8, wherein the second electrode pattern includes a plurality of second electrodes having the planar shapes and a plurality of second inter-electrode patterns located adjacent to the plurality of second electrodes; a series of planar second electrodes, among the plurality of second electrodes, are connected in series and connected to a second line.

10. The organic electroluminescent display device according to claim 8, wherein the second electrode pattern is formed of a transparent conductive material.

11. The organic electroluminescent display device according to claim 1, wherein the second electrode pattern includes a plurality of second electrodes extending in a direction intersecting the one direction and second inter-electrode patterns provided between the second electrodes while being out of contact from each other.

12. The organic electroluminescent display device according to claim 11, wherein a group of at least two of the plurality of second electrodes of the second electrode pattern are included in a second electrode block and connected to the second line, and the second electrode pattern includes a plurality of the second electrode blocks.

13. The organic electroluminescent display device according to claim 12, wherein the second electrode pattern includes

a dummy pattern between each two adjacent second electrode blocks among the plurality of second electrode blocks.

14. The organic electroluminescent display device according to claim 11, wherein the second electrode pattern is formed of a metal material.

15. The organic electroluminescent display device according to claim 11, wherein the second electrode pattern is provided to enclose the sub pixels.

16. The organic electroluminescent display device according to claim 1, wherein the first electrode pattern and the second electrode pattern have substantially the same pattern as each other and are provided to overlap each other.

17. The organic electroluminescent display device according to claim 16, wherein the first electrode pattern and the second electrode pattern are provided at a surface of the second substrate facing the first substrate.

18. The organic electroluminescent display device according to claim 1, wherein the second substrate includes a color filter layer between the first electrode pattern and the second electrode pattern, at a position overlapping each of the sub pixels.

19. The organic electroluminescent display device according to claim 1, wherein: the first electrode pattern and the second electrode pattern are respectively connected by lines to terminal portions provided in an end area of the second substrate; and the terminal portions are connected to an external circuit.

20. The organic electroluminescent display device according to claim 1, wherein: the first electrode pattern and the second electrode pattern are respectively connected by lines to terminal portions provided in an end area of the second substrate; and the terminal portions are connected, in the first substrate, to another terminal portion connected to an external circuit.

* * * * *

专利名称(译)	具有输入功能的有机电致发光显示装置		
公开(公告)号	US20150069362A1	公开(公告)日	2015-03-12
申请号	US14/480875	申请日	2014-09-09
[标]申请(专利权)人(译)	株式会社日本显示器		
申请(专利权)人(译)	日本展示INC.		
当前申请(专利权)人(译)	日本展示INC.		
[标]发明人	ITO RYOICHI		
发明人	ITO, RYOICHI		
IPC分类号	H01L27/32		
CPC分类号	H01L27/323 H01L27/3251 H01L27/322 H01L27/3223 H01L27/3279 G06F3/0412 G06F3/044 H01L27/3246 H01L27/3272 H01L51/5271		
优先权	2013188128 2013-09-11 JP		
其他公开文献	US9343513		
外部链接	Espacenet USPTO		

摘要(译)

一种有机电致发光显示装置，包括：第一基板，具有像素区域，所述像素区域包括多个像素，每个像素包括多个子像素；发光装置，与所述子像素相对地设置；以及分隔层，覆盖每个像素区域的周边部分。子像素；第二基板具有感测单元，所述感测单元包括在一个方向上延伸的第一电极图案和在与所述一个方向交叉的方向上延伸的第二电极图案，并且所述第一电极图案和所述第二电极图案彼此不接触地设置。第一电极图案定位成与分隔层重叠，以包围子像素。包括在感测单元中的第一电极图案包围子像素，因此防止光泄漏到相邻的子像素。

An organic electroluminescent display device includes a first substrate having a pixel area including a plurality of pixels each including a plurality of sub pixels, a light emitting devices are provided in correspondence with the sub pixels, and a partition layer covering a peripheral portion of each of the sub pixels; and a second substrate having a sensing unit including a first electrode pattern extending in one direction and a second electrode pattern extending in a direction intersecting the one direction, and the first electrode pattern and the second electrode pattern is provided out of contact from each other. The first electrode pattern is located to overlap the partition layer so as to enclose the sub pixels. The first electrode pattern included in the sensing unit encloses the sub pixels, and thus light is prevented from leaking to adjacent sub pixels.