



US 20170062759A1

(19) **United States**

(12) **Patent Application Publication**
GAI et al.

(10) **Pub. No.: US 2017/0062759 A1**
(43) **Pub. Date: Mar. 2, 2017**

(54) **OLED PANEL, PACKAGING METHOD THEREOF, AND A DISPLAY DEVICE**

(52) **U.S. Cl.**
CPC *H01L 51/5246* (2013.01); *H01L 51/56* (2013.01); *H01L 2251/566* (2013.01)

(71) Applicants: **BOE TECHNOLOGY GROUP CO., LTD.**, Beijing (CN); **Ordos Yuansheng Optoelectronics Co., Ltd.**, Ordos (CN)

(57) **ABSTRACT**

(72) Inventors: **Renrong GAI**, Beijing (CN); **Weilin LAI**, Beijing (CN)

(21) Appl. No.: **15/159,201**

(22) Filed: **May 19, 2016**


(30) **Foreign Application Priority Data**

Sep. 1, 2015 (CN) 201510552569.3

Publication Classification

(51) **Int. Cl.**
H01L 51/52 (2006.01)
H01L 51/56 (2006.01)

The present invention provides an OLED panel, a packaging method thereof and a display device. The OLED panel includes a packaging coverplate and an OLED substrate opposite to each other, the OLED substrate having a display area and a packaging area surrounding the display area; and glass glue provided between the packaging coverplate and the OLED substrate and corresponding to the packaging area, and the OLED panel further includes a support structure provided at a side of the glass glue away from the display area, the support structure being used for supporting the packaging coverplate and the OLED substrate when cutting a display motherboard to form the OLED panel.

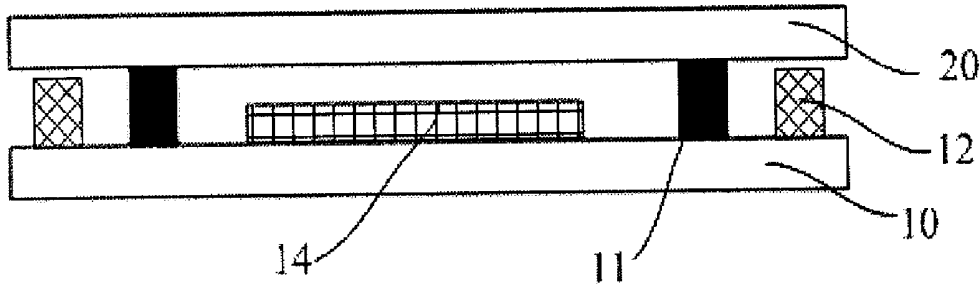

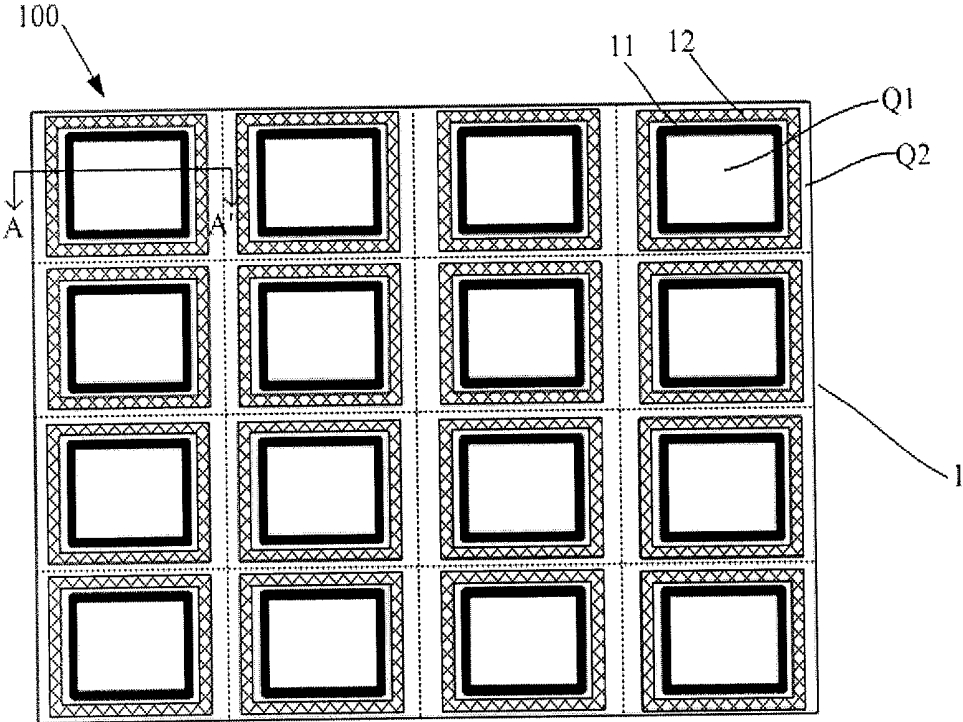


Fig. 1

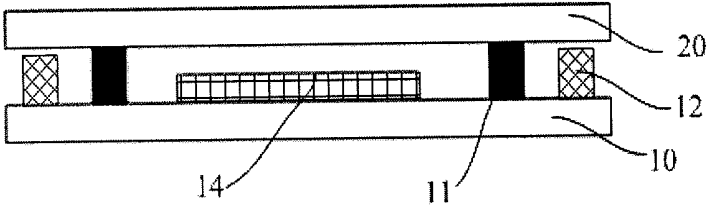


Fig. 2

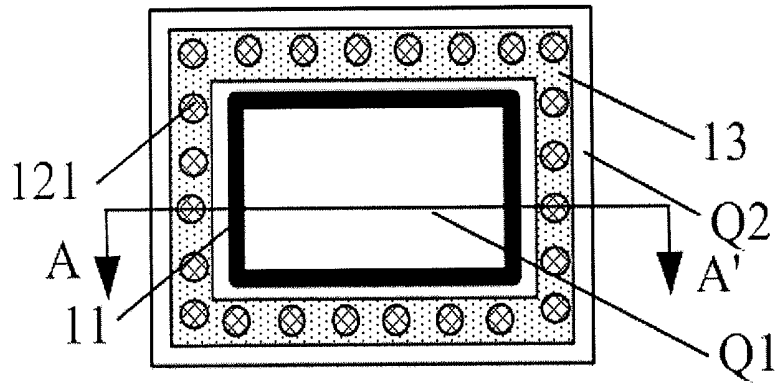


Fig. 3

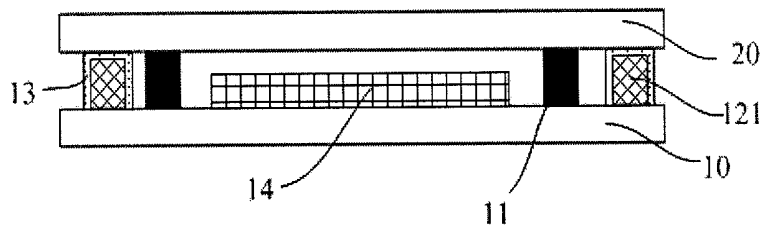


Fig. 4

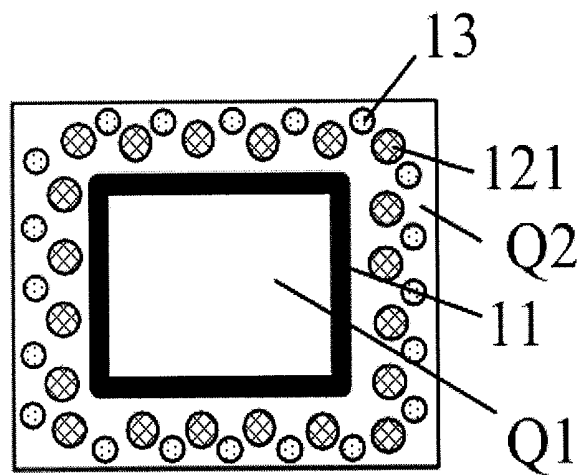


Fig. 5

OLED PANEL, PACKAGING METHOD THEREOF, AND A DISPLAY DEVICE**CROSS-REFERENCE TO RELATED APPLICATION**

[0001] This application claims priority to Chinese Patent Application No. 201510552569.3, filed on Sep. 1, 2015, the contents of which are incorporated by reference in the entirety.

FIELD OF THE INVENTION

[0002] The present invention belongs to the field of display technology, and particularly relates to an OLED panel, a packaging method thereof, and a display device including the OLED panel.

BACKGROUND OF THE INVENTION

[0003] Organic light-emitting diode (OLED) display devices, as a new type of flat-panel displays, draw more and more attention and become the next generation display devices likely to replace liquid crystal display devices, due to their characteristics such as self-illumination, high brightness, wide viewing angle, fast response, low power consumption, flexibility, etc.

[0004] Currently, a packaging method of an OLED panel is as follows: placing an OLED substrate including a plurality of display areas on a platform of a laminating machine; coating a UV glue for one or two rounds in a packaging region of a packaging coverplate to be attached to the OLED substrate (the packaging region being positioned in the peripheral area of the packaging coverplate), and coating glass frit on parts of the packaging coverplate each corresponding to a packaging area surrounding each display area; next, attaching the packaging coverplate to the OLED substrate under vacuum to form an OLED display motherboard; subsequently, irradiating the peripheral area of the packaging coverplate with a UV light under atmospheric environment, so as to cure the UV glue in the packaging region of the packaging coverplate; and then irradiating the areas coated with the glass frit with laser, so as to melt and cure the glass frit, thus completing packaging of the OLED display motherboard. After the packaging is completed, a mechanical cutter is used to cut along the packaging areas of the OLED display motherboard, so as to form a plurality of OLED panels.

[0005] The inventors found that at least the following problem exists in the prior art: the main component of the glass frit is glass powder, ceramic powder, etc., and the glass frit becomes fragile after being melt and cured by laser, therefore, when cutting the OLED motherboard, pressing and edge grinding by the mechanical cutter are likely to result in release of inner stress of the glass frit, which causes the glass frit to crack and even causes the packaging coverplate to separate from the OLED substrate, so that water and oxygen invade into an OLED device via the cracking path, which leads to black spots and bubbles in the light-emitting layer of the OLED device, finally resulting in failure of the device and shortened service life. Therefore, there is always a certain distance kept between the cutting line and the glass frit, which, however, is unfavourable for implementation of narrow bezel as the edge for grinding has limited width.

SUMMARY OF THE INVENTION

[0006] An object of the present disclosure is to provide an OLED panel capable of reducing or preventing cracking of glass glue, a packaging method thereof and a display device, in order to alleviate or solve the above problem occurring when cutting an existing OLED motherboard.

[0007] According to one aspect of the present invention, there is provided an OLED panel, including a packaging coverplate and an OLED substrate opposite to each other, the OLED substrate having a display area and a packaging area surrounding the display area; and glass glue provided between the packaging coverplate and the OLED substrate and corresponding to the packaging area, and the OLED panel further includes a support structure provided at a side of the glass glue away from the display area, the support structure being used for supporting the packaging coverplate and the OLED substrate when cutting a display motherboard to form the OLED panel.

[0008] Optionally, the support structure is provided on the OLED substrate.

[0009] Optionally, the support structure is made of an elastic material.

[0010] Further optionally, the OLED substrate is provided thereon with spacers, and the spacers and the support structure are arranged in the same layer and made of the same material.

[0011] Further optionally, height of the support structure is lower than that of the spacers by 0.3 μm to 0.7 μm .

[0012] Optionally, the support structure includes a plurality of support pillars spaced apart from each other and arranged to surround the display area.

[0013] Further optionally, gaps between adjacent support pillars are filled with sealant.

[0014] According to another aspect of the present invention, there is provided a packaging method of an OLED panel, wherein the OLED panel includes a packaging coverplate and an OLED substrate opposite to each other, the OLED substrate has a display area and a packaging area surrounding the display area, and the packaging method includes steps of:

[0015] forming a support structure on an area of the packaging coverplate corresponding to the packaging area or on the packaging area of the OLED substrate; and

[0016] forming glass glue on the area of the packaging coverplate corresponding to the packaging area and/or on the packaging area of the OLED substrate, such that the support structure is positioned at a side of the glass glue away from the display area after the packaging coverplate and the OLED substrate are assembled.

[0017] Optionally, the support structure is formed on the OLED substrate.

[0018] Optionally, the support structure is made of an elastic material.

[0019] Further optionally, patterns of spacers are formed while forming the support structure on the OLED substrate.

[0020] Further optionally, height of the support structure is lower than that of the spacers by 0.3 μm to 0.7 μm .

[0021] Optionally, the support structure includes a plurality of support pillars spaced apart from each other and arranged to surround the display area.

[0022] Further optionally, the packaging method further includes a step of:

[0023] dispensing sealant between every two adjacent support pillars on the OLED substrate.

[0024] As still another aspect of the present invention, there is provided a display device, including the above OLED panel.

[0025] The beneficial effects of the present invention are as follow.

[0026] In the OLED panel provided by the present invention, the support structure is provided at the side of the glass glue away from the display area, that is, the support structure is provided between the glass glue and a cutting line, therefore, the support structure has a certain supporting effect on the packaging coverplate and the packaging area of the OLED substrate when cutting an OLED motherboard along the cutting line, so as to alleviate or prevent the phenomenon that deformation occurs in the process of cutting the packaging coverplate and the OLED substrate to cause the glass glue to crack and thus to allow pollutants such as moisture, oxygen, impurity, etc., to enter into the display area of the OLED panel along the cracking path, and then light-emitting material of the OLED device in the OLED panel is prevented from being polluted.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] FIG. 1 is a schematic diagram illustrating distribution of OLED panels on an OLED motherboard provided by an embodiment of the present invention;

[0028] FIG. 2 is a cross-sectional view taken along line A-A' in FIG. 1;

[0029] FIG. 3 is a schematic diagram of an OLED panel provided by an embodiment of the present invention;

[0030] FIG. 4 is a cross-sectional view taken along line A-A' in FIG. 3; and

[0031] FIG. 5 is a schematic diagram of another OLED substrate provided by an embodiment of the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0032] In order that those skilled in the art can better understand the technical solutions of the present invention, the present invention will be further described in detail below in conjunction with the accompanying drawings and specific implementations.

[0033] Embodiments of the present invention provide an OLED panel 100. As shown in FIGS. 1 and 2, the OLED panel 100 includes a packaging coverplate 20 and an OLED substrate 10 opposite to each other, the OLED substrate 10 has a display area Q1 and a packaging area Q2 surrounding the display area Q1, and the OLED panel 100 further includes glass glue 11 provided between the packaging coverplate 20 and the OLED substrate 10 and corresponding to the packaging area Q2, and a support structure 12 provided at a side of the glass glue 11 away from the display area Q1, the support structure 12 is used for supporting the packaging coverplate 20 and the OLED substrate 10 when cutting an OLED motherboard 1 to form the OLED panel 100.

[0034] Those skilled in the art may understand that, the OLED panel 100 is obtained by cutting the OLED motherboard 1 along cutting lines by using a cutter. In the OLED panel 100 of the embodiments, the support structure 12 is provided at the side of the glass glue 11 away from the display area Q1, that is, the support structure 12 is provided between the glass glue 11 and the cutting line, therefore, the

support structure 12 can have a certain supporting effect on the packaging coverplate 20 and the packaging area Q2 of the OLED substrate 10 when cutting the OLED motherboard 1 along the cutting line, so as to alleviate or prevent the phenomenon that deformation occurs in the process of cutting the packaging coverplate 20 and the OLED substrate 10 to cause the glass glue 11 to crack and thus to allow pollutants such as moisture, oxygen, impurity, etc., to enter into the display area Q1 of the OLED substrate 10 along the cracking path, and then light-emitting material of the OLED device 14 in the OLED panel 100 is prevented from being polluted.

[0035] In some embodiments, the support structure 12 is provided on the OLED substrate 10. The support structure 12 may be made of an elastic material, so that the stress released inside the glass glue can be better absorbed. Generally, the OLED substrate 10 is provided thereon with spacers for maintaining a distance between the OLED substrate 10 and the packaging coverplate 20, so as to maintain the cell thickness. Therefore, in some embodiments, the support structure 12 and the spacers are provided in the same layer and made of the same material. In this way, patterns of the support structure 12 and the spacers can be formed by one patterning process, without adding process steps. Further, the height of the support structure 12 is slightly smaller than that of the spacers, for example, the height of the support structure 12 may be smaller than that of the spacers by 0.3 μm to 0.7 μm . That is to say, one end of the support structure 12 is arranged on the OLED substrate 10 and the other end of the support structure 12 is not in contact with the packaging coverplate 20. The relationship between heights of the support structure 12 and the spacers is not limited to the above, as long as it can be ensured that the distance between the support structure 12 and the packaging coverplate 20 is smaller than the largest deformation amount that the OLED substrate 10 and the packaging coverplate 20 can bear during the cutting process, and in this way, the problem that the glass glue 11 between the OLED substrate 10 and the packaging coverplate 20 cracks in the cutting process can be prevented. Furthermore, the height of the support structure 12 is smaller than that of the spacers, which can prevent the packaging coverplate 20 from warping in the cutting process.

[0036] In some embodiments, the support structure 12 may include a plurality of support pillars 121 spaced apart from each other and arranged to surround the display area Q1, as shown in FIGS. 3 and 4. Needless to say, the support structure 12 may have a ring-like pattern surrounding the display area Q1 (obviously, the support structure 12 also surrounds the glass glue 11), and the shape of the support structure 12 is not specifically limited in the embodiments. In the case where the support structure 12 includes a plurality of support pillars 121, the gap between adjacent support pillars 121 may be filled with sealant 13 (UV glue), which can further prevent the pollutants such as moisture, oxygen, etc., from entering into the display area Q1 of the OLED substrate 10.

[0037] According to another aspect of the present invention, there is provided a packaging method of an OLED panel 100, the OLED panel 100 may be the above-described OLED panel, and the packaging method includes steps of:

[0038] forming a support structure 12 on an area of the packaging coverplate 20 corresponding to the packaging area Q2 or on the packaging area Q2 of the OLED substrate 10; and

[0039] forming glass glue 11 on the area of the packaging coverplate 20 corresponding to the packaging area Q2 and/or on the packaging area Q2 of the OLED substrate 10, such that the support structure 12 is positioned at a side of the glass glue 11 away from the display area Q1 after the packaging coverplate 20 and the OLED substrate 10 are assembled.

[0040] Referring to FIGS. 1 to 5, the packaging method may include the steps as follows.

[0041] At step 1, a support structure 12 is formed in the packaging area Q2 of the OLED substrate 10. It can be understood that, known components such as thin film transistors, OLED devices 14, spacers and the like are also formed on the OLED substrate 10.

[0042] In some embodiments, the spacers and the support structure 12 may be formed by one patterning process. In addition, the height of the support structure 12 is slightly smaller than that of the spacers, for example, the height of the support structure 12 may be smaller than that of the spacers by 0.3 μm to 0.7 μm . That is to say, one end of the support structure 12 is arranged on the OLED substrate 10 and the other end of the support structure 12 is not in contact with the packaging coverplate 20. The relationship between heights of the support structure 12 and the spacers are not limited to the above, as long as it can be ensured that the distance between the support structure 12 and the packaging coverplate 20 after assembly is smaller than the largest deformation amount that the OLED substrate 10 and the packaging coverplate 20 can bear during the cutting process, and in this way, the problem that the glass glue 11 between the OLED substrate 10 and the packaging coverplate 20 cracks in the cutting process can be prevented. Furthermore, the height of the support structure 12 is smaller than that of the spacers, which can prevent the packaging coverplate 20 from warping in the cutting process.

[0043] In some embodiments, the support structure 12 may include a plurality of support pillars 121 spaced apart from each other and arranged to surround the display area Q1. Needless to say, the support structure 12 may have a ring-like pattern surrounding the display area Q1, and the shape of the support structure 12 is not specifically limited in the embodiments. In the case where the support structure 12 includes a plurality of support pillars 121, the packaging method of the embodiments further includes a step of: dispensing sealant 13 (UV glue) in every gap between adjacent support pillars 121 in a dotted manner, as shown in FIG. 5. It can be understood that when the packaging area Q2 is irradiated with laser after assembly, the dotted sealant 13 will diffuse to fill the gaps between the support pillars 121, so that the pollutants such as moisture, oxygen, etc., can be further prevented from entering into the display area Q1 of the OLED substrate 10.

[0044] At step 2, glass frit (material of the glass glue 11) is coated on the area of the packaging coverplate 20 corresponding to the packaging area Q2 of the OLED substrate 10. Here, after the packaging coverplate 20 and the OLED substrate 10 are assembled, the glass frit is positioned at a side of the support pillars 121 close to the display area Q1. Needless to say, the glass frit may be directly coated on the packaging area Q2 of the OLED substrate 10, and is

positioned at the side of the support pillars 121 close to the display area Q1. Alternatively, the glass frit may be coated on both the packaging coverplate 20 and the OLED substrate 10, which is not limited in the present invention.

[0045] At step 3, the packaging coverplate 20 and the OLED substrate 10 are assembled, and the packaging area Q2 is irradiated with laser to turn the glass frit into glass glue, thus forming an OLED motherboard 1.

[0046] At step 4, the OLED motherboard 1 is cut to form the OLED panel 100.

[0047] Those skilled in the art can understand that, the OLED panel 100 is obtained by cutting the OLED motherboard 1 along cutting lines by using a cutter. In the OLED panel 100 of the embodiments, the support structure 12 is provided at the side of the glass glue 11 away from the display area Q1, that is, the support structure 12 is provided between the glass glue 11 and the cutting line, therefore, the support structure 12 can have a certain supporting effect on the packaging coverplate 20 and the packaging area Q2 of the OLED substrate 10 when cutting the OLED motherboard 1 along the cutting line, so as to alleviate or prevent the phenomenon that deformation occurs in the process of cutting the packaging coverplate 20 and the OLED substrate 10 to cause the glass glue 11 to crack and thus to allow pollutants such as moisture, oxygen, impurity, etc., to enter into the display area Q1 of the OLED substrate 10 along the cracking path, and then light-emitting material of the OLED device 14 in the OLED panel 100 is prevented from being polluted. Moreover, the packaging method of the embodiments may further shorten the distance between the cutting line and the display area Q1, which is favorable for implementation of narrow bezel.

[0048] It should be noted that, specific sequence in which the steps of forming the OLED substrate 10 and forming the packaging coverplate 20 are performed is not limited, the above description is given by taking a case in which the step of forming the OLED substrate 10 is performed firstly as an example, but the embodiments are not limited thereto.

[0049] As still another aspect of the present invention, there is provided a display device, which includes the above OLED panel 100.

[0050] The display device may be any product or component having a display function such as a liquid crystal panel, electronic paper, a mobile phone, a tablet computer, a television, a display, a notebook computer, a digital photo frame, a navigator or the like.

[0051] It could be understood that the above implementations are merely exemplary implementations adopted for describing the principle of the disclosure, but the disclosure is not limited thereto. For those of ordinary skill in the art, various variations and improvements may be made without departing from the spirit and essence of the disclosure, and these variations and improvements shall also be regarded as falling into the protection scope of the disclosure.

1. An OLED panel, comprising:

- a packaging coverplate and an OLED substrate opposite to each other, the OLED substrate having a display area and a packaging area surrounding the display area;
- glass glue provided between the packaging coverplate and the OLED substrate and corresponding to the packaging area; and
- a support structure provided at a side of the glass glue away from the display area, the support structure being

- used for supporting the packaging coverplate and the OLED substrate when cutting a display motherboard to form the OLED panel.
2. The OLED panel according to claim 1, wherein the support structure is provided on the OLED substrate.
 3. The OLED panel according to claim 2, wherein the support structure is made of an elastic material.
 4. The OLED panel according to claim 3, wherein the OLED substrate is provided thereon with spacers, and the spacers and the support structure are arranged in the same layer and made of the same material.
 5. The OLED panel according to claim 4, wherein height of the support structure is lower than that of the spacers by $0.3\ \mu\text{m}$ to $0.7\ \mu\text{m}$.
 6. The OLED panel according to claim 1, wherein the support structure comprises a plurality of support pillars spaced apart from each other and arranged to surround the display area.
 7. The OLED panel according to claim 5, wherein the support structure comprises a plurality of support pillars spaced apart from each other and arranged to surround the display area.
 8. The OLED panel according to claim 6, wherein gaps between adjacent support pillars are filled with sealant.
 9. The OLED panel according to claim 7, wherein gaps between adjacent support pillars are filled with sealant.
 10. A packaging method of an OLED panel, wherein the OLED panel comprises a packaging coverplate and an OLED substrate opposite to each other, the OLED substrate has a display area and a packaging area surrounding the display area, and the packaging method comprises steps of:
forming a support structure on an area of the packaging coverplate corresponding to the packaging area or on the packaging area of the OLED substrate; and
forming glass glue on the area of the packaging coverplate corresponding to the packaging area and/or on the packaging area of the OLED substrate, such that the support structure is positioned at a side of the glass glue away from the display area after the packaging coverplate and the OLED substrate are assembled.
 11. The packaging method according to claim 10, wherein the support structure is formed on the OLED substrate.
 12. The packaging method according to claim 10, wherein the support structure is made of an elastic material.
 13. The packaging method according to claim 12, wherein patterns of spacers are formed while forming the support structure on the OLED substrate.
 14. The packaging method according to claim 13, wherein height of the support structure is lower than that of the spacers by $0.3\ \mu\text{m}$ to $0.7\ \mu\text{m}$.
 15. The packaging method according to claim 10, wherein the support structure comprises a plurality of support pillars spaced apart from each other and arranged to surround the display area.
 16. The packaging method according to claim 14, wherein the support structure comprises a plurality of support pillars spaced apart from each other and arranged to surround the display area.
 17. The packaging method according to claim 15, further comprising a step of:
dispensing sealant between every two adjacent support pillars on the OLED substrate.
 18. The packaging method according to claim 16, further comprising a step of:
dispensing sealant between every two adjacent support pillars on the OLED substrate.
 19. A display device, comprising the OLED panel according to claim 1.

* * * * *

专利名称(译)	OLED面板，其封装方法和显示装置		
公开(公告)号	US20170062759A1	公开(公告)日	2017-03-02
申请号	US15/159201	申请日	2016-05-19
[标]申请(专利权)人(译)	京东方科技集团股份有限公司 鄂尔多斯市源盛光电有限责任公司		
申请(专利权)人(译)	京东方科技集团股份有限公司. 鄂尔多斯源盛光电有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司. 鄂尔多斯源盛光电有限公司.		
[标]发明人	GAI RENRONG LAI WEILIN		
发明人	GAI, RENRONG LAI, WEILIN		
IPC分类号	H01L51/52 H01L51/56		
CPC分类号	H01L51/5246 H01L2251/566 H01L51/56 H01L23/08 H01L51/525 H01L2251/558		
优先权	201510552569.3 2015-09-01 CN		
其他公开文献	US9876191		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种有机发光显示面板及其封装方法及显示装置。OLED面板包括彼此相对的封装盖板和OLED基板，OLED基板具有显示区域和围绕显示区域的封装区域；以及设置在所述封装盖板与所述OLED基板之间并对应于所述封装区域的玻璃胶，所述OLED面板还包括支撑结构，所述支撑结构设置在所述玻璃胶远离所述显示区域的一侧，所述支撑结构用于支撑封装盖板和OLED基板在切割显示器母板以形成OLED面板时。

