



US 20140353552A1

(19) **United States**

(12) **Patent Application Publication**
HO et al.

(10) **Pub. No.: US 2014/0353552 A1**

(43) **Pub. Date: Dec. 4, 2014**

(54) **NEW CONDUCTIVE AND PHOTSENSITIVE POLYMERS**

Publication Classification

(71) Applicant: **NANO AND ADVANCED MATERIALS INSTITUTE LIMITED, HONG KONG (HK)**

(51) **Int. Cl.**
H01L 51/00 (2006.01)
C08G 61/12 (2006.01)

(72) Inventors: **Paul Kwok Keung HO**, Hong Kong (HK); **Wing Leung WONG**, Hong Kong (HK)

(52) **U.S. Cl.**
CPC **H01L 51/0036** (2013.01); **C08G 61/126** (2013.01); **H01L 51/0043** (2013.01)
USPC **252/500**; 526/256; 525/327.2; 524/547; 524/379; 524/365; 524/306

(73) Assignee: **NANO AND ADVANCED MATERIALS INSTITUTE LIMITED, HONK KONG (HK)**

(57) **ABSTRACT**

(21) Appl. No.: **14/288,397**

(22) Filed: **May 28, 2014**

Related U.S. Application Data

(60) Provisional application No. 61/855,965, filed on May 29, 2013.

The present invention relates to newly functionalized polythiophenes and the syntheses thereof. The present invention also demonstrates that the new polythiophenes and their derivatives are suitable for fabricating organic light emitting diodes (OLEDs), light emitting diodes (PLEDs), organic photovoltaic devices (OPVs) and conducting polymers for printed electronic devices.

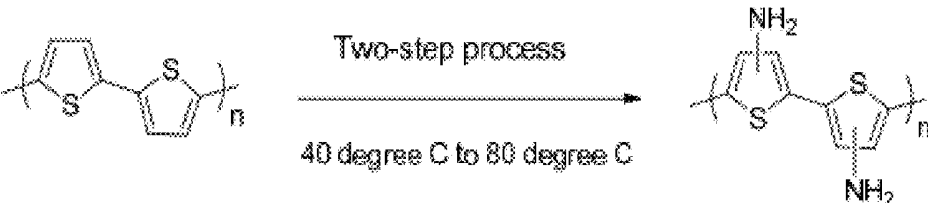


Figure 1

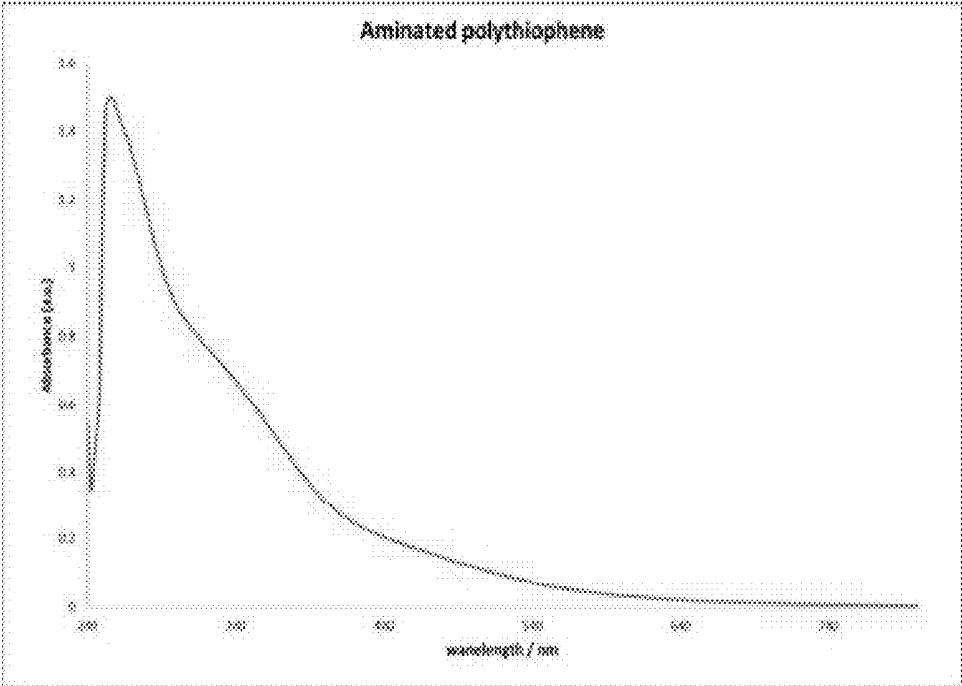


Figure 2

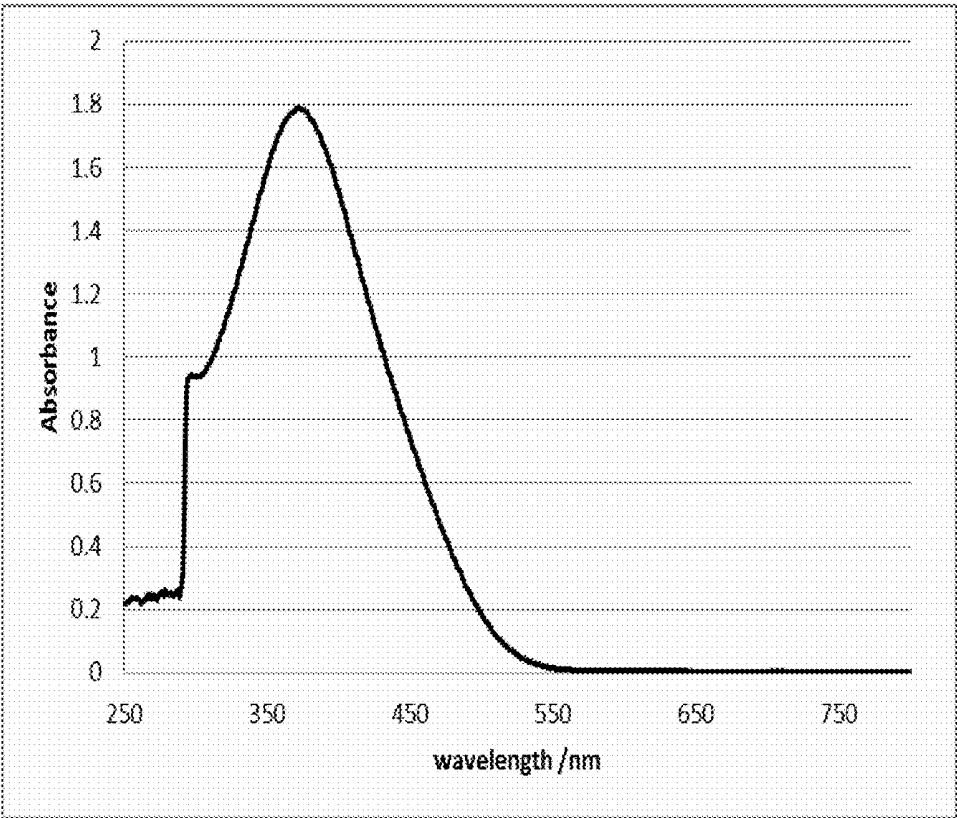


Figure 3

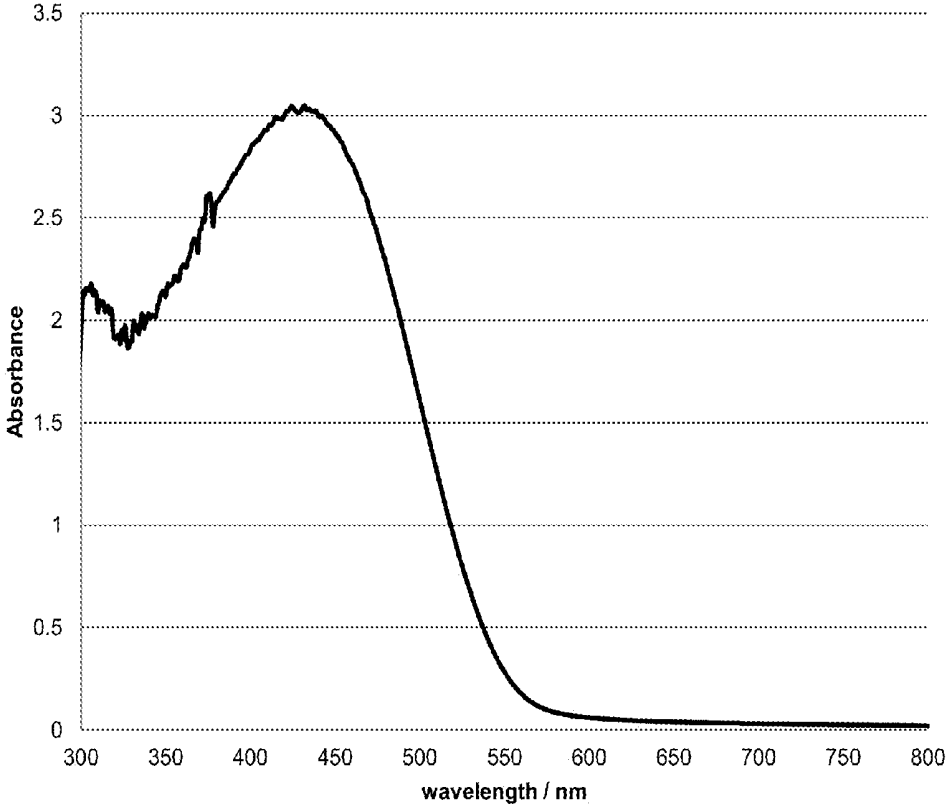


Figure 4

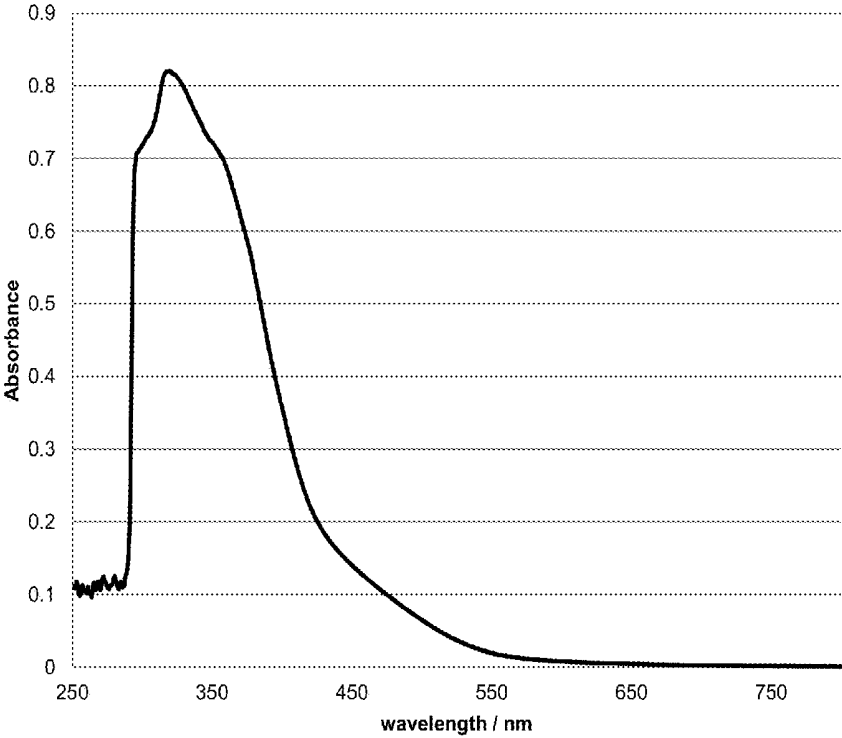


Figure 5



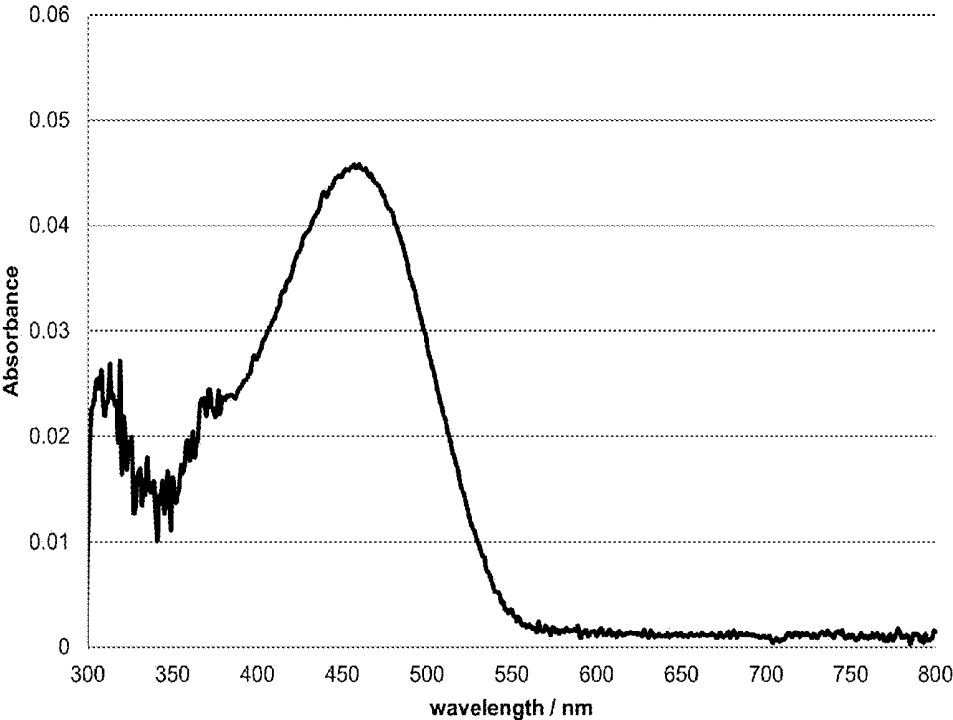


Figure 6

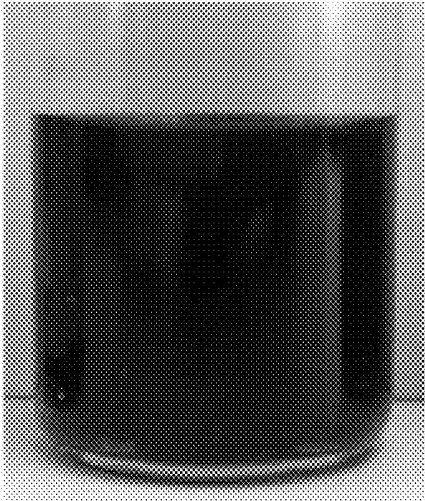

(A). Ethanol

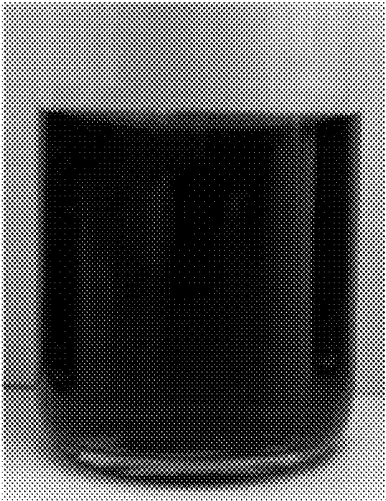

(B). Acetone



(C). Ethyl acetate



(D). Toluene

Figure 7


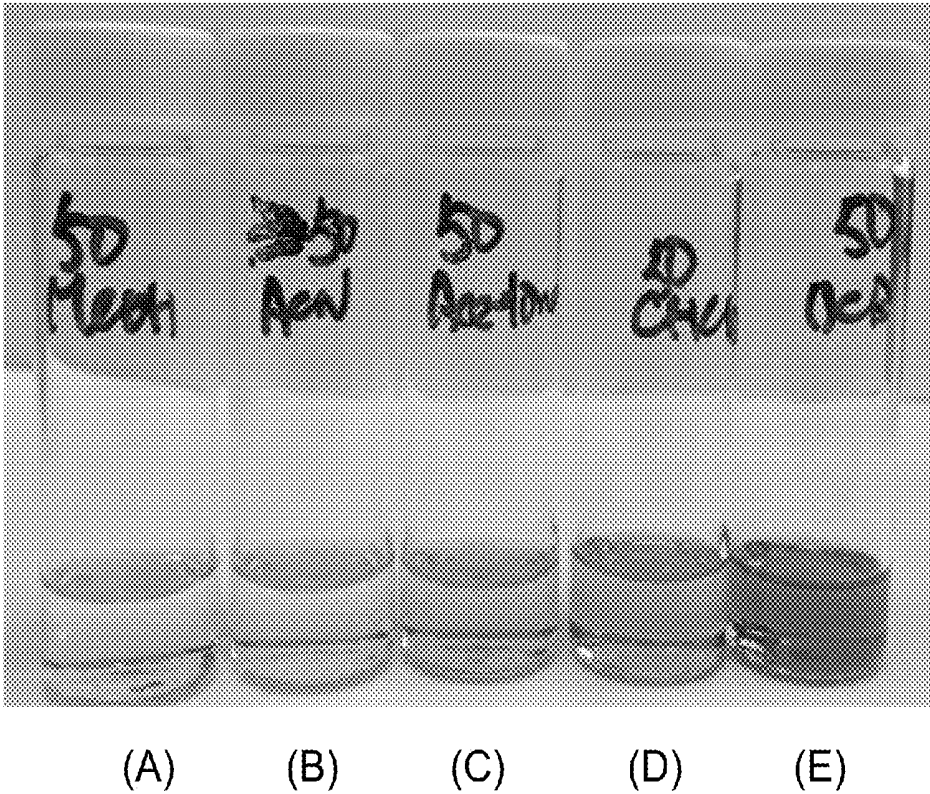


Figure 8

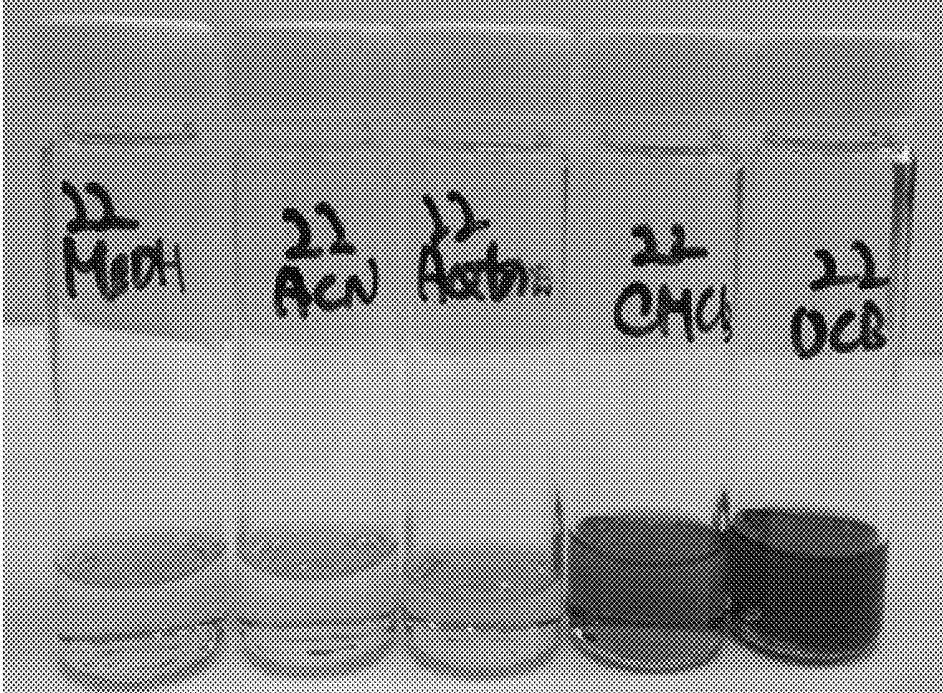

(A)

(B)

(C)

(D)

(E)

Figure 9



(A) (B) (C) (D) (E)

Figure 10

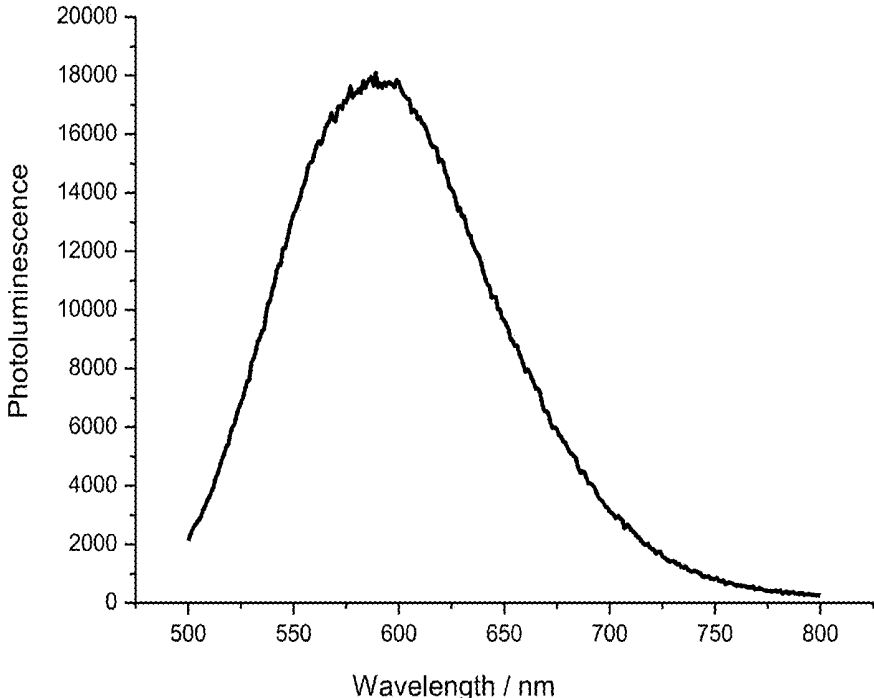


Figure 11

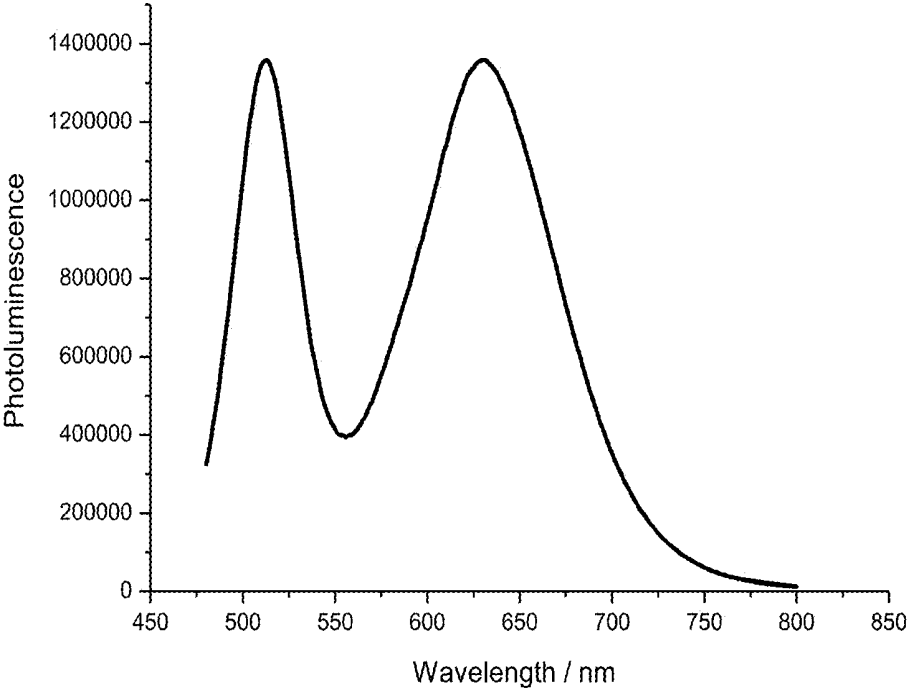


Figure 12

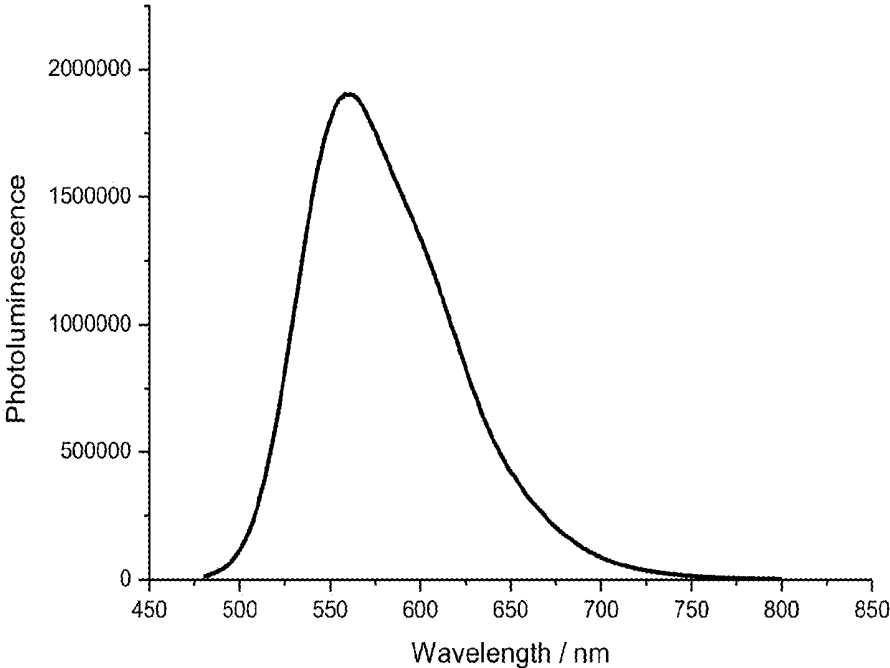


Figure 13

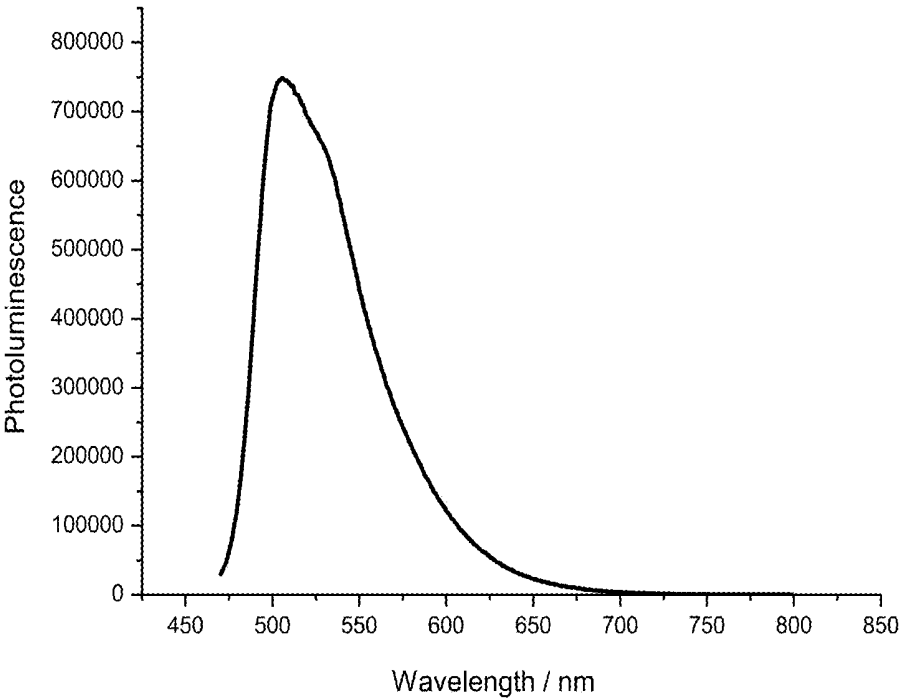


Figure 14

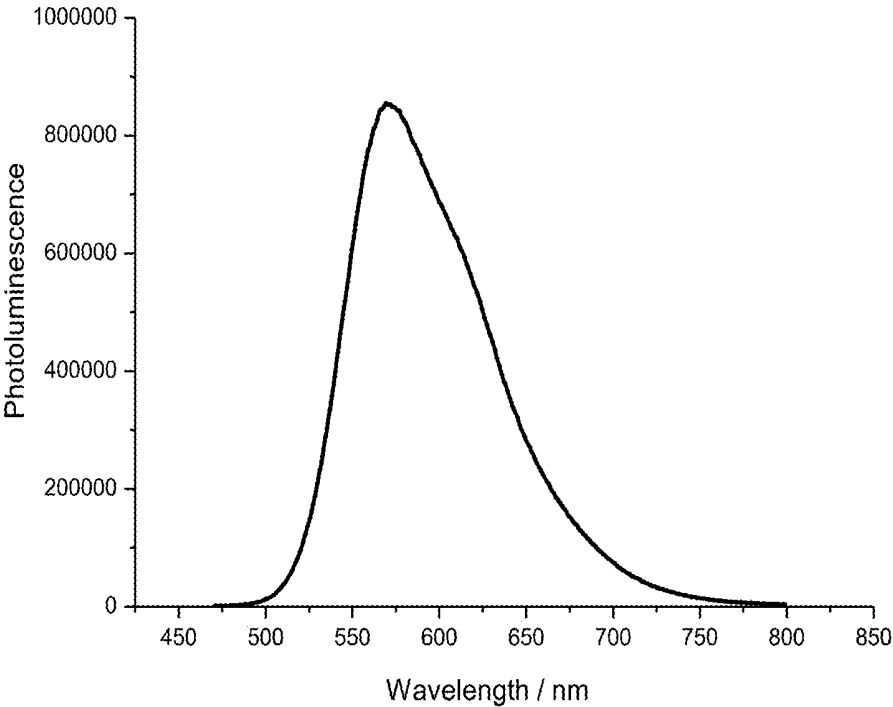


Figure 15

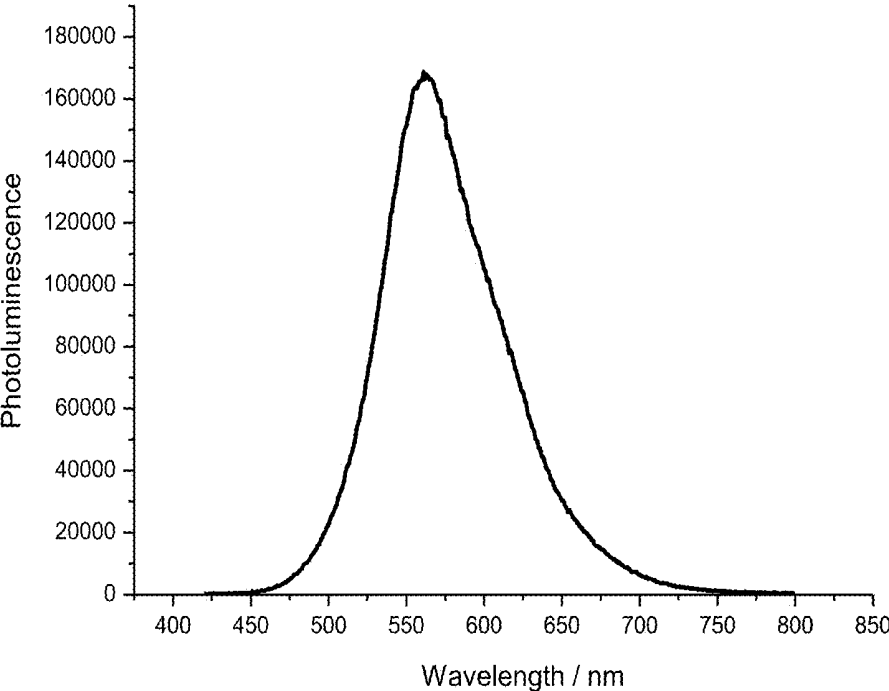


Figure 16

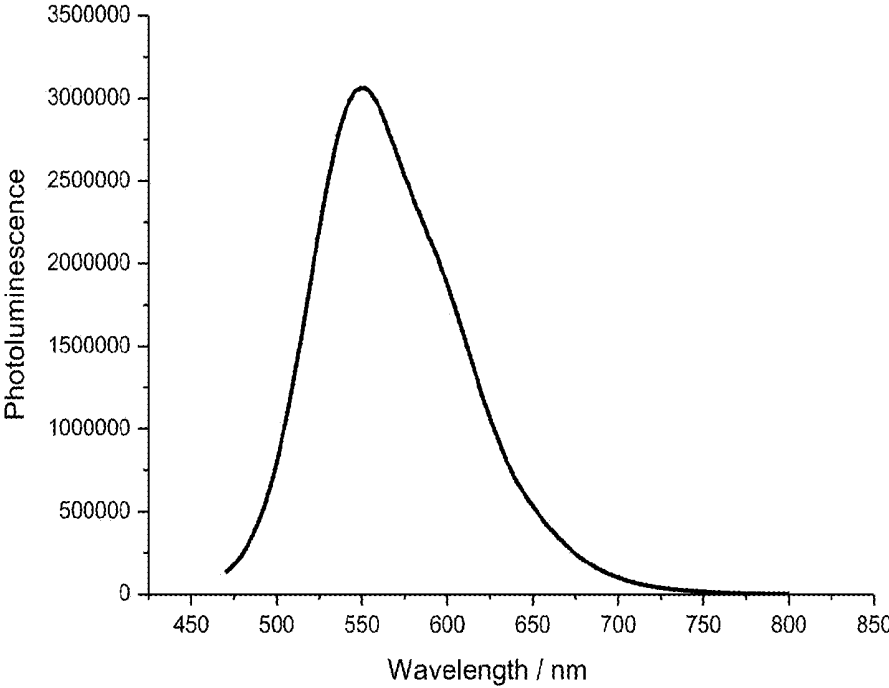


Figure 17

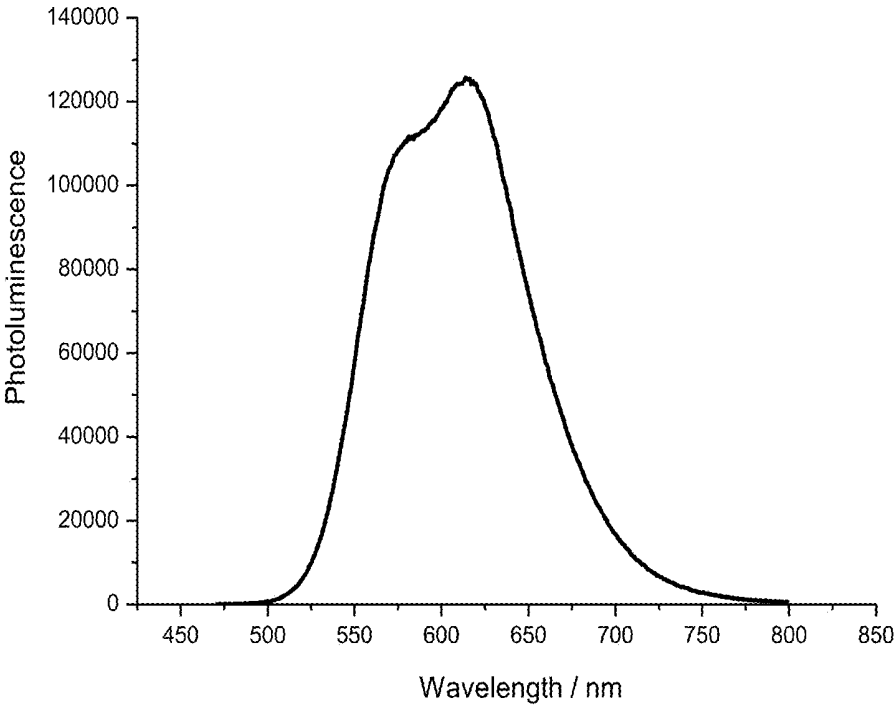


Figure 18

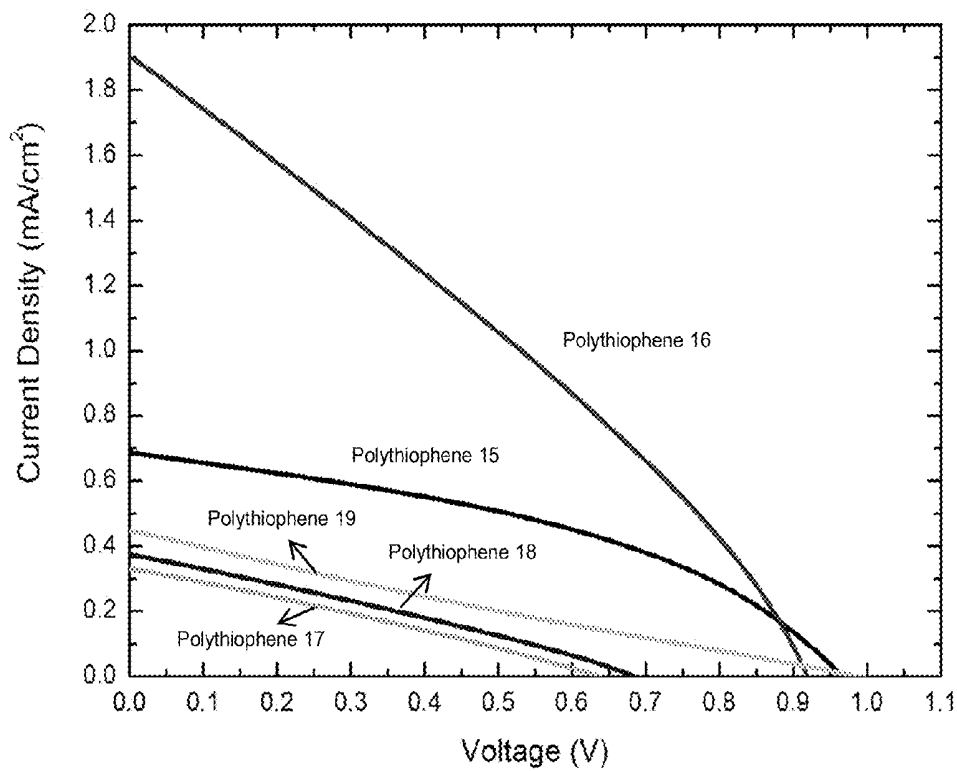


Figure 19

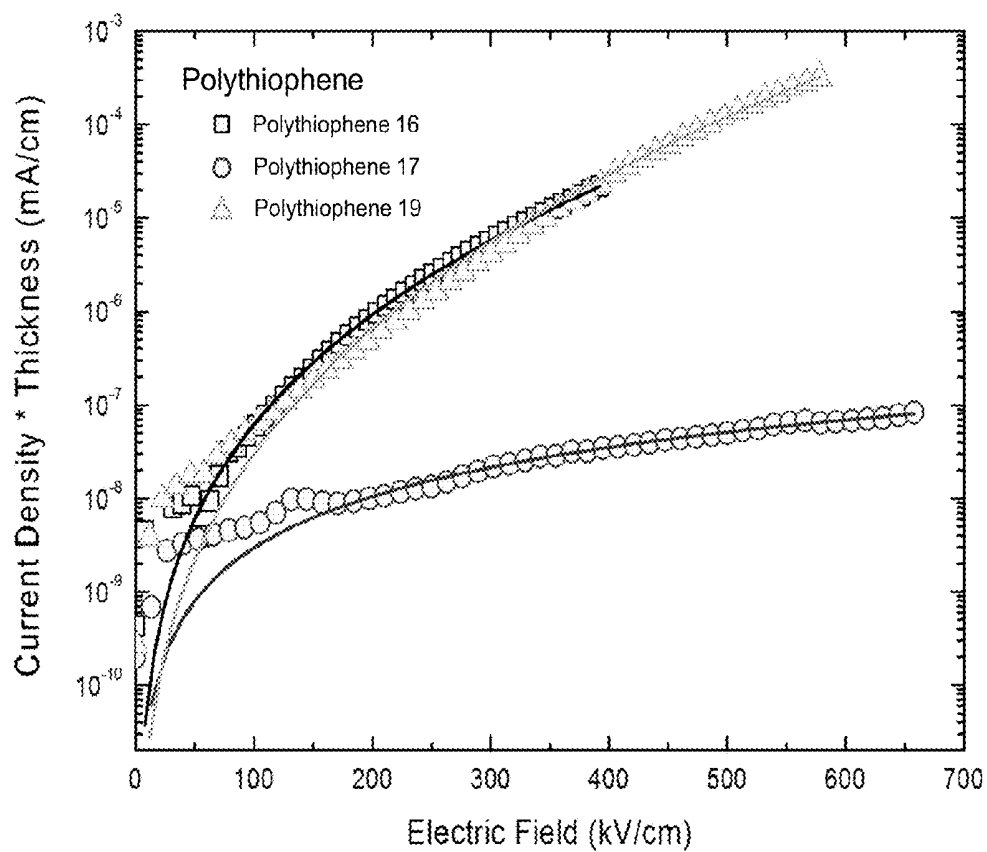


Figure 20

NEW CONDUCTIVE AND PHOTSENSITIVE POLYMERS

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims benefit under 35 U.S.C. §119(e) of U.S. Provisional Application having Ser. No. 61/855,965 filed on 29 May, 2013, which is hereby incorporated by reference herein in its entirety.

FIELD OF INVENTION

[0002] This invention relates to a novel polymer, in particular, a newly functionalized polythiophene, and the syntheses as well as the applications thereof.

BACKGROUND OF INVENTION

[0003] Photovoltaics are currently one of the most research-intensive areas globally in search for new technology to obtain reasonably priced and renewable green energy from sunlight. The technology development nowadays has come very diverse in the photovoltaic field. Among these developed technologies, energy saving devices such as organic light emitting diodes (OLEDs), polymer light emitting diodes (PLEDs), and organic photovoltaic devices (OPVs) are undergoing mass production and applications based on the advanced materials have been developed in recent years. However, there are still some key unsolved problems including low power conversion efficiency and high production cost for the active donor and acceptor materials (typically P3HT and PCBM) in the bulk heterojunction polymer solar cell. Up to now, the power conversion efficiency (PCE) is about 7% using PFN (poly[(9,9-bis(3'-(N,N-dimethylamino)propyl)-2,7-fluorene)-alt-2,7-(9,9-dioctylfluorene)]) at Ossila. By using new interface materials and architectures, the PCE of PTB7 (Poly[[4,8-bis[(2-ethylhexyl)oxy]benzo[1,2-b:4,5-b']dithiophene-2,6-diyl][3-fluoro-2-[(2-ethylhexyl)carbonyl]thieno[3,4-b]thiophene-diyl]]) is able to reach about 9%. However, the cost and the synthetic methodology for these polymers are not yet favorable for mass production and commercialization. As such, further improvements are still needed in order to provide ease of processing, higher performance, and lower production cost.


[0004] Polythiophene is one of the well-known electrically conducting polymers and it has been an important material for applications in photovoltaic cells, photochemical resists, light emitting diodes, and thin film transistors. For examples, both native polythiophene and regio-regular polythiophenes are well-known conducting polymers for the applications in the fields of energy saving devices.

[0005] However, the syntheses of polythiophenes and regio-regular polythiophenes involve lengthy and complicated processes, and cast hindrance for future scale-up and production. Also, solubility is a big problem for solution process of polythiophene.

[0006] For example, the most common regio-regular polythiophenes polymer, poly(3-hexylthiophene (P3HT)), has reasonable solubility but its production cost is very high and thus limits its applications for organic device fabrication. On the other hand, native polythiophene is cheap but unfortunately it is not soluble in both organic and aqueous solvents. This implies that the native polythiophene is difficult to be processed and thus limit many of its potential applications.

SUMMARY OF INVENTION

[0007] In the light of the foregoing background, it is an object of the present invention to provide a new polymer, which can be obtained through a cost-effective functionalization process and soluble in most commonly used organic solvents. Accordingly, the present invention, in one aspect, provides a compound of formula I,



[0008] wherein X is selected from the group consisting of hydrogen, bromine, chlorine, and methyl group;

[0009] m is equal or great than zero;

[0010] k is equal or great than one;


[0011] n is equal or great than one;

[0012] R is NR¹R², or selected from the group consisting of hydrogen, alkoxy group, and substituted alkoxy group;

[0013] wherein R¹ and R² are independently selected from the group consisting of hydrogen, aldehyde, acid chloride, acid bromide, and isocyanate; and

[0014] R' is selected from the group consisting of aryl, and substituted aryl.


[0015] In an exemplary embodiment of the present invention, wherein said compound is represented by formula Ia,



Ia

[0016] wherein R is NR¹R² or an alkoxy group, said alkoxy group is further selected from the group consisting of propanols, butanols, pentanols, hexanols, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane.


[0017] In an exemplary embodiment of the present invention, wherein said compound is represented by formula Ib,



Ib

[0018] wherein R is NR¹R² or an alkoxy group, said alkoxy group is further selected from the group consisting of ethanol, substituted ethanol, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane.


[0019] In an exemplary embodiment of the present invention, wherein said compound is represented by formula Ic,

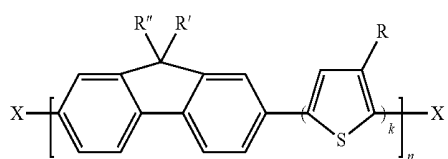

[0020] wherein R'' is hydrogen or alkyl chain comprising C₆H₁₃, C₈H₁₇, and C₁₂H₂₅; and

[0021] R is NR¹R² or an alkoxy group, said alkoxy group is further selected from the group consisting of ethanol, substituted ethanol, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane.

[0022] In an exemplary embodiment of the present invention, wherein said compound is represented by formula Ic',

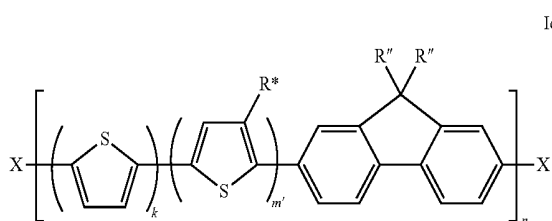


[0023] wherein m' is equal or greater than one;

[0024] R* is selected from the group consisting of ethanol, substituted ethanol, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane;


[0025] R'' is hydrogen or alkyl chain comprising C₆H₁₃, C₈H₁₇, and C₁₂H₂₅.

[0026] In an exemplary embodiment of the present invention, wherein said compound is represented by formula Id,



[0027] wherein R is NR¹R² or an alkoxy group, said alkoxy group is further selected from the group consisting of ethanol, substituted ethanol, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane.

[0028] In an exemplary embodiment of the present invention, wherein said compound is represented by formula Ie,



[0029] wherein m is equal or great than one; and

[0030] R³ and R⁴ are independently selected from the group consisting of hydrogen, aldehyde, acid chloride, acid bromide, and isocyanate.


[0031] In an exemplary embodiment of the present invention, wherein said aldehyde is an aliphatic aldehyde selected from the group consisting of acetaldehyde, propionaldehyde, butyraldehyde, and valeraldehyde; or an aromatic aldehyde selected from the group consisting of cinnamaldehyde. Said aldehyde is present in any one of the compounds represented by formulae I, Ia, Ib, Ic, Ic', Id, or Ie.

[0032] In an exemplary embodiment of the present invention, wherein said acid chloride is an aliphatic acid chloride selected from the group consisting of acetyl chloride, propanoyl chloride, butanoyl chloride, and pentanoyl chloride; or an aromatic acid chloride selected from the group consisting of benzoyl chloride, p-toluoyl chloride, 4-tert-butylbenzoyl chloride, and 4-(chloromethyl)benzoyl chloride. Said acid chloride is present in any one of the compounds represented by formulae I, Ia, Ib, Ic, Ic', Id, or Ie.


[0033] In an exemplary embodiment of the present invention, wherein said acid bromide is an aliphatic acid bromide selected from the group consisting of acetyl bromide, propanoyl bromide, butanoyl bromide, and pentanoyl bromide; or an aromatic acid bromide selected from the group consisting of p-toluoyl bromide, 4-tert-butylbenzoyl bromide, and 4-(chloromethyl)benzoyl bromide. Said acid bromide is present in any one of the compounds represented by formulae I, Ia, Ib, Ic, Ic', Id, or Ie.

[0034] In an exemplary embodiment of the present invention, wherein said isocyanate is an aliphatic isocyanate selected from the group consisting of ethyl isocyanate, isopropyl isocyanate, propyl isocyanate, sec-butyl isocyanate, 1-isocyanatobutane, and 2-ethylhexyl isocyanate; or an aromatic isocyanate selected from the group consisting of p-tolyl isocyanate, 4-ethylphenyl isocyanate, and 4-nitrophenyl isocyanate. Said isocyanate is present in any one of the compounds represented by formulae I, Ia, Ib, Ic, Ic', Id, or Ie.


[0035] In an exemplary embodiment of the present invention, wherein said compound is represented by formula Ie',



[0036] In an exemplary embodiment of the present invention, wherein said compound is selected from a group consisting of formulae (i)-(iii),



(i)

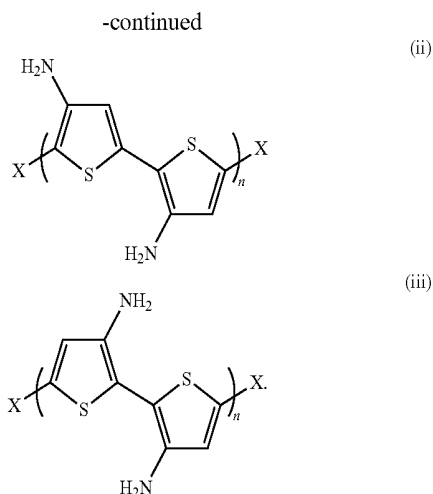

[0037] In a further aspect of the present invention, a composition is provided, comprising at least one of the above mentioned compounds, represented by formulae I, Ia, Ib, Ic, Ic', Id, Ie, Ie', (i), (ii), or (iii), and/or solvents.

[0038] In an exemplary embodiment of the present invention, the solvent comprises an organic solvent selected from the group consisting of acetone, acetonitrile, tetrahydrofuran, ethyl acetate, toluene, benzene, methanol, ethanol, 1-propanol, iso-propanol, DMSO, DMF, and halogenated hydrocarbon solvent.

[0039] In an exemplary embodiment of the present invention, the solvent further comprises water.

[0040] In a further aspect of the present invention, use of the compound as mentioned above is disclosed, including fabricating conducting polymers for printed electronics devices, organic light emitting diodes (OLEDs), light emitting diodes (PLEDs) and organic photovoltaic devices (OPVs) applications; or preparing light absorbing materials or donor materials for organic photovoltaic devices (OPVs) applications.

[0041] In a further aspect of the present invention, use of the composition as mentioned above is disclosed, including fabricating conducting polymers for printed electronics devices, organic light emitting diodes (OLEDs), light emitting diodes (PLEDs) and organic photovoltaic devices (OPVs) applications; or preparing light absorbing materials or donor materials for organic photovoltaic devices (OPVs) applications.

[0042] In a further aspect of the present invention, a conductive polymer is provided, comprising at least a compound as mentioned above, represented by formulae I, Ia, Ib, Ic, Ic', Id, Ie, Ie', (i), (ii), or (iii).

[0043] In a further aspect of the present invention, a solution is provided, comprising at least a compound as mentioned above, represented by formulae I, Ia, Ib, Ic, Ic', Id, Ie, Ie', (i), (ii), or (iii), wherein said solution is adapted for using or making a thin film on a substrate.

[0044] In an exemplary embodiment of the present invention, the solution is adapted for fabrication of a layer by using spin coating process or roll-to-roll process; wherein said layer is selected from the group consisting of a thin layer on a LED device as an active layer, a conductive layer for thermal management, and an active light absorption layer on an organic photovoltaic solar device.

[0045] In a further aspect of the present invention, an ink formulation is provided, comprising at least a compound as mentioned above, represented by formulae I, Ia, Ib, Ic, Ic', Id,

Ie, Ie', (i), (ii), or (iii), wherein said ink formulation is adapted for using or making a thin film on printed electronic devices.

[0046] In an exemplary embodiment of the present invention, the solution, the ink formulation is adapted for fabrication of a layer by using spin coating process or roll-to-roll process; wherein said layer is selected from the group consisting of a thin layer on a LED device as an active layer, a conductive layer for thermal management, and an active light absorption layer on an organic photovoltaic solar device.

BRIEF DESCRIPTION OF FIGURES

[0047] FIG. 1 shows the fabrication process for the NH_2 -functionalized polythiophene according to one embodiment of the present invention. The resulting NH_2 -functionalized polythiophene is soluble in organic solvents and is processable for reforming and thin film formation for devices.

[0048] FIG. 2 shows the UV-vis absorption spectrum of the functionalized polythiophene according to the same embodiment of the present invention.

[0049] FIG. 3 shows the UV-vis absorption spectrum of polythiophene 1 (where R is ethyl).

[0050] FIG. 4 shows the UV-vis absorption spectrum of polythiophene 2.

[0051] FIG. 5 shows the UV-vis absorption spectrum of polythiophene 4.

[0052] FIG. 6 shows the UV-vis absorption spectrum of polythiophene 11.

[0053] FIG. 7 shows the solubility of the NH_2 -functionalized polythiophene obtained according to Example 1 of the present invention in (A) ethanol, (B) acetone, (C) ethyl acetate, and (D) toluene.

[0054] FIG. 8 shows the solubility of polythiophene 1 in (A) methanol, (B) acetonitrile, (C) acetone, (D) chloroform, and (E) 1,2-dichlorobenzene according to one embodiment of the present invention

[0055] FIG. 9 shows the solubility of polythiophene 2 in (A) methanol, (B) acetonitrile, (C) acetone, (D) chloroform, and (E) 1,2-dichlorobenzene according to one embodiment 190 of the present invention.

[0056] FIG. 10 shows the solubility of polythiophene 4 in (A) methanol, (B) acetonitrile, (C) acetone, (D) chloroform, and (E) 1,2-dichlorobenzene according to one embodiment of the present invention.

[0057] FIG. 11 shows the photoluminescence spectrum of polythiophene 12 in DMF.

[0058] FIG. 12 shows the photoluminescence spectrum of polythiophene 13 in DMF.

[0059] FIG. 13 shows the photoluminescence spectrum of polythiophene 14 in DMF.

[0060] FIG. 14 shows the photoluminescence spectrum of polythiophene 15 in CHCl_3 .

[0061] FIG. 15 shows the photoluminescence spectrum of polythiophene 16 in CHCl_3 .

[0062] FIG. 16 shows the photoluminescence spectrum of polythiophene 17 in DCB.

[0063] FIG. 17 shows the photoluminescence spectrum of polythiophene 18 in CHCl_3 .

[0064] FIG. 18 shows the photoluminescence spectrum of polythiophene 19 in CHCl_3 .

[0065] FIG. 19 shows the J-V characteristics of polythiophenes 15-19 doped with PCBM under illumination.

[0066] FIG. 20 shows the J-V characteristics of polythiophenes 16, 17, and 19 under dark condition. The hollowed symbols are the experimental data, while the solid is the fitted curve of J_{SCL} .

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0067] As used herein and in the claims, "comprising" means including the following elements but not excluding others.

[0068] The present invention relates to new functionalized polythiophene compound. In particular, amine group directly bonds to the thiophene repeating unit of the polythiophene compound. The amine group allows ease of further functionalization to prepare new polymer derivatives with different chemical and physical properties. These new functionalized polythiophenes and their derivatives can be used for the fabrications of organic light emitting diodes (OLEDs), polymer light emitting diodes (PLEDs), organic photovoltaic devices (OPVs) and conducting polymers for printed electronic devices. The amine-functionalized polythiophene is soluble in commonly used organic solvents including acetone, ethyl acetate, ethanol, and toluene, etc. The resulting solution amine-functionalized polythiophene is processable and suitable for printing thin-films in the field of printed electronics and roll-to-roll processing.

[0069] Another aspect of the present invention discloses a new low-cost methodology to functionalize the native polythiophene through simple and mild chemical processes to produce new polythiophene compounds. The process is able to be scaled up for large production. The new compounds are soluble in common organic solvents including acetone, acetonitrile, tetrahydrofuran, ethyl acetate, chloroform, toluene, methanol, ethanol, 1-propanol, isopropanol, DMSO, DMF, other halogenated hydrocarbon solvents and etc.

[0070] The exemplary embodiments of the present invention are thus fully described. Although the description referred to particular embodiments, it will be clear to one skilled in the art that the present invention may be practiced with variation of these specific details. Hence this invention should not be construed as limited to the embodiments set forth herein.


[0071] Fabrication processes are described in Examples 1-9 below. Referring now to FIGS. 1-5, the present invention discloses the fabrication processes and UV-vis absorption spectrum of solution processable polythiophene.

Example 1

Fabrication of NH_2 -Functionalized Polythiophene

[0072] Polymerization of Thiophene


[0073] 50 ml acetonitrile was cooled in a flask in an ice bath. 38.44 g of anhydrous FeCl_3 were added to the flask. 5 g of thiophene and 20 ml acetonitrile were added to another flask in a 40° C. water bath. FeCl_3 solution was added to the thiophene solution drop by drop. The mixture was kept in a water bath at 40° C. for overnight. The resulting mixture was filtered and the dark reddish solid was collected. The solid was washed with methanol and then water. Reddish brown solid obtained. The compound was characterized by UV-vis. The process is summarized in Equation (1) below.



[0074] Observation: Solid is not soluble ethanol, ethyl acetate, acetone, etc. It is slightly soluble in hot dichlorobenzene.

Step 1: Nitration of Polythiophene to NO_2 -polythiophene (NO_2 -PT)

[0075] HNO_3 (8 ml) and H_2SO_4 (20 ml) were put in an ice bath for 30 min. The two acids and 3 ml H_2O were added to a flask with stirring in an ice bath and was kept for 30 min. Polythiophene (1 g) was added to the flask slowly. The mixture was then heated to 50° C. for 4 h after all solids were dissolved. The reaction mixture was then cooled to room temperature and then was poured to a beaker with ice-water slowly. Reddish brown precipitates were formed and the solid was filtered out. The compound was characterized by UV-vis. The process is summarized in Equation (2) below.

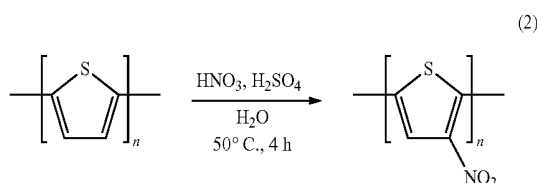

[0076] Observation: Reddish brown solid collected which was highly soluble in EtOH and acetone.

Step 2: Reduction of NO_2 -Polythiophene to NH_2 -Polythiophene


[0077] NO_2 -PT (0.2 g), Fe powder (0.3 g), CaCl_2 (0.2 g), EtOH (10 ml), and H_2O (0.5 ml) were added to a flask. The mixture was stirred and heated to 78° C. for 2.5 h. The mixture was then cooled to room temperature and the reaction mixture was filtered. The filtrate was collected, extracted with ethyl acetate and then was washed with water. The organic phase was collected and recrystallized. Black solid was obtained. The compound was characterized by UV-vis, which is shown in FIG. 2, whereas the solubility test results are shown in FIG. 7.

[0078] Observation: Black solid collected which was soluble in ethanol, ethyl acetate, and acetone.

Example 2

Fabrication of Polythiophene 1

[0079] Step 1: Modification of Thiophene-3-Ethanol with Various Acyl Chlorides (where R can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.)

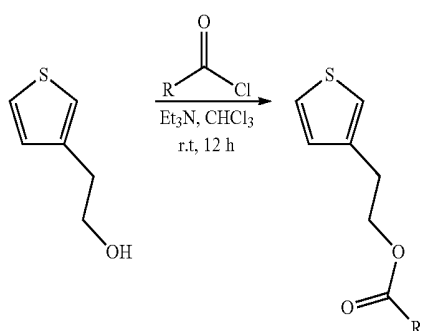

[0080] Procedures:


[0081] 1. 1.0 ml of thiophene-3-ethanol was placed with 30 ml of CHCl_3 , 4.96 ml of triethylamine and was cooled in ice-bath.

[0082] 2. 3.1 ml of propionyl chloride was added to thiophene solution dropwise for 15 min.

[0083] 3. The mixture was stirred at $0-2^\circ\text{C}$. for 2 h and then stirred at room temperature for 10 h and subsequently washed with DI water to obtain the product.

[0084] The process is summarized in Equation (3) above.

[0085] Step 2: Synthesis of Polythiophene 1 (where R can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.)

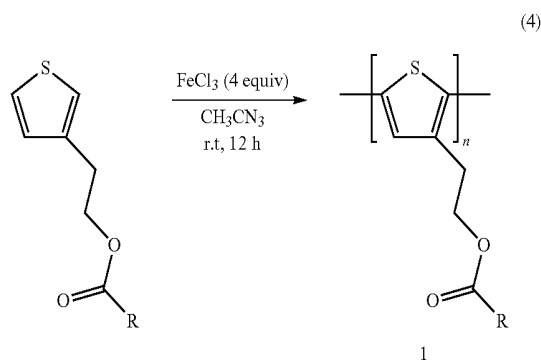

[0086] Procedures:

[0087] 1. 50 ml acetonitrile was cooled in an ice-bath. FeCl_3 (6.8 g, 41.8 mmol) was added to the flask with stirring.

[0088] 2. 2-(3-Thienyl)ethyl propanoate (1.9 g, 10.4 mmol) was dissolved in 20 mL acetonitrile and the solution was added to a dropping funnel.

[0089] 3. The 2-(3-Thienyl)ethyl propanoate solution (monomer) was added to the cooled FeCl_3 solution dropwise for a period of 0.5 h.

[0090] 4. The mixture was stirred at $0-2^\circ\text{C}$. for 2 h and then stirred at room temperature for 10 h.

[0091] 5. The precipitate was filtrated and washed with DI water and MeOH.

[0092] 6. The precipitate was poured into 12.5% of ammonium solution and stirred overnight at room temperature.

[0093] 7. The precipitate was filtrated and washed with DI water and MeOH. The collected precipitate was poured into an aqueous solution of EDTA (pH=8) and stirred overnight at room temperature.

[0094] 8. The precipitate was then filtrated and washed with DI water and MeOH.

[0095] The process is summarized in Equation (4) above.

[0096] The UV-vis spectrum of polythiophene 1 obtained is shown in FIG. 3, whereas the solubility test results are shown in FIG. 8 and summarized in Table 1 below, in which the R group is ethyl group in this specific embodiment of polythiophene 1.

[0097] As observed from Table 1, polythiophene 1 is soluble in acetone, chloroform, and 1,2-dichlorobenzene.


TABLE 1

Sample	Solvent	Solubility, g/ml at 23°C .
A	Methanol	Insoluble
B	Acetonitrile	Insoluble
C	Acetone	0.43 mg/mL
D	Chloroform	0.93 mg/mL
E	1,2-Dichlorobenzene	1.03 mg/mL

Example 3

Fabrication of Silyl-Polythiophene

[0098] Step 1: Modification of Thiophene-3-Ethanol with Various Silyl Chlorides ($(\text{R})_3\text{-Si-Cl}$, where R^1 , R^2 , and R^3 can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.)

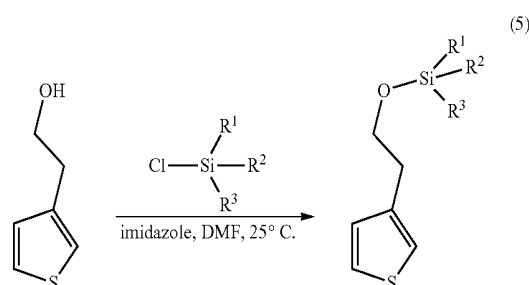

[0099] Procedures:

[0100] 1. Imidazole (4.9 g, 73.0 mmol) was added to a solution of 6.0 g (21.0 mmol) of 2-hydroxyethylthiophene in 60 mL of DMF, and the resulting mixture was stirred at room temperature for 15 min.


[0101] 2. The reaction was followed by addition of 5.2 g (34.4 mmol) of silyl chlorides in 10 mL of DMF.

[0102] 3. The reaction mixture was stirred for 16 h at room temperature, and then was poured into a water-ice solution. The solution was extracted with hexane (360 mL). The organic fraction is washed with water and dry over Na_2SO_4 .

[0103] 4. Concentration in vacuum affords crude product which was purified by column chromatography on silica gel as colorless oil.

[0104] The process is summarized in Equation (5) above.

[0105] Step 2: Synthesis of Silyl-Polythiophene (where R can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.)

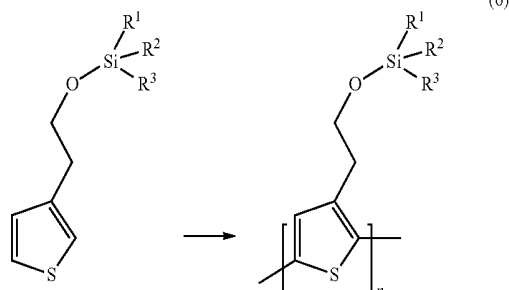


[0106] The polymerization procedure was the same as described in step 2 in Example 2. The process is summarized in Equation (6) above.

Example 4

Fabrication of New Polythiophene with Mixed-Blocks

[0107] 4.1 Synthesis of Polythiophene 2 Using Thiophene Monomer (A) and 3-Alkyl-Substituted Thiophene Monomer (B) (where R can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.)

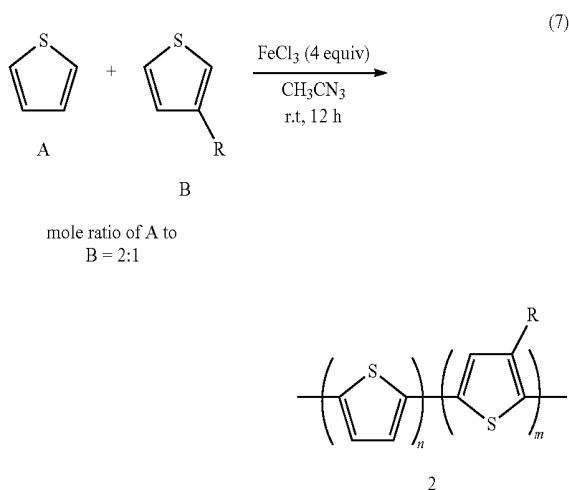

[0108] Procedures:

[0109] 1. 50 ml acetonitrile was cooled in an ice-bath. FeCl_3 (5.3 g 32.8 mmol) was added to the flask with stirring.

[0110] 2. Thiophene A (444 μL , 5.54 mmol) and 3-methylthiophene (268 μL , 2.77 mmol) B were dissolved in 20 mL of acetonitrile and added to a dropping funnel.

[0111] 3. The solution of the mixed thiophene monomers was added to FeCl_3 solution dropwise for a period of 0.5 h.

[0112] 4. The mixture was stirred at 0-2° C. for 2 h and then stirred at room temperature for 10 h.

[0113] 5. The precipitate was filtrated and washed with DI water and MeOH.

[0114] 6. The precipitate was poured into 12.5% of ammonium solution and stirred overnight at room temperature.

[0115] 7. The precipitate was filtrated and washed with DI water and MeOH. The collected precipitate was then poured into an aqueous solution of EDTA (pH=8) and stirred overnight at room temperature.

[0116] 8. The precipitate was filtrated and washed with DI water and MeOH.

[0117] The process is summarized in Equation (7) above. The UV-vis spectrum of polythiophene 2 obtained was shown in FIG. 4.


[0118] The UV-vis spectrum of polythiophene 2 obtained is shown in FIG. 4, whereas the solubility test results are shown in FIG. 9 and summarized in Table 2 below, in which the R group is methyl group, n is greater than 1 and m is greater than 1.

[0119] As observed from Table 2, polythiophene 2 is soluble in acetone, chloroform, and 1,2-dichlorobenzene.

TABLE 2



Test number	Solvent	Solubility, mg/ml at 23° C.
A	Methanol	Insoluble
B	Acetonitrile	Insoluble
C	Acetone	0.07 mg/mL
D	Chloroform	0.57 mg/mL
E	1,2-Dichlorobenzene	0.83 mg/mL

[0120] 4.2 Polymerization Using Thiophene Monomer (A) and Thiophene-3-Ethanol Monomer (B)

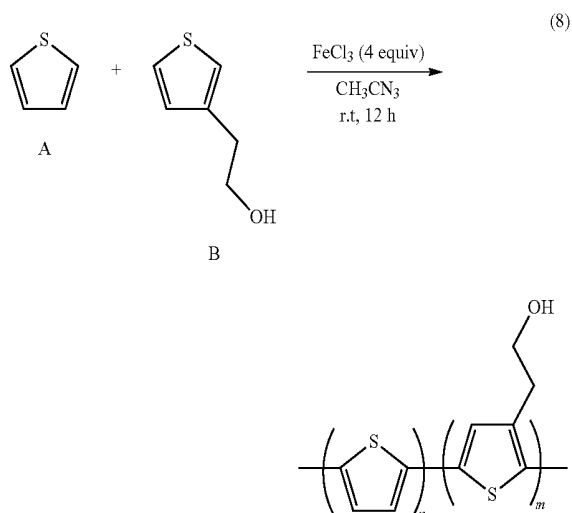



[0121] The polymerization procedure was the same as described in section 4.1 in Example 4. The process is summarized in Equation (8) above.

[0122] 4.3 Synthesis Using Thiophene Monomer (A) and Thiophene-3-Ethyl-Ester Monomer (B) (Referring to Step 1 in Example 2, where R can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.)

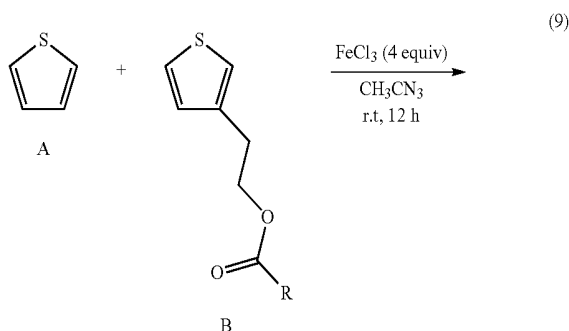

[0123] The synthesis procedure was the same as described in section 4.1 in Example 4. The process is summarized in Equation (9) above.

[0124] 4.4 Synthesis Using Thiophene Monomer (A) and Thiophene-3-Ethyl-Silyl Monomer (B) (Referring to Step 1 in Example 3, where R¹, R², and R³ can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.)

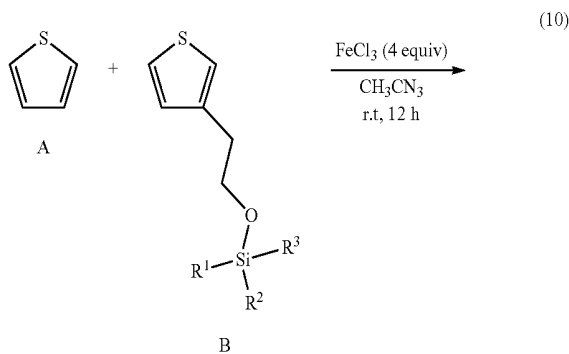


[0125] The synthesis procedure was the same as described in section 4.1 in Example 4. The process is summarized in Equation (10) above.

Example 5

Synthesis using polythiophene and 2,7-dibromo-9,9-dioctylfluorene

[0126] Step 1: Synthesis of Polythiophene 3

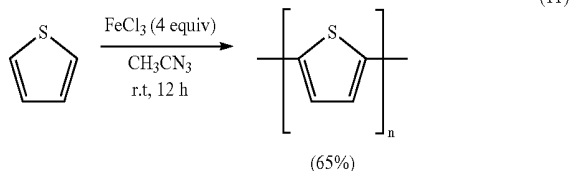

[0127] Procedures:

[0128] 1. 50 mL acetonitrile was cooled in an ice-bath. FeCl₃ (5.3 g, 32.8 mmol) was added to the flask with stirring.

[0129] 2. Thiophene monomer (660 μL, 8.31 mmol) was dissolved in 20 mL acetonitrile and then was added to a dropping funnel.

[0130] 3. The solution of the thiophene monomer was added to FeCl₃ solution dropwise in a period of 0.5 h.

[0131] 4. The mixture was stirred at 0-2° C. for 2 h and then stirred at room temperature for 10 h.

[0132] 5. The precipitate was filtrated and washed with DI water and followed by MeOH.


[0133] 6. The precipitate was poured into 12.5% of ammonium solution and was stirred overnight at room temperature.

[0134] 7. The precipitate was filtrated and washed with DI water and then MeOH. The collected precipitate was poured into an aqueous solution of EDTA (pH=8) and stirred overnight at room temperature.

[0135] 8. The precipitate was filtrated and washed with DI water and MeOH.

[0136] The process is summarized in Equation (11) above.

[0137] Step 2: Coupling Reaction of Polythiophene 3 (where the Repeating Unit, n, is Greater than 6) with 2,7-Dibromo-9,9-Dialkylfluorene (where R' can be n-Alkyl Chain Comprising: R'=C₆H₁₃, or C₈H₁₇, or C₁₂H₂₅) or 2,7-Dibromofluorene (where R'=H)

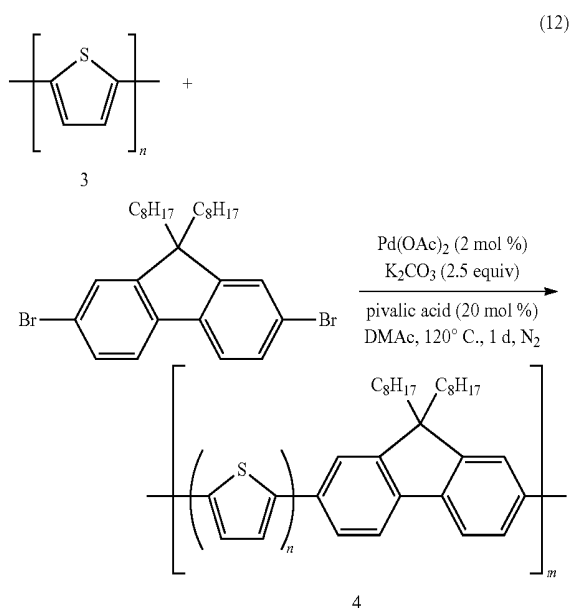

[0138] Procedures:

[0139] 1. A mixture of Pd(OAc)₂ (2 mg), pivalic acid (10 uL), K₂CO₃ (87 mg), 2,7-dibromo-9,9-dioctylfluorene (137 mg), polythiophene 3 (124 mg) were stirred in dimethylacetamide for 1 d at 120° C. under nitrogen.

[0140] 2. After cooling to room temperature, the mixture was poured into an aqueous solution of EDTA (pH=8).

[0141] 3. The suspension was stirred overnight at room temperature.

[0142] 4. The precipitate was filtrated and washed with 0.1 M HCl, then followed by DI water, MeOH and hexane successively.

[0143] 5. The precipitate was dissolved in CHCl₃ and the solution was filtrated to remove the insoluble matters.

[0144] 6. The Re-precipitation in CHCl₃/MeOH solution to obtain the product.

[0145] The process is summarized in Equation (12) above. The UV-vis spectrum of polythiophene 4 obtained was shown in FIG. 5. The UV-vis spectrum of polythiophene 4 obtained is shown in FIG. 5, whereas the solubility test results are shown in FIG. 10 and summarized in Table 3 below in which n is greater than 6 in this specific embodiment of polythiophene 4.

[0146] As observed from Table 3, polythiophene 4 is soluble in acetone, chloroform, and 1,2-dichlorobenzene.


TABLE 3

Test number	Solvent	Solubility, g/ml at 23° C.
A	Methanol	Insoluble
B	Acetonitrile	Insoluble
C	Acetone	0.07 mg/mL
D	Chloroform	0.20 mg/mL
E	1,2-Dichlorobenzene	0.37 mg/mL


Example 6

Synthesis using 3-substituted polythiophene and 2,7-dibromo-9,9-dialkylfluorene (where R' can be n-alkyl chain comprising: R'=C₆H₁₃, or C₈H₁₇, or C₁₂H₂₅) or 2,7-Dibromofluorene (where R'=H)

[0147]

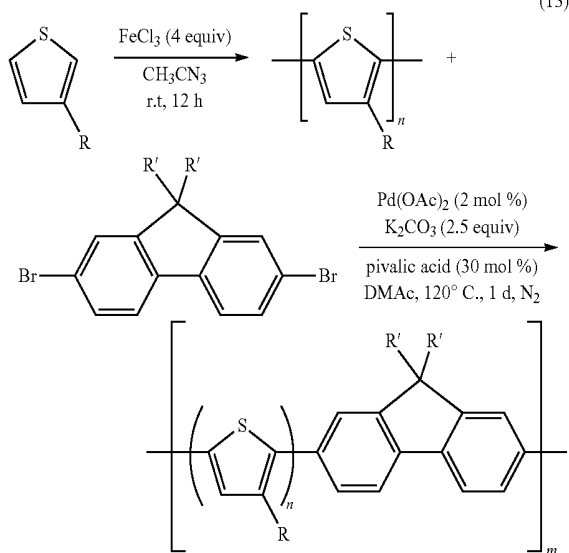

[0148] Step 1: Synthesis of 3-Substituted Polythiophene 5 (where the Repeating Unit, n, is Greater than 1.

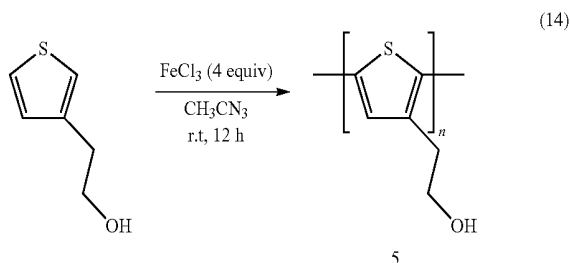

[0149] Procedures:

[0150] 1. 50 ml acetonitrile was cooled in an iced-bath. FeCl₃ (5.8 g, 35.7 mmol) was added to the flask with stirring.

[0151] 2. Thiophene-3-ethanol monomer (1.0 mL, 8.9 mmol) was dissolved in 20 mL acetonitrile and added to a dropping funnel.

[0152] 3. The thiophene solution was added to FeCl₃ solution dropwise over a period of 0.5 h.

[0153] 4. The mixture was stirred at 0-2° C. for 2 h and then stirred at room temperature for 10 h.

[0154] 5. The precipitate was filtrated and washed with DI water and MeOH.


[0155] 6. The precipitate was poured into 12.5% of ammonium solution and stirred overnight at room temperature.


[0156] 7. The precipitate was filtrated and washed with DI water and MeOH. The precipitate was poured into an aqueous solution of EDTA (pH=8) and stirred overnight at room temperature.

[0157] 8. The precipitate was filtrated and washed with DI water and MeOH.

[0158] The process is summarized in Equation (14) above.

[0159] Step 2: Coupling reaction of polythiophene 5 (where the repeating unit, n, is greater than 1) with 2,7-dibromo-9,9-dialkylfluorene (Where R' can be n-alkyl chain comprising: R'=C₆H₁₃, or C₈H₁₇, or C₁₂H₂₅) or 2,7-Dibromofluorene (where R'=H)

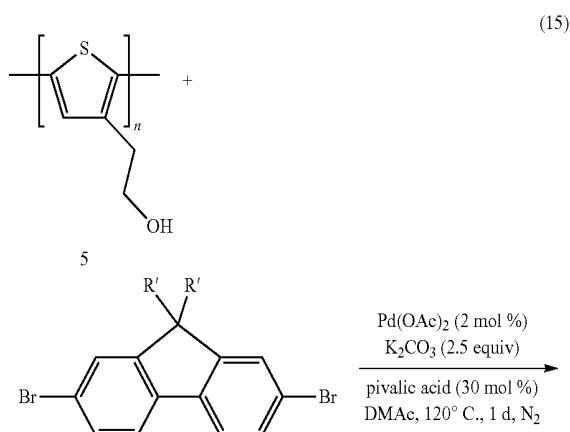

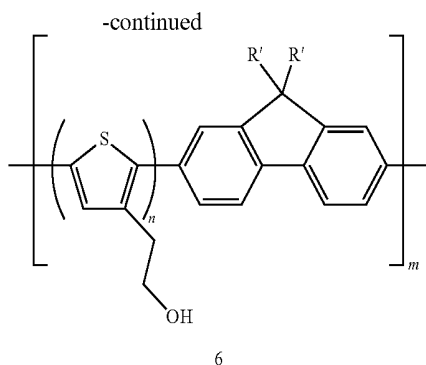**[0160]** Procedures:

[0161] 1. A mixture of Pd(OAc)₂ (2 mg), pivalic acid (10 uL), K₂CO₃ (87 mg), 2,7-dibromo-9,9-dioctylfluorene (137 mg), polythiophene 5 (124 mg) were stirred in dimethylacetamide for 1 d at 120° C. under N₂.

[0162] 2. After cooling to room temperature, the mixture was poured into an aqueous solution of EDTA (pH=8).

[0163] 3. The suspension was stirred overnight at room temperature.

[0164] 4. The precipitate was filtrated and washed with 0.1 M HCl, DI water, MeOH and hexane.



[0165] 5. The precipitate was dissolved in CHCl₃ and the solution was filtrated to remove the insoluble material.

[0166] 6. Re-precipitation in a CHCl₃/MeOH solution to result in the product of polythiophene 6.

[0167] The process is summarized in Equation (15) above.

Example 7

Synthesis using 3-substituted polythiophene (where R can be any alkyl chains comprising methyl, ethyl, propyl, i-propyl, butyl, etc.) with 2,7-dibromo-9,9-dialkylfluorene (where R' can be n-alkyl chain comprising: R' = C₆H₁₃, or C₈H₁₇, or C₁₂H₂₅) or 2,7-Dibromofluorene (where R' = H)

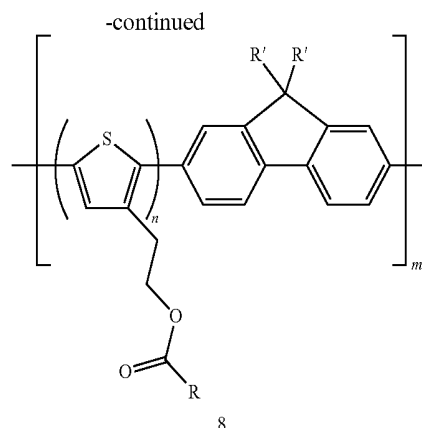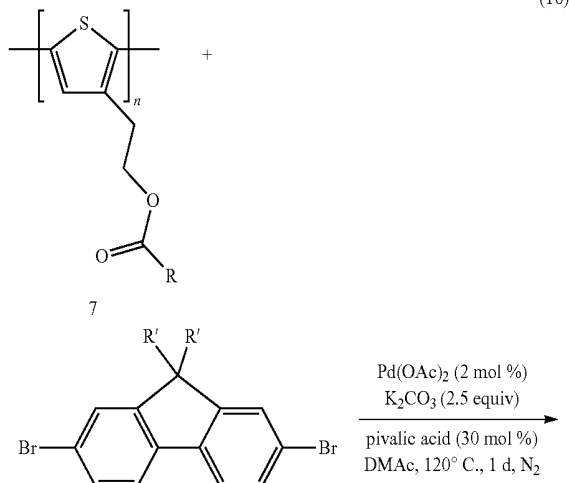[0168]**[0169]** Procedures:

[0170] 1. A mixture of Pd(OAc)₂ (2 mg), pivalic acid (10 uL), K₂CO₃ (87 mg), 2,7-dibromo-9,9-dioctylfluorene (137 mg), polythiophene 7 (124 mg) were stirred in dimethylacetamide for 1 d at 120° C. under N₂.

[0171] 2. After cooling to room temperature, the mixture was poured into an aqueous solution of EDTA (pH=8).

[0172] 3. The suspension was stirred overnight at room temperature.

[0173] 4. The precipitate was filtrated and washed with 0.1 M HCl, DI water, MeOH and hexane.

[0174] 5. The precipitate was dissolved in CHCl₃ and the solution was filtrated to remove the insoluble material.


[0175] 6. Re-precipitation in a CHCl₃/MeOH solution to result in the product of polythiophene 8.


[0176] The process is summarized in Equation (16) above.

Example 8

Synthesis Using New Mix-Block Polythiophene with 2,7-Dibromo-9,9-Dialkylfluorene (where R' can be n-Alkyl Chain Comprising: R' = C₆H₁₃, or C₈H₁₇, or C₁₂H₂₅) or 2,7-Dibromofluorene (where R' = H)

[0177] 8.1 Reaction of the New Mix-Block Polythiophene (Referring to Product of Example 4, where R can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.) and 2,7-Dibromo-9,9-Dialkylfluorene (where R' can be n-Alkyl Chain Comprising: R' = C₆H₁₃, or C₈H₁₇, or C₁₂H₂₅) or 2,7-Dibromofluorene (where R' = H).

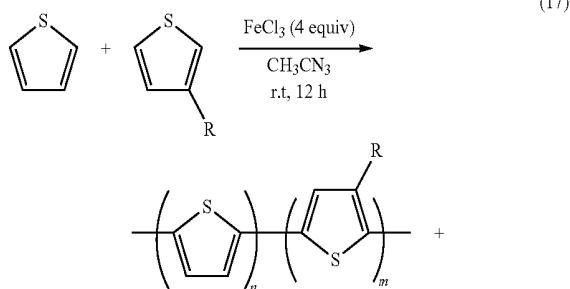

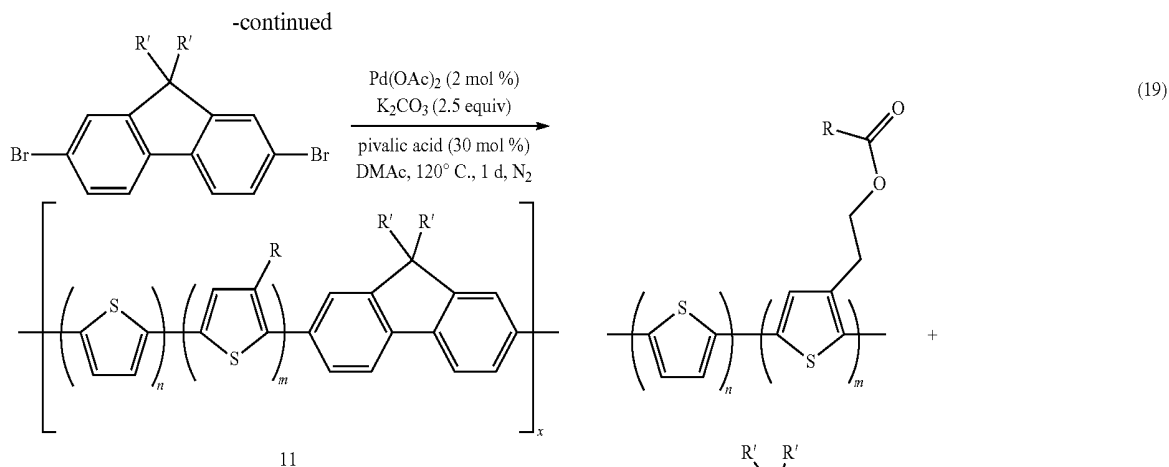


[0178] The process is summarized in Equation (17) above in which polythiophene 11 is obtained.


[0179] The UV-vis spectrum of a specific embodiment of polythiophene 11, in which R group is methyl, n is greater than 1, and m is greater than 1, is shown in FIG. 6.

[0180] 8.2 Reaction of the new mix-block polythiophene (refer to the product of Example 4) and 2,7-dibromo-9,9-dialkylfluorene (Where R' can be n-alkyl chain comprising: R'=C₆H₁₃, or C₈H₁₇, or C₁₂H₂₅) or 2,7-Dibromofluorene (where R'=H).

[0181] The process is summarized in Equation (18) above.

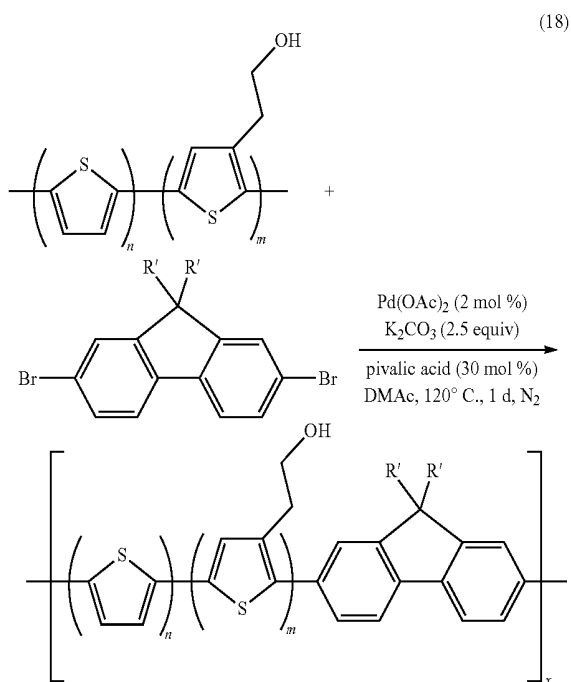



[0182] 8.3 Reaction of the New Mix-Block Polythiophene (Referring to the Product of Example 4, where R can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.) with 2,7-Dibromo-9,9-Dialkylfluorene (where R' can be n-Alkyl Chain Comprising: R'=C₆H₁₃, or C₈H₁₇, or C₁₂H₂₅) or 2,7-Dibromofluorene (where R'=H).

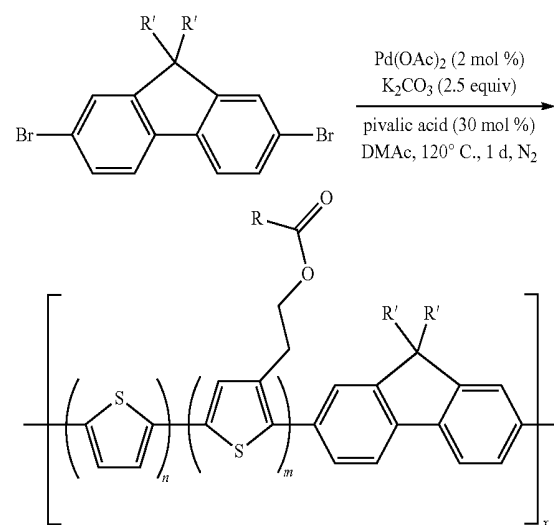

[0183] The process is summarized in Equation (19) above.

[0184] 8.4 Reaction of the New Mix-Block Polythiophene (Referring to the Product of Example 4, where R¹, R², and R³ can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.) with 2,7-Dibromo-9,9-Dialkylfluorene (where R' can be n-Alkyl Chain Comprising: R'=C₆H₁₃, or C₈H₁₇, or C₁₂H₂₅) or 2,7-Dibromofluorene (where R'=H).

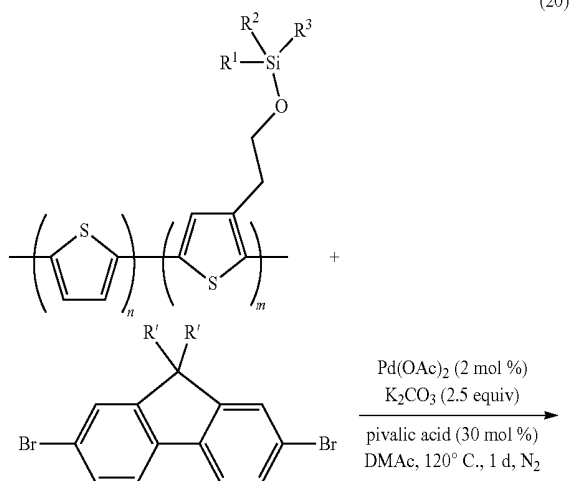

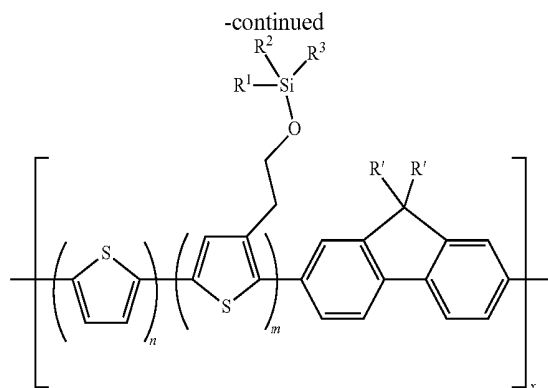


[0185] The process is summarized in Equation (20) above.



Example 9

Synthesis Using New Polythiophene (where R can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.) with Benzothiadiazole (BT)

[0186]

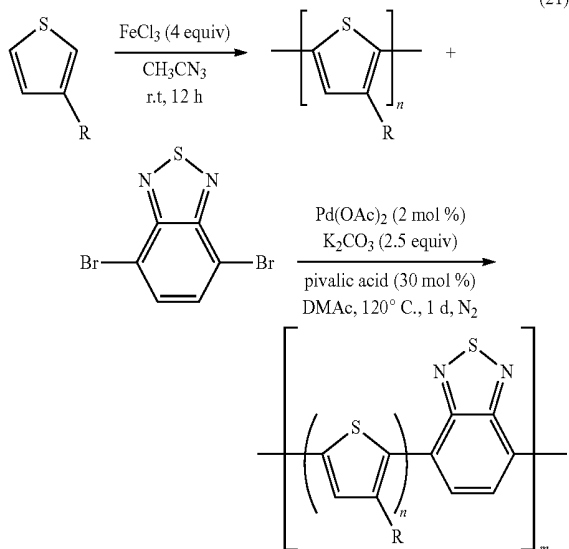

[0187] 9.1 Coupling Reaction of New Polythiophene 5 with Benzothiadiazole (BT) to Synthesize Polythiophene 9

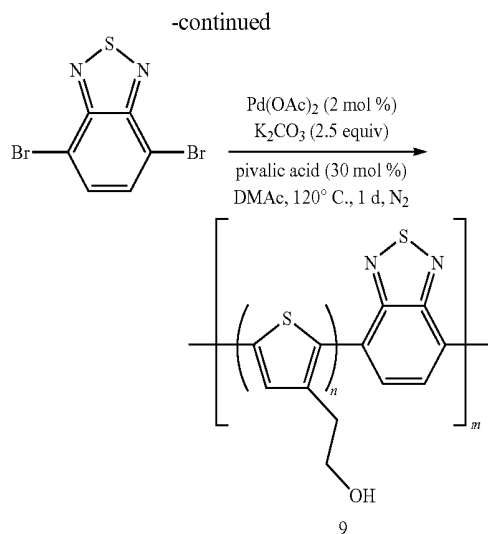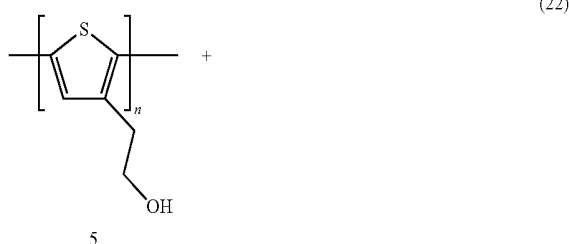

[0188] Procedures:

[0189] 1. A mixture of Pd(OAc)₂ (2 mg), pivalic acid (10 uL), K₂CO₃ (87 mg), benzothiadiazole (137 mg), polythiophene 5 (124 mg) were stirred in dimethylacetamide for 1 d at 120° C. under N₂.

[0190] 2. After cooling to room temperature, the mixture was poured into an aqueous solution of EDTA (pH=8).

[0191] 3. The suspension was stirred overnight at room temperature.


[0192] 4. The precipitate was filtrated and washed with 0.1 M HCl, DI water, MeOH and hexane.

[0193] 5. The precipitate was dissolved in CHCl₃ and the solution was filtrated to remove the insoluble material.


[0194] 6. Re-precipitation in a CHCl₃/MeOH solution to result in the product of polythiophene 9.

[0195] The process is summarized in Equation (22) above.

[0196] 9.2 Coupling Reaction of New Polythiophene 7 (where R can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.) with Benzothiadiazole (BT) to Synthesize Polythiophene 10

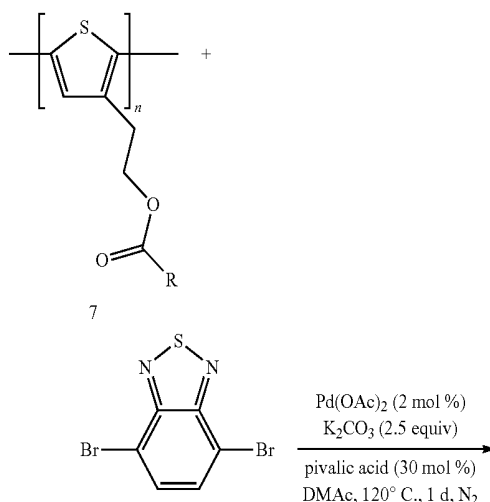

-continued

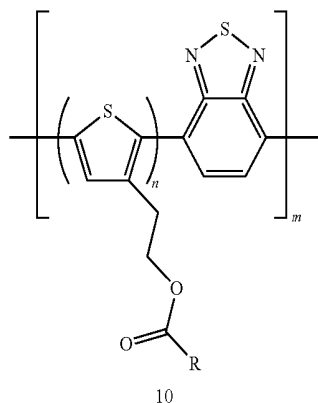

[0197] Procedures:

[0198] 1. A mixture of Pd(OAc)₂ (2 mg), pivalic acid (10 uL), K₂CO₃ (87 mg), benzothiadiazole (137 mg), polythiophene 7 (124 mg) were stirred in dimethylacetamide for 1 d at 120° C. under N₂.

[0199] 2. After cooling to room temperature, the mixture was poured into an aqueous solution of EDTA (pH=8).

[0200] 3. The suspension was stirred overnight at room temperature.


[0201] 4. The precipitate was filtrated and washed with 0.1 M HCl, DI water, MeOH and hexane.

[0202] 5. The precipitate was dissolved in CHCl₃ and the solution was filtrated to remove the insoluble material.


[0203] 6. Re-precipitation in a CHCl₃/MeOH solution to result in the product of polythiophene 10.

[0204] The process is summarized in Equation (23) above.

[0205] 9.3 Coupling Reaction of New Polythiophene (where R¹, R², and R³ can be any Alkyl Chains Comprising Methyl, Ethyl, Propyl, i-Propyl, Butyl, Etc.) with Benzothiadiazole (BT)

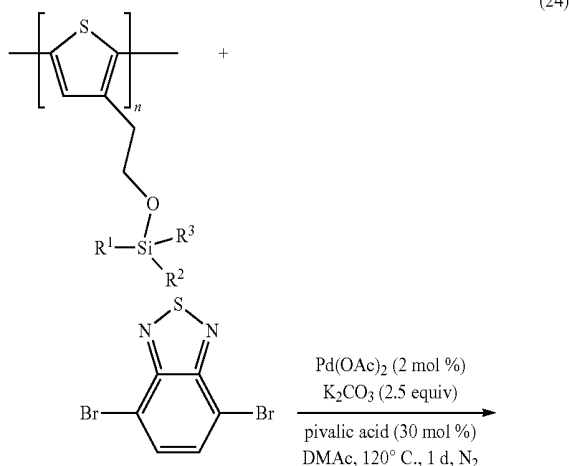

-continued

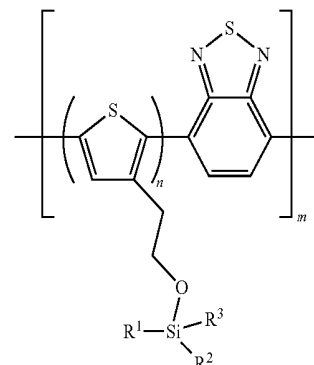

[0206] The process is summarized in Equation (24) above.

[0207] Referring now to FIGS. 7(A), 7(B), 7(C), and 7(D), the solubility tests of the polythiophene compounds of the present invention demonstrate that the new compounds are soluble in ethanol, acetone, ethyl acetate, and toluene.

Example 10

Study on the Solubility of NH₂-Functionalized Polythiophene in Ethanol

[0208] A reddish brown solid sample of NH₂-functionalized polythiophene (15 mg) was put into a glass bottle and 2 ml of ethanol was added to dissolve the compound at room temperature. A deep reddish-brown homogeneous solution was obtained as shown in FIG. 7 (A). The test demonstrated that NH₂-functionalized polythiophene is soluble in ethanol.

Example 11

Study on the Solubility of NH₂-Functionalized Polythiophene in Acetone

[0209] A reddish brown solid sample of NH₂-functionalized polythiophene (15 mg) was put into a glass bottle and 2 ml of acetone was added to dissolve the compound at room temperature. A deep reddish-brown homogeneous solution was obtained as shown in FIG. 7 (B). The test demonstrated that NH₂-functionalized polythiophene is soluble in acetone.

Example 12

Study on the Solubility of NH₂-Functionalized Polythiophene in Ethyl Acetate

[0210] A reddish brown solid sample of NH₂-functionalized polythiophene (10 mg) was put into a glass bottle and 2 ml of ethyl acetate was added to dissolve the compound at room temperature. A reddish-brown homogeneous solution was obtained as shown in FIG. 7 (C). The test demonstrated that NH₂-functionalized polythiophene is soluble in ethyl acetate.

Example 13

Study on the Solubility of NH₂-Functionalized Polythiophene in Toluene

[0211] A reddish brown solid sample of NH₂-functionalized polythiophene (5 mg) was put into a glass bottle and 2 ml of toluene was added to dissolve the compound at room temperature. A reddish-brown homogeneous solution was obtained as shown in FIG. 7 (D). The test demonstrated that NH₂-functionalized polythiophene is soluble in toluene.

Example 14

Study on the Potential Application of Polythiophenes for Electroluminescent Devices, Such as Organic Light Emitting Diode and Polymer Light-Emitting Diode

[0212] All of the polythiophenes in Table 4 were readily dissolved in DMF, chloroform or dichlorobenzene, and were filtered by 0.45 μm PTFE filter. They display photoluminescence at room temperature under ambient condition when they are excited at their respective absorption bands and the maximum fluorescence peaks are found in the range of 505 to 630 nm.

TABLE 4



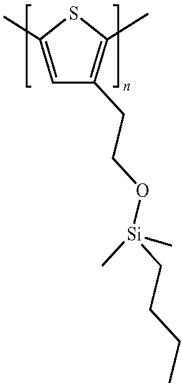
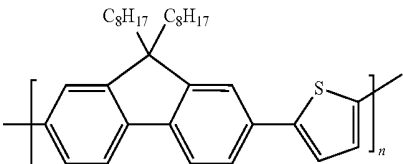



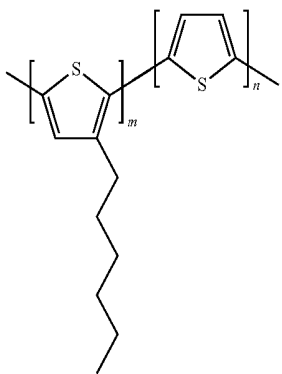
Polythiophene	Chemical structure	Solvent	Excitation wavelength (nm), λ_{ex}	Emission wavelength (nm), λ_{em}
12		DMF	500	588
13		DMF	480	512, 630
14		DMF	480	559
15		CHCl ₃	470	505

TABLE 4-continued

Polythiophene	Chemical structure	Solvent	Excitation wavelength (nm), λ_{ex}	Emission wavelength (nm), λ_{em}
16		CHCl ₃	470	570
17		DCB	420	562
18		CHCl ₃	470	550
19		CHCl ₃	470	580, 613

[0213] Polythiophene 14-19 emit green light in the range of 505 nm to 570 nm. Polythiophene 12 shows yellow emission color at 588 nm while polythiophene 13 exhibits green and red light emission with two peaks at 512 nm and 630 nm respectively. Polythiophene 19 shows emission color in the range from yellow to orange at 580 nm to 613 nm.

[0214] Similar polythiophene materials were previously shown to fabricate high efficient electroluminescent devices (I. F. Perepichka, et al., 2005; G. G. Malliaras, et al., 1993; J.-L. Bredas, et al., 1983; F. Chen, et al., 1996; M. Pomerantz, et al., 1999). Thus polythiophenes 12-19 as shown in Table 4,

or other polythiophenes of the present invention, could be used in fabricating high efficient electroluminescent devices.

[0215] The photoluminescence spectra of polythiophenes 12-19 obtained are shown in FIGS. 11-18.

Example 15

Study on the Potential Application of Polythiophenes 16, 17, and 19 for Fabricating Organic Photovoltaic Solar Cells, Transistor or Other Conducting Devices

[0216] For photovoltaic (PV) measurements, the structure of fabricated device is ITO/PEDOT:PSS (30 nm)/Polymer:

PCBM (1:1 wt %)/LiF (1 nm)/Al (120 nm) and the active area is 0.16 cm². The J-V characteristic under illumination is plotted in FIG. 19 and the PV parameters are summarized in Table 5. All of the polythiophenes have shown the PV characteristics, and so it is proven that the selected polythiophenes are the potential materials for PV cells fabrication.

TABLE 5

Polythiophene	Thickness (nm)	Voc (V)	Jsc (mA/cm ²)	FF (%)	PCE (%)
15	162	0.97	0.69	41.0	0.3
16	55	0.91	1.91	30.6	0.5
17	118	0.63	0.33	28.0	0.1
18	127	0.68	0.37	28.4	0.1
19	65	0.98	0.45	22.9	0.1

[0217] To investigate the conductivity (a) of synthesized polythiophene, mobility (p) determination should be the most directly method according to the following equation:

$$\sigma = nqu,$$

where n is the carrier concentration and q is the elementary charge.

[0218] In the study, J-V measurement in dark condition is employed for 16, 17 and 19 with the unipolar device structure, ITO/PEDOT:PSS (30 nm)/Polymer/Al (100 nm). The J-V characteristics are shown in FIG. 10. The hollowed symbols are the experimental data, while the solid lines are the fitted curve of space-charge-limited current (J_{SCL}). The mobility (μ) can then be obtained from the fitting parameters in the following equation:

$$J = \frac{9}{8} \mu \epsilon \frac{E^2}{d},$$

[0219] where ϵ is permittivity, E is electric field and d is the device thickness.


[0220] The results are summarized in Table 6. It shows clearly that polythiophenes 16, 17 and 19 are conducting polythiophenes with the magnitude between 1×10^{-7} to 1×10^{-6} cm²/Vs. Therefore, all these investigated polythiophenes can be used for the fabrication of transistor or other conducting devices.

TABLE 6

Polythiophene	Thickness (nm)	Mobility (cm ² /Vs)
16	255	8.49×10^{-7}
17	152	1.34×10^{-6}
19	173	1.64×10^{-7}

What is claimed is:

1. A compound of formula I,



I

wherein

X is selected from the group consisting of hydrogen, bromine, chlorine, and methyl group;

m is equal to or great than zero;

k is equal to or great than one;

n is equal to or great than one;


R is NR¹R², or selected from the group consisting of hydrogen, alkoxy group, and substituted alkoxy group; and

wherein

R¹ and R² are independently selected from the group consisting of hydrogen, aldehyde, acid chloride, acid bromide, and isocyanate; and

R' is selected from the group consisting of aryl, and substituted aryl.

2. The compound according to claim 1, wherein said compound is represented by formula Ia,




Ia

wherein

R is NR¹R² or an alkoxy group, said alkoxy group is further selected from the group consisting of propanols, butanols, pentanols, hexanols, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane.

3. The compound according to claim 1, wherein said compound is represented by formula Ib,




Ib

wherein

R is NR¹R² or an alkoxy group, said alkoxy group is further selected from the group consisting of ethanol, substituted ethanol, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane.

4. The compound according to claim 1, wherein said compound is represented by formula Ic,

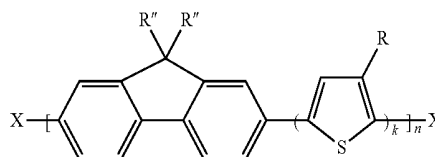

Ic


wherein

R'' is hydrogen or alkyl chain comprising C₆H₁₃, C₈H₁₇, and C₁₂H₂₅; and

R is NR¹R² or an alkoxy group, said alkoxy group is further selected from the group consisting of ethanol, substi-

tuted ethanol, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane.

5. The compound according to claim 1, wherein said compound is represented by formula 1c',

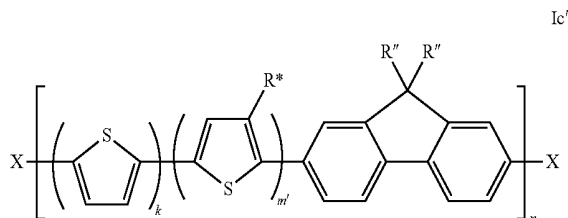


wherein

m' is equal or greater than one;

R* is selected from the group consisting of ethanol, substituted ethanol, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane; and R'' is hydrogen or alkyl chain comprising C₆H₁₃, C₈H₁₇, and C₁₂H₂₅.


6. The compound according to claim 1, wherein said compound is represented by formula 1d,

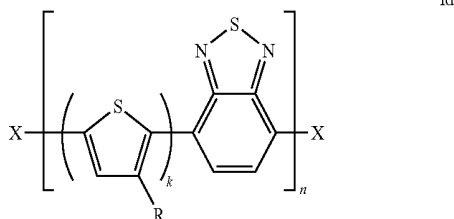

wherein

R is NR¹R² or an alkoxy group, said alkoxy group is further selected from the group consisting of ethanol, substituted ethanol, ethyl formate, substituted ethyl formate, ethoxy silane, and substituted ethoxy silane.

7. The compound according to claim 1, wherein said compound is represented by formula 1e,

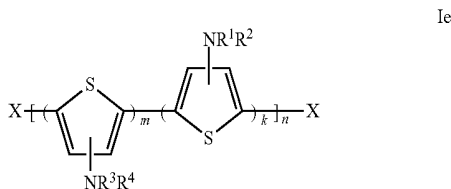

wherein

m is equal or great than one; and

R³ and R⁴ are independently selected from the group consisting of hydrogen, aldehyde, acid chloride, acid bromide, and isocyanate.

8. The compound according to any one of claim 1, wherein said aldehyde is an aliphatic aldehyde selected from the group consisting of acetaldehyde, propionaldehyde, butyraldehyde, and valeraldehyde; or

an aromatic aldehyde selected from the group consisting of cinnamaldehyde.

9. The compound according to any one of claim 1, wherein said acid chloride is an aliphatic acid chloride selected from the group consisting of acetyl chloride, propanoyl chloride, butanoyl chloride, and pentanoyl chloride; or

an aromatic acid chloride selected from the group consisting of benzoyl chloride, p-toluoyl chloride, 4-tert-butylbenzoyl chloride, and 4-(chloromethyl)benzoyl chloride.


10. The compound according to any one of claim 1, wherein said acid bromide is an aliphatic acid bromide selected from the group consisting of acetyl bromide, propanoyl bromide, butanoyl bromide, and pentanoyl bromide; or

an aromatic acid bromide selected from the group consisting of p-toluoyl bromide, 4-tert-butylbenzoyl bromide, and 4-(chloromethyl)benzoyl bromide.



11. The compound according to any one of claim 1, wherein said isocyanate is an aliphatic isocyanate selected from the group consisting of ethyl isocyanate, isopropyl isocyanate, propyl isocyanate, sec-butyl isocyanate, 1-isocyanatobutane, and 2-ethylhexyl isocyanate; or

an aromatic isocyanate selected from the group consisting of p-tolyl isocyanate, 4-ethylphenyl isocyanate, and 4-nitrophenyl isocyanate.


12. The compound according to claim 7, wherein said compound is represented by formula 1e',



13. The compound according to claim 12, wherein said compound is selected from a group consisting of formulae (i)-(iii)

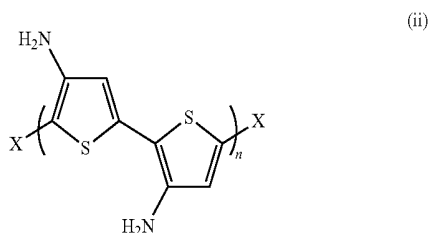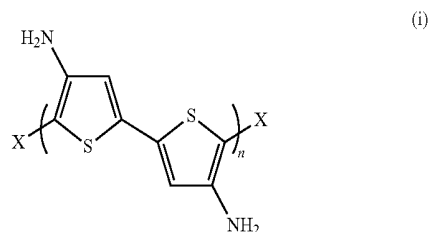

-continued



(iii)

14. A composition comprising at least a compound according to any one of claim **1** and **13** admixed with a solvent.

15. The composition according to claim **14**, wherein said solvent comprises an organic solvent selected from the group consisting of acetone, acetonitrile, tetrahydrofuran, ethyl acetate, toluene, benzene, methanol, ethanol, 1-propanol, iso-propanol, DMSO, DMF, and halogenated hydrocarbon solvent.

16. The composition according to claim **15**, wherein said solvent further comprises water.

17. A conductive polymer comprising at least a compound according to any one of claims **1** and **13**.

18. A solution comprising at least a compound according to any one of claims **1** and **13**, wherein said solution is adapted for using or making a thin film on a substrate.

19. The solution according to claim **18**, wherein said solution is adapted for fabrication of a layer by using spin coating process or roll-to-roll process; wherein said layer is selected from the group consisting of a thin layer on a LED device as an active layer, a conductive layer for thermal management, and an active light absorption layer on an organic photovoltaic solar device.

20. An ink formulation comprising at least a compound according to any one of claims **1** and **13**, wherein said ink formulation is adapted for using or making a thin film on printed electronic devices.

21. The ink formulation according to claim **20**, wherein said ink formulation is adapted for fabrication of a layer by using spin coating process or roll-to-roll process; wherein said layer is selected from the group consisting of a thin layer on a LED device as an active layer, a conductive layer for thermal management, and an active light absorption layer on an organic photovoltaic solar device.

* * * * *

专利名称(译)	新型导电和光敏聚合物		
公开(公告)号	US20140353552A1	公开(公告)日	2014-12-04
申请号	US14/288397	申请日	2014-05-28
[标]申请(专利权)人(译)	纳米与先进材料研发有限公司		
申请(专利权)人(译)	纳米及先进材料研发院有限公司		
当前申请(专利权)人(译)	纳米及先进材料研发院有限公司		
[标]发明人	HO PAUL KWOK KEUNG WONG WING LEUNG		
发明人	HO, PAUL KWOK KEUNG WONG, WING LEUNG		
IPC分类号	H01L51/00 C08G61/12		
CPC分类号	H01L51/0036 H01L51/0043 C08G61/126 C08G61/123 C08G2261/143 C08G2261/1432 C08G2261/3223 C08G2261/3246 C08G2261/91 C08G2261/92 C08G2261/95 C09K11/06 C09K2211/1458 H01B1/127 H01L51/0003 H01L51/0039 H01L51/0047 H01L51/0558 H01L51/4253 Y02E10/549		
优先权	61/855965 2013-05-29 US		
其他公开文献	US9583711		
外部链接	Espacenet USPTO		

摘要(译)

本发明涉及新官能化的聚噻吩及其合成。本发明还证明新的聚噻吩及其衍生物适用于制造有机发光二极管 (OLED) , 发光二极管 (PLED) , 有机光伏器件 (OPV) 和用于印刷电子器件的导电聚合物。

