



US 20190385511A1

(19) **United States**(12) **Patent Application Publication**
T et al.(10) **Pub. No.: US 2019/0385511 A1**
(43) **Pub. Date: Dec. 19, 2019**(54) **AUTOMOTIVE GLAZING SYSTEM WITH A DISPLAY**(71) Applicant: **SAINT-GOBAIN GLASS FRANCE,**
Courbevoie (FR)(72) Inventors: **Arunvel T,** Chennai (IN); **Jyothi Latha**
Tamalpakula, Chennai (IN); **Robin J,**
Chennai (IN); **Monisha Dhanabal,**
Chennai (IN); **Samson Richardson D,**
Chennai (IN)(21) Appl. No.: **16/490,399**(22) PCT Filed: **Mar. 6, 2018**(86) PCT No.: **PCT/IN2018/050125**

§ 371 (c)(1),

(2) Date: **Aug. 30, 2019**(30) **Foreign Application Priority Data**

Mar. 7, 2017 (IN) 201741007887

Publication Classification

(51) **Int. Cl.**
G09G 3/30 (2006.01)
B32B 17/10 (2006.01)
B32B 27/08 (2006.01)
B32B 27/32 (2006.01)
B32B 27/36 (2006.01)
B32B 27/30 (2006.01)
B32B 27/40 (2006.01)
B32B 37/18 (2006.01)
B32B 38/00 (2006.01)
B60J 1/02 (2006.01)
B60J 1/00 (2006.01)


(52) **U.S. Cl.**

CPC **G09G 3/30** (2013.01); **B60K 35/00**
(2013.01); **B32B 17/10211** (2013.01); **B32B**
17/10541 (2013.01); **B32B 17/10467**
(2013.01); **B32B 17/10743** (2013.01); **B32B**
17/10761 (2013.01); **B32B 17/1077** (2013.01);
B32B 17/10788 (2013.01); **B32B 17/10889**
(2013.01); **B32B 17/10935** (2013.01); **B32B**
17/10972 (2013.01); **B32B 27/08** (2013.01);
B32B 27/32 (2013.01); **B32B 27/365**
(2013.01); **B32B 27/308** (2013.01); **B32B**
27/30 (2013.01); **B32B 27/40** (2013.01); **B32B**
27/306 (2013.01); **B32B 37/182** (2013.01);
B32B 37/185 (2013.01); **B32B 38/0012**
(2013.01); **B60J 1/02** (2013.01); **B60J 1/001**
(2013.01); **B32B 2307/422** (2013.01); **B32B**
2307/412 (2013.01); **B32B 2315/08** (2013.01);
B32B 2323/10 (2013.01); **B32B 2329/06**
(2013.01); **B32B 2331/04** (2013.01); **B32B**
2333/08 (2013.01); **B32B 2369/00** (2013.01);
B32B 2375/00 (2013.01); **B32B 2605/006**
(2013.01); **B32B 2605/08** (2013.01); **G09G**
2380/10 (2013.01); **B32B 17/10036** (2013.01)

(57)

ABSTRACT

A laminated curved article [102] comprising a first substrate [102a] consisting an outer face and a ceramic masked [104] inner face along the periphery, one or more interlayers [102c] disposed on the inner face of the first substrate [102a], a second substrate [102b] disposed on the interlayer [102c] and one or more electroluminescent devices [116] connected to connector element [126] and provided in the ceramic masked [104] inner face of the first substrate [102a] and the second substrate [102b]. The one or more electroluminescent devices [116] comprising a dielectric layer [116a] disposed on a luminescence layer [116b], wherein both the dielectric layer [116a] and luminescence layer [116b] are sandwiched together by a multilayer consisting of a conductive layer [116c], an insulating layer [116d] and a protective layer [116e].

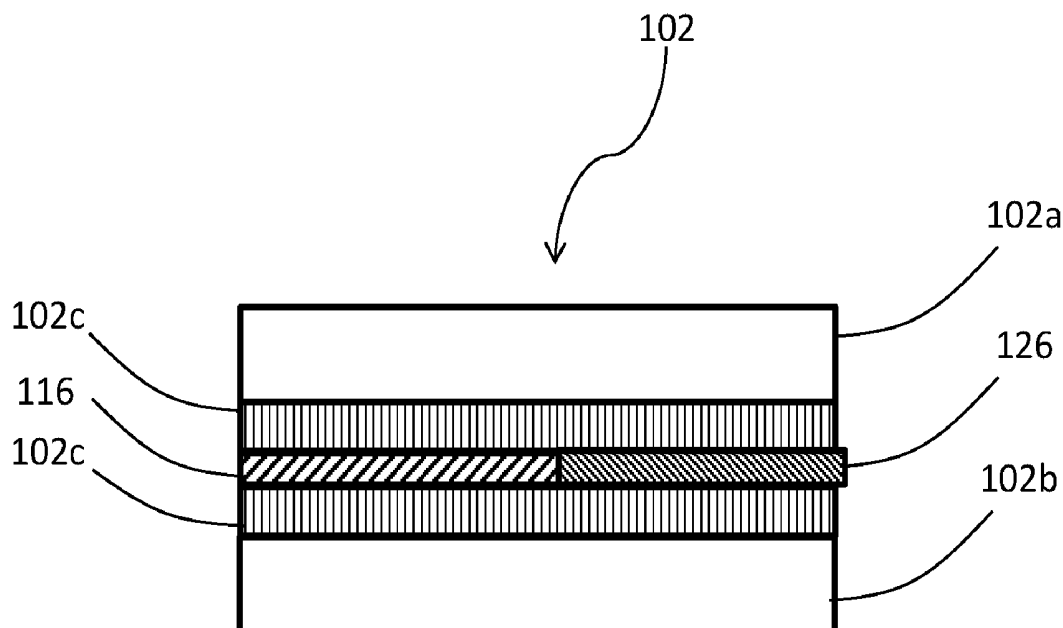

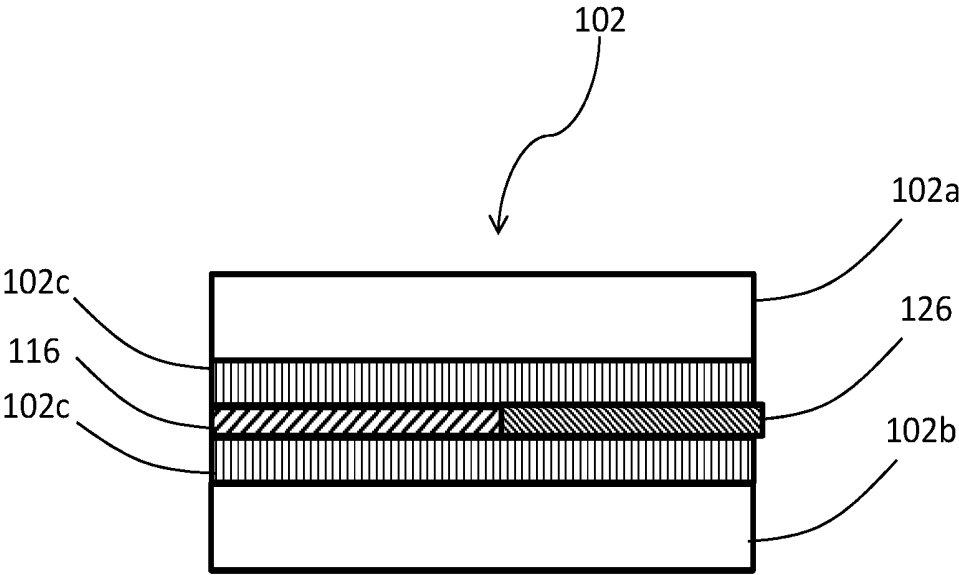


Fig. 1

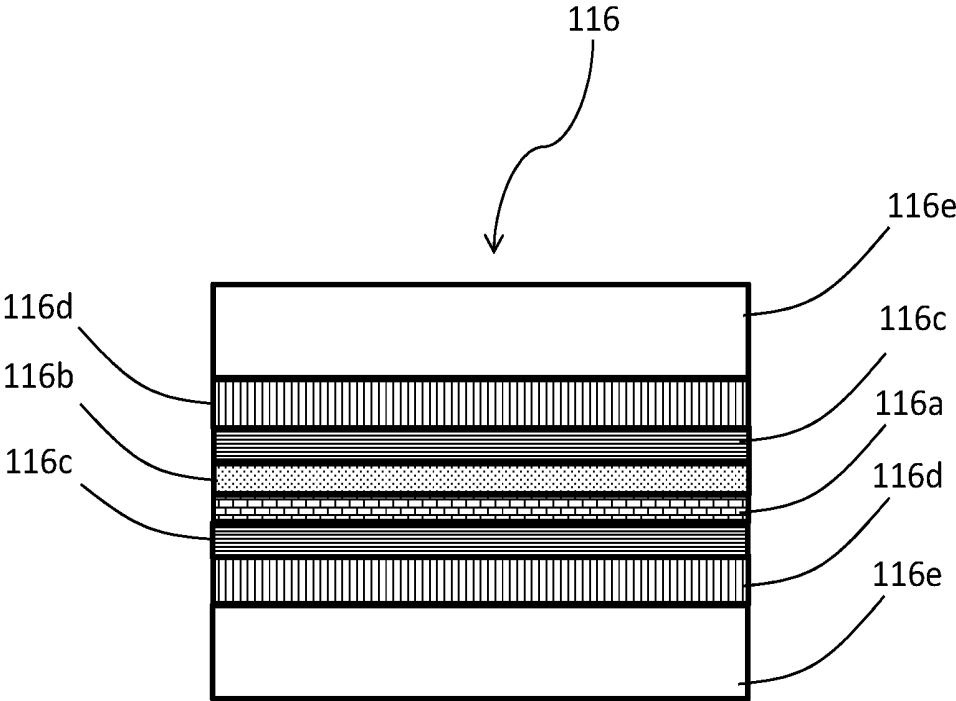


Fig. 2

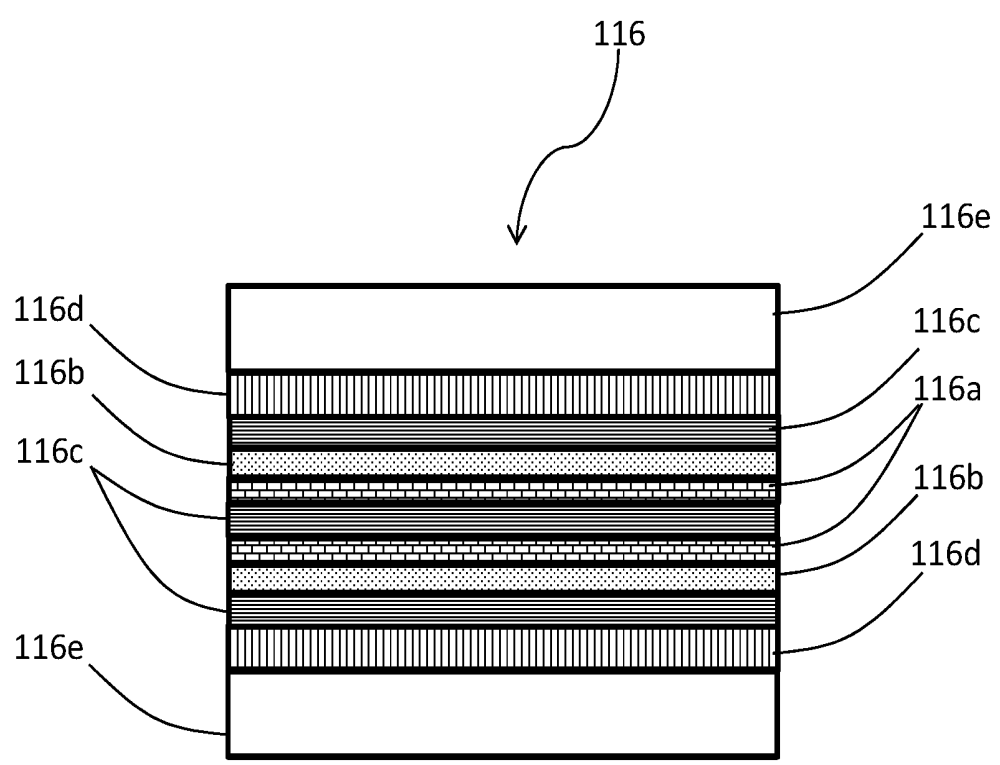


Fig. 3

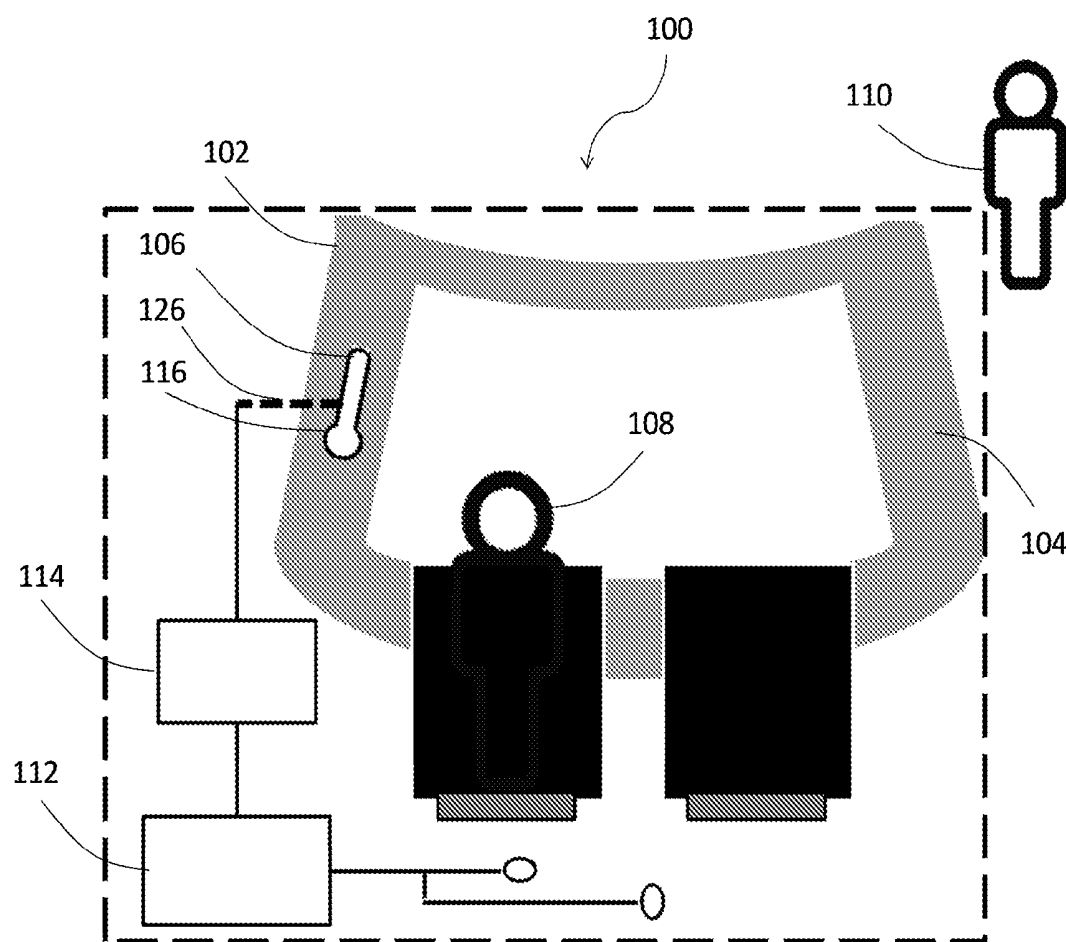


Fig. 4

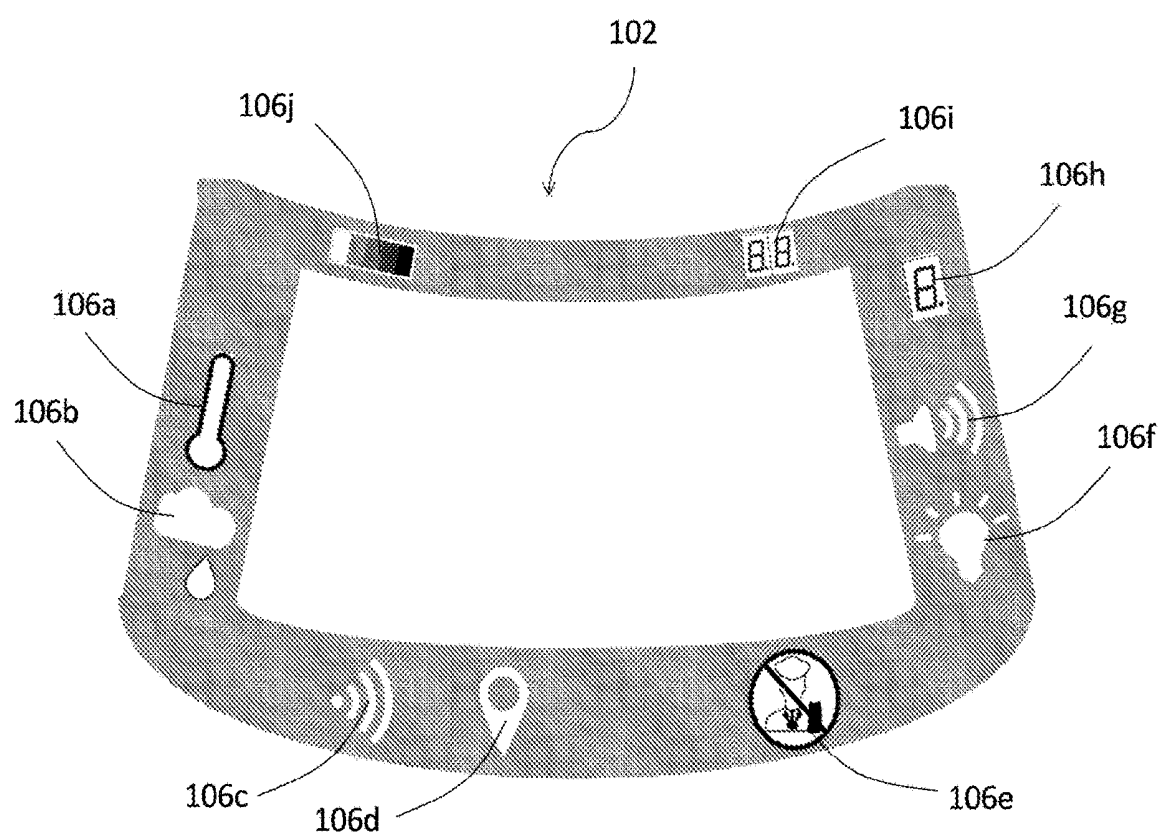


Fig. 5

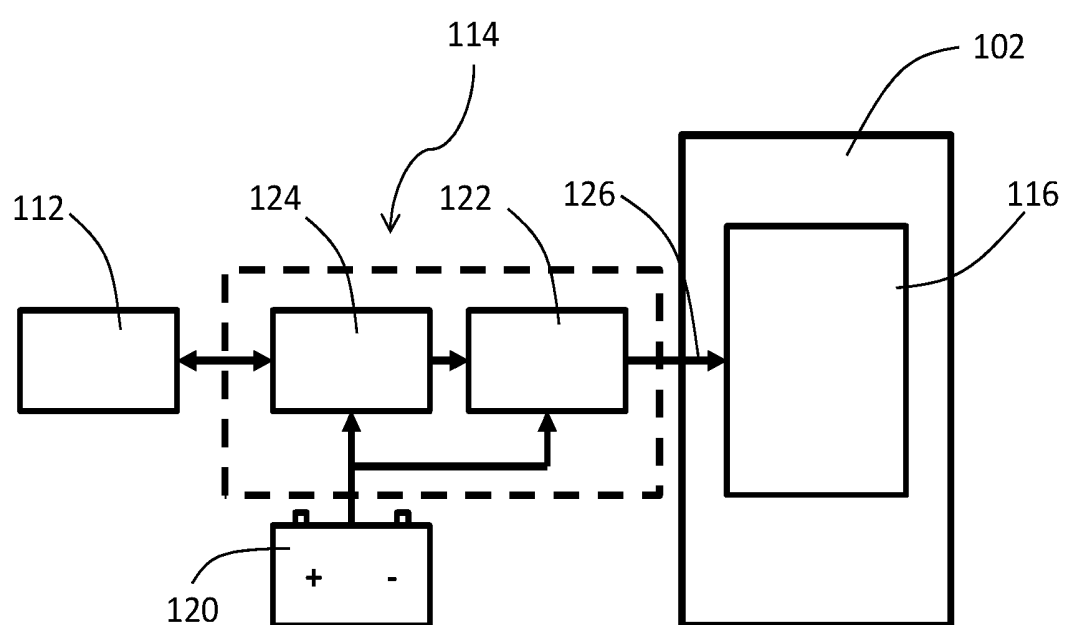


Fig. 6

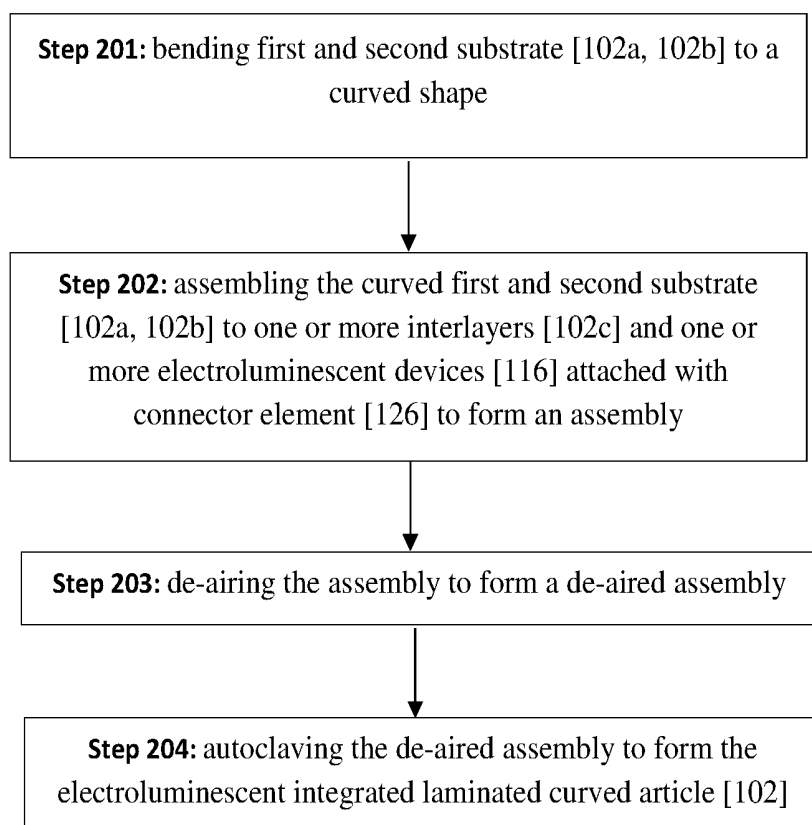


Fig. 7

AUTOMOTIVE GLAZING SYSTEM WITH A DISPLAY

TECHNICAL FIELD

[0001] The present disclosure relates generally to a laminated glass for windshield of a vehicle and in particular, to a display on the laminated glass for windshield of a vehicle.

BACKGROUND

[0002] Background description includes information that may be useful in understanding the present disclosure. It is not an admission that any of the information provided herein is prior art or relevant to the presently claimed invention, or that any publication specifically or implicitly referenced is prior art.

[0003] Automotive laminated glass or windshield comprising two sheets of rigid material such as glass sheet is already known. The glass sheets are connected together by a thermoplastic interlayer sheet usually comprising of polyvinyl butyral (PVB). Automotive laminated glass means windcreens, rear windows, side windows, opening and non-opening roofs, rear-view mirrors or protective glass for headlamps.

[0004] Automotive laminated glass is particularly designed to provide the driver a view of the forward region of the vehicle during driving and rearward region of the vehicle during reversing and other maneuvers. More recently, automobile laminated glass has shown a trend to incorporate completely new functions, such as insertion of light-emitting diodes (LEDs) into laminated glass for lighting units, indicator lights etc. Generally, the insertion of light-emitting diodes (LEDs) into automotive laminated glass allows indicator light display intended for the driver of the vehicle or the passengers or for aesthetic of the vehicle or for internal lighting. However, LEDs are sensitive to both temperature and humidity and the nature of its local environment adversely affects the performance.

[0005] A laminated glazing, which incorporates an electrical device, especially in the form of an electroluminescent device, is desirable due to longer operational lifetime than a conventional incandescent bulb or LED. The electroluminescent device display is brighter than LEDs and provides a similar surface brightness at all angles. The electroluminescent device display is monochromatic, narrow bandwidth and one can see the same from long distances. Further, the power consumption of electroluminescent device is very low and hence is an ideal solution to save power of the battery devices. The laminated glazing, which incorporates electroluminescent device, is also able to withstand elevated temperature and humidity. Additionally, the light provided by an electroluminescent device is often more diffusing than that from an incandescent bulb or LED, and provides more aesthetically pleasing lighting effect. WO2007122426 provides one example of such automobile glazing. It discloses a laminated glazing, in the form of a roof window comprising an electrical device in the form of an electroluminescent lamp integrated in the laminate construction. Further, US20160159282 provides a plurality of rectangular organic electroluminescent displays laminated in the laminated glass. However, the electroluminescent device integrated in the laminated glazing as mentioned in the above prior arts is only for lighting and/or aesthetic purpose. In addition, the above-mentioned prior arts also fail to disclose the details of

electroluminescent device. A typical electroluminescent device comprises a luminescence layer that is interleaved between two conducting layers. However, using such normal electroluminescent device have one major safety related disadvantage. Whenever there is an external impact on the laminated glazing, which is integrated with an electroluminescent device the glazing can get damaged and can shatter into sharp pieces of fine glass and also might electrocute the driver and passengers, thereby increasing the possibility of injury caused to both the driver and passengers. Such external impact may happen due to foreign objects such as a small stone, a hailstones or a windborne debris.

[0006] Hence, it would be desirable to provide a laminated glazing integrated with electroluminescent device for displaying information of interest in addition to perform the usual function of viewing the road by the driver, passenger or others as well. In addition, it is necessary to propose a vehicular display system on the automotive glazing for ease of viewing the desired information. Moreover, there is a need for an improved aesthetically pleasing automotive glazing integrated with electroluminescent layer with less processing steps. Further, there is a need to provide a laminated glazing integrated with electroluminescent device which is more safe for both the driver and the passenger in case of any cracking or chipping of the laminated glazing.

SUMMARY OF THE DISCLOSURE

[0007] One aspect of the present disclosure provides a laminated curved article comprising a first substrate consisting an outer face and a ceramic masked inner face along the periphery, one or more interlayers disposed on the inner face of the first substrate, a second substrate disposed on the interlayer and one or more electroluminescent devices connected to connector element and provided in the ceramic masked inner face of the first substrate and the second substrate. The one or more electroluminescent devices comprising a dielectric layer disposed on a luminescent layer, wherein both the dielectric layer and luminescence layer are sandwiched together by a multilayer consisting of a conductive layer, an insulating layer and a protective layer.

[0008] Another aspect of the present disclosure is to provide a display system for a vehicle comprising of one or more sensors to detect one or more conditions. The laminated curved article integrated with one or more electroluminescent devices to display one or more conditions detected by one or more sensors. The electronic circuitry connected to one or more electroluminescent devices through one or more connector elements to generate, capture and transmit signals of one or more conditions.

[0009] Another aspect of the present disclosure is to provide a method of manufacturing laminated curved article comprising firstly bending first and second substrate to a curved shape. Secondly, assembling the curved first and second substrate to one or more interlayers and one or more electroluminescent devices attached with connector element to form an assembly. Thirdly, de-airing the assembly to form a de-aired assembly. Finally, autoclaving the de-aired assembly to form the electroluminescent integrated laminated curved article.

[0010] Other features and aspects of this disclosure will be apparent from the following description and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Embodiments are illustrated by way of example and are not limited in the accompanying figures.

[0012] FIG. 1 illustrates a cross section view of a laminated curved article; according to an embodiment of the present disclosure;

[0013] FIG. 2 illustrates a cross section view of an electroluminescent device; according to an embodiment of the present disclosure;

[0014] FIG. 3 illustrates a cross section view of an alternative electroluminescent device; according to an embodiment of the present disclosure;

[0015] FIG. 4 illustrates a general scheme of a display system for a vehicle and its operation in accordance with the concept of the present disclosure;

[0016] FIG. 5 illustrates a perspective view of a laminated curved article for windshield of a vehicle; according to an embodiment of the present disclosure;

[0017] FIG. 6 illustrates a block diagram of the electronic circuitry that connects the electroluminescent devices to the sensors; according to an embodiment of the present disclosure;

[0018] FIG. 7 illustrates a flowchart of the method of manufacturing the laminated curved article; according to an embodiment of the present disclosure;

[0019] Skilled artisans appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of embodiments of the disclosure.

DETAILED DESCRIPTION

[0020] The present disclosure is now discussed in more detail referring to the drawings that accompany the present application. In the accompanying drawings, like and/or corresponding elements are referred to by like reference numbers.

[0021] Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or the like parts. The present disclosure is to provide an improved laminated glass for windshield of a vehicle incorporating other functions in addition to the usual one. The present disclosure further provides simple and low cost manufacturing and construction method of an improved laminated glass for windshield of a vehicle with new functions. Further, the present disclosure relates to laminated glass for windshield of a vehicle as an anchor for lighting device for display contained within the laminate.

[0022] FIG. 1 is a cross section view of a laminated curved article 102. A laminated curved article 102 comprises a first substrate 102a consisting an outer face and a ceramic masked 104 (not shown) inner face, one or more interlayers 102c disposed on the inner face of the first substrate 102a, a second substrate 102b disposed on the interlayer 102c and an electroluminescent device 116 connected to connector element 126 and provided in the ceramic masked 104 inner face of the first substrate 102a. The inner face of the first substrate 102a is masked with ceramic 104 (not shown) only along the periphery. The laminated curved article 102 describe herein may be utilized in vehicles such as automobiles for glazing such as windshields, windows or sidelites, mirrors. The electroluminescent device 116 is disposed

between the two interlayers 102c. The electroluminescent device 116 is placed in the ceramic masked inner face 104 (not shown) of the first substrate 102a to eliminate any degradation in performance due to exposure of UV.

[0023] In an embodiment, the first substrate 102a, the second substrate 102b or both the first and the second substrate 102a, 102b may be of glass or polymer. The polymer is polycarbonate (PC) or polypropylene (PP). Optionally, at least the first substrate 102a, the second substrate 102b or both the first and the second substrate 102a, 102b may be strengthened either chemically or thermally. The first substrate 102a, the second substrate 102b or both the first and the second substrate 102a, 102b may have a thickness of at least 0.5 mm.

[0024] In an embodiment, one or more interlayer 102c include a polymer. The interlayers 102c comprises a polymer selected from the group consisting of poly vinyl butyral (PVB), polycarbonate, acoustic PVB, ethylene vinyl acetate (EVA), thermoplastic polyurethane (TPU), ionomer, a thermoplastic material, and combinations thereof. The interlayer may have a thickness of at least 0.38 mm. Optionally, the interlayers 102c is modified to accommodate one or more electroluminescent devices 116. Generally, the interlayer 102c is modified to assemble thicker electroluminescent device 116 in the laminated curved article 102. In some instances, the interlayer 102c is modified to accommodate two electroluminescent devices 116 placed on top of each other to display on both the sides of the laminated curved article 102. The interlayer 102c is modified by either cutting, pressing, grinding, heating or combination thereof. The cutting of interlayer 102c is done manually or automatically by means of cutting fixtures. The grinding of interlayer 102c is done by means of abrasive wheel or pencil grinders which are electrically or pneumatically operated. Further, the interlayer 102c can be modified by heating. In this, the electroluminescent device 116 is disposed on the interlayer 102c by means of a hot stamping tool in which stamping is done by means of physical pressure and at a defined temperature. In some instances, the modification of interlayer 102c by heating method is also done by means of having an adhesive backing in electroluminescent device 116 along with hot stamping to ensure much higher bonding between interlayer 102c and the electroluminescent layer 116.

[0025] In an embodiment, the electroluminescent device 116 is disposed between the first substrate 102a and the second substrate 102b, or integral to one or both the first substrate 102a and the second substrate 102b, or disposed between one or more interlayers 102c, or integral to one or more interlayers 102c. FIG. 1 illustrates an electroluminescent device 116 sandwiched between the two interlayers 102c. The electroluminescent device 116 is either optically transparent, opaque or translucent. The electroluminescent device 116 comprises a material selected from the group consisting of organic or inorganic material. The electroluminescent devices 116 has the luminescence value of at least 1 Cd/m². The electroluminescent device 116 is integrated in the laminated curved article 102 by printing, depositing or patching. The electroluminescent device 116 can be directly printed onto the first or second substrate 102a, 102b or the interlayer by means of screen printing with multiple layer onto one another. The electroluminescent device 116 can also be deposited over the first or second substrate 102a, 102b directly either by physical vapor deposition coating or chemical vapor deposition coating. In some instances, the

electroluminescent device **116** can be a separate thin film patch which can be fixed by adhesive either on first or second substrate **102a**, **102b** or on the interlayer **102c**. The electroluminescent device **116** has a thickness of at least 5% of interlayer **102c** thickness. The electroluminescent device **116** has a thickness of at least 50 μm to 500 μm . The one or more electroluminescent device **116** can be of different colors.

[0026] The laminated curved article **102** can be prepared in various combinations depending on the required thickness and application. In an embodiment, one or more interlayers **102c** can be either on both sides of the electroluminescent device **116** as shown in FIG. 1 or one single interlayer **102c** on single side of electroluminescent device **116**.

[0027] In an embodiment, the connector element **126** is sandwiched between two shielding layers. The shielding layer is made of a flexible polymer. The shielding layer comprises a material selected from the group consisting of ethylene propylene rubber, polyimide and/or cross-linked polyethylene. The shielding layer is provided for maintaining the electrical, thermal and mechanical integrity of connector element **126** in case of any external impact on the laminated curved article **102** like stone impact, crashes or bumps. The connector element **126** is either completely or partially embedded in the laminated curved article **102**. The connector element **126** is integrated by printing, depositing or patching. The connector element **126** can be directly printed onto the first or second substrate **102a**, **102b** or the interlayer by means of screen printing with multiple layer onto one another. The connector element **126** can also be deposited over the first or second substrate **102a**, **102b** directly either by physical vapor deposition coating or chemical vapor deposition coating. The connector element **126** can be a separate thin film patch which is can be fixed by adhesive either on first or second substrate **102a**, **102b** or on the interlayer **102c**.

[0028] FIG. 2 is a cross section view of an electroluminescent device **116**. The electroluminescent device **116** comprising a dielectric layer **116a** disposed on a luminescence layer **116b**. The dielectric layer **116a** and luminescence layer **116b** are sandwiched together by a multilayer consisting of a conductive layer **116c**, an insulating layer **116d** and a protective layer **116e**.

[0029] FIG. 3 is an alternative cross section view of an electroluminescent device **116** which is employed when display is required on both sides of the laminated curve article **102** (not shown).

[0030] In an embodiment, the protective layer **116e** and insulating layer **116d** comprises a material selected from the group consisting of polyethylene terephthalate (PET), polyester, polyimide, epoxy resin or polyethylene naphthalate (PEN). The protective layer **116e** and insulating layer **116d** is provided for maintaining the electrical and mechanical integrity of the other functional layers such as conductive layer **116c**, dielectric layer **116a** and luminescence layer **116b** in case of any external impact on the laminated curved article **102** like stone impact, crashes or bumps.

[0031] In some instances, there can be more than one protective layer **116e** and/or insulating layer **116d**. The number of layers are selected based on the amount of insulation necessary for maintaining the electrical and mechanical integrity of the other functional layers such as conductive layer **116c**, dielectric layer **116a** and luminescence layer **116b**.

[0032] In an embodiment, the conductive layer **116c** comprises a material selected from the group consisting of metal, conductive polymers, metal grids, carbon nanotubes (CNT) layer, graphene, transparent conductive oxides or conductive oxides. The metal is selected from the group consisting of copper, aluminum, silver or platinum. The transparent conductive oxides are selected from the group consisting of zinc oxide or indium tin oxide. The conductive polymers are selected from the group consisting of polyaniline or polyindoles. In some instances, at least one conductive layer **116c** is substantially transparent.

[0033] In an embodiment, the dielectric layer **116a** comprises a material selected from the group consisting of silicon dioxide, barium titanate, lead titanate or tin dioxide.

[0034] In an embodiment, the luminescence layer **116b** comprises a material selected from the group consisting of phosphor, zinc sulphide or cadmium sulphide.

[0035] Further, optionally the conductive layer **116c**, dielectric layer **116a** and/or luminescence layer **116b** is doped. The doping helps in enhancing the required electrical properties of the layers such as improved conduction, improved charge transfers and optimize dielectric strength.

[0036] In an embodiment, optionally a reflective layer is disposed on one or more electroluminescent devices **116**. The reflective layer is utilized to improve the optical properties of the electroluminescent devices **116**. The reflective layer improves the illuminance and control the direction of lighting from the electroluminescent device **116**. The reflective layer comprise reflector grains made of glass micro spheres or a circumferential layer with high reflectance attained by silver/metallic coating. Further, in some instances adhesion promoter layer may also be disposed on electroluminescent device **116**. The adhesion promoter layer is used to enhance mechanical integrity electroluminescent device **116** integrated in the laminated curved article **102**. This helps in preventing delamination of the electroluminescent device **116** in the laminated curved article **102** and increase the adhesion with the first substrate **102a**, second substrate **102b** or the interlayer **102c**.

[0037] FIG. 4 illustrates an improved display system **100** for a vehicle herein, which is intended to perform its usual function of viewing the road by the driver and, additionally, incorporates new functions designed for displaying one or more conditions of interest for the driver of the vehicle or the passenger such as: environment-related parameters, such as: temperature, relative air humidity, air quality and others; functions relating to the use of the vehicle, such as: taximeter, location and others; driver-related functions, such as: breath alcohol analyzer (alcohol testing device), sleepiness sensor and others.

[0038] For such purpose, the display system **100** essentially comprising of sensor **112**, electroluminescent device **116** integrated in the laminated curved article **102** and electronic circuitry **114**. The sensor **112** detects or sense one or more conditions. The sensor **112** is mounted on suitable parts and/or mechanisms of the vehicle. The sensor **112** are mounted on the exterior or interior of the vehicle. The sensor **112** are designed to be responsive to the environmental conditions or stimuli outside the vehicle are mounted on the exterior suitable parts of the vehicle and those responsive to stimuli inside the vehicle, such as taximeter, are mounted in the usual interior suitable parts of the vehicle. The sensor **112** intended to be actuated by the environmental conditions or stimuli outside the vehicle are mounted on the exterior

suitable parts of the vehicle and those actuated by stimuli inside the vehicle are mounted interior suitable parts of the vehicle or others.

[0039] In an embodiment, electroluminescent device 116 integrated in the laminated curved article 102 to display condition detected by sensor 112. The electroluminescent device 116 is disposed behind the ceramic masked 104 inner face of the first substrate 102a (not shown) of the laminated curved article 102. The ceramic masking 104 is applied in the inner face of the first substrate 102a (not shown) of the laminated curved article 102 in a predetermined pattern, design or other representation 106. The electroluminescent device 116 is located behind the predetermined pattern, design or other representation 106.

[0040] In an embodiment, electronic circuitry 114 is connected to electroluminescent devices 116 through the connector element 126. The sensor 112 is connected to the electroluminescent device 116 via electronic circuitry 114. The electronic circuitry 114 generate and capture signals when one or more conditions are detected by the sensor 112 and transmits the signals to the electroluminescent device 116 to display one or more conditions detected. The electronic circuitry 114 is either wired or wireless. The electroluminescent device 116 are intended to display the signal transmitted by the electronic circuitry in the form of pattern, design or other representation 106 in the laminated curved article 102. The pattern, design or other representation 106 in the laminated curved article 102 may be seen by an observer positioned in front of the glazing 108 or back of the glazing 110. The observer position in front of the glazing 108 is either a passenger or a driver.

[0041] FIG. 5 illustrates a laminated curved article 102 for windshield of a vehicle displaying one or more conditions indicated in the form of pattern, design or other representation 106. The laminated curved article 102 displays pattern, design or other representation 106a to 106j corresponding to the one or more conditions of interest to the driver, passenger or others as well. The one or more sensors 112 (not shown) detect one or more conditions. The one or more sensors 112 (not shown) are specific for the functions to which they are intended: sensors responsive to the environment temperature sensor, relative air humidity sensor, Wi-fi strength, location, breathe analyzer (alcohol testing device), illuminance sensor, acoustic sensor, sensors for the function of taximeter, occupancy level sensor, air quality sensor and others. The laminated curved article 102 indicates one or more conditions detected by one or more sensors 112 and displayed by one or more electroluminescent devices 116 in the of characters or designs such as temperature 106a, relative humidity 106b, Wi-fi strength 106c, location 106d, alcohol level 106e, illuminance 106f, noise level 106g, taximeter 106h, occupancy number 106i and air quality 106j.

[0042] FIG. 6 illustrates the electronic circuitry 114 comprising of a controller unit 124, a driver unit 122 and a power unit 120. The controller unit 124 receives and process signal of one or more conditions detected by the sensor 112. The controller unit 124 can also vary the voltage from as high as 120 volts to as low as 20 volts. The driver unit 122 input the signals received from the controller unit 124 into the electroluminescent device 116. The power unit 120 provide power to both the electroluminescent devices 116 and sensor 112. The electronic circuitry 114 connects the sensor 112 to the electroluminescent device 116. Further, the electronic

circuitry 114 also powers the sensor 112 and the electroluminescent device 116. The controller unit 124 receives and processes signals from the sensors 112 and transmits them to the driver unit 122 which powers the electroluminescent devices 116 to displays one or more conditions in laminated curved article 102 of the vehicle. The power unit 120 is a battery. In some instances, DC supply is converted to AC output by means of a convertor which is connected to power unit 120. In case of DC type electroluminescent device 116 the need of the convertor can be eliminated and can be directly connected to the power unit 120.

[0043] In an embodiment, the electronic circuitry 114 is switched ON/OFF by the vehicle ignition switch. The sensor 112 along with the electronic circuitry 114 may be individually switched ON/OFF by an additional switch placed within the vehicle to reduce the power consumption and based on requirement for real time monitoring. The electronic circuitry 114 is located in any suitable part or mechanism of the vehicle and not limited to the dash board of the vehicle.

[0044] In an embodiment, a method to display one or more conditions, comprising of firstly sensing one or more conditions by sensor 112. Secondly, receiving and processing the signals by electronic circuitry 114. Finally, inputting the signals by electronic circuitry 114 to electroluminescent device 116 integrated in the laminated curved article 102.

[0045] FIG. 7 illustrates the flowchart for a method of manufacturing an electroluminescent device 116 integrated laminated curved article 102. Step 201 includes bending first and second substrate 102a, 102b to a curved shape. Step 202 includes assembling the curved first and second substrate 102a, 102b to one or more interlayers 102c and one or more electroluminescent devices 116 attached with connector element 126 to form an assembly. Step 203 includes de-airing the assembly to form a de-aired assembly. De-airing is a crucial step in formation of laminated curved article 102. The assembly is kept under vacuum and is heat treated to remove air trapped in between the assembly. During de-airing process the entrapped air between the substrates 102a, 102b, interlayers 102c and electroluminescent device 116 along with connector element 126 is removed to create preliminary adhesion. The de-airing is done by means of having a rubber ring or vacuum rubber bag which seals the complete edges of the assembly. The ring is designed to 95% of the actual assembly circumference and further to accommodate in case the connector element 126 is partially extended portion to avoid leakage of air. The suction takes place by removing the air which is entrapped in between the assembly. The ring has one exit hose through which the air is removed. After the de-airing step the assembly is substantially transparent. If there is cloudiness in the assembly, then it means that air is trapped between the assembly. Alternatively, the interlayer layer 120c is provided with pores (pin holes) for volatiles to escape during the de-airing process. The de-airing is carried out at temperature of at least 90° C. and negative pressure of at least 1 bar for time of at least 30 minutes. Step 204 includes autoclaving the de-aired assembly to form the electroluminescent device 116 integrated laminated curved article 102. The autoclaving process creates the final adhesion of the assembly to form the laminated curved article 102. The autoclaving is carried out at temperature of at least 90° C. and pressure of at least 3 bar for time of at least 30 minutes.

[0046] In an embodiment, optionally one or more electroluminescent devices 116 can be first disposed on the first

substrate **102a**, second substrate **102b** or one or more interlayers **102c** before bending. In some instances, optionally one or more interlayers **102c** can be modified for accommodating one or more electroluminescent devices **116**.

INDUSTRIAL APPLICABILITY

[0047] In an embodiment, an alcohol detection display system for a vehicle is disclosed. An alcohol display system was installed in a vehicle windshield to provide real time information regarding alcohol consumption by the driver. The alcohol display system was provided with sensors for detecting alcohol concentration using breathe sensor and displaying measured result as alcohol concentration of the driver using one or more electroluminescent devices embedded in the ceramic masking region of the first substrate of the windshield. The electroluminescent devices of different colors were integrated for displaying different levels of alcohol detected. The sensor was calibrated to detect three different levels i.e no alcohol (or 0), alcohol concentration within permissible limits ($<0.03\%$) and alcohol concentration beyond permissible limit ($>0.03\%$). An algorithm was made in order to display three levels of alcohol concentration pertaining to three different electroluminescent device colors. The electroluminescent devices display various levels such as green (for 0), orange (within permissible limits) and red (above permissible limits) as shown in Table 1. The alcohol sensor (breathe sensor) was mounted on the suitable vehicle parts or mechanisms such as vehicle key holder or dashboard. As soon as the driver seated on the vehicle, the alcohol measuring breathe sensor measured the alcohol concentration of the breath. Afterwards, the electronic circuitry captured and converted the alcohol concentration sensed by the sensor into the electronic information and transmit it to the electroluminescent device to display the concentration in the form of colors in the laminated curved article or windshield. From the data provided, it is obvious that the driver got into the car and started from position A with no traces of alcohol. The electroluminescent device displayed green color in the windshield indicating that the driver had no traces of alcohol at position A. The driver stopped at position B and consumed some amount of alcohol. The alcohol sensor detected certain level of alcohol, however it was within permissible level and electroluminescent device displayed orange color in the windshield. After some time, the driver stopped at position C and again consumed some additional amount of alcohol. The breath sensor detected higher levels of alcohol level, which is outside the permissible level. The electroluminescent device displayed red color in the windshield indicating the driver is not suitable to proceed further from position C.

TABLE 1

Electroluminescent device display at different alcohol levels at different positions.					
Electroluminescent device Output (Glow)					
Position	Level 1	Level 2	Level 3	Alcohol level	Driver State
A	Green			Alcohol % = 0	No traces of alcohol

TABLE 1-continued

Electroluminescent device display at different alcohol levels at different positions.					
Electroluminescent device Output (Glow)					
Position	Level 1	Level 2	Level 3	Alcohol level	Driver State
B	Green	Orange		Alcohol % < 0.03	Traces of alcohol but permissible
C	Green	Orange	Red	Alcohol % > 0.03	Traces of alcohol, but outside permissible levels

[0048] According to the basic construction described above, the display system **100** and laminated curved article **102** of the present invention may be subject to changes in materials, dimensions, constructive details and/or functional and/or ornamental configuration without departing from the scope of the protection claimed.

[0049] Note that not all of the activities described above in the general description or the examples are required, that a portion of a specific activity may not be required, and that one or more further activities may be performed in addition to those described. Still further, the order in which activities are listed is not necessarily the order in which they are performed.

[0050] Benefits, other advantages, and solutions to problems have been described above with regard to specific embodiments. However, the benefits, advantages, solutions to problems, and any feature(s) that may cause any benefit, advantage, or solution to occur or become more pronounced are not to be construed as a critical, required, or essential feature of any or all the claims.

[0051] The specification and illustrations of the embodiments described herein are intended to provide a general understanding of the structure of the various embodiments. The specification and illustrations are not intended to serve as an exhaustive and comprehensive description of all of the elements and features of apparatus and systems that use the structures or methods described herein. Certain features, that are for clarity, described herein in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features that are, for brevity, described in the context of a single embodiment, may also be provided separately or in a sub combination. Further, reference to values stated in ranges includes each and every value within that range. Many other embodiments may be apparent to skilled artisans only after reading this specification. Other embodiments may be used and derived from the disclosure, such that a structural substitution, logical substitution, or another change may be made without departing from the scope of the disclosure. Accordingly, the disclosure is to be regarded as illustrative rather than restrictive.

[0052] The description in combination with the figures is provided to assist in understanding the teachings disclosed herein, is provided to assist in describing the teachings, and should not be interpreted as a limitation on the scope or applicability of the teachings. However, other teachings can certainly be used in this application.

[0053] As used herein, the terms “comprises,” “comprising,” “includes,” “including,” “has,” “having” or any other variation thereof, are intended to cover a non-exclusive inclusion. For example, a method, article, or apparatus that comprises a list of features is not necessarily limited only to those features but may include other features not expressly listed or inherent to such method, article, or apparatus. Further, unless expressly stated to the contrary, “or” refers to an inclusive-or and not to an exclusive-or. For example, a condition A or B is satisfied by any one of the following: A is true (or present) and B is false (or not present), A is false (or not present) and B is true (or present), and both A and B are true (or present).

[0054] Also, the use of “a” or “an” is employed to describe elements and components described herein. This is done merely for convenience and to give a general sense of the scope of the invention. This description should be read to include one or at least one and the singular also includes the plural, or vice versa, unless it is clear that it is meant otherwise. For example, when a single item is described herein, more than one item may be used in place of a single item. Similarly, where more than one item is described herein, a single item may be substituted for that more than one item.

[0055] Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. The materials, methods, and examples are illustrative only and not intended to be limiting. To the extent that certain details regarding specific materials and processing acts are not described, such details may include conventional approaches, which may be found in reference books and other sources within the manufacturing arts.

[0056] While aspects of the present disclosure have been particularly shown and described with reference to the embodiments above, it will be understood by those skilled in the art that various additional embodiments may be contemplated by the modification of the disclosed machines, systems and methods without departing from the spirit and scope of what is disclosed. Such embodiments should be understood to fall within the scope of the present disclosure as determined based upon the claims and any equivalents thereof.

LIST OF ELEMENTS

[0057] 100 Display system
[0058] 102 Laminated curved article
[0059] 102a First substrate
[0060] 102b Second substrate
[0061] 102c Interlayer
[0062] 104 Ceramic masking
[0063] 106 Pattern
[0064] 106a Temperature
[0065] 106b Relative humidity
[0066] 106c Wi-fi strength
[0067] 106d Location
[0068] 106e Alcohol level
[0069] 106f Illuminance
[0070] 106g Noise level
[0071] 106h Taximeter
[0072] 106i Occupancy number
[0073] 106j Air quality
[0074] 108 Observer positioned in front of the glazing
[0075] 110 Observer positioned on back of the glazing

[0076] 112 Sensor
[0077] 114 Electronic circuitry
[0078] 116 Electroluminescent device
[0079] 116a Dielectric layer
[0080] 116b Luminescent layer
[0081] 116c Conductive layer
[0082] 116d Insulating layer
[0083] 116e Protective layer
[0084] 120 Power unit
[0085] 122 Driver unit
[0086] 124 Controller unit
[0087] 126 Connector element

1-35. (canceled)

36. A laminated glass for windshield of a vehicle comprising:

a first substrate comprising an outer face and a ceramic masked inner face along the periphery;
 one or more interlayers disposed on the inner face of the first substrate; and

a second substrate disposed on the interlayer;

wherein one or more electroluminescent devices are connected to a connector element and provided in the ceramic masked inner face of the first substrate and the second substrate between one or more interlayers;

wherein the electroluminescent devices is connected to an electronic circuitry that enables display of luminous indicators and patterns on the windshield.

37. The laminated glass for windshield of a vehicle as claimed in claim 36, wherein one or both the first substrate and second substrate is a glass or a polymer.

38. The laminated glass for windshield of a vehicle as claimed in claim 37, wherein the polymer is polycarbonate (PC) or polypropylene (PP).

39. The laminated glass for windshield of a vehicle as claimed in claim 36, wherein one or more interlayers comprises a polymer selected from the group consisting of poly vinyl butyral (PVB), polycarbonate, acoustic PVB, ethylene vinyl acetate (EVA), thermoplastic polyurethane (TPU), ionomer, a thermoplastic material, and combinations thereof.

40. The laminated glass for windshield of a vehicle as claimed in claim 36, wherein one or more interlayers has a thickness of at least 0.38 mm.

41. The laminated glass for windshield of a vehicle as claimed in claim 36, wherein one or more interlayer is modified by a method selected from the group consisting of cutting, pressing, grinding, heating or combination thereof.

42. The laminated glass for windshield of a vehicle as claimed in claim 36, wherein one or more electroluminescent devices are optically transparent, opaque or translucent.

43. The laminated glass for windshield of a vehicle as claimed in claim 36, wherein one or more electroluminescent devices and connector element is integrated in the laminated glass by printing, depositing or other suitable methods.

44. The laminated glass for windshield of a vehicle as claimed in claim 36, wherein one or more electroluminescent devices has a thickness of at least 50 μm to 500 μm.

45. The laminated glass for windshield of a vehicle as claimed in claim 36, wherein the electroluminescent devices comprises a dielectric layer disposed on a luminescence layer, wherein both the dielectric layer and the luminescence layer are sandwiched by a multilayer consisting of a conductive layer, an insulating layer and a protective layer.

46. The laminated glass for windshield of a vehicle as claimed in claim **36**, wherein the protective layer and insulating layer comprises a material selected from the group consisting of polyethylene terephthalate (PET), polyester, polyimide, epoxy resin or polyethylene naphthalate (PEN).

47. The laminated glass for windshield of a vehicle as claimed in claim **36**, wherein the conductive layer comprises a material selected from the group consisting of metal, conductive polymers, metal grids, carbon nanotubes (CNT) layer, graphene, transparent conductive oxides or conductive oxides.

48. The laminated glass for windshield of a vehicle as claimed in claim **47**, wherein the transparent conductive oxides are selected from the group consisting of zinc oxide or indium tin oxide.

49. The laminated glass for windshield of a vehicle as claimed in claim **47**, wherein the conductive polymers are selected from the group consisting of polyaniline or polyindoles.

50. The laminated glass for windshield of a vehicle as claimed in claim **36**, wherein the dielectric layer comprises a material selected from the group consisting of silicon dioxide, barium titanate, lead titanate or tin dioxide.

51. The laminated glass for windshield of a vehicle as claimed in claim **36**, wherein the luminescence layer comprises a material selected from the group consisting of phosphor, zinc sulphide or cadmium sulphide.

52. The laminated glass for windshield of a vehicle as claimed in claim **36**, wherein at least one conductive layer is substantially transparent.

53. The laminated glass for windshield of a vehicle as claimed in claim **36**, wherein optionally the conductive layer, dielectric layer and/or luminescence layer is doped.

54. The laminated glass for windshield of a vehicle as claimed in claim **36**, wherein optionally an adhesion promoter layer is disposed on one or more electroluminescent devices.

55. The laminated glass for windshield of a vehicle as claimed in claim **36**, wherein the connector element is sandwiched between a shielding layer.

56. The laminated glass for windshield of a vehicle as claimed in claim **55**, wherein the shielding layer comprises a material selected from the group consisting of ethylene propylene rubber, polyimide and/or cross-linked polyethylene.

57. The laminated glass for windshield of a vehicle as claimed in claim **36**, communicates with one or more sensors mounted on the vehicle to receive data therefrom.

58. A display system for displaying data on the windshield of a vehicle comprising:

a laminated glass;

one or more electroluminescent devices integrated in the laminated glass; and

an electronic circuitry comprising a controller unit, a driver unit and a power unit, wherein the electronic circuitry is connected to one or more electroluminescent devices through one or more connector elements to receive data from one or more sensors, and wherein the electronic circuitry is configured to control the one or more electroluminescent devices to display the data on the laminated glass.

59. A method of manufacturing a laminated glass as claimed in claim **36** comprising:

bending first and second substrate to a curved shape;

assembling the curved first and second substrate to one or more interlayers and one or more electroluminescent devices attached with connector element to form an assembly;

de-airing the assembly to form a de-aired assembly; and autoclaving the de-aired assembly to form the electroluminescent integrated laminated curved article.

60. The method of manufacturing a laminated glass as claimed in claim **59**, comprising optionally disposing one or more electroluminescent devices on the first substrate, second substrate or one or more interlayers before bending.

61. The method of manufacturing a laminated glass as claimed in claim **59**, optionally modifying one or more interlayers for accommodating one or more electroluminescent devices.

62. The method of manufacturing a laminated glass as claimed in claim **59**, wherein the de-airing is carried out at temperature of at least 90° C. and negative pressure of at least 1 bar for time of at least 30 minutes.

63. The method of manufacturing a laminated glass as claimed in claim **59**, wherein the autoclaving is carried out at temperature of at least 90° C. and pressure of at least 3 bar for time of at least 30 minutes.

* * * * *

专利名称(译)	带显示器的汽车玻璃系统		
公开(公告)号	US2019038551A1	公开(公告)日	2019-12-19
申请号	US16/490399	申请日	2018-03-06
[标]申请(专利权)人(译)	法国圣戈本玻璃公司		
申请(专利权)人(译)	SAINT-GOBAIN GLASS FRANCE		
当前申请(专利权)人(译)	SAINT-GOBAIN GLASS FRANCE		
[标]发明人	T ARUNVEL DHANABAL MONISHA D SAMSON RICHARDSON		
发明人	T, ARUNVEL TAMALPAKULA, JYOTHI LATHA J, ROBIN DHANABAL, MONISHA D, SAMSON RICHARDSON		
IPC分类号	G09G3/30 B32B17/10 B32B27/08 B32B27/32 B32B27/36 B32B27/30 B32B27/40 B32B37/18 B32B38/00 B60J1/02 B60J1/00		
CPC分类号	B32B27/08 B32B2307/422 B60J1/02 B32B2307/412 G09G3/30 B32B2333/08 B32B2331/04 B32B17/10972 B32B2605/006 B32B17/10467 B32B17/1077 B32B27/30 B32B17/10541 G09G2380/10 B32B2329/06 B32B17/10788 B32B37/185 B32B2369/00 B32B2375/00 B32B2323/10 B32B17/10036 B32B2315/08 B32B17/10889 B32B37/182 B32B27/40 B32B2605/08 B32B17/10743 B60K35/00 B32B17/10935 B32B27/306 B32B38/0012 B60J1/001 B32B27/308 B32B17/10761 B32B27/32 B32B17/10211 B32B27/365 H05B33/145 B32B17/10 B32B2367/00		
优先权	201741007887 2017-03-07 IN		
外部链接	Espacenet USPTO		

摘要(译)

层压弯曲制品[102]，其包括：第一基板[102一种]，该第一基板[000000002] [一种]包括外表面和沿其周边的陶瓷蒙版[[104]]内表面，一个或多个中间层[102 C) 设置在第一基板[102 一种的内表面上)，第二基板[102 b]设置在中间层[102 C]上和一个或多个电致发光器件[116连接至连接器元件[126]，并设置在第一基板[102 一种]和第二基板[102 b]的陶瓷掩膜的 (104) 内表面中。 。 一个或多个电致发光器件[116]包括设置在发光层[116 b]上的介电层[116 一种]，其中两个介电层[116 一种] 发光层[116 b]被由导电层[116 C]，绝缘层[116 d]和保护层[116]构成的多层夹在中间。 e]。

