



US 20200168812A1

(19) **United States**(12) **Patent Application Publication**
Wolohan et al.(10) **Pub. No.: US 2020/0168812 A1**(43) **Pub. Date: May 28, 2020**(54) **HOST MATERIALS FOR
ELECTROLUMINESCENT DEVICES**(57) **ABSTRACT**

A compound of Formula I:


Formula I

(71) Applicant: **UNIVERSAL DISPLAY
CORPORATION**, Ewing, NJ (US)(72) Inventors: **Peter Wolohan**, Princeton, NJ (US);
Tyler Fleetham, Newtown, PA (US);
Jason Brooks, Ewing, NJ (US); **Rasha
Hamze**, Ewing, NJ (US); **Nicholas J.
Thompson**, Hamilton, NJ (US)(21) Appl. No.: **16/683,507**(22) Filed: **Nov. 14, 2019****Related U.S. Application Data**

(60) Provisional application No. 62/772,403, filed on Nov. 28, 2018.

Publication Classification

- (51) **Int. Cl.**
H01L 51/00 (2006.01)
C09K 11/02 (2006.01)
C09K 11/06 (2006.01)
C07D 403/14 (2006.01)
- (52) **U.S. Cl.**
 CPC **H01L 51/0072** (2013.01); **C09K 11/02**
 (2013.01); **C09K 11/06** (2013.01); **C07D**
403/14 (2013.01); **H01L 51/5016** (2013.01);
C09K 2211/185 (2013.01); **C09K 2211/1029**
 (2013.01); **C09K 2211/1044** (2013.01); **C09K**
2211/1007 (2013.01); **H01L 51/0067** (2013.01)

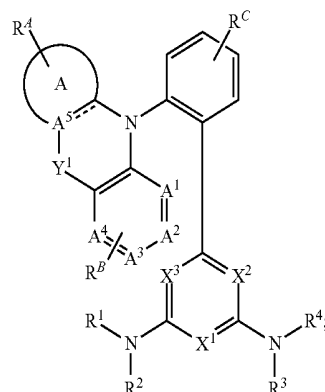


wherein ring A is a 5-membered or 6-membered aromatic ring;

wherein R^A, R^B, and R^C each independently represent mono to the maximum allowable substitution, or no substitution;wherein Y¹ is absent or present, and when present is selected from the group consisting of a direct bond, O, S, Se, CRR', NR, SiRR', and BR;wherein each X¹-X³ is N or CR;wherein at least one of X¹-X³ is N;wherein each A¹-A⁵ is independently C or N;

wherein the maximum number of N atoms that can connect to each other within each ring is two;

wherein each R¹, R², R³, and R⁴ is independently selected from the group consisting of alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, aryl, heteroaryl, and combinations thereof;wherein each R, R', R^A, R^B, and R^C is independently a hydrogen or a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acid, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and

wherein any two substituents may be joined or fused together to form a ring.

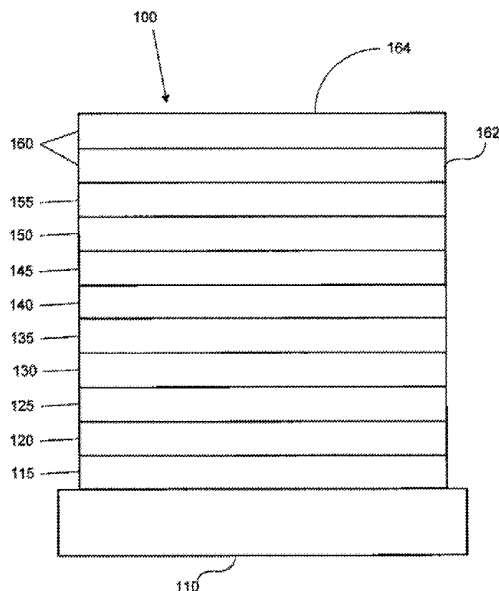

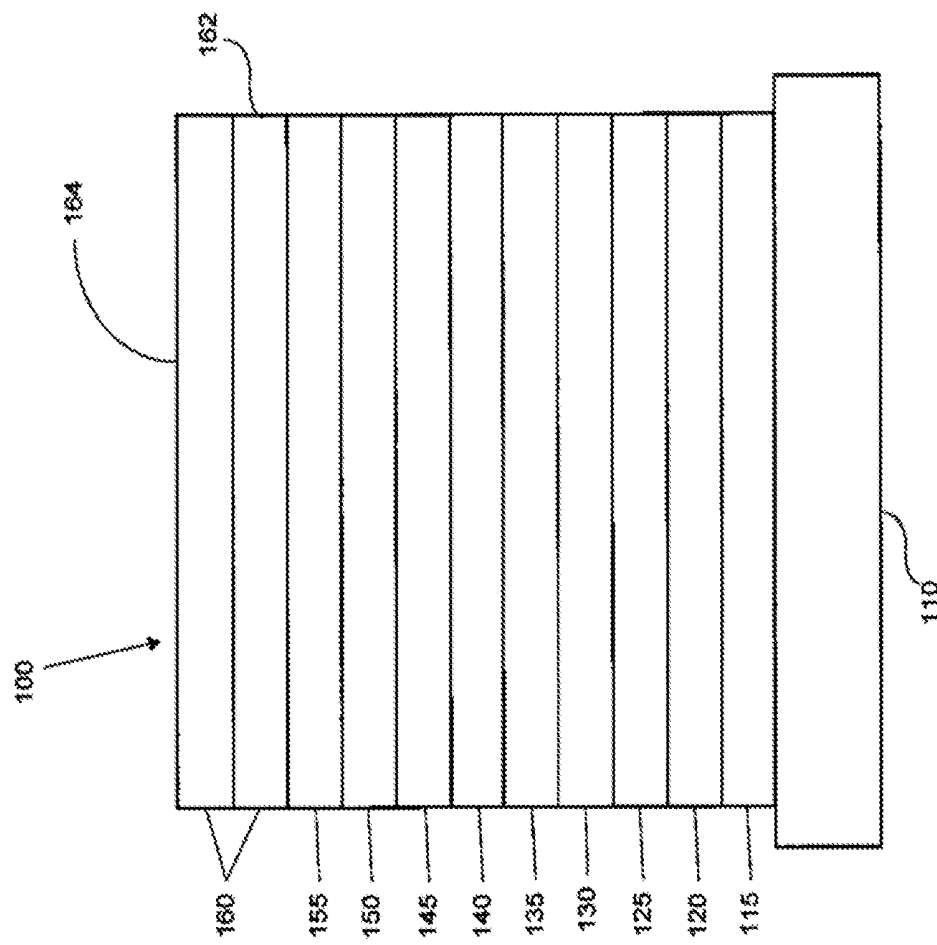


Figure 1

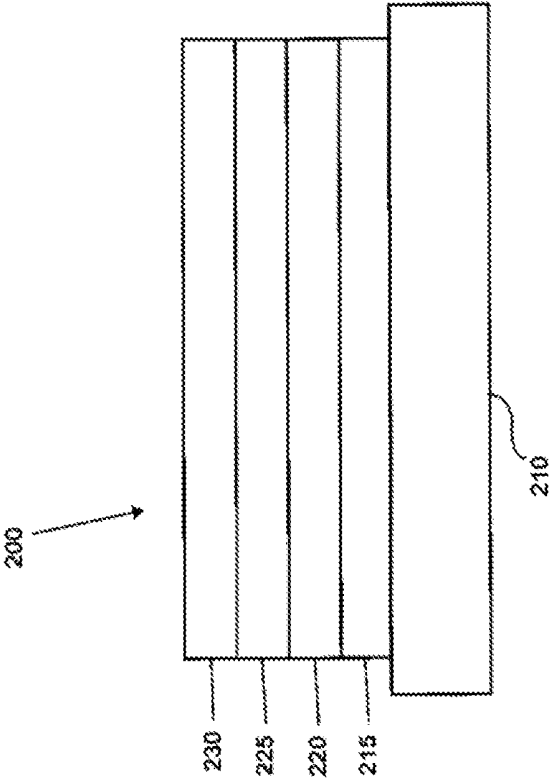


Figure 2

HOST MATERIALS FOR ELECTROLUMINESCENT DEVICES

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Application No. 62/772,403, filed Nov. 28, 2018, the entire contents of which are incorporated herein by reference.

FIELD

[0002] The present invention relates to compounds for use as hosts and devices, such as organic light emitting diodes, including the same.


BACKGROUND

[0003] Opto-electronic devices that make use of organic materials are becoming increasingly desirable for a number of reasons. Many of the materials used to make such devices are relatively inexpensive, so organic opto-electronic devices have the potential for cost advantages over inorganic devices. In addition, the inherent properties of organic materials, such as their flexibility, may make them well suited for particular applications such as fabrication on a flexible substrate. Examples of organic opto-electronic devices include organic light emitting diodes/devices (OLEDs), organic phototransistors, organic photovoltaic cells, and organic photodetectors. For OLEDs, the organic materials may have performance advantages over conventional materials. For example, the wavelength at which an organic emissive layer emits light may generally be readily tuned with appropriate dopants.

[0004] OLEDs make use of thin organic films that emit light when voltage is applied across the device. OLEDs are becoming an increasingly interesting technology for use in applications such as flat panel displays, illumination, and backlighting. Several OLED materials and configurations are described in U.S. Pat. Nos. 5,844,363, 6,303,238, and 5,707,745, which are incorporated herein by reference in their entirety.

[0005] One application for phosphorescent emissive molecules is a full color display. Industry standards for such a display call for pixels adapted to emit particular colors, referred to as “saturated” colors. In particular, these standards call for saturated red, green, and blue pixels. Alternatively the OLED can be designed to emit white light. In conventional liquid crystal displays emission from a white backlight is filtered using absorption filters to produce red, green and blue emission. The same technique can also be used with OLEDs. The white OLED can be either a single EML device or a stack structure. Color may be measured using CIE coordinates, which are well known to the art.

[0006] One example of a green emissive molecule is tris(2-phenylpyridine) iridium, denoted Ir(ppy)₃, which has the following structure:



[0007] In this, and later figures herein, we depict the dative bond from nitrogen to metal (here, Ir) as a straight line.

[0008] As used herein, the term “organic” includes polymeric materials as well as small molecule organic materials that may be used to fabricate organic opto-electronic devices. “Small molecule” refers to any organic material that is not a polymer, and “small molecules” may actually be quite large. Small molecules may include repeat units in some circumstances. For example, using a long chain alkyl group as a substituent does not remove a molecule from the “small molecule” class. Small molecules may also be incorporated into polymers, for example as a pendent group on a polymer backbone or as a part of the backbone. Small molecules may also serve as the core moiety of a dendrimer, which consists of a series of chemical shells built on the core moiety. The core moiety of a dendrimer may be a fluorescent or phosphorescent small molecule emitter. A dendrimer may be a “small molecule,” and it is believed that all dendrimers currently used in the field of OLEDs are small molecules.

[0009] As used herein, “top” means furthest away from the substrate, while “bottom” means closest to the substrate. Where a first layer is described as “disposed over” a second layer, the first layer is disposed further away from substrate. There may be other layers between the first and second layer, unless it is specified that the first layer is “in contact with” the second layer. For example, a cathode may be described as “disposed over” an anode, even though there are various organic layers in between.

[0010] As used herein, “solution processable” means capable of being dissolved, dispersed, or transported in and/or deposited from a liquid medium, either in solution or suspension form.

[0011] A ligand may be referred to as “photoactive” when it is believed that the ligand directly contributes to the photoactive properties of an emissive material. A ligand may be referred to as “ancillary” when it is believed that the ligand does not contribute to the photoactive properties of an emissive material, although an ancillary ligand may alter the properties of a photoactive ligand.

[0012] As used herein, and as would be generally understood by one skilled in the art, a first “Highest Occupied Molecular Orbital” (HOMO) or “Lowest Unoccupied Molecular Orbital” (LUMO) energy level is “greater than” or “higher than” a second HOMO or LUMO energy level if the first energy level is closer to the vacuum energy level. Since ionization potentials (IP) are measured as a negative energy relative to a vacuum level, a higher HOMO energy level corresponds to an IP having a smaller absolute value (an IP that is less negative). Similarly, a higher LUMO energy level corresponds to an electron affinity (EA) having a smaller absolute value (an EA that is less negative). On a conventional energy level diagram, with the vacuum level at


the top, the LUMO energy level of a material is higher than the HOMO energy level of the same material. A “higher” HOMO or LUMO energy level appears closer to the top of such a diagram than a “lower” HOMO or LUMO energy level.

[0013] As used herein, and as would be generally understood by one skilled in the art, a first work function is “greater than” or “higher than” a second work function if the first work function has a higher absolute value. Because work functions are generally measured as negative numbers relative to vacuum level, this means that a “higher” work function is more negative. On a conventional energy level diagram, with the vacuum level at the top, a “higher” work function is illustrated as further away from the vacuum level in the downward direction. Thus, the definitions of HOMO and LUMO energy levels follow a different convention than work functions.

[0014] More details on OLEDs, and the definitions described above, can be found in U.S. Pat. No. 7,279,704, which is incorporated herein by reference in its entirety.

SUMMARY

[0015] A compound of Formula I:

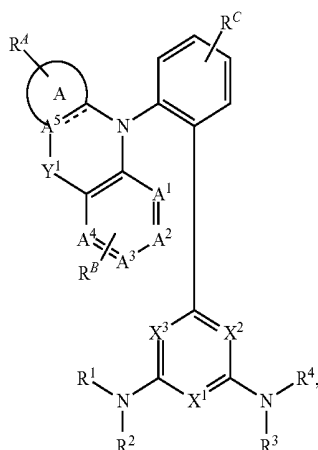

Formula I

[0016] wherein ring A is a 5-membered or 6-membered aromatic ring;

[0017] wherein R^A , R^B , and R^C each independently represent mono to the maximum allowable substitution, or no substitution;

[0018] wherein Y^1 is absent or present, and when present is selected from the group consisting of a direct bond, O, S, Se, CRR', NR, SiRR', and BR;

[0019] wherein each X^1 - X^3 is N or CR;

[0020] wherein at least one of X - X^3 is N;

[0021] wherein each A^1 - A^5 is independently C or N;

[0022] wherein the maximum number of N atoms that can connect to each other within each ring is two;

[0023] wherein each R^1 , R^2 , R^3 , and R^4 is independently selected from the group consisting of alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, aryl, heteroaryl, and combinations thereof;

[0024] wherein each R, R^1 , R^A , R^B , and R^C is independently a hydrogen or a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy,

amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acid, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and

[0025] wherein any two substituents may be joined or fused together to form a ring.

[0026] An OLED comprising the compound of the present disclosure in an organic layer therein is also disclosed.

[0027] A consumer product comprising the OLED is also disclosed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] FIG. 1 shows an organic light emitting device.

[0029] FIG. 2 shows an inverted organic light emitting device that does not have a separate electron transport layer.

DETAILED DESCRIPTION

[0030] Generally, an OLED comprises at least one organic layer disposed between and electrically connected to an anode and a cathode. When a current is applied, the anode injects holes and the cathode injects electrons into the organic layer(s). The injected holes and electrons each migrate toward the oppositely charged electrode. When an electron and hole localize on the same molecule, an “exciton,” which is a localized electron-hole pair having an excited energy state, is formed. Light is emitted when the exciton relaxes via a photoemissive mechanism. In some cases, the exciton may be localized on an excimer or an exciplex. Non-radiative mechanisms, such as thermal relaxation, may also occur, but are generally considered undesirable.

[0031] The initial OLEDs used emissive molecules that emitted light from their singlet states (“fluorescence”) as disclosed, for example, in U.S. Pat. No. 4,769,292, which is incorporated by reference in its entirety. Fluorescent emission generally occurs in a time frame of less than 10 nanoseconds.

[0032] More recently, OLEDs having emissive materials that emit light from triplet states (“phosphorescence”) have been demonstrated. Baldo et al., “Highly Efficient Phosphorescent Emission from Organic Electroluminescent Devices,” *Nature*, vol. 395, 151-154, 1998; (“Baldo-I”) and Baldo et al., “Very high-efficiency green organic light-emitting devices based on electrophosphorescence,” *Appl. Phys. Lett.*, vol. 75, No. 3, 4-6 (1999) (“Baldo-II”), are incorporated by reference in their entireties. Phosphorescence is described in more detail in U.S. Pat. No. 7,279,704 at cols. 5-6, which are incorporated by reference.

[0033] FIG. 1 shows an organic light emitting device 100. The figures are not necessarily drawn to scale. Device 100 may include a substrate 110, an anode 115, a hole injection layer 120, a hole transport layer 125, an electron blocking layer 130, an emissive layer 135, a hole blocking layer 140, an electron transport layer 145, an electron injection layer 150, a protective layer 155, a cathode 160, and a barrier layer 170. Cathode 160 is a compound cathode having a first conductive layer 162 and a second conductive layer 164. Device 100 may be fabricated by depositing the layers described, in order. The properties and functions of these various layers, as well as example materials, are described in more detail in U.S. Pat. No. 7,279,704 at cols. 6-10, which are incorporated by reference.

[0034] More examples for each of these layers are available. For example, a flexible and transparent substrate-anode combination is disclosed in U.S. Pat. No. 5,844,363, which is incorporated by reference in its entirety. An example of a p-doped hole transport layer is m-MTDATA doped with F₄-TCNQ at a molar ratio of 50:1, as disclosed in U.S. Patent Application Publication No. 2003/0230980, which is incorporated by reference in its entirety. Examples of emissive and host materials are disclosed in U.S. Pat. No. 6,303,238 to Thompson et al., which is incorporated by reference in its entirety. An example of an n-doped electron transport layer is BPhen doped with Li at a molar ratio of 1:1, as disclosed in U.S. Patent Application Publication No. 2003/0230980, which is incorporated by reference in its entirety. U.S. Pat. Nos. 5,703,436 and 5,707,745, which are incorporated by reference in their entireties, disclose examples of cathodes including compound cathodes having a thin layer of metal such as Mg:Ag with an overlying transparent, electrically-conductive, sputter-deposited ITO layer. The theory and use of blocking layers is described in more detail in U.S. Pat. No. 6,097,147 and U.S. Patent Application Publication No. 2003/0230980, which are incorporated by reference in their entireties. Examples of injection layers are provided in U.S. Patent Application Publication No. 2004/0174116, which is incorporated by reference in its entirety. A description of protective layers may be found in U.S. Patent Application Publication No. 2004/0174116, which is incorporated by reference in its entirety.

[0035] FIG. 2 shows an inverted OLED 200. The device includes a substrate 210, a cathode 215, an emissive layer 220, a hole transport layer 225, and an anode 230. Device 200 may be fabricated by depositing the layers described, in order. Because the most common OLED configuration has a cathode disposed over the anode, and device 200 has cathode 215 disposed under anode 230, device 200 may be referred to as an "inverted" OLED. Materials similar to those described with respect to device 100 may be used in the corresponding layers of device 200. FIG. 2 provides one example of how some layers may be omitted from the structure of device 100.

[0036] The simple layered structure illustrated in FIGS. 1 and 2 is provided by way of non-limiting example, and it is understood that embodiments of the invention may be used in connection with a wide variety of other structures. The specific materials and structures described are exemplary in nature, and other materials and structures may be used. Functional OLEDs may be achieved by combining the various layers described in different ways, or layers may be omitted entirely, based on design, performance, and cost factors. Other layers not specifically described may also be included. Materials other than those specifically described may be used. Although many of the examples provided herein describe various layers as comprising a single material, it is understood that combinations of materials, such as a mixture of host and dopant, or more generally a mixture, may be used. Also, the layers may have various sublayers. The names given to the various layers herein are not intended to be strictly limiting. For example, in device 200, hole transport layer 225 transports holes and injects holes into emissive layer 220, and may be described as a hole transport layer or a hole injection layer. In one embodiment, an OLED may be described as having an "organic layer" disposed between a cathode and an anode. This organic layer may comprise a single layer, or may further comprise

multiple layers of different organic materials as described, for example, with respect to FIGS. 1 and 2.

[0037] Structures and materials not specifically described may also be used, such as OLEDs comprised of polymeric materials (PLEDs) such as disclosed in U.S. Pat. No. 5,247,190 to Friend et al., which is incorporated by reference in its entirety. By way of further example, OLEDs having a single organic layer may be used. OLEDs may be stacked, for example as described in U.S. Pat. No. 5,707,745 to Forrest et al, which is incorporated by reference in its entirety. The OLED structure may deviate from the simple layered structure illustrated in FIGS. 1 and 2. For example, the substrate may include an angled reflective surface to improve out-coupling, such as a mesa structure as described in U.S. Pat. No. 6,091,195 to Forrest et al., and/or a pit structure as described in U.S. Pat. No. 5,834,893 to Bulovic et al., which are incorporated by reference in their entireties.

[0038] Unless otherwise specified, any of the layers of the various embodiments may be deposited by any suitable method. For the organic layers, preferred methods include thermal evaporation, ink-jet, such as described in U.S. Pat. Nos. 6,013,982 and 6,087,196, which are incorporated by reference in their entireties, organic vapor phase deposition (OVPD), such as described in U.S. Pat. No. 6,337,102 to Forrest et al., which is incorporated by reference in its entirety, and deposition by organic vapor jet printing (OVJP), such as described in U.S. Pat. No. 7,431,968, which is incorporated by reference in its entirety. Other suitable deposition methods include spin coating and other solution based processes. Solution based processes are preferably carried out in nitrogen or an inert atmosphere. For the other layers, preferred methods include thermal evaporation. Preferred patterning methods include deposition through a mask, cold welding such as described in U.S. Pat. Nos. 6,294,398 and 6,468,819, which are incorporated by reference in their entireties, and patterning associated with some of the deposition methods such as ink-jet and organic vapor jet printing (OVJP). Other methods may also be used. The materials to be deposited may be modified to make them compatible with a particular deposition method. For example, substituents such as alkyl and aryl groups, branched or unbranched, and preferably containing at least 3 carbons, may be used in small molecules to enhance their ability to undergo solution processing. Substituents having 20 carbons or more may be used, and 3-20 carbons is a preferred range. Materials with asymmetric structures may have better solution processability than those having symmetric structures, because asymmetric materials may have a lower tendency to recrystallize. Dendrimer substituents may be used to enhance the ability of small molecules to undergo solution processing.

[0039] Devices fabricated in accordance with embodiments of the present invention may further optionally comprise a barrier layer. One purpose of the barrier layer is to protect the electrodes and organic layers from damaging exposure to harmful species in the environment including moisture, vapor and/or gases, etc. The barrier layer may be deposited over, under or next to a substrate, an electrode, or over any other parts of a device including an edge. The barrier layer may comprise a single layer, or multiple layers. The barrier layer may be formed by various known chemical vapor deposition techniques and may include compositions having a single phase as well as compositions having multiple phases. Any suitable material or combination of

materials may be used for the barrier layer. The barrier layer may incorporate an inorganic or an organic compound or both. The preferred barrier layer comprises a mixture of a polymeric material and a non-polymeric material as described in U.S. Pat. No. 7,968,146, PCT Pat. Application Nos. PCT/US2007/023098 and PCT/US2009/042829, which are herein incorporated by reference in their entireties. To be considered a “mixture”, the aforesaid polymeric and non-polymeric materials comprising the barrier layer should be deposited under the same reaction conditions and/or at the same time. The weight ratio of polymeric to non-polymeric material may be in the range of 95:5 to 5:95. The polymeric material and the non-polymeric material may be created from the same precursor material. In one example, the mixture of a polymeric material and a non-polymeric material consists essentially of polymeric silicon and inorganic silicon.

[0040] Devices fabricated in accordance with embodiments of the invention can be incorporated into a wide variety of electronic component modules (or units) that can be incorporated into a variety of electronic products or intermediate components. Examples of such electronic products or intermediate components include display screens, lighting devices such as discrete light source devices or lighting panels, etc. that can be utilized by the end-user product manufacturers. Such electronic component modules can optionally include the driving electronics and/or power source(s). Devices fabricated in accordance with embodiments of the invention can be incorporated into a wide variety of consumer products that have one or more of the electronic component modules (or units) incorporated therein. A consumer product comprising an OLED that includes the compound of the present disclosure in the organic layer in the OLED is disclosed. Such consumer products would include any kind of products that include one or more light source(s) and/or one or more of some type of visual displays. Some examples of such consumer products include flat panel displays, curved displays, computer monitors, medical monitors, televisions, billboards, lights for interior or exterior illumination and/or signaling, heads-up displays, fully or partially transparent displays, flexible displays, rollable displays, foldable displays, stretchable displays, laser printers, telephones, mobile phones, tablets, phablets, personal digital assistants (PDAs), wearable devices, laptop computers, digital cameras, camcorders, viewfinders, micro-displays (displays that are less than 2 inches diagonal), 3-D displays, virtual reality or augmented reality displays, vehicles, video walls comprising multiple displays tiled together, theater or stadium screen, a light therapy device, and a sign. Various control mechanisms may be used to control devices fabricated in accordance with the present invention, including passive matrix and active matrix. Many of the devices are intended for use in a temperature range comfortable to humans, such as 18 degrees C. to 30 degrees C., and more preferably at room temperature (20-25 degrees C.), but could be used outside this temperature range, for example, from -40 degree C. to +80 degree C.

[0041] The materials and structures described herein may have applications in devices other than OLEDs. For example, other optoelectronic devices such as organic solar cells and organic photodetectors may employ the materials and structures. More generally, organic devices, such as organic transistors, may employ the materials and structures.

[0042] The terms “halo,” “halogen,” or “halide” as used interchangeably and refer to fluorine, chlorine, bromine, and iodine.

[0043] The term “acyl” refers to a substituted carbonyl radical ($\text{C}(\text{O})-\text{R}_s$).

[0044] The term “ester” refers to a substituted oxycarbonyl ($-\text{O}-\text{C}(\text{O})-\text{R}_s$ or $-\text{C}(\text{O})-\text{O}-\text{R}_s$) radical.

[0045] The term “ether” refers to an $-\text{OR}$ radical.

[0046] The terms “sulfanyl” or “thio-ether” are used interchangeably and refer to a $-\text{SR}_s$ radical.

[0047] The term “sulfinyl” refers to a $-\text{S}(\text{O})-\text{R}_s$ radical.

[0048] The term “sulfonyl” refers to a $-\text{SO}_2-\text{R}_s$ radical.

[0049] The term “phosphino” refers to a $-\text{P}(\text{R}_s)_3$ radical, wherein each R_s can be same or different.

[0050] The term “silyl” refers to a $-\text{Si}(\text{R}_s)_3$ radical, wherein each R_s can be same or different.

[0051] In each of the above, R_s can be hydrogen or a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, and combination thereof. Preferred R_s is selected from the group consisting of alkyl, cycloalkyl, aryl, heteroaryl, and combination thereof.

[0052] The term “alkyl” refers to and includes both straight and branched chain alkyl radicals. Preferred alkyl groups are those containing from one to fifteen carbon atoms and includes methyl, ethyl, propyl, 1-methylethyl, butyl, 1-methylpropyl, 2-methylpropyl, pentyl, 1-methylbutyl, 2-methylbutyl, 3-methylbutyl, 1,1-dimethylpropyl, 1,2-dimethylpropyl, 2,2-dimethylpropyl, and the like. Additionally, the alkyl group may be optionally substituted.

[0053] The term “cycloalkyl” refers to and includes monocyclic, polycyclic, and spiro alkyl radicals. Preferred cycloalkyl groups are those containing 3 to 12 ring carbon atoms and includes cyclopropyl, cyclopentyl, cyclohexyl, bicyclo[3.1.1]heptyl, spiro[4.5]decyl, spiro[5.5]undecyl, adamantyl, and the like. Additionally, the cycloalkyl group may be optionally substituted.

[0054] The terms “heteroalkyl” or “heterocycloalkyl” refer to an alkyl or a cycloalkyl radical, respectively, having at least one carbon atom replaced by a heteroatom. Optionally the at least one heteroatom is selected from O, S, N, P, B, Si and Se, preferably, O, S or N. Additionally, the heteroalkyl or heterocycloalkyl group is optionally substituted.

[0055] The term “alkenyl” refers to and includes both straight and branched chain alkene radicals. Alkenyl groups are essentially alkyl groups that include at least one carbon-carbon double bond in the alkyl chain. Cycloalkenyl groups are essentially cycloalkyl groups that include at least one carbon-carbon double bond in the cycloalkyl ring. The term “heteroalkenyl” as used herein refers to an alkenyl radical having at least one carbon atom replaced by a heteroatom. Optionally the at least one heteroatom is selected from O, S, N, P, B, Si and Se, preferably, O, S or N. Preferred alkenyl, cycloalkenyl, or heteroalkenyl groups are those containing two to fifteen carbon atoms. Additionally, the alkenyl, cycloalkenyl, or heteroalkenyl group is optionally substituted.

[0056] The term “alkynyl” refers to and includes both straight and branched chain alkyne radicals. Preferred alkynyl groups are those containing two to fifteen carbon atoms. Additionally, the alkynyl group is optionally substituted.

[0057] The terms “aralkyl” or “arylalkyl” are used interchangeably and refer to an alkyl group that is substituted with an aryl group. Additionally, the aralkyl group is optionally substituted.

[0058] The term “heterocyclic group” refers to and includes aromatic and non-aromatic cyclic radicals containing at least one heteroatom. Optionally the at least one heteroatom is selected from O, S, N, P, B, Si and Se, preferably, O, S or N. Hetero-aromatic cyclic radicals may be used interchangeably with heteroaryl. Preferred hetero-non-aromatic cyclic groups are those containing 3 to 7 ring atoms which includes at least one hetero atom, and includes cyclic amines such as morpholino, piperidino, pyrrolidino, and the like, and cyclic ethers/thio-ethers, such as tetrahydrofuran, tetrahydropyran, tetrahydrothiophene, and the like. Additionally, the heterocyclic group may be optionally substituted.

[0059] The term “aryl” refers to and includes both single-ring aromatic hydrocarbyl groups and polycyclic aromatic ring systems. The polycyclic rings may have two or more rings in which two carbons are common to two adjoining rings (the rings are “fused”) wherein at least one of the rings is an aromatic hydrocarbyl group, e.g., the other rings can be cycloalkyls, cycloalkenyls, aryl, heterocycles, and/or heteroaryls. Preferred aryl groups are those containing six to thirty carbon atoms, preferably six to twenty carbon atoms, more preferably six to twelve carbon atoms. Especially preferred is an aryl group having six carbons, ten carbons or twelve carbons. Suitable aryl groups include phenyl, biphenyl, triphenyl, triphenylene, tetraphenylene, naphthalene, anthracene, phenalene, phenanthrene, fluorene, pyrene, chrysene, perylene, and azulene, preferably phenyl, biphenyl, triphenyl, triphenylene, fluorene, and naphthalene. Additionally, the aryl group may be optionally substituted.

[0060] The term “heteroaryl” refers to and includes both single-ring hetero-aromatic groups and polycyclic aromatic ring systems that include at least one heteroatom. The heteroatoms include, but are not limited to O, S, N, P, B, Si and Se. In many instances, O, S or N are the preferred heteroatoms. Hetero-single ring aromatic systems are preferably single rings with 5 or 6 ring atoms, and the ring can have from one to six heteroatoms. The hetero-polycyclic ring systems can have two or more rings in which two atoms are common to two adjoining rings (the rings are “fused”) wherein at least one of the rings is a heteroaryl, e.g., the other rings can be cycloalkyls, cycloalkenyls, aryl, heterocycles, and/or heteroaryls. The hetero-polycyclic aromatic ring systems can have from one to six heteroatoms per ring of the polycyclic aromatic ring system. Preferred heteroaryl groups are those containing three to thirty carbon atoms, preferably three to twenty carbon atoms, more preferably three to twelve carbon atoms. Suitable heteroaryl groups include dibenzothiophene, dibenzofuran, dibenzoselenophene, furan, thiophene, benzofuran, benzothiophene, benzoselenophene, carbazole, indolocarbazole, pyridylindole, pyrrolodipyridine, pyrazole, imidazole, triazole, oxazole, thiazole, oxadiazole, oxatriazole, dioxazole, thiadiazole, pyridine, pyridazine, pyrimidine, pyrazine, triazine, oxazine, oxathiazine, oxadiazine, indole, benzimidazole, indazole, indoxazine, benzoxazole, benzisoxazole, benzothiazole, quinoline, isoquinoline, cinnoline, quinoxaline, quinoxaline, naphthyridine, phthalazine, pteridine, xanthene, acridine, phenazine, phenothiazine, phenoxazine, benzofuopyridine, furodipyridine, benzothienopyridine, thienodipyridine, ben-

zoselenophenopyridine, and selenophenodipyridine, preferably dibenzothiophene, dibenzofuran, dibenzoselenophene, carbazole, indolocarbazole, imidazole, pyridine, triazine, benzimidazole, 1,2-azaborine, 1,3-azaborine, 1,4-azaborine, borazine, and aza-analogs thereof. Additionally, the heteroaryl group may be optionally substituted.

[0061] Of the aryl and heteroaryl groups listed above, the groups of triphenylene, naphthalene, anthracene, dibenzothiophene, dibenzofuran, dibenzoselenophene, carbazole, indolocarbazole, imidazole, pyridine, pyrazine, pyrimidine, triazine, and benzimidazole, and the respective aza-analogs of each thereof are of particular interest.

[0062] The terms alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aralkyl, heterocyclic group, aryl, and heteroaryl, as used herein, are independently unsubstituted or substituted with one or more general substituents.

[0063] In many instances, the general substituents are selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, cyclic amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carbonyl, carboxylic acid, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof.

[0064] In some instances, the preferred general substituents are selected from the group consisting of deuterium, fluorine, alkyl, cycloalkyl, heteroalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, aryl, heteroaryl, nitrile, isonitrile, sulfanyl, and combinations thereof.

[0065] In some instances, the preferred general substituents are selected from the group consisting of deuterium, fluorine, alkyl, cycloalkyl, alkoxy, aryloxy, amino, silyl, aryl, heteroaryl, sulfanyl, and combinations thereof.

[0066] In yet other instances, the more preferred general substituents are selected from the group consisting of deuterium, fluorine, alkyl, cycloalkyl, aryl, heteroaryl, and combinations thereof.

[0067] The terms “substituted” and “substitution” refer to a substituent other than H that is bonded to the relevant position, e.g., a carbon or nitrogen. For example, when R¹ represents mono-substitution, then one R¹ must be other than H (i.e., a substitution). Similarly, when R¹ represents di-substitution, then two of R¹ must be other than H. Similarly, when R¹ represents no substitution, R¹, for example, can be a hydrogen for available valencies of ring atoms, as in carbon atoms for benzene and the nitrogen atom in pyrrole, or simply represents nothing for ring atoms with fully filled valencies, e.g., the nitrogen atom in pyridine. The maximum number of substitutions possible in a ring structure will depend on the total number of available valencies in the ring atoms.

[0068] As used herein, “combinations thereof” indicates that one or more members of the applicable list are combined to form a known or chemically stable arrangement that one of ordinary skill in the art can envision from the applicable list. For example, an alkyl and deuterium can be combined to form a partial or fully deuterated alkyl group; a halogen and alkyl can be combined to form a halogenated alkyl substituent; and a halogen, alkyl, and aryl can be combined to form a halogenated arylalkyl. In one instance, the term substitution includes a combination of two to four of the listed groups. In another instance, the term substitu-

[0069] The “aza” designation in the fragments described herein, i.e. aza-dibenzofuran, aza-dibenzothiophene, etc. means that one or more of the C—H groups in the respective aromatic ring can be replaced by a nitrogen atom, for example, and without any limitation, azatriphenylene encompasses both dibenzo[f,h]quinoxaline and dibenzo[f,h]quinoline. One of ordinary skill in the art can readily envision other nitrogen analogs of the aza-derivatives described above, and all such analogs are intended to be encompassed by the terms as set forth herein.


[0070] As used herein, “deuterium” refers to an isotope of hydrogen. Deuterated compounds can be readily prepared using methods known in the art. For example, U.S. Pat. No. 8,557,400, Patent Pub. No. WO 2006/095951, and U.S. Pat. Application Pub. No. US 2011/0037057, which are hereby incorporated by reference in their entireties, describe the making of deuterium-substituted organometallic complexes. Further reference is made to Ming Yan, et al., *Tetrahedron* 2015, 71, 1425-30 and Atzrodt et al., *Angew. Chem. Int. Ed. (Reviews)* 2007, 46, 7744-65, which are incorporated by reference in their entireties, describe the deuteration of the methylene hydrogens in benzyl amines and efficient pathways to replace aromatic ring hydrogens with deuterium, respectively.

[0071] It is to be understood that when a molecular fragment is described as being a substituent or otherwise attached to another moiety, its name may be written as if it were a fragment (e.g. phenyl, phenylene, naphthyl, dibenzofuryl) or as if it were the whole molecule (e.g. benzene, naphthalene, dibenzofuran). As used herein, these different ways of designating a substituent or attached fragment are considered to be equivalent.

[0072] In some instance, a pair of adjacent substituents can be optionally joined or fused into a ring. The preferred ring is a five, six, or seven-membered carbocyclic or heterocyclic ring, includes both instances where the portion of the ring formed by the pair of substituents is saturated and where the portion of the ring formed by the pair of substituents is unsaturated. As used herein, “adjacent” means that the two substituents involved can be on the same ring next to each other, or on two neighboring rings having the two closest available substitutable positions, such as 2, 2' positions in a biphenyl, or 1, 8 position in a naphthalene, as long as they can form a stable fused ring system.

[0073] In one aspect, the present invention includes a compound of Formula I:

Formula I

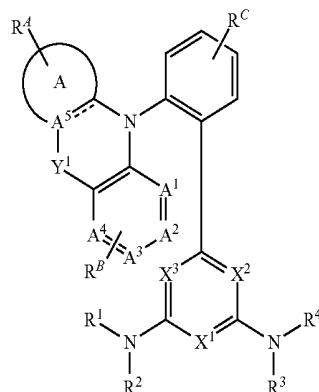

[0074] wherein ring A is a 5-membered or 6-membered aromatic ring;

[0075] wherein R^A , R^B , and R^C each independently represent mono to the maximum allowable substitution, or no substitution;

[0076] wherein Y¹ is absent or present, and when present is selected from the group consisting of a direct bond, O, S, Se, CRR', NR, SiRR', and BR;

[0077] wherein each X^1 - X^3 is N or CR;

[0078] wherein at least one of X^1 - X^3 is N;

[0079] wherein each A¹-A⁵ is independently C or N;

[0080] wherein the maximum number of N atoms that can connect to each other within each ring is two;

connect to each other within each ring is two, [0081] wherein each R^1 , R^2 , R^3 , and R^4 is independently selected from the group consisting of alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, aryl, heteroaryl, and combinations thereof;

[0082] wherein each R, R', R^A, R^B, and R^C is independently a hydrogen or a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acid, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and

[0083] wherein any two substituents may be joined or fused together to form a ring.

[0084] In one embodiment, each R, R', R^A, R^B, and R^C is independently a hydrogen or a substituent selected from the group consisting of deuterium, fluorine, alkyl, cycloalkyl, heteroalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, aryl, heteroaryl, nitrile, isonitrile, sulfanyl, and combinations thereof.

[0085] In one embodiment, X^1 - X^3 are each N. In one embodiment, X^1 is CR, and X^2 and X^3 are N. In one embodiment, X^2 is CR, and X^1 and X^3 are N. In one embodiment, X^1 is N, and X^2 and X^3 are CR.

[0086] In one embodiment, each R is H.

[0087] In one embodiment, each R^4 is H.

[0088] In one embodiment, each R^B is H.

[0089] In one embodiment, each R^C is H.

[0090] In one embodiment, R^1 , R^2 , R^3 , and R^4 are each aryl or heteroaryl.


[0091] In one embodiment, R^1 and R^2 are joined to form a carbazole group.

[0092] In one embodiment, R³ and R⁴ are joined to form a carbazole group.


[0093] In one embodiment, R^1 and R^2 are joined to form a carbazole group and R^3 and R^4 are joined together to form a carbazole group.

[0094] In one embodiment, A^1 - A^5 are each C. In one embodiment, A^5 is C, and ring A is a 6-membered aromatic ring. In one embodiment, A^5 is N, and ring A is a 5-membered aromatic ring.

[0095] In one embodiment, the compound is selected from the group consisting of:

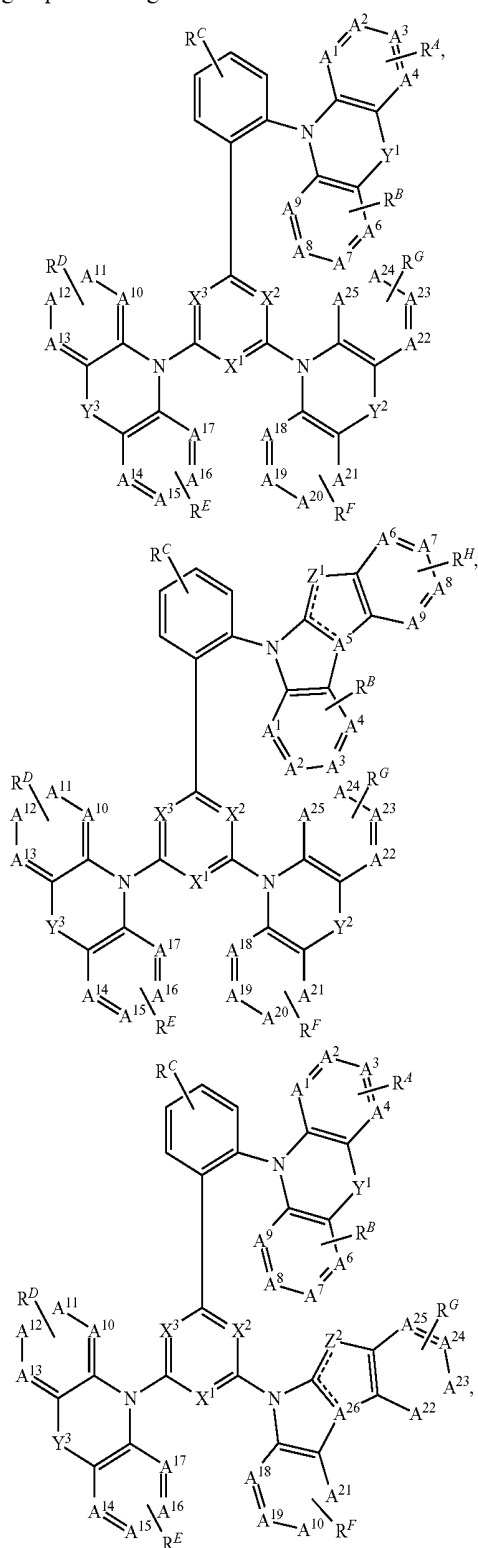

-continued

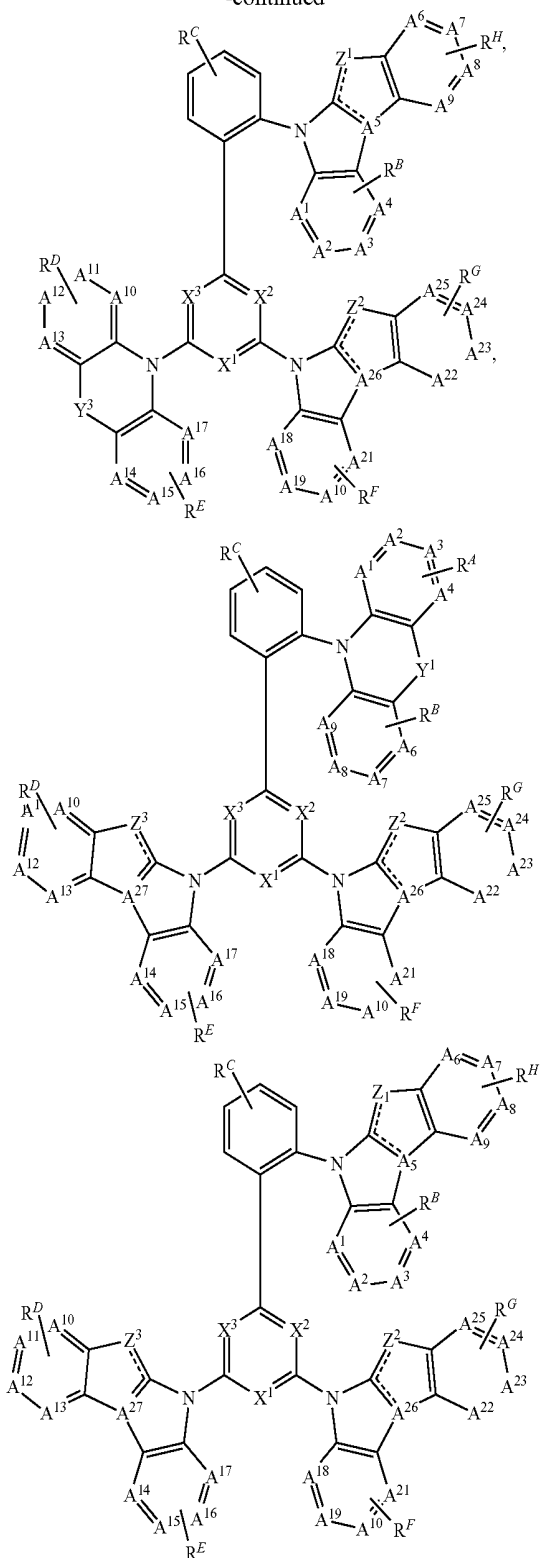

[0096] wherein R^D , R^E , R^F , R^G and R^H represent mono to the maximum allowable substitution, or no substitution;

[0097] wherein each Y^2 and Y^3 is independently selected from a group consisting of a direct bond, O, S, Se, CRR', NR, SiRR', and BR, or it is not present;

[0098] wherein A^6 to A^{25} are each independently C or N;


[0099] wherein the maximum number of N atoms that can connect to each other within each ring is two;

[0100] wherein Z^1 to Z^3 are each independently selected from a group consisting of O, S, Se, CRR', NR, SiRR', or BR;


[0101] wherein each R^D , R^E , R^F , R^G and R^H is independently a hydrogen or a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acid, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and

[0102] wherein any two substituents may be joined or fused together to form a ring.


[0103] In one embodiment, the compound is selected from the group consisting of Compound H1-B1-B1-B1 to Compound H50-B60-B60-B60 based on the numbering formula Hn-Bi-Bj-Bk, wherein n is an integer from 1 to 50, wherein i, j, and k are each independently an integer from 1 to 60, wherein H1 to H50 have the following structures:




H1



H2




H3




H4


-continued




H5

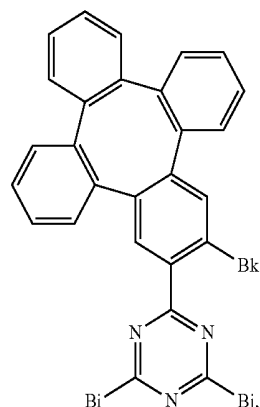

H6

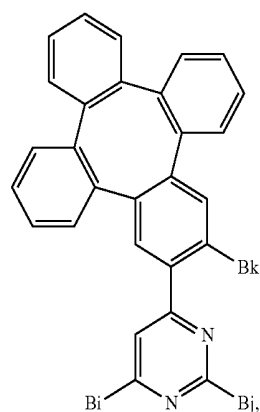


H7

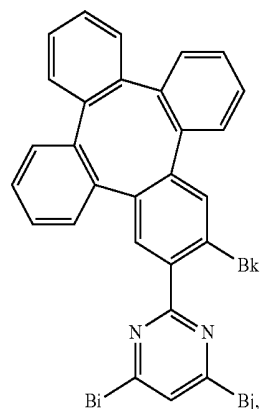


H8


-continued

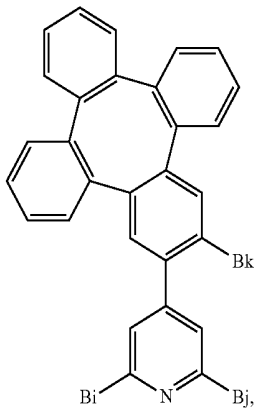


H9

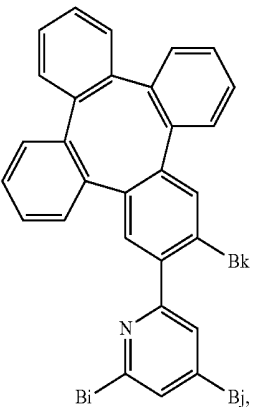

H10




H11




H12


-continued




H13




H14



H15




H16




H17


-continued




H18




H19



H20




H21




H22


-continued




H23




H24



H25

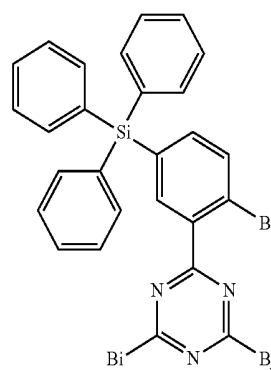


H26

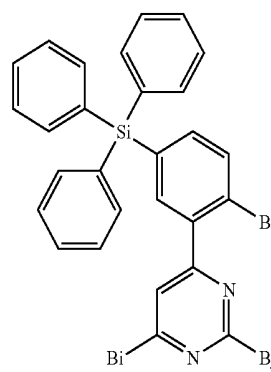


H27

-continued

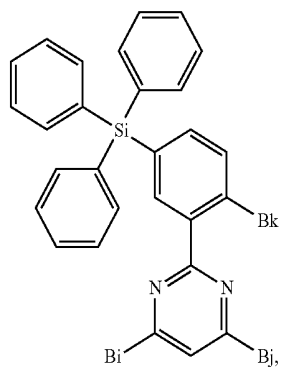


H28


-continued

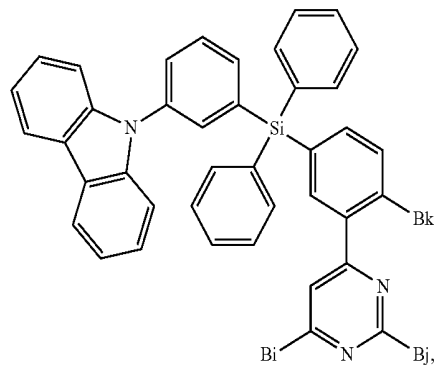


H32

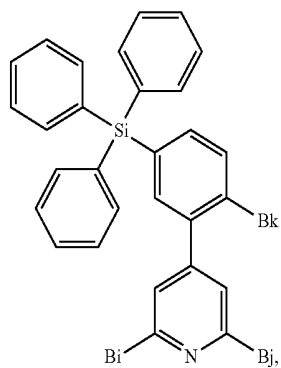


H29

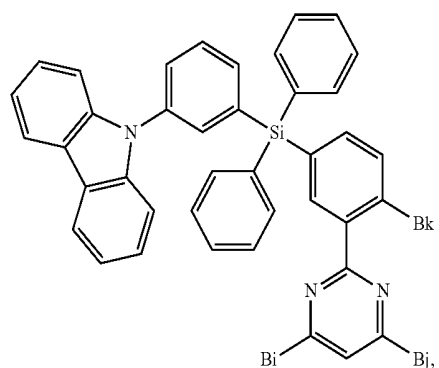


H33

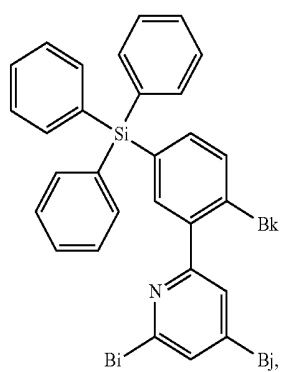


H30

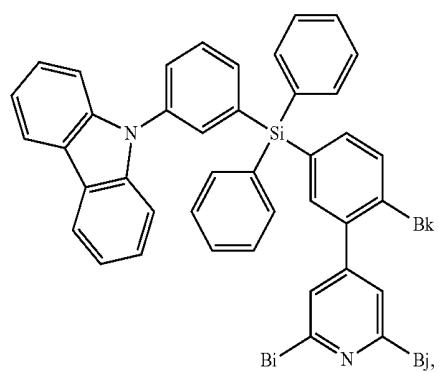

H34

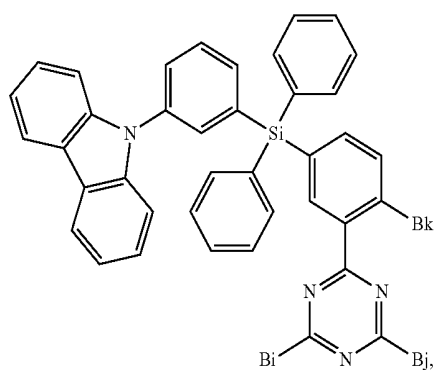


H31

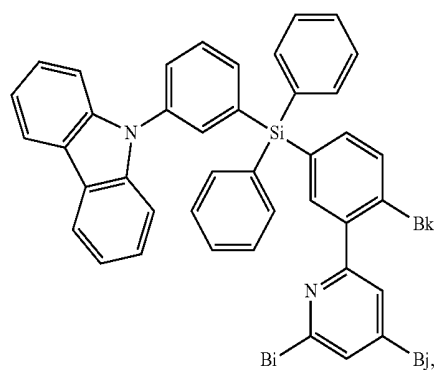


H35

-continued

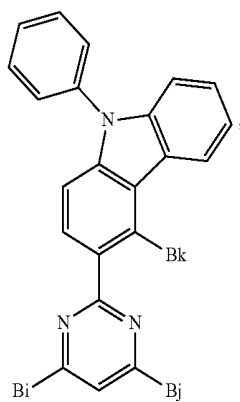


H36


-continued




H40




H37




H41




H38

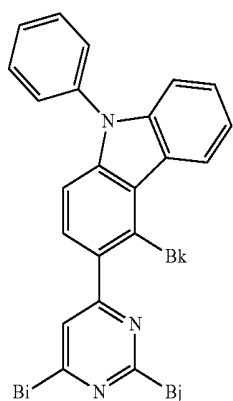

H42

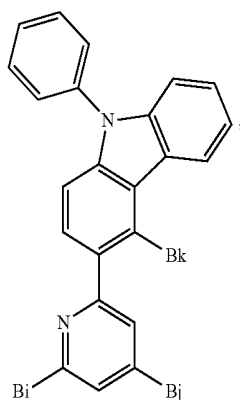


H39




H43


-continued




H44

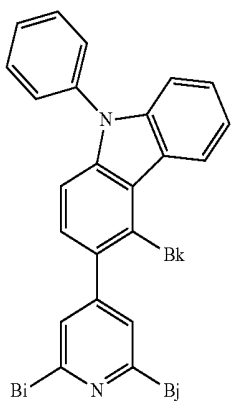

H45




H46




H47


-continued

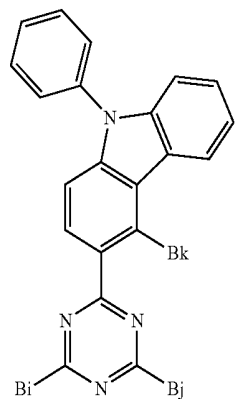

H48




H49




H50

or the compound is selected from the group consisting of Compound H51-B1-B1 to Compound H70-B60-B60 based on the numbering formula Hm-Bi-Bj, wherein m is an integer from 51 to 70, wherein i and j are each independently an integer from 1 to 60, wherein H51 to H70 have the following structures:




H51


-continued




H5




H53



H54




H55




H56


-continued




H57




H58



H59



H60

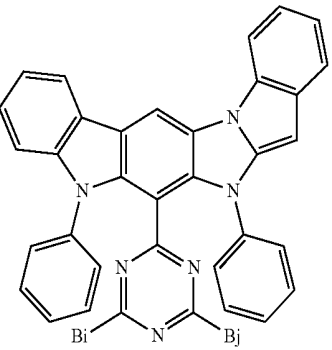



H61

-continued

-continued



H62

H66





H63

H67





H64

H68




H65

H69




-continued

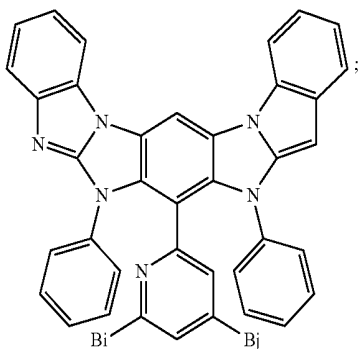


H70

-continued




B5


B6




B1




B2




B3




B4




B7



B8




B9




and wherein B1 to B60 have the following structures:

-continued




B10


-continued




B15




B11




B16




B12




B17



B13




B14




B18

-continued




B19


-continued




B23




B20




B24




B21




B25



B26

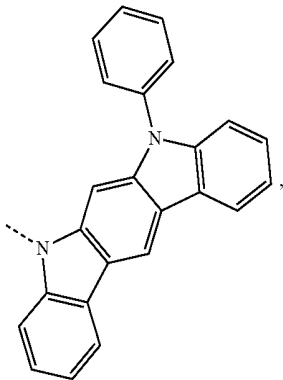


B22




B27

-continued

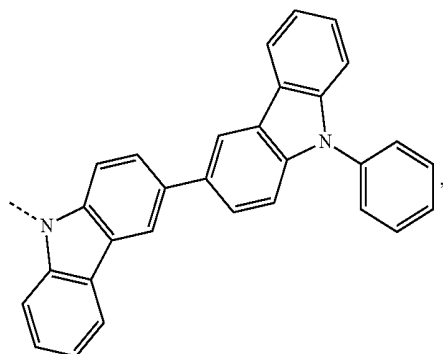


B28


-continued

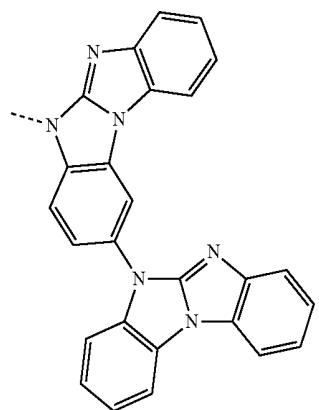


B32

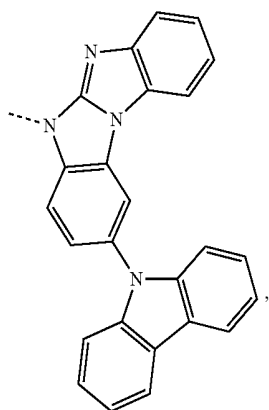


B29

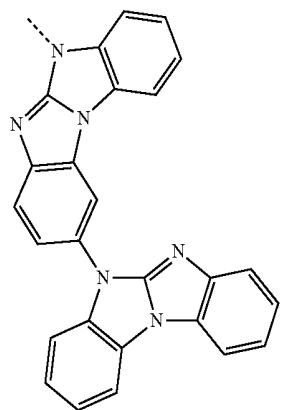


B33

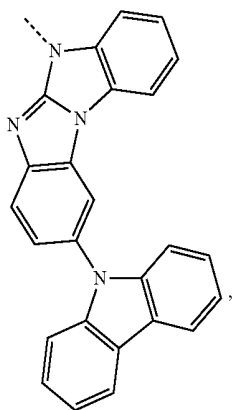


B30



B34

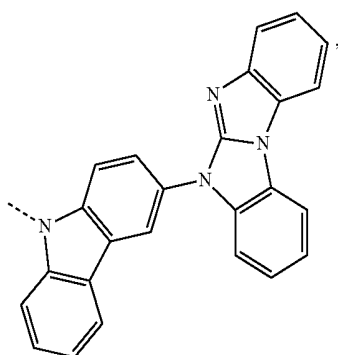


B31

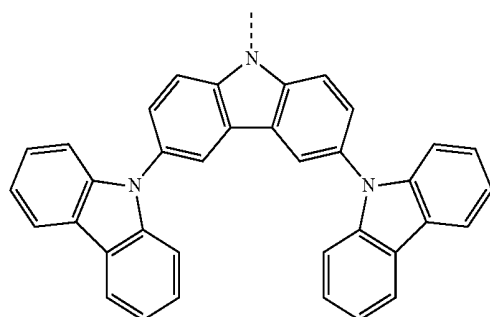


B35


-continued

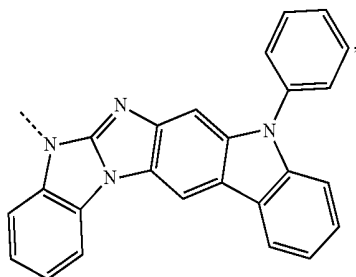


B36

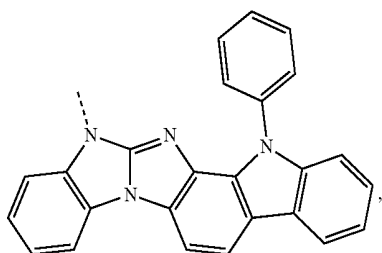


B37

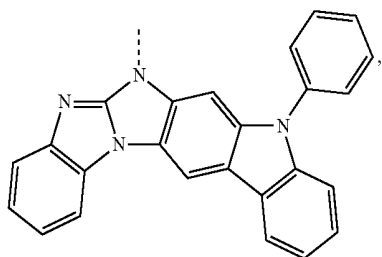


B38

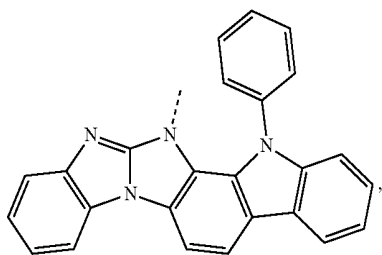

B39

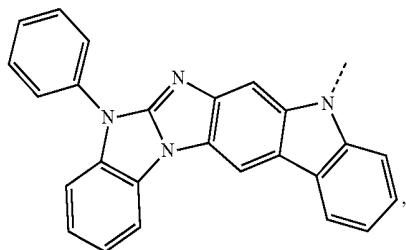


B40

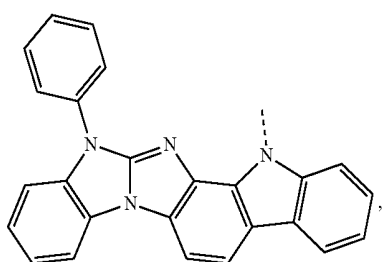


B41


-continued




B42

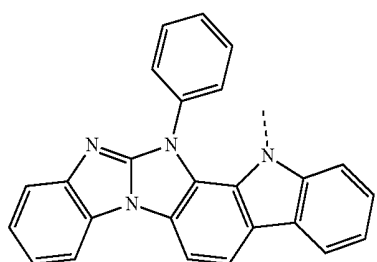


B43

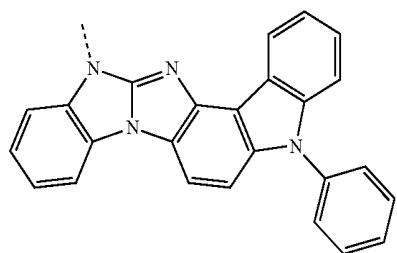


B44

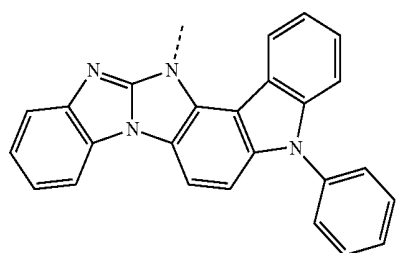

B45




B46




B47


-continued

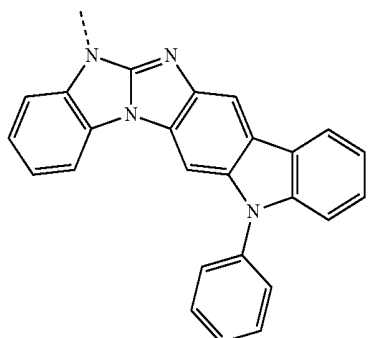


B48

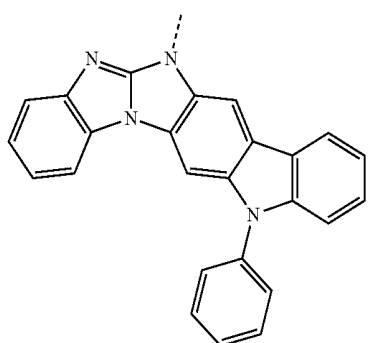


B49

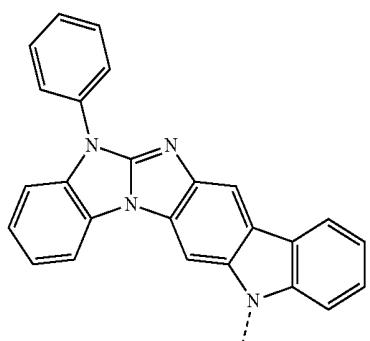

B50

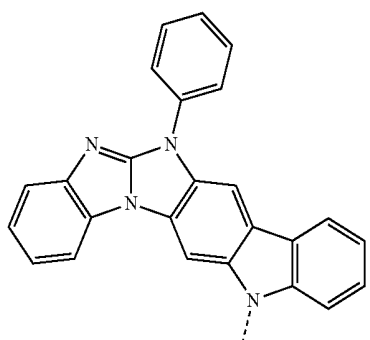


B51

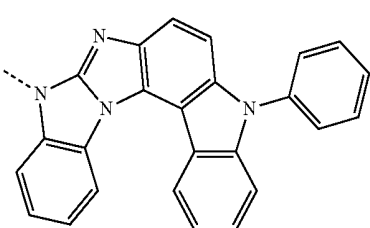


B52


-continued

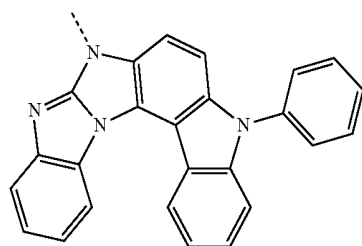


B53

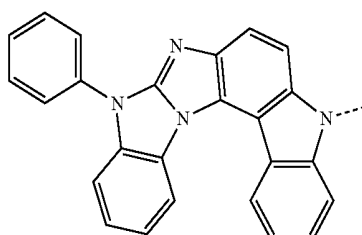


B54



B55




B56




B57

-continued

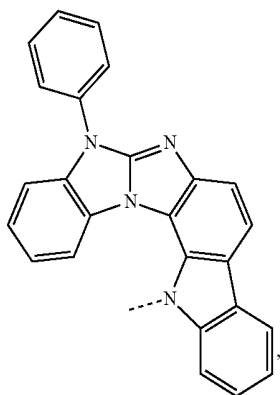


B58


-continued

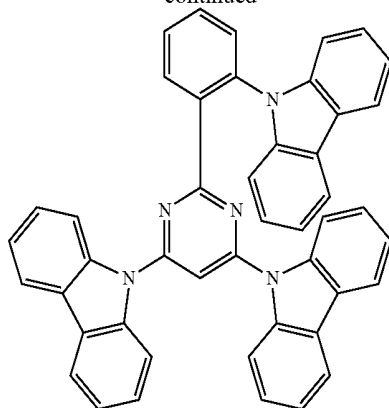



B59

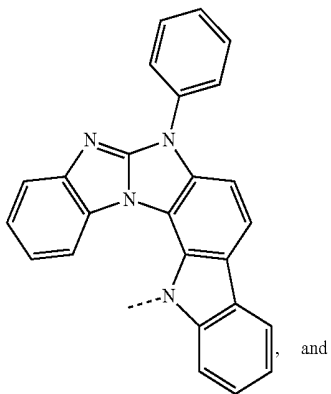


B60

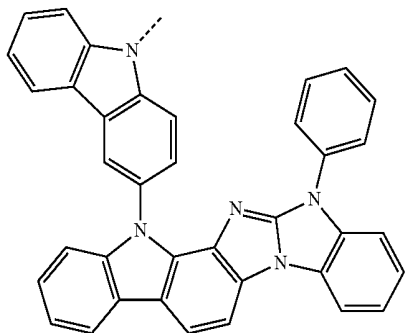






[0104] In one embodiment, the compound is selected from the group consisting of:

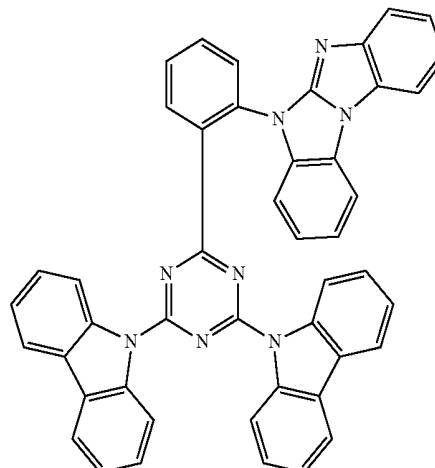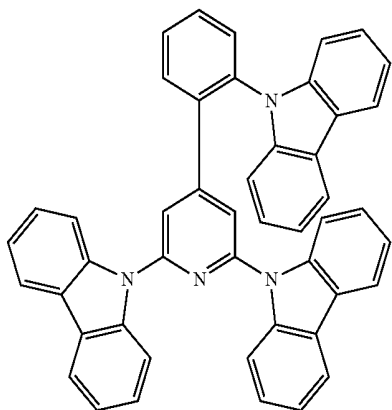


-continued

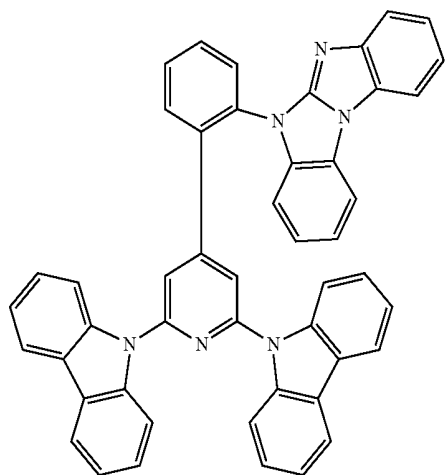






-continued

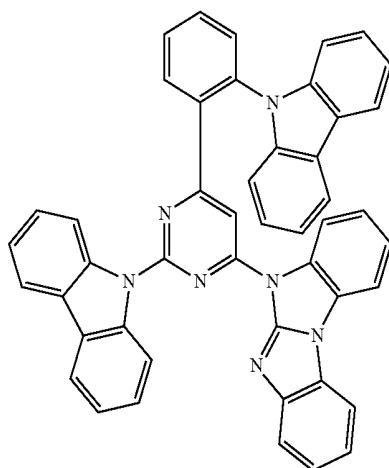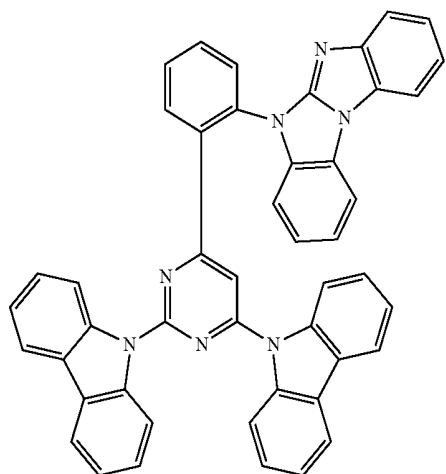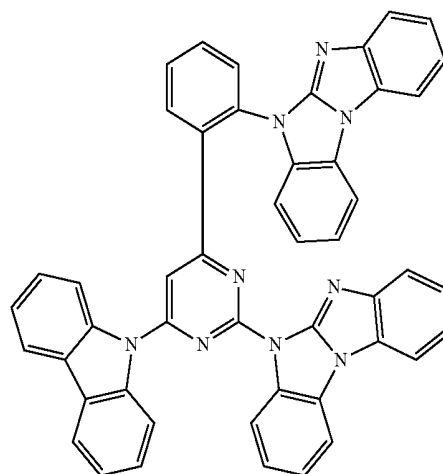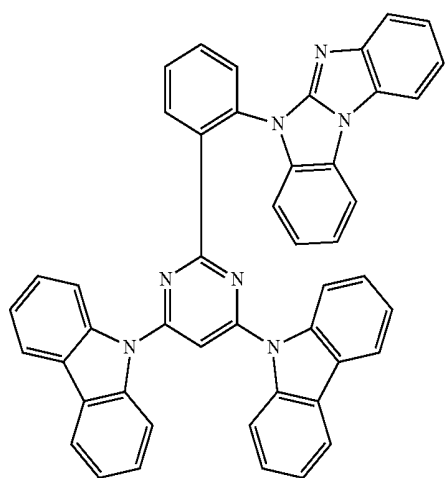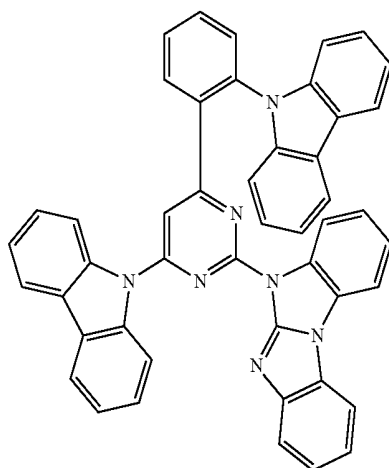


-continued

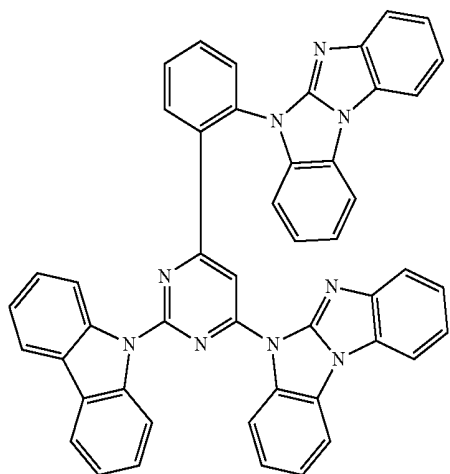


-continued

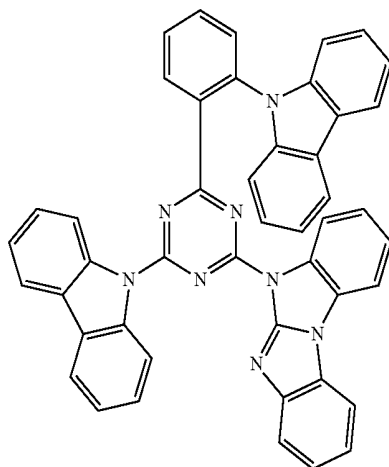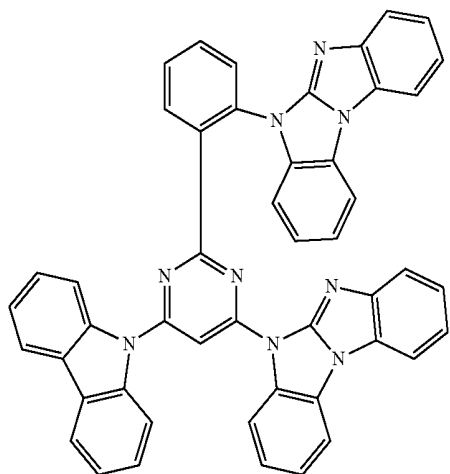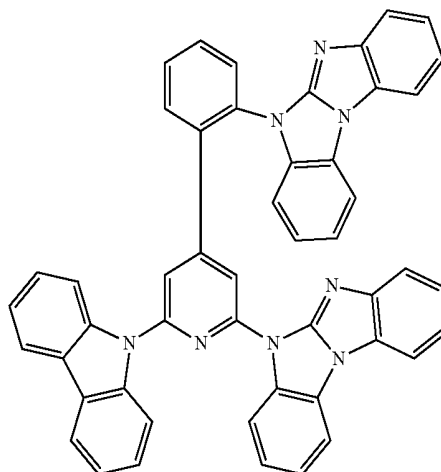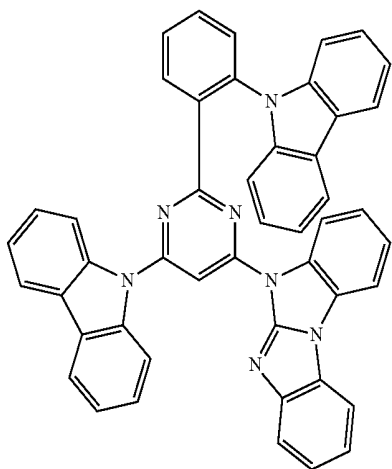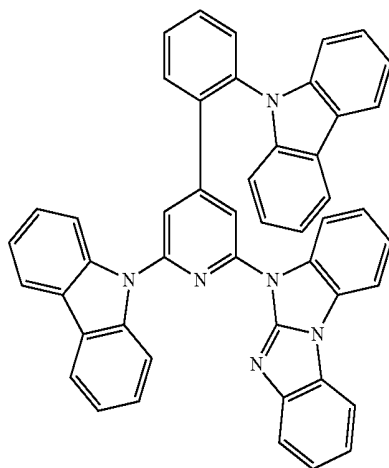


-continued

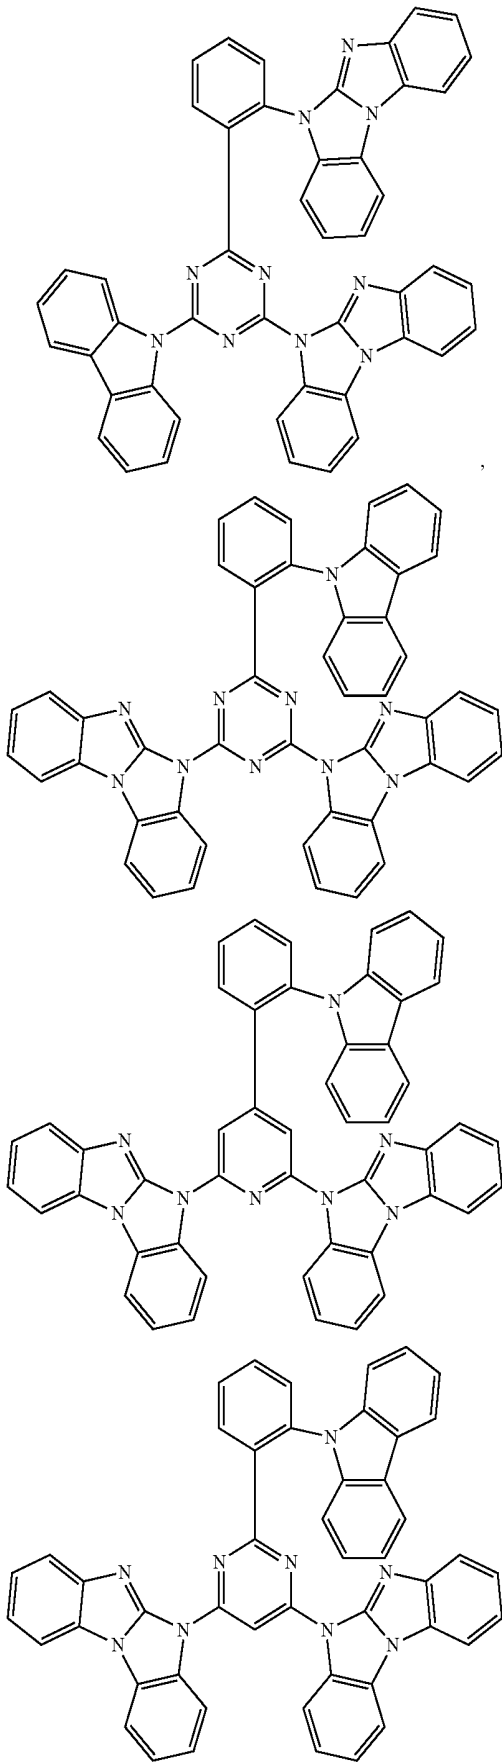






-continued

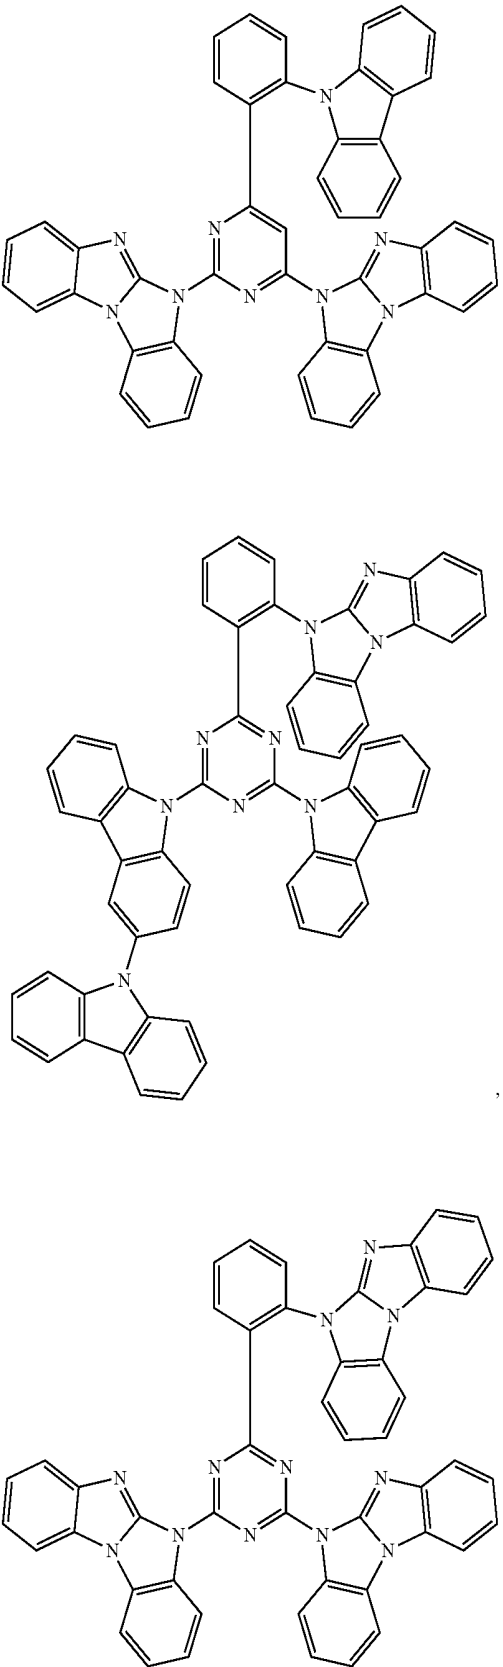


-continued

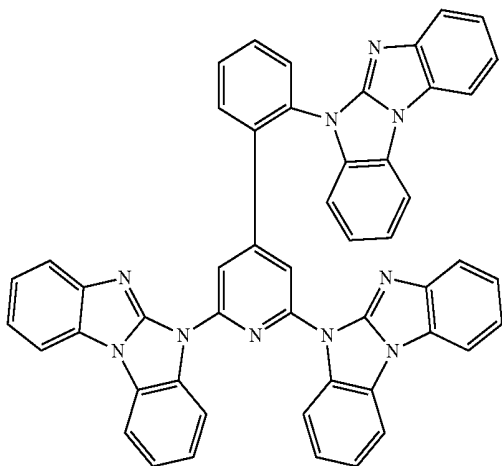






-continued

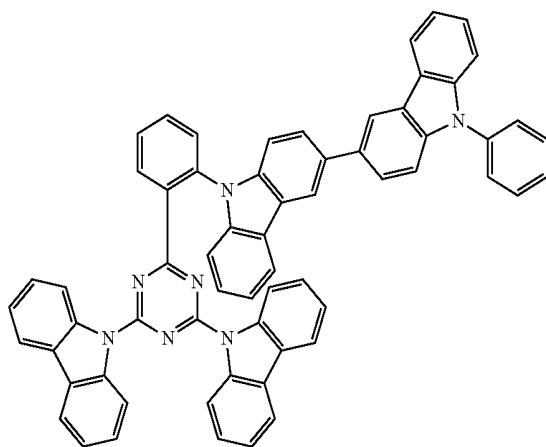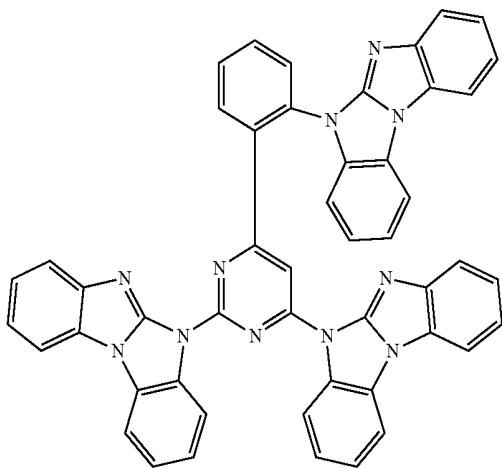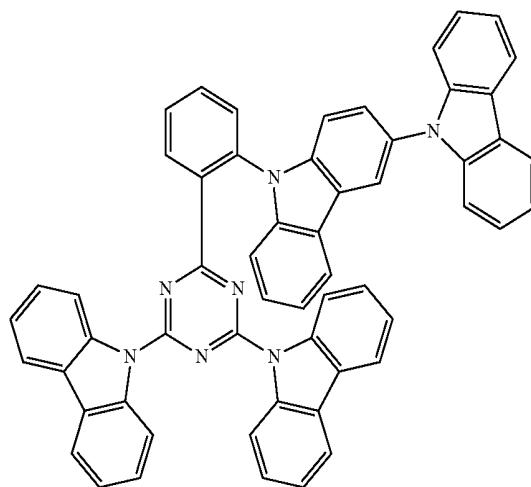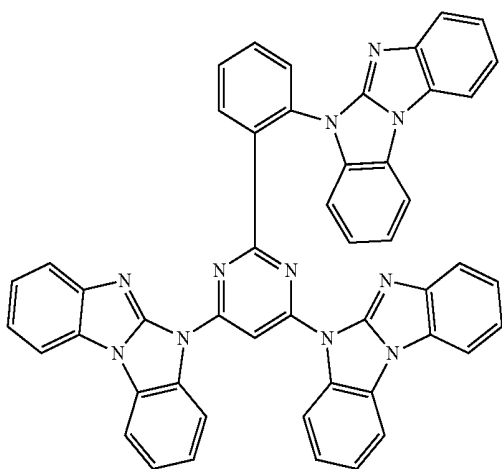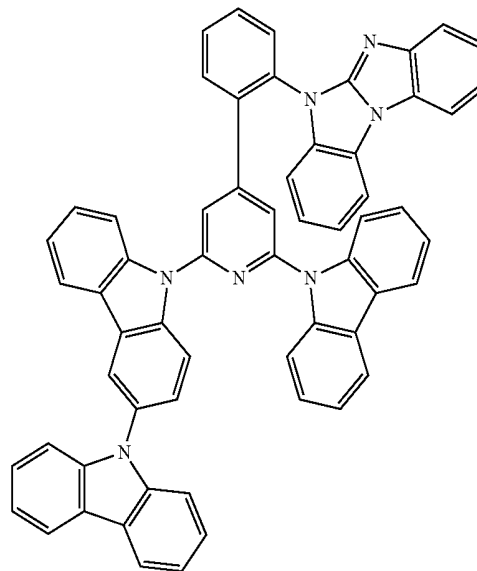




-continued

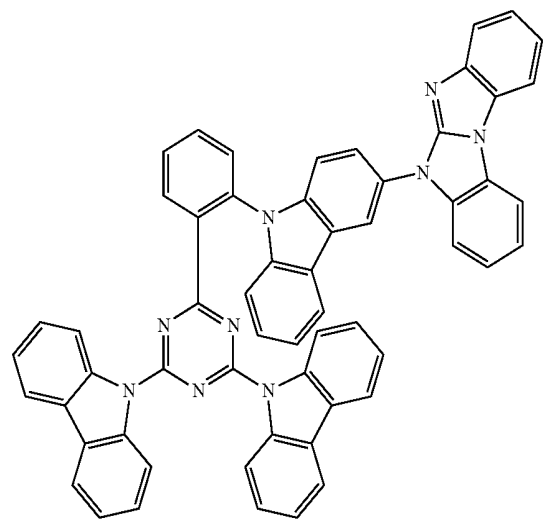




-continued

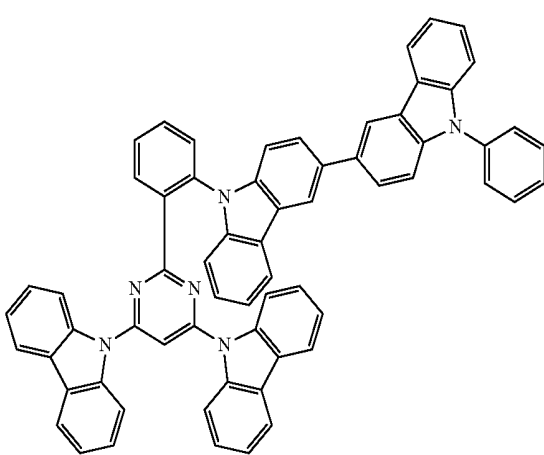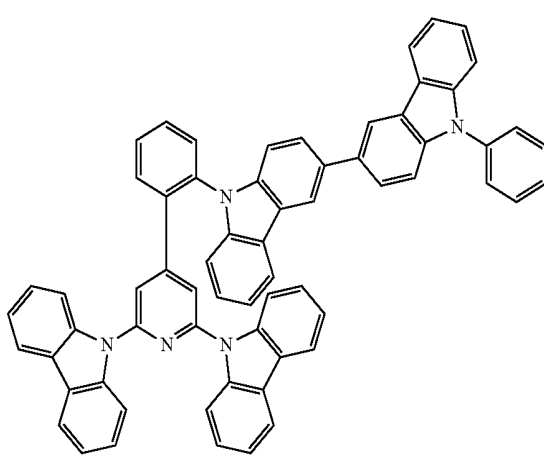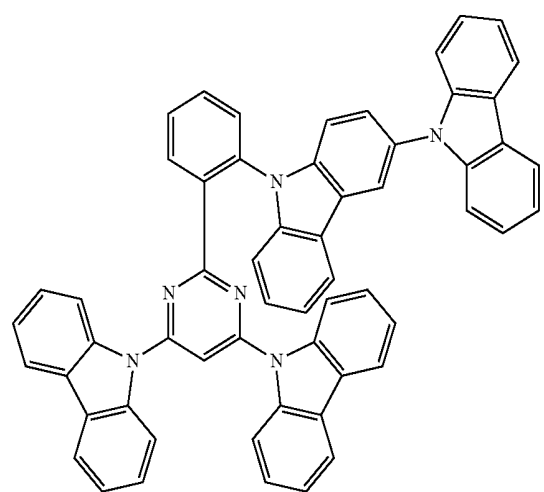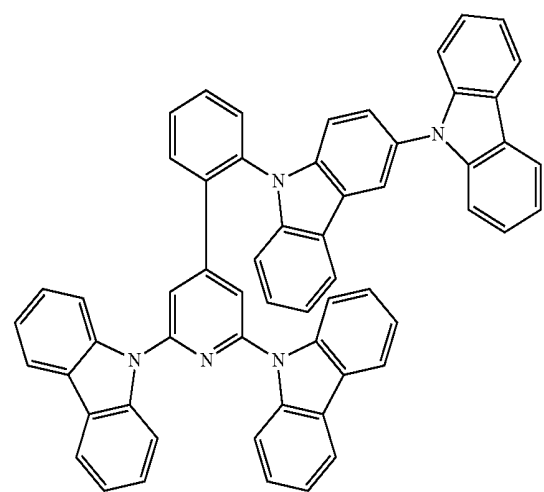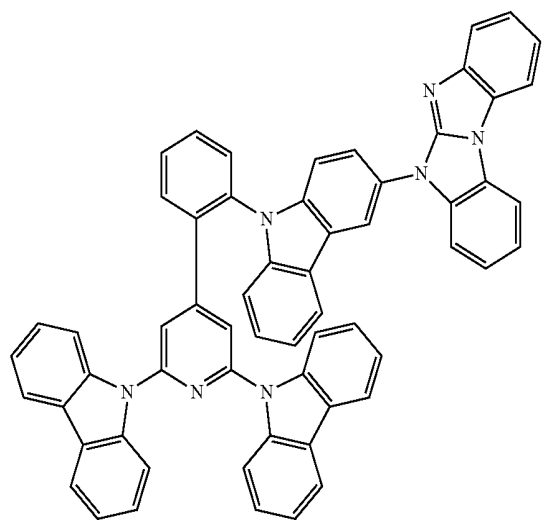


-continued

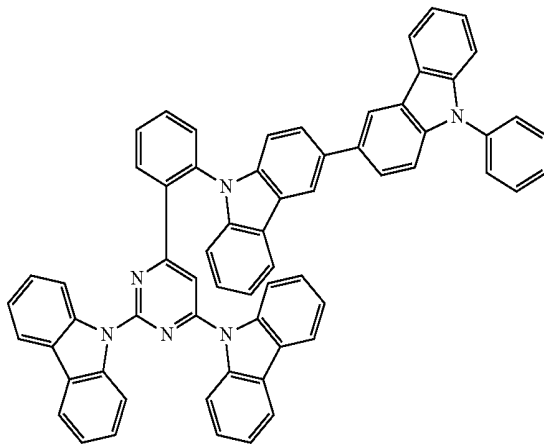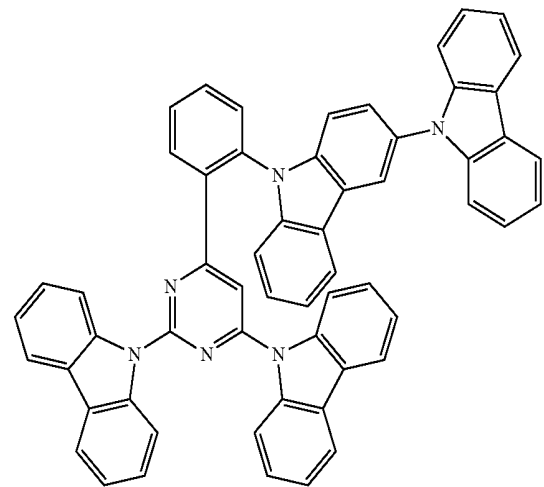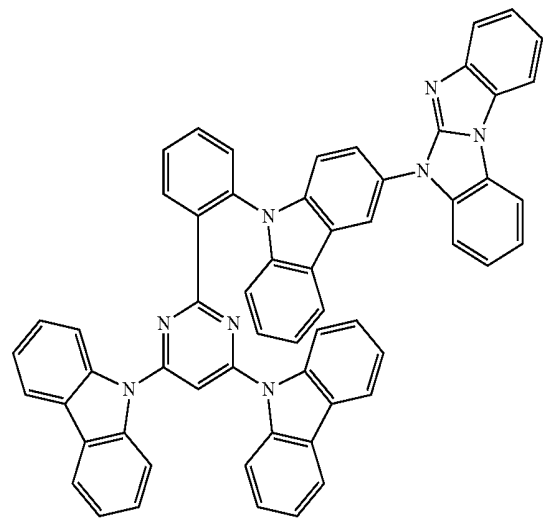








-continued

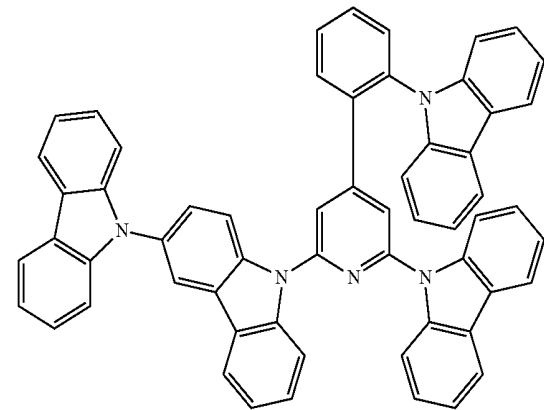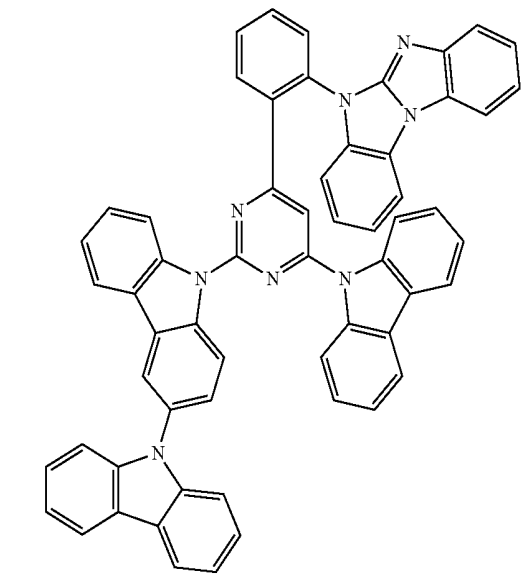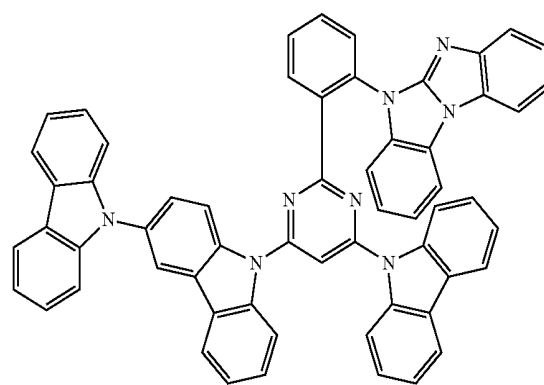




-continued

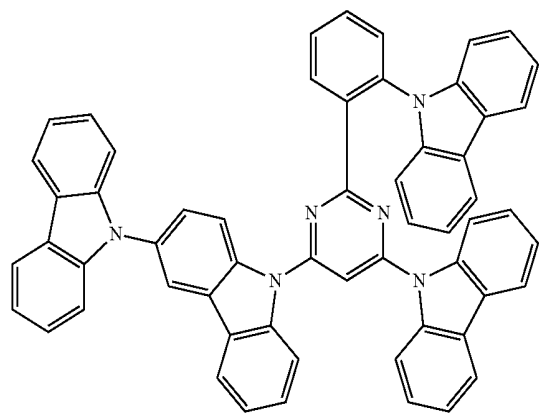




-continued

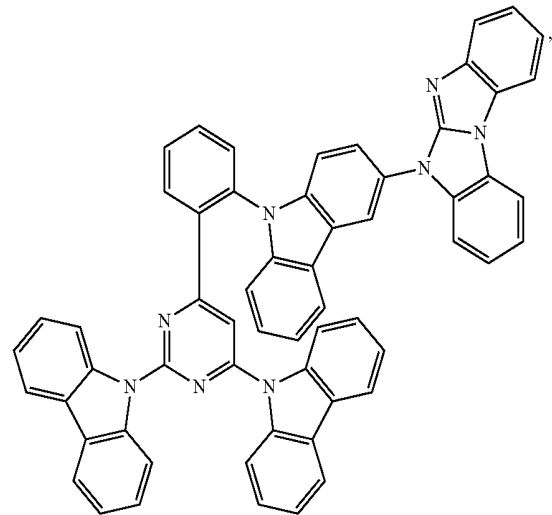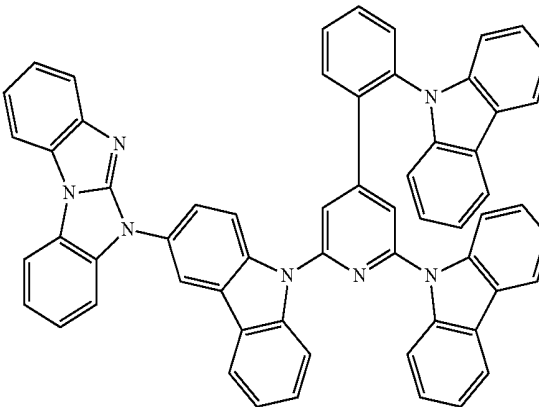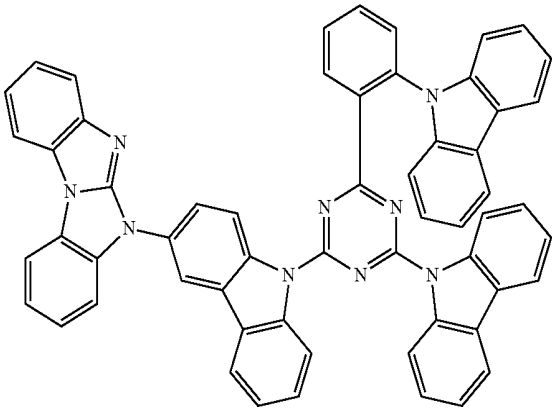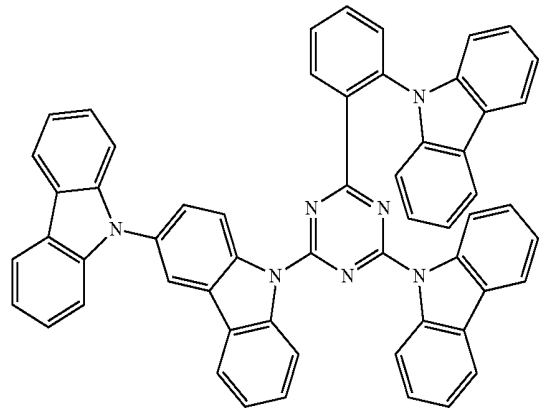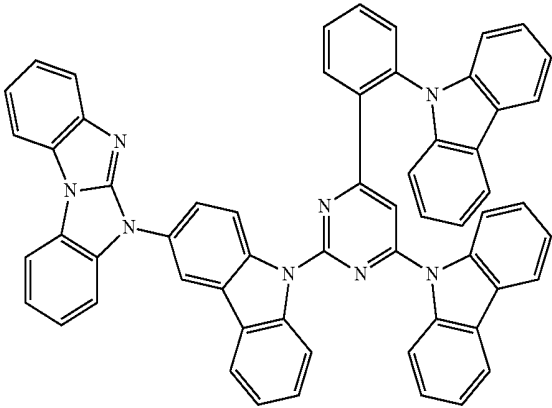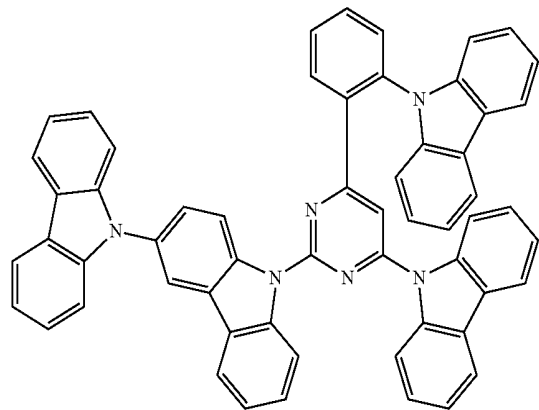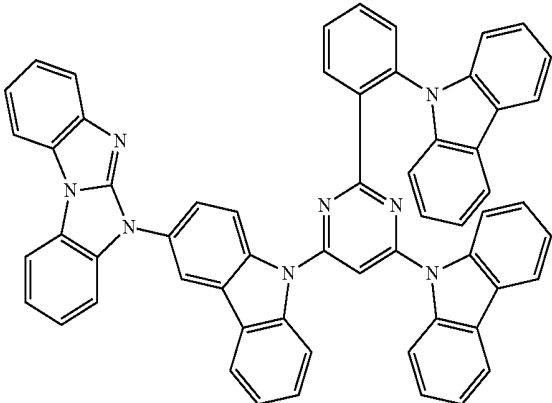





-continued

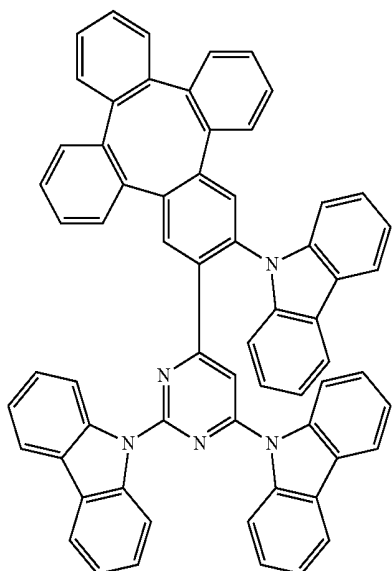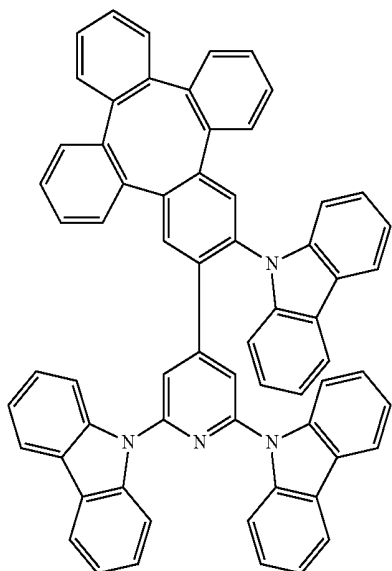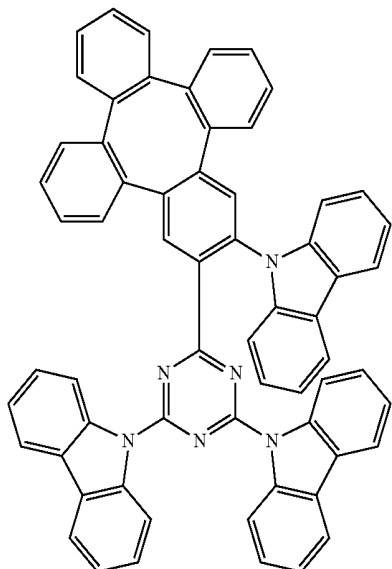




-continued

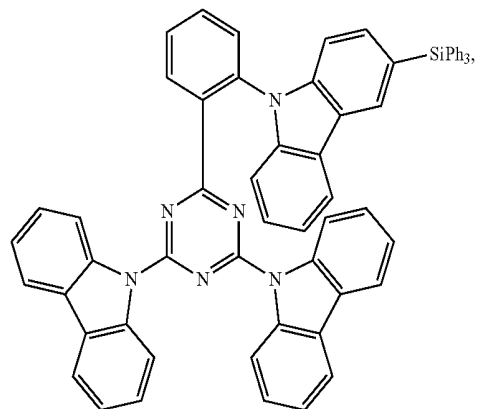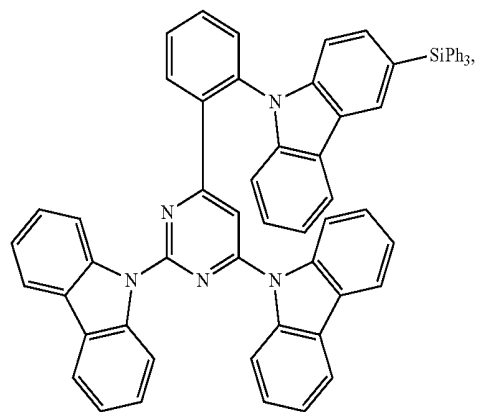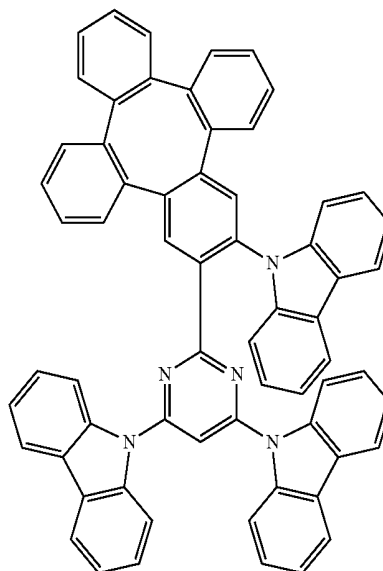


-continued

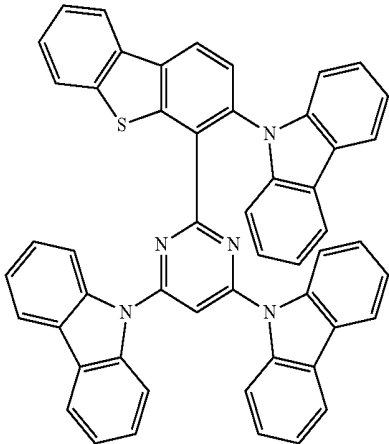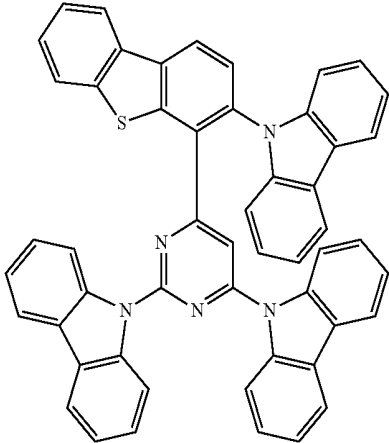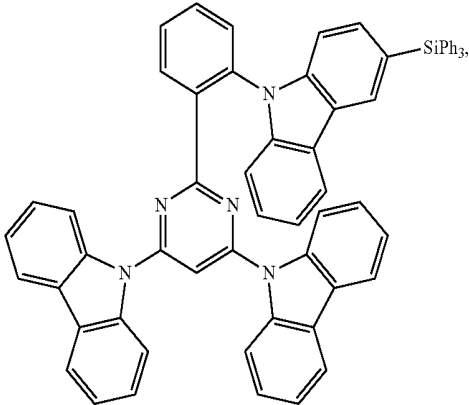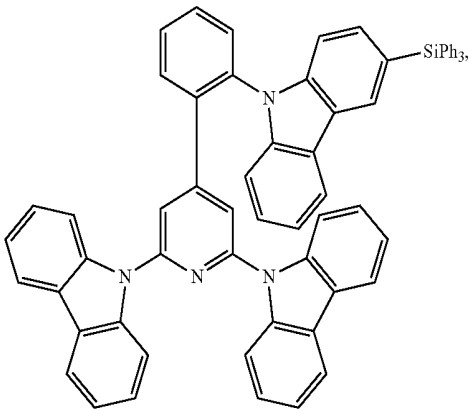






-continued

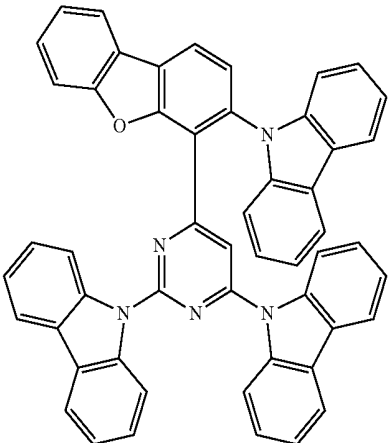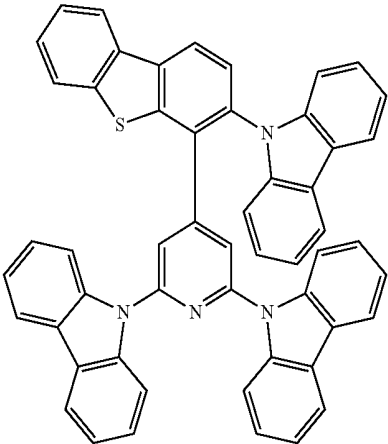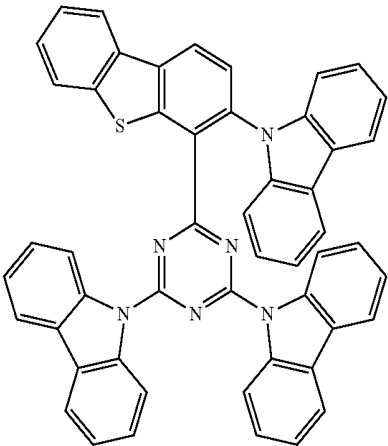


-continued

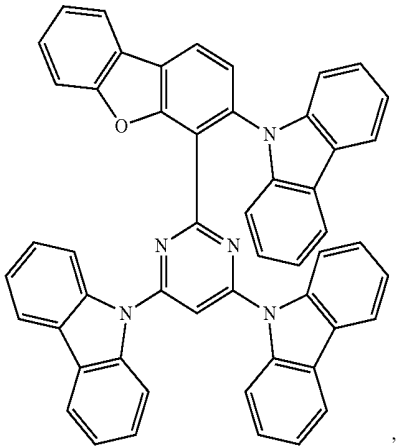






-continued

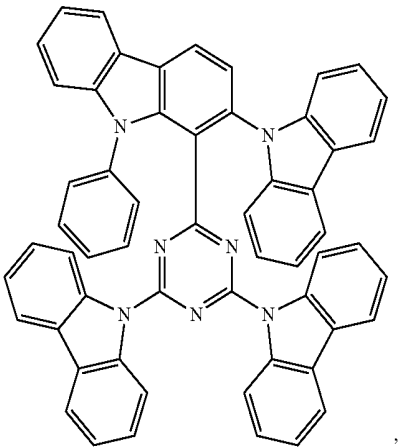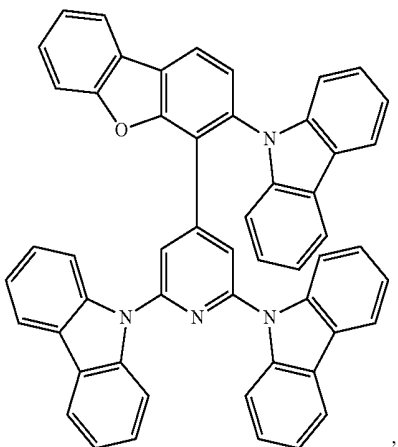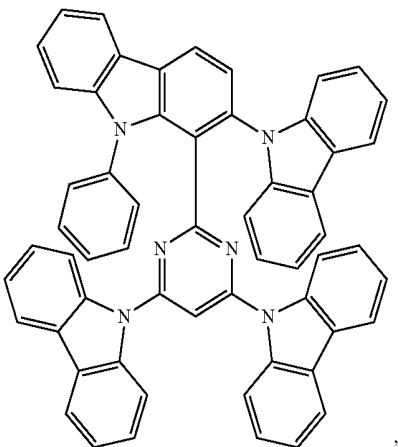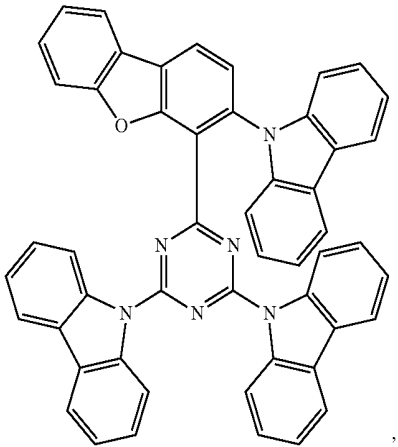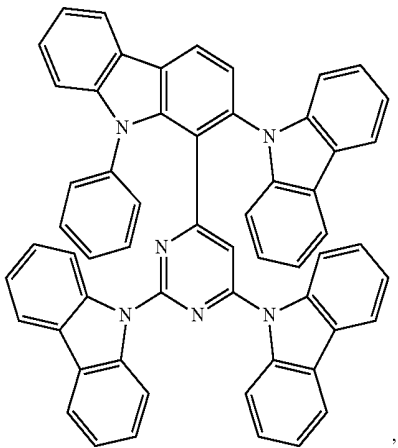


-continued

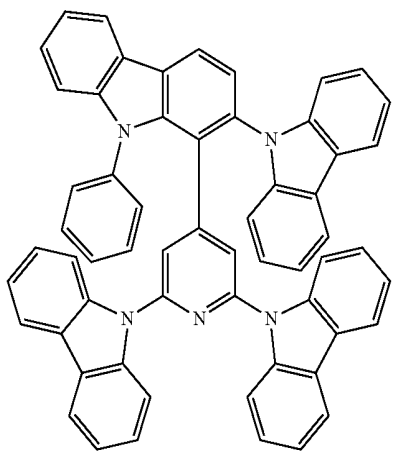





-continued

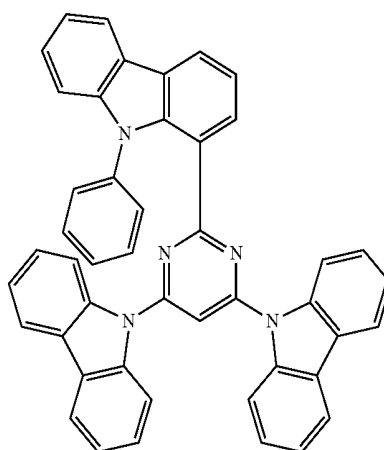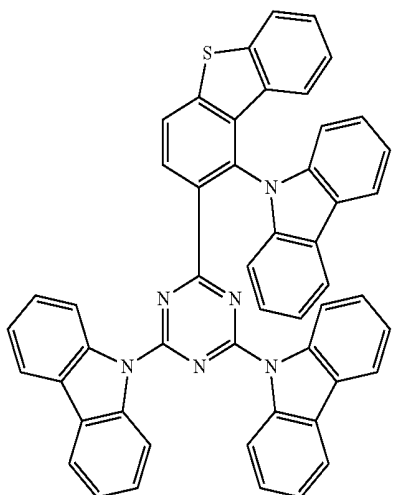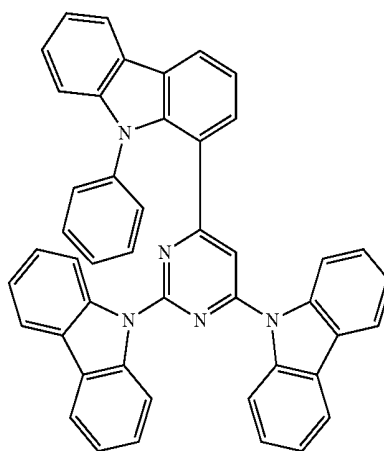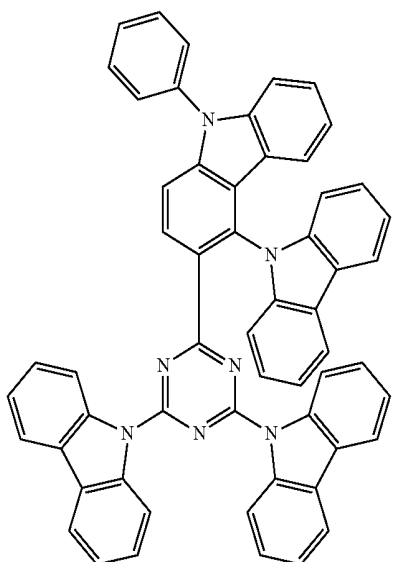
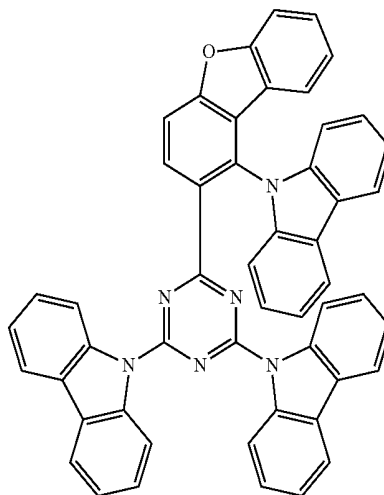


-continued

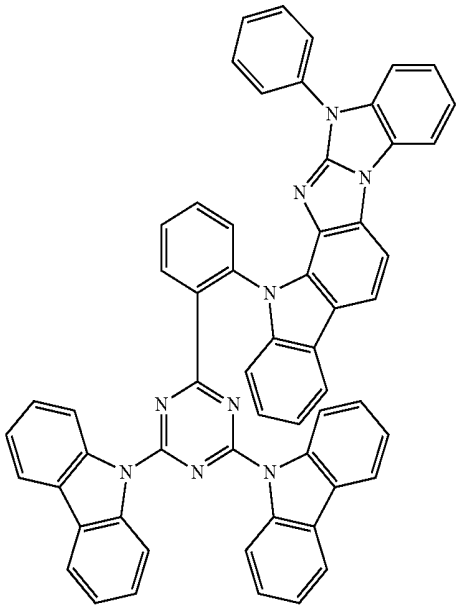


-continued

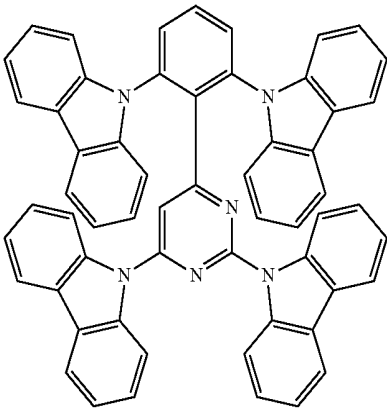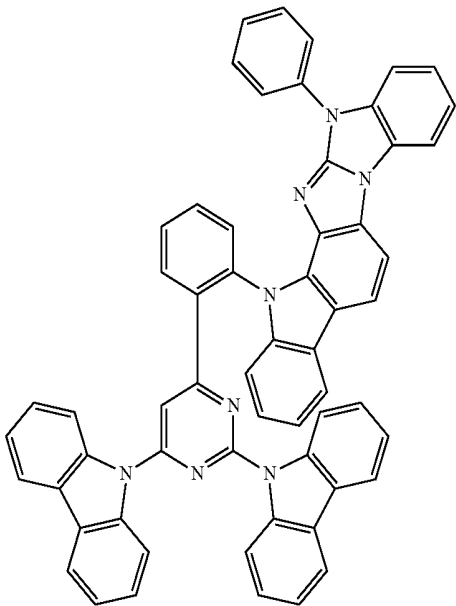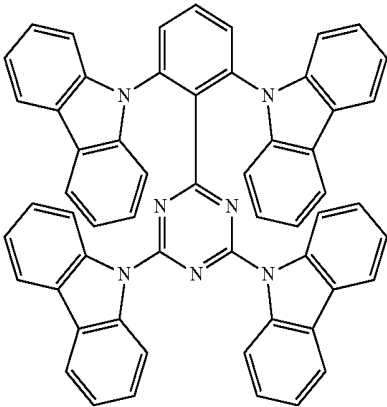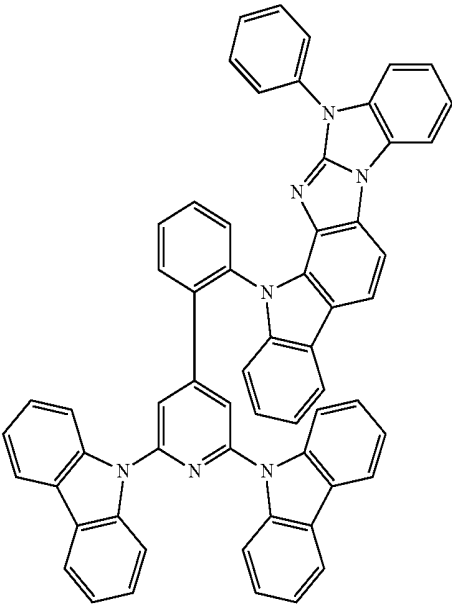

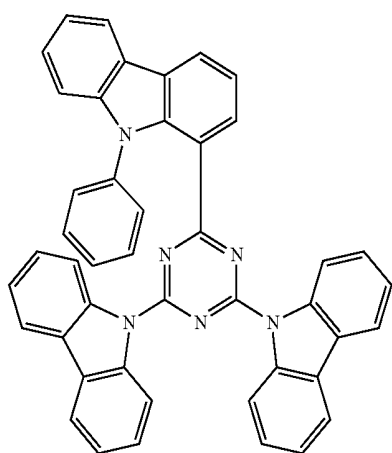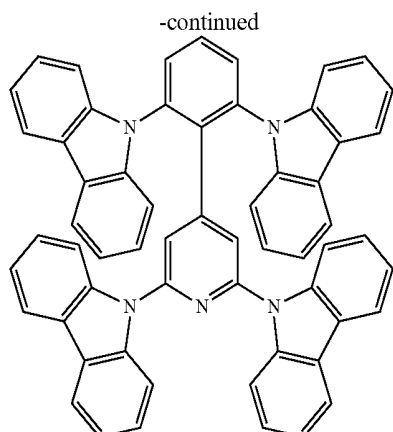

, and

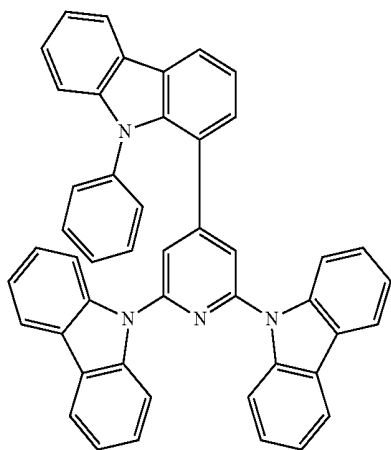

[0105] In another aspect, the present invention includes an organic light emitting device (OLED) comprising an anode, a cathode, and an organic layer, disposed between the anode and the cathode, comprising a compound according to Formula I.

[0106] In one embodiment, the OLED further comprises a sensitizer, wherein the organic layer comprises an acceptor and a host; wherein the acceptor is selected from the group consisting of fluorescent emitter, delayed fluorescence emitter, and combination thereof, and the host is the compound of Formula I.

[0107] In some embodiments, the OLED has one or more characteristics selected from the group consisting of being flexible, being rollable, being foldable, being stretchable, and being curved. In some embodiments, the OLED is transparent or semi-transparent. In some embodiments, the OLED further comprises a layer comprising carbon nano-tubes.

[0108] In some embodiments, the OLED further comprises a layer comprising a delayed fluorescent emitter. In some embodiments, the OLED comprises a RGB pixel arrangement or white plus color filter pixel arrangement. In some embodiments, the OLED is a mobile device, a hand held device, or a wearable device. In some embodiments, the OLED is a display panel having less than 10 inch diagonal or 50 square inch area. In some embodiments, the OLED is a display panel having at least 10 inch diagonal or 50 square inch area. In some embodiments, the OLED is a lighting panel.


[0109] The emitter dopants can be phosphorescent dopants and/or fluorescent dopants. The organic layer can include a compound according to Formula I, and its variations as described herein as a host.

[0110] In one embodiment, the organic layer is an emissive layer and the compound is an emissive dopant or a non-emissive dopant.


[0111] In one embodiment, the organic layer is an emissive layer and the compound is an emissive dopant or a non-emissive dopant.

[0112] In one embodiment, the organic layer is an emissive layer that comprises an emitter and a host; wherein the emitter is selected from the group consisting of phosphorescent emitter, fluorescent emitter, delayed fluorescent emitter, and combination thereof; and the host is the compound of Formula I.









[0113] In one embodiment, the phosphorescent emitter is a transition metal complex having at least one ligand or part of the ligand if the ligand is more than bidentate selected from the group consisting of:

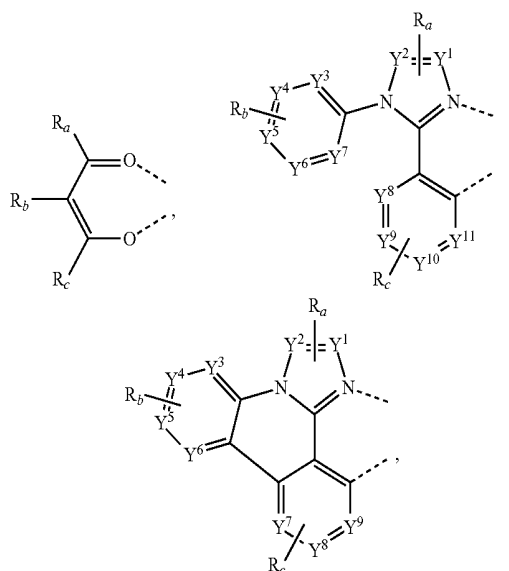


-continued

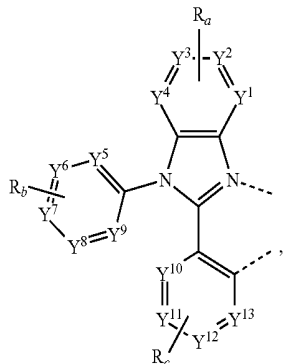

-continued

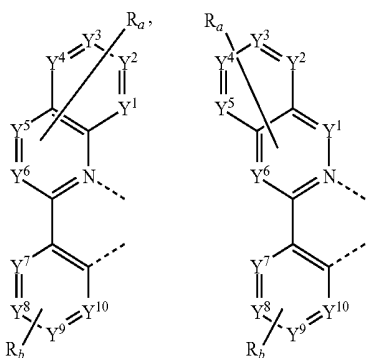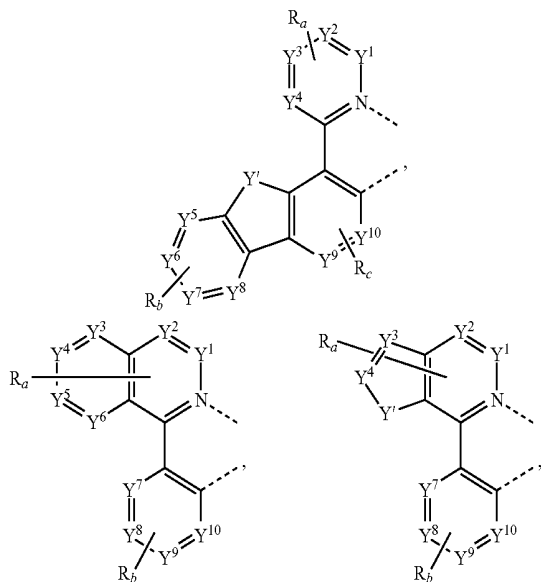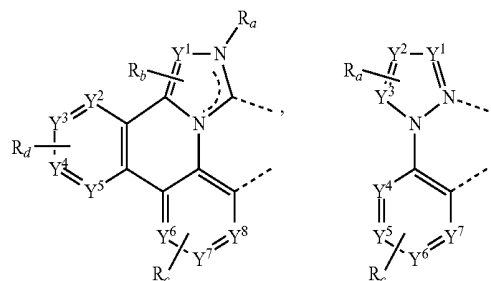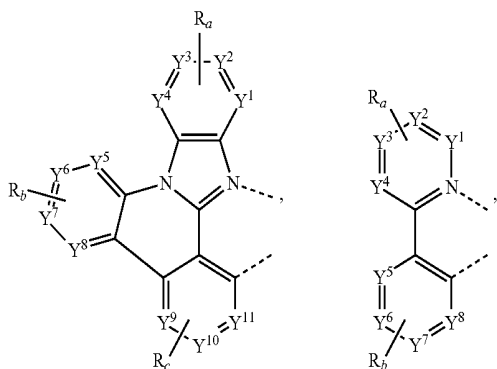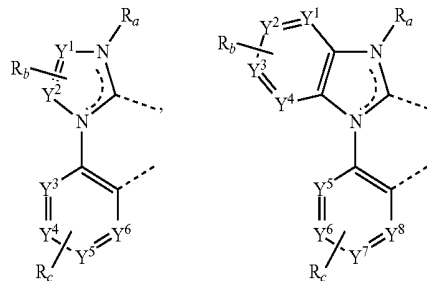



[0114] wherein each Y^1 to Y^{13} are independently selected from the group consisting of carbon and nitrogen;

[0115] wherein Y' is selected from the group consisting of BR_e , NR_e , PR_e , O , S , Se , $C=O$, $S=O$, SO_2 , CR_eR_f , SiR_eR_f , and GeR_eR_f ;

[0116] wherein R_e and R_f are optionally fused or joined to form a ring;

[0117] wherein each R_a , R_b , R_c , and R_d may independently represent from mono substitution to the maximum possible number of substitution, or no substitution;

[0118] wherein each R_a , R_b , R_c , R_d , R_e and R_f is independently selected from the group consisting of hydrogen, deuterium, halide, alkyl, cycloalkyl, heteroalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carbonyl, carboxylic acid, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and

[0119] wherein any two adjacent substituents of R_a , R_b , R_c , and R_d are optionally fused or joined to form a ring or form a multidentate ligand.

[0120] In another aspect, the present invention includes a consumer product comprising an organic light emitting device (OLED) comprising an anode, a cathode, and an organic layer, disposed between the anode and the cathode, comprising a compound according to Formula I.

[0121] According to another aspect, a formulation comprising the compound described herein is also disclosed.

[0122] The OLED disclosed herein can be incorporated into one or more of a consumer product, an electronic component module, and a lighting panel.

[0123] In yet another aspect of the present disclosure, a formulation that comprises the novel compound disclosed herein is described. The formulation can include one or more components selected from the group consisting of a solvent, a host, a hole injection material, hole transport material, electron blocking material, hole blocking material, and an electron transport layer material, disclosed herein.

[0124] The present disclosure encompasses any chemical structure comprising the novel compound of the present disclosure, or a monovalent or polyvalent variant thereof. In other words, the inventive compound, or a monovalent or polyvalent variant thereof, can be a part of a larger chemical structure. Such chemical structure can be selected from the group consisting of a monomer, a polymer, a macromolecule, and a supramolecule (also known as supermolecule). As used herein, a "monovalent variant of a compound" refers to a moiety that is identical to the compound except that one hydrogen has been removed and replaced with a

bond to the rest of the chemical structure. As used herein, a "polyvalent variant of a compound" refers to a moiety that is identical to the compound except that more than one hydrogen has been removed and replaced with a bond or bonds to the rest of the chemical structure. In the instance of a supramolecule, the inventive compound can also be incorporated into the supramolecule complex without covalent bonds.


Combination with Other Materials



[0125] The materials described herein as useful for a particular layer in an organic light emitting device may be used in combination with a wide variety of other materials present in the device. For example, emissive dopants disclosed herein may be used in conjunction with a wide variety of hosts, transport layers, blocking layers, injection layers, electrodes and other layers that may be present. The materials described or referred to below are non-limiting examples of materials that may be useful in combination with the compounds disclosed herein, and one of skill in the art can readily consult the literature to identify other materials that may be useful in combination.

Conductivity Dopants:

[0126] A charge transport layer can be doped with conductivity dopants to substantially alter its density of charge carriers, which will in turn alter its conductivity. The conductivity is increased by generating charge carriers in the matrix material, and depending on the type of dopant, a change in the Fermi level of the semiconductor may also be achieved. Hole-transporting layer can be doped by p-type conductivity dopants and n-type conductivity dopants are used in the electron-transporting layer.

[0127] Non-limiting examples of the conductivity dopants that may be used in an OLED in combination with materials disclosed herein are exemplified below together with references that disclose those materials: EP01617493, EP01968131, EP2020694, EP2684932, US20050139810, US20070160905, US20090167167, US2010288362, WO06081780, WO2009003455, WO2009008277, WO2009011327, WO2014009310, US2007252140, US2015060804, US20150123047, and US2012146012.

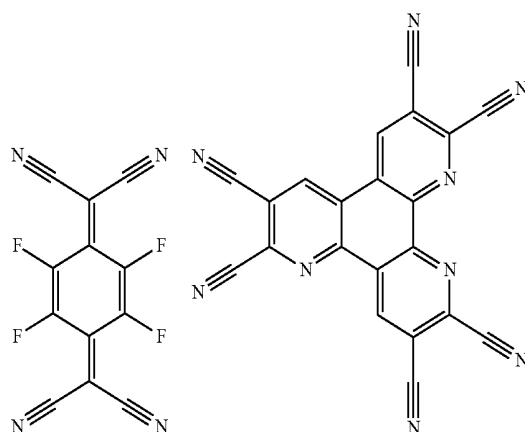

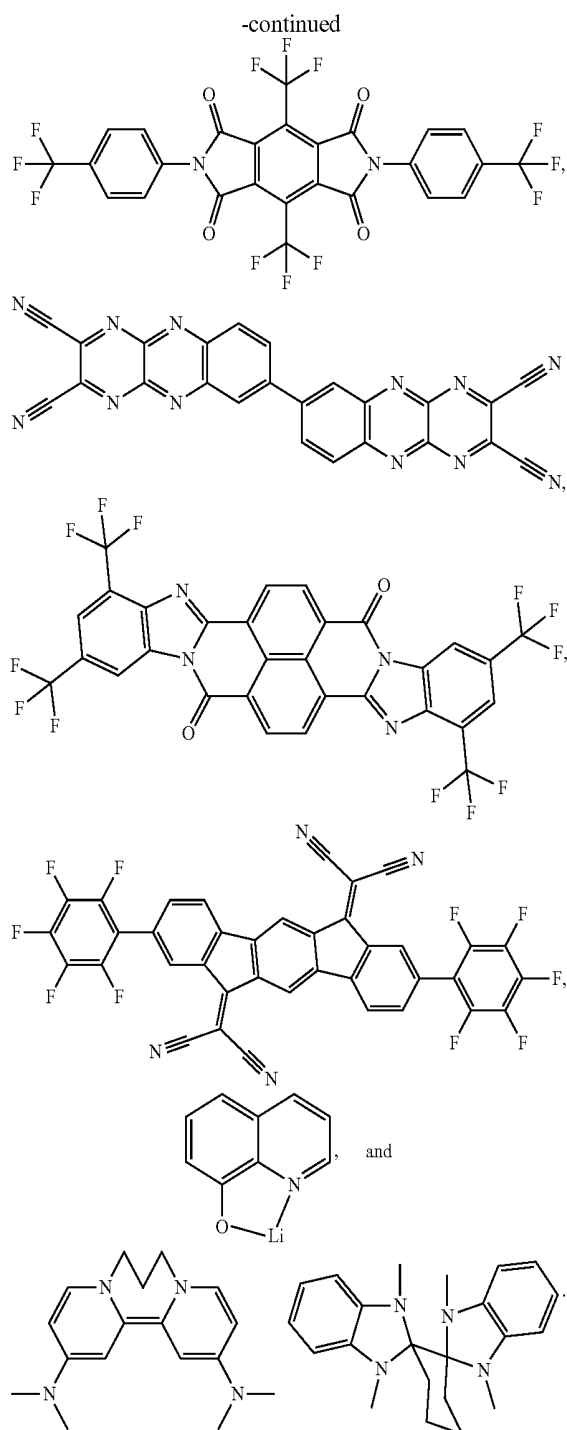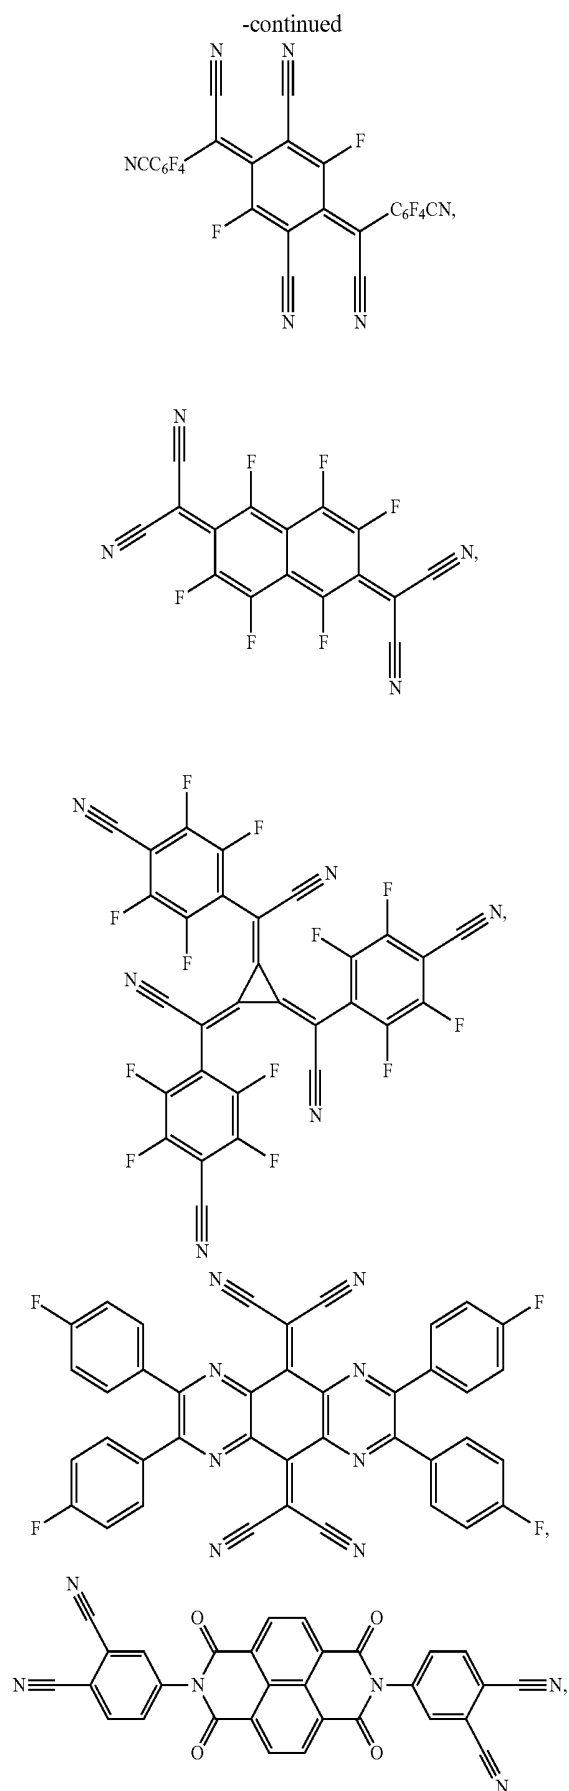


[0128] HIL/HTL:

[0129] A hole injecting/transporting material to be used in the present invention is not particularly limited, and any compound may be used as long as the compound is typically used as a hole injecting/transporting material. Examples of the material include, but are not limited to: a phthalocyanine or porphyrin derivative; an aromatic amine derivative; an indolocarbazole derivative; a polymer containing fluorohydrocarbon; a polymer with conductivity dopants; a conducting polymer, such as PEDOT/PSS; a self-assembly monomer derived from compounds such as phosphonic acid and silane derivatives; a metal oxide derivative, such as MoO_x;


a p-type semiconducting organic compound, such as 1,4,5,8,9,12-Hexaazatriphenylenehexacarbonitrile; a metal complex, and a cross-linkable compounds.

[0130] Examples of aromatic amine derivatives used in HIL or HTL include, but are not limited to the following general structures:

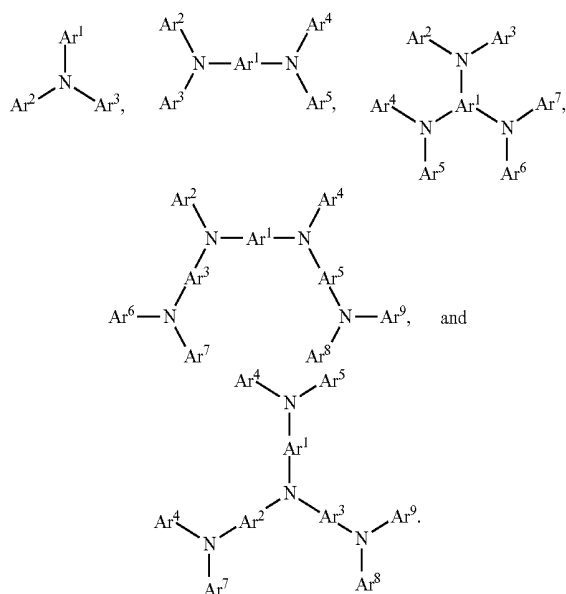


[0131] Each of Ar¹ to Ar⁹ is selected from the group consisting of aromatic hydrocarbon cyclic compounds such as benzene, biphenyl, triphenyl, triphenylene, naphthalene, anthracene, phenalene, phenanthrene, fluorene, pyrene, chrysene, perylene, and azulene; the group consisting of aromatic heterocyclic compounds such as dibenzothio-phenene, dibenzofuran, dibenzoselenophene, furan, thiophene, benzofuran, benzothiophene, benzoselenophene, carbazole, indolocarbazole, pyridylindole, pyrrolodipyridine, pyrazole, imidazole, triazole, oxazole, thiazole, oxadiazole, oxatriazole, dioxazole, thiadiazole, pyridine, pyridazine, pyrimidine, pyrazine, triazine, oxazine, oxathiazine, oxadiazine, indole, benzimidazole, indazole, indoxazine, benzoxazole, benzisoxazole, benzothiazole, quinoline, isoquinoline, cinnoline, quinazoline, quinoxaline, naphthyridine, phthalazine, pteridine, xanthene, acridine, phenazine, phenothiazine, phenoxazine, benzofuopyridine, furodipyridine, benzothienopyridine, thienodipyridine, benzoselenophenopyridine, and selenophenodipyridine; and the group consisting of 2 to 10 cyclic structural units which are groups of the same type or different types selected from the aromatic hydrocarbon cyclic group and the aromatic heterocyclic group and are bonded to each other directly or via at least one of oxygen atom, nitrogen atom, sulfur atom, silicon atom, phosphorus atom, boron atom, chain structural unit and the aliphatic cyclic group. Each Ar may be unsubstituted or may be substituted by a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acids, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof.

[0132] In one aspect, Ar¹ to Ar⁹ is independently selected from the group consisting of:

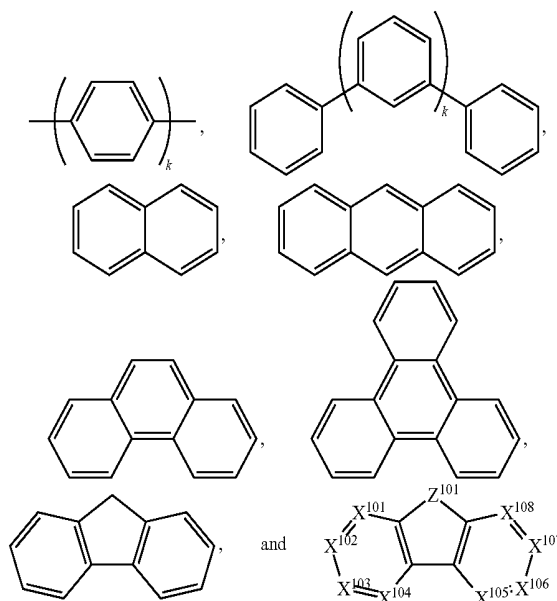

wherein k is an integer from 1 to 20; X¹⁰¹ to X¹⁰⁸ is C (including CH) or N; Z¹⁰¹ is NAr¹, O, or S; Ar¹ has the same group defined above.

[0133] Examples of metal complexes used in HIL or HTL include, but are not limited to the following general formula:



wherein Met is a metal, which can have an atomic weight greater than 40; (Y¹⁰¹-Y¹⁰²) is a bidentate ligand, Y¹⁰¹ and Y¹⁰² are independently selected from C, N, O, P, and S; L¹⁰¹ is an ancillary ligand; k' is an integer value from 1 to the maximum number of ligands that may be attached to the metal; and k'+k'' is the maximum number of ligands that may be attached to the metal.

[0134] In one aspect, (Y¹⁰¹-Y¹⁰²) is a 2-phenylpyridine derivative. In another aspect, (Y¹⁰¹-Y¹⁰²) is a carbene ligand. In another aspect, Met is selected from Ir, Pt, Os, and Zn. In a further aspect, the metal complex has a smallest oxidation potential in solution vs. Fc⁺/Fc couple less than about 0.6 V.


[0135] Non-limiting examples of the HIL and HTL materials that may be used in an OLED in combination with materials disclosed herein are exemplified below together with references that disclose those materials: CN102702075, DE102012005215, EP01624500, EP01698613, EP01806334, EP01930964, EP01972613, EP01997799, EP02011790, EP02055700, EP02055701, EP1725079, EP2085382, EP2660300, EP650955, JP07-073529, JP2005112765, JP2007091719, JP2008021687, JP2014-009196, KR20110088898, KR20130077473, TW201139402, U.S. Ser. No. 06/517,957, US20020158242, US20030162053, US20050123751, US20060182993, US20060240279, US20070145888, US20070181874, US20070278938, US20080014464, US20080091025, US20080106190, US20080124572, US20080145707, US20080220265, US20080233434, US20080303417, US2008107919, US20090115320, US20090167161,

US2009066235, US2011007385, US20110163302,
US2011240968, US2011278551, US2012205642,
US2013241401, US20140117329, US2014183517, U.S.
Pat. Nos. 5,061,569, 5,639,914, WO05075451,
WO07125714, WO08023550, WO08023759,
WO2009145016, WO2010061824, WO2011075644,




WO2012177006, WO2013087142, WO2013157367,
WO2014015935, WO2014030921, WO2014157018,

WO2013018530, WO2013118812, WO2013175747,
WO2014015937, WO2014034791,


WO2013039073, WO2013120577, WO2014002873,
WO2014030872, WO2014104514,

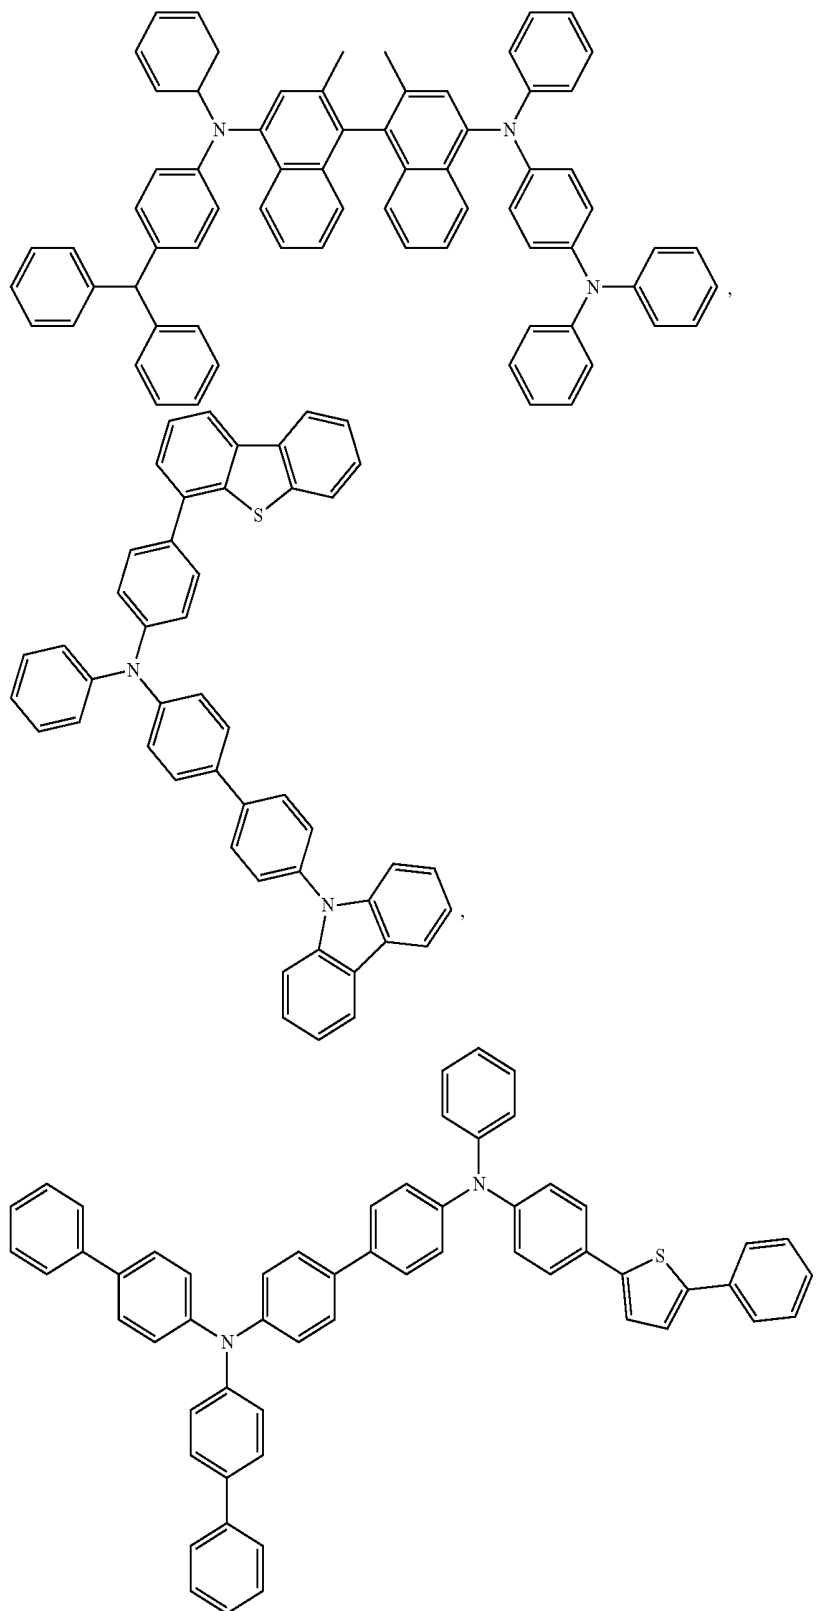







-continued

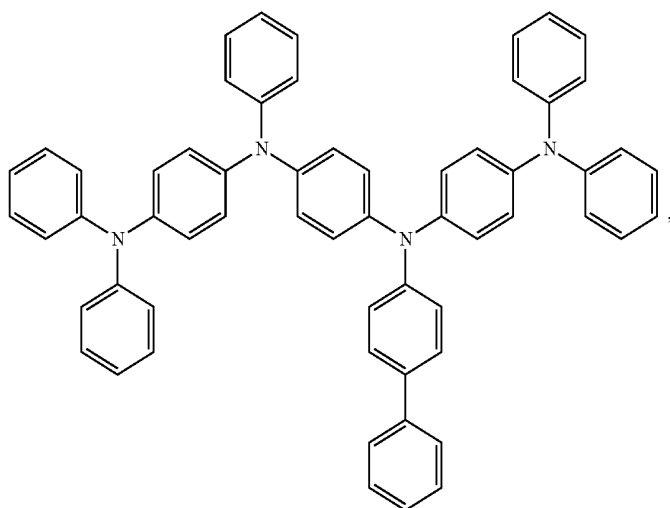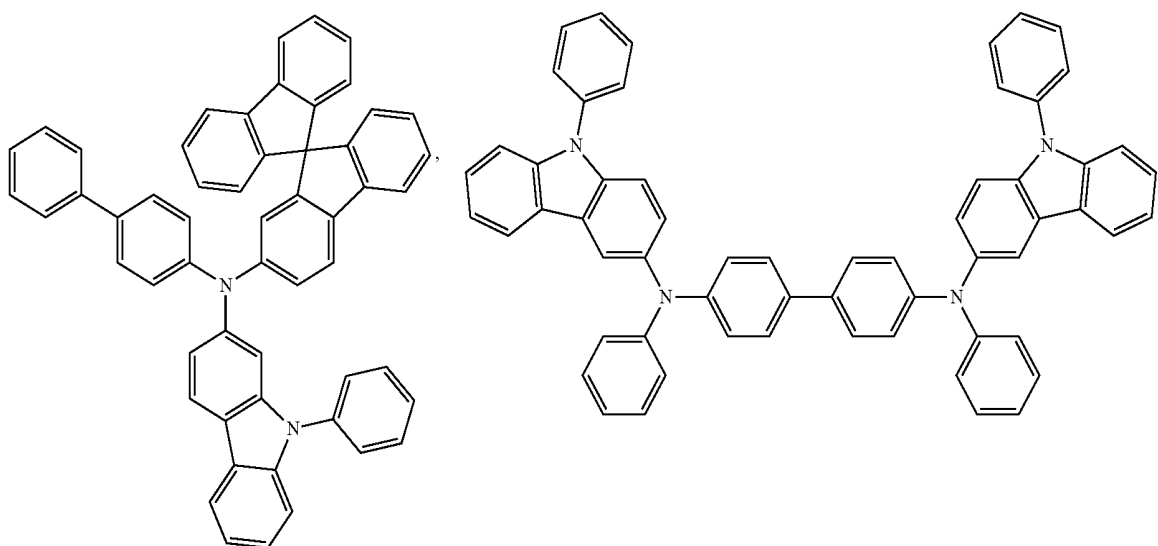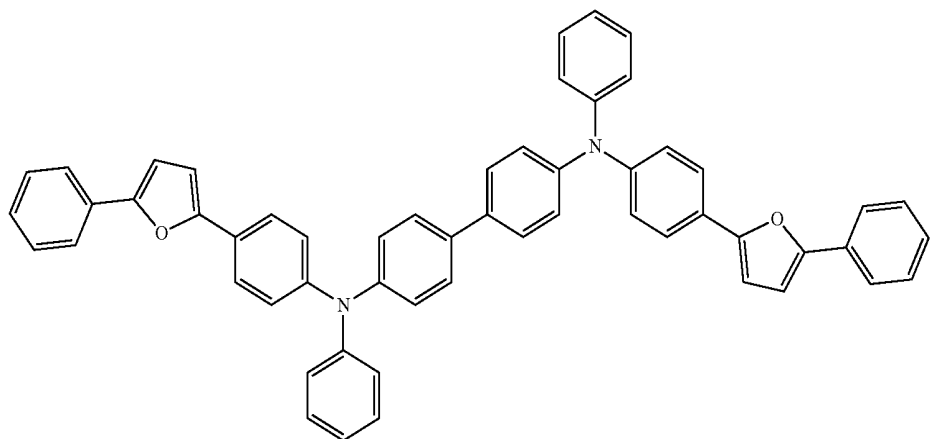




-continued

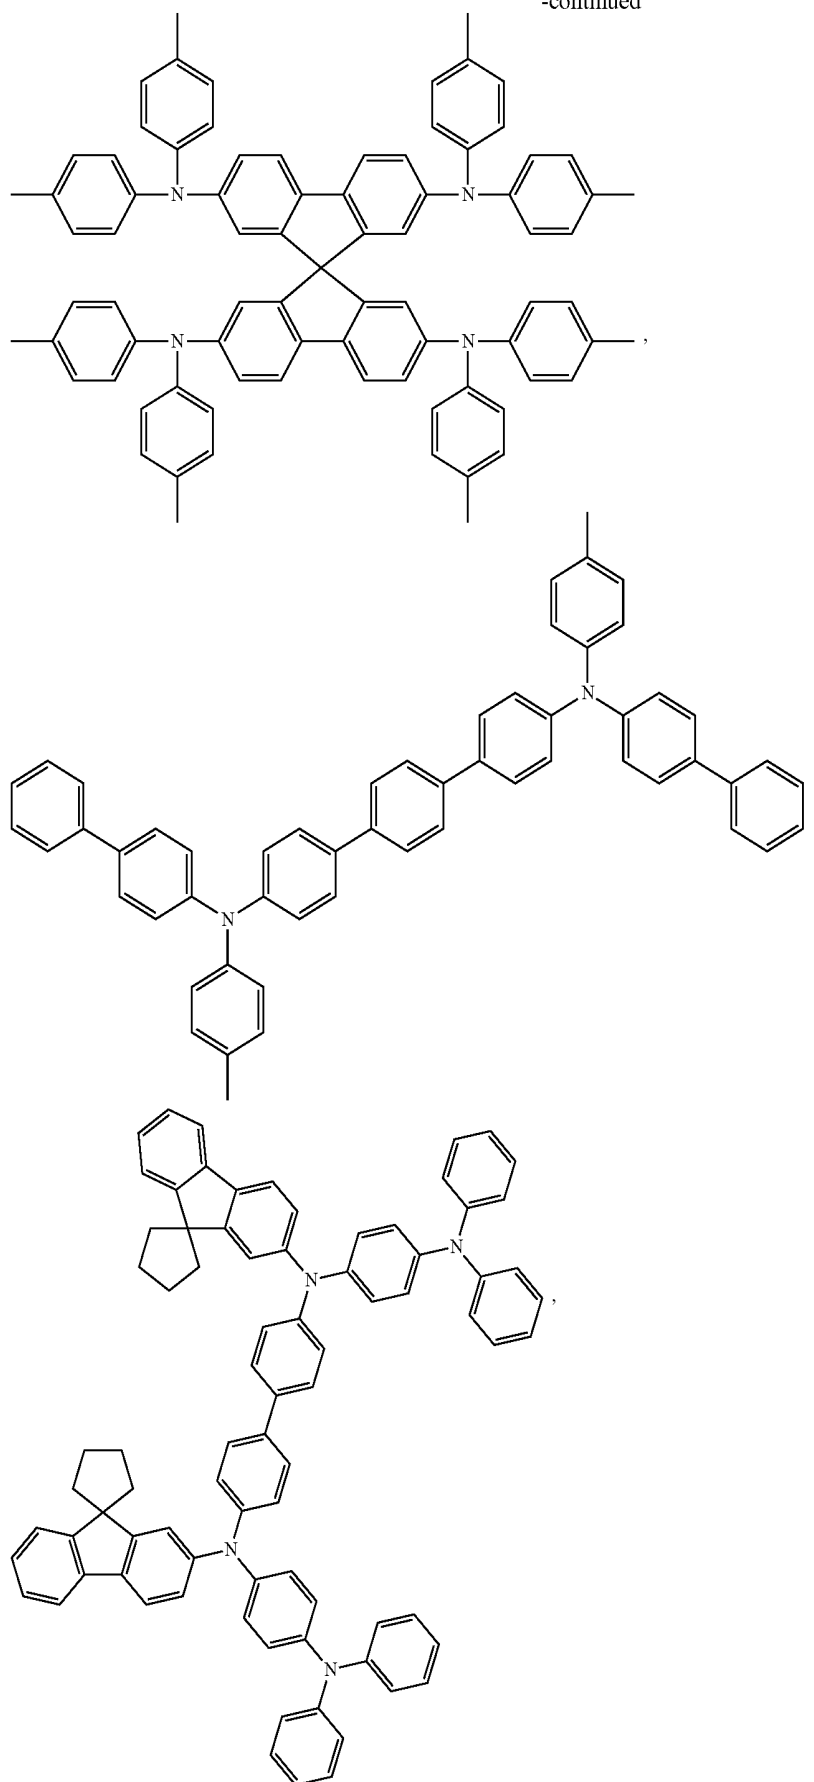




-continued

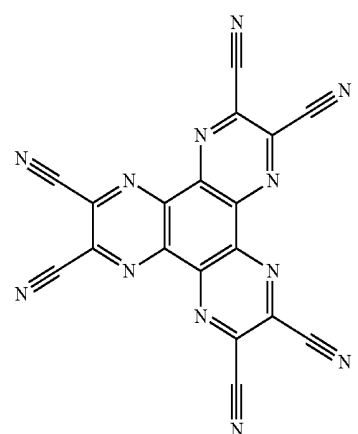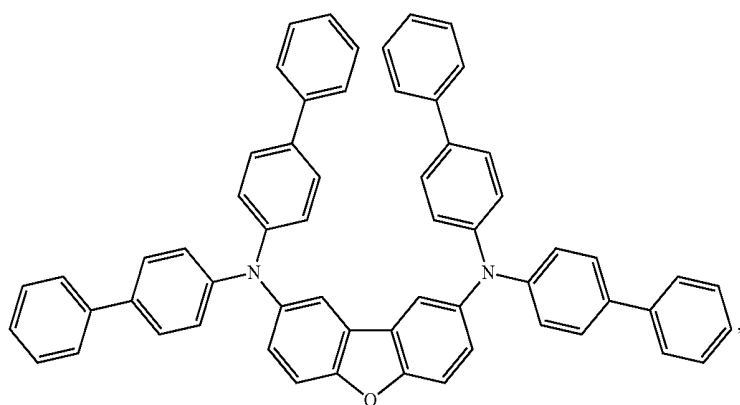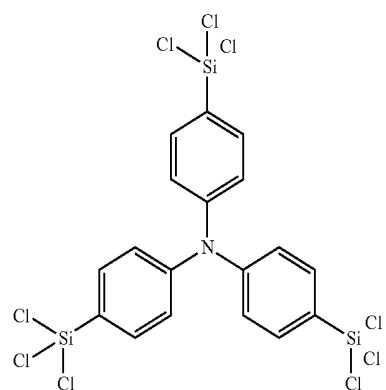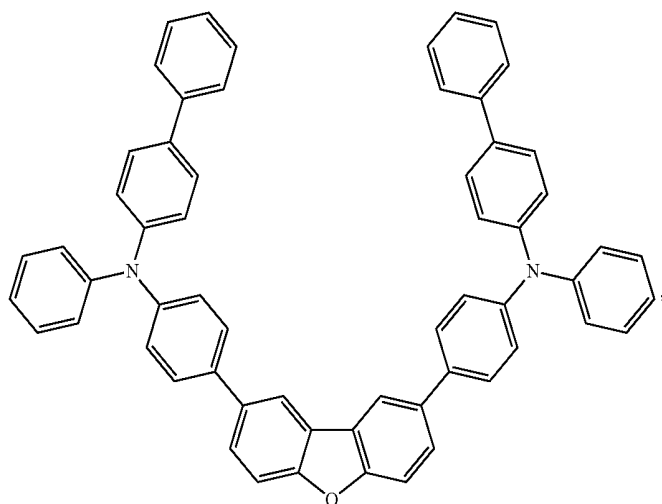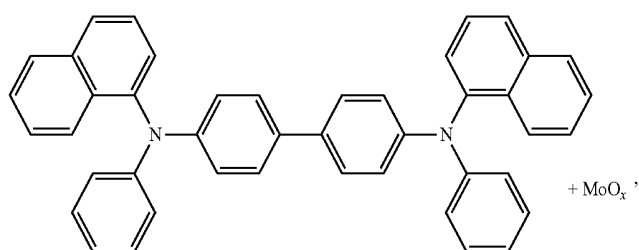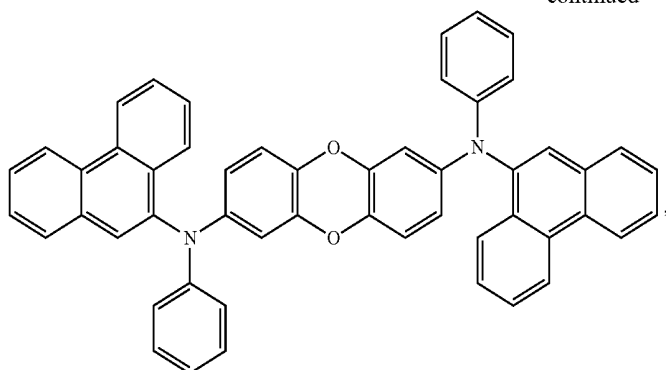




-continued

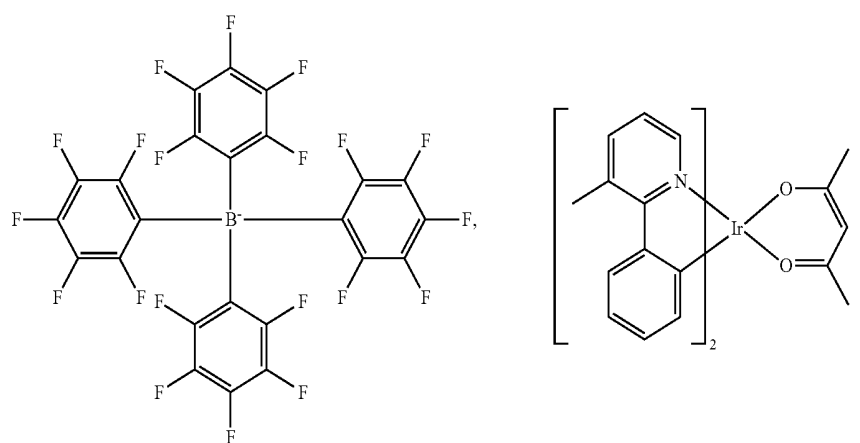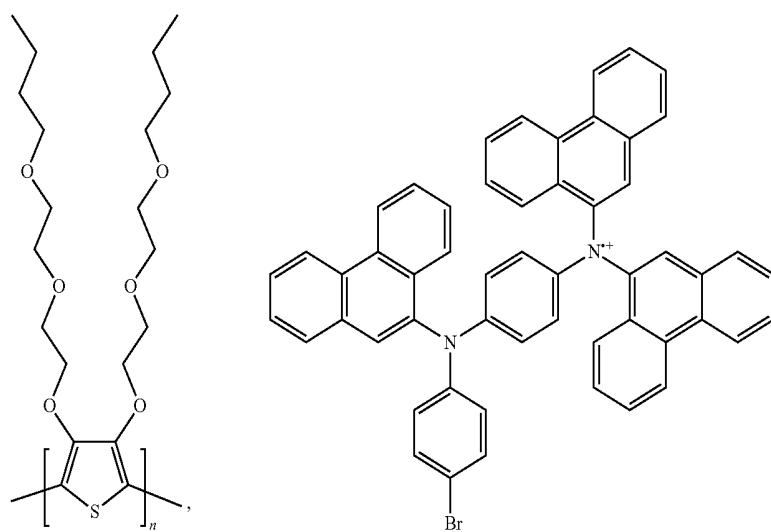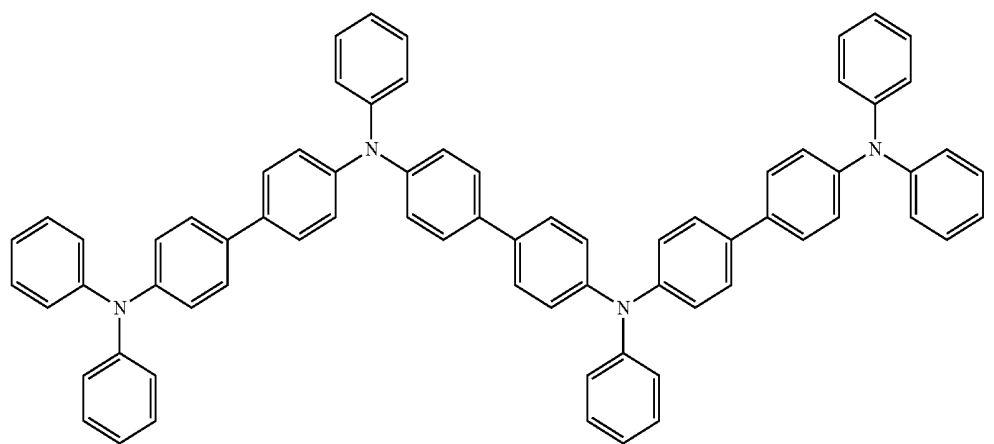





-continued

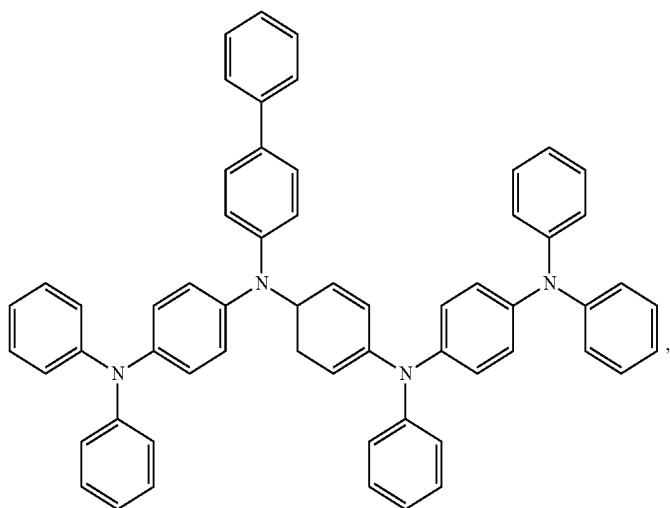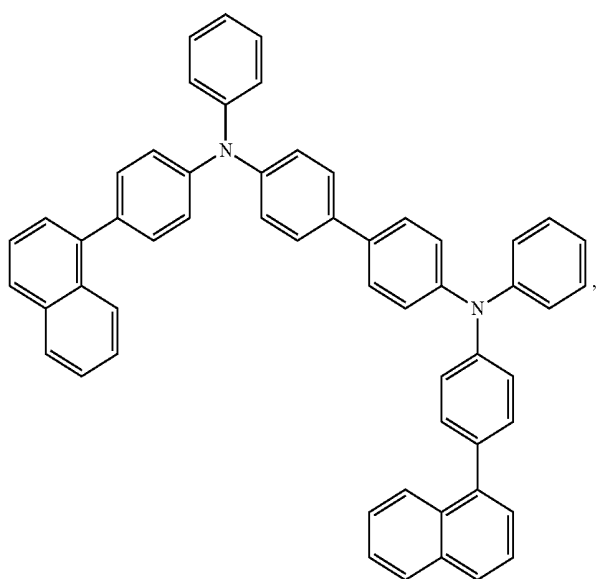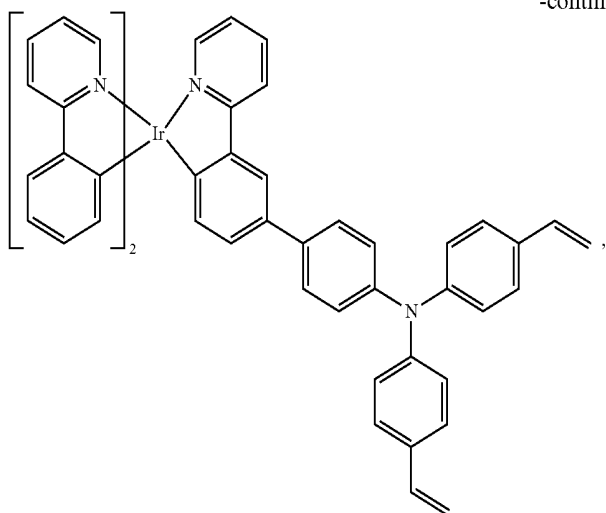





-continued

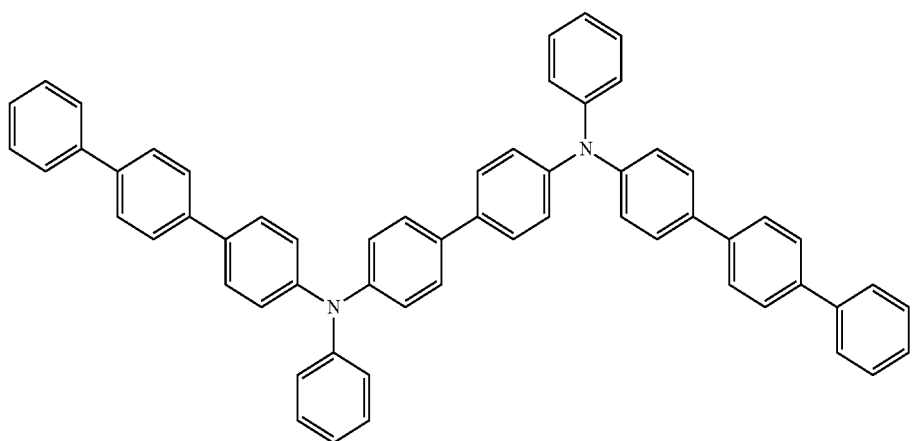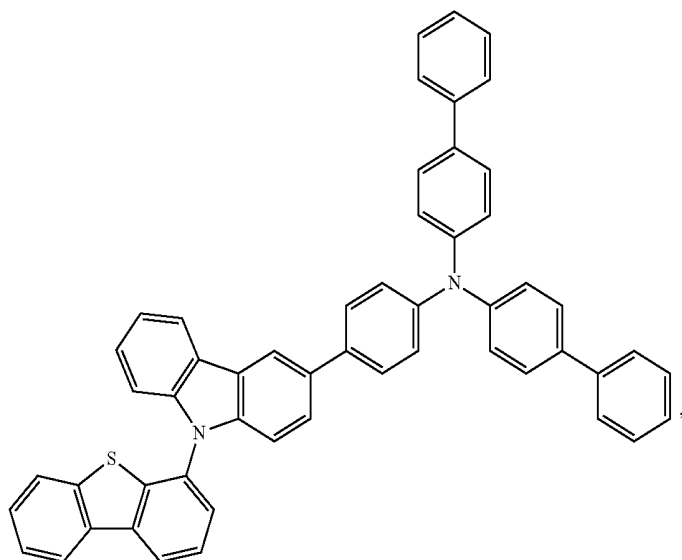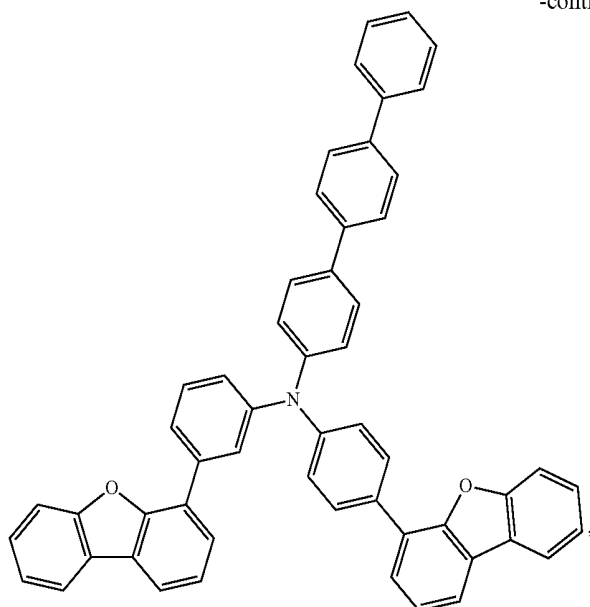






-continued

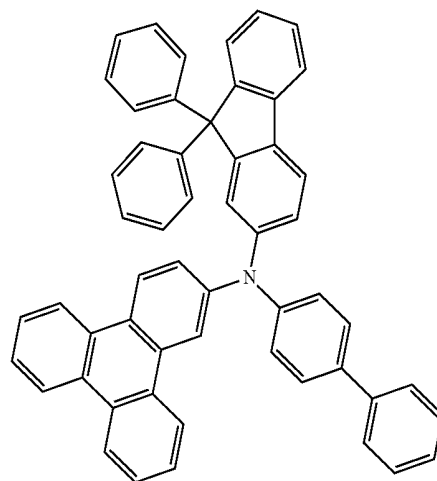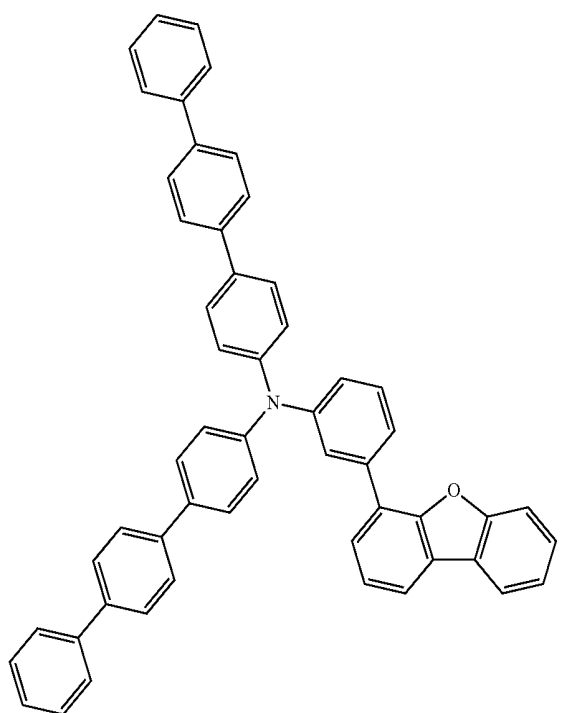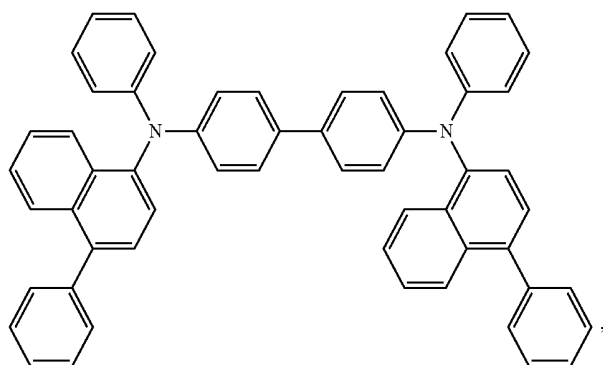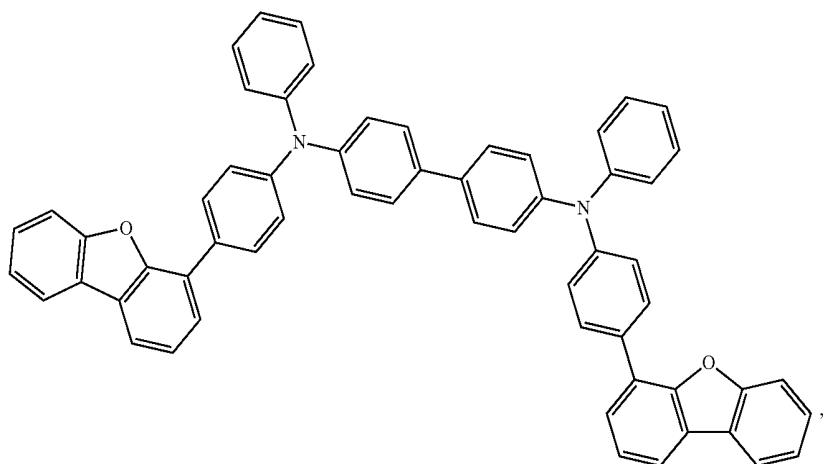




-continued

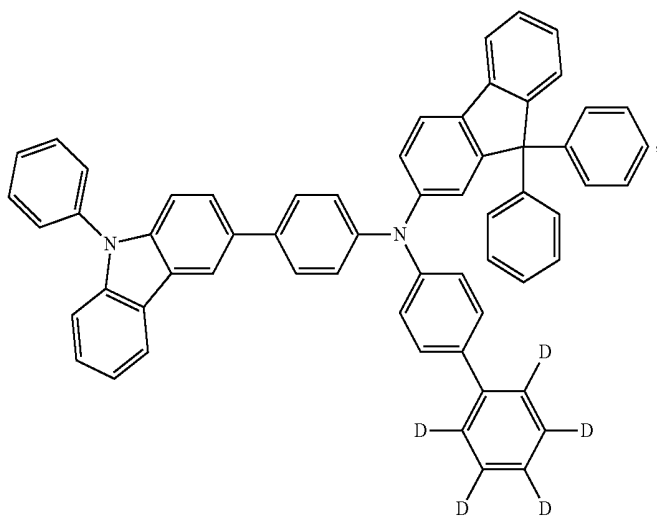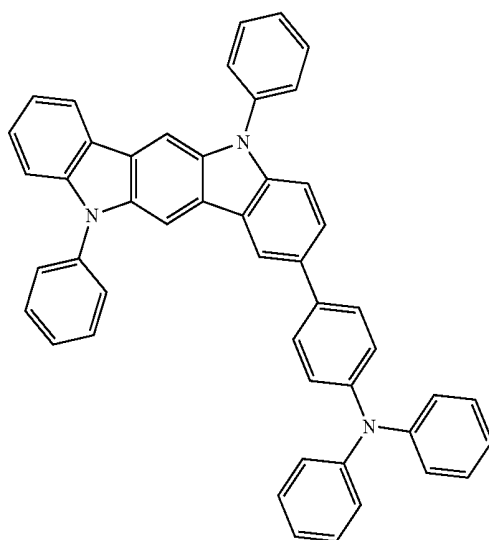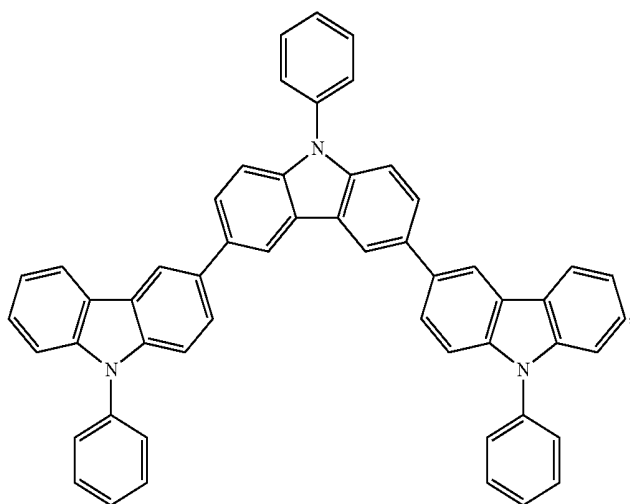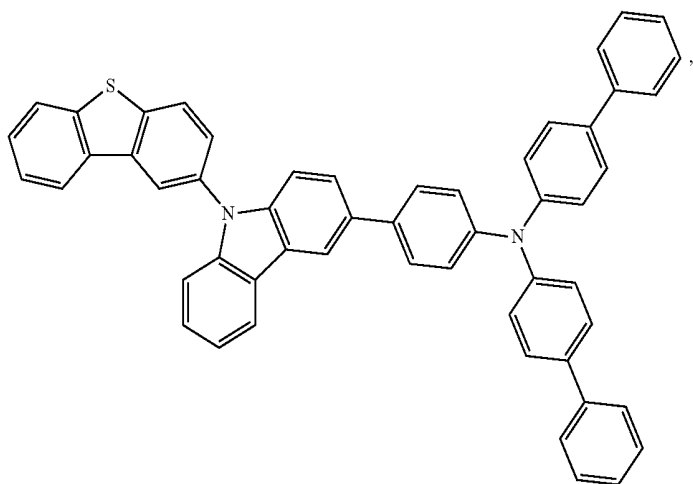




-continued

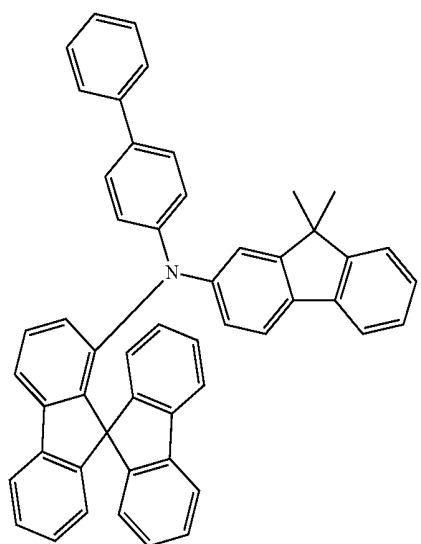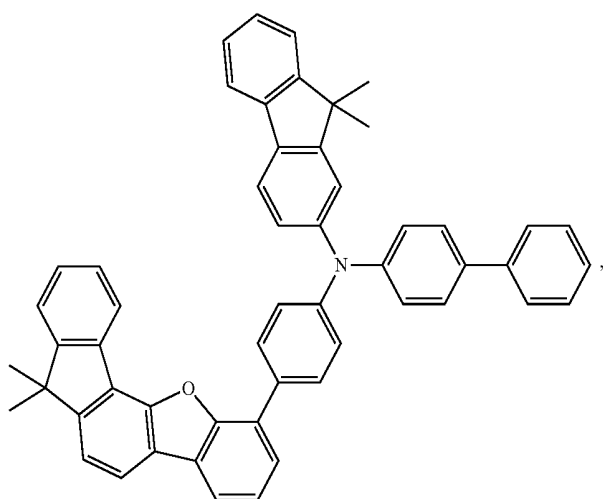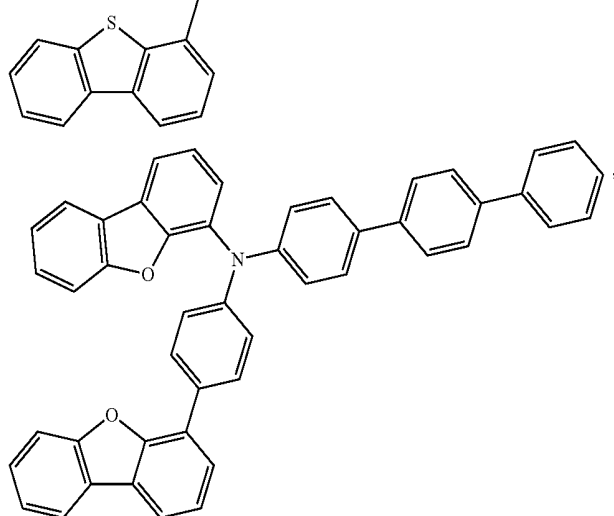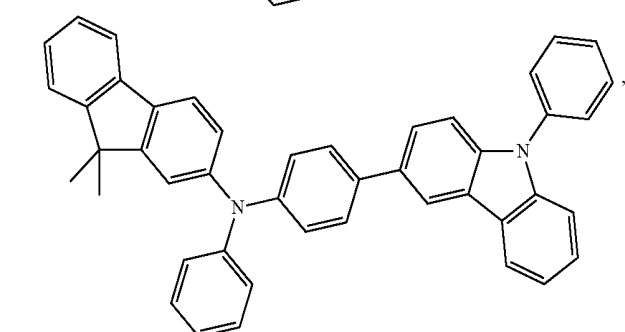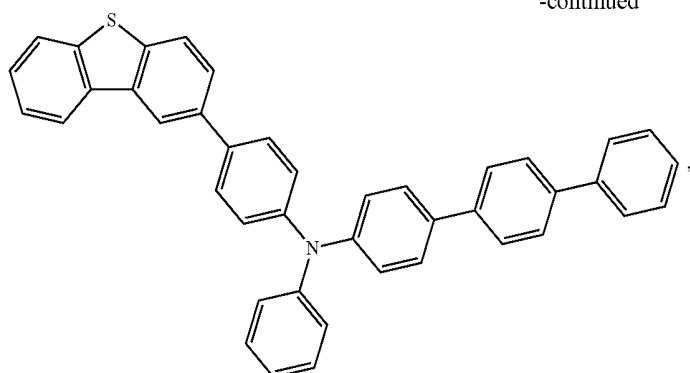





-continued

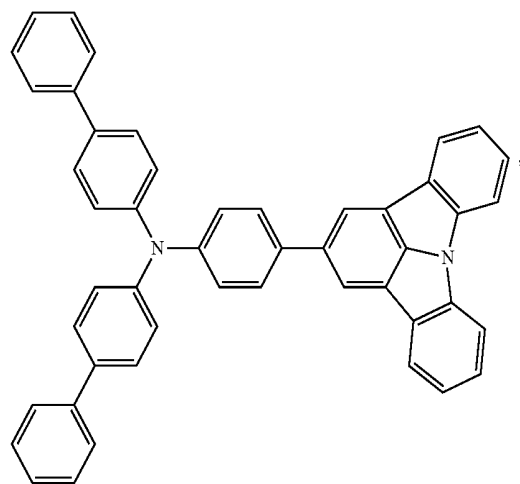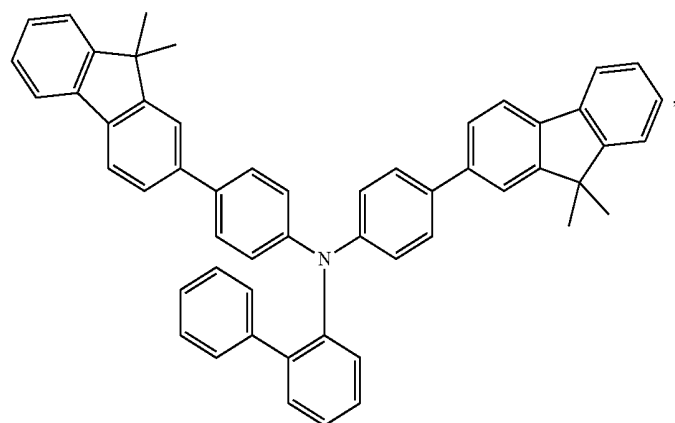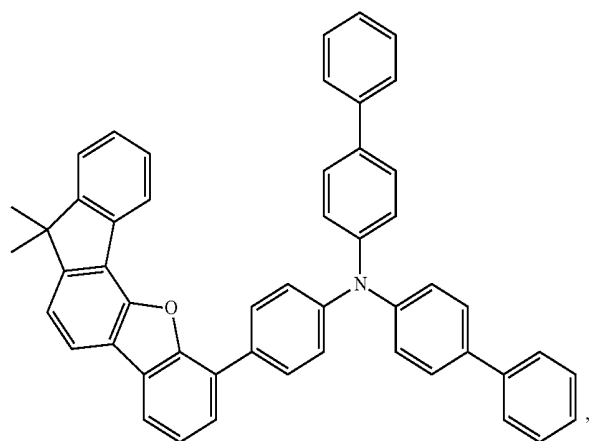




-continued

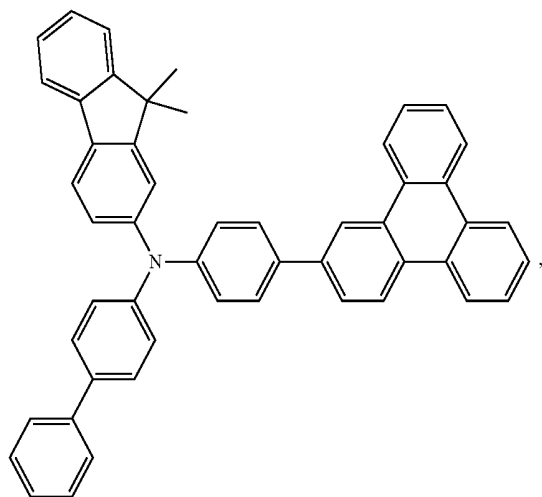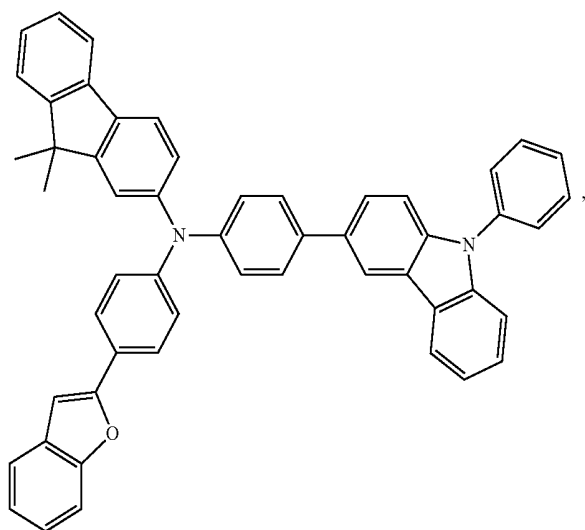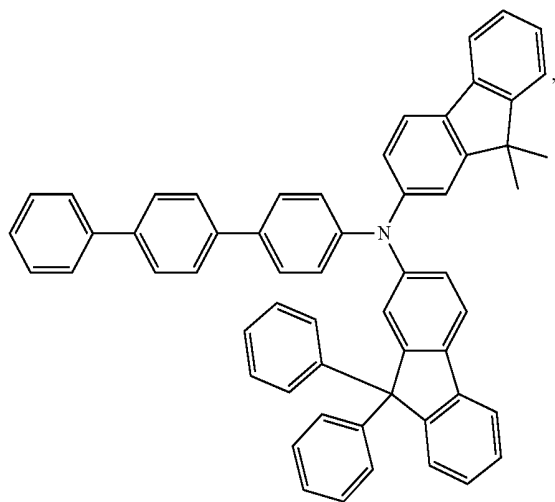




-continued

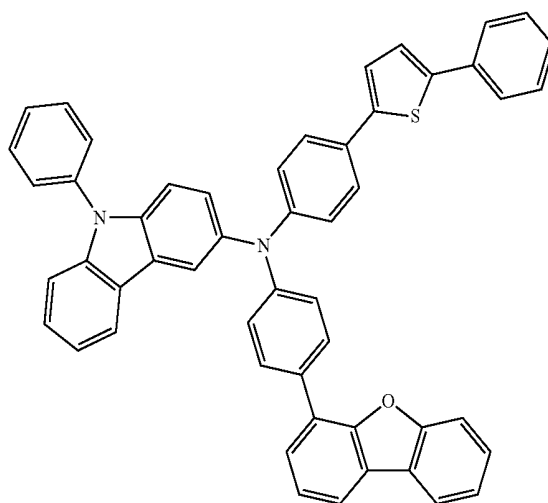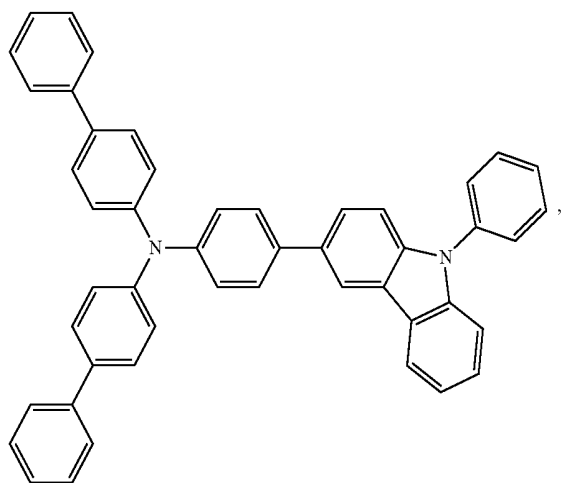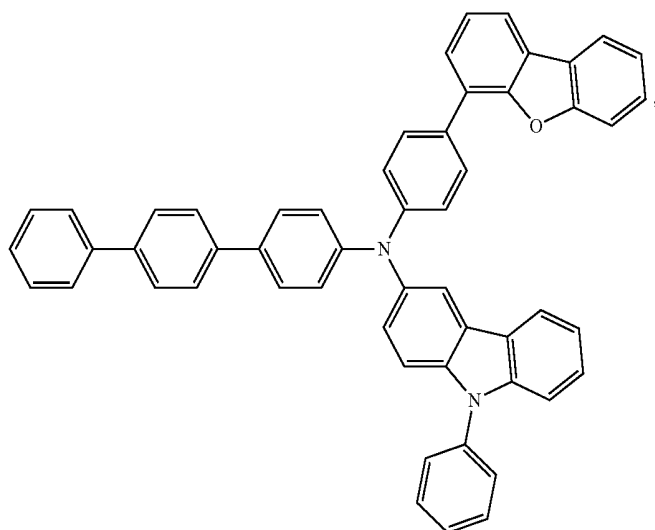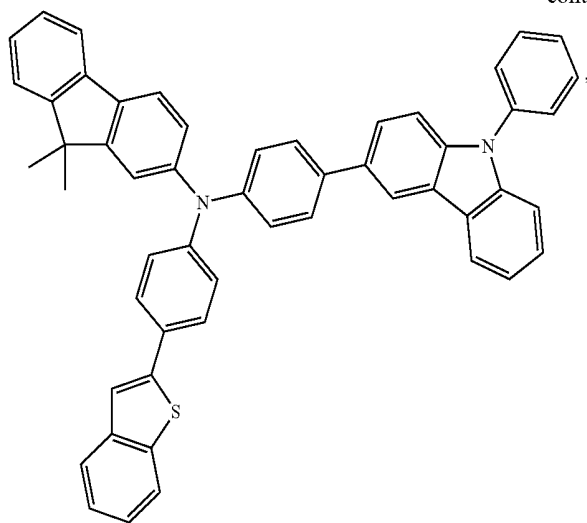





-continued

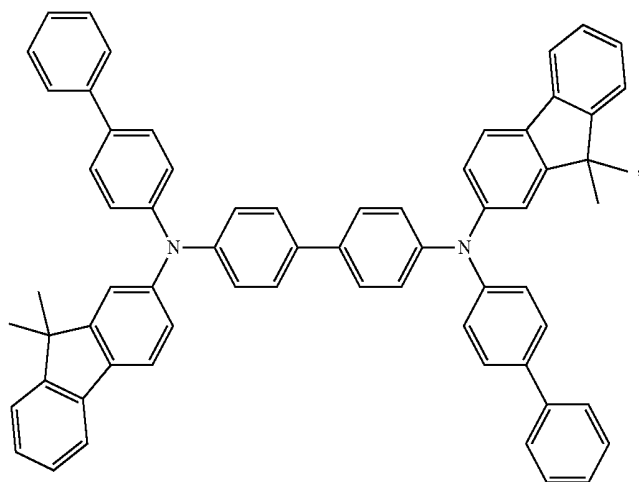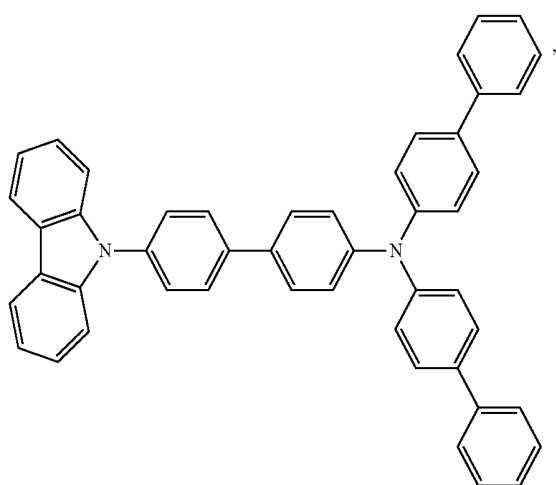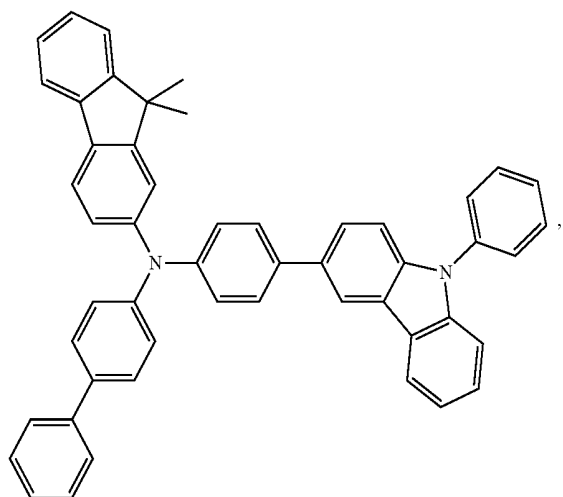




-continued

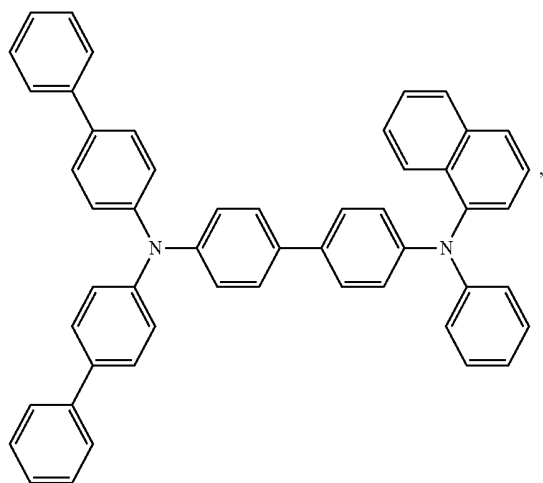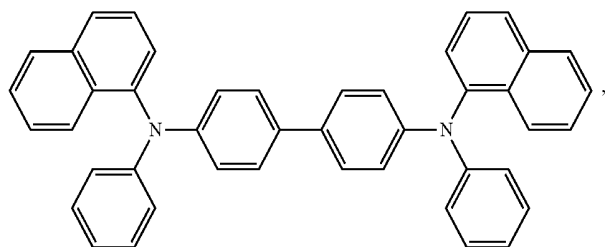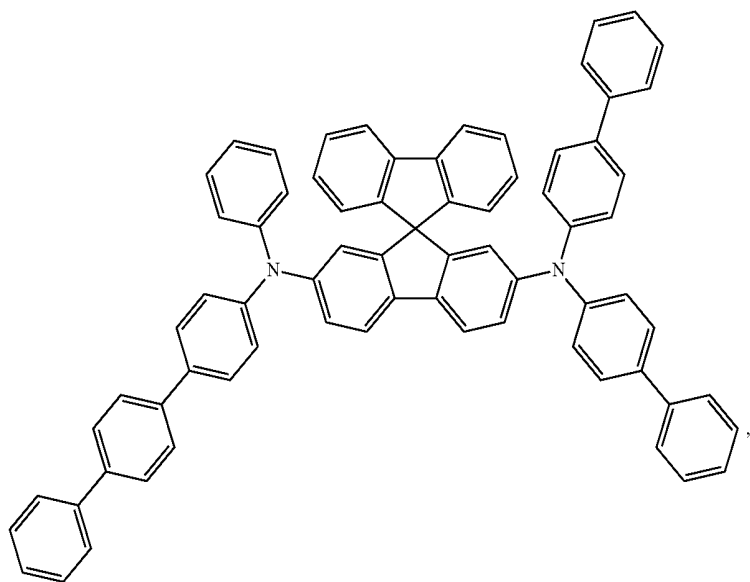

-continued

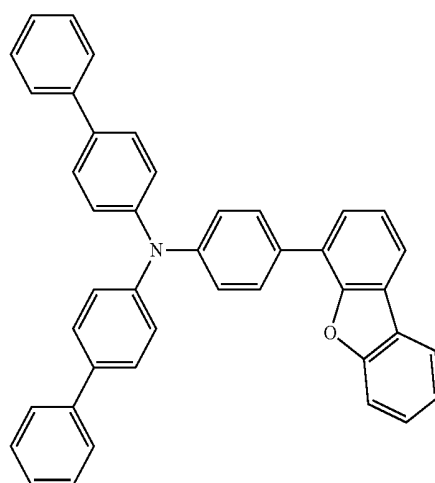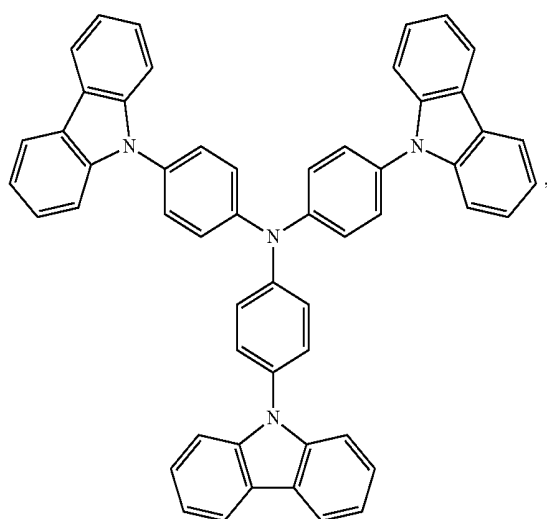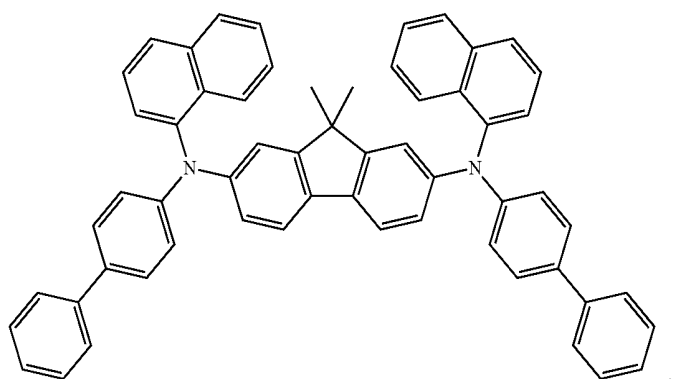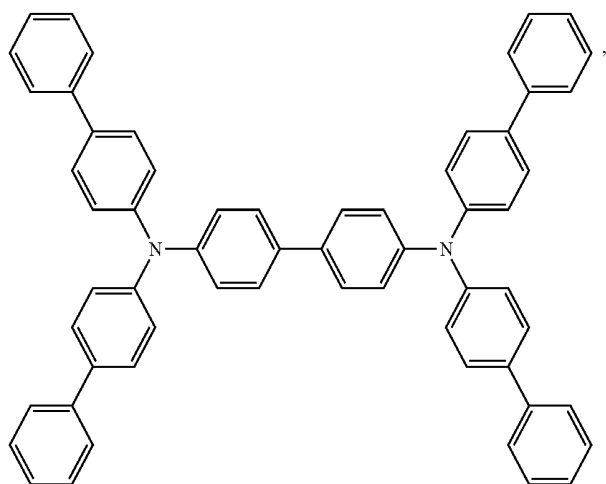

-continued

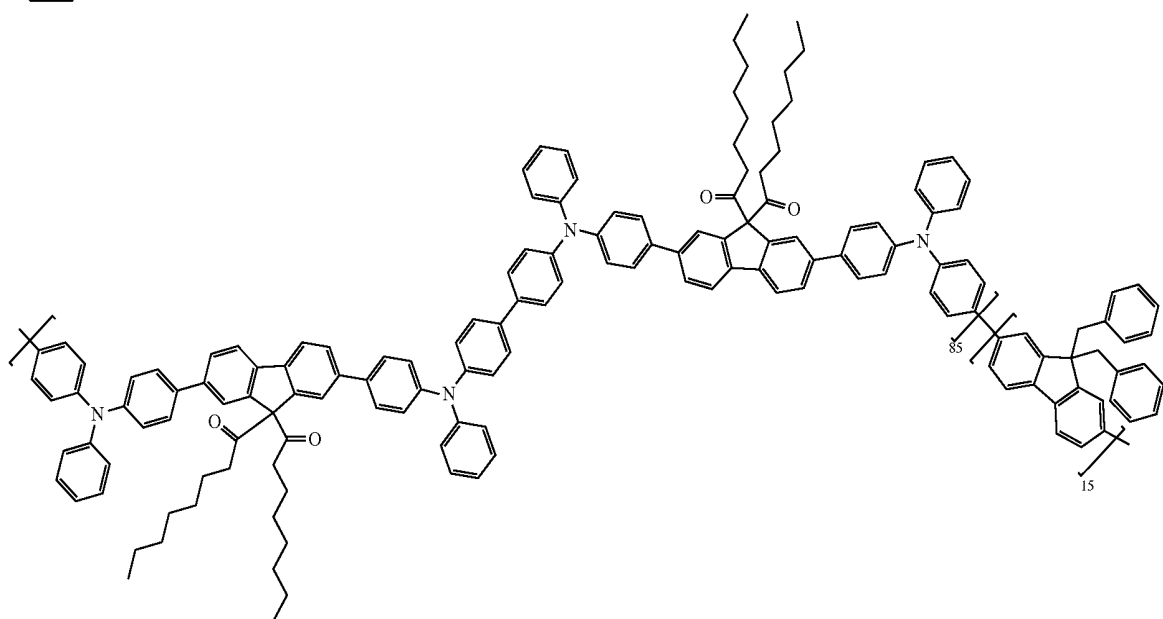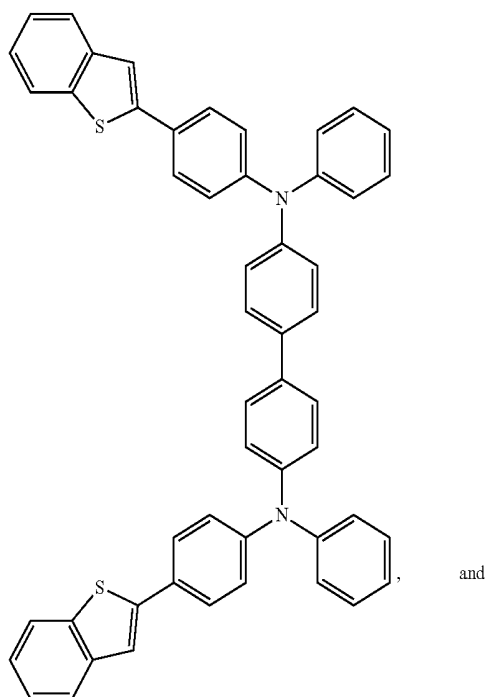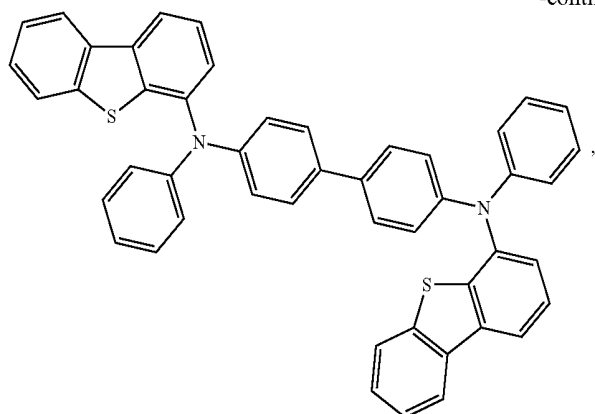


EBL:

[0136] An electron blocking layer (EBL) may be used to reduce the number of electrons and/or excitons that leave the emissive layer. The presence of such a blocking layer in a device may result in substantially higher efficiencies, and/or longer lifetime, as compared to a similar device lacking a blocking layer. Also, a blocking layer may be used to confine emission to a desired region of an OLED. In some embodiments, the EBL material has a higher LUMO (closer to the vacuum level) and/or higher triplet energy than the emitter closest to the EBL interface. In some embodiments, the EBL material has a higher LUMO (closer to the vacuum level) and/or higher triplet energy than one or more of the hosts closest to the EBL interface. In one aspect, the compound used in EBL contains the same molecule or the same functional groups used as one of the hosts described below.

Additional Hosts:


[0137] The light emitting layer of the organic EL device of the present invention preferably contains at least a metal complex as light emitting dopant material, and may contain one or more additional host materials using the metal complex as a dopant material. Examples of the host material are not particularly limited, and any metal complexes or organic compounds may be used as long as the triplet energy of the host is larger than that of the dopant. Any host material may be used with any dopant so long as the triplet criteria is satisfied.

[0138] Examples of metal complexes used as host are preferred to have the following general formula:



wherein Met is a metal; (Y^{103} - Y^{104}) is a bidentate ligand, Y^{103} and Y^{104} are independently selected from C, N, O, P, and S; L^{101} is an another ligand; k' is an integer value from 1 to the maximum number of ligands that may be attached to the metal; and $k'+k''$ is the maximum number of ligands that may be attached to the metal.

[0139] In one aspect, the metal complexes are:




wherein (O—N) is a bidentate ligand, having metal coordinated to atoms O and N.

[0140] In another aspect, Met is selected from Ir and Pt. In a further aspect, (Y^{103} - Y^{104}) is a carbene ligand.








[0141] In one aspect, the host compound contains at least one of the following groups selected from the group consisting of aromatic hydrocarbon cyclic compounds such as benzene, biphenyl, triphenyl, triphenylene, naphthalene, anthracene, phenalene, phenanthrene, fluorene, pyrene, chrysene, perylene, azulene; group consisting aromatic heterocyclic compounds such as dibenzothiophene, dibenzofuran, dibenzoselenophene, furan, thiophene, benzofuran, benzothiophene, benzoselenophene, carbazole, indolocarbazole, pyridylindole, pyrrolodipyrindine, pyrazole, imidazole,

triazole, oxazole, thiazole, oxadiazole, oxatriazole, dioxazole, thiadiazole, pyridine, pyridazine, pyrimidine, pyrazine, triazine, oxazine, oxathiazine, oxadiazine, indole, benzimidazole, indazole, indoxazine, benzoxazole, benzisoxazole, benzothiazole, quinoline, isoquinoline, cinoline, quinazoline, quinoxaline, naphthyridine, phthalazine, pteridine, xanthene, acridine, phenazine, phenothiazine, phenoxazine, benzofuopyridine, fuorodipyrindine, benzothienopyridine, thienodipyrindine, benzoselenophenopyridine, and selenophenodipyrindine; and group consisting 2 to 10 cyclic structural units which are groups of the same type or different types selected from the aromatic hydrocarbon cyclic group and the aromatic heterocyclic group and are bonded to each other directly or via at least one of oxygen atom, nitrogen atom, sulfur atom, silicon atom, phosphorus atom, boron atom, chain structural unit and the aliphatic cyclic group. Wherein each group is further substituted by a substituent selected from the group consisting of hydrogen, deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acids, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof.



[0142] In one aspect, host compound contains at least one of the following groups in the molecule:

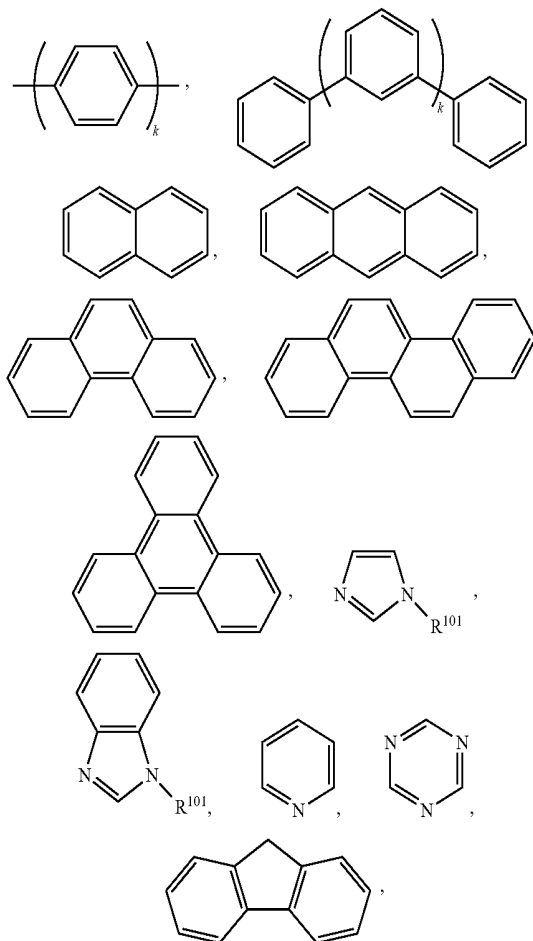

-continued

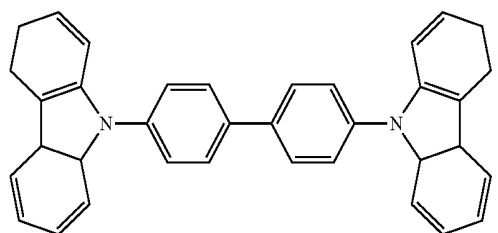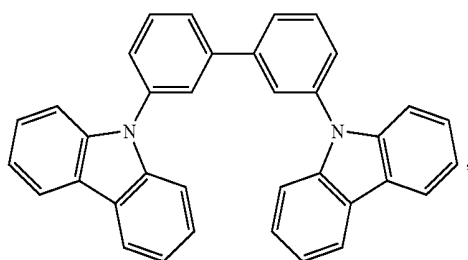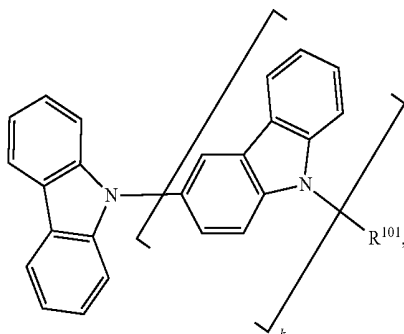







-continued




wherein R^{101} is selected from the group consisting of hydrogen, deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkynyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acids, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof, when it is aryl or heteroaryl, it has the similar definition as Ar's mentioned above. k is an integer from 0 to 20 or 1 to 20. X^{101} to X^{108} are independently selected from C (including CH) or N. Z^{101} and Z^{102} are independently selected from NR^{101} , O, or S.

[0143] Non-limiting examples of the additional host materials that may be used in an OLED in combination with the host compound disclosed herein are exemplified below together with references that disclose those materials: EP2034538, EP2034538A, EP2757608, JP2007254297, KR20100079458, KR20120088644, KR20120129733, KR20130115564, TW201329200, US20030175553, US20050238919, US20060280965, US20090017330, US20090030202, US20090167162, US20090302743, US20090309488, US20100012931, US20100084966, US20100187984, US2010187984, US2012075273, US2012126221, US2013009543, US2013105787, US2013175519, US2014001446, US20140183503, US20140225088, US2014034914, U.S. Pat. No. 7,154,114, WO2001039234, WO2004093207, WO2005014551, WO2005089025, WO2006072002, WO2006114966, WO2007063754, WO2008056746, WO2009003898, WO2009021126, WO2009063833, WO2009066778, WO2009066779, WO2009086028, WO2010056066, WO2010107244, WO2011081423, WO2011081431, WO2011086863, WO2012128298, WO2012133644, WO2012133649, WO2013024872, WO2013035275, WO2013081315, WO2013191404, WO2014142472, US20170263869, US20160163995, U.S. Pat. No. 9,466,803.


-continued

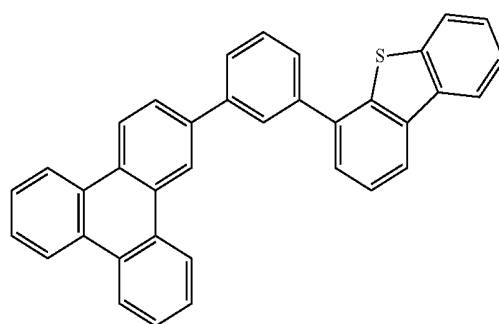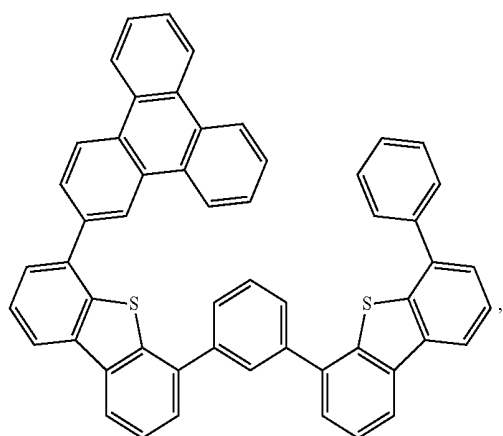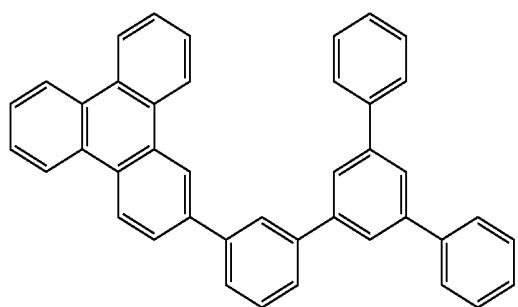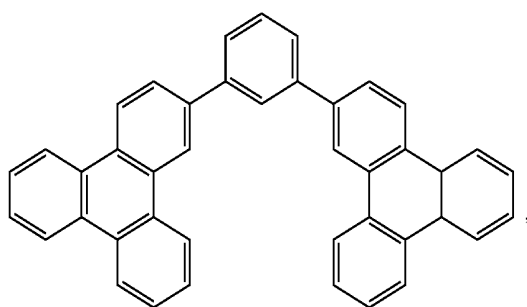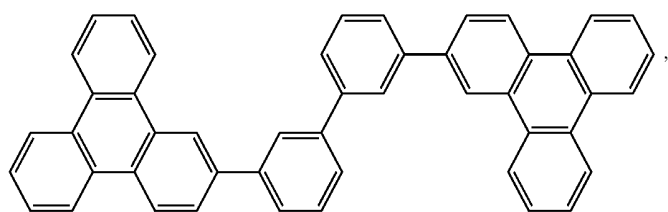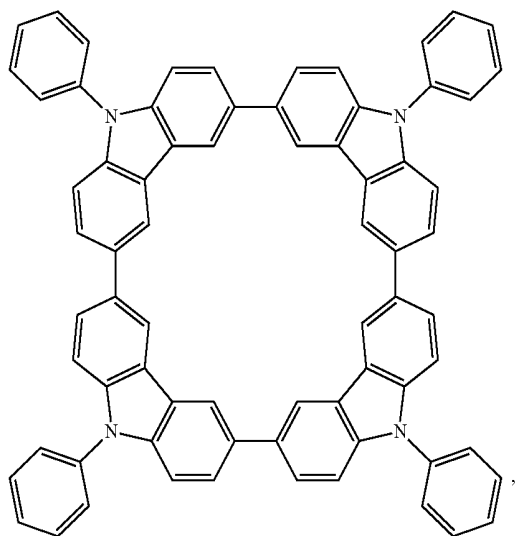


-continued

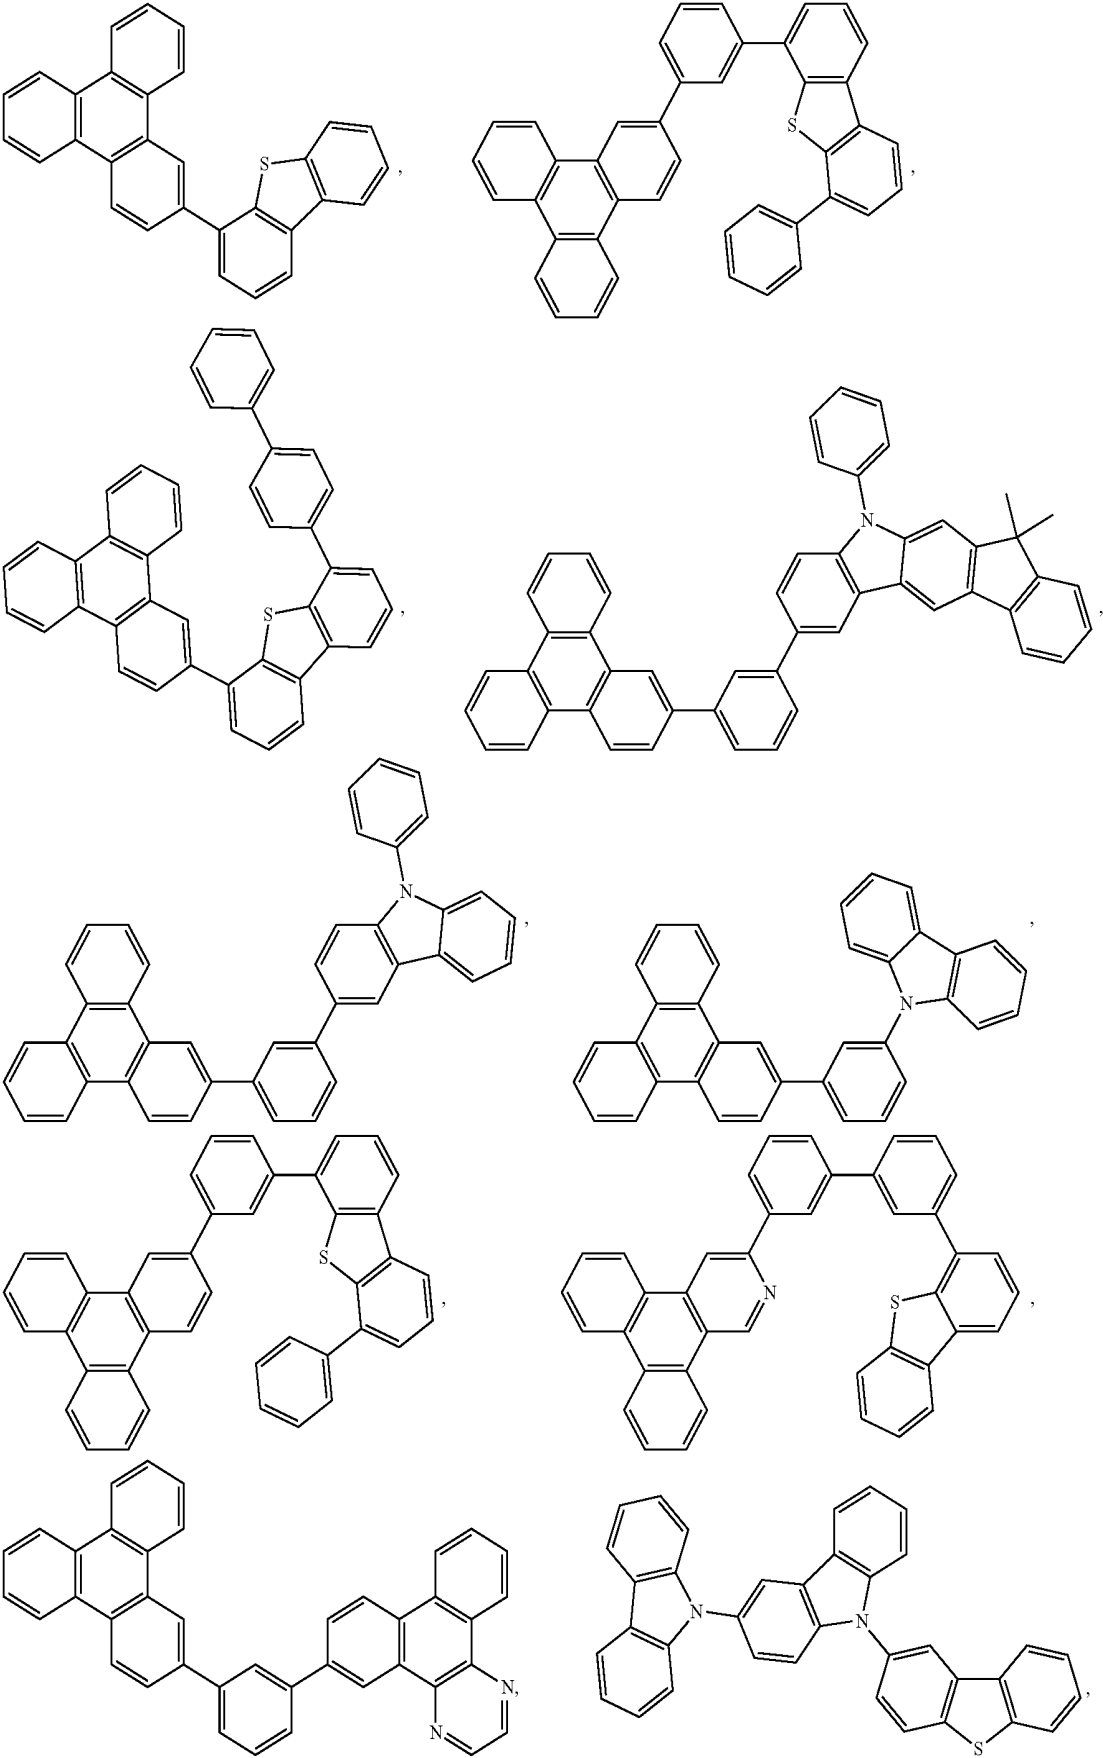







-continued

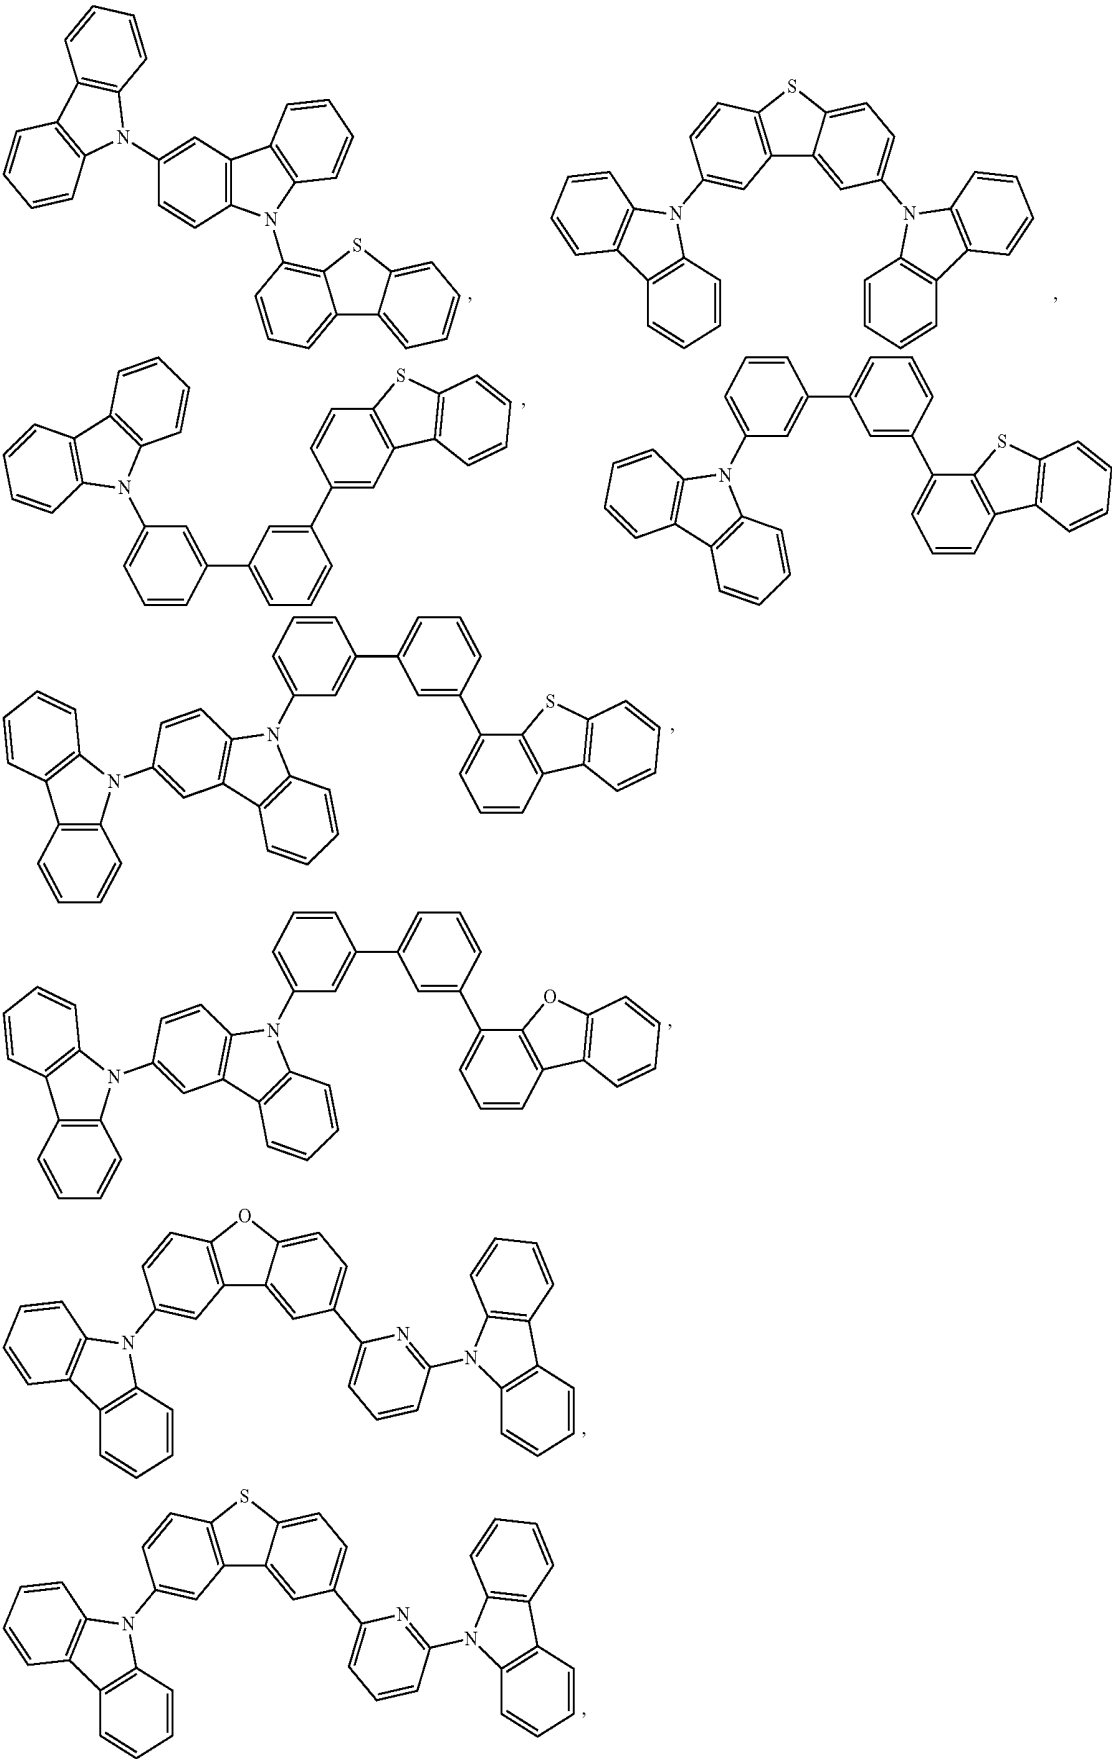





-continued

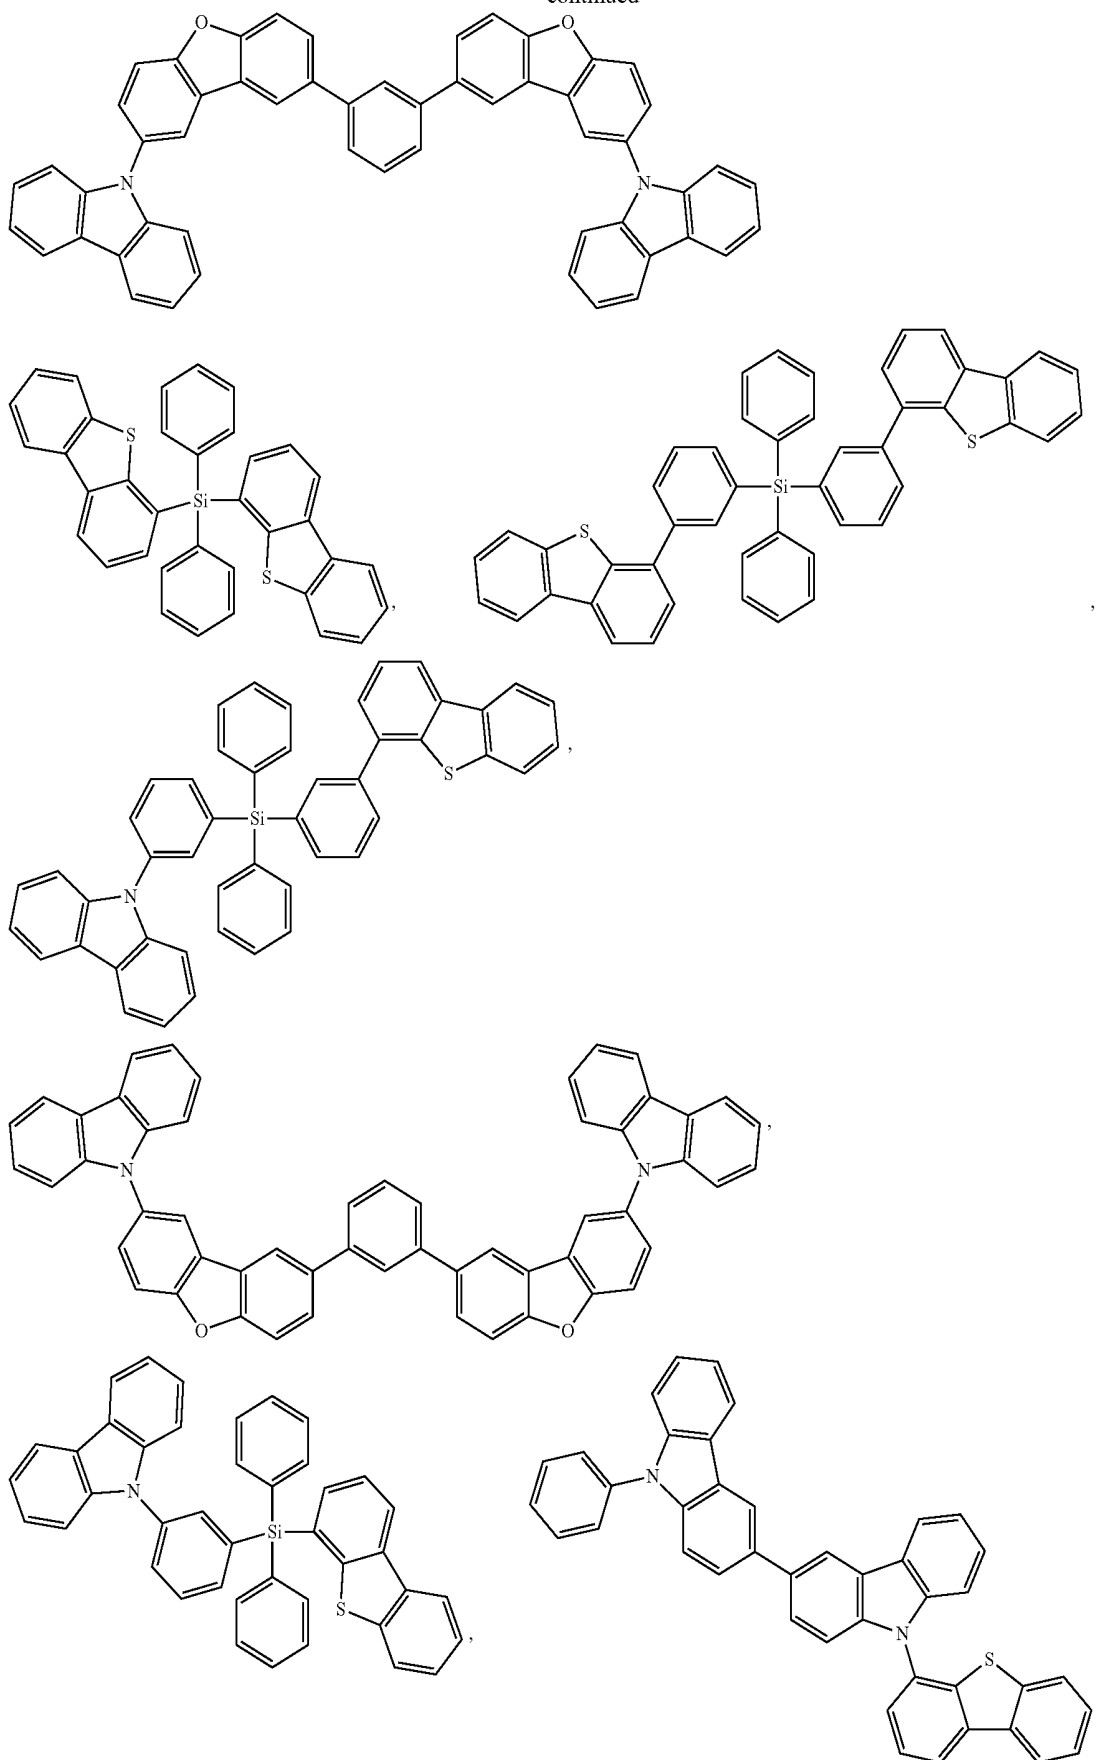





-continued

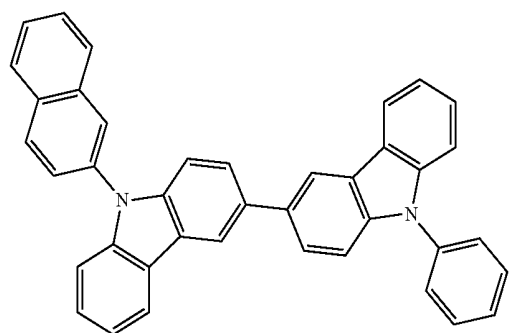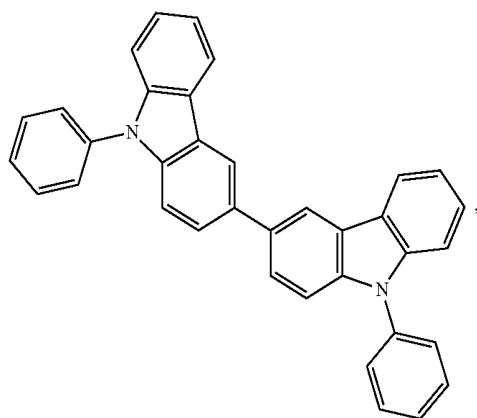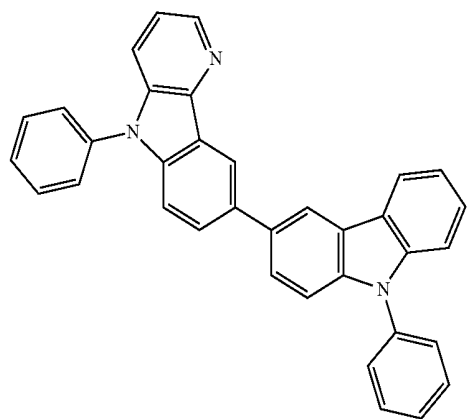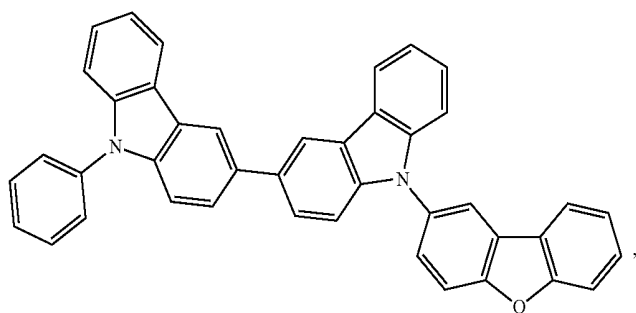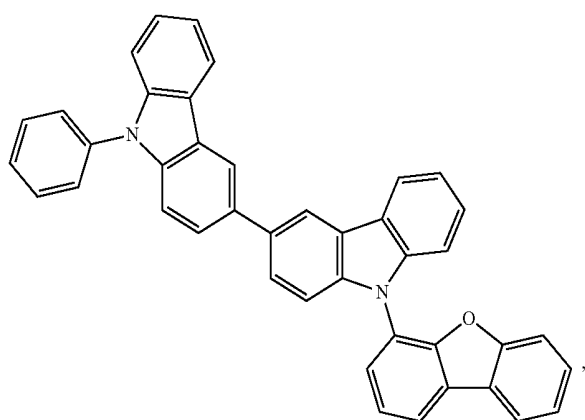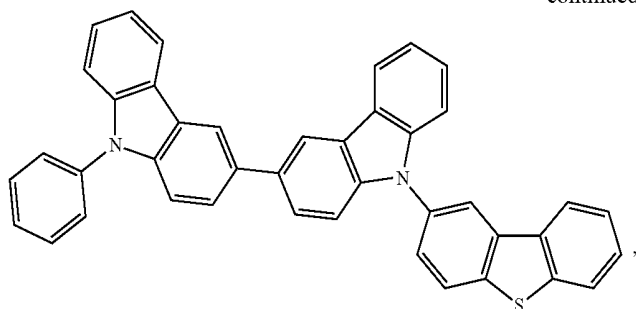







-continued

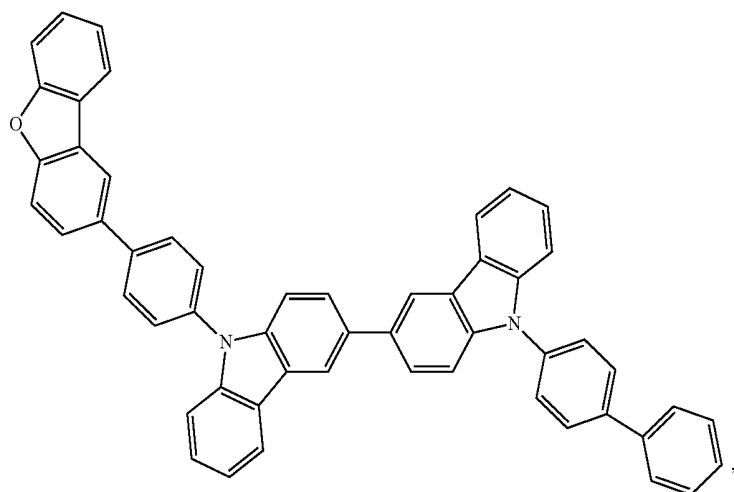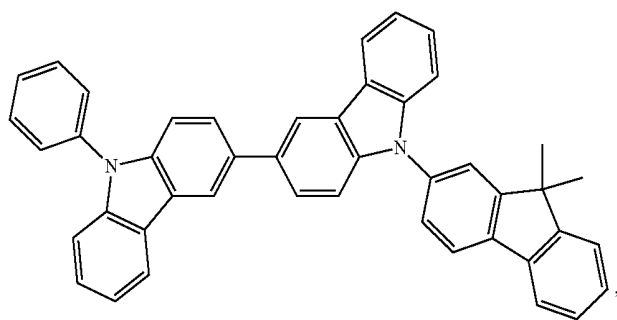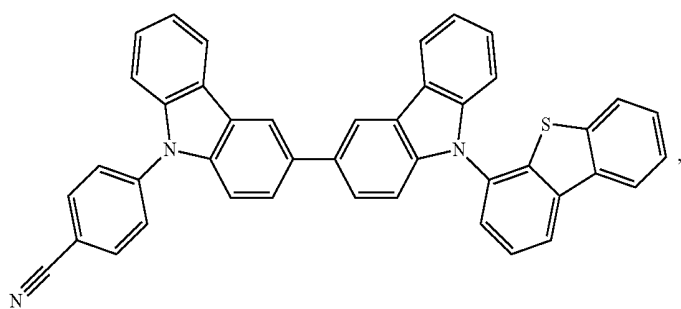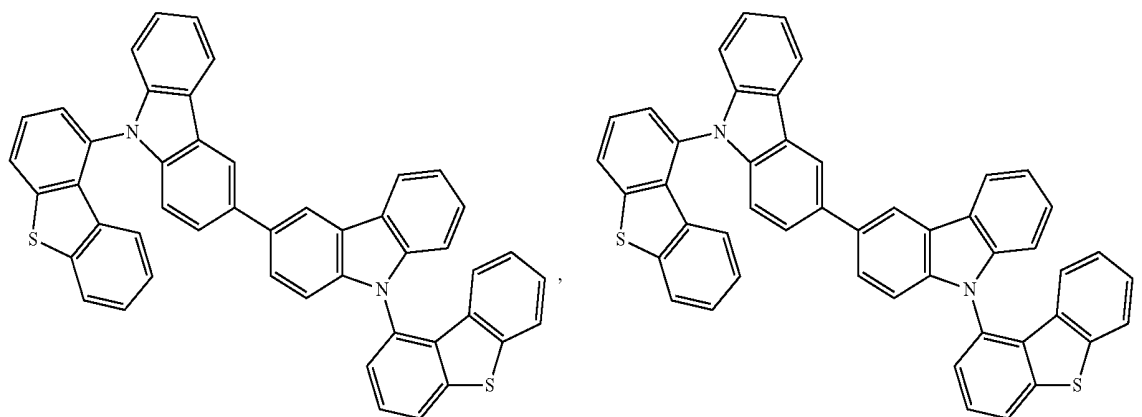


-continued

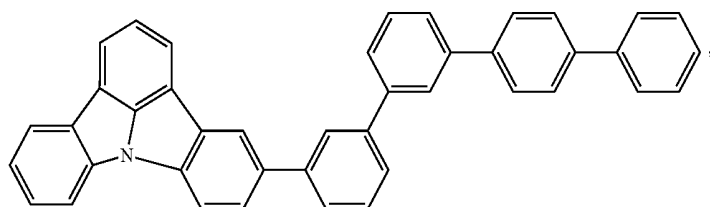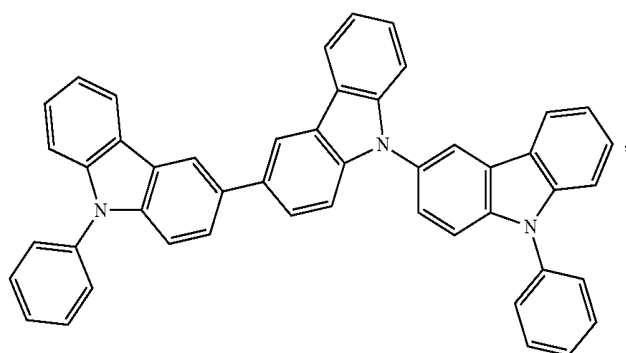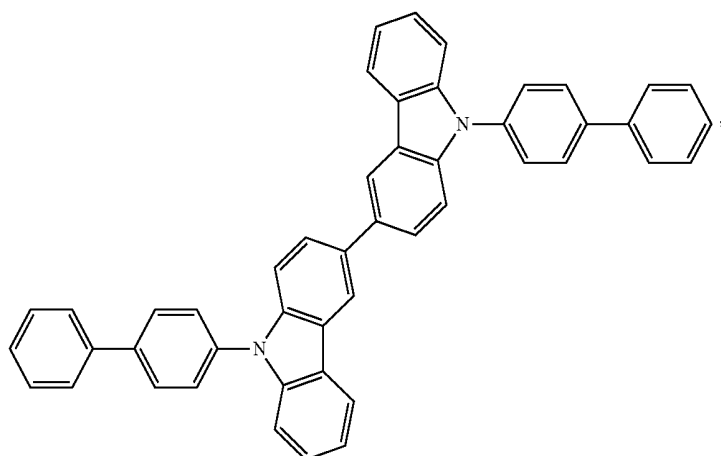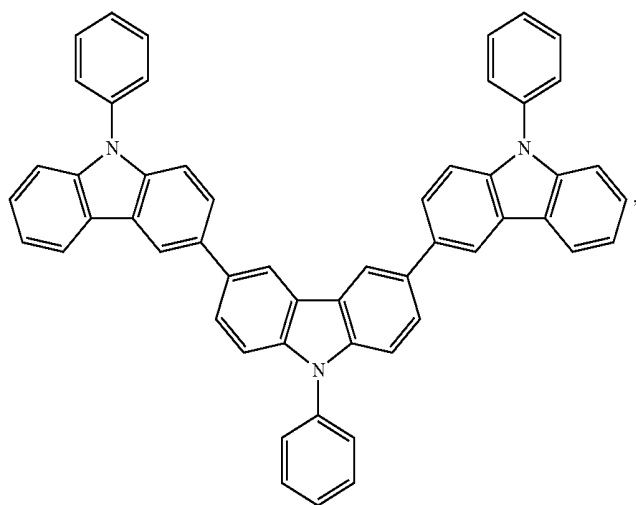





-continued

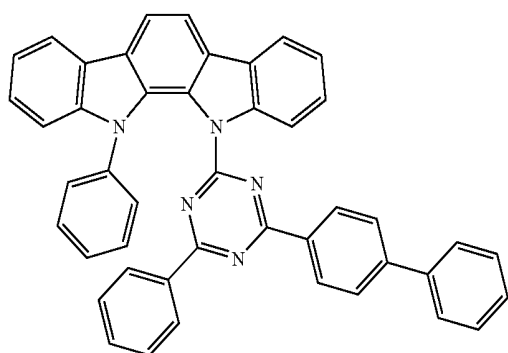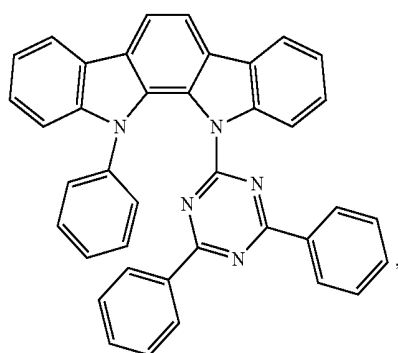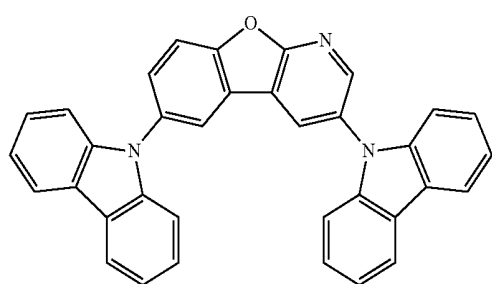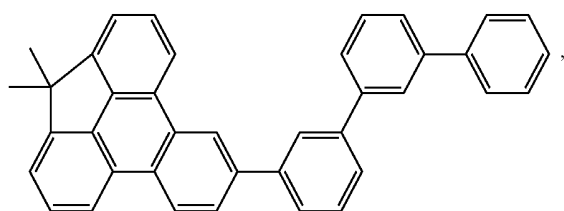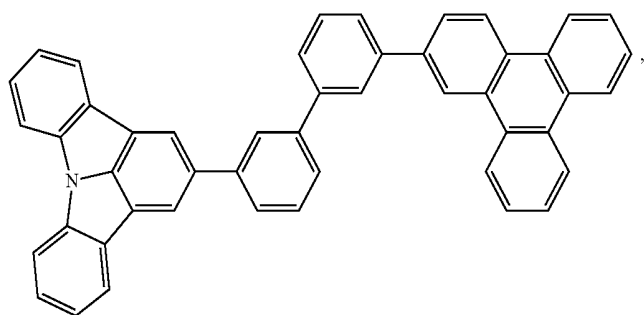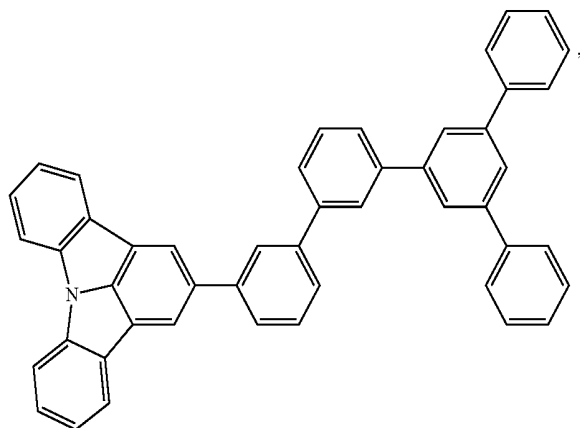







-continued

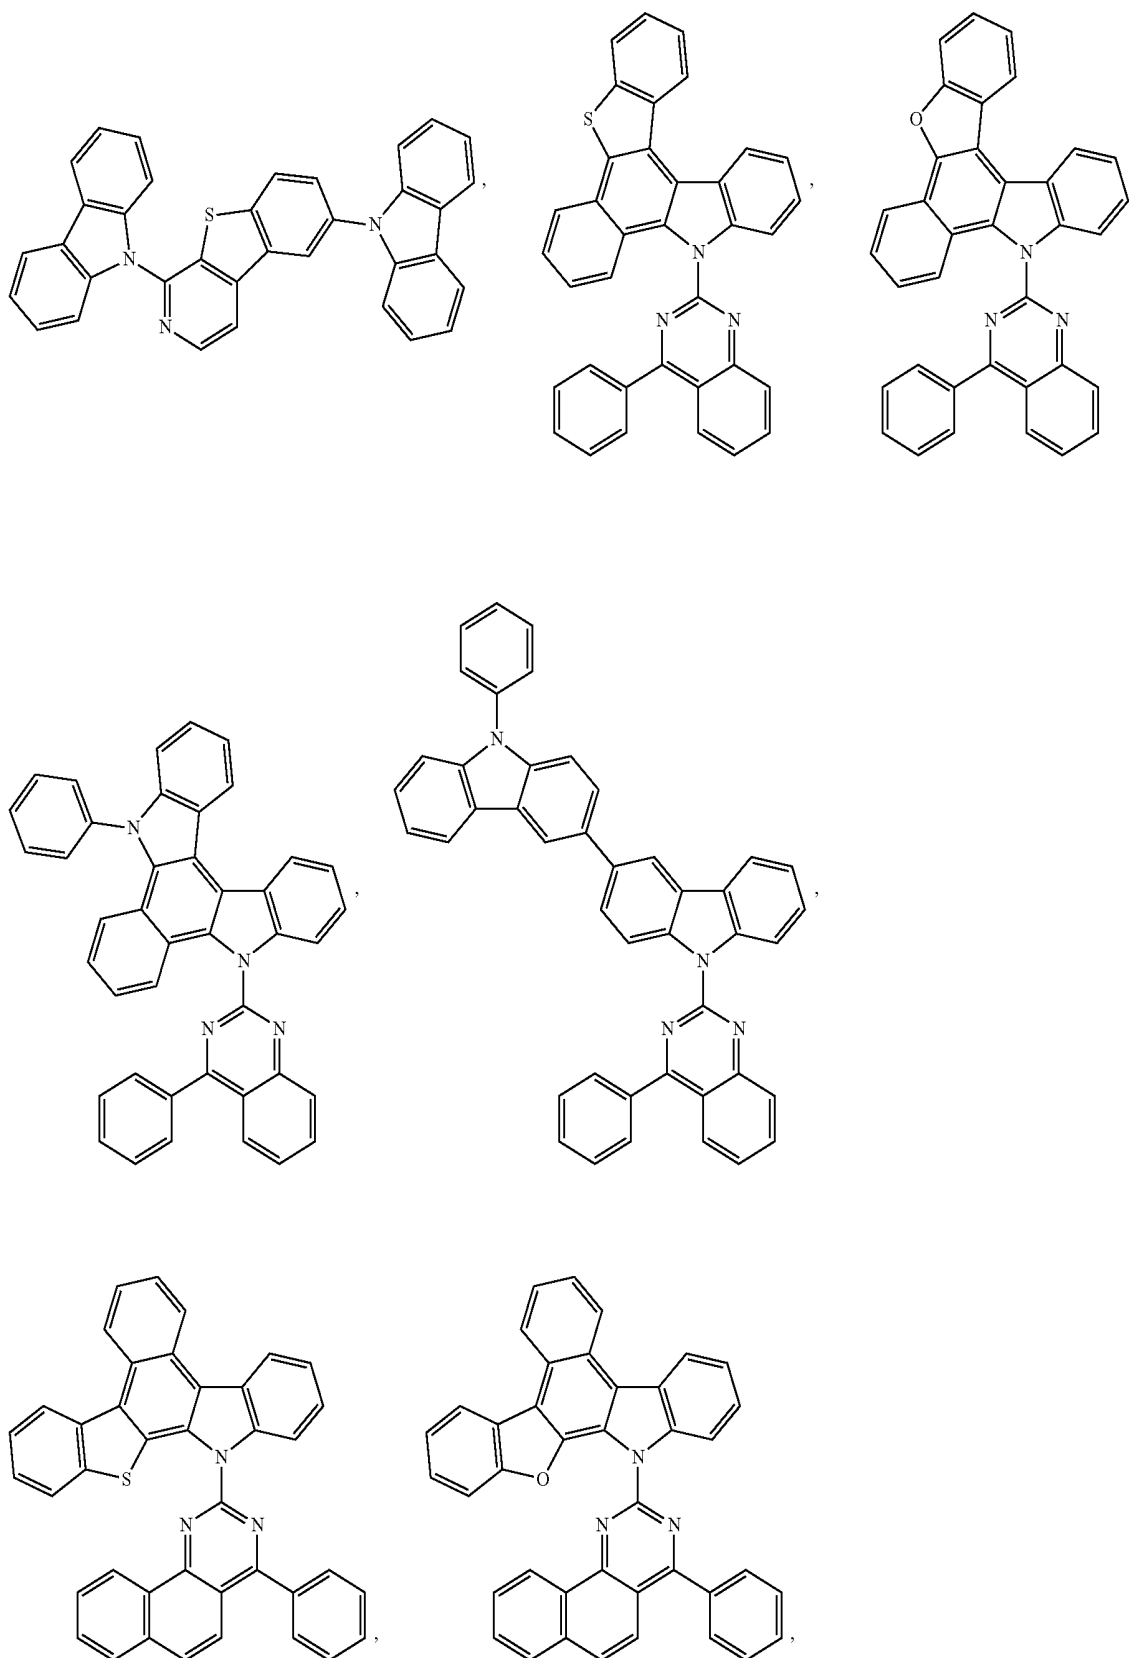

-continued

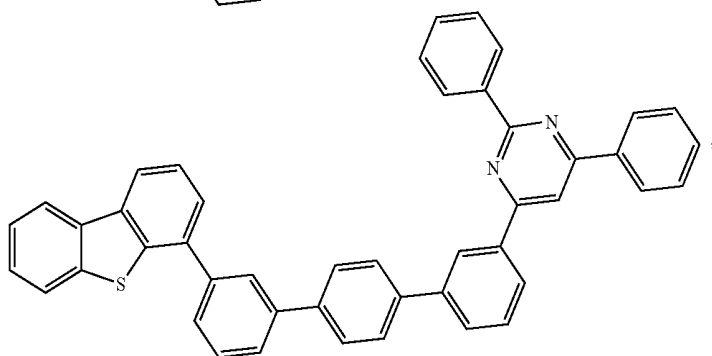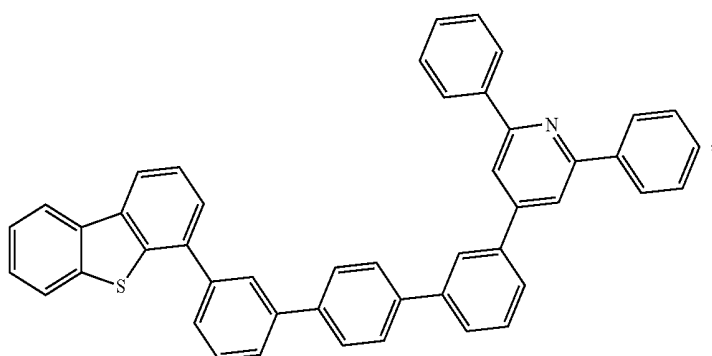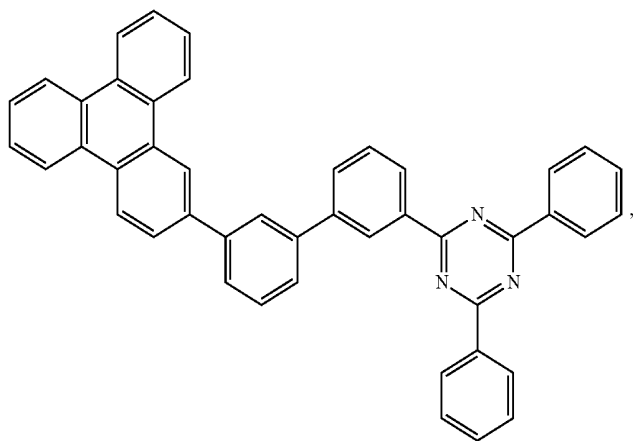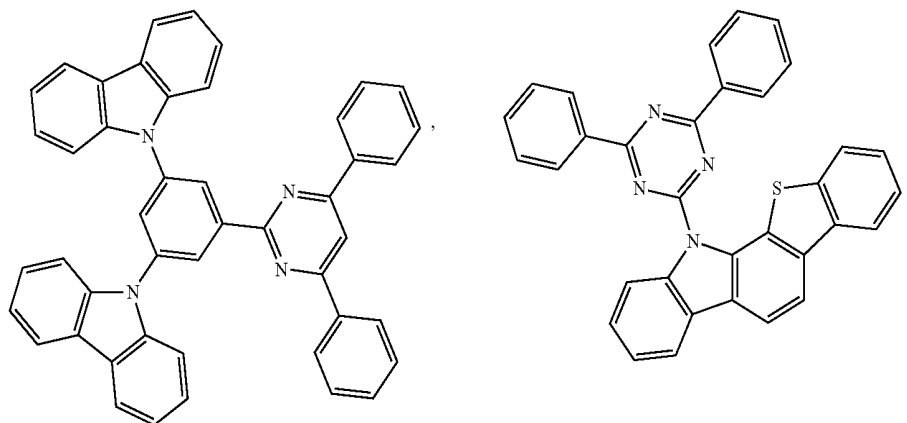


-continued

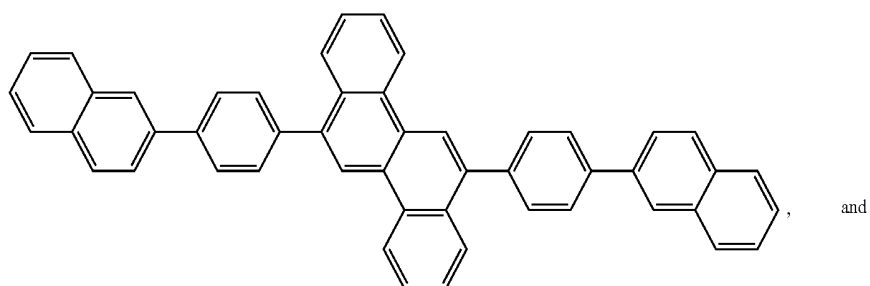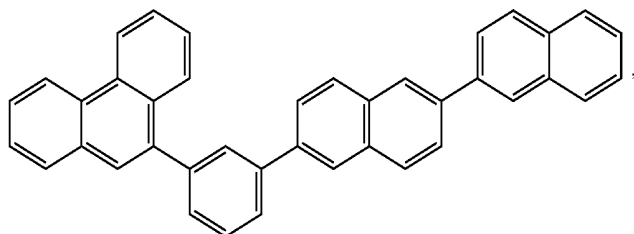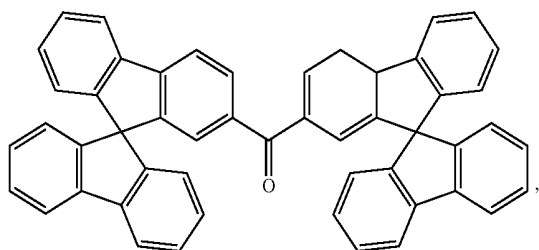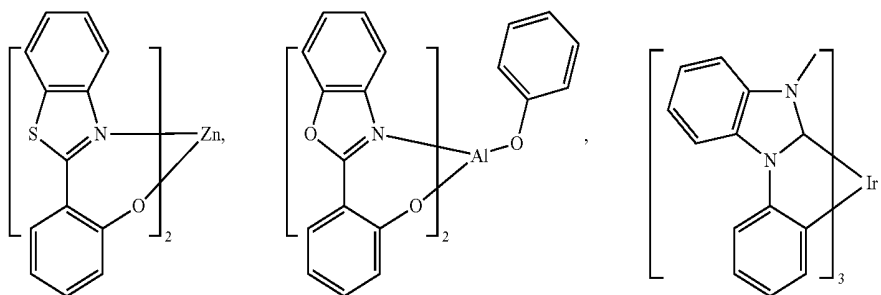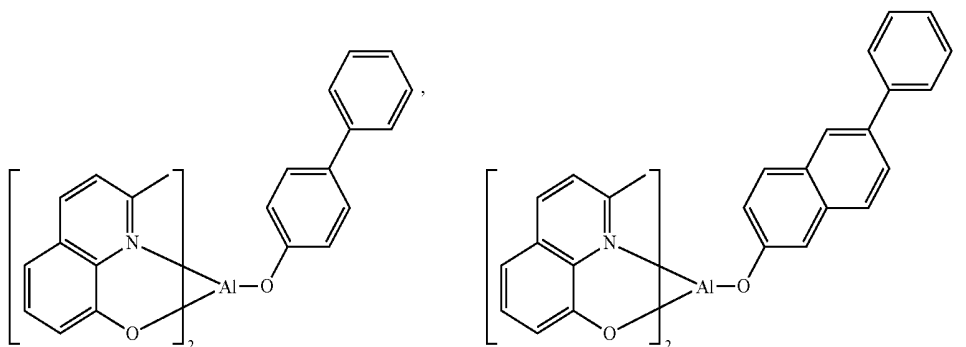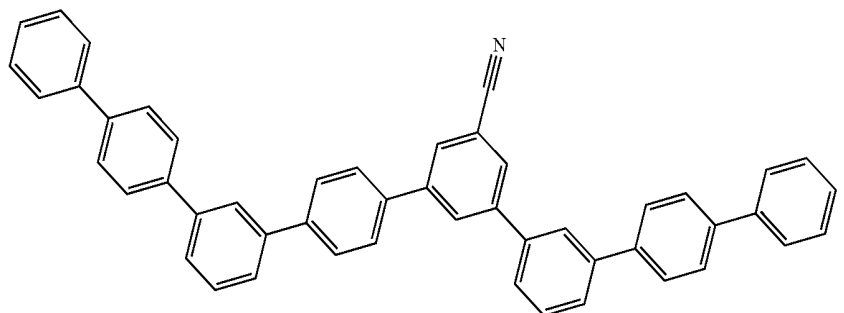

and

-continued



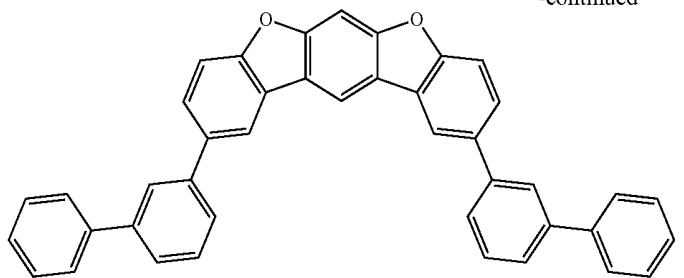












Emitter:






[0144] An emitter example is not particularly limited, and any compound may be used as long as the compound is typically used as an emitter material. Examples of suitable emitter materials include, but are not limited to, compounds which can produce emissions via phosphorescence, fluorescence, thermally activated delayed fluorescence, i.e., TADF (also referred to as E-type delayed fluorescence; see, e.g., U.S. application Ser. No. 15/700,352, which is hereby incorporated by reference in its entirety), triplet-triplet annihilation, or combinations of these processes. In some embodiments, the emissive dopant can be a racemic mixture, or can be enriched in one enantiomer.



[0145] Non-limiting examples of the emitter materials that may be used in an OLED in combination with materials disclosed herein are exemplified below together with references that disclose those materials: CN103694277, CN1696137, EB01238981, EP01239526, EP01961743, EP1239526, EP1244155, EP1642951, EP1647554, EP1841834, EP1841834B, EP2062907, EP2730583, JP2012074444, JP2013110263, JP4478555, KR1020090133652, KR20120032054, KR20130043460, TW201332980, U.S. Ser. No. 06/699,599, U.S. Ser. No. 06/916,554, US20010019782, US20020034656, US20030068526, US20030072964, US20030138657, US20050123788, US20050244673, US2005123791, US2005260449, US20060008670, US20060065890, US20060127696, US20060134459, US20060134462, US20060202194, US20060251923, US20070034863, US20070087321, US20070103060, US20070111026, US20070190359, US20070231600, US2007034863, US2007104979, US2007104980, US2007138437, US2007224450, US2007278936, US20080020237, US20080233410, US20080261076, US20080297033, US200805851, US2008161567, US2008210930, US20090039776, US20090108737, US20090115322, US20090179555, US2009085476, US2009104472, US20100090591, US20100148663, US20100244004, US20100295032, US2010102716, US2010105902, US2010244004, US2010270916, US20110057559, US20110108822, US20110204333, US2011215710, US2011227049, US2011285275, US2012292601, US20130146848, US2013033172, US2013165653, US2013181190, US2013334521, US20140246656, US2014103305, U.S. Pat. Nos. 6,303,238, 6,413,656, 6,653,654, 6,670,645, 6,687,266, 6,835,469, 6,921,915, 7,279,704, 7,332,232, 7,378,162, 7,534,505, 7,675,228, 7,728,137, 7,740,957, 7,759,489, 7,951,947, 8,067,099, 8,592,586, 8,871,361, WO06081973, WO06121811, WO07018067, WO07108362, WO07115970, WO07115981,










WO08035571, WO2002015645, WO2003040257, WO2005019373, WO2006056418, WO2008054584, WO2008078800, WO2008096609, WO2008101842, WO2009000673, WO2009050281, WO2009100991, WO2010028151, WO2010054731, WO2010086089, WO2010118029, WO2011044988, WO2011051404, WO2011107491, WO2012020327, WO2012163471, WO2013094620, WO2013107487, WO2013174471, WO2014007565, WO2014008982, WO2014023377, WO2014024131, WO2014031977, WO2014038456, WO2014112450,

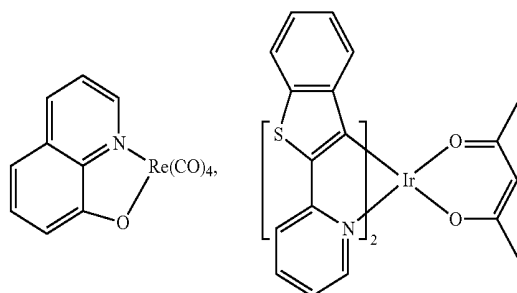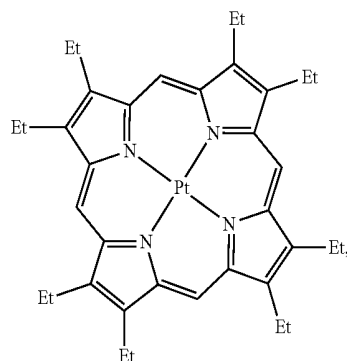

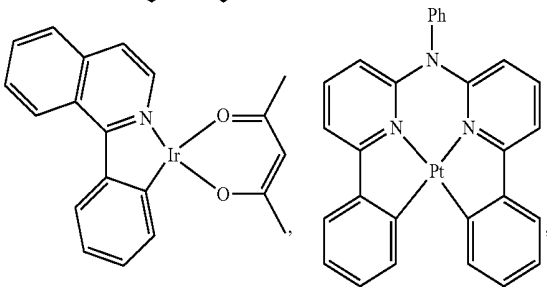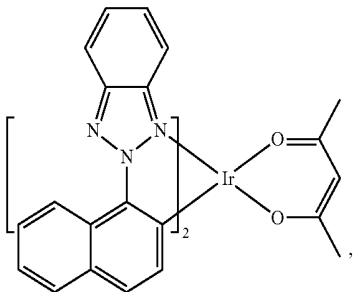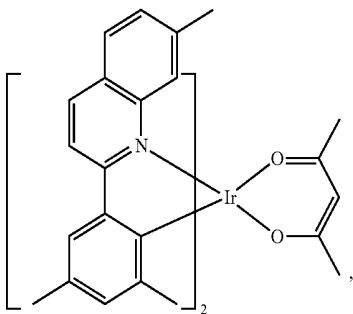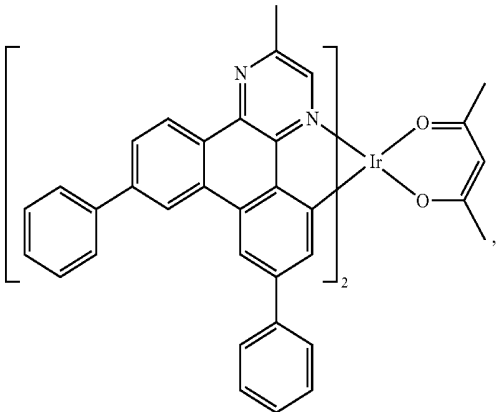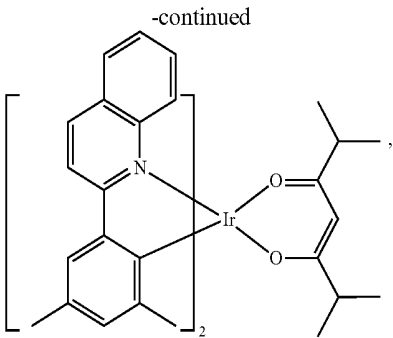


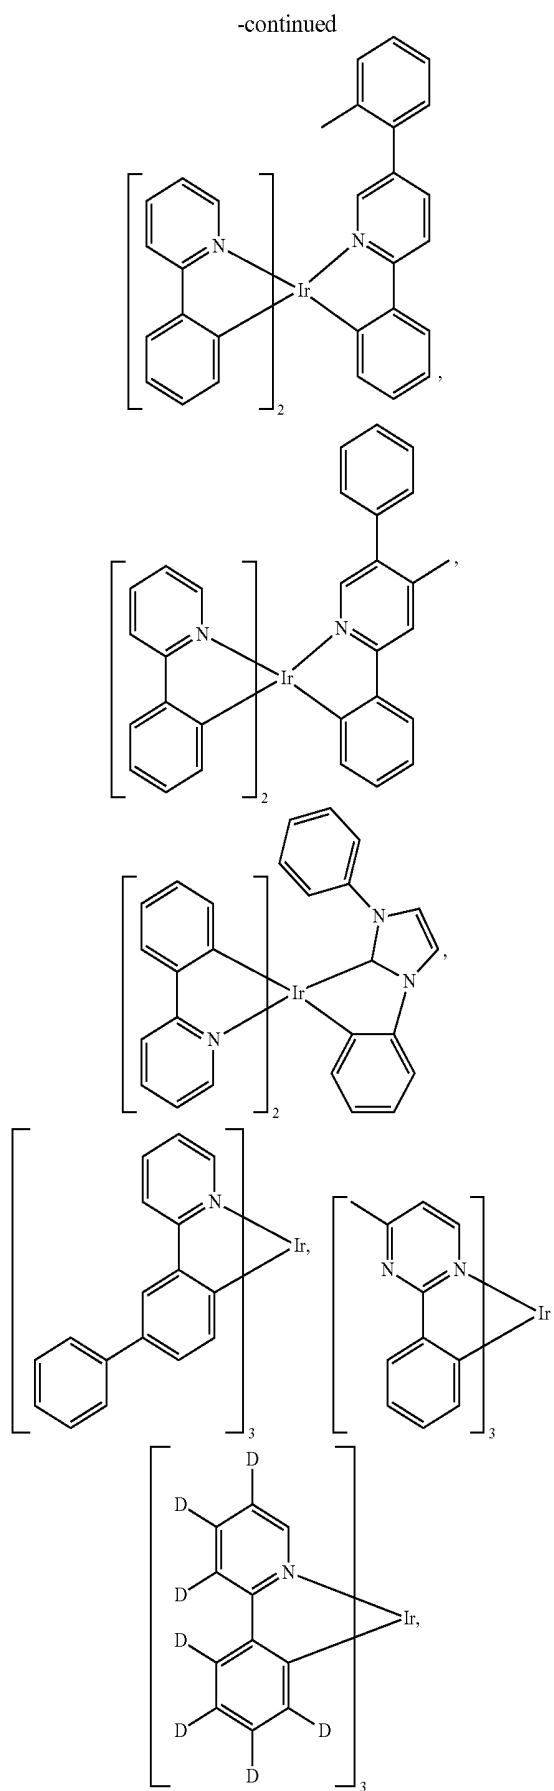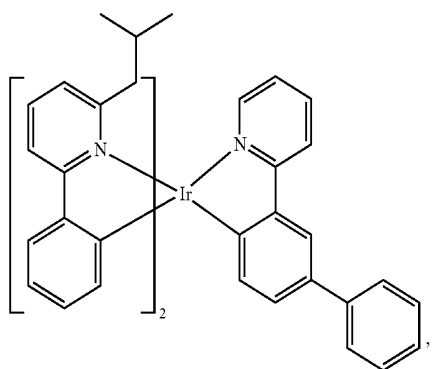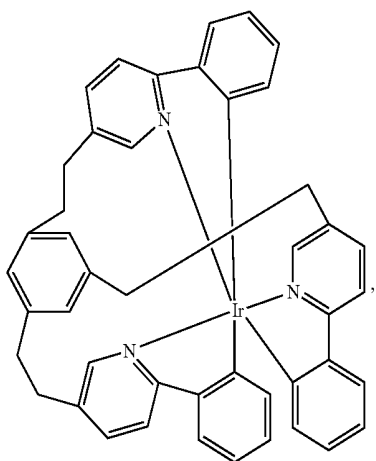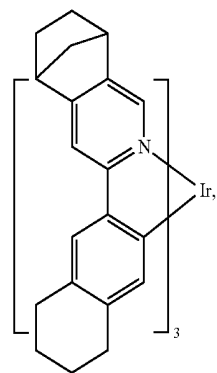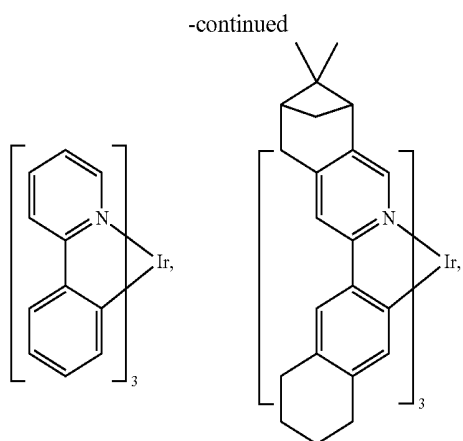

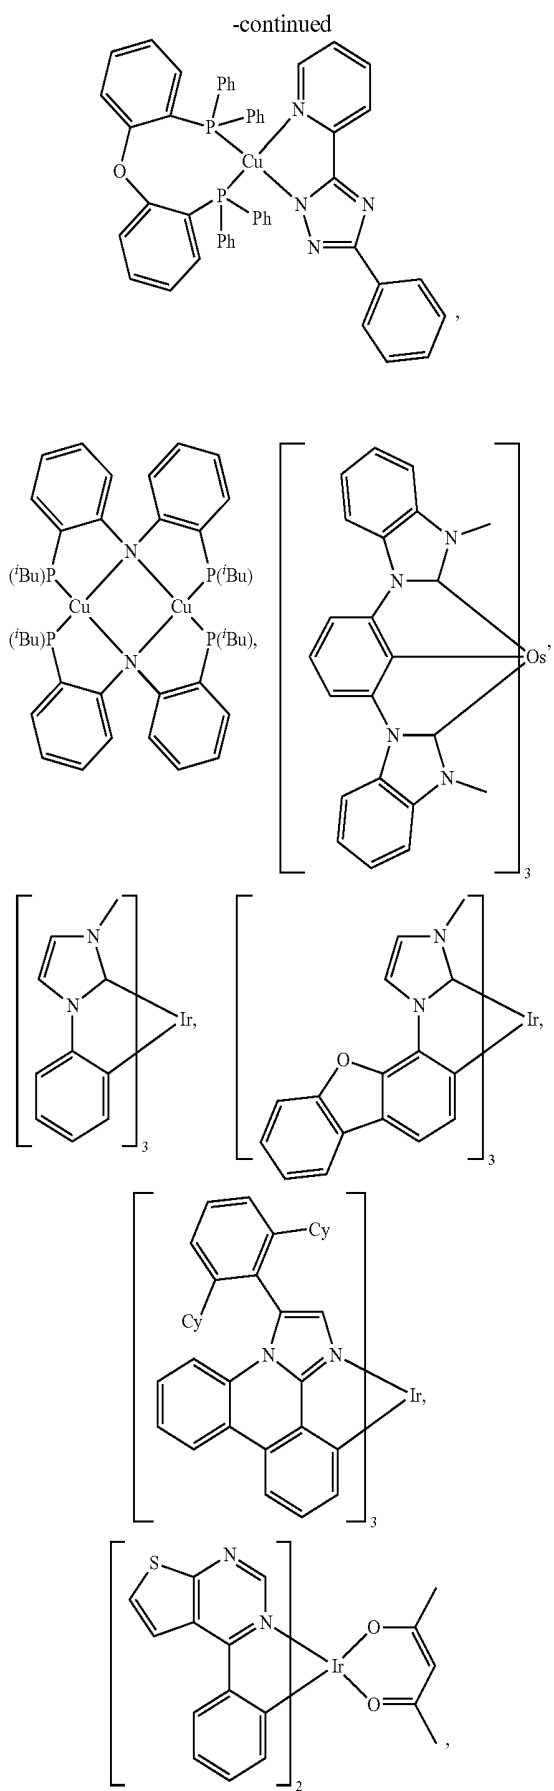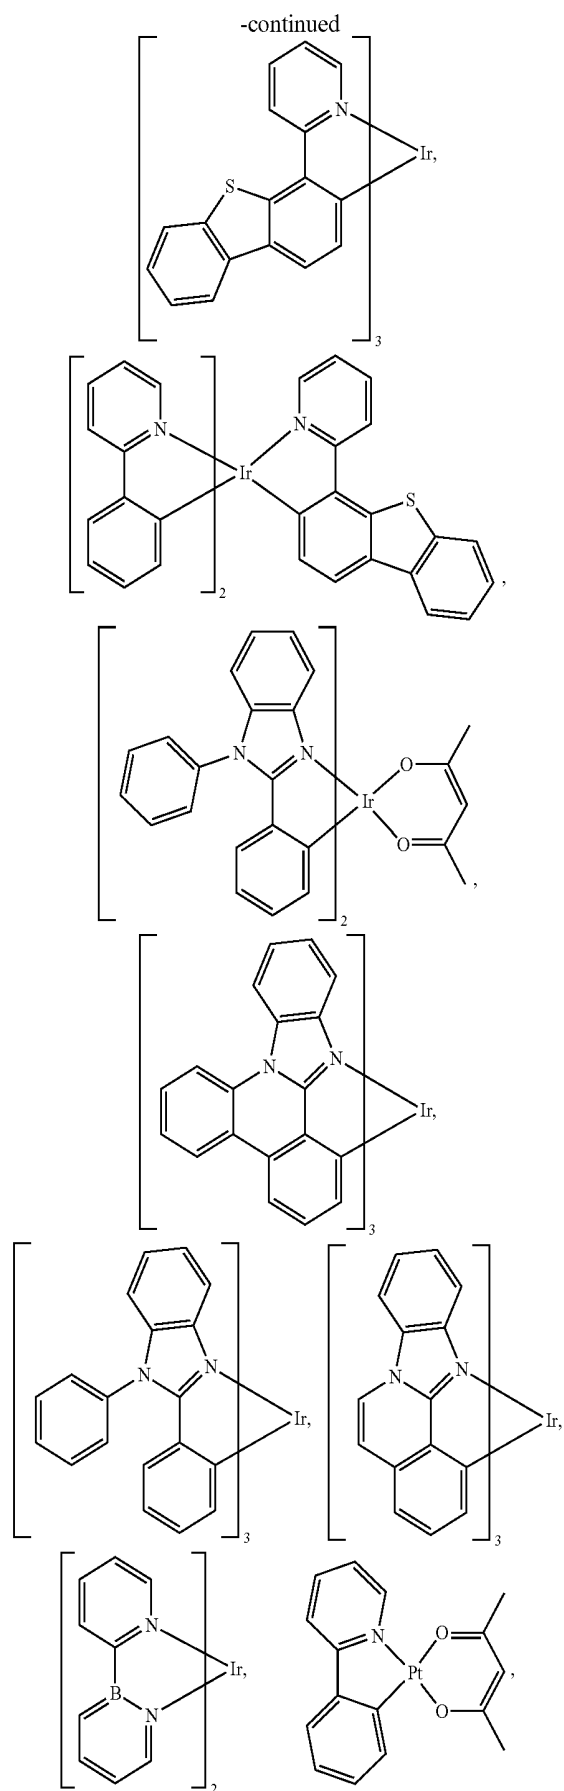


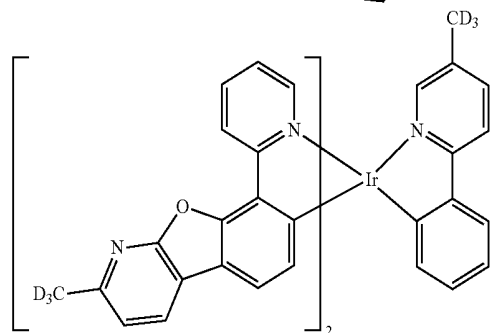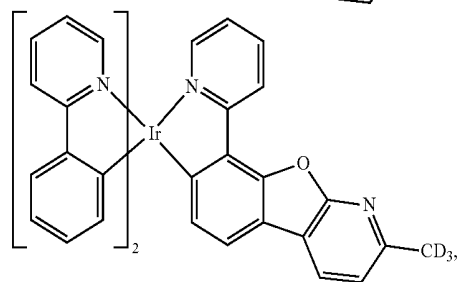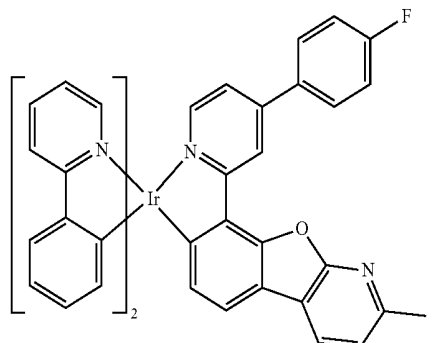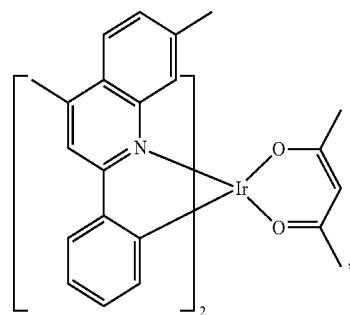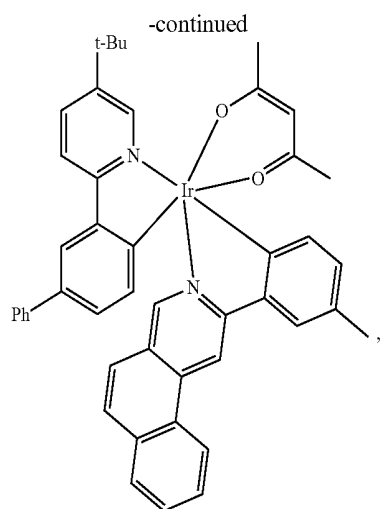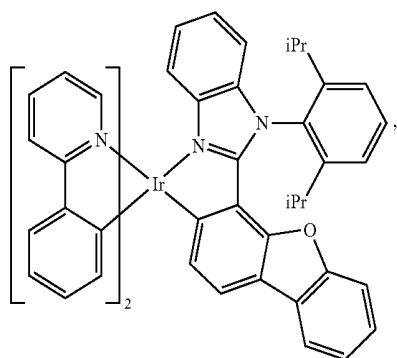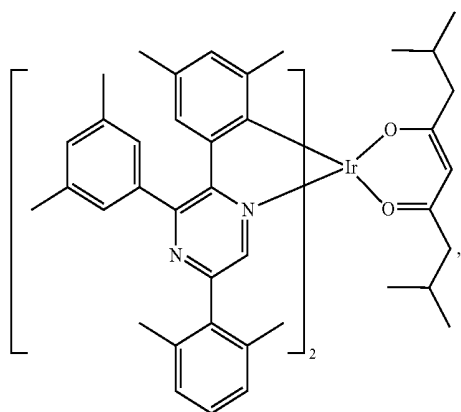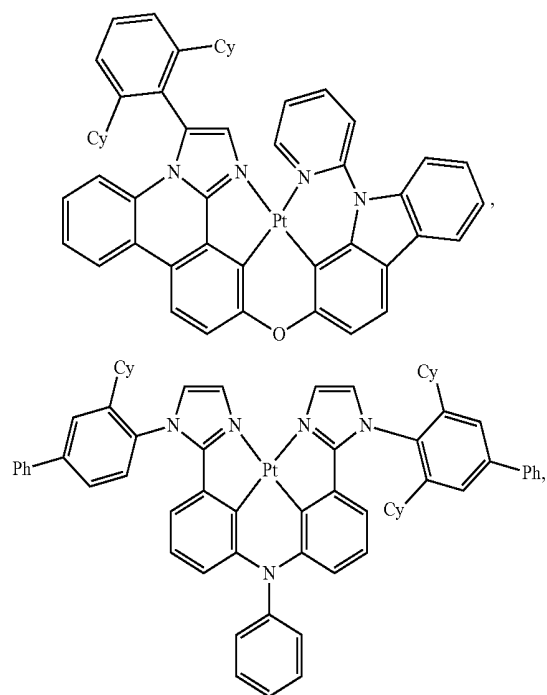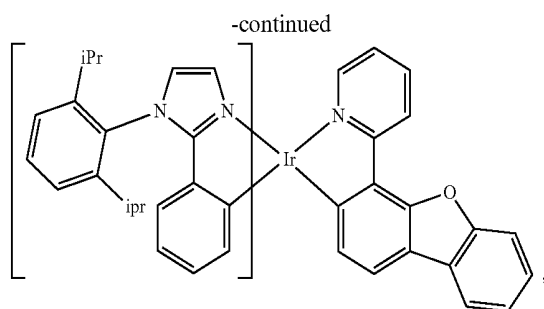


-continued

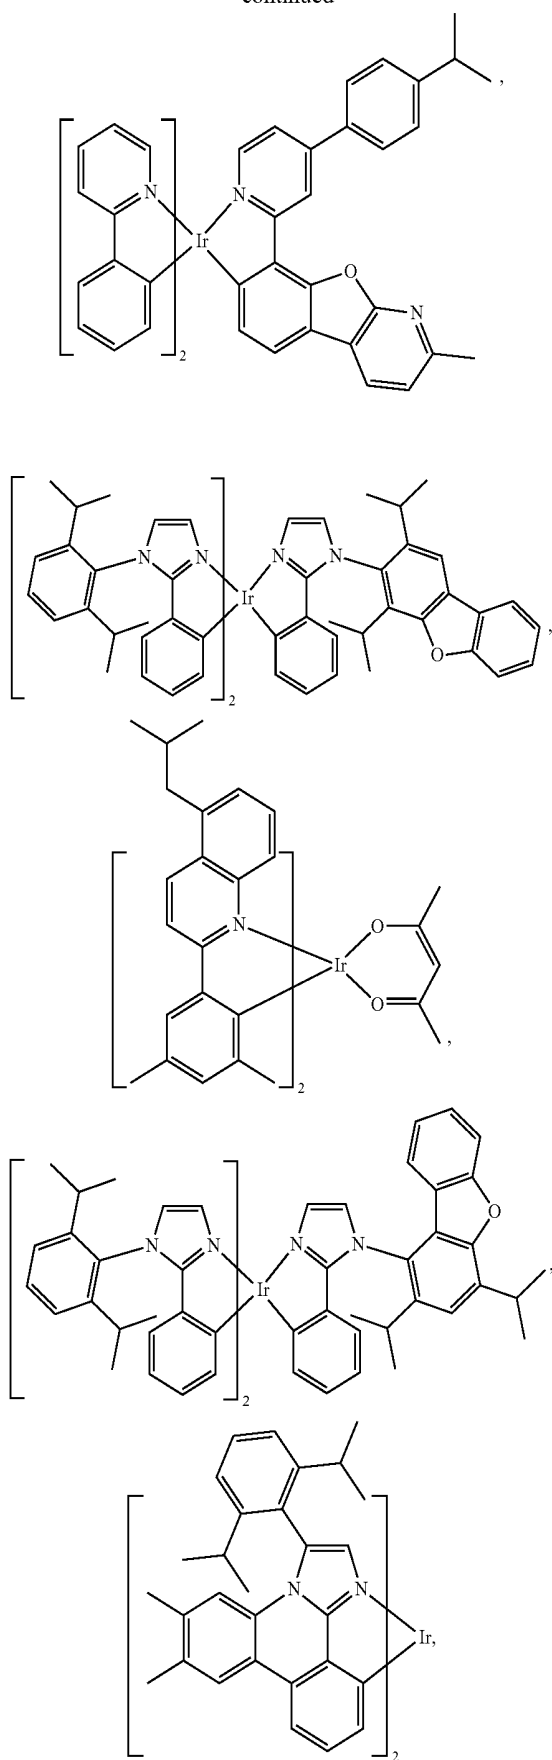








-continued

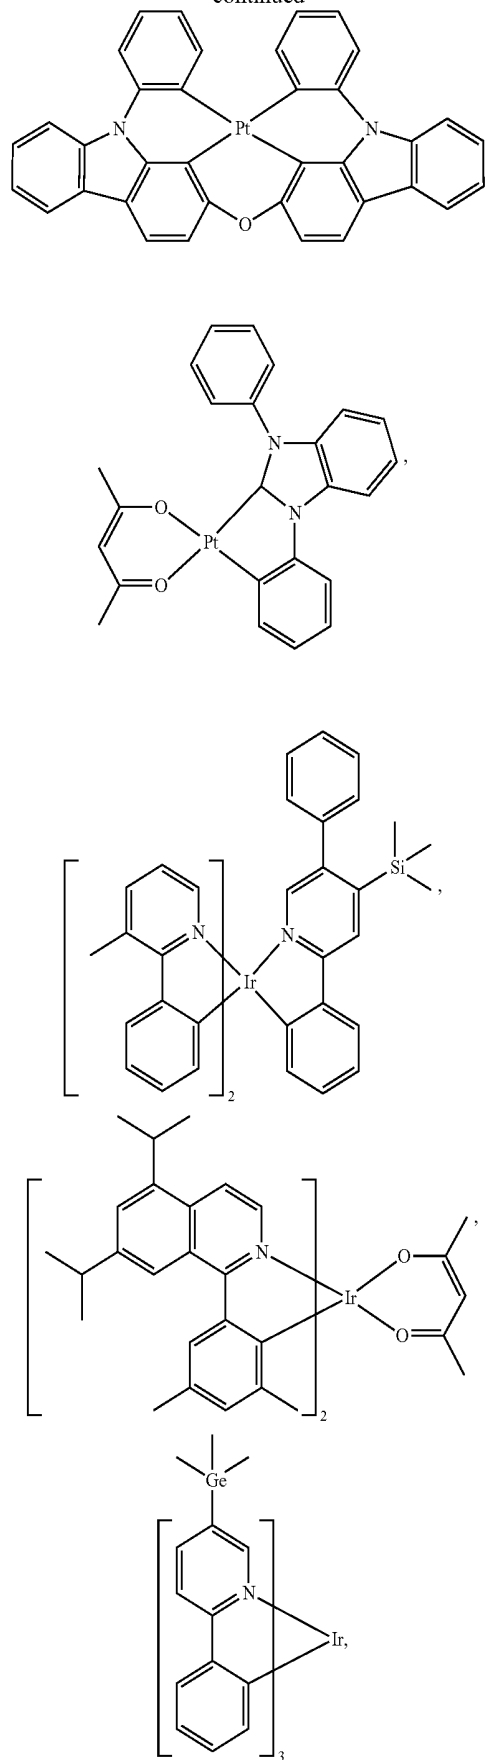


-continued

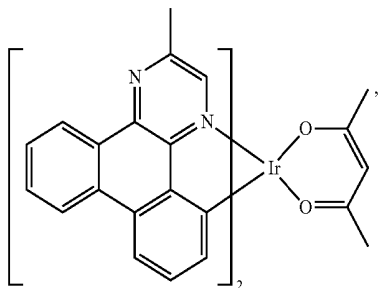


-continued

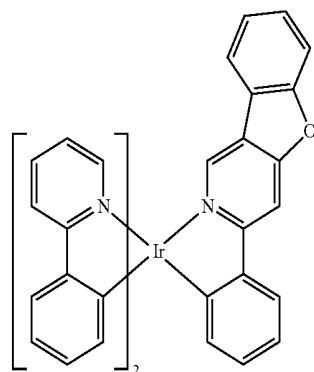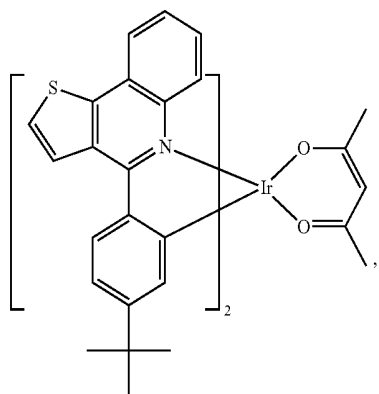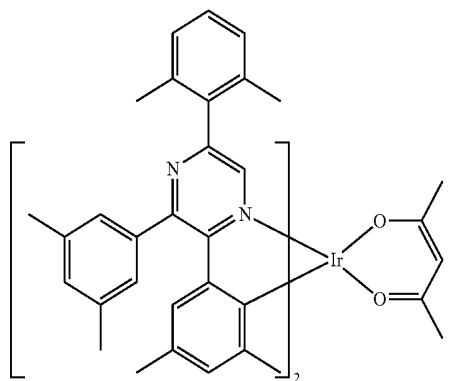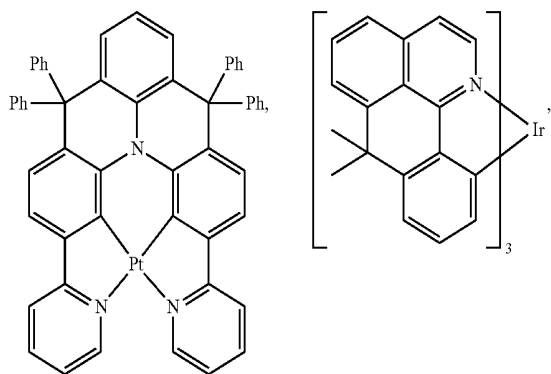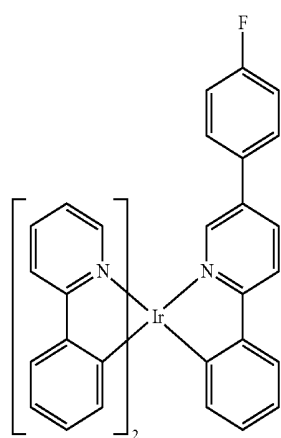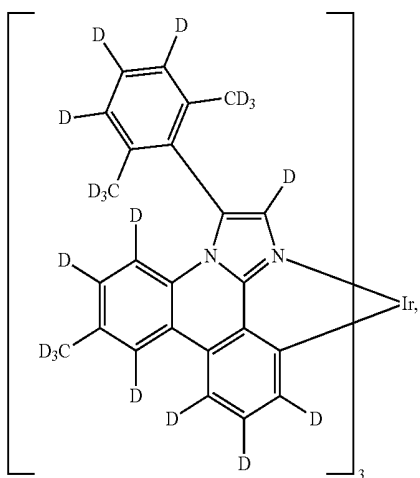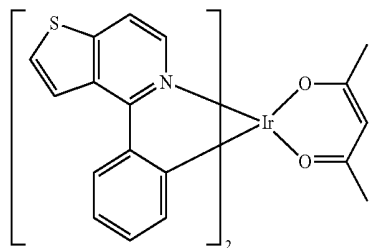


-continued

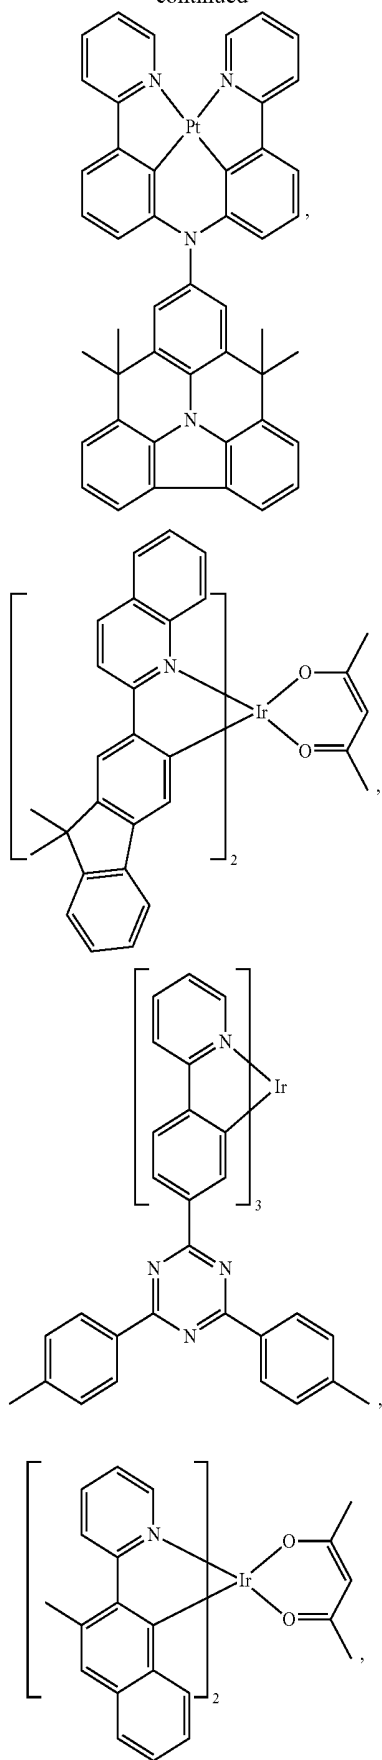









-continued

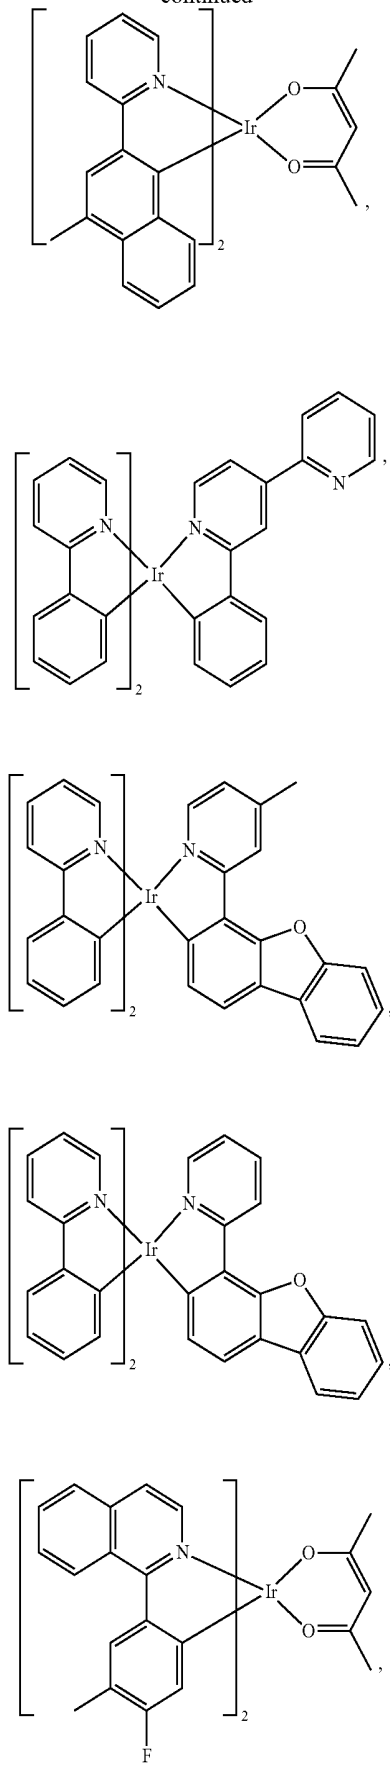


-continued

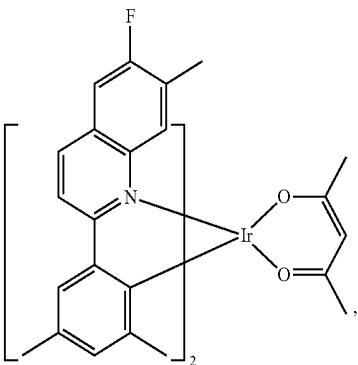










-continued

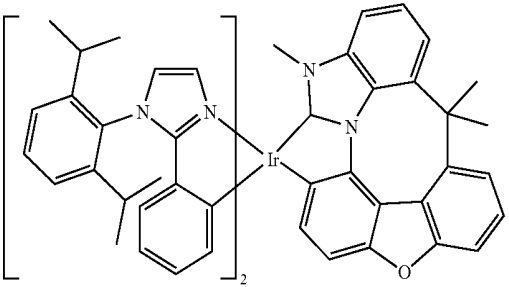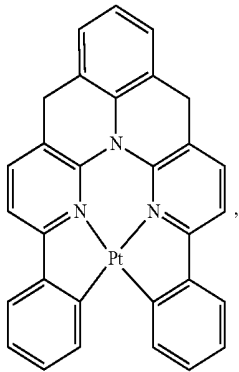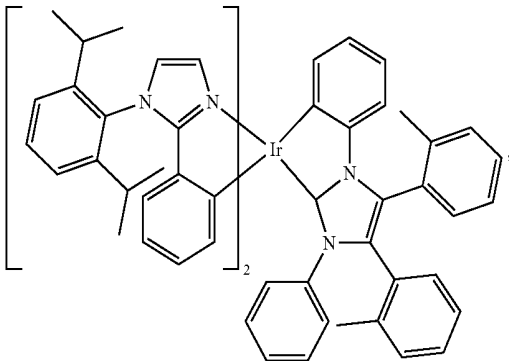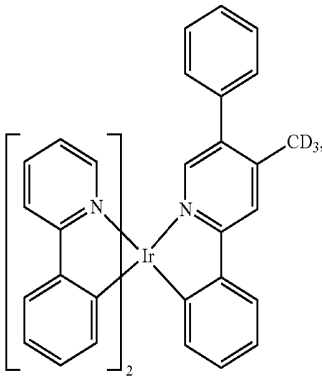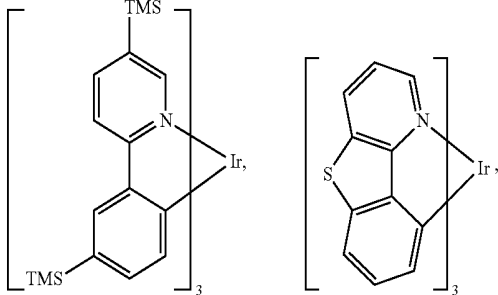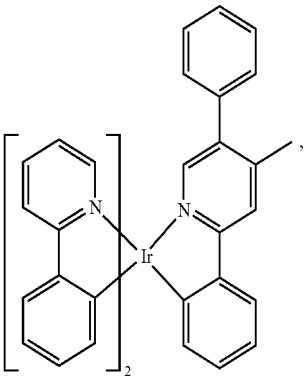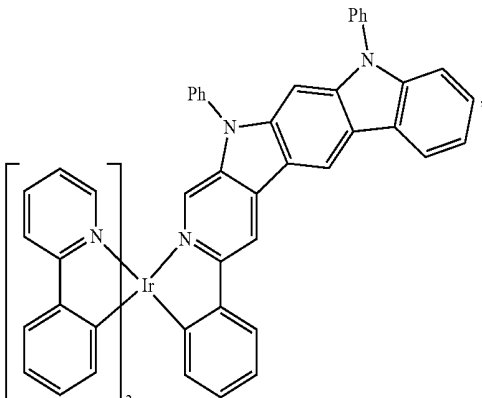


-continued











-continued

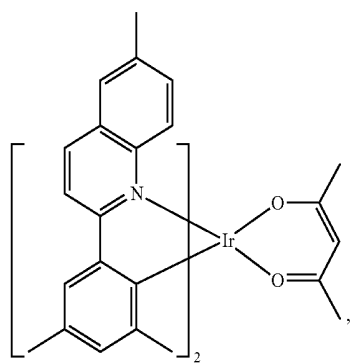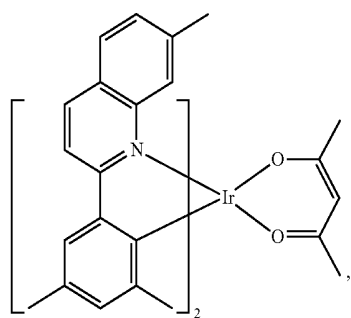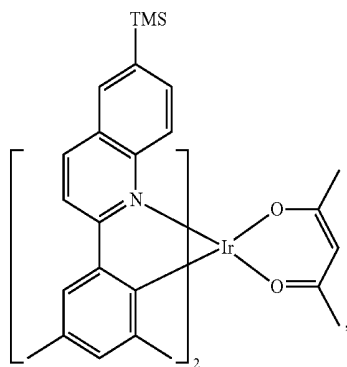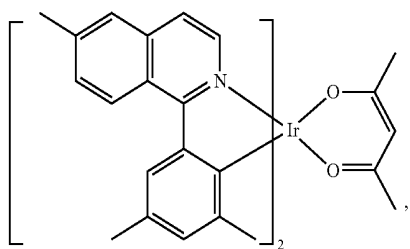






-continued







-continued

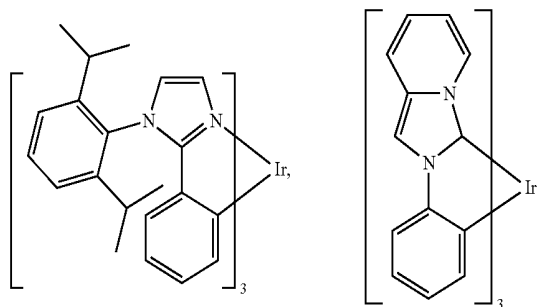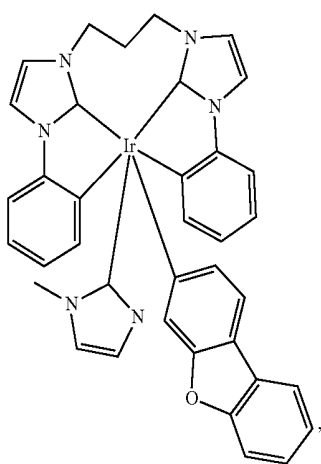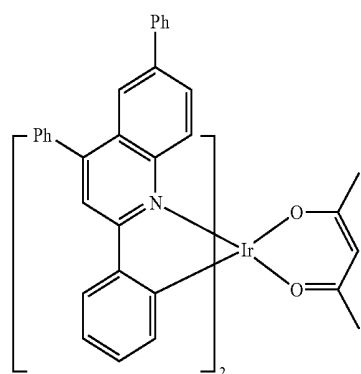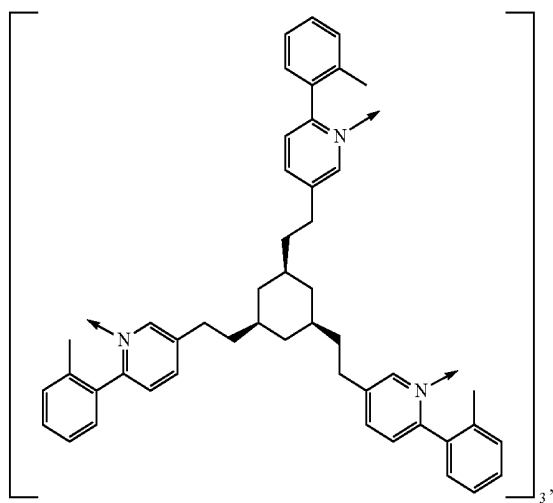

-continued

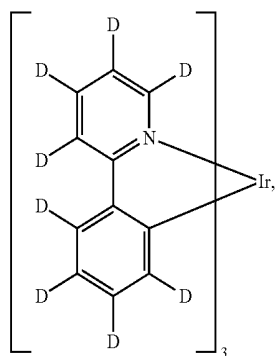

-continued








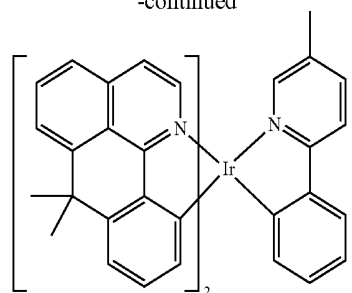


HBL:


[0146] A hole blocking layer (HBL) may be used to reduce the number of holes and/or excitons that leave the emissive layer. The presence of such a blocking layer in a device may result in substantially higher efficiencies and/or longer lifetime as compared to a similar device lacking a blocking layer. Also, a blocking layer may be used to confine emission to a desired region of an OLED. In some embodiments, the HBL material has a lower HOMO (further from the vacuum level) and/or higher triplet energy than the emitter closest to the HBL interface. In some embodiments, the HBL material has a lower HOMO (further from the vacuum level) and/or higher triplet energy than one or more of the hosts closest to the HBL interface.

[0147] In one aspect, compound used in HBL contains the same molecule or the same functional groups used as host described above.


-continued

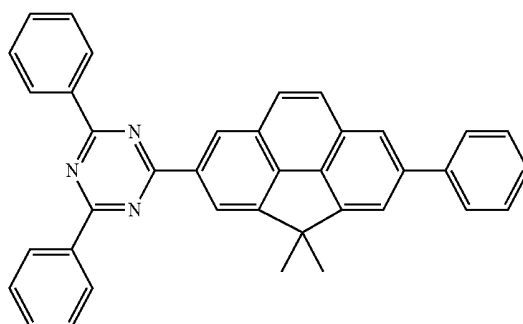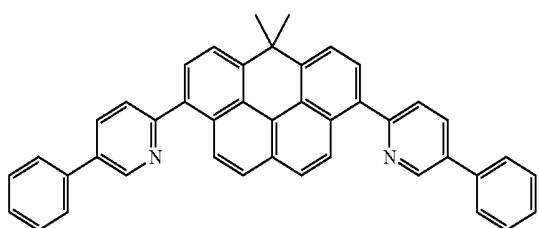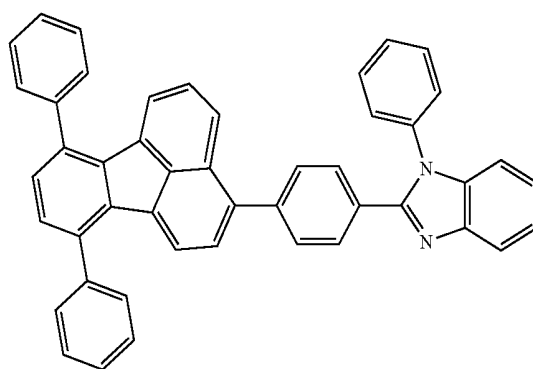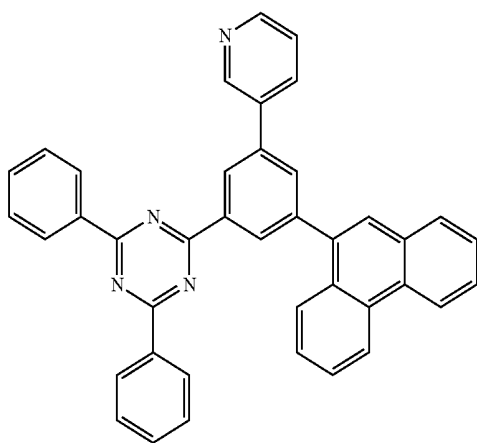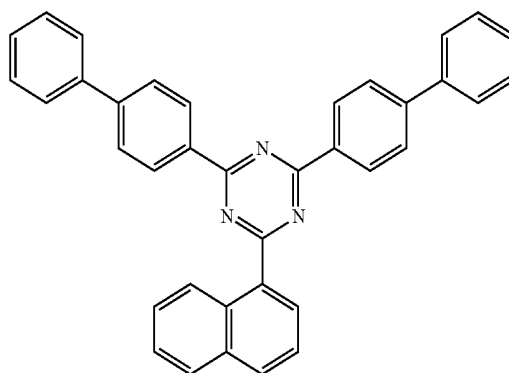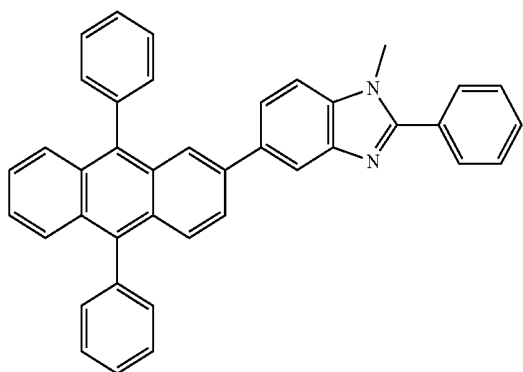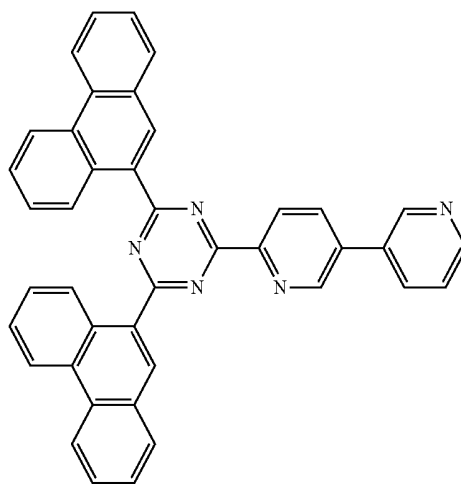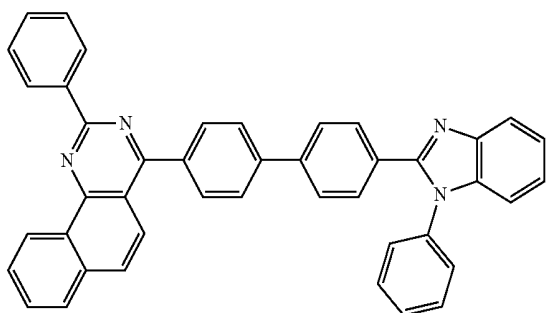


-continued

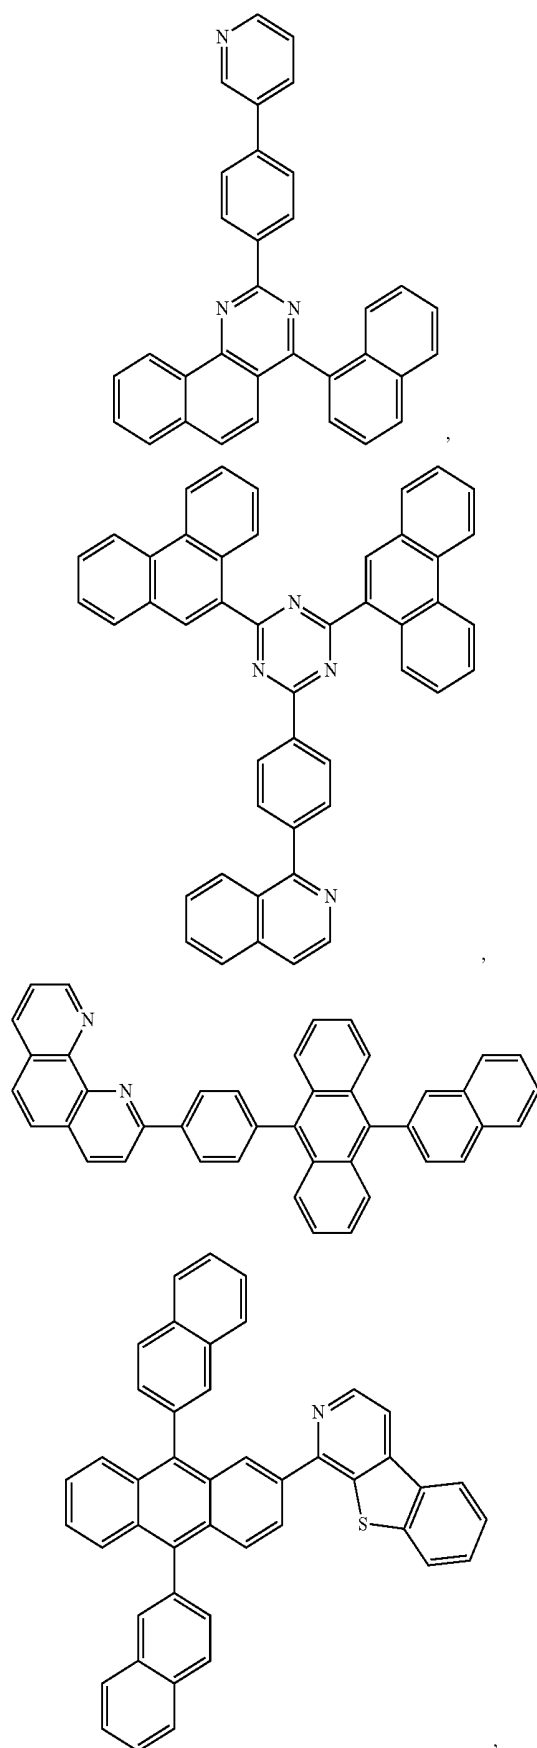






-continued

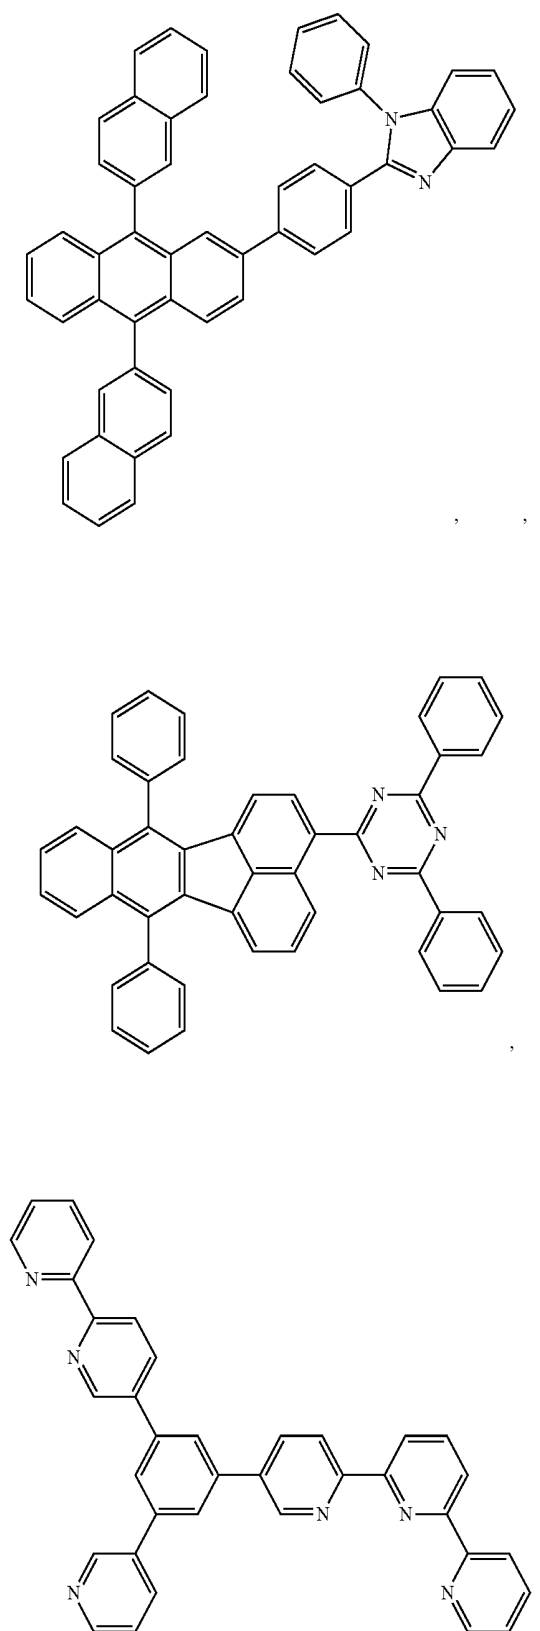





-continued

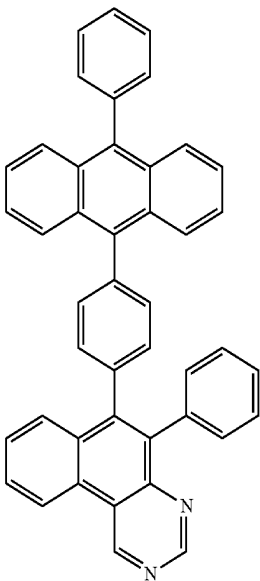





-continued

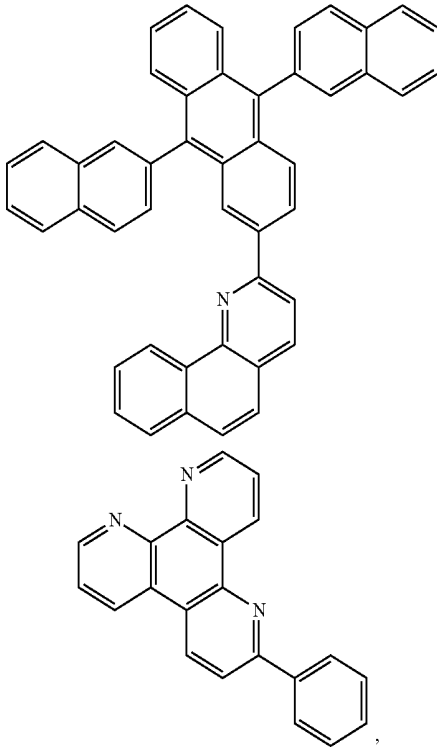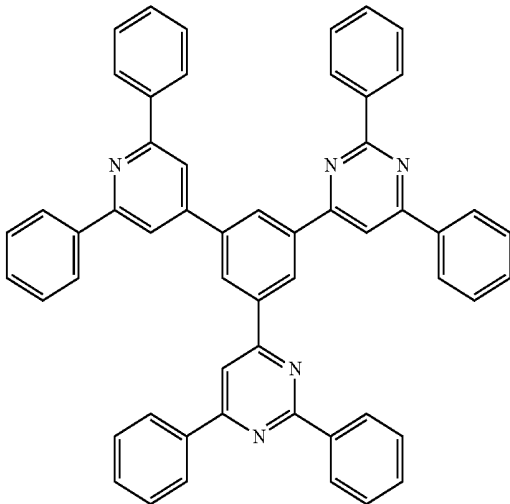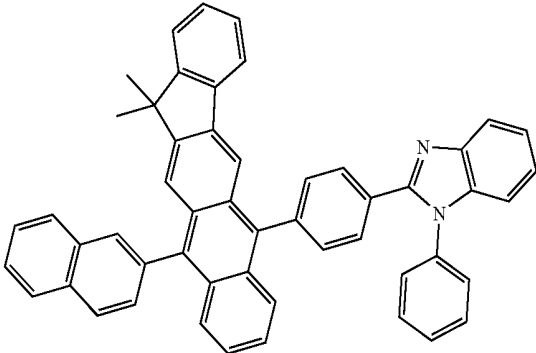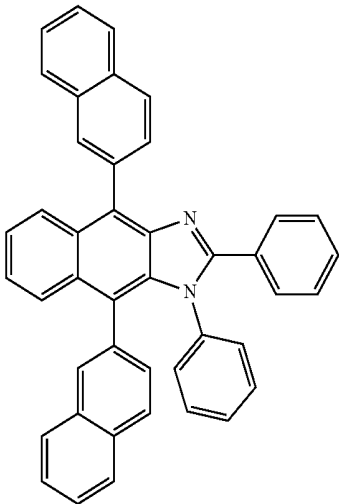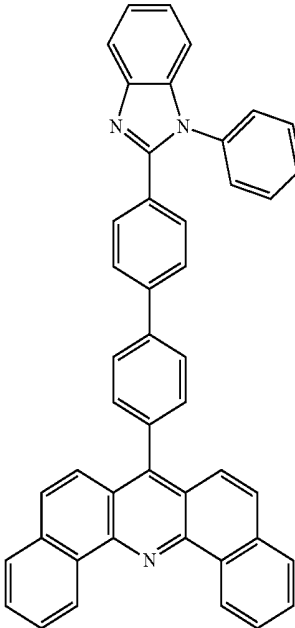




-continued

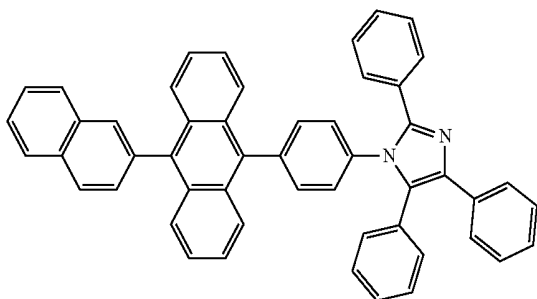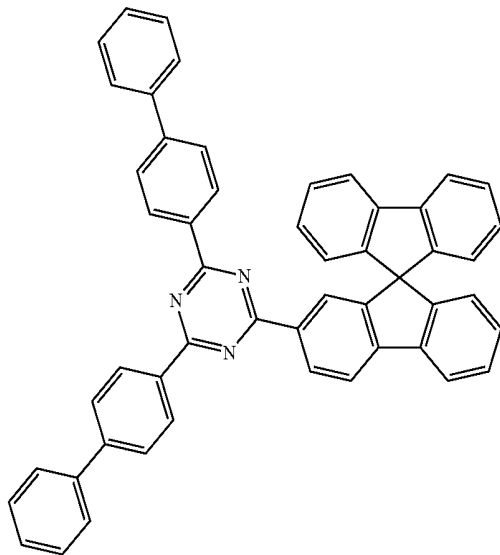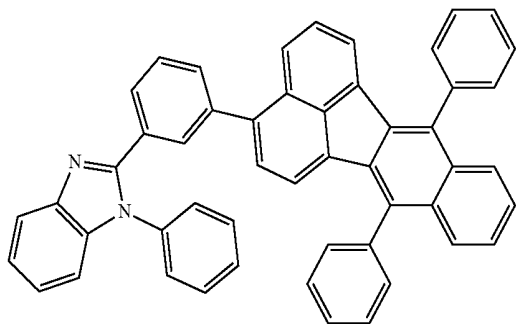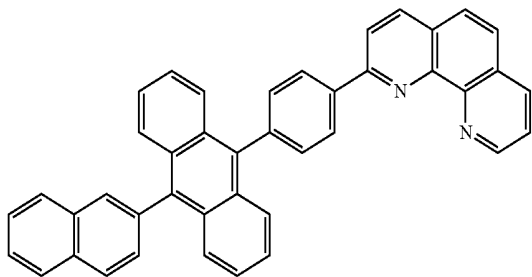

-continued

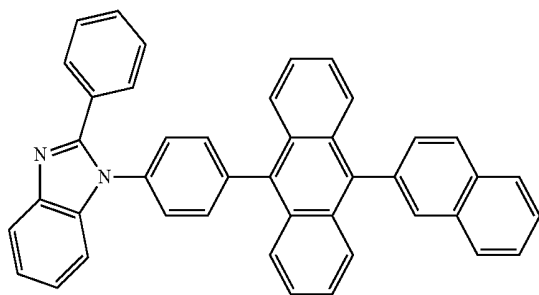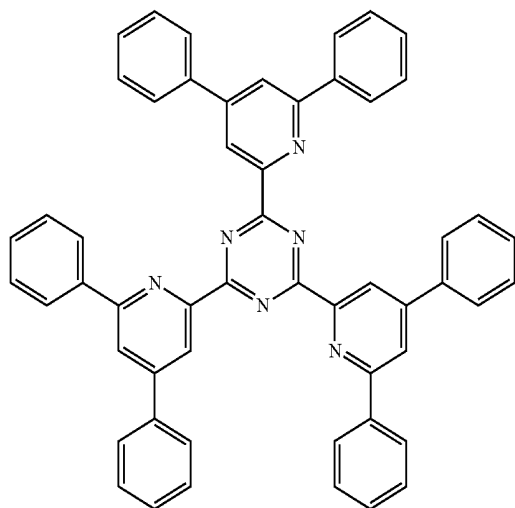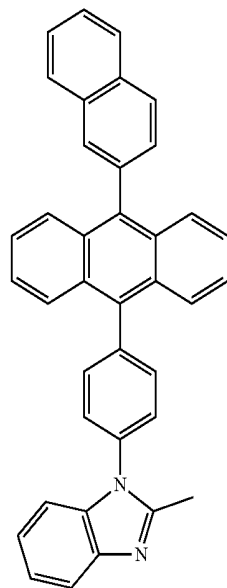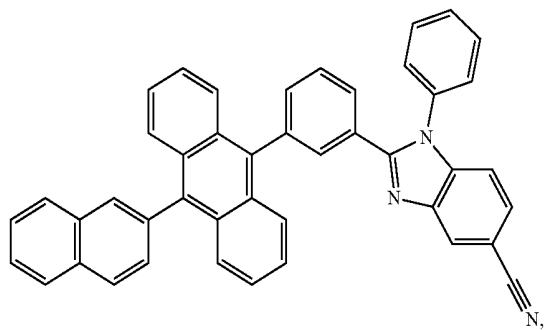


-continued

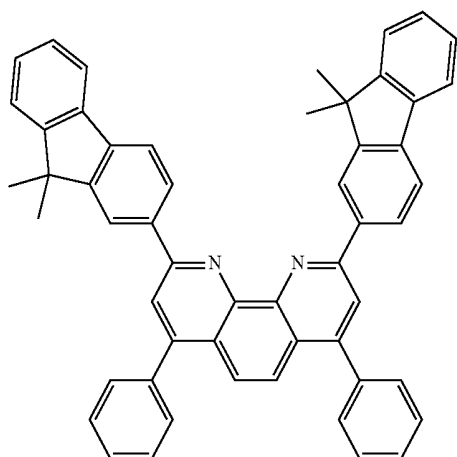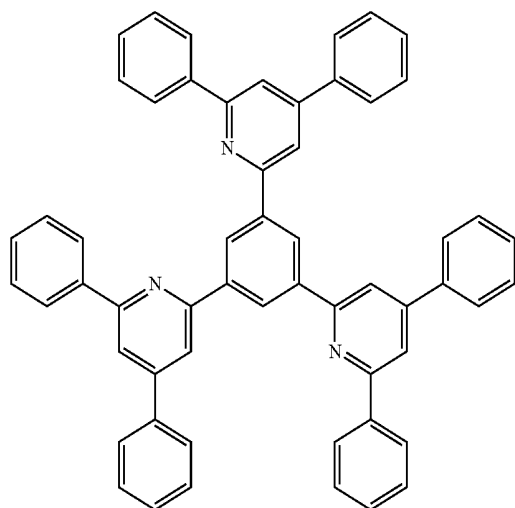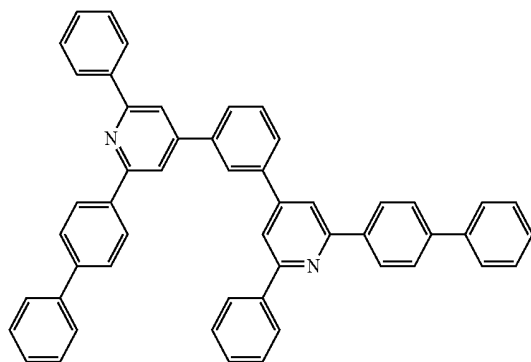

and

-continued

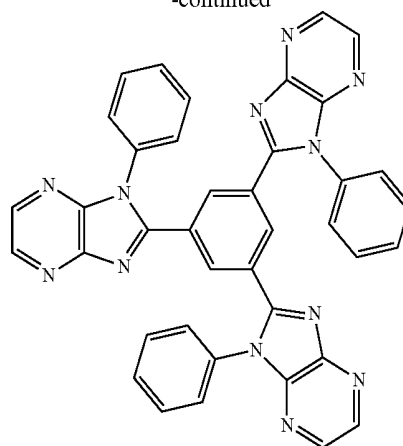

Charge Generation Layer (CGL)

[0153] In tandem or stacked OLEDs, the CGL plays an essential role in the performance, which is composed of an n-doped layer and a p-doped layer for injection of electrons and holes, respectively. Electrons and holes are supplied from the CGL and electrodes. The consumed electrons and holes in the CGL are refilled by the electrons and holes injected from the cathode and anode, respectively; then, the bipolar currents reach a steady state gradually. Typical CGL materials include n and p conductivity dopants used in the transport layers.


[0154] In any above-mentioned compounds used in each layer of the OLED device, the hydrogen atoms can be partially or fully deuterated. Thus, any specifically listed substituent, such as, without limitation, methyl, phenyl, pyridyl, etc. encompasses undeuterated, partially deuterated, and fully deuterated versions thereof. Similarly, classes of substituents such as, without limitation, alkyl, aryl, cycloalkyl, heteroaryl, etc. also encompass undeuterated, partially deuterated, and fully deuterated versions thereof.

[0155] It is understood that the various embodiments described herein are by way of example only, and are not intended to limit the scope of the invention. For example, many of the materials and structures described herein may be substituted with other materials and structures without deviating from the spirit of the invention. The present invention as claimed may therefore include variations from the particular examples and preferred embodiments described herein, as will be apparent to one of skill in the art. It is understood that various theories as to why the invention works are not intended to be limiting.


Experimental Section

[0156]

Compound A

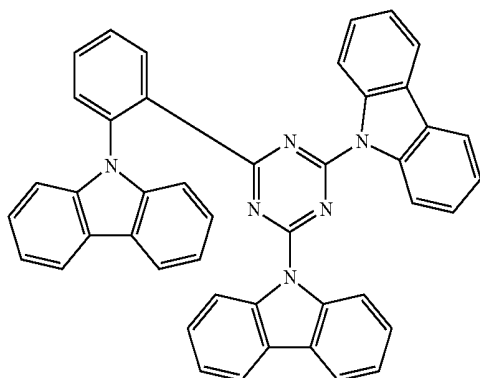


Compound B

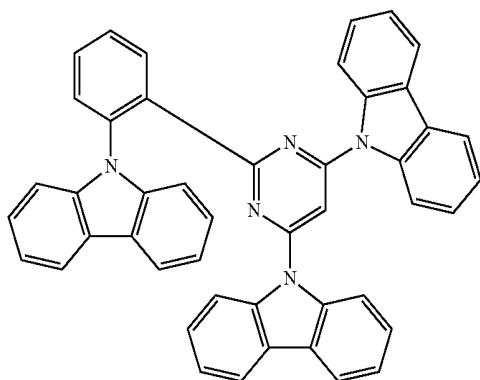

Synthesis of Compound A

Synthesis of 9,9'-(6-chloro-1,3,5-triazine-2,4-diyl)bis(9H-carbazole)


[0157]

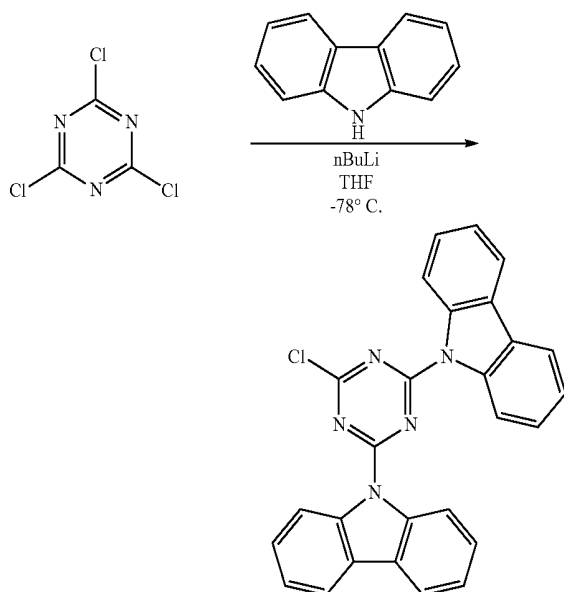

[0158] A flame dried 2 L flask was charged with 9H-carbazole (54.4 g, 325 mmol) and anhydrous THF (1 L) under nitrogen. Resulting solution was cooled to -70°C ., and n-BuLi (130 ml, 325 mmol) was added dropwise. Resulting mixture was allowed to warm to room temperature and then slowly transferred into a 3-neck 3 L flask containing a solution of 2,4,6-trichloro-1,3,5-triazine (30 g, 163 mmol) in THF (200 mL) via canula under nitrogen. The resulting mixture was then heated to 60°C . overnight. Reaction mixture was cooled to room temperature and quenched with water. The resulting precipitate was filtered, washed with water followed by hot EtOH ($\sim 500\text{ mL}$), and dried to afford 9,9'-(6-chloro-1,3,5-triazine-2,4-diyl)bis(9H-carbazole) (53.8 g, 121 mmol, 74.2% yield) as a yellow solid.

Synthesis of 9-(2-(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl)phenyl)-9H-carbazole


[0159]

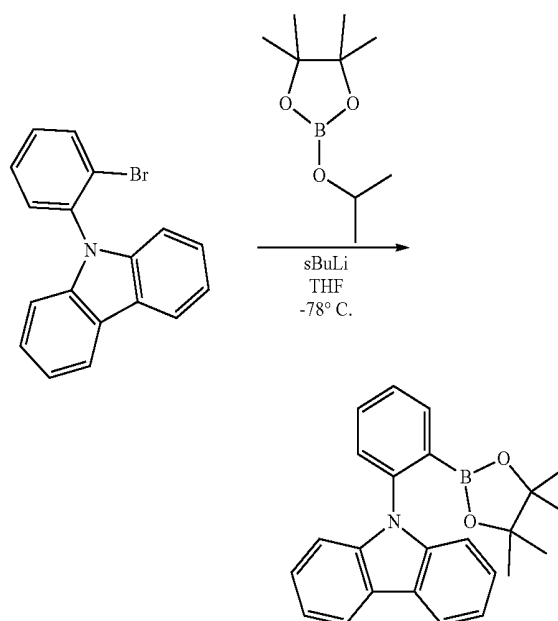

[0160] To a flame dried 1 L, 3-neck flask equipped with a magnetic stir bar and thermowell was added 9-(2-bromophenyl)-9H-carbazole (40 g, 124 mmol) and anhydrous THF (621 ml) under nitrogen. Resulting solution was cooled to -72°C ., and sec-butyllithium (155 ml, 217 mmol) was added dropwise over 40 minutes. The mixture was allowed to warm to -40°C . over 90 minutes. After complete consumption of 9-(2-bromophenyl)-9H-carbazole as evidenced by TLC, the mixture was cooled down to -78°C ., and 2-isopropoxy-4,4,5,5-tetramethyl-1,3,2-dioxaborolane (44.3 ml, 217 mmol) was added dropwise. The reaction mixture was slowly warmed to room temperature and stirred overnight. Reaction mixture was then cooled in ice-bath and carefully quenched with saturated aqueous ammonium chloride solution (100 mL) followed by 100 mL water. The organic phase was separated, and aqueous phase was extracted with CH_2Cl_2 . The combined organic phase was dried over Na_2SO_4 , concentrated and dried to afford 9-(2-(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl)phenyl)-9H-carbazole (44.3 g, 120 mmol, 97% yield) as an off-white solid.

Synthesis of 9,9'-(6-(2-(9H-carbazol-9-yl)phenyl)-1,3,5-triazine-2,4-diyl)bis(9H-carbazole) (Compound A)

[0161]

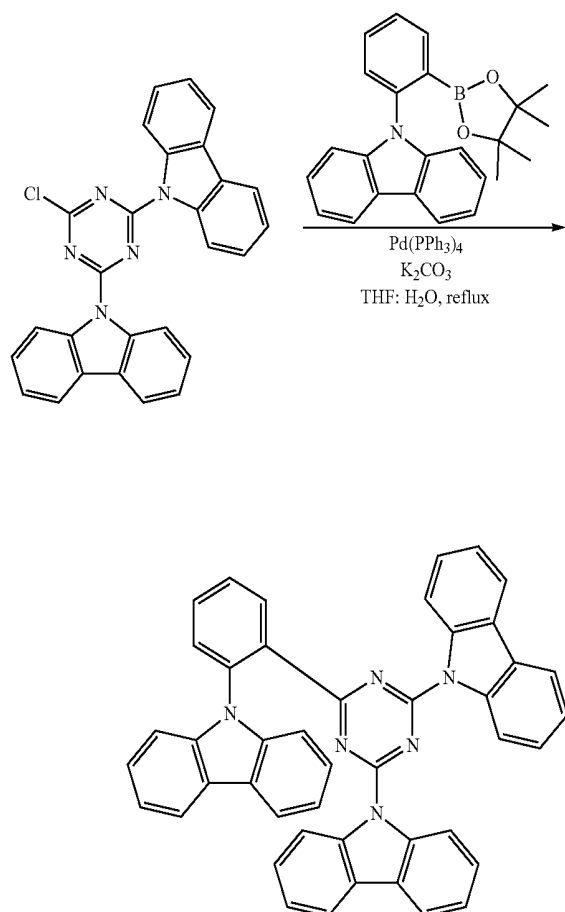


[0162] A pressure vial was charged with 9,9'-(6-chloro-1,3,5-triazine-2,4-diyl)bis(9H-carbazole) (18.11 g, 40.6 mmol), 9-(2-(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl)phenyl)-9H-carbazole (15 g, 40.6 mmol), and K_2CO_3 (16.84 g, 122 mmol). THF (148 ml), and Water (55.4 ml) were added and the mixture was degassed with nitrogen for 10 min. $\text{Pd(PH}_3)_4$ (4.69 g, 4.06 mmol) was then added and the resulting mixture was further degassed with nitrogen. The reaction mixture was sealed and heated at 90°C . for 72 hours. The reaction was cooled to room temperature and then quenched with water (100 mL). Resulting gray precipitate was filtered off and washed with MeOH. Solid was then dissolved in DCM (1 L), passed through a short silica plug, and reprecipitated with MeOH (1 L). Solid was filtered and triturated with Acetone (750 mL) overnight to obtain 23.1 g (87% yield) of 9,9'-(6-(2-(9H-carbazol-9-yl)phenyl)-1,3,5-triazine-2,4-diyl)bis(9H-carbazole) (Compound A).

Synthesis of Compound B

Synthesis of 9,9'-(2-chloropyrimidine-4,6-diyl)bis(9H-carbazole)


[0163]

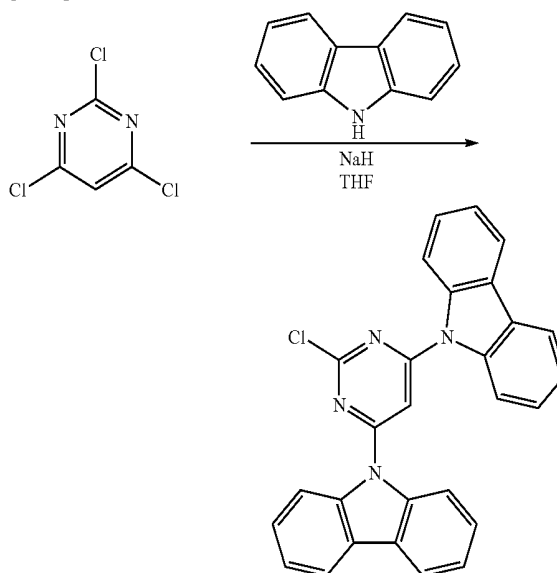


[0164] A flame dried 5 L-flask was charged with sodium hydride (60 wt %, 80 g, 2009 mmol) and THF (1605 ml). The mixture was stirred under nitrogen and cooled to -5°C . 9H-carbazole (112 g, 670 mmol) was then added portion wise and resulting mixture was stirred for 15 min. A solution of 2,4,6-trichloropyrimidine (82 g, 447 mmol) in THF (1958 ml) was added dropwise at -5°C ., and then allowed to warm to room temperature. After overnight stirring at room temperature, the reaction mixture was cooled to 0°C ., and quenched with water (250 mL). Resulting solid was filtered, and then triturated with heptane (1 L) followed by EtOAc (1 L). Further trituration with THF and EtOH gave 9,9'-(2-chloropyrimidine-4,6-diyl)bis(9H-carbazole) (57 g, 128 mmol, 38.3% yield) as a white solid.

Synthesis of 9,9'-(6-(2-(9H-carbazol-9-yl)phenyl)-1,3,5-triazine-2,4-diyl)bis(9H-carbazole) (Compound B)


[0165]

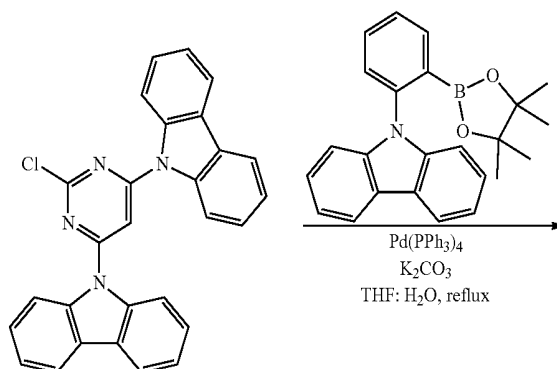

-continued

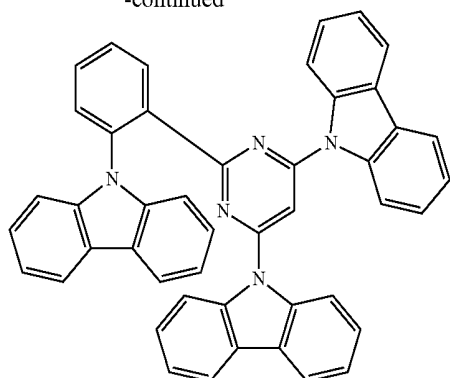


-continued

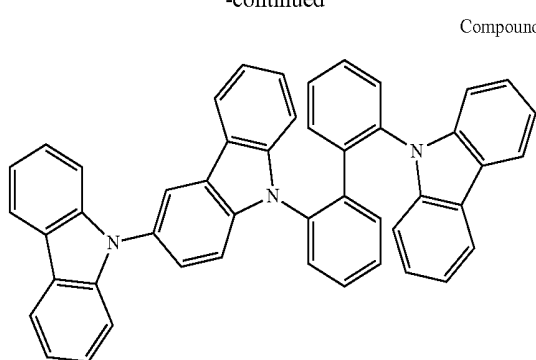

Compound 3


[0166] A pressure vial was charged with 9,9'-(2-chloropyrimidine-4,6-diyl)bis(9H-carbazole) (21.57 g, 48.5 mmol), 9-(2-(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl)phenyl)-9H-carbazole (20 g, 48.5 mmol), and K₂CO₃ (20.10 g, 145 mmol). THF (176 ml), and Water (66 ml) were added and the mixture was degassed with nitrogen for 10 min. Pd(Ph₃P)₄ (5.6 g, 4.85 mmol) was then added and the resulting mixture was further degassed with nitrogen. The reaction mixture was sealed and heated at 90° C. for 72 hours. The reaction mixture was cooled to room temperature and then quenched with water (100 mL). Resulting gray precipitate was filtered off, washed with water and MeOH to obtain 30 g (95% yield) of 9,9'-(2-(2-(9H-carbazol-9-yl)phenyl)pyrimidine-4,6-diyl)bis(9H-carbazole).

Device Compounds:

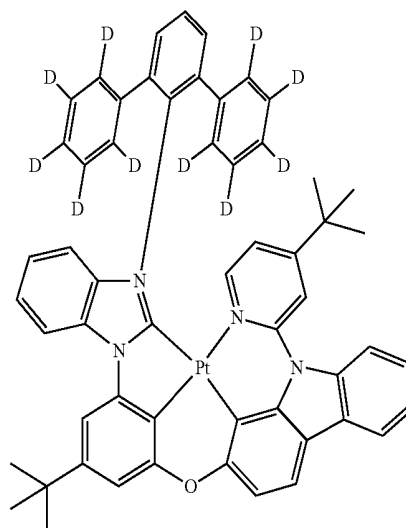
[0167]

Compound 4


Compound 1




Compound 5




Compound 2

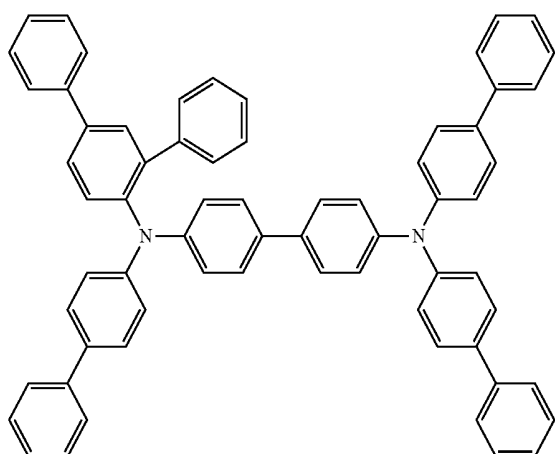


Compound 6

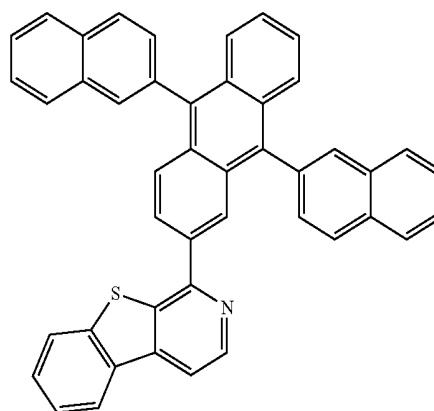

-continued

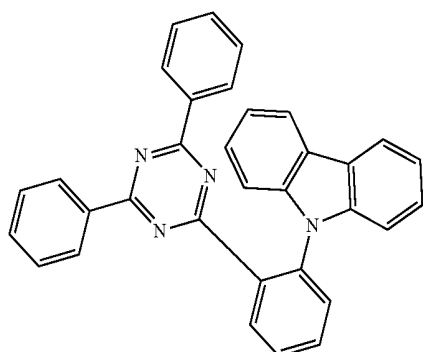

E-Host-1

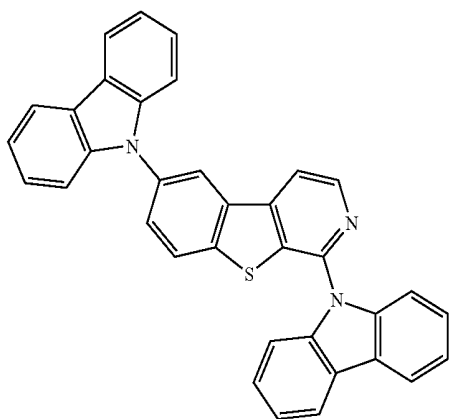

E-Host-2

[0168] We observe that materials with this chemical formula result in significantly increased stability. In Table 1, we compare that device properties of electron type hosts E-Host-1 and Compound A. We find that Compound A is 16.7 times more stable than the E-Host-1.

		at 10 mA/cm ² 1,000 nits						
1931 CIE		λ max	FWHM	Voltage	LE	EQE	LT90	LUMO
x	y	[nm]	[nm]	norm	norm	norm	norm	
Compound A	0.152 0.260	469	46	1.14	0.91	0.86	16.7	-2.75
E-Host-1	0.142 0.242	468	45	1.00	1.00	1.00	1.0	-2.74

[0169] We also observe that Compound B has significantly improved stability compared to E-Host-2, see Table 2. Note that the energy levels of the E-Host compared in each table are nearly identical.


		at 10 mA/cm ² 1,000 nits						
1931 CIE		λ max	FWHM	Voltage	LE	EQE	LT90	LUMO
x	y	[nm]	[nm]	norm	norm	norm	norm	
Compound B	0.133 0.212	468	41	1.24	1.05	1.06	1.5	-2.46
E-Host-2	0.133 0.216	468	41	1.00	1.00	1.00	1.0	-2.46

[0170] The OLED devices were grown on a glass substrate pre-coated with an indium-tin-oxide (ITO) layer having a sheet resistance of 15- Ω /sq. Prior to any organic layer deposition or coating, the substrate was degreased with solvents and then treated with an oxygen plasma for 1.5 minutes with 50 W at 100 mTorr and with UV ozone for 5 minutes.

[0171] The devices in Tables 1 and 2 were fabricated in high vacuum (<10⁻⁶ Torr) by thermal evaporation. The anode electrode was 750 Å of indium tin oxide (ITO). The device example had organic layers consisting of, sequentially, from the ITO surface, 100 Å thick Compound 1 (HIL), 250 Å layer of Compound 2 (HTL), 50 Å of Compound 3 (EBL), 300 Å of Compound 3 doped with 60% E-type host and 12% of Compound 4 (EML), 50 Å of E-type host (BL), 300 Å of Compound 5 doped with 35% of Compound 6 (ETL), 10 Å of Compound 5 (EIL) followed by 1,000 Å of Al (Cath). All devices were encapsulated with a glass lid sealed with an epoxy resin in a nitrogen glove box (<1 ppm of H₂O and O₂) immediately after fabrication with a moisture getter incorporated inside the package. Doping percentages are in volume percent. The device characteristics at 10 mA/cm² and 1000 nits are normalized to those of the comparison compounds E-Host-1 and E-Host-2.

We claim:

1. A compound of Formula I:

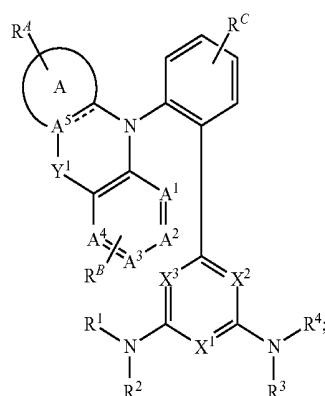

Formula I

wherein ring A is a 5-membered or 6-membered aromatic ring;

wherein R^A, R^B, and R^C each independently represent mono to the maximum allowable substitution, or no substitution;

wherein Y¹ is absent or present, and when present is selected from the group consisting of a direct bond, O, S, Se, CRR', NR, SiRR', and BR;
 wherein each X¹-X³ is N or CR;
 wherein at least one of X¹-X³ is N;
 wherein each A¹-A⁵ is independently C or N;

wherein the maximum number of N atoms that can connect to each other within each ring is two;

wherein each R^1 , R^2 , R^3 , and R^4 is independently selected from the group consisting of alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, aryl, heteroaryl, and combinations thereof;

wherein each R, R^1 , R^4 , R^B , and R^C is independently a hydrogen or a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acid, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and

wherein any two substituents may be joined or fused together to form a ring.

2. The compound of claim 1, wherein each R, R^1 , R^4 , R^B , and R^C is independently a hydrogen or a substituent selected from the group consisting of deuterium, fluorine, alkyl, cycloalkyl, heteroalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, aryl, heteroaryl, nitrile, isonitrile, sulfanyl, and combinations thereof.

3. The compound of claim 1, wherein X^1 - X^3 are each N.

4. The compound of claim 1, wherein X^1 is CR, and X^2 and X^3 are N.

5. The compound of claim 1, wherein X^2 is CR, and X^1 and X^3 are N.

6. The compound of claim 1, wherein X^1 is N, and X^2 and X^3 are CR.

7. The compound of claim 1, wherein R^1 , R^2 , R^3 , and R^4 are each aryl or heteroaryl.


8. The compound of claim 1, wherein R^1 and R^2 are joined to form a carbazole group.

9. The compound of claim 1, wherein at least one selected from the following conditions is true: (a) R^3 and R^4 are joined to form a carbazole group; (b) R^1 and R^2 are joined to form a carbazole group and R^3 and R^4 are joined together to form a carbazole group; (c) A^5 is C, and ring A is a 6-membered aromatic ring; (d) R^3 and R^4 are joined to form a carbazole group, A^5 is C, and ring A is a 6-membered aromatic ring; and (e) R^1 and R^2 are joined to form a carbazole group, R^3 and R^4 are joined together to form a carbazole group, A^5 is C, and ring A is a 6-membered aromatic ring.


10. The compound of claim 1, wherein A^5 is N, and ring A is a 5-membered aromatic ring.

11. The compound of claim 1, wherein A^1 - A^5 are each C.

12. The compound of claim 1, wherein the compound is selected from the group consisting of:

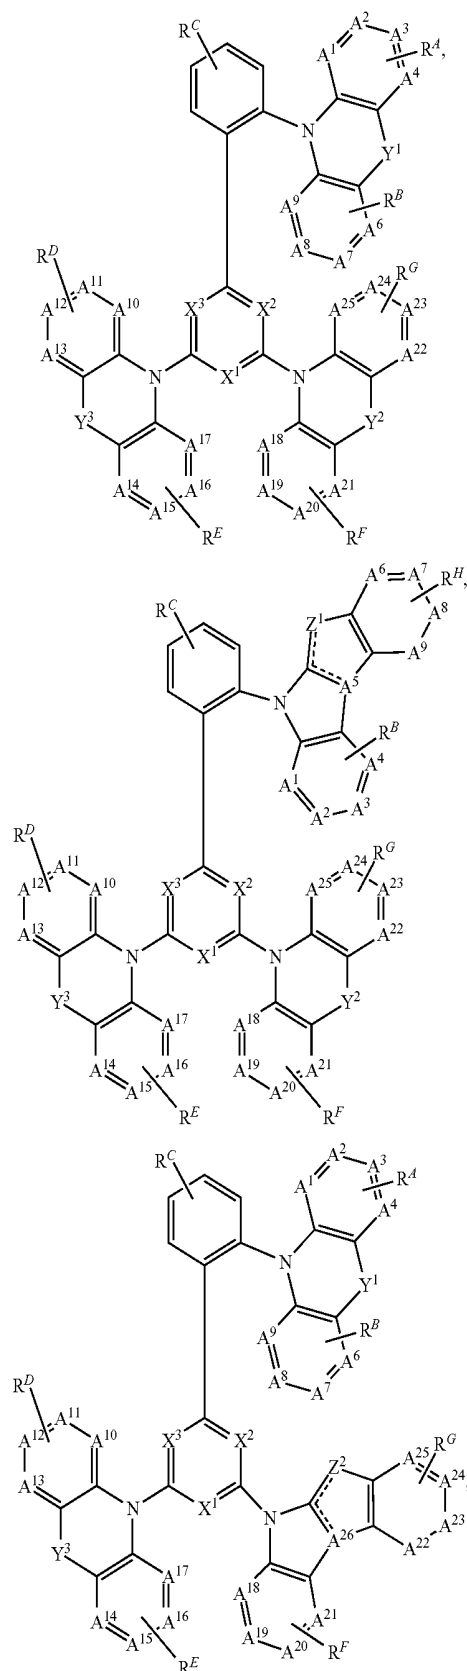

-continued

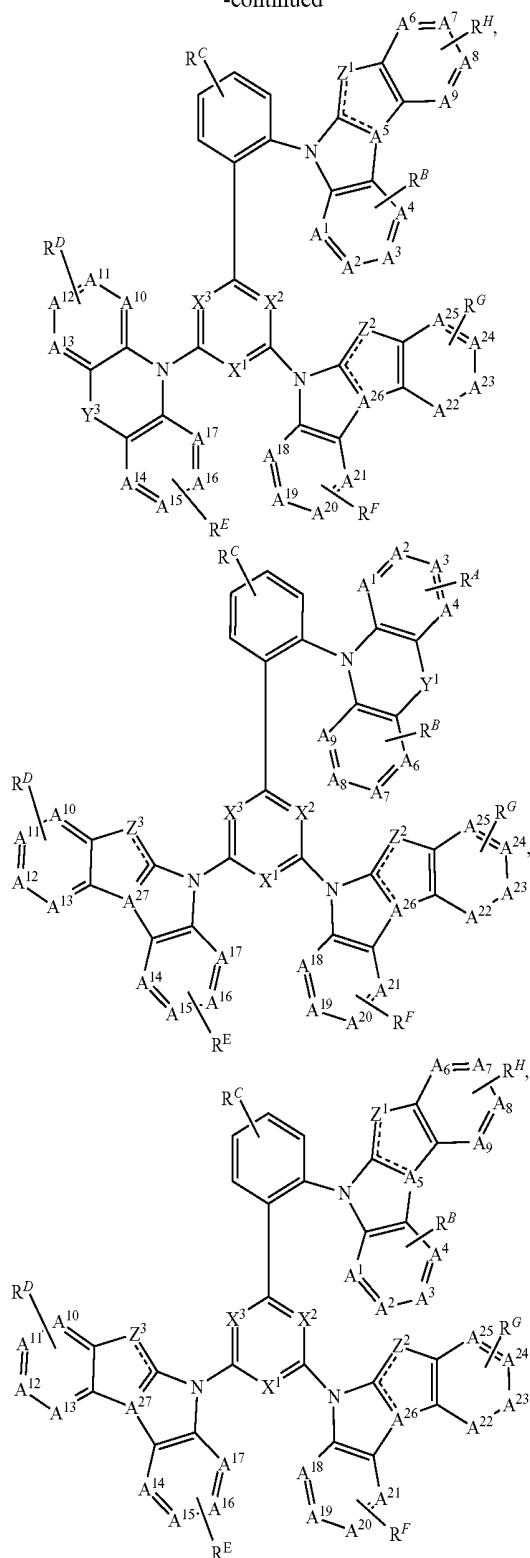

wherein R^D , R^E , R^F , R^G and R^H represent mono to the maximum allowable substitution, or no substitution;
 wherein each Y^2 and Y^3 is independently selected from a group consisting of a direct bond, O, S, Se, CRR', NR, SiRR', and BR, or it is not present;
 wherein A^6 to A^{25} are each independently C or N;


wherein the maximum number of N atoms that can connect to each other within each ring is two;

wherein Z^1 to Z^3 are each independently selected from a group consisting of O, S, Se, CRR', NR, SiRR', or BR;


wherein each R^D , R^E , R^F , R^G and R^H is independently a hydrogen or a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acid, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and

wherein any two substituents may be joined or fused together to form a ring.

13. The compound of claim 1, wherein the compound is selected from the group consisting of Compound H1-B1-B1 to Compound H50-B60-B60-B60 based on the numbering formula Hn-Bi-Bj-Bk, wherein n is an integer from 1 to 50, wherein i, j, and k are each independently an integer from 1 to 60, wherein H1 to H50 have the following structures:

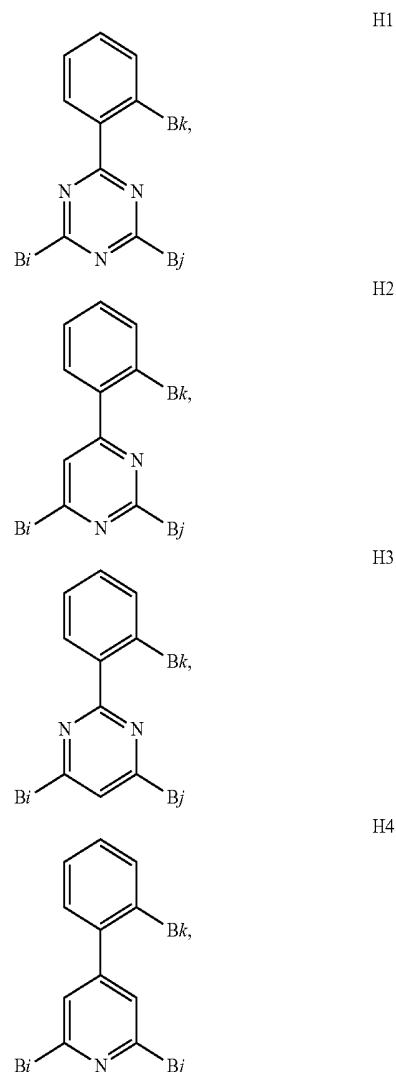

-continued

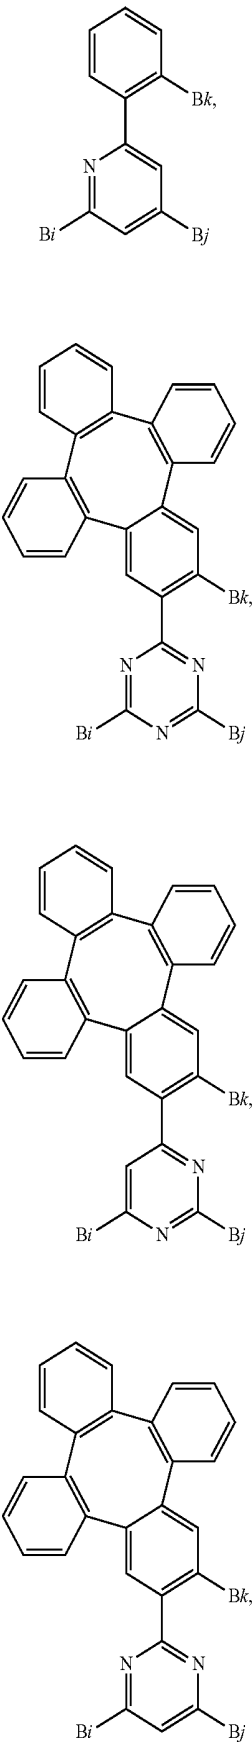


H5

H6

H7

H8

-continued

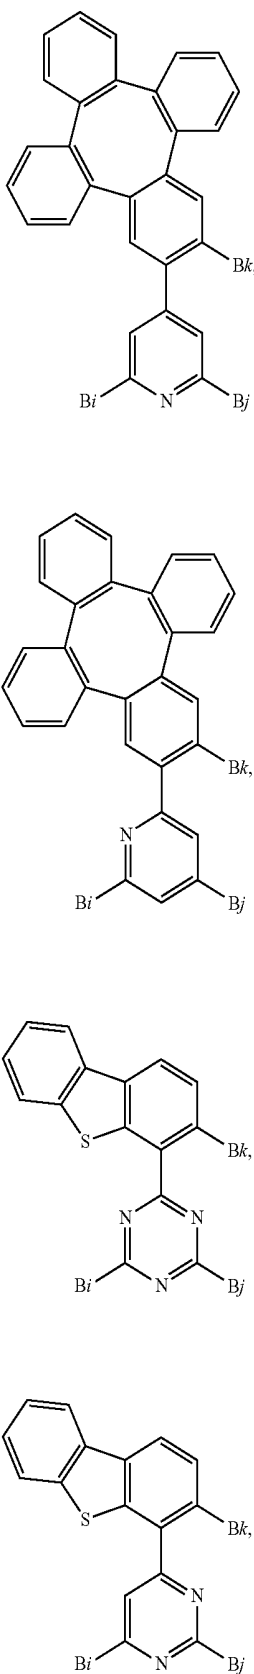


H9

H10

H11


H12

-continued




H13


-continued




H18




H14




H19




H15




H20




H16



H21




H17




H22

-continued




H23


-continued




H28




H24




H29




H25




H30

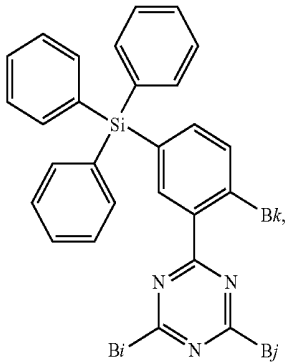

H26




H27

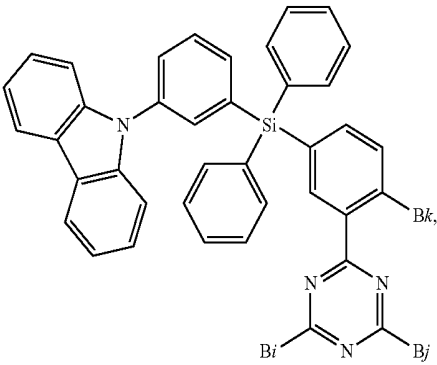


H31

-continued

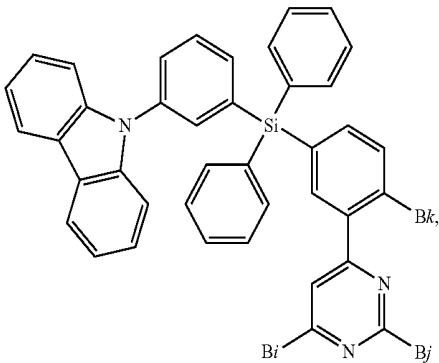


H32


-continued

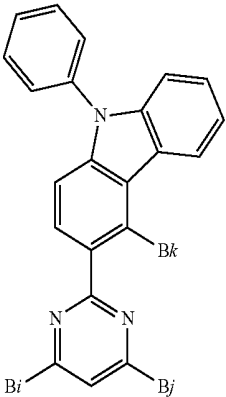


H36

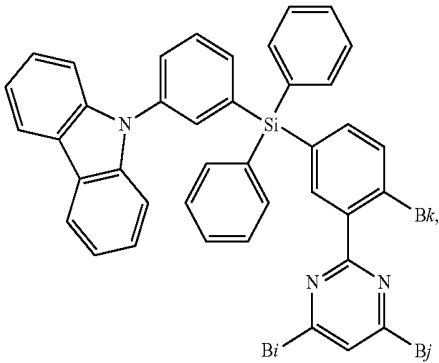


H33




H37

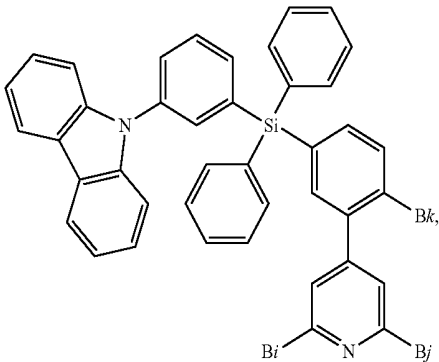


H34



H38

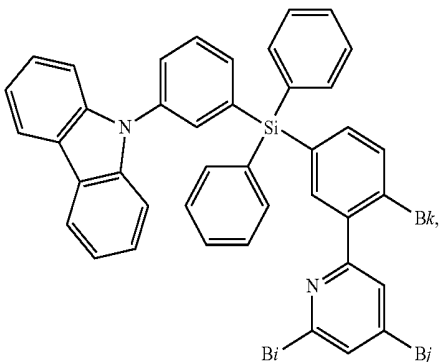


H35

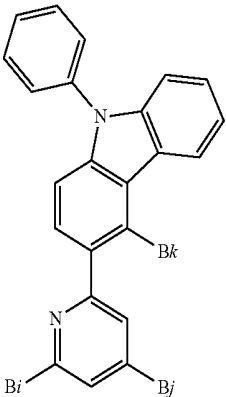


H39

-continued




H40


-continued




H44




H41

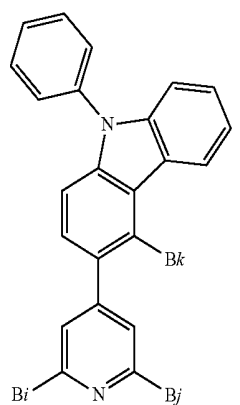


H45

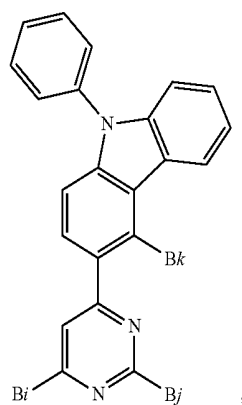


H42



H46






H43




H47






-continued

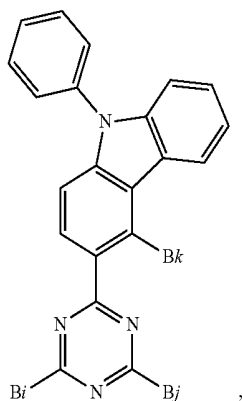


or the compound is selected from the group consisting of Compound H51-B1-B1 to Compound H70-B60-B60 based on the numbering formula Hm-Bi-Bj, wherein m is an integer from 51 to 70, wherein i and j are each independently an integer from 1 to 60, wherein H51 to H70 have the following structures:



-continued




-continued




H57

-continued




H62


H58



H63





H59




H64


H60




H61

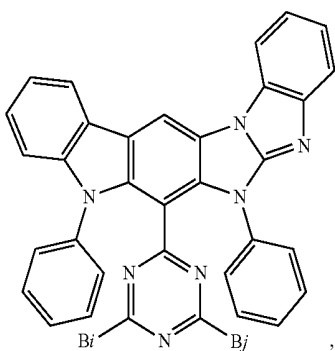

H65

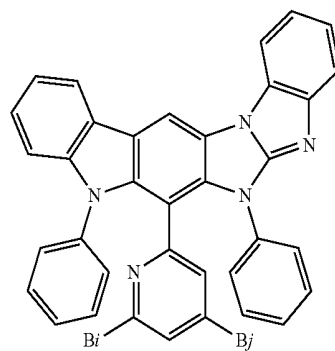


-continued



H66


-continued




H70

and wherein B1 to B60 have the following structures:


H67




B1




H68




B2




B3




H69



B4




-continued




B5


-continued




B10




B6




B11




B7




B12




B8



B13




B9




B14

-continued




B15

-continued




B20


B16




B17




B21




B18

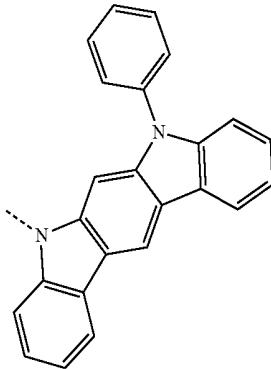


B22



B19




B23




B24


-continued




B25




B26



B27

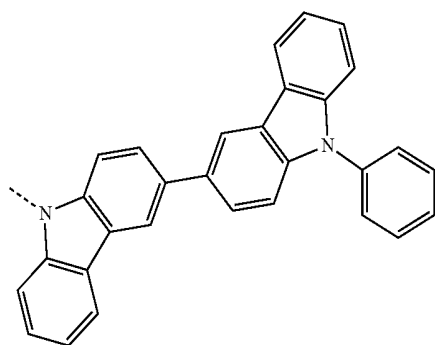


B28

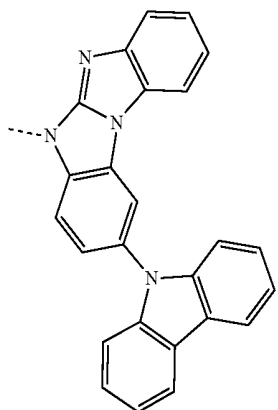


B29


-continued

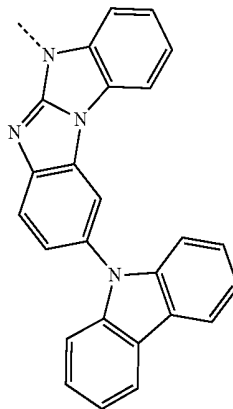


B30



B31

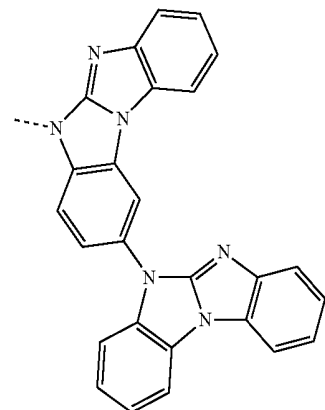


B32

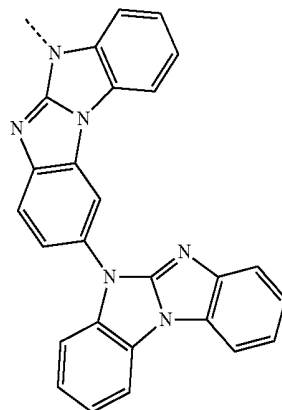


B33

-continued




B34


-continued

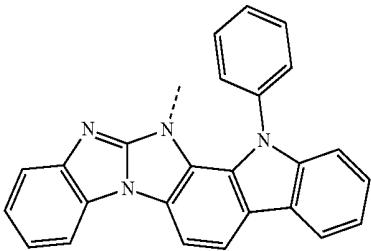


B39

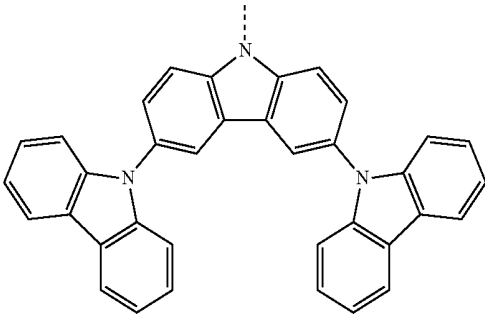


B35

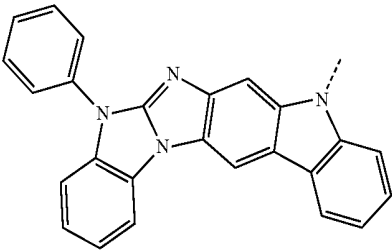


B40

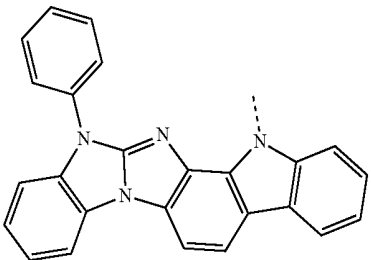


B41




B36




B42

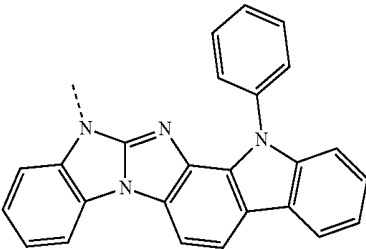


B37

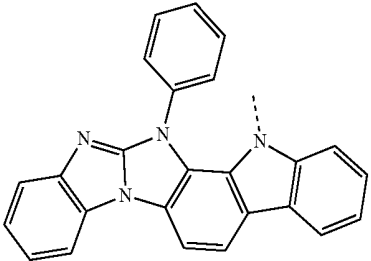

B43

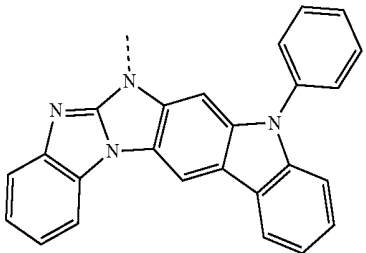


B38

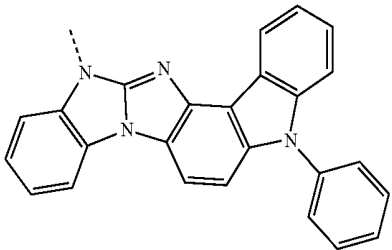


B44

-continued

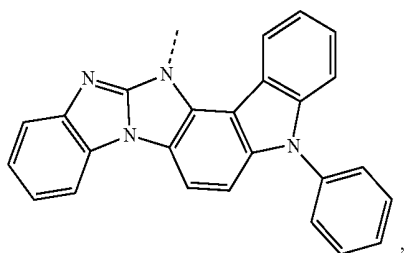


B45

-continued

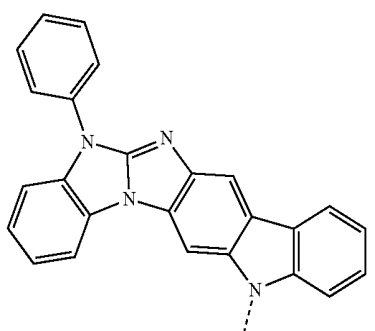


B50


B46

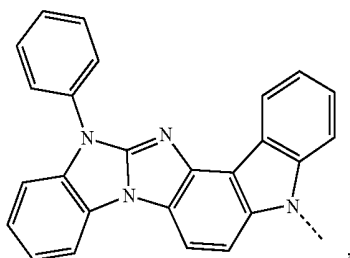


B51

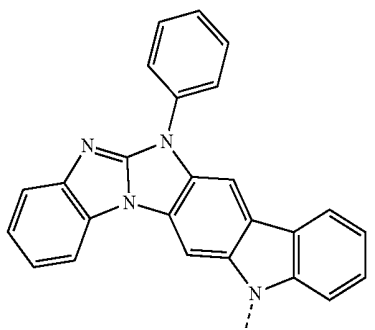


B47

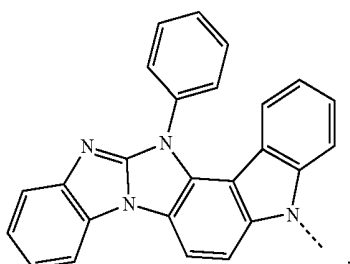


B52

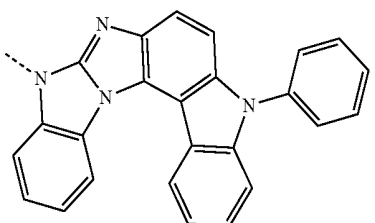


B48

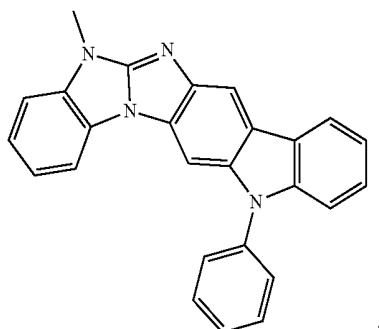


B53




B49

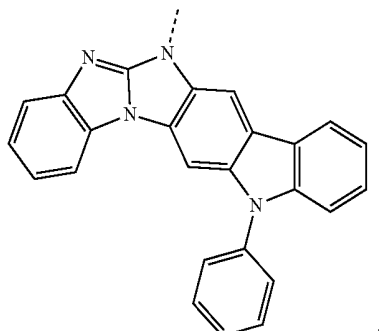

B54

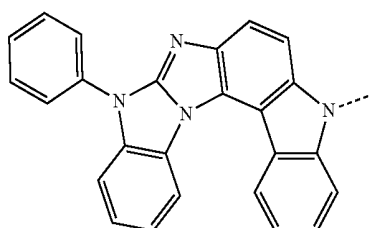


-continued




B55

-continued

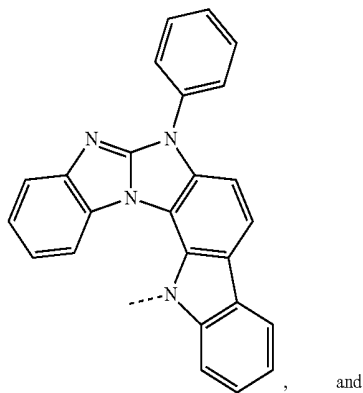


B59

and




B56

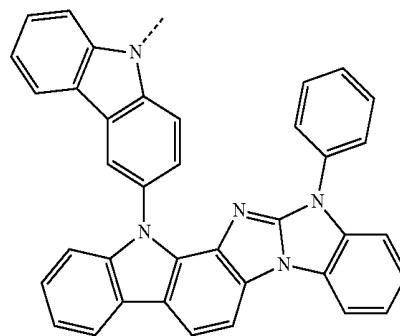


B60



14. The compound of claim 1, wherein the compound is selected from the group consisting of:




B57

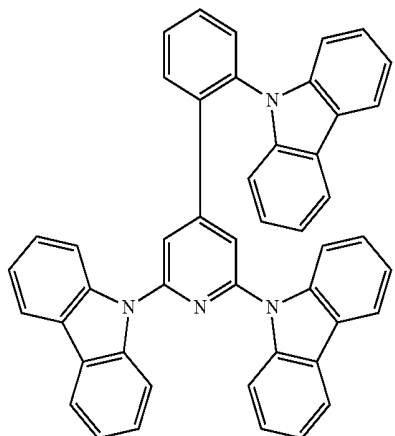






B58

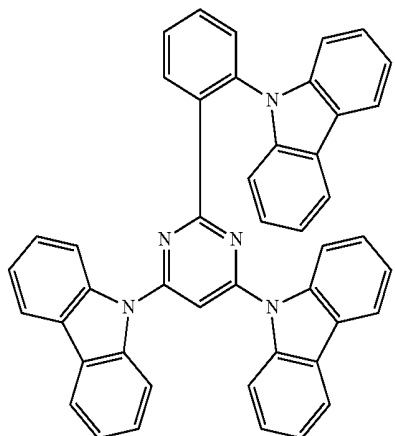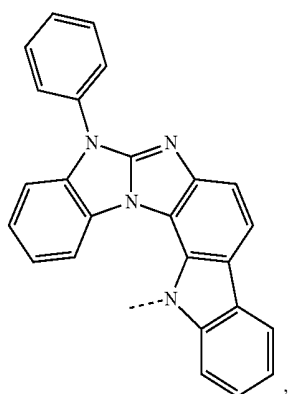


-continued

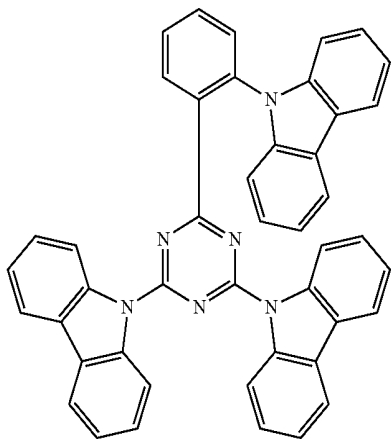






-continued

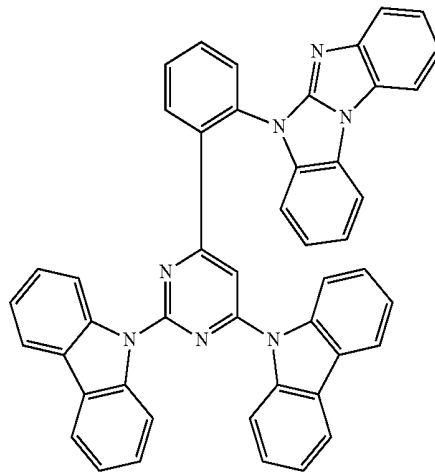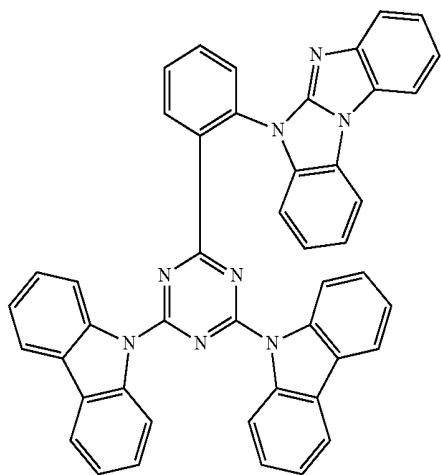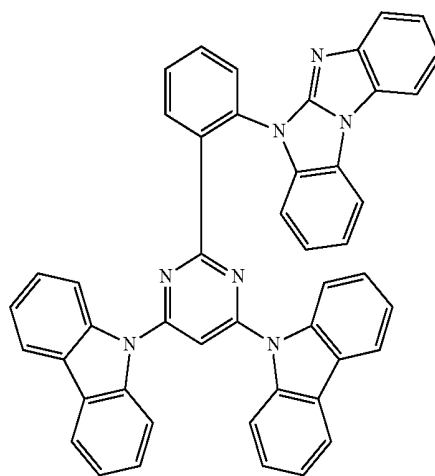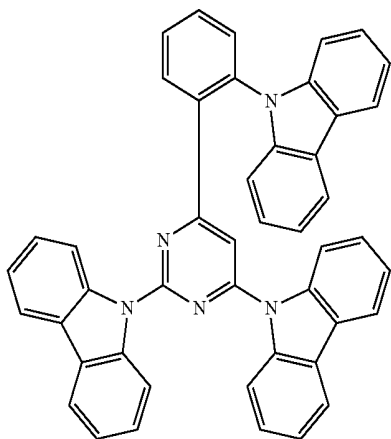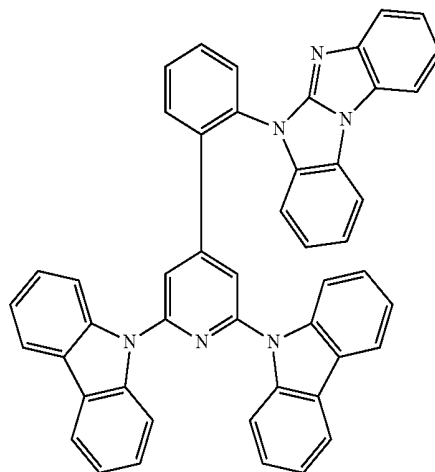


-continued

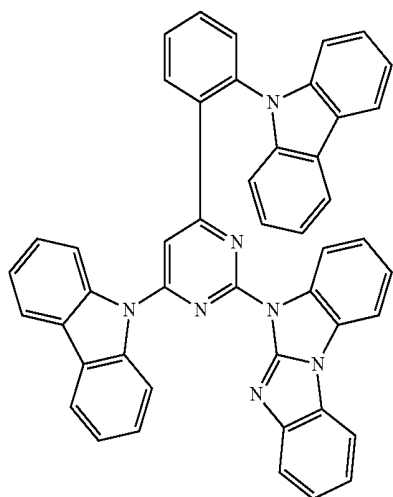






-continued

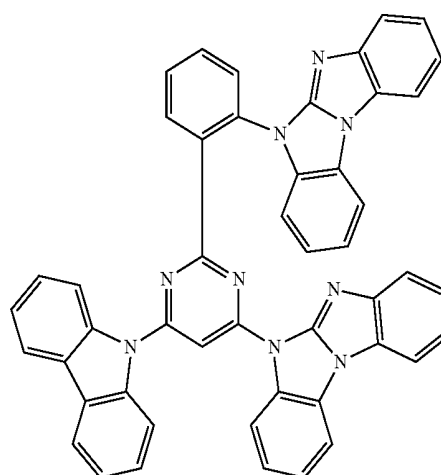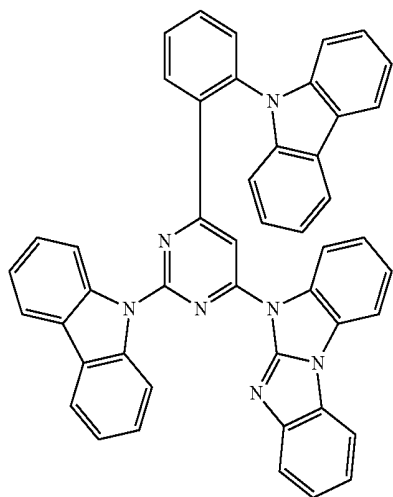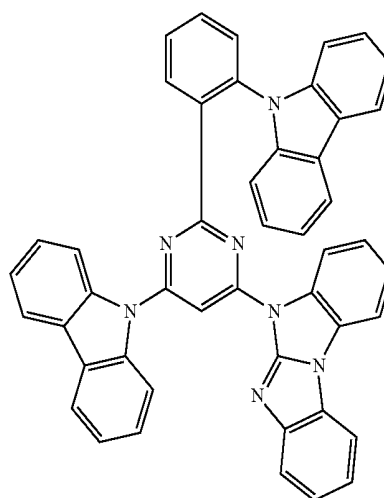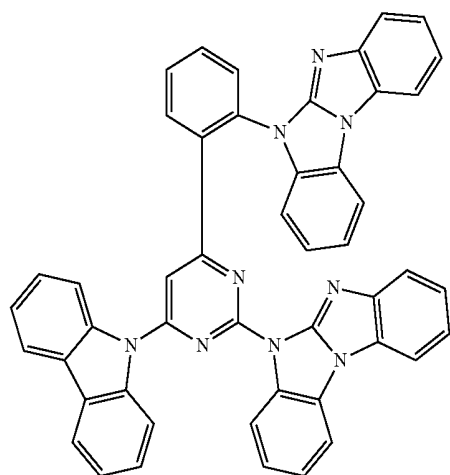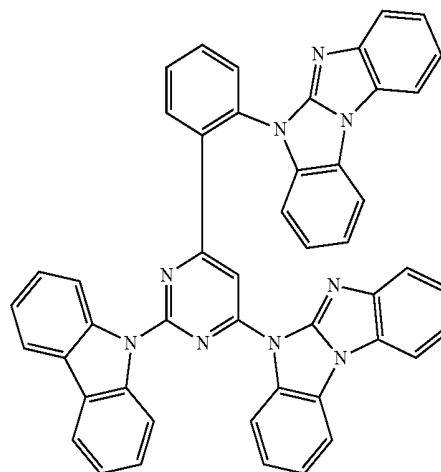




-continued

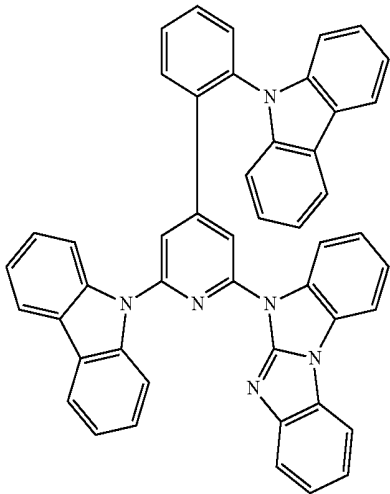




-continued

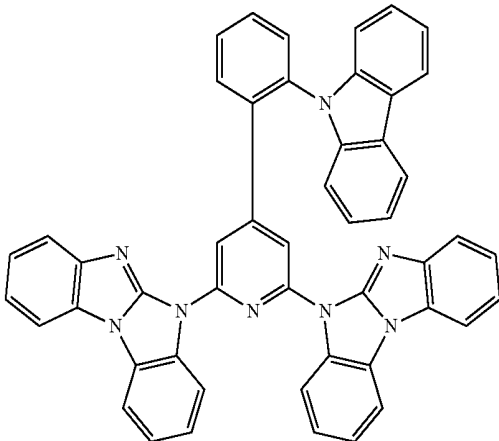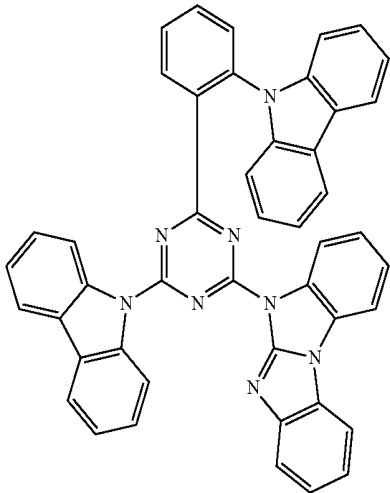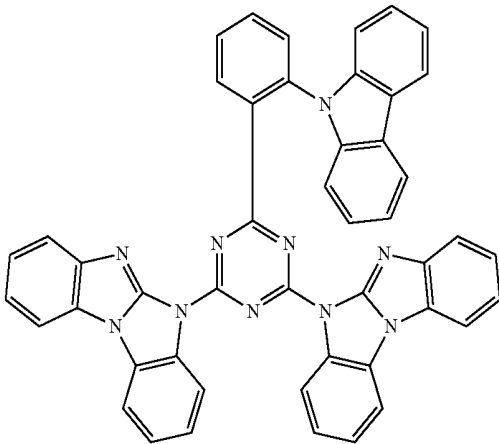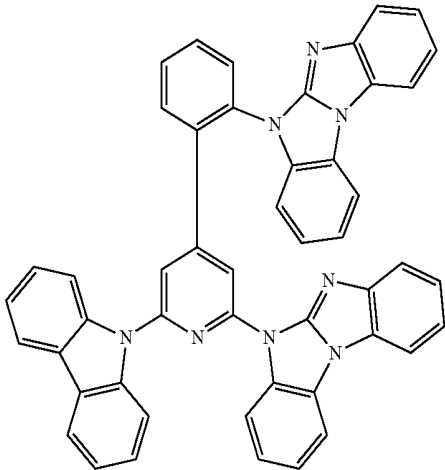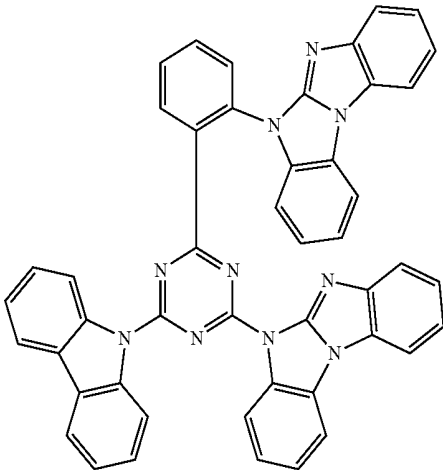


-continued

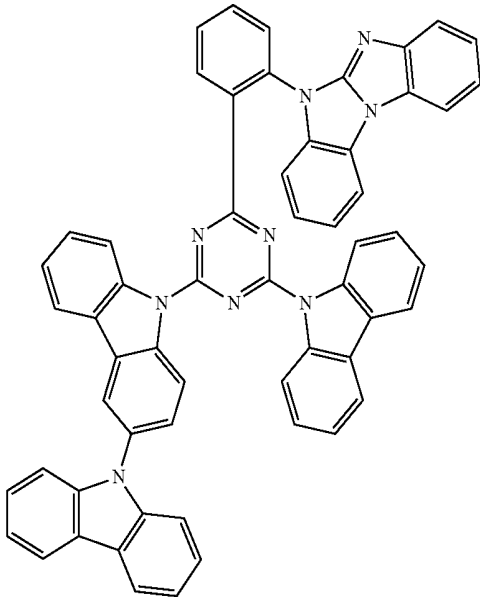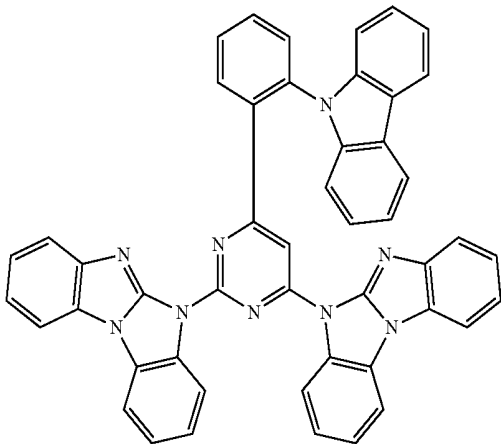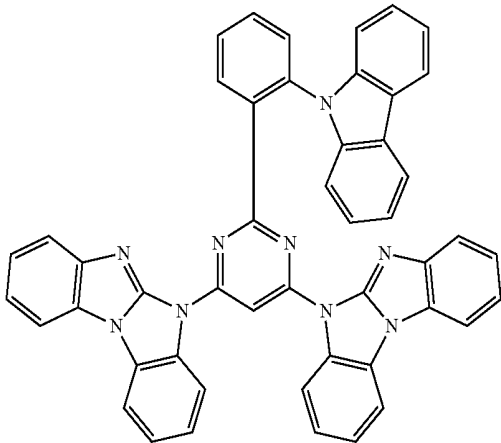






-continued

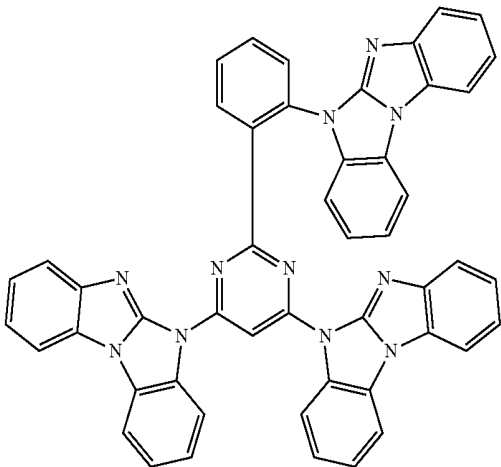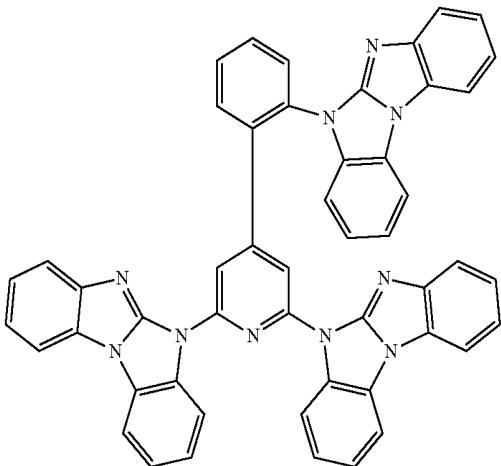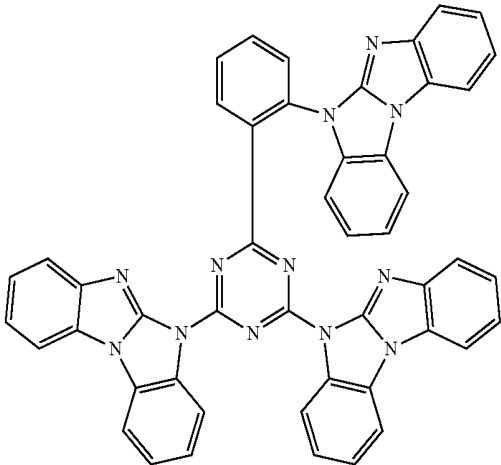


-continued

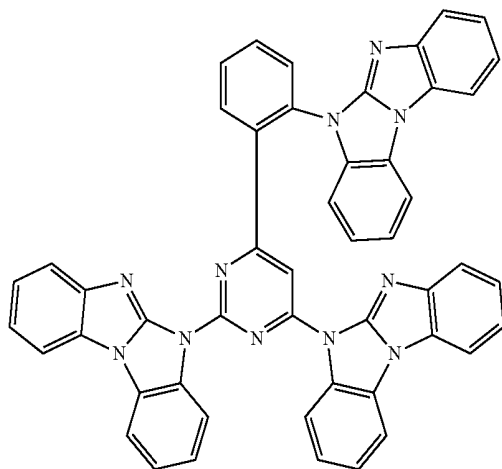






-continued

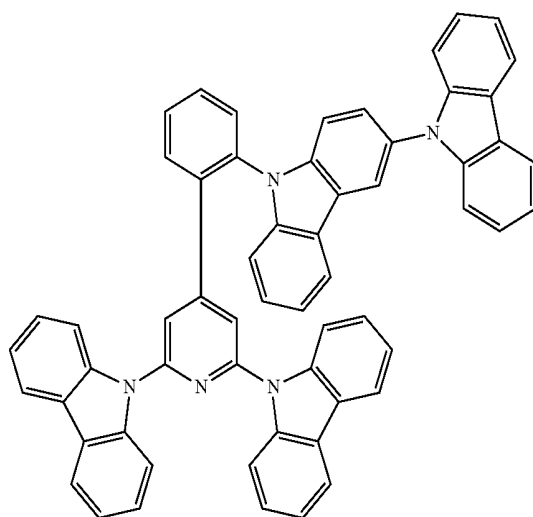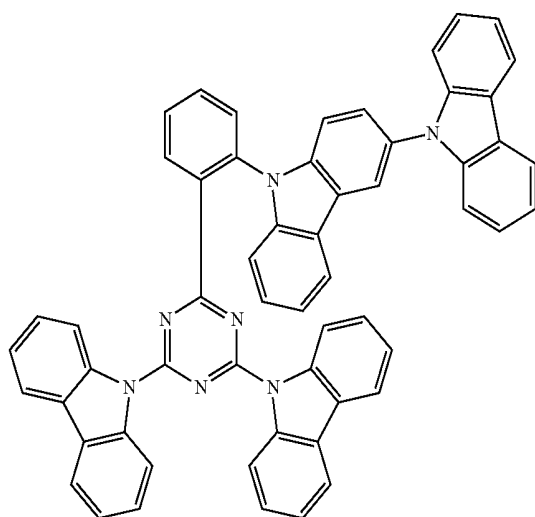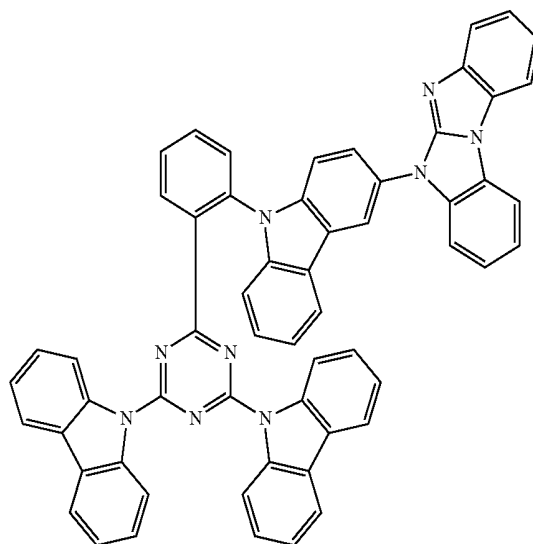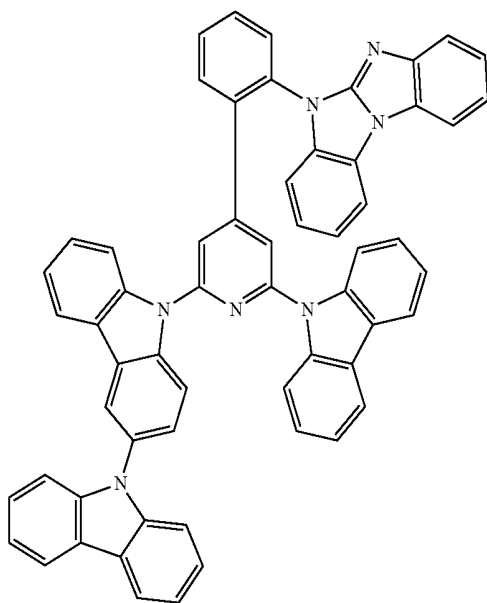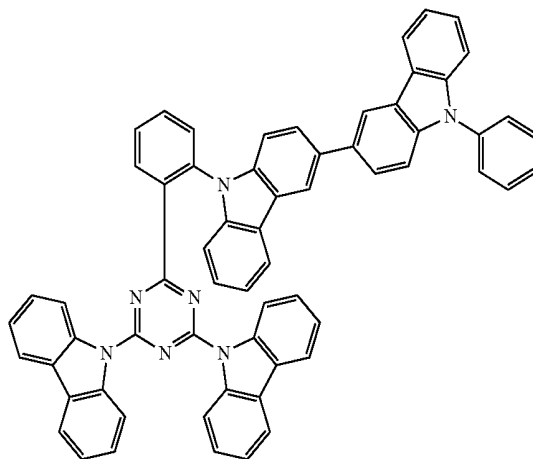


-continued

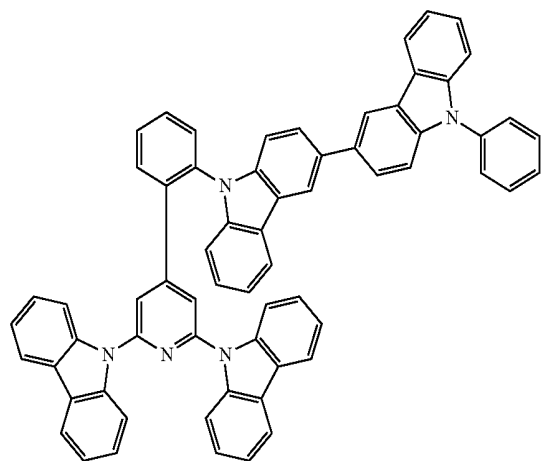


-continued

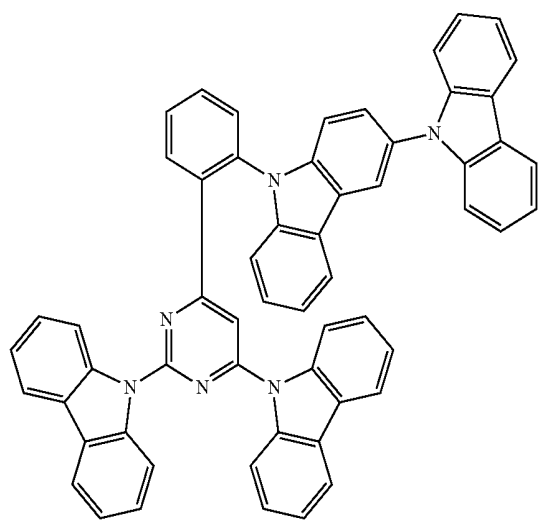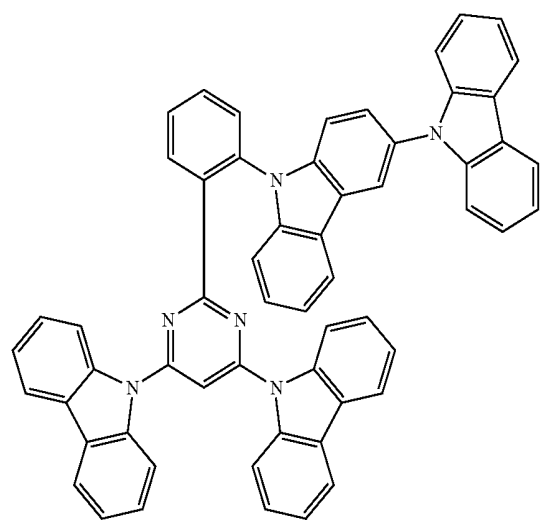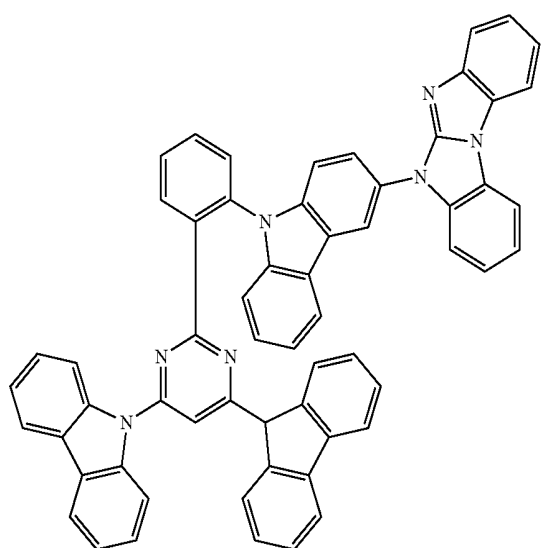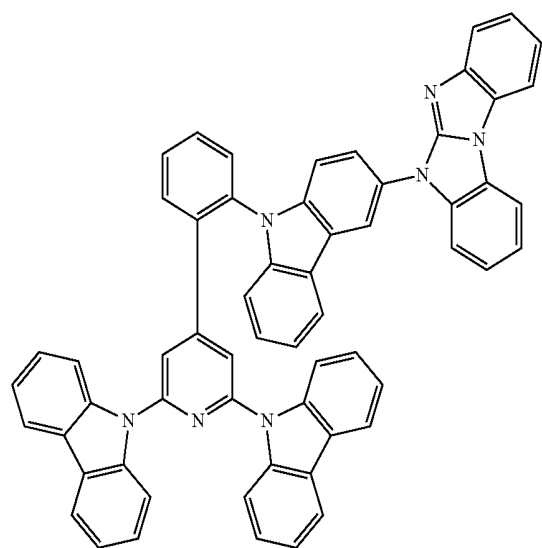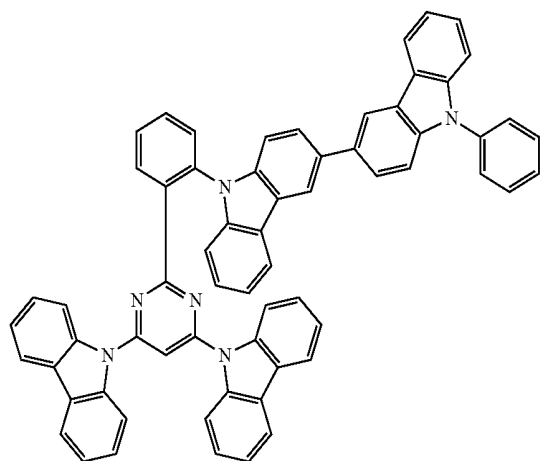





-continued

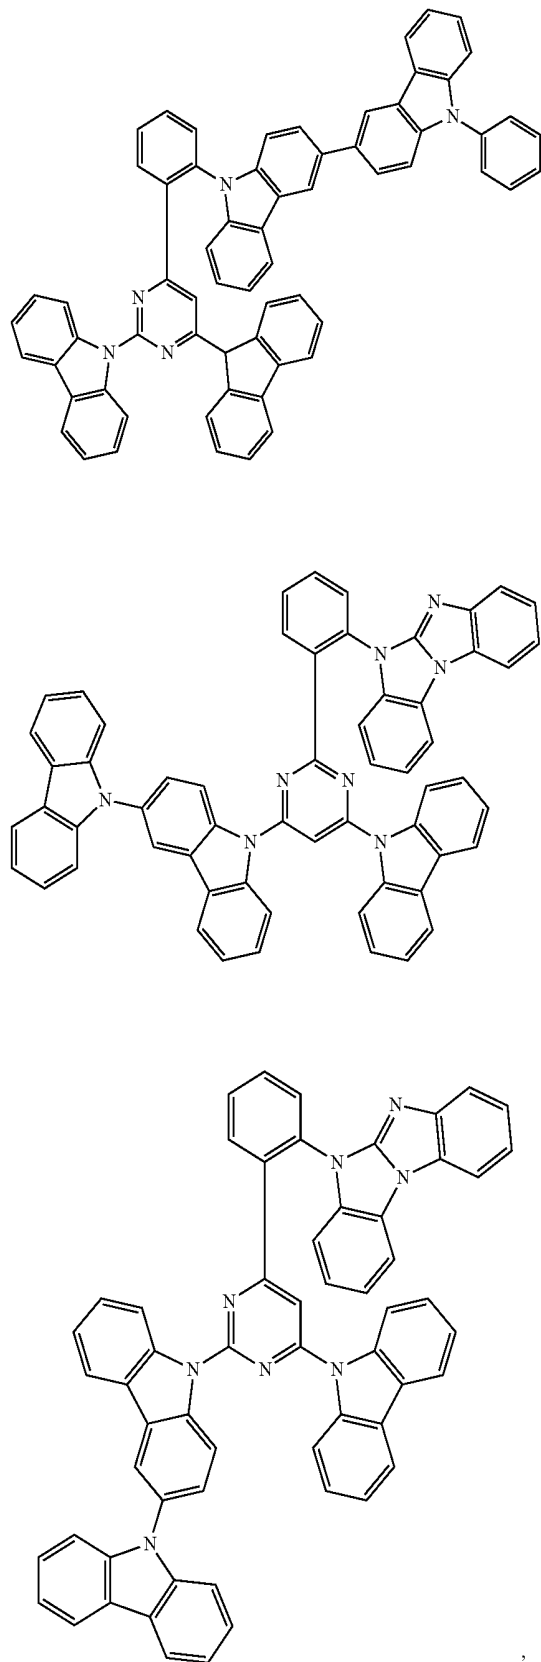




-continued

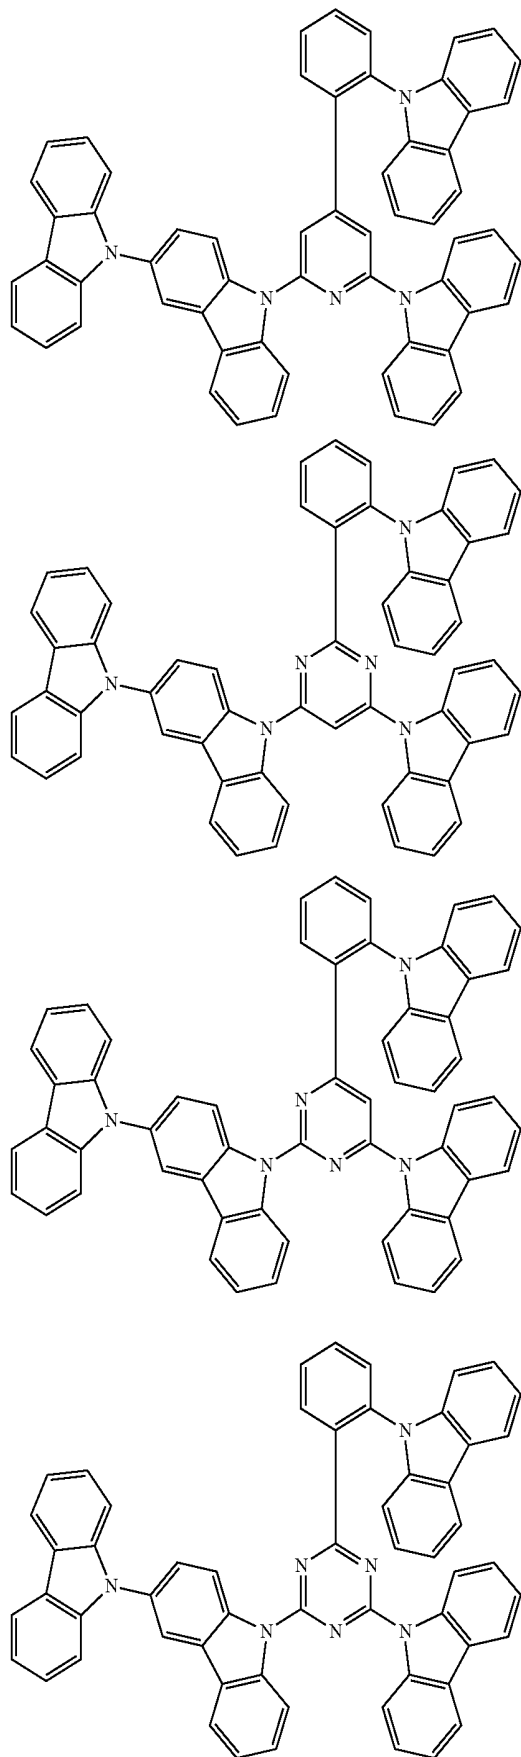


-continued

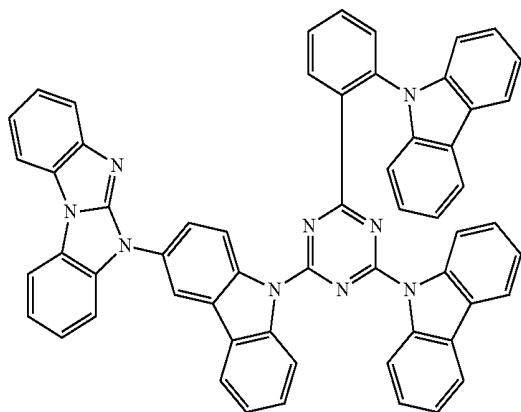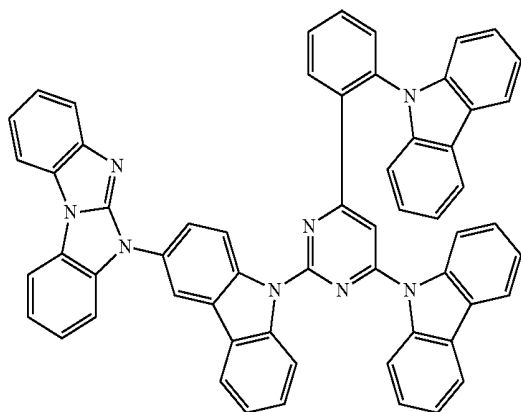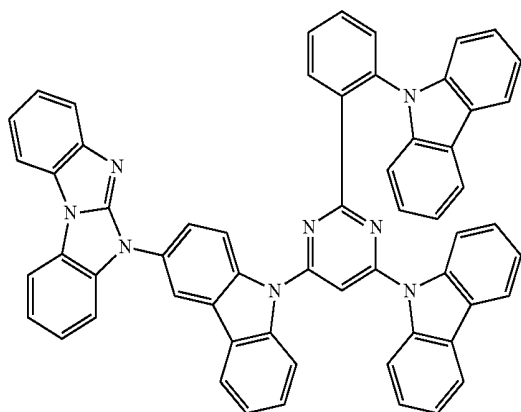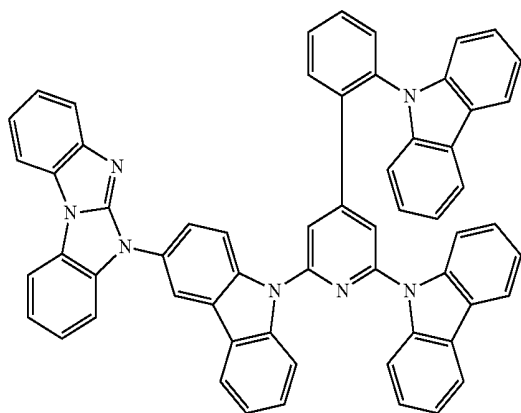






-continued

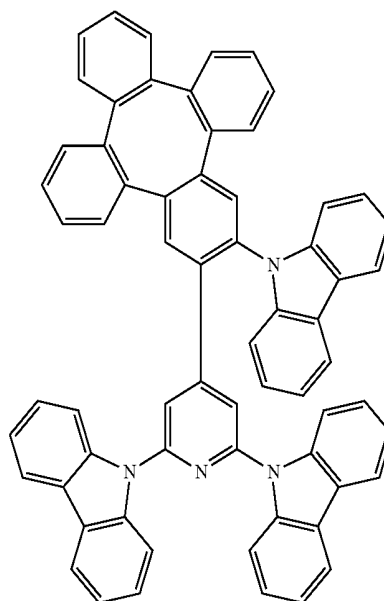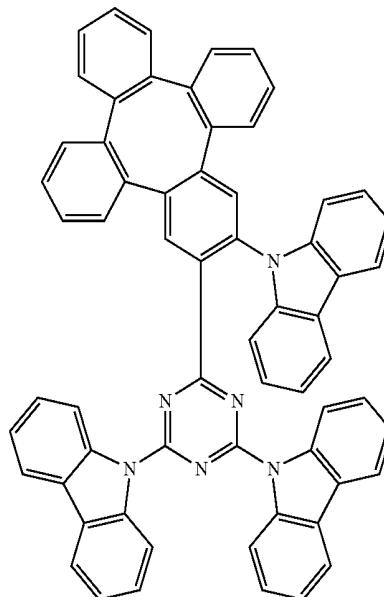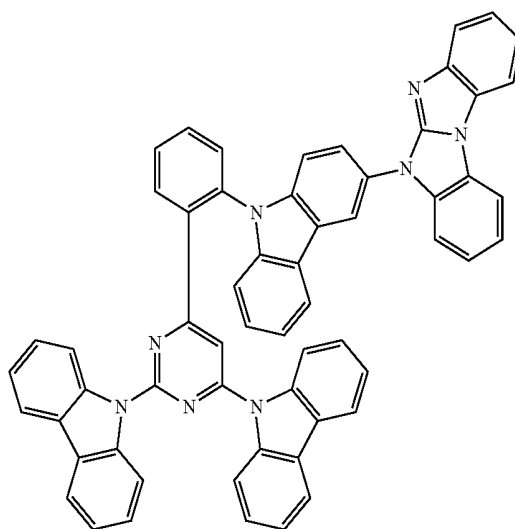


-continued

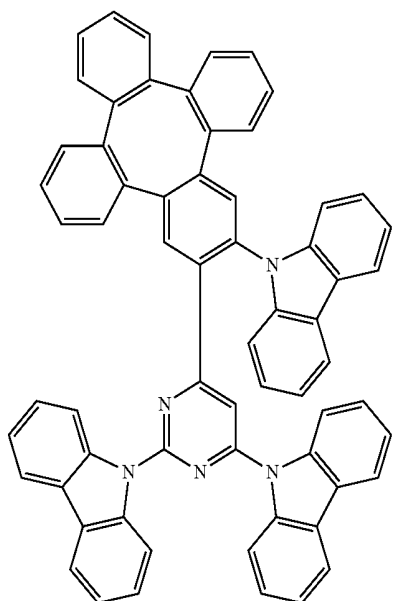






-continued

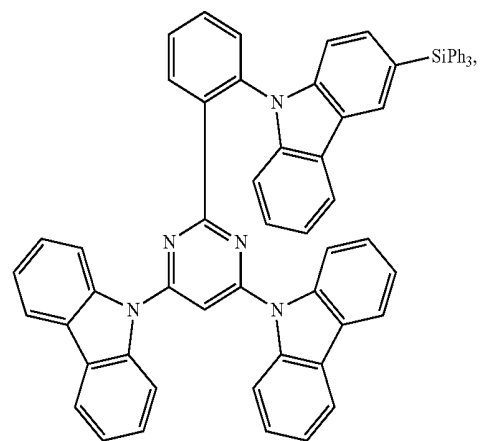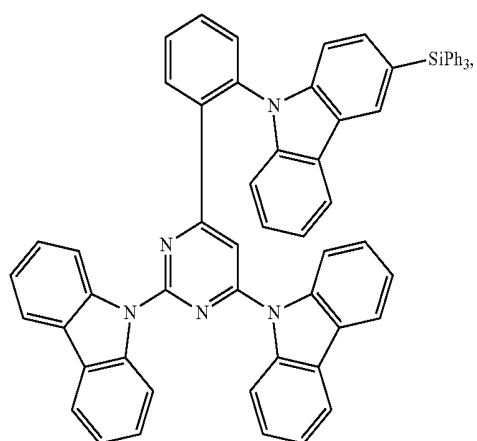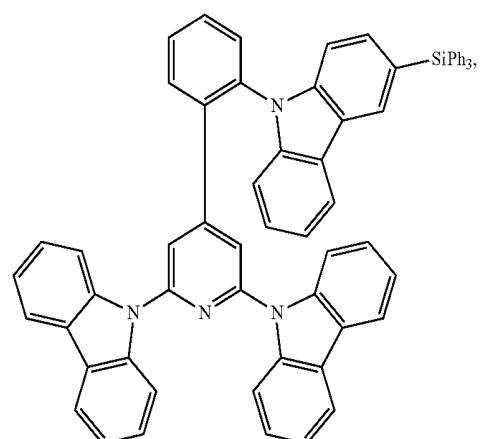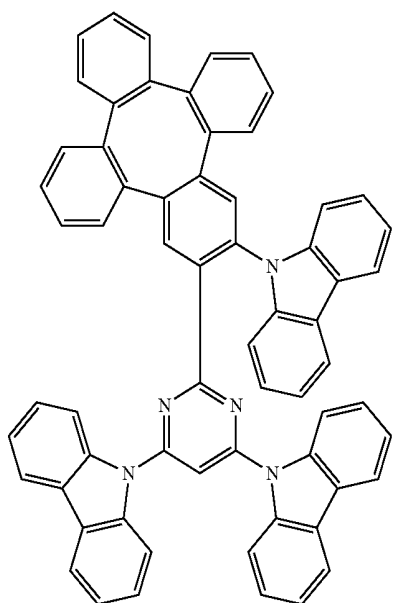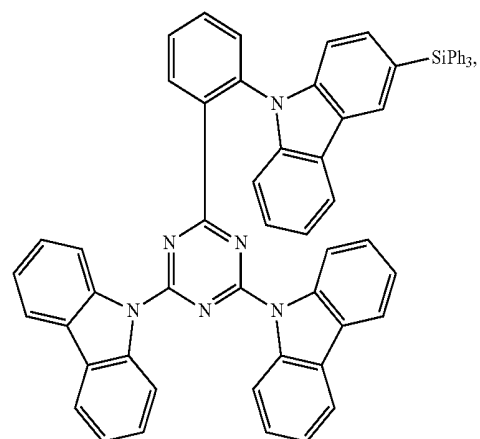




-continued

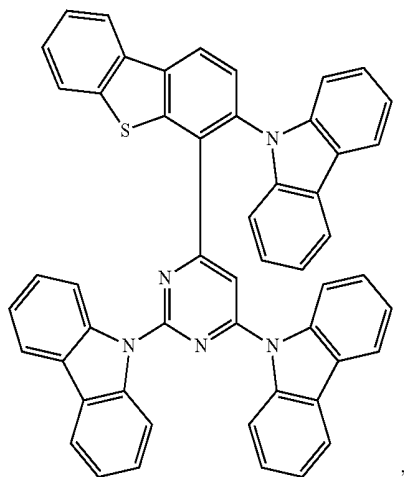




-continued

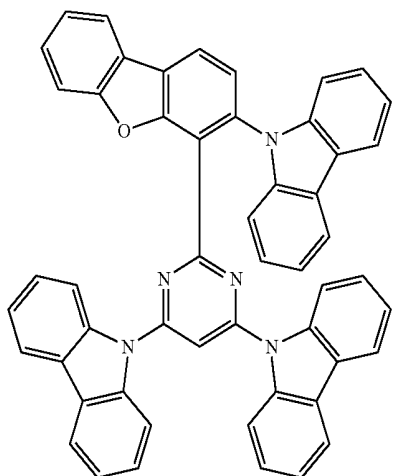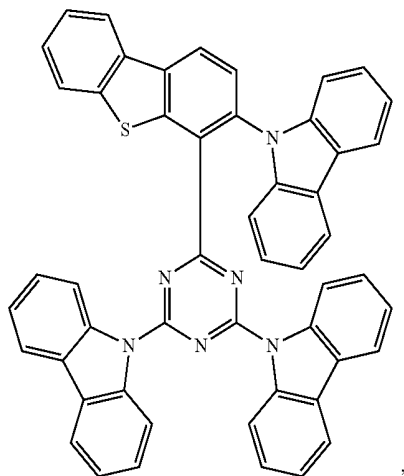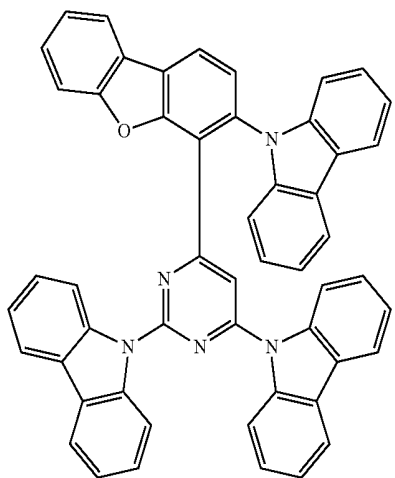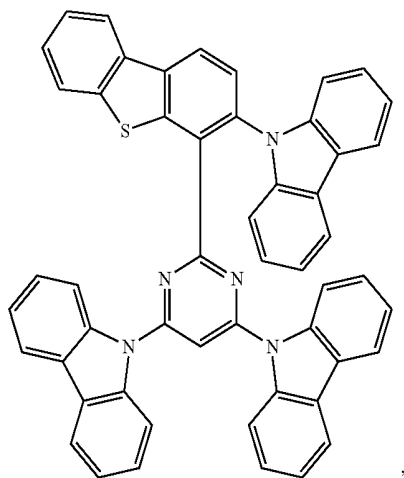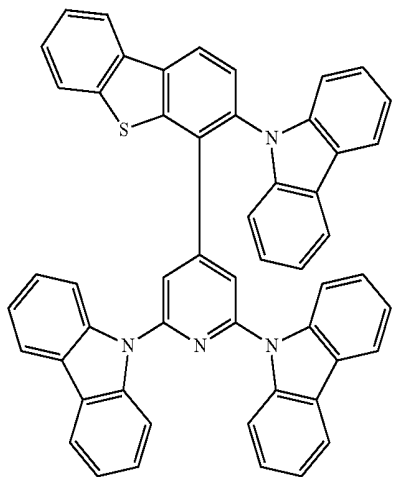




-continued

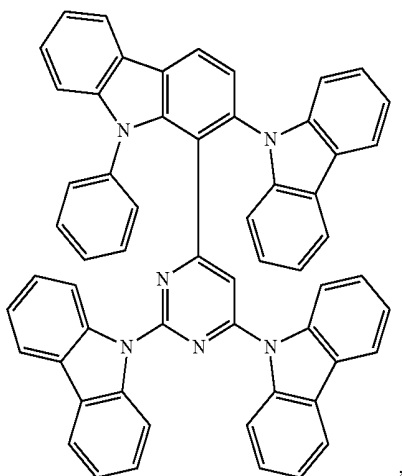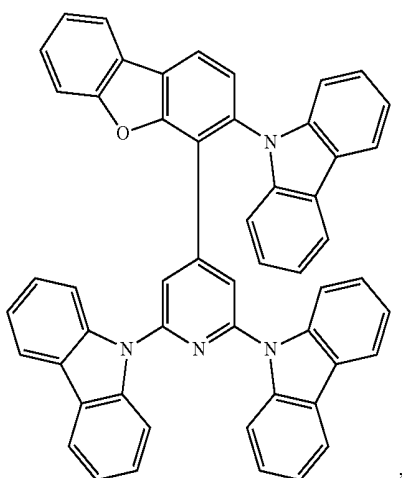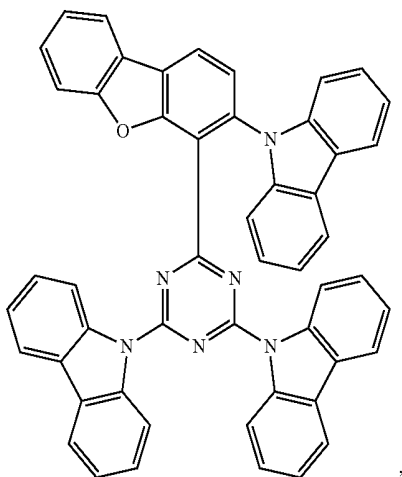




-continued

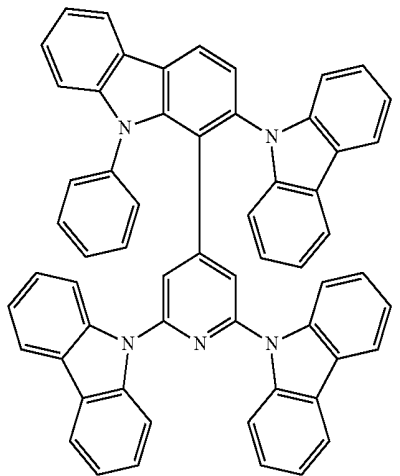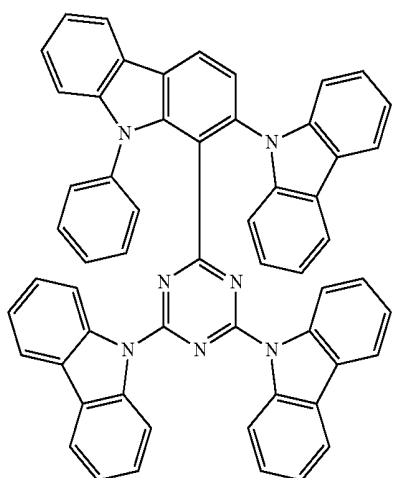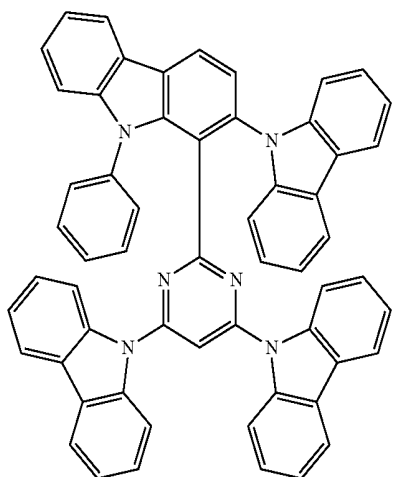


-continued

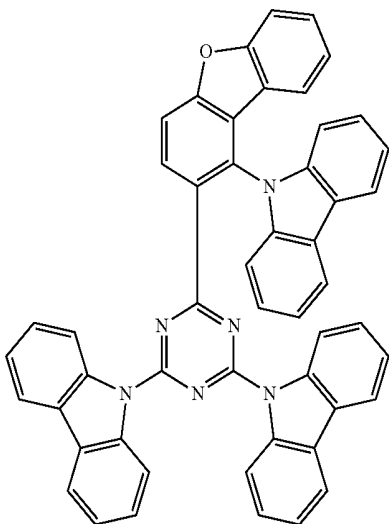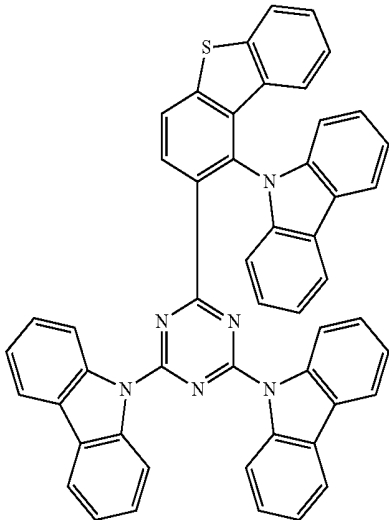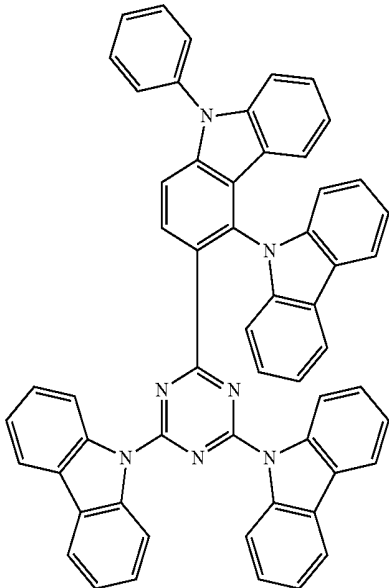






-continued

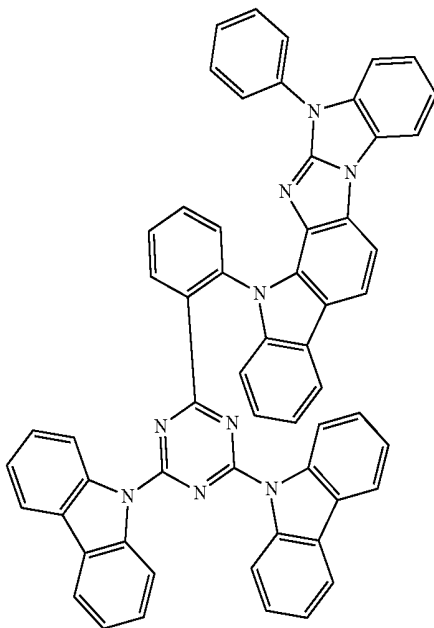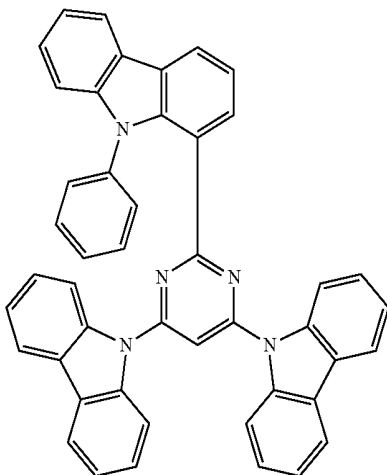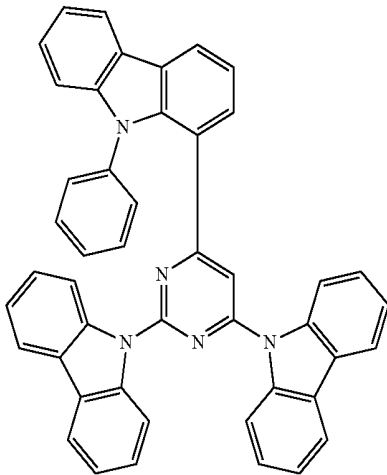


-continued

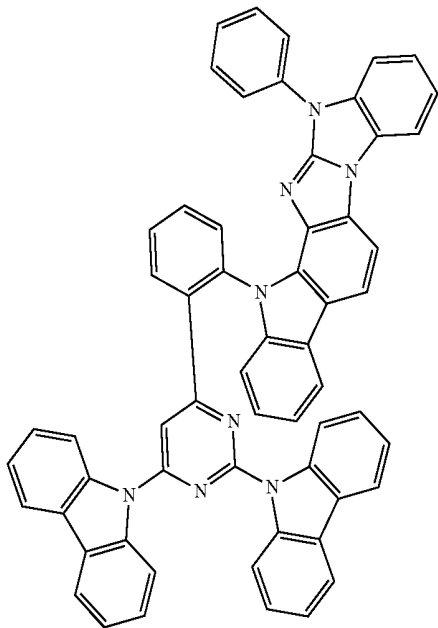


-continued

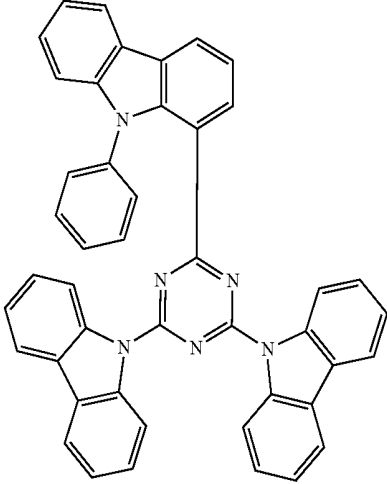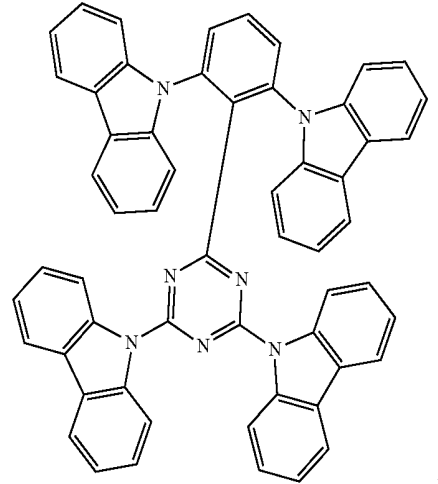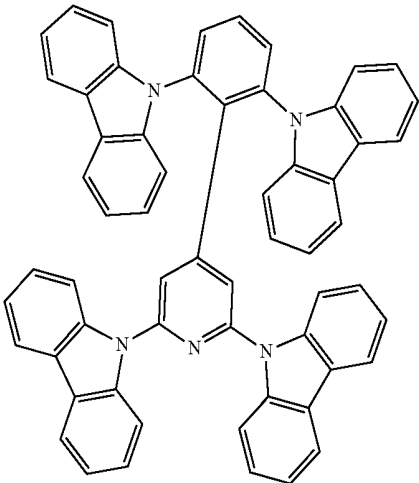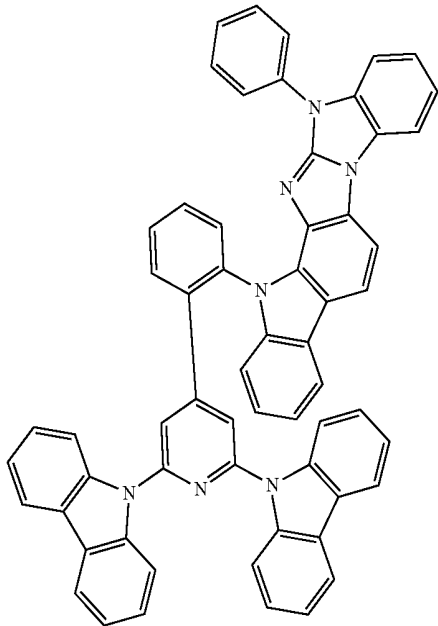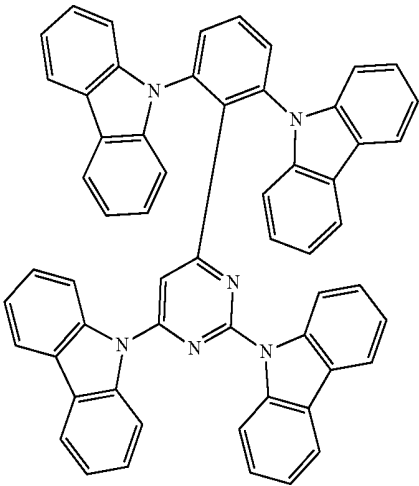

and

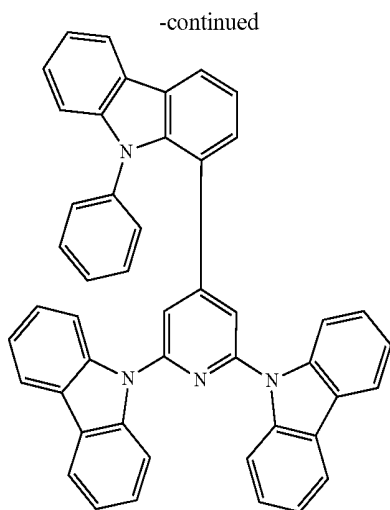

- 15.** An organic light emitting device (OLED) comprising:
 an anode;
 a cathode;
 and an organic layer, disposed between the anode and the cathode, comprising a compound according to Formula I:

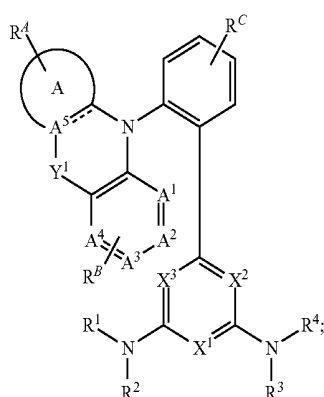

Formula I

- wherein ring A is a 5-membered or 6-membered aromatic ring;
 wherein R^A , R^B , and R^C each independently represent mono to the maximum allowable substitution, or no substitution;
 wherein Y^1 is absent or present, and when present is selected from the group consisting of a direct bond, O, S, Se, CRR', NR, SiRR', and BR;
 wherein each X^1 - X^3 is N or CR;
 wherein at least one of X^1 - X^3 is N;
 wherein each A^1 - A^5 is independently C or N;
 wherein the maximum number of N atoms that can connect to each other within each ring is two;
 wherein each R^1 , R^2 , R^3 , and R^4 is independently selected from the group consisting of alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, aryl, heteroaryl, and combinations thereof;
 wherein each R, R^1 , R^A , R^B , and R^C is independently a hydrogen or a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl,




heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acid, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and



wherein any two substituents may be joined or fused together to form a ring.

- 16.** The OLED of claim 15, wherein the organic layer is an emissive layer and the compound is an emissive dopant or a non-emissive dopant.

- 17.** The OLED of claim 15, wherein the organic layer is an emissive layer that comprises an emitter and a host; wherein the emitter is selected from the group consisting of phosphorescent emitter, fluorescent emitter, delayed fluorescent emitter, and combination thereof; and the host is the compound of Formula I.

- 18.** The OLED of claim 17, wherein the phosphorescent emitter is a transition metal complex having at least one ligand or part of the ligand if the ligand is more than bidentate selected from the group consisting of:

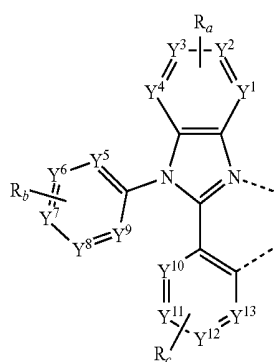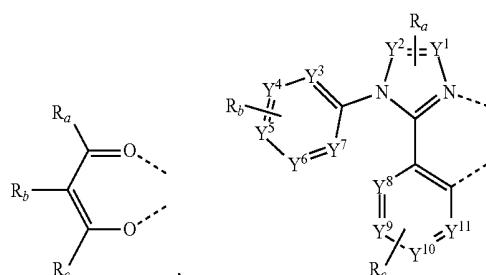

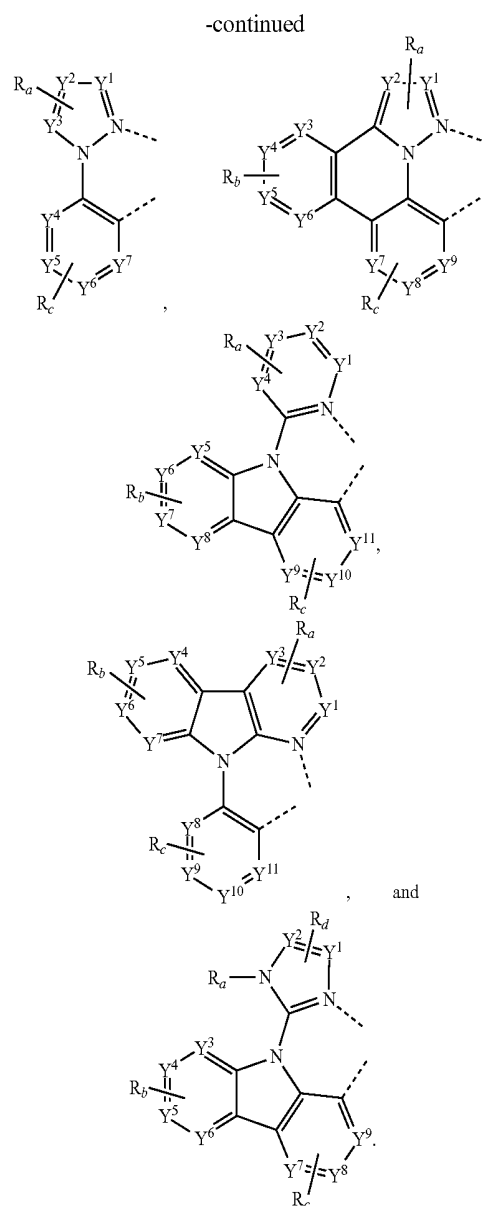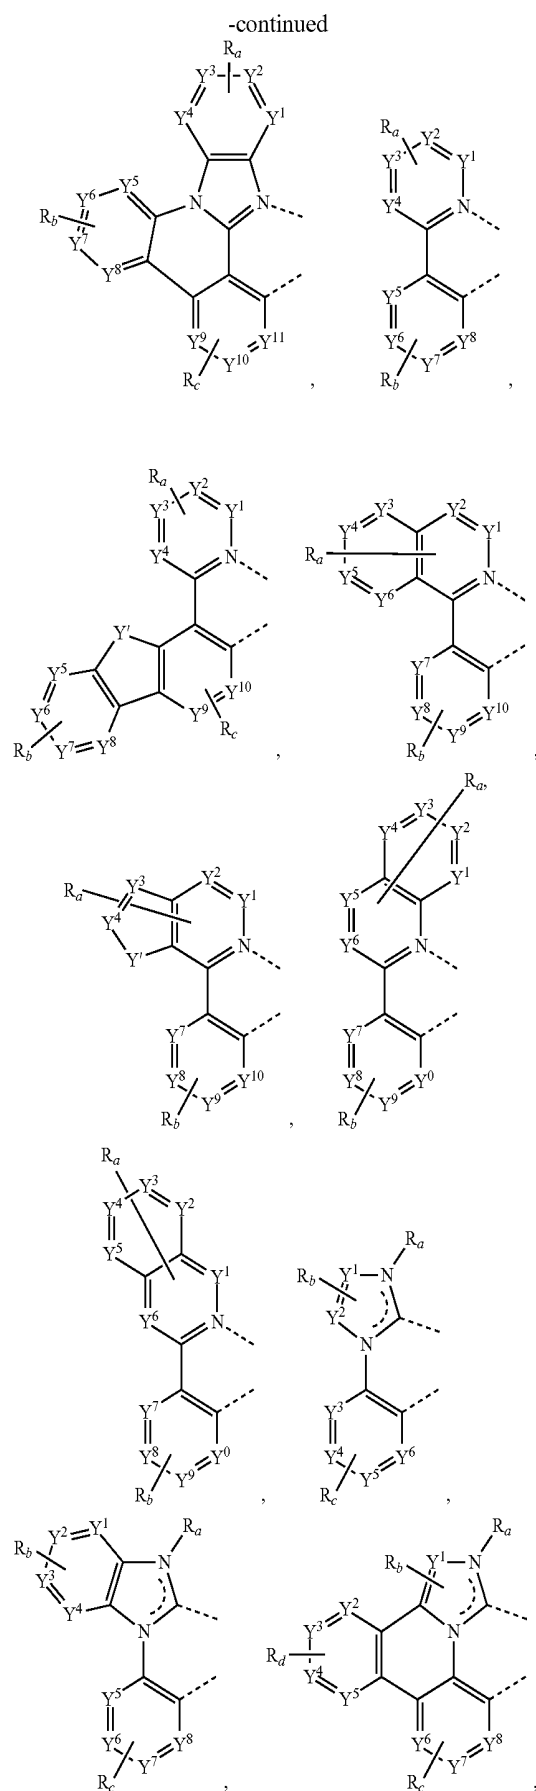

wherein each Y^1 to Y^{13} are independently selected from the group consisting of carbon and nitrogen;

wherein Y' is selected from the group consisting of BR_e , NR_e , PR_e , O, S, Se, C=O, S=O, SO_2 , CR_eR_f , SiR_eR_f , and GeR_eR_f ;


wherein R_e and R_f are optionally fused or joined to form a ring;

wherein each R_a , R_b , R_c , and R_d may independently represent from mono substitution to the maximum possible number of substitution, or no substitution;

wherein each R_a , R_b , R_c , R_d , R_e and R_f is independently selected from the group consisting of hydrogen, deuterium, halide, alkyl, cycloalkyl, heteroalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carbonyl, carboxylic acid, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and

wherein any two adjacent substituents of R_a , R_b , R_c , and R_d are optionally fused or joined to form a ring or form a multidentate ligand.

19. A consumer product comprising an organic light-emitting device (OLED) comprising:
 an anode;
 a cathode; and an organic layer, disposed between the anode and the cathode, comprising a compound according to Formula I:

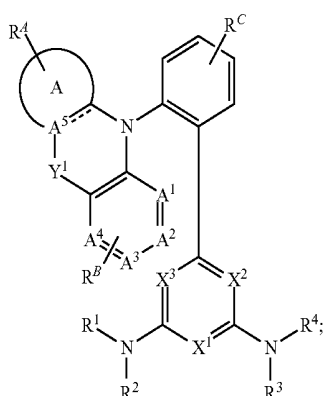

Formula I

wherein ring A is a 5-membered or 6-membered aromatic ring;

wherein R^A , R^B , and R^C each independently represent mono to the maximum allowable substitution, or no substitution;

wherein Y^1 is absent or present, and when present is selected from the group consisting of a direct bond, O, S, Se, CRR', NR, SiRR', and BR;

wherein each X^1 - X^3 is N or CR;

wherein at least one of X^1 - X^3 is N;

wherein each A^1 - A^5 is independently C or N;

wherein the maximum number of N atoms that can connect to each other within each ring is two;

wherein each R^1 , R^2 , R^3 , and R^4 is independently selected from the group consisting of alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, aryl, heteroaryl, and combinations thereof;

wherein each R, R', R^A , R^B , and R^C is independently a hydrogen or a substituent selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, heteroalkyl, heterocycloalkyl, arylalkyl, alkoxy, aryloxy, amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, acyl, carboxylic acid, ether, ester, nitrile, isonitrile, sulfanyl, sulfinyl, sulfonyl, phosphino, and combinations thereof; and

wherein any two substituents may be joined or fused together to form a ring.

20. A formulation comprising a compound according to claim 1.

* * * * *

专利名称(译)	电致发光器件的主体材料		
公开(公告)号	US20200168812A1	公开(公告)日	2020-05-28
申请号	US16/683507	申请日	2019-11-14
[标]申请(专利权)人(译)	环球展览公司		
申请(专利权)人(译)	通用显示器公司		
当前申请(专利权)人(译)	通用显示器公司		
[标]发明人	WOLOHAN PETER FLEETHAM TYLER BROOKS JASON HAMZE RASHA THOMPSON NICHOLAS J		
发明人	WOLOHAN, PETER FLEETHAM, TYLER BROOKS, JASON HAMZE, RASHA THOMPSON, NICHOLAS J.		
IPC分类号	H01L51/00 C09K11/02 C09K11/06 C07D403/14		
CPC分类号	C09K2211/185 C09K11/02 C09K2211/1018 H01L51/5012 C09K2211/1029 H01L51/0072 C09K2211/1044 H01L51/0067 C09K11/06 C07D403/14 H01L51/5016 C09K2211/1007 C07D487/04 H01L51/0071 H01L51/0085 H01L2251/5384		
优先权	62/772403 2018-11-28 US		
外部链接	Espacenet USPTO		

摘要(译)

式I化合物：其中环A是5元或6元芳环；其中R₁、R₂和R₃各自独立地表示最大允许取代的单取代或无取代；其中Y₁不存在或存在，并且当存在时选自直接键，O，S，Se，CRR'，NR，SiRR'和BR；其中每个X₁-X₃为N或CR；其中X₁-X₃中的至少一个是N；其中每个A₁-A₅独立地为C或N；其中每个环内可相互连接的N个原子的最大数目为两个；其中每个R₁，R₂，R₃和R₄各自独立地选自烷基，环烷基，杂烷基，杂环烷基，芳基，杂芳基及其组合；其中每个R，R'，R₁，R₂和R₃独立地是氢或选自氘，卤素，烷基，环烷基，杂烷基，杂环烷基，芳基烷基，烷氧基的取代基，芳氧基，氨基，甲硅烷基，烯基，环烯基，杂烯基，炔基，芳基，杂芳基，酰基，羧酸，醚，酯，腈，异腈，硫烷基，亚磺酰基，磺酰基，膦基及其组合；和其中任何两个取代基可以连接或耦合在一起形成环。

