



US 20190123286A1

(19) **United States**

(12) **Patent Application Publication**
Xia

(10) **Pub. No.: US 2019/0123286 A1**
(43) **Pub. Date: Apr. 25, 2019**

(54) **INDOLOCARBAZOLE TETRAPHENYLENE COMPOUNDS**

C09K 11/02 (2006.01)
C09K 11/06 (2006.01)

(71) Applicant: **Chuanjun Xia**, Lawrenceville, NJ (US)

(52) **U.S. Cl.**
CPC **H01L 51/0072** (2013.01); **C07D 487/04** (2013.01); **H01L 51/5096** (2013.01); **H01L 51/0085** (2013.01); **C09K 11/06** (2013.01); **C09K 11/025** (2013.01)

(72) Inventor: **Chuanjun Xia**, Lawrenceville, NJ (US)

(21) Appl. No.: **16/137,663**

(22) Filed: **Sep. 21, 2018**

(57) **ABSTRACT**

Related U.S. Application Data


(60) Provisional application No. 62/574,761, filed on Oct. 20, 2017.

Publication Classification

(51) **Int. Cl.**

H01L 51/00 (2006.01)
C07D 487/04 (2006.01)

Indolocarbazole tetraphenylene compounds are disclosed. These novel compounds contain tetraarylene or tetraheteroarylene which can be used as charge transporting materials, charge blocking materials, hosts or emitters in an organic electroluminescent device. These novel compounds offer better device performance than comparative compounds that don't contain a tetraarylene or tetraheteroarylene structure. Also disclosed are an electroluminescent device and a formulation.

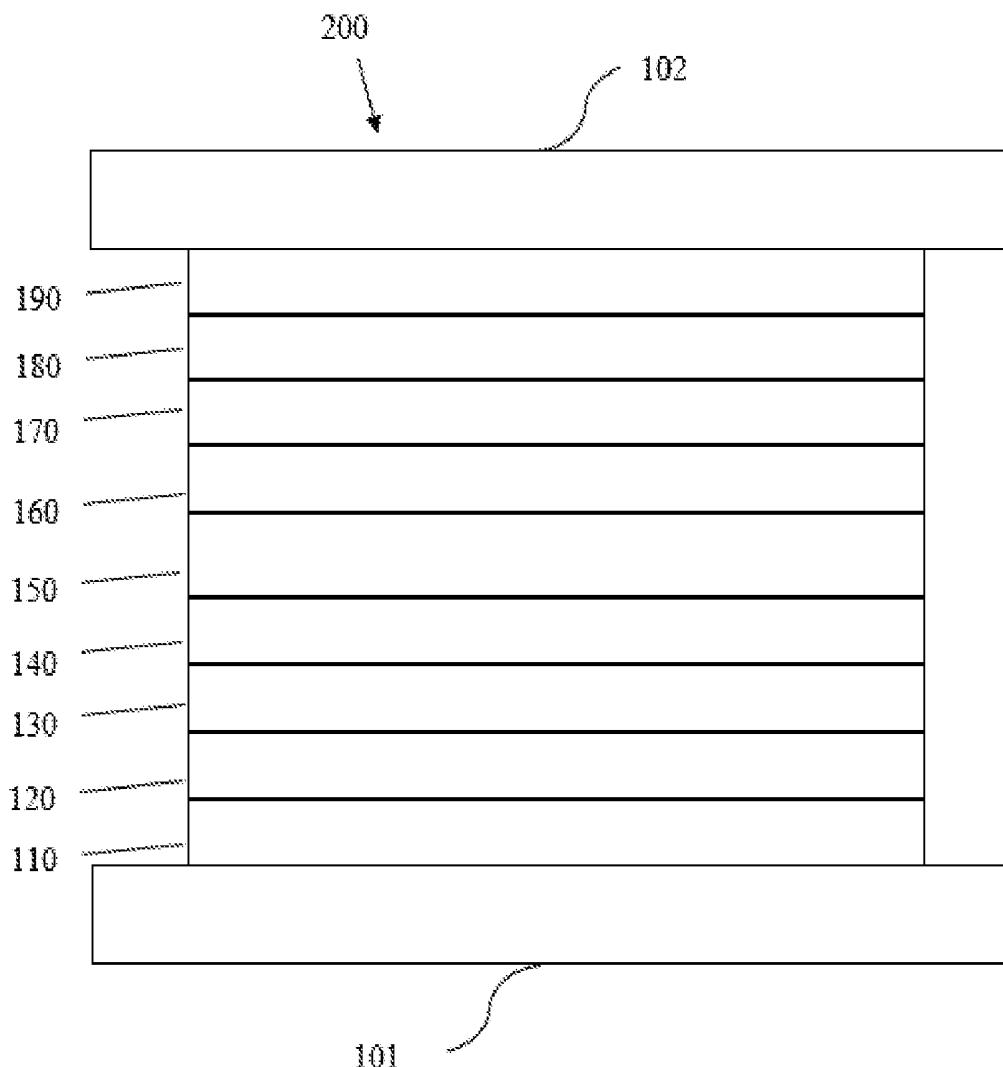

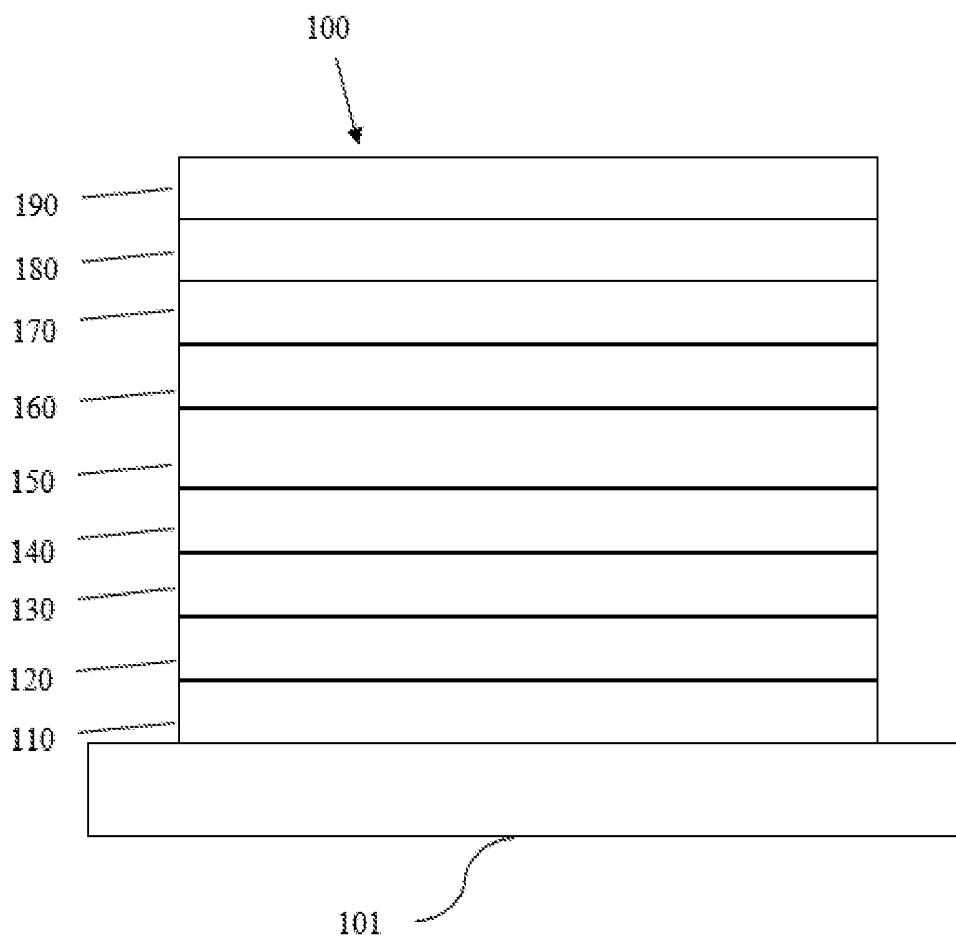


Figure 1

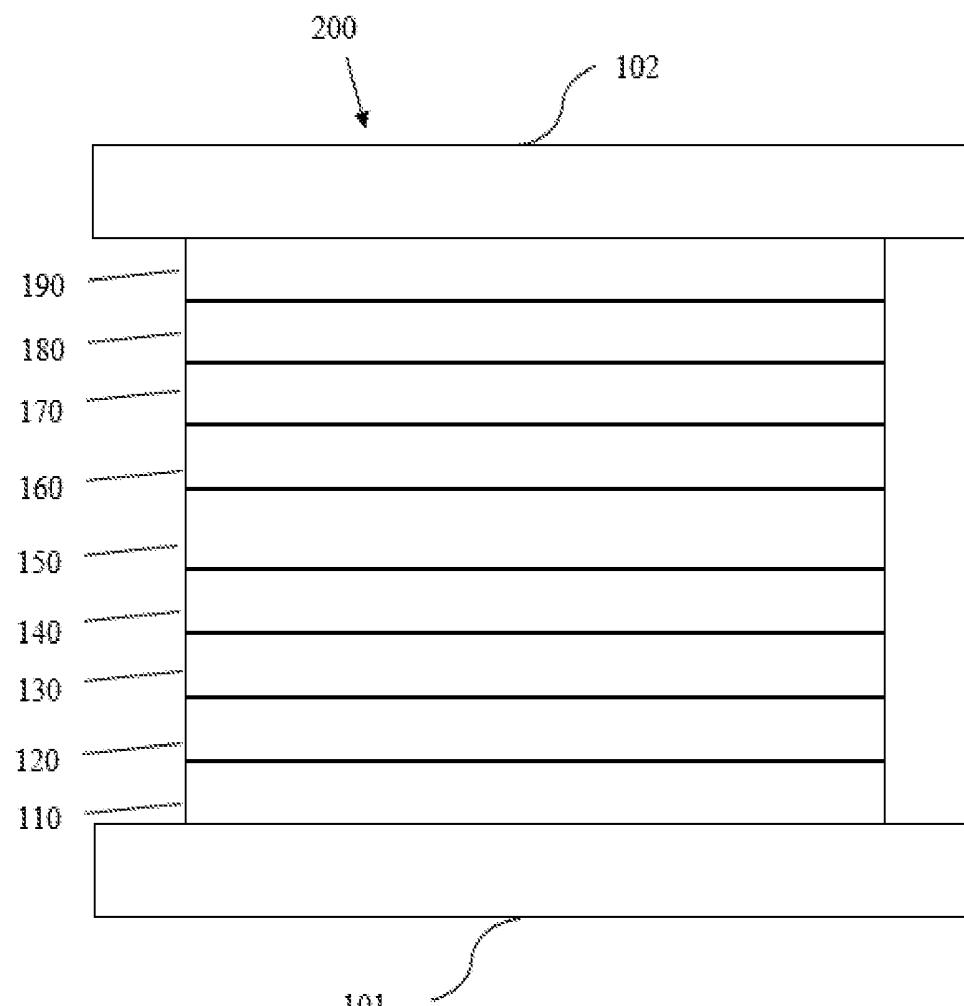


Figure 2

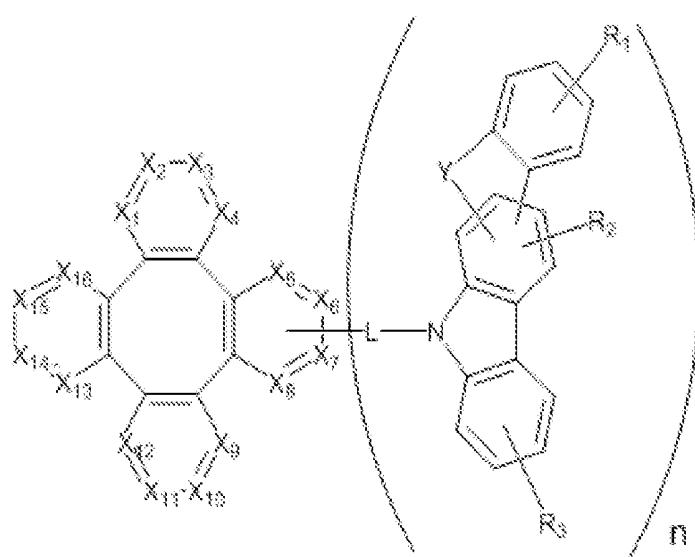


Figure 3

INDOLOCARBAZOLE TETRAPHENYLENE COMPOUNDS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/574,761, filed Oct. 20, 2017, the entire content of which is incorporated herein by reference.

1 FIELD OF THE INVENTION

[0002] The present invention relates to compounds for organic electronic devices, such as organic light emitting devices. More specifically, the present invention relates to compounds having a indolocarbazole tetraphenylenne structure, an organic electroluminescent device and a formulation comprising the compounds.

2 BACKGROUND ART

[0003] An organic electronic device is preferably selected from the group consisting of organic light-emitting diodes (OLEDs), organic field-effect transistors (O-FETs), organic light-emitting transistors (OLETs), organic photovoltaic devices (OPVs), dye-sensitized solar cells (DSSCs), organic optical detectors, organic photoreceptors, organic field-quench devices (OFQDs), light-emitting electrochemical cells (LECs), organic laser diodes and organic plasmon emitting devices.

[0004] In 1987, Tang and Van Slyke of Eastman Kodak reported a bilayer organic electroluminescent device, which comprises an arylamine hole transporting layer and a tris-8-hydroxyquinolato-aluminum layer as the electron and emitting layer (Applied Physics Letters, 1987, 51 (12): 913-915). Once a bias is applied to the device, green light was emitted from the device. This invention laid the foundation for the development of modern organic light-emitting diodes (OLEDs). State-of-the-art OLEDs may comprise multiple layers such as charge injection and transporting layers, charge and exciton blocking layers, and one or multiple emissive layers between the cathode and anode. Since OLED is a self-emitting solid state device, it offers tremendous potential for display and lighting applications. In addition, the inherent properties of organic materials, such as their flexibility, may make them well suited for particular applications such as fabrication on flexible substrates.

[0005] OLED can be categorized as three different types according to its emitting mechanism. The OLED invented by Tang and van Slyke is a fluorescent OLED. It only utilizes singlet emission. The triplets generated in the device are wasted through nonradiative decay channels. Therefore, the internal quantum efficiency (IQE) of a fluorescent OLED is only 25%. This limitation hindered the commercialization of OLED. In 1997, Forrest and Thompson reported phosphorescent OLED, which uses triplet emission from heavy metal containing complexes as the emitter. As a result, both singlet and triplets can be harvested, achieving 100% IQE. The discovery and development of phosphorescent OLED contributed directly to the commercialization of active-matrix OLED (AMOLED) due to its high efficiency. Recently, Adachi achieved high efficiency through thermally activated delayed fluorescence (TADF) of organic compounds. These emitters have small singlet-triplet gap that makes the transition from triplet back to singlet possible. In the TADF device, the triplet excitons can go through reverse intersystem crossing to generate singlet excitons, resulting in high IQE.

[0006] OLEDs can also be classified as small molecule and polymer OLEDs according to the forms of the materials used. Small molecule refers to any organic or organometallic material that is not a polymer. The molecular weight of a small molecule can be large as long as it has well defined structure. Dendrimers with well-defined structures are considered as small molecules. Polymer OLEDs include conjugated polymers and non-conjugated polymers with pendant emitting groups. Small molecule OLED can become a polymer OLED if post polymerization occurred during the fabrication process.

[0007] There are various methods for OLED fabrication. Small molecule OLEDs are generally fabricated by vacuum thermal evaporation. Polymer OLEDs are fabricated by solution process, such as spin-coating, ink-jet printing, and nozzle printing. Small molecule OLEDs can also be fabricated by solution process if the materials can be dissolved or dispersed in solvents.


[0008] The emitting color of an OLED can be achieved by emitter structural design. An OLED may comprise one emitting layer or a plurality of emitting layers to achieve desired spectrum. In the case of green, yellow, and red OLEDs, phosphorescent emitters have successfully reached commercialization. Blue phosphorescent emitters still suffer from non-saturated blue color, short device lifetime, and high operating voltage. Commercial full-color OLED displays normally adopt a hybrid strategy, using fluorescent blue and phosphorescent yellow, or red and green. At present, efficiency roll-off of phosphorescent OLEDs at high brightness remains a problem. In addition, it is desirable to have more saturated emitting color, higher efficiency, and longer device lifetime.

[0009] Tetraphenylenne consists of four benzene rings that are ortho-annulated to form an eight-membered ring. It has a nonplanar saddle-shaped structure, with the two opposite pairs of benzene rings oriented above or below the average plane of the molecule. Due to their unique geometry, tetraphenylenne and its derivatives may be used in OLED applications. However, their use in OLED materials has not been widely explored. This invention discloses novel indolocarbazole compounds containing tetraphenylenne building block. The saddle-shaped structure of tetraphenylenne reduces solid state packing, results in a lower crystallinity of the compounds and can effectively regulate the charge transporting performance. Therefore, these novel compounds offer better device performance than comparative compounds that don't contain a tetraphenylenne structure.

3 SUMMARY OF THE INVENTION

[0010] The present invention aims to provide a series of indolocarbazole tetraphenylenne compounds to solve at least part of the above problems. The compounds can be used as charge transporting materials, charge blocking materials, hosts or emitters etc. in an organic electroluminescent device. These novel compounds offer better device performance than comparative compounds that don't contain a tetraphenylenne structure.

[0011] According to an embodiment of the present invention, a compound having formula 1 is disclosed:

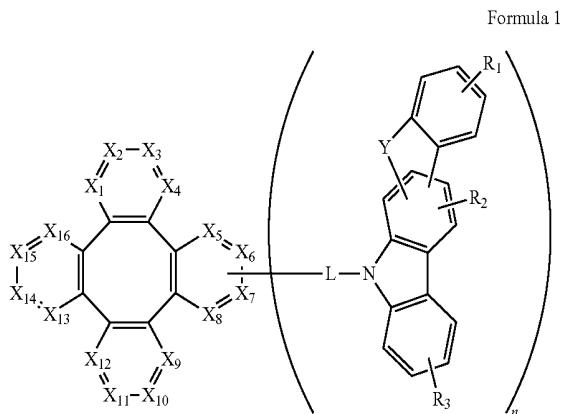

[0012] Wherein

[0013] X_1 to X_{16} are each independently selected from the group consisting of C, CR, and N;

[0014] L is selected from the group consisting of a single bond, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 4 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms;

[0015] Y is selected from the group consisting of O, S, Se, NR', and CR"R";

[0016] R_1 and R_3 represents mono, di, tri, or tetra substitution or no substitution;

[0017] R_2 represents mono or di substitution or no substitution;

[0018] R, R', R'', R''', R₁, R₂, and R₃ are each independently selected from the group consisting of hydrogen, deuterium, halogen, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted cycloalkyl group having 3 to 20 ring carbon atoms, a substituted or unsubstituted heteroalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted arylalkyl group having 7 to 30 carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryloxy group having 6 to 30 carbon atoms, a substituted or unsubstituted alkenyl group having 2 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 3 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms, a substituted or unsubstituted amino group having 0 to 20 carbon atoms, an acyl group, a carbonyl group, a carboxylic acid group, an ester group, a nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof;

[0019] Any adjacent substitution can be optionally joined to form a ring or fused structure;

[0020] n is integer from 1 to 4;


[0021] when n is 2 or more, L, Y, R₁, R₂, and R₃ can be the same or different.

[0022] According to another embodiment, an electroluminescent device is disclosed, which comprises:

[0023] an anode,

[0024] a cathode,

[0025] and an organic layer, disposed between the anode and the cathode, comprising a compound having formula 1:

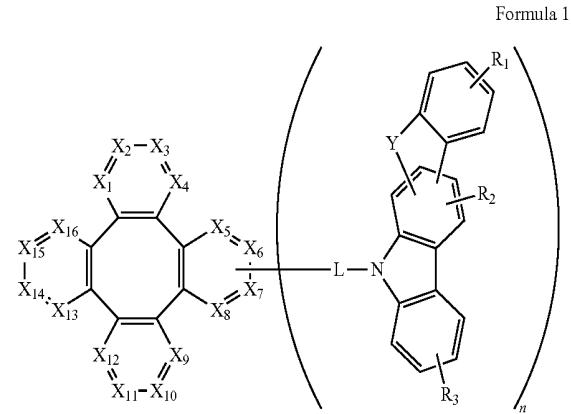

[0026] Wherein

[0027] X_1 to X_{16} are each independently selected from the group consisting of C, CR, and N;

[0028] L is selected from the group consisting of a single bond, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 4 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms;

[0029] Y is O, S, Se, NR', or CR"R";

[0030] R_1 and R_3 represents mono, di, tri, or tetra substitution or no substitution;

[0031] R_2 represents mono or di substitution or no substitution;

[0032] R, R', R'', R''', R₁, R₂, and R₃ are each independently selected from the group consisting of hydrogen, deuterium, halogen, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted cycloalkyl group having 3 to 20 ring carbon atoms, a substituted or unsubstituted heteroalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted arylalkyl group having 7 to 30 carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryloxy group having 6 to 30 carbon atoms, a substituted or unsubstituted alkenyl group having 2 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 3 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms, a substituted or unsubstituted amino group having 0 to 20 carbon atoms, an acyl group, a carbonyl group, a carboxylic acid group, an ester group, a nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof;

[0033] Any adjacent substitution can be optionally joined to form a ring or fused structure;

[0034] n is integer from 1 to 4;

[0035] when n is 2 or more, L, Y, R₁, R₂, and R₃ can be the same or different.

[0036] According to yet another embodiment, a formulation comprising a compound having formula 1 is also disclosed.

[0037] The novel indolocarbazole tetraphenylenne compounds disclosed in the present invention can be used as charge transporting materials, charge blocking materials, hosts or emitters in an electroluminescent device. These novel compounds offer better device performance than comparative compounds that don't contain a tetraphenylenne structure.

4 BRIEF DESCRIPTION OF THE DRAWINGS

[0038] FIG. 1 schematically shows an organic light emitting device that can incorporate the compounds disclosed herein.

[0039] FIG. 2 schematically shows another organic light emitting device that can incorporate the compounds disclosed herein.

[0040] FIG. 3 shows the formula 1 of the compounds disclosed herein.

5 DETAILED DESCRIPTION

[0041] OLEDs can be fabricated on various types of substrates such as glass, plastic, and metal foil. FIG. 1 schematically shows the organic light emitting device 100 without limitation. The figures are not necessarily drawn to scale. Some of the layer in the figure can also be omitted as needed. Device 100 may include a substrate 101, an anode 110, a hole injection layer 120, a hole transporting layer 130, an electron blocking layer 140, an emissive layer 150, a hole blocking layer 160, an electron transporting layer 170, an electron injection layer 180 and a cathode 190. Device 100 may be fabricated by depositing the layers described in order. The properties and functions of these various layers, as well as example materials, are described in more detail in U.S. Pat. No. 7,279,704 at cols. 6-10, which are incorporated by reference in its entirety.

[0042] More examples for each of these layers are available. For example, a flexible and transparent substrate-anode combination is disclosed in U.S. Pat. No. 5,844,363, which is incorporated by reference in its entirety. An example of a p-doped hole transport layer is m-MTDATA doped with F4-TCNQ at a molar ratio of 50:1, as disclosed in U.S. Patent Application Publication No. 2003/0230980, which is incorporated by reference in its entirety. Examples of host materials are disclosed in U.S. Pat. No. 6,303,238 to Thompson et al., which is incorporated by reference in its entirety. An example of an n-doped electron transport layer is BPhen doped with Li at a molar ratio of 1:1, as disclosed in U.S. Patent Application Publication No. 2003/0230980, which is incorporated by reference in its entirety. U.S. Pat. Nos. 5,703,436 and 5,707,745, which are incorporated by reference in their entireties, disclose examples of cathodes including compound cathodes having a thin layer of metal such as Mg:Ag with an overlying transparent, electrically-conductive, sputter-deposited ITO layer. The theory and use of blocking layers is described in more detail in U.S. Pat. No. 6,097,147 and U.S. Patent Application Publication No. 2003/0230980, which are incorporated by reference in their entireties. Examples of injection layers are provided in U.S. Patent Application Publication No. 2004/0174116, which is incorporated by reference in its entirety. A description of

protective layers may be found in U.S. Patent Application Publication No. 2004/0174116, which is incorporated by reference in its entirety.

[0043] The layered structure described above is provided by way of non-limiting example. Functional OLEDs may be achieved by combining the various layers described in different ways, or layers may be omitted entirely. It may also include other layers not specifically described. Within each layer, a single material or a mixture of multiple materials can be used to achieve optimum performance. Any functional layer may include several sublayers. For example, the emissive layer may have a two layers of different emitting materials to achieve desired emission spectrum.

[0044] In one embodiment, an OLED may be described as having an "organic layer" disposed between a cathode and an anode. This organic layer may comprise a single layer or multiple layers.

[0045] An OLED can be encapsulated by a barrier layer to protect it from harmful species from the environment such as moisture and oxygen. FIG. 2 schematically shows the organic light emitting device 200 without limitation. FIG. 2 differs from FIG. 1 in that the organic light emitting device 200 include a barrier layer 102, which is above the cathode 190. Any material that can provide the barrier function can be used as the barrier layer such as glass and organic-inorganic hybrid layers. The barrier layer should be placed directly or indirectly outside of the OLED device. Multi-layer thin film encapsulation was described in U.S. Pat. No. 7,968,146, which is herein incorporated by reference in its entirety.

[0046] Devices fabricated in accordance with embodiments of the invention can be incorporated into a wide variety of consumer products that have one or more of the electronic component modules (or units) incorporated therein. Some examples of such consumer products include flat panel displays, monitors, medical monitors, televisions, billboards, lights for interior or exterior illumination and/or signaling, heads-up displays, fully or partially transparent displays, flexible displays, smart phones, tablets, phablets, wearable devices, smart watches, laptop computers, digital cameras, camcorders, viewfinders, micro-displays, 3-D displays, vehicles displays, and vehicle tail lights.

[0047] The materials and structures described herein may be used in other organic electronic devices listed above.

[0048] As used herein, "top" means furthest away from the substrate, while "bottom" means closest to the substrate. Where a first layer is described as "disposed over" a second layer, the first layer is disposed further away from substrate. There may be other layers between the first and second layer, unless it is specified that the first layer is "in contact with" the second layer. For example, a cathode may be described as "disposed over" an anode, even though there are various organic layers in between.

[0049] As used herein, "solution processible" means capable of being dissolved, dispersed, or transported in and/or deposited from a liquid medium, either in solution or suspension form.

[0050] A ligand may be referred to as "photoactive" when it is believed that the ligand directly contributes to the photoactive properties of an emissive material. A ligand may be referred to as "ancillary" when it is believed that the ligand does not contribute to the photoactive properties of an

emissive material, although an ancillary ligand may alter the properties of a photoactive ligand.

[0051] It is believed that the internal quantum efficiency (IQE) of fluorescent OLEDs can exceed the 25% spin statistics limit through delayed fluorescence. As used herein, there are two types of delayed fluorescence, i.e. P-type delayed fluorescence and E-type delayed fluorescence. P-type delayed fluorescence is generated from triplet-triplet annihilation (TTA).

[0052] On the other hand, E-type delayed fluorescence does not rely on the collision of two triplets, but rather on the transition between the triplet states and the singlet excited states. Compounds that are capable of generating E-type delayed fluorescence are required to have very small singlet-triplet gaps to convert between energy states. Thermal energy can activate the transition from the triplet state back to the singlet state. This type of delayed fluorescence is also known as thermally activated delayed fluorescence (TADF). A distinctive feature of TADF is that the delayed component increases as temperature rises. If the reverse intersystem crossing rate is fast enough to minimize the non-radiative decay from the triplet state, the fraction of back populated singlet excited states can potentially reach 75%. The total singlet fraction can be 100%, far exceeding 25% of the spin statistics limit for electrically generated excitons.

[0053] E-type delayed fluorescence characteristics can be found in an exciplex system or in a single compound. Without being bound by theory, it is believed that E-type delayed fluorescence requires the luminescent material to have a small singlet-triplet energy gap (ΔE_{S-T}). Organic, non-metal containing, donor-acceptor luminescent materials may be able to achieve this. The emission in these materials is often characterized as a donor-acceptor charge-transfer (CT) type emission. The spatial separation of the HOMO and LUMO in these donor-acceptor type compounds often results in small ΔE_{S-T} . These states may involve CT states. Often, donor-acceptor luminescent materials are constructed by connecting an electron donor moiety such as amino- or carbazole-derivatives and an electron acceptor moiety such as N-containing six-membered aromatic rings.

Definition of Terms of Substituents

[0054] halogen or halide—as used herein includes fluorine, chlorine, bromine, and iodine.

[0055] Alkyl—contemplates both straight and branched chain alkyl groups. Examples of the alkyl group include methyl group, ethyl group, propyl group, isopropyl group, n-butyl group, s-butyl group, isobutyl group, t-butyl group, n-pentyl group, n-hexyl group, n-heptyl group, n-octyl group, n-nonyl group, n-decyl group, n-undecyl group, n-dodecyl group, n-tridecyl group, n-tetradecyl group, n-pentadecyl group, n-hexadecyl group, n-heptadecyl group, n-octadecyl group, neopentyl group, 1-methylpentyl group, 2-methylpentyl group, 1-pentylhexyl group, 1-butylpentyl group, 1-heptyloctyl group, 3-methylpentyl group. Additionally, the alkyl group may be optionally substituted. The carbons in the alkyl chain can be replaced by other hetero atoms. Of the above, preferred are methyl group, ethyl group, propyl group, isopropyl group, n-butyl group, s-butyl group, isobutyl group, t-butyl group, n-pentyl group, and neopentyl group.

[0056] Cycloalkyl—as used herein contemplates cyclic alkyl groups. Preferred cycloalkyl groups are those containing 4 to 10 ring carbon atoms and includes cyclobutyl,

cyclopentyl, cyclohexyl, 4-methylcyclohexyl, 4,4-dimethylcyclohexyl, 1-adamantyl, 2-adamantyl, 1-norbornyl, 2-norbornyl and the like. Additionally, the cycloalkyl group may be optionally substituted. The carbons in the ring can be replaced by other hetero atoms.

[0057] Alkenyl—as used herein contemplates both straight and branched chain alkene groups. Preferred alkenyl groups are those containing two to fifteen carbon atoms. Examples of the alkenyl group include vinyl group, allyl group, 1-butenyl group, 2-butenyl group, 3-butenyl group, 1,3-butadienyl group, 1-methylvinyl group, styryl group, 2,2-diphenylvinyl group, 1,2-diphenylvinyl group, 1-methylallyl group, 1,1-dimethylallyl group, 2-methylallyl group, 1-phenylallyl group, 2-phenylallyl group, 3-phenylallyl group, 3,3-diphenylallyl group, 1,2-dimethylallyl group, 1-phenyl-1-butene group, and 3-phenyl-1-butene group. Additionally, the alkenyl group may be optionally substituted.

[0058] Alkynyl—as used herein contemplates both straight and branched chain alkyne groups. Preferred alkynyl groups are those containing two to fifteen carbon atoms. Additionally, the alkynyl group may be optionally substituted.

[0059] Aryl or aromatic group—as used herein contemplates noncondensed and condensed systems. Preferred aryl groups are those containing six to sixty carbon atoms, preferably six to twenty carbon atoms, more preferably six to twelve carbon atoms. Examples of the aryl group include phenyl, biphenyl, terphenyl, triphenylene, tetraphenylene, naphthalene, anthracene, phenalene, phenanthrene, fluorene, pyrene, chrysene, perylene, and azulene, preferably phenyl, biphenyl, terphenyl, triphenylene, fluorene, and naphthalene. Additionally, the aryl group may be optionally substituted. Examples of the non-condensed aryl group include phenyl group, biphenyl-2-yl group, biphenyl-3-yl group, biphenyl-4-yl group, p-terphenyl-4-yl group, p-terphenyl-3-yl group, p-terphenyl-2-yl group, m-terphenyl-4-yl group, m-terphenyl-3-yl group, m-terphenyl-2-yl group, o-tolyl group, m-tolyl group, p-tolyl group, p-t-butylphenyl group, p-(2-phenylpropyl)phenyl group, 4'-methylbiphenyl group, 4'-t-butyl p-terphenyl-4-yl group, o-cumenyl group, m-cumenyl group, p-cumenyl group, 2,3-xylyl group, 3,4-xylyl group, 2,5-xylyl group, mesityl group, and m-quarterphenyl group.

[0060] Heterocyclic group or heterocycle—as used herein contemplates aromatic and non-aromatic cyclic groups. Hetero-aromatic also means heteroaryl. Preferred non-aromatic heterocyclic groups are those containing 3 to 7 ring atoms which includes at least one hetero atom such as nitrogen, oxygen, and sulfur. The heterocyclic group can also be an aromatic heterocyclic group having at least one heteroatom selected from nitrogen atom, oxygen atom, sulfur atom, and selenium atom.

[0061] Heteroaryl—as used herein contemplates noncondensed and condensed hetero-aromatic groups that may include from one to five heteroatoms. Preferred heteroaryl groups are those containing three to thirty carbon atoms, preferably three to twenty carbon atoms, more preferably three to twelve carbon atoms. Suitable heteroaryl groups include dibenzothiophene, dibenzofuran, dibenzoselenophene, furan, thiophene, benzofuran, benzothiophene, benzoselenophene, carbazole, indolocarbazole, pyridylindole, pyrrolodipyridine, pyrazole, imidazole, triazole, oxazole, thiazole, oxadiazole, oxatriazole, dioxazole, thiadiazole,

pyridine, pyridazine, pyrimidine, pyrazine, triazine, oxazine, oxathiazine, oxadiazine, indole, benzimidazole, indazole, indoxazine, benzoxazole, benzisoxazole, benzothiazole, quinoline, isoquinoline, cinnoline, quinazoline, quinoxaline, naphthyridine, phthalazine, pteridine, xanthene, acridine, phenazine, phenothiazine, phenoxazine, benzofuropyrnidine, furodipyridine, benzothienopyridine, thienodipyridine, benzosenophenopyridine, and selenophenodipyridine, preferably dibenzothiophene, dibenzofuran, dibenzoselenophene, carbazole, indolocarbazole, imidazole, pyridine, triazine, benzimidazole, 1,2-azaborine, 1,3-azaborine, 1,4-azaborine, borazine, and aza-analogs thereof. Additionally, the heteroaryl group may be optionally substituted.

[0062] Alkoxy—it is represented by $-\text{O}-\text{Alkyl}$. Examples and preferred examples thereof are the same as those described above. Examples of the alkoxy group having 1 to 20 carbon atoms, preferably 1 to 6 carbon atoms include methoxy group, ethoxy group, propoxy group, butoxy group, pentyloxy group, and hexyloxy group. The alkoxy group having 3 or more carbon atoms may be linear, cyclic or branched.

[0063] Aryloxy—it is represented by $-\text{O}-\text{Aryl}$ or $-\text{O}-\text{heteroaryl}$. Examples and preferred examples thereof are the same as those described above. Examples of the aryloxy group having 6 to 40 carbon atoms include phenoxy group and biphenyloxy group.

[0064] Arylalkyl—as used herein contemplates an alkyl group that has an aryl substituent. Additionally, the arylalkyl group may be optionally substituted. Examples of the arylalkyl group include benzyl group, 1-phenylethyl group, 2-phenylethyl group, 1-phenylisopropyl group, 2-phenylisopropyl group, phenyl-t-butyl group, alpha.-naphthylmethyl group, 1-alpha.-naphthylethyl group, 2-alpha.-naphthylethyl group, 1-alpha.-naphthylisopropyl group, 2-alpha.-naphthylisopropyl group, beta-naphthylmethyl group, 1-beta.-naphthylethyl group, 2-beta.-naphthylethyl group, 1-beta.-naphthylisopropyl group, 2-beta.-naphthylisopropyl group, p-methylbenzyl group, m-methylbenzyl group, o-methylbenzyl group, p-chlorobenzyl group, m-chlorobenzyl group, o-chlorobenzyl group, p-bromobenzyl group, m-bromobenzyl group, o-bromobenzyl group, p-iodobenzyl group, m-iodobenzyl group, o-iodobenzyl group, p-hydroxybenzyl group, m-hydroxybenzyl group, o-hydroxybenzyl group, p-aminobenzyl group, m-aminobenzyl group, o-aminobenzyl group, p-nitrobenzyl group, m-nitrobenzyl group, o-nitrobenzyl group, p-cyanobenzyl group, m-cyanobenzyl group, o-cyanobenzyl group, 1-hydroxy-2-phenylisopropyl group, and 1-chloro-2-phenylisopropyl group. Of the above, preferred are benzyl group, p-cyanobenzyl group, m-cyanobenzyl group, o-cyanobenzyl group, 1-phenylethyl group, 2-phenylethyl group, 1-phenylisopropyl group, and 2-phenylisopropyl group.

[0065] The term “aza” in azadibenzofuran, aza-dibenzothiophene, etc. means that one or more of the C—H groups in the respective aromatic fragment are replaced by a nitrogen atom. For example, azatriphenylene encompasses dibenzo[f,h]quinoxaline, dibenzo[f,h]quinoline and other analogues with two or more nitrogens in the ring system. One of ordinary skill in the art can readily envision other nitrogen analogs of the aza-derivatives described above, and all such analogs are intended to be encompassed by the terms as set forth herein.

[0066] The alkyl, cycloalkyl, alkenyl, alkynyl, aralkyl, heterocyclic group, aryl, and heteroaryl may be unsubsti-


tuted or may be substituted with one or more substituents selected from the group consisting of deuterium, halogen, alkyl, cycloalkyl, arylalkyl, alkoxy, aryloxy, amino, cyclic amino, silyl, alkenyl, cycloalkenyl, heteroalkenyl, alkynyl, aryl, heteroaryl, an acyl group, a carbonyl group, a carboxylic acid group, an ether group, an ester group, a nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof.

[0067] It is to be understood that when a molecular fragment is described as being a substituent or otherwise attached to another moiety, its name may be written as if it were a fragment (e.g. phenyl, phenylene, naphthyl, dibenzofuryl) or as if it were the whole molecule (e.g. benzene, naphthalene, dibenzofuran). As used herein, these different ways of designating a substituent or attached fragment are considered to be equivalent.


[0068] In the compounds mentioned in this disclosure, the hydrogen atoms can be partially or fully replaced by deuterium. Other atoms such as carbon and nitrogen, can also be replaced by their other stable isotopes. The replacement by other stable isotopes in the compounds may be preferred due to its enhancements of device efficiency and stability.


[0069] In the compounds mentioned in this disclosure, multiple substitutions refer to a range that includes a double substitution, up to the maximum available substitutions.

[0070] In the compounds mentioned in this disclosure, the expression that adjacent substituents are optionally joined to form a ring is intended to be taken to mean that two radicals are linked to each other by a chemical bond. This is illustrated by the following scheme:

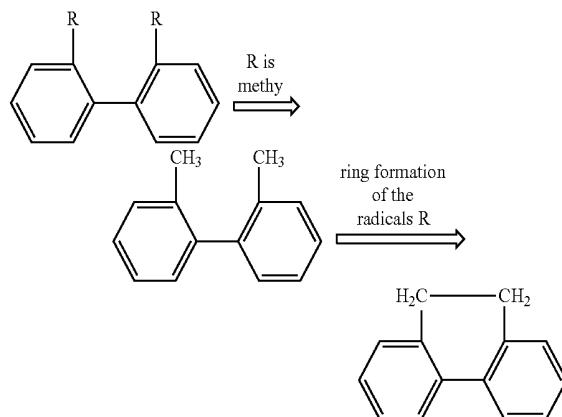


[0071] Furthermore, the expression that adjacent substituents are optionally joined to form a ring is also intended to be taken to mean that in the case where one of the two radicals represents hydrogen, the second radical is bonded at a position to which the hydrogen atom was bonded, with formation of a ring. This is illustrated by the following scheme:



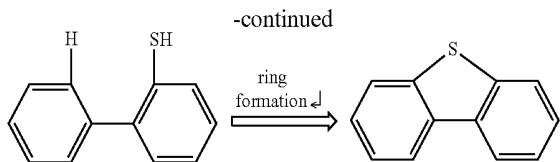

[0072] According to an embodiment of the present invention, a compound having formula 1 is disclosed:

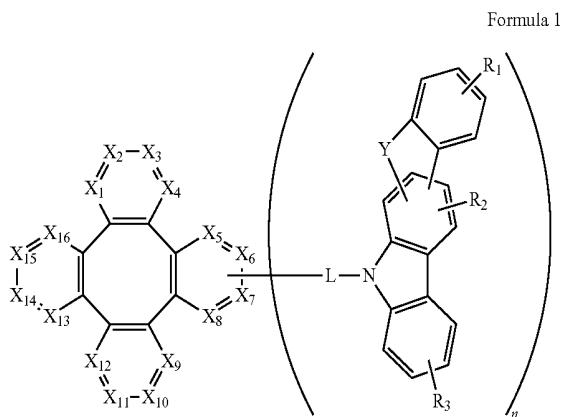

[0073] Wherein

[0074] X_1 to X_{16} are each independently selected from the group consisting of C, CR, and N;

[0075] L is selected from the group consisting of a single bond, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 4 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms;

[0076] Y is selected from the group consisting of O, S, Se, NR', or CR"R"';

[0077] R_1 and R_3 represents mono, di, tri, or tetra substitution or no substitution;

[0078] R_2 represents mono or di substitution or no substitution;

[0079] R, R', R'', R''', R₁, R₂, and R₃ are each independently selected from the group consisting of hydrogen, deuterium, halogen, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted cycloalkyl group having 3 to 20 ring carbon atoms, a substituted or unsubstituted heteroalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted arylalkyl group having 7 to 30 carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryloxy group having 6 to 30 carbon atoms, a substituted or unsubstituted alkenyl group having 2 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 3 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms, a substituted or unsubstituted amino group having 0 to 20 carbon atoms, an acyl group, a carbonyl group, a carboxylic acid group, an ester group, a

nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof;

[0080] Any adjacent substitution can be optionally joined to form a ring or fused structure;


[0081] n is selected from 1, 2, 3, or 4;

[0082] when n is 2 or more, L, Y, R₁, R₂, and R₃ can be the same or different.


[0083] In one embodiment, wherein none of X_1 to X_{16} is N, X_1 to X_{16} are each independently selected from the group consisting of C, and CR.

[0084] In one embodiment, wherein at least one of X_1 to X_{16} is N.

[0085] In one preferred embodiment, wherein L is selected from the group consisting of:

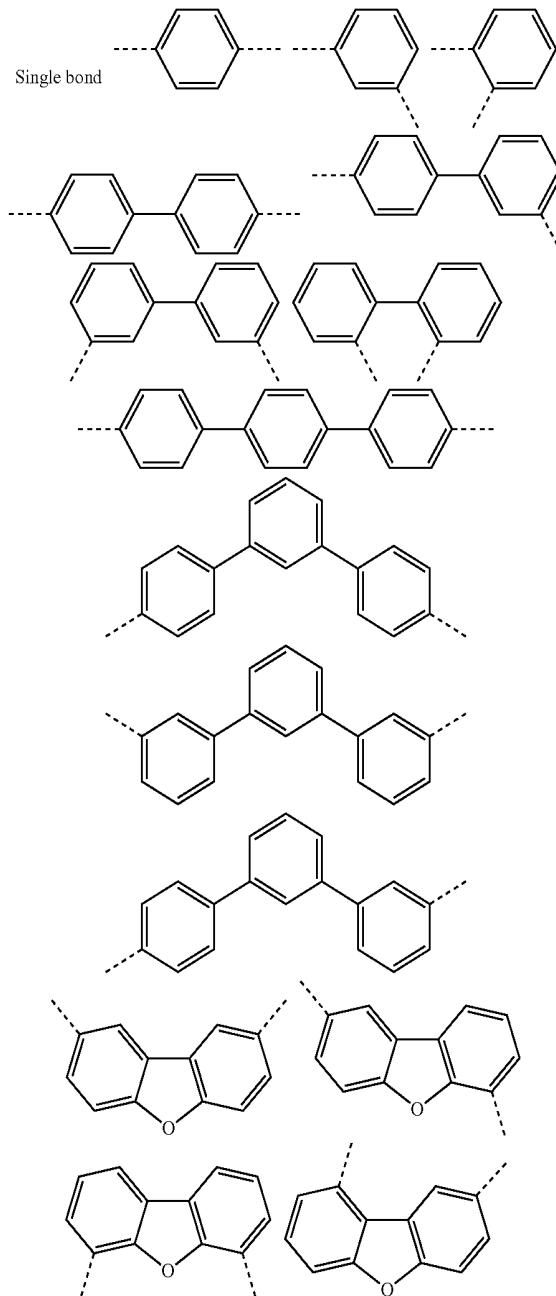


-continued

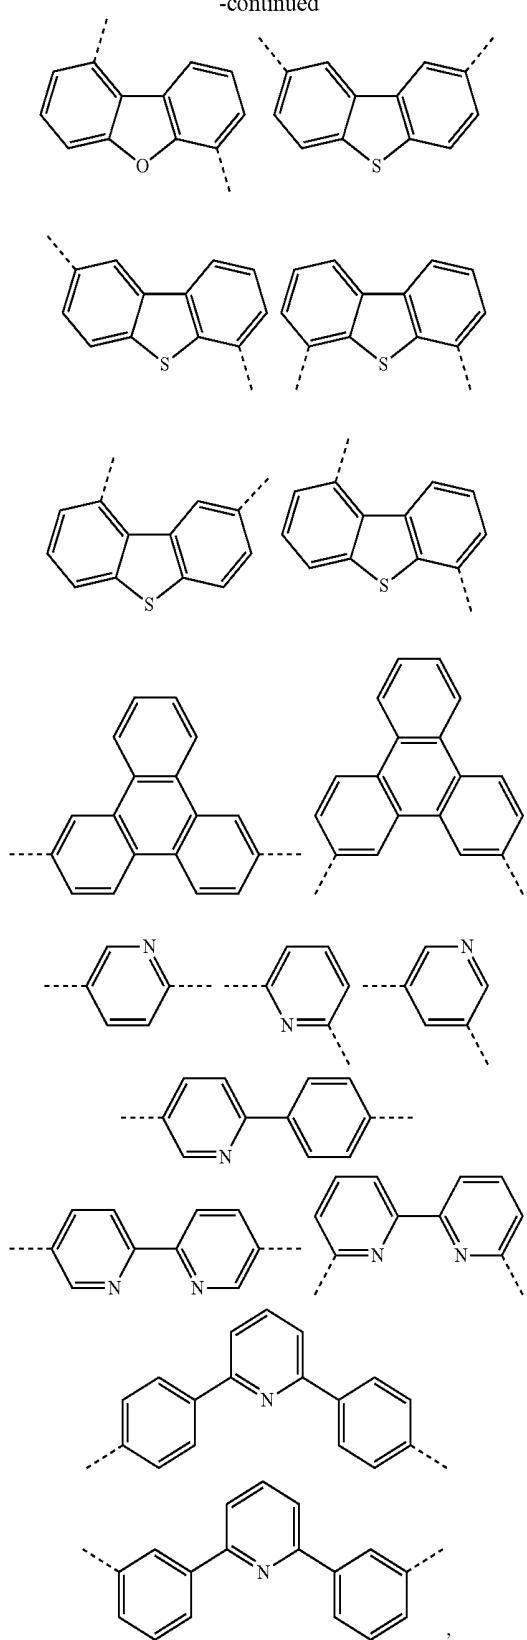


[0087] In one preferred embodiment, wherein the compound is selected from the group consisting of:


Compound 1

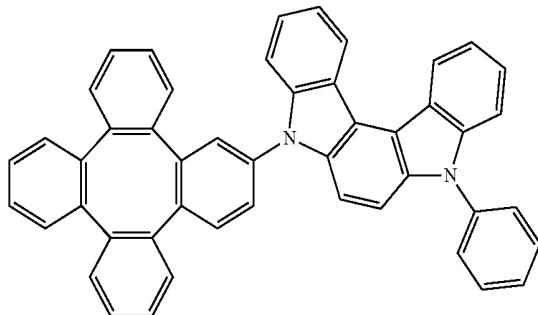


Compound 2

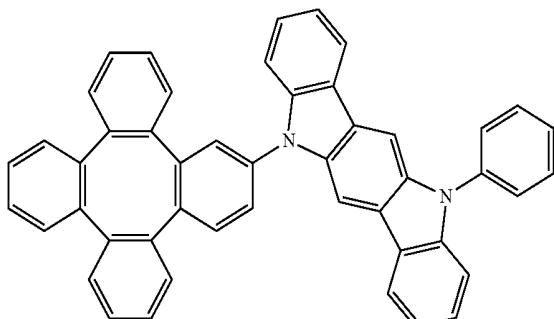

Compound 3

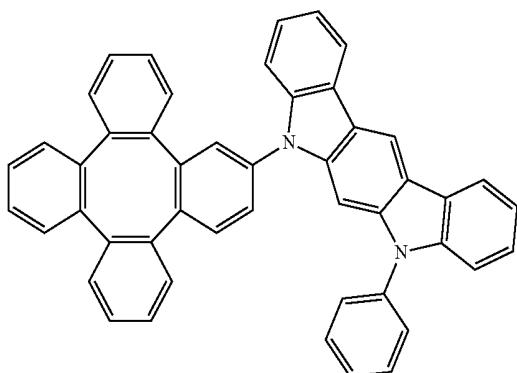

Compound 4

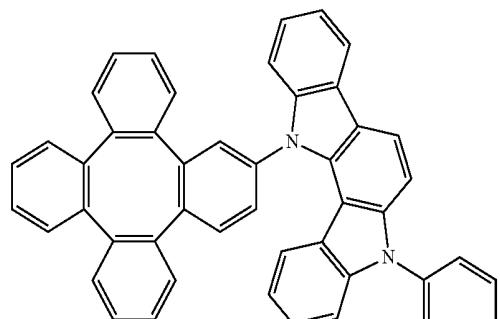


and combinations thereof.

[0086] In one embodiment, wherein Y is selected from NR¹.


-continued

Compound 5


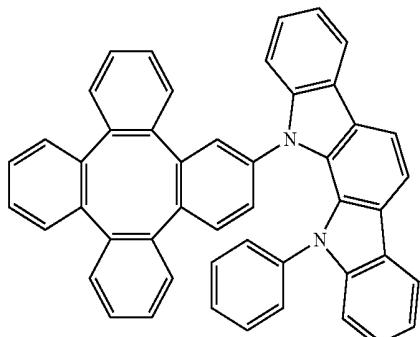


-continued



Compound 9

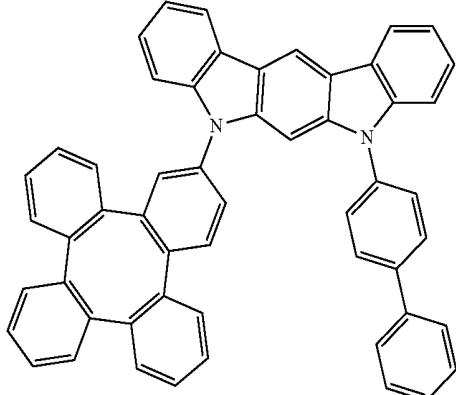



Compound 6

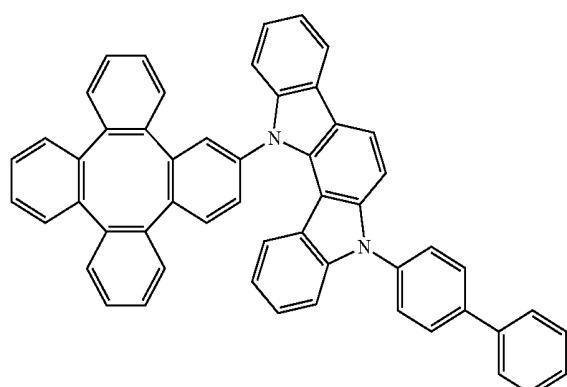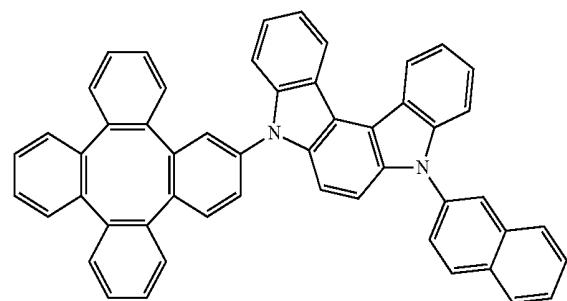

Compound 7

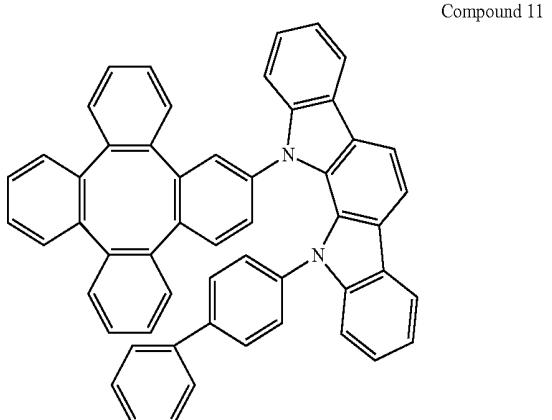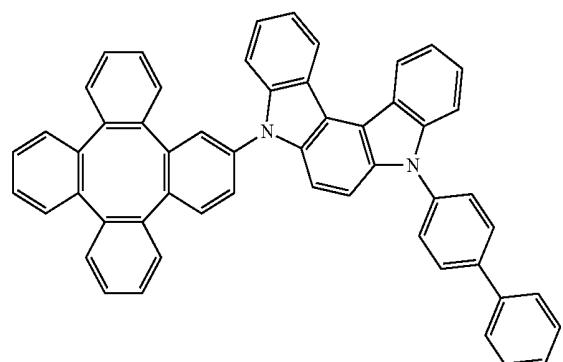


Compound 8

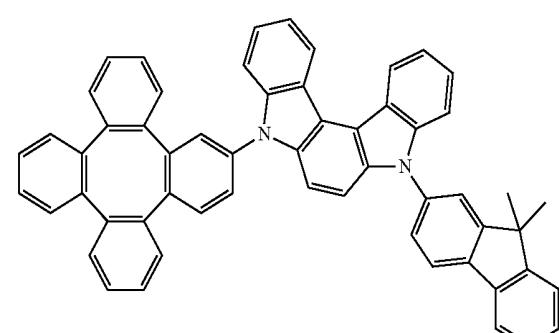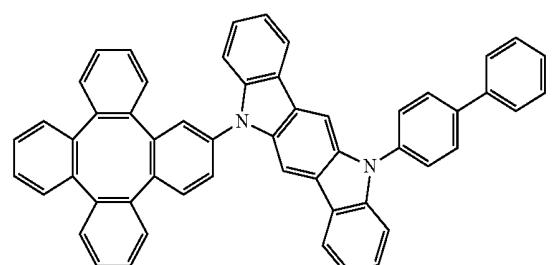


-continued

Compound 13

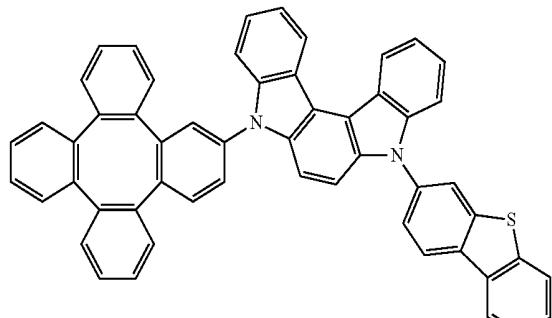


-continued


Compound 17

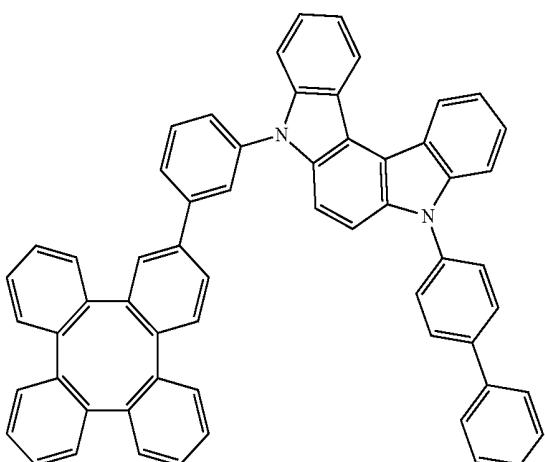


Compound 14

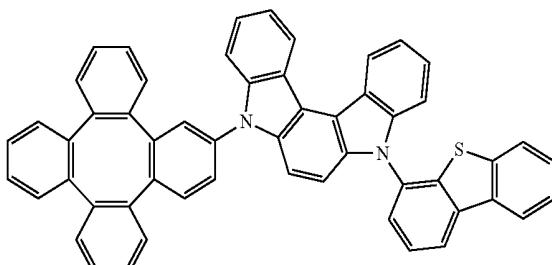



Compound 18

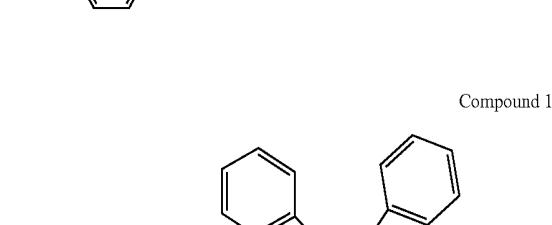

Compound 15


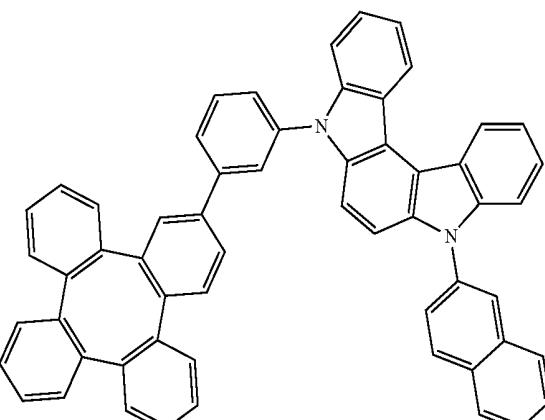


Compound 19

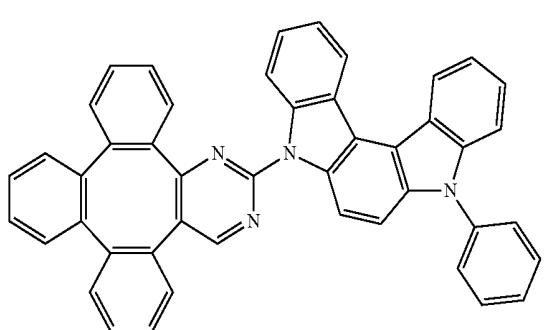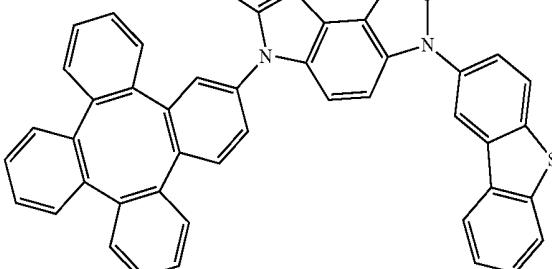


Compound 16

Compound 20

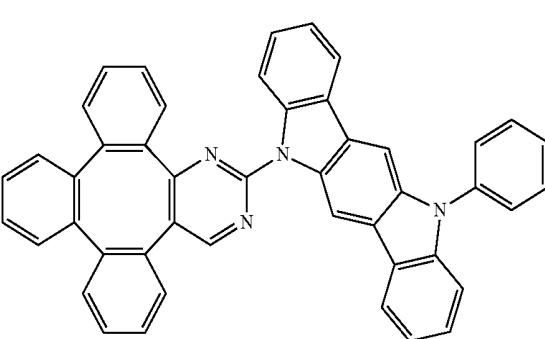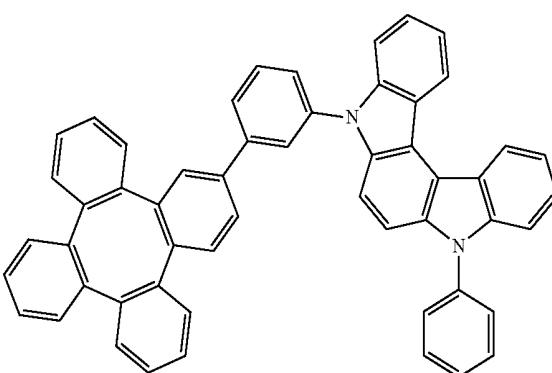


-continued

Compound 21

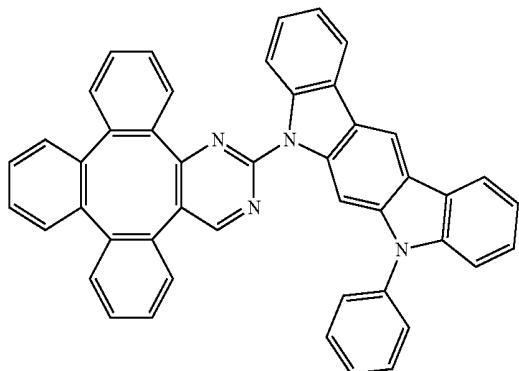


-continued


Compound 25

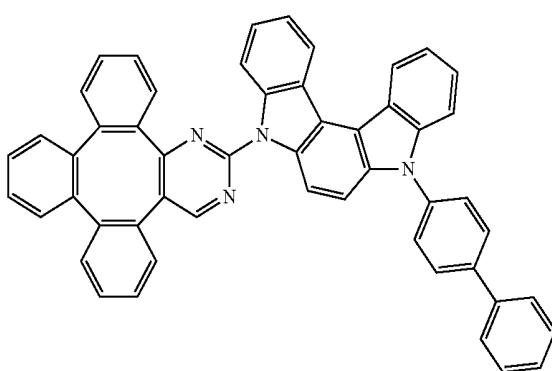

Compound 22


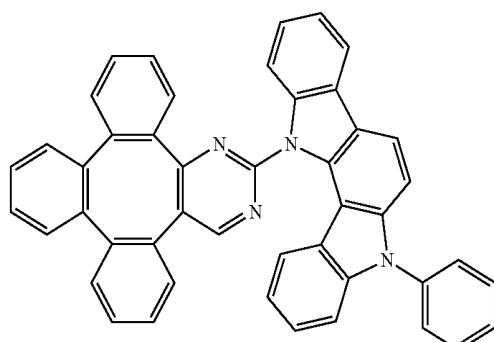


Compound 26

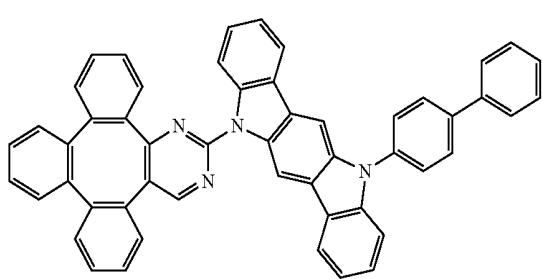



Compound 27

Compound 23

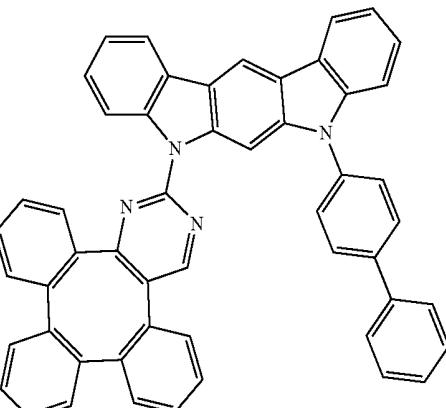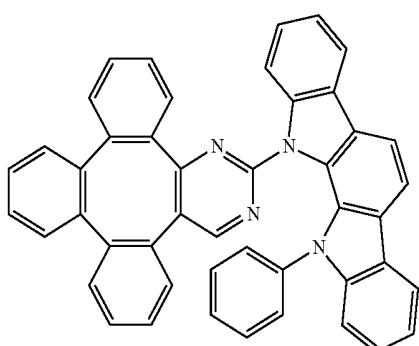


Compound 28

Compound 24

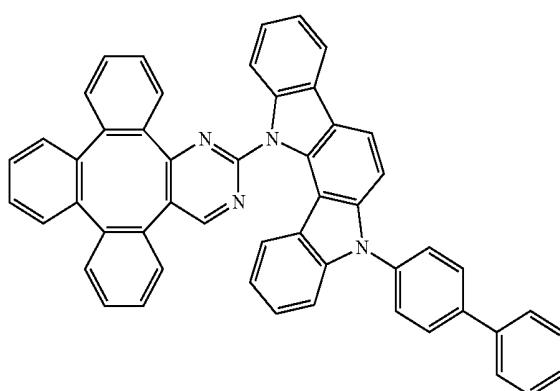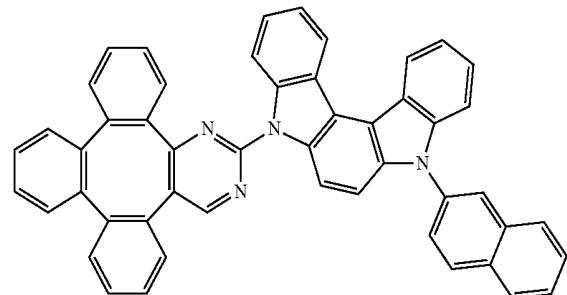


-continued

Compound 29

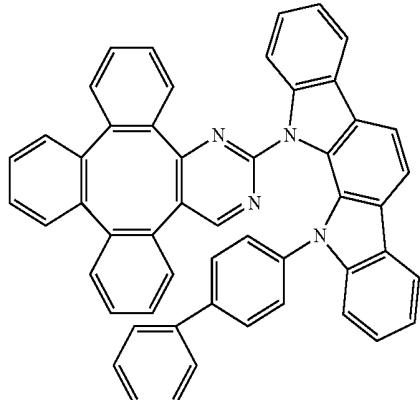


-continued


Compound 33

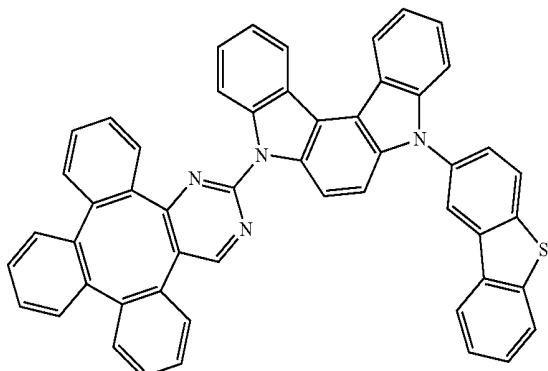


Compound 30

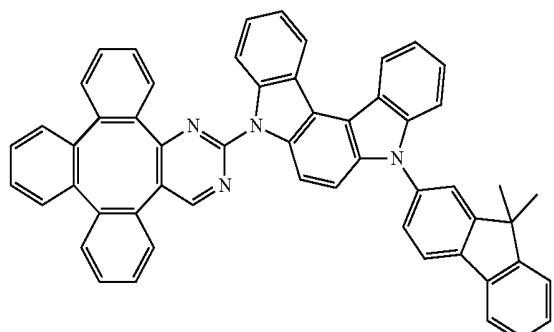


Compound 34

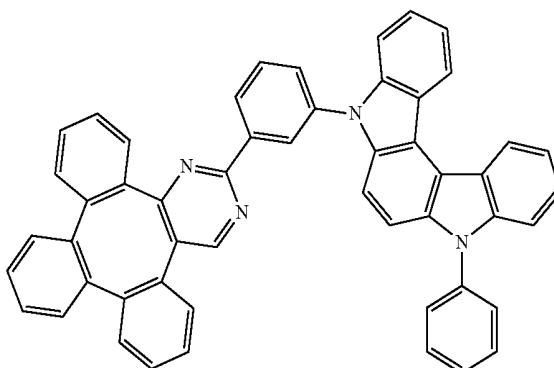


Compound 31

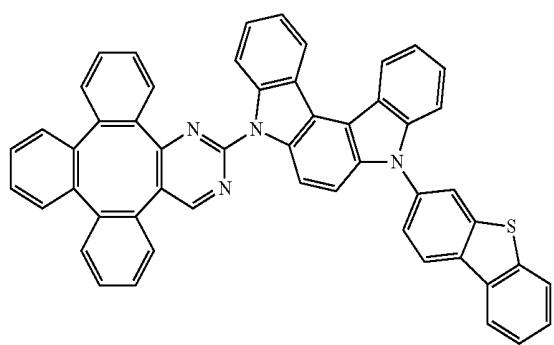

Compound 35

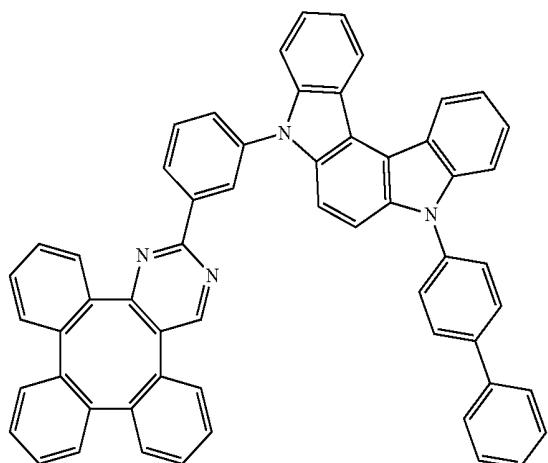


Compound 32

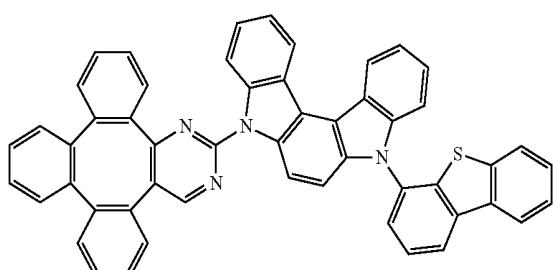


-continued

Compound 36

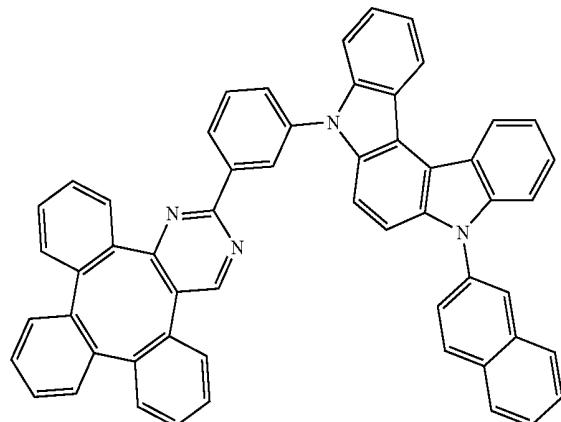


-continued


Compound 40

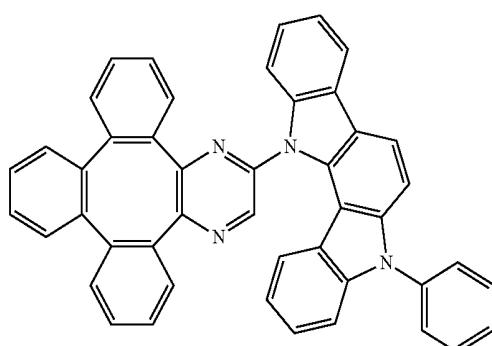


Compound 37

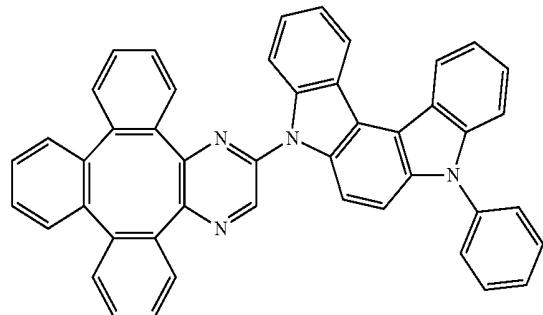


Compound 41

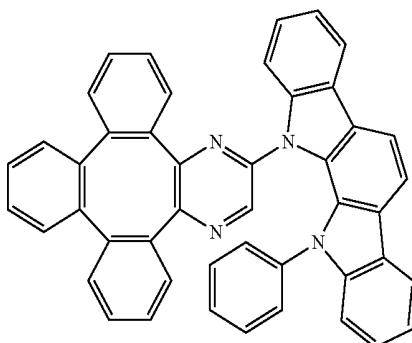


Compound 38

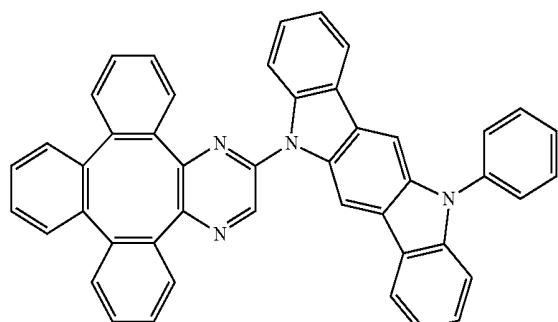


Compound 42

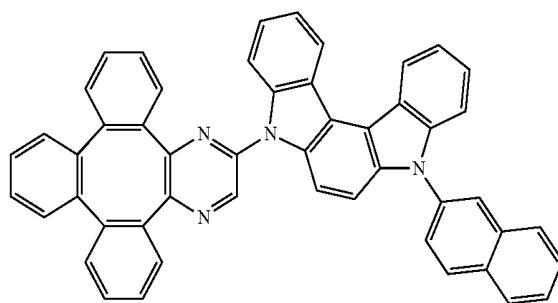

Compound 39

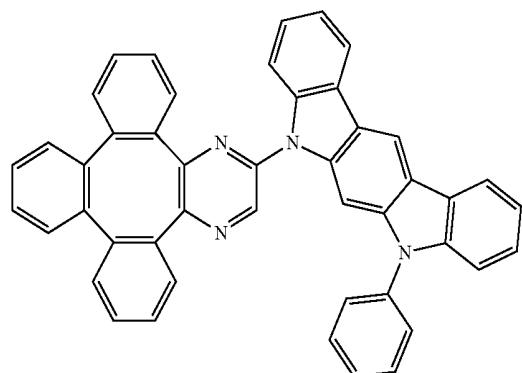


Compound 43

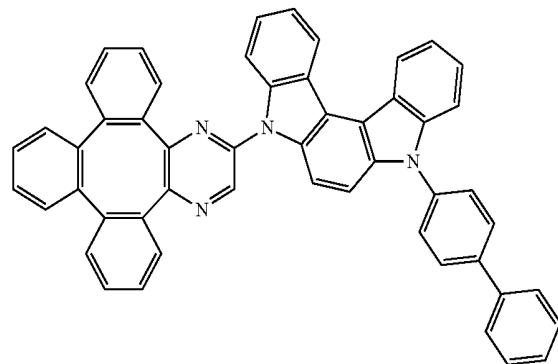


-continued

Compound 44

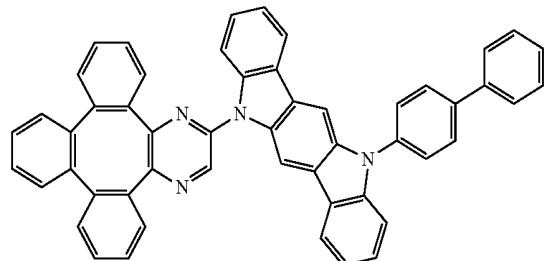


Compound 45

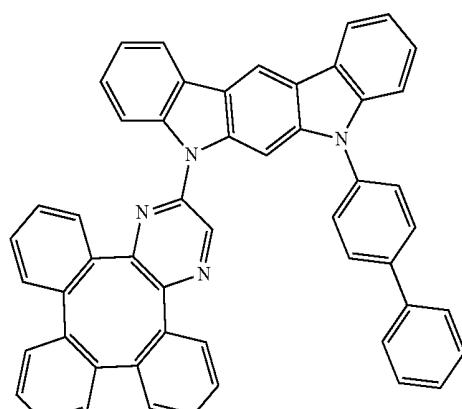


-continued


Compound 48

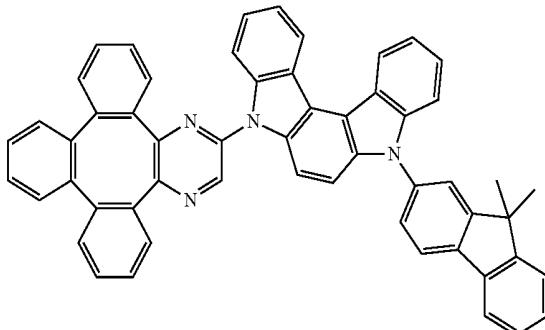


Compound 49

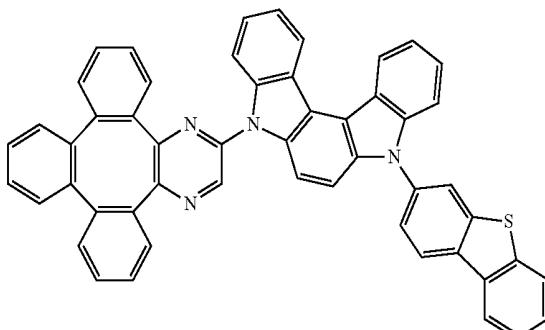


Compound 46

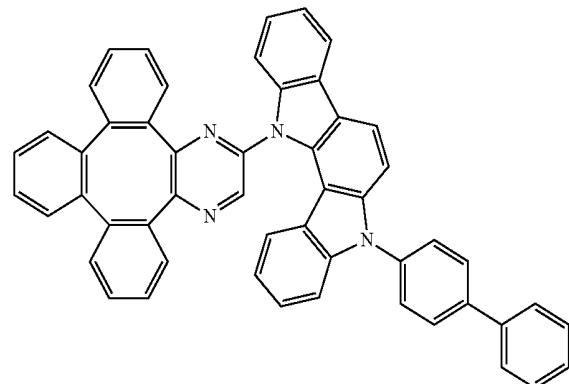


Compound 50

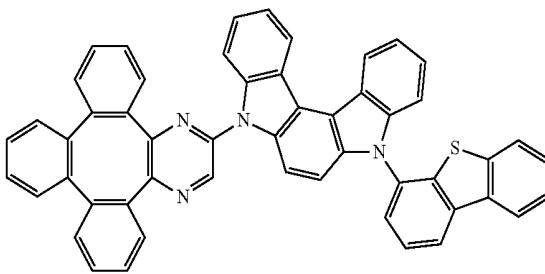

Compound 47

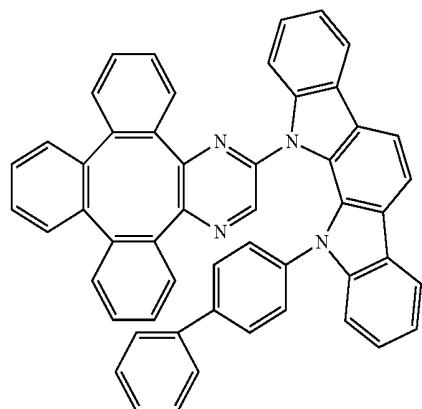


Compound 51

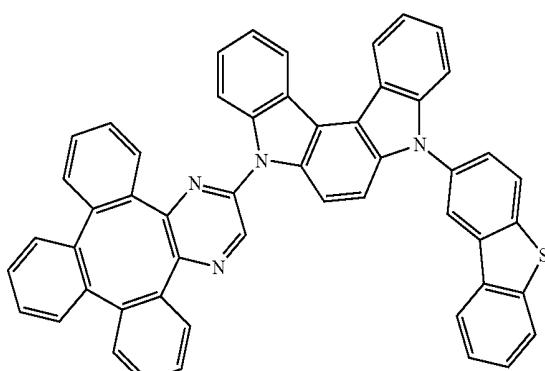



-continued

Compound 52


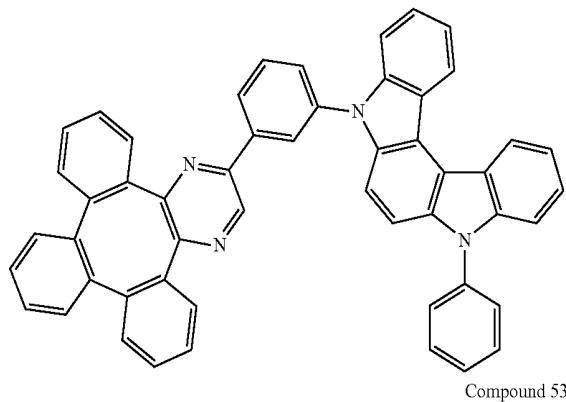


-continued



Compound 56

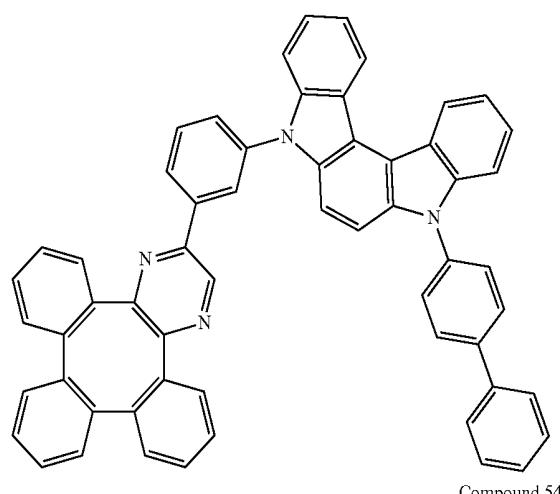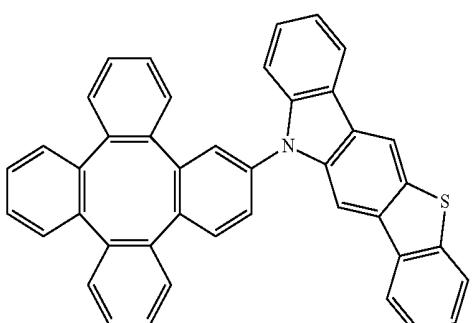


Compound 57

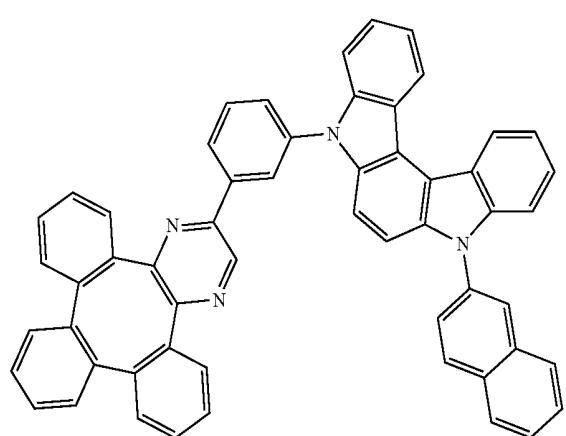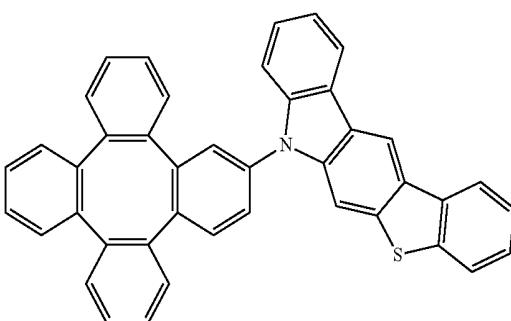


Compound 58

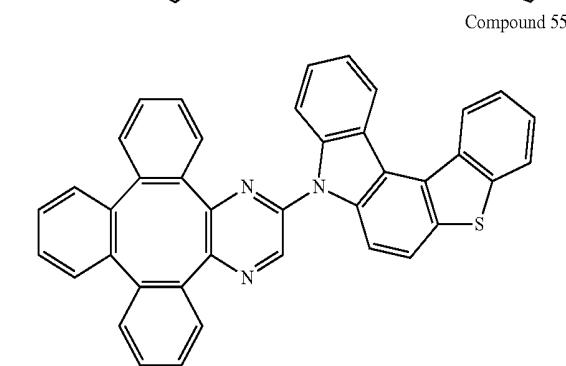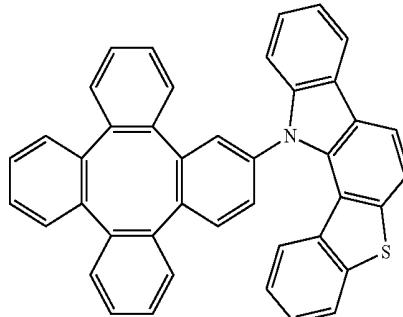

Compound 59

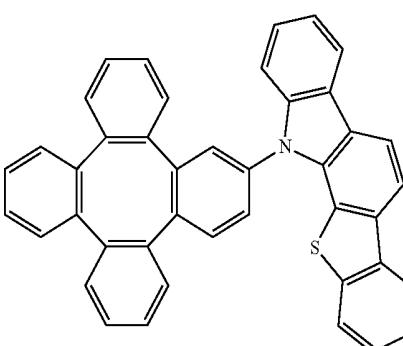


-continued

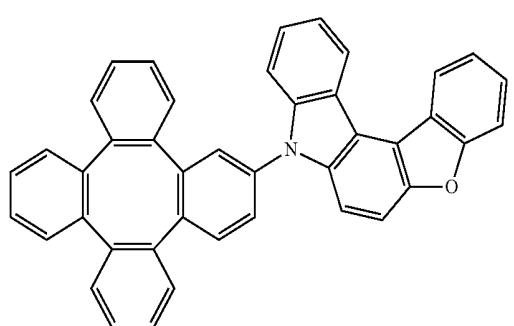


Compound 60


-continued

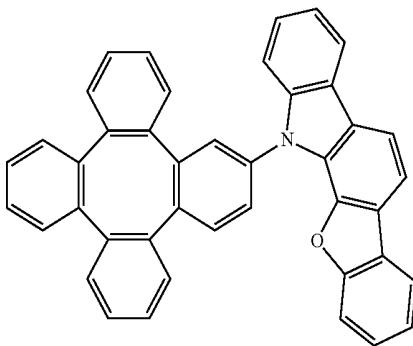


Compound 64

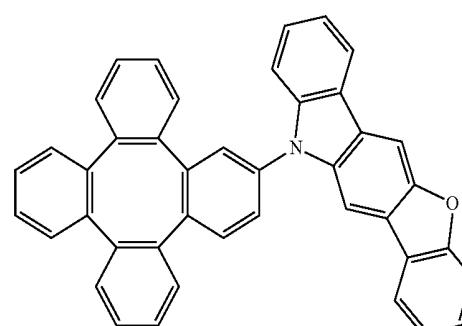


Compound 61

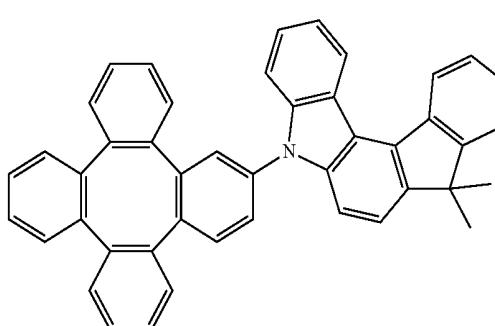


Compound 65

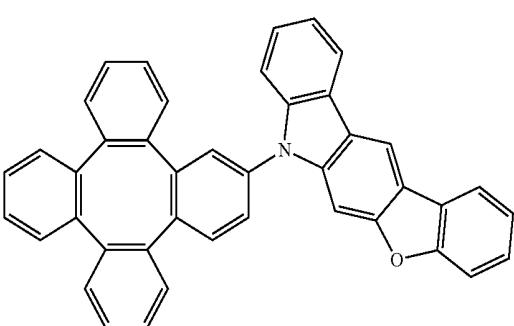


Compound 62

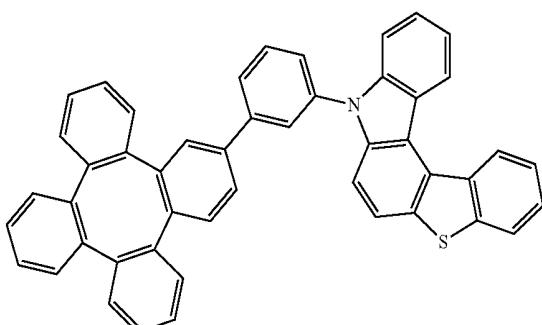


Compound 66

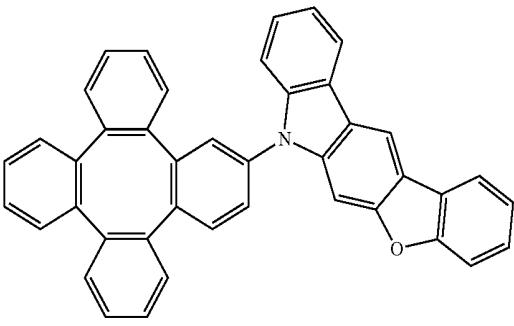


Compound 63

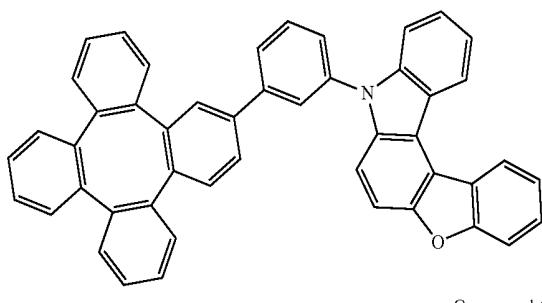

Compound 67

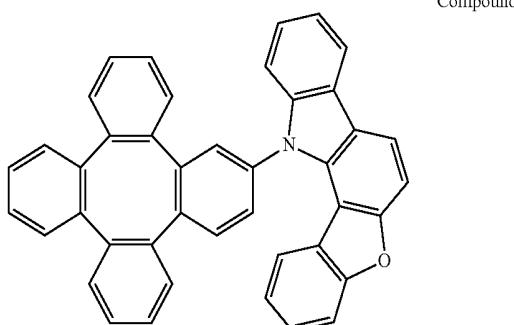


Compound 68

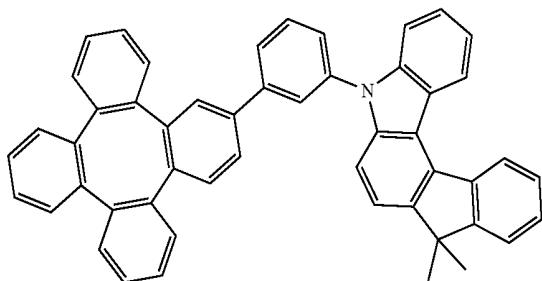


-continued

-continued


Compound 69

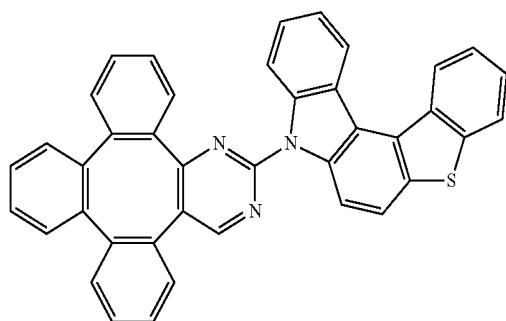


Compound 73

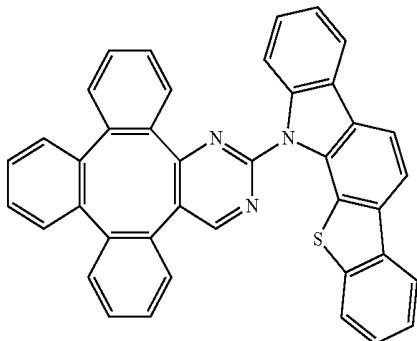


Compound 70

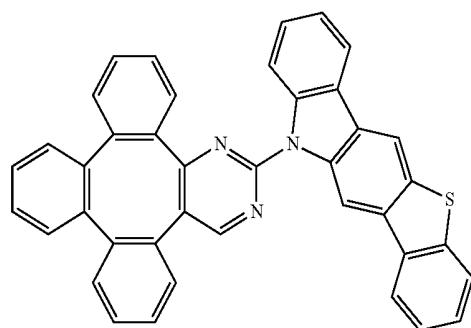


Compound 74

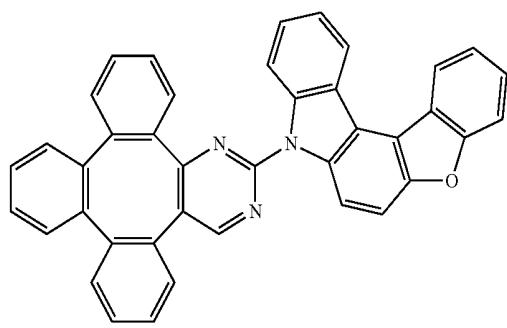


Compound 71

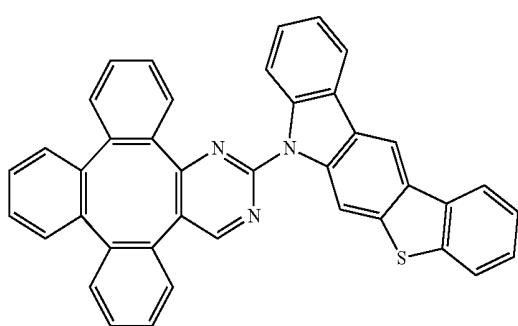


Compound 75

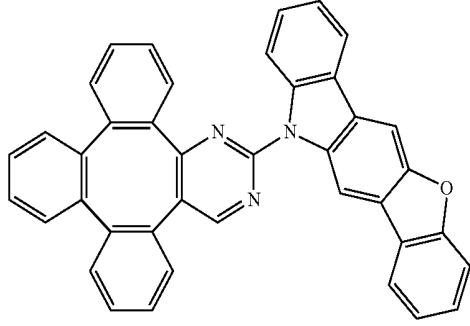


Compound 72

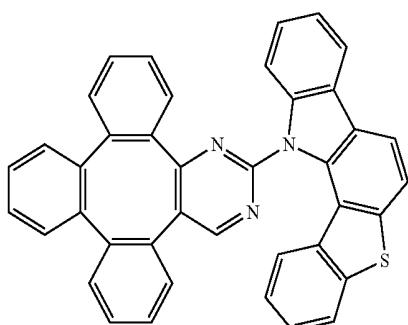

Compound 76

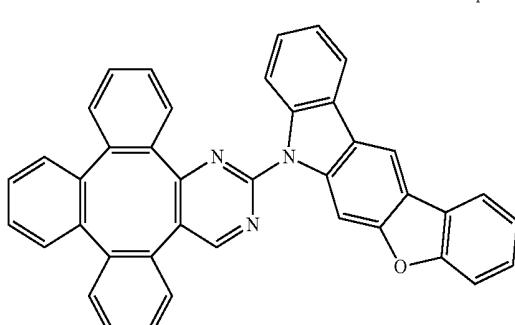


-continued

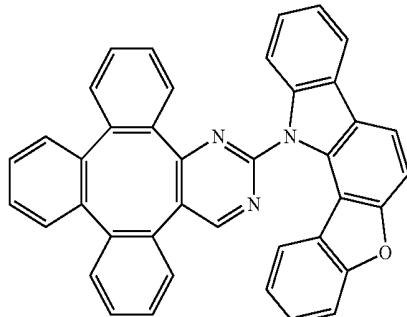


Compound 77


-continued

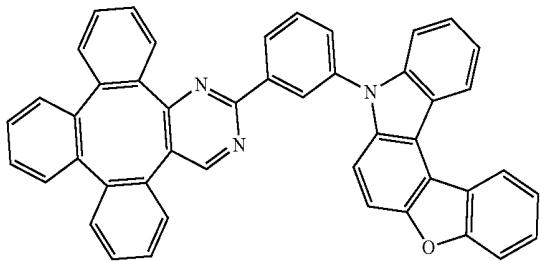


Compound 81

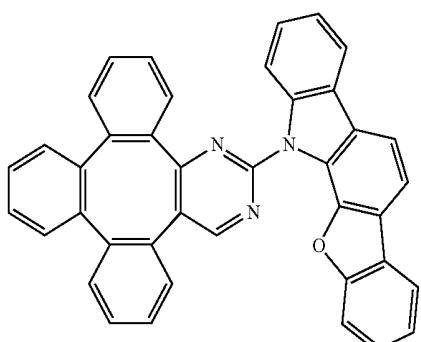


Compound 78

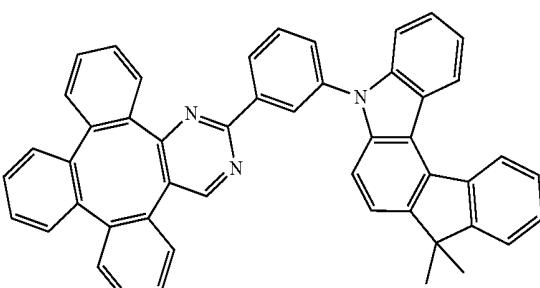


Compound 82

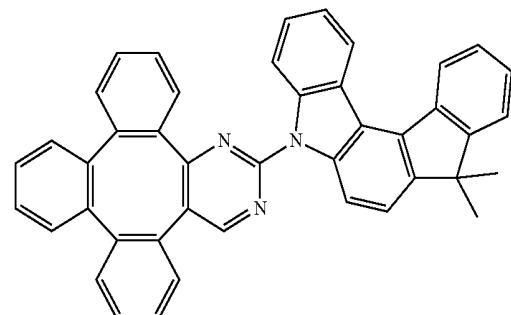


Compound 79

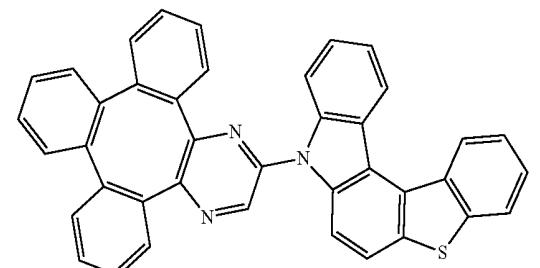



Compound 83

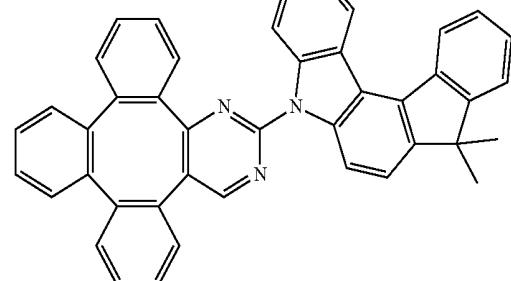

Compound 80

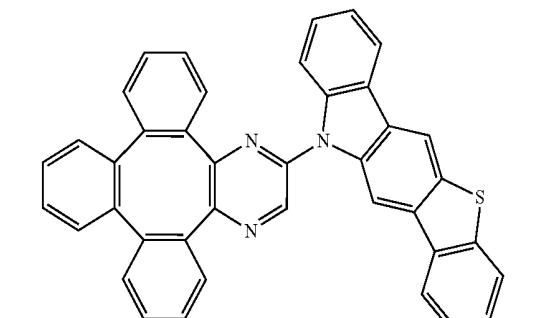


Compound 84

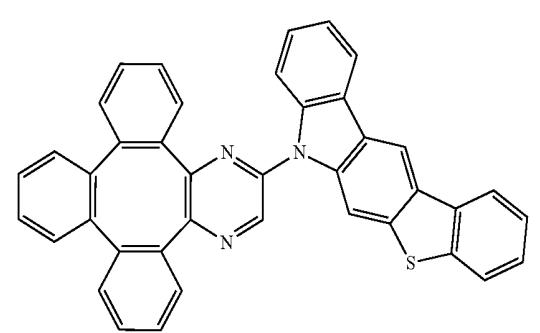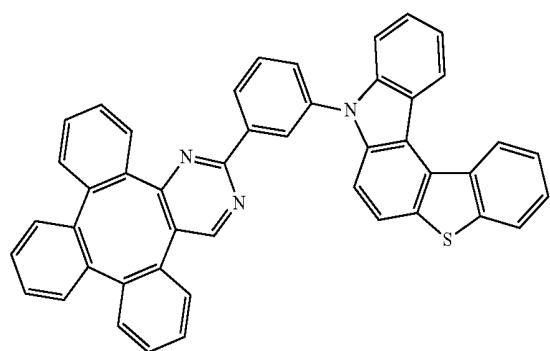


-continued

Compound 86

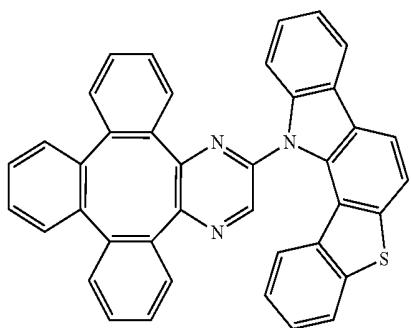


-continued


Compound 90

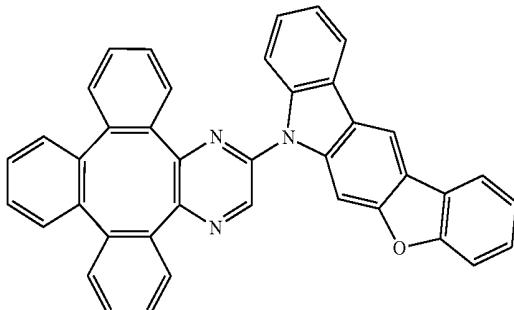


Compound 87

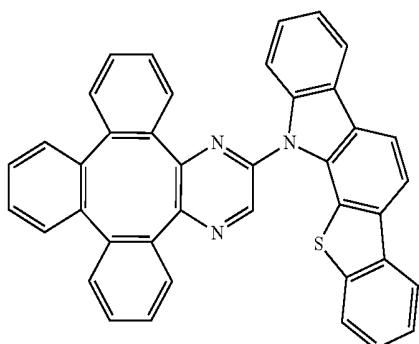


Compound 88

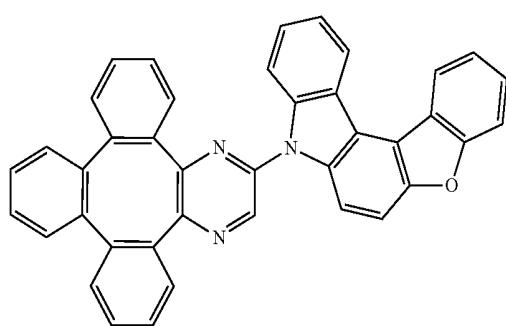


Compound 89

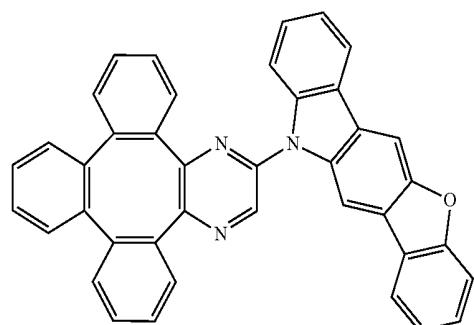


Compound 91

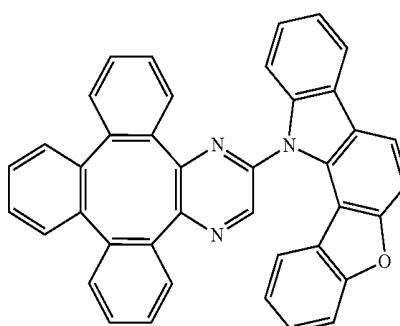


Compound 92

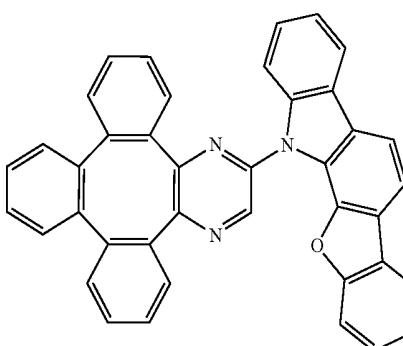

Compound 93

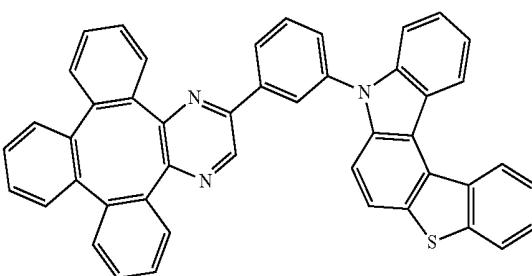


Compound 94

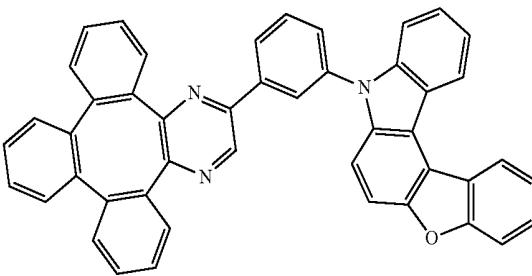

-continued

Compound 95

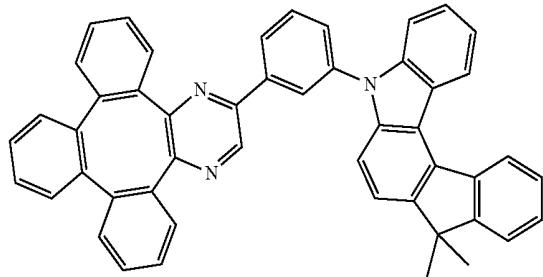


[0088] According to another embodiment, an electroluminescent device is disclosed. The electroluminescent device comprises:

[0089] an anode,

[0090] a cathode,

[0091] and an organic layer, disposed between the anode and the cathode, comprising a compound according to formula 1:

Formula 1

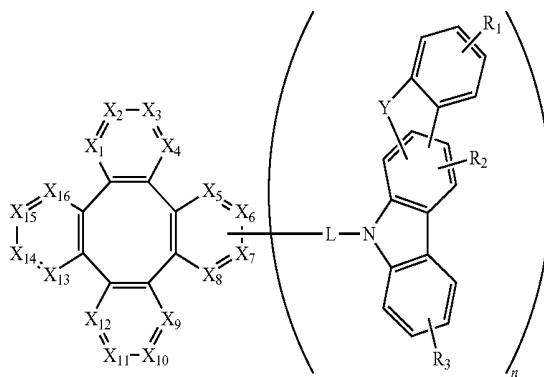

[0092] Wherein

[0093] X₁ to X₁₆ are each independently selected from the group consisting of C, CR, and N;

[0094] L is selected from the group consisting of a single bond, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 4 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms;

[0095] Y is selected from the group consisting of O, S, Se, NR', or CR"R"';

[0096] R₁ and R₃ represents mono, di, tri, or tetra substitution or no substitution;

[0097] R₂ represents mono or di substitution or no substitution;

[0098] R, R', R", R'', R₁, R₂, and R₃ are each independently selected from the group consisting of hydrogen, deuterium, halogen, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted cycloalkyl group having 3 to 20 ring carbon atoms, a substituted or unsubstituted heteroalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted arylalkyl group having 7 to 30 carbon atoms, a substituted or unsub-

stituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryloxy group having 6 to 30 carbon atoms, a substituted or unsubstituted alkenyl group having 2 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 3 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms, a substituted or unsubstituted amino group having 0 to 20 carbon atoms, an acyl group, a carbonyl group, a carboxylic acid group, an ester group, a nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof;

[0099] Any adjacent substitution can be optionally joined to form a ring or fused structure;

[0100] n is selected from 1, 2, 3, or 4;

[0101] when n is 2 or more, L, Y, R₁, R₂, and R₃ can be the same or different.


[0102] In one embodiment, wherein the organic layer is a charge transporting layer.


[0103] In one embodiment, wherein the organic layer is a charge blocking layer.

[0104] In one embodiment, wherein the organic layer is an emissive layer and the compound is a host.

[0105] In one embodiment, wherein the organic layer further comprises a phosphorescent emitter.

[0106] In one embodiment, wherein the organic layer further comprises a phosphorescent emitter and the phosphorescent emitter is a metal complex having at least one ligand comprising the following structures:

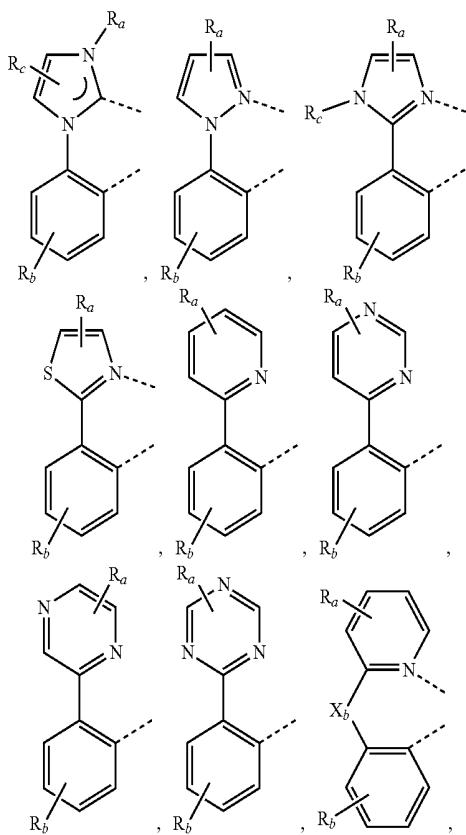



[0107] Wherein

[0108] R_a , R_b , and R_c can represent mono, di, tri, or tetra substitution or no substitution;

[0109] R_a , R_b , and R_c are each independently selected from the group consisting of hydrogen, deuterium, halogen, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted cycloalkyl group having 3 to 20 ring carbon atoms, a substituted or unsubstituted heteroalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted arylalkyl group having 7 to 30 carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryloxy group having 6 to 30 carbon atoms, a substituted or unsubstituted alkenyl group having 2 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 3 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms, a substituted or unsubstituted amino group having 0 to 20 carbon atoms, an acyl group, a carbonyl group, a carboxylic acid group, an ester group, a nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof;

[0110] X_b is selected from the group consisting of O, S, Se, NR_{N1} , and $CR_{C1}R_{C2}$;

[0111] R_{N1} , R_{C1} and R_{C2} are each independently selected from the group consisting of hydrogen, deuterium, halogen, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted cycloalkyl group having 3 to 20 ring carbon atoms, a substituted or unsubstituted heteroalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted arylalkyl group having 7 to 30 carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryloxy group having 6 to 30 carbon atoms, a substituted or unsubstituted alkenyl group having 2 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 3 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms, a substituted or unsubstituted amino group having 0 to 20 carbon atoms, an acyl group, a carbonyl group, a carboxylic acid group, an ester group, a nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof;

[0112] Two adjacent substituents can be optionally joined to form a ring.

[0113] In one embodiment, wherein the organic layer is the emissive layer and the compound of formula 1 is the thermally delayed fluorescent dopant.

[0114] According to yet another embodiment, a formulation comprising a compound according to formula 1 is also disclosed. The specific structure of the compound is described in any of the above embodiments.

[0115] Combination with Other Materials

[0116] The materials described herein as useful for a particular layer in an organic light emitting device may be used in combination with a wide variety of other materials present in the device. The combinations of these materials are described in more detail in U.S. Pat. App. No. 20160359122 at paragraphs 0132-0161, which are incorporated by reference in its entirety. The materials described or referred to the disclosure are non-limiting examples of materials that may be useful in combination with the compounds disclosed herein, and one of skill in the art can readily consult the literature to identify other materials that may be useful in combination.

[0117] The materials described herein as useful for a particular layer in an organic light emitting device may be used in combination with a variety of other materials present in the device. For example, emissive dopants disclosed herein may be used in combination with a wide variety of hosts, transport layers, blocking layers, injection layers, electrodes and other layers that may be present. The combination of these materials is described in detail in paragraphs 0080-0101 of U.S. Pat. App. No. 20150349273, which are incorporated by reference in its entirety. The materials described or referred to the disclosure are non-limiting examples of materials that may be useful in combination with the compounds disclosed herein, and one of skill in the art can readily consult the literature to identify other materials that may be useful in combination.


[0118] In the embodiments of material synthesis, all reactions were performed under nitrogen protection unless otherwise stated. All reaction solvents were anhydrous and used as received from commercial sources. Synthetic products were structurally confirmed and tested for properties using one or more conventional equipment in the art (including, but not limited to, nuclear magnetic resonance instrument produced by BRUKER, liquid chromatograph produced by SHIMADZU, liquid chromatography-mass spectrometer produced by SHIMADZU, gas chromatography-mass spectrometer produced by SHIMADZU, differential Scanning calorimeters produced by SHIMADZU, fluorescence spectrophotometer produced by SHANGHAI LENGGUANG TECH., electrochemical workstation produced by WUHAN CORTEST, and sublimation apparatus produced by ANHUI BEQ, etc.) by methods well known to the persons skilled in the art. In the embodiments of the device, the characteristics of the device were also tested using conventional equipment in the art (including, but not limited to, evaporator produced by ANGSTROM ENGINEERING, optical testing system produced by SUZHOU FATAR, life testing system produced by SUZHOU FATAR, and ellipsometer produced by BEIJING ELLITOP, etc.) by methods well known to the persons skilled in the art. As the persons skilled in the art are aware of the above-mentioned equipment use, test methods and other related contents, the inherent data of the sample can be obtained with certainty and without influence, so the above related contents are not further described in this patent.

[0119] Material Synthesis Example

[0120] The method for preparing the compounds of the present invention is not limited. The following compound is exemplified as a typical but non-limiting example, and its synthesis route and preparation method are as follows:


[0121] Synthesis of Compound 1

[0122] Step 1:

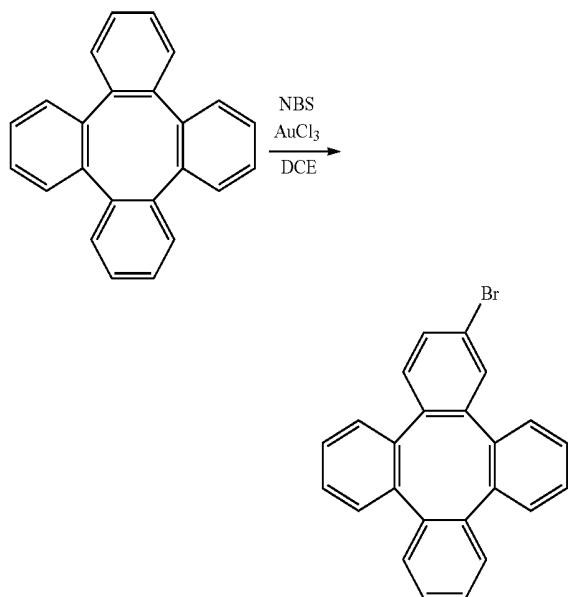


[0123] Tetraphenylenne (20.0 g, 65.6 mmol), N-bromosuccinimide (23.4 g, 98.4 mmol), AuCl_3 (1.0 g, 3.28 mmol) were dissolved in 1,2-dichloroethane (400 mL). The reaction mixture was degassed with nitrogen and heated at 80° C. for 12 hours. After the reaction was cooled down to room temperature, the solvent was removed in vacuo and extracted with DCM. The residue was purified by flash column chromatography using 3% of DCM in hexane to afford 2-bromotetraphenylenne (8 g, 33% yield) as a white solid.

[0124] Step 2:

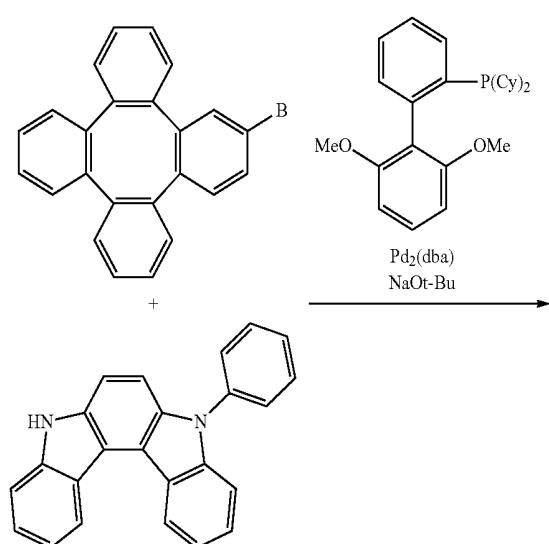

-continued

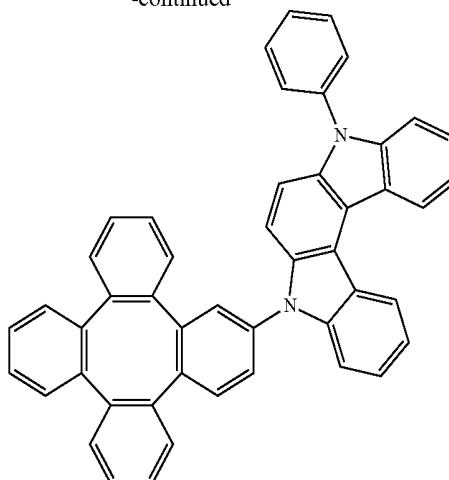

[0125] 2-bromotetraphenylenne (8.0 g, 22.3 mmol), 5-phenyl-5,8-dihydroindolo[2,3-c]carbazole (7.4 g, 22.3 mmol), tris(dibenzylideneacetone)dipalladium(0) (1.0 g, 1.1 mmol), 2-dicyclohexylphosphino-2',6'-dimethoxybiphenyl (0.9 g, 2.23 mmol), sodium tert-butoxide (4.3 g, 44.6 mmol) were mixed in xylene (100 mL) to give a colorless suspension. The reaction mixture was degassed with nitrogen and heated at 140° C. for 16 hours. After the reaction was cooled down to room temperature, the solvent was removed in vacuo and extracted with DCM. The organic phase was separated and collected. The residue was purified by flash column chromatography using 10%-20% of DCM in hexane to afford Compound 1 (3.3 g, 24.2% yield) as a pale yellow solid. The Compound 1 was identified as the target, having a molecular weight of 635.

[0126] The persons skilled in the art should know that the above preparation method is only an illustrative example, and the persons skilled in the art can obtain the structure of other compounds of the present invention by modifying the above preparation method.

[0127] Device Examples:

[0128] A glass substrate with 80 nm thick indium-tin-oxide (ITO) anode was first cleaned and then treated with oxygen plasma and UV ozone. After the treatments, the substrate was baked in a glovebox to remove moisture. The substrate was then mounted on a substrate holder and loaded into a vacuum chamber. The organic layers specified below were deposited in sequence by thermal vacuum deposition on the ITO anode at a rate of 0.2-2 Å/s at a vacuum level of around 10^{-8} torr. Compound HI was used as the hole injection layer (HIL). Compound HT was used as the hole transporting layer (HTL). Compound EB was used as the electron blocking layer (EBL). Then by co-deposition, Compound EM was doped in the inventive compound and Compound HB as the emitting layer (EML). Compound HB was used as the hole blocking layer (HBL). On the HBL, Compound ET and 8-hydroxyquinolinolato-lithium (Liq) were co-deposited as the electron transporting layer (ETL). Finally, 1 nm of Liq was deposited as the electron injection layer and 120 nm of Al was deposited as the cathode. The device was then transferred back to the glovebox and encapsulated with a glass lid and a moisture getter. The comparative examples were prepared in the same way except that comparative compound was used instead of the inventive compound.

[0129] The detailed device layer structure and thicknesses are shown in the table below. In the layers in which more than one material were used, they were obtained by doping different compounds in the weight ratios described therein.


TABLE 1

Device structure of device examples						
Device ID	HIL	HTL	EBL	EML	HBL	ETL
Example 1	Compound HI (100 Å)	Compound HT (350 Å)	Compound EB (50 Å)	Compound 1:Compound HB:Compound EM (45:45:10) (400 Å)	Compound HB (100 Å)	Compound ET:Liq (40:60) (350 Å)
Comparative Example 1	Compound HI (100 Å)	Compound HT (350 Å)	Compound EB (50 Å)	Compound A:Compound HB:Compound EM (45:45:10) (400 Å)	Compound HB (100 Å)	Compound ET:Liq (40:60) (350 Å)
Comparative Example 2	Compound HI (100 Å)	Compound HT (350 Å)	Compound EB (50 Å)	Compound B:Compound HB:Compound EM (45:45:10) (400 Å)	Compound HB (100 Å)	Compound ET:Liq (40:60) (350 Å)



[0130] The structures of the materials used in the devices are shown below:

-continued


Compound EM




Compound HI

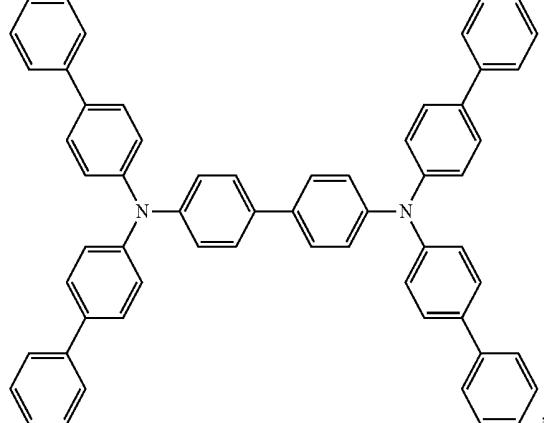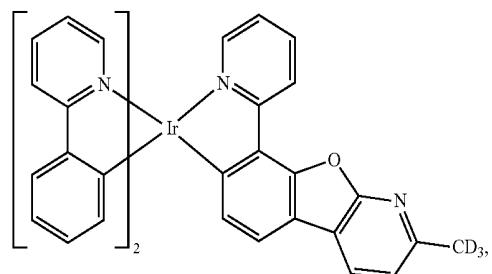


Compound HT

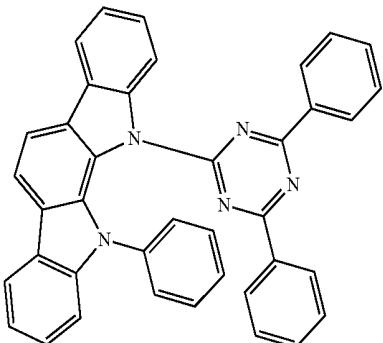

Compound HB

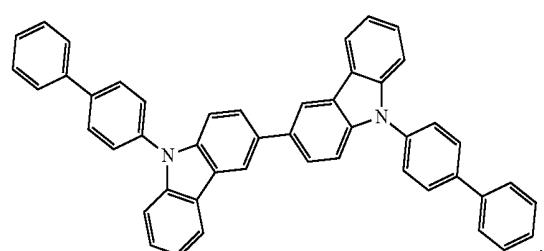


Compound EB

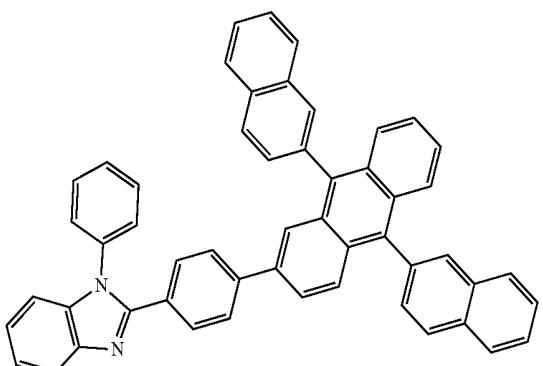

Compound ET

-continued

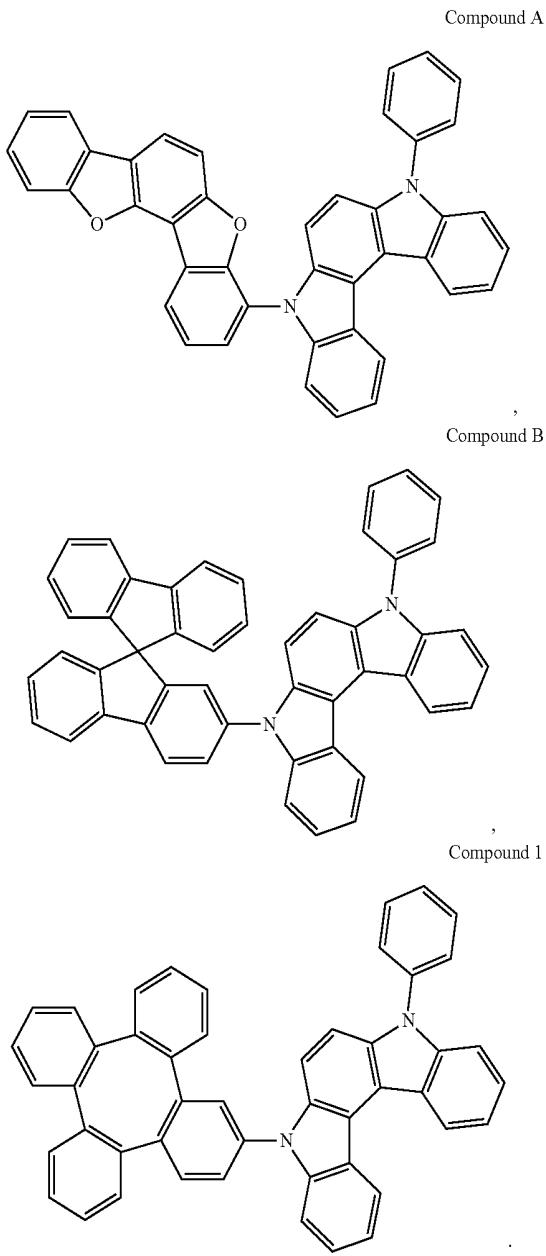

[0131] The IVL and lifetime characteristics of the devices were measured at various current densities and voltages. Table 2 shows the luminance efficiency (LE), λ max, full width at half maximum (FWHM), voltage (V) and CIE data at 21,750 cd/m². The sublimation temperatures (Sub T) of Compound 1, Compound A and Compound B were recorded. The lifetime was tested at a constant current from an initial brightness of 21,750 cd/m².

TABLE 2

Device ID	Device data						
	Sub T (° C.)	CIE (x, y)	λ max (nm)	FWHM (nm)	Volt-age (V)	LE (cd/A)	LT95 (hour)
Example 1	278	0.332, 0.636	528	55	4.42	79	56

TABLE 2-continued

Device ID	Device data						
	Sub T (° C.)	CIE (x, y)	λ max (nm)	FWHM (nm)	Volt-age (V)	LE (cd/A)	LT95 (hour)
Comparative Example 1	289	0.335, 0.635	528	56	4.23	81	23
Comparative Example 2	282	0.330, 0.638	527	54	4.28	76	56


[0132] Discussion:

[0133] As shown from the data in Table 2, the CIE, λ max and full width at half maximum (FWHM), are similar. But most importantly, Example 1 with Compound 1 as a host material has a much longer lifetime compared to Comparative Example 1. Example 1 and Comparative Example 2 have the same lifetime. However, Example 1 has a higher device luminance efficiency. It demonstrates that compounds of Formula 1, characterized by tetraarylene or tetraheteroarylene linked to fused ring carbazole can offer high efficiency and long lifetime in devices.

[0134] It is understood that the various embodiments described herein are by way of example only and are not intended to limit the scope of the invention. The present invention as claimed may therefore include variations from the particular examples and preferred embodiments described herein, as will be apparent to one of skill in the art. Many of the materials and structures described herein may be substituted with other materials and structures without deviating from the spirit of the invention. It is understood that various theories as to why the invention works are not intended to be limiting.

What is claimed is:

1. A compound having formula 1:

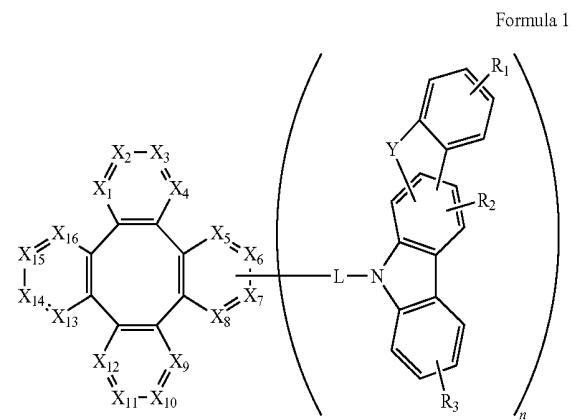

Wherein

X_1 to X_{16} are each independently selected from the group consisting of C, CR, and N;

L is selected from the group consisting of a single bond, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 4 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms;

Y is selected from the group consisting of O, S, Se, NR', and CR"R";

R₁ and R₃ represents mono, di, tri, or tetra substitution or no substitution;

R₂ represents mono or di substitution or no substitution;

R, R', R", R"', R₁, R₂, and R₃ are each independently selected from the group consisting of hydrogen, deuterium, halogen, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted cycloalkyl group having 3 to 20 ring carbon atoms, a substituted or unsubstituted heteroalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted arylalkyl group having 7 to 30 carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryloxy group having 6 to 30 carbon atoms, a substituted or unsubstituted alkenyl group having 2 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 3 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms, a substituted or unsubstituted amino group having 0 to 20 carbon atoms, an acyl group, a carbonyl group, a carboxylic acid group, an ester group, a nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof;

Any adjacent substitution can be optionally joined to form a ring or fused structure;



n is 1, 2, 3, or 4;

when n is 2 or more, L, Y, R₁, R₂, and R₃ can be the same or different.


2. The compound of claim 1, wherein none of X₁ to X₁₆ is N.

3. The compound of claim 1, wherein at least one of X₁ to X₁₆ is N.

4. The compound of claim 1, wherein L is selected from the group consisting of:

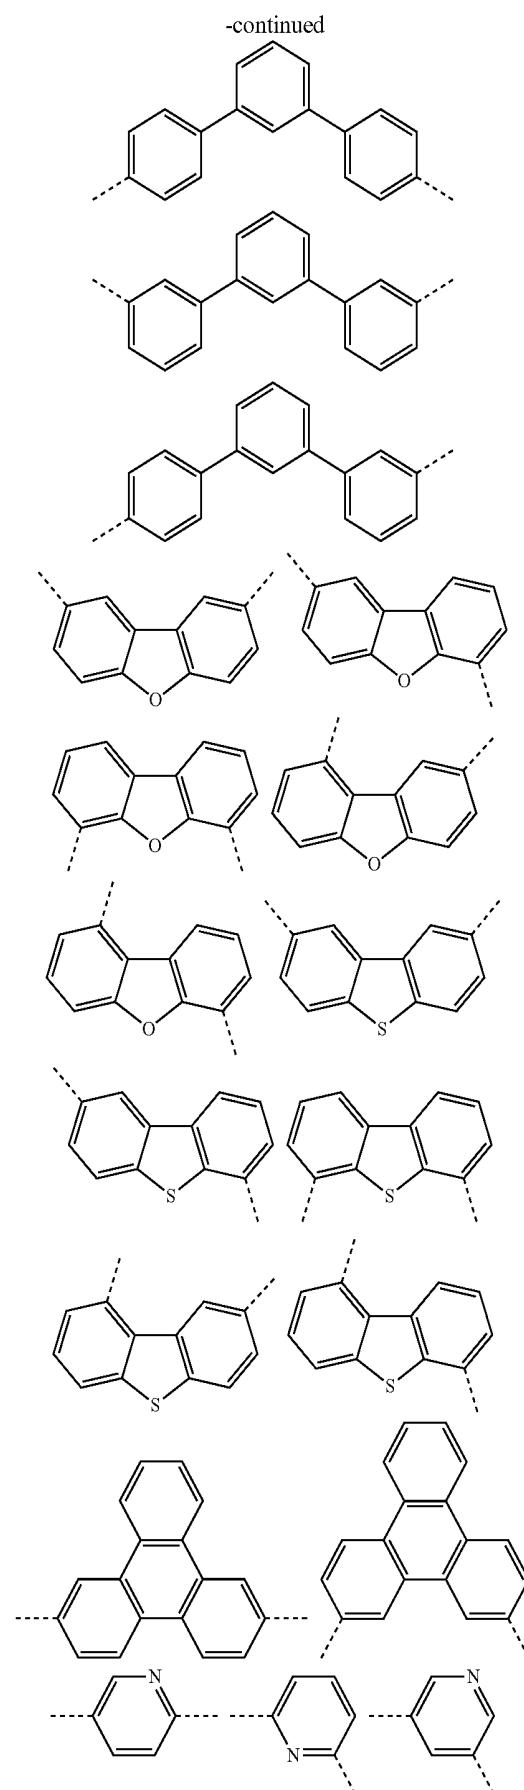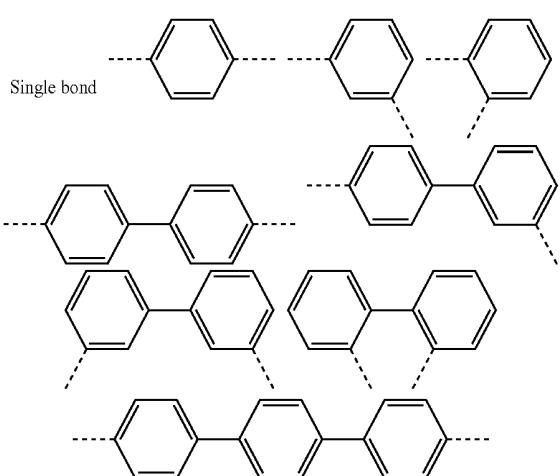


-continued


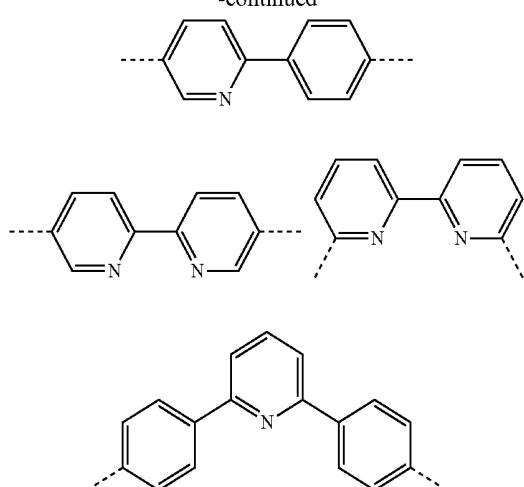


-continued

Compound 3

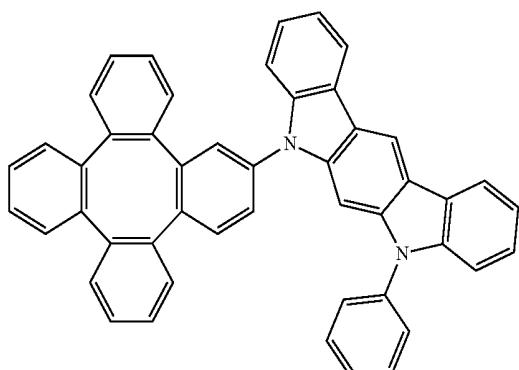

Compound 4

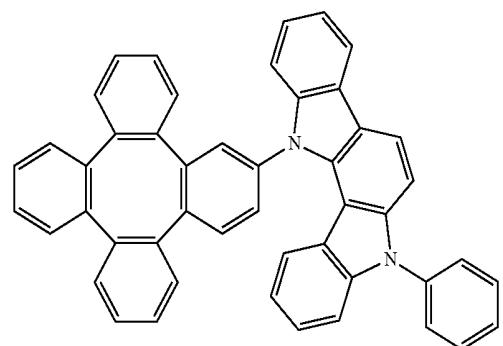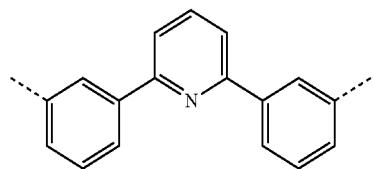


and combinations thereof.


5. The compound of claim 1, wherein Y is selected from NR¹.

6. The compound of claim 1, wherein the compound is selected from the group consisting of:


Compound 1

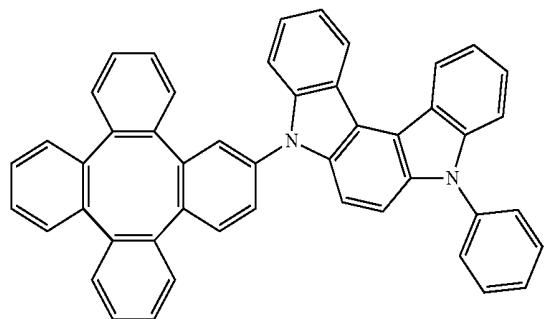


Compound 2

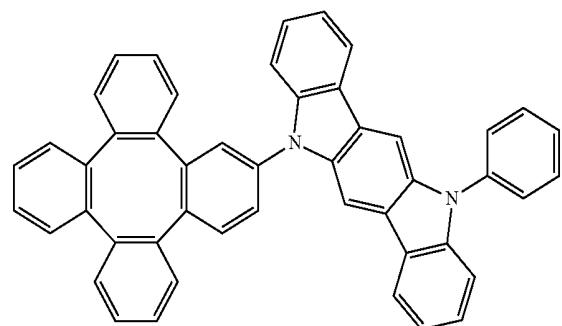

Compound 5

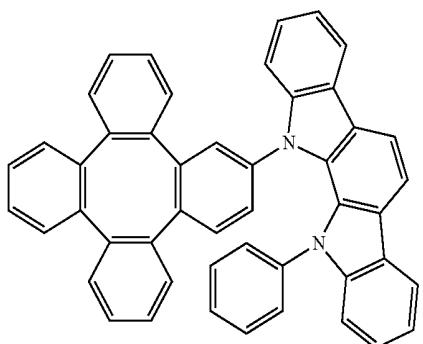


Compound 6

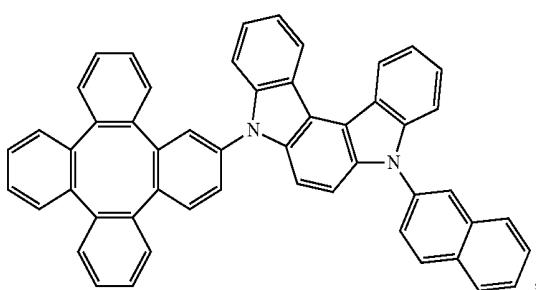



-continued

Compound 7


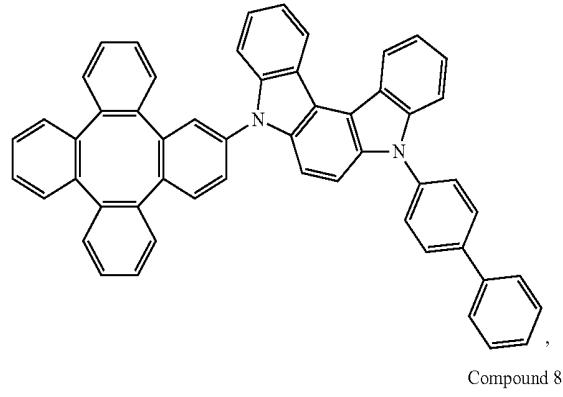


-continued

Compound 11

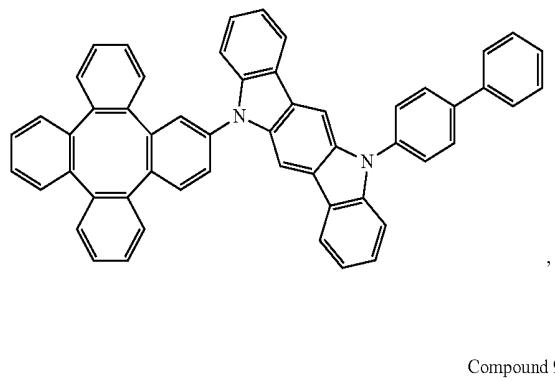
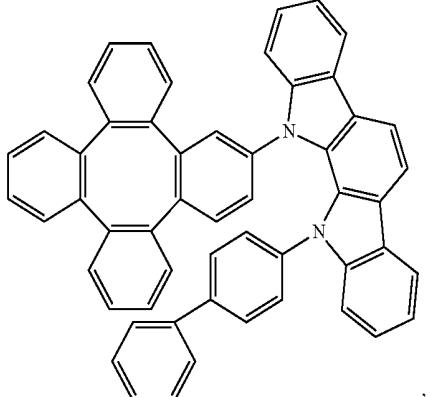


Compound 9

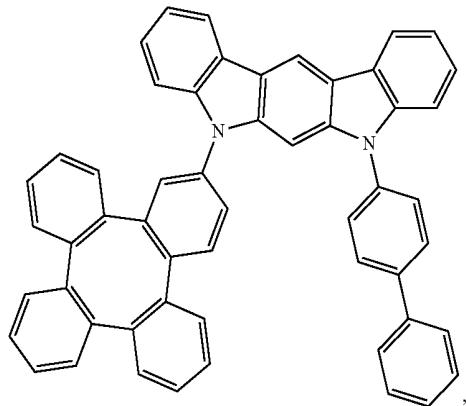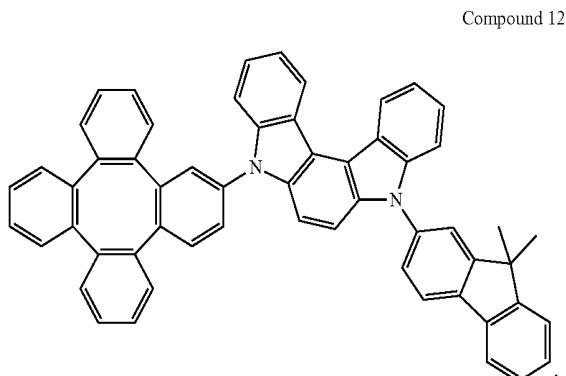


Compound 10

Compound 13

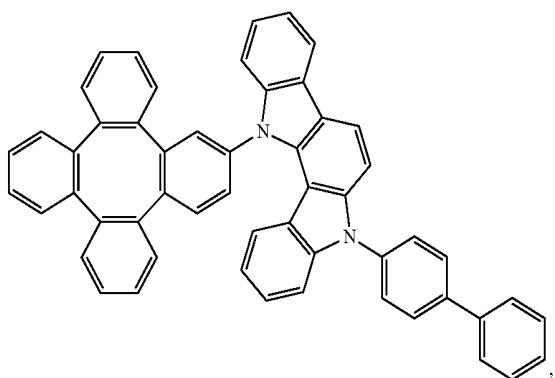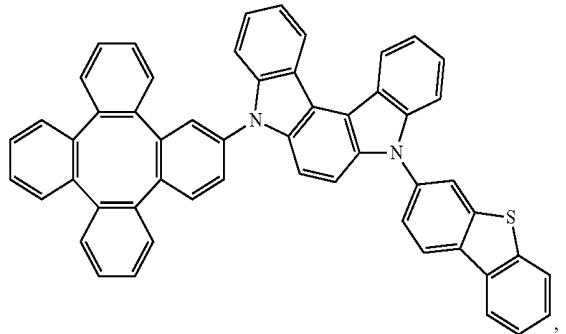


Compound 13

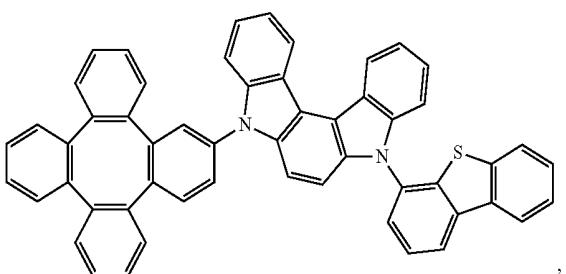


-continued

-continued

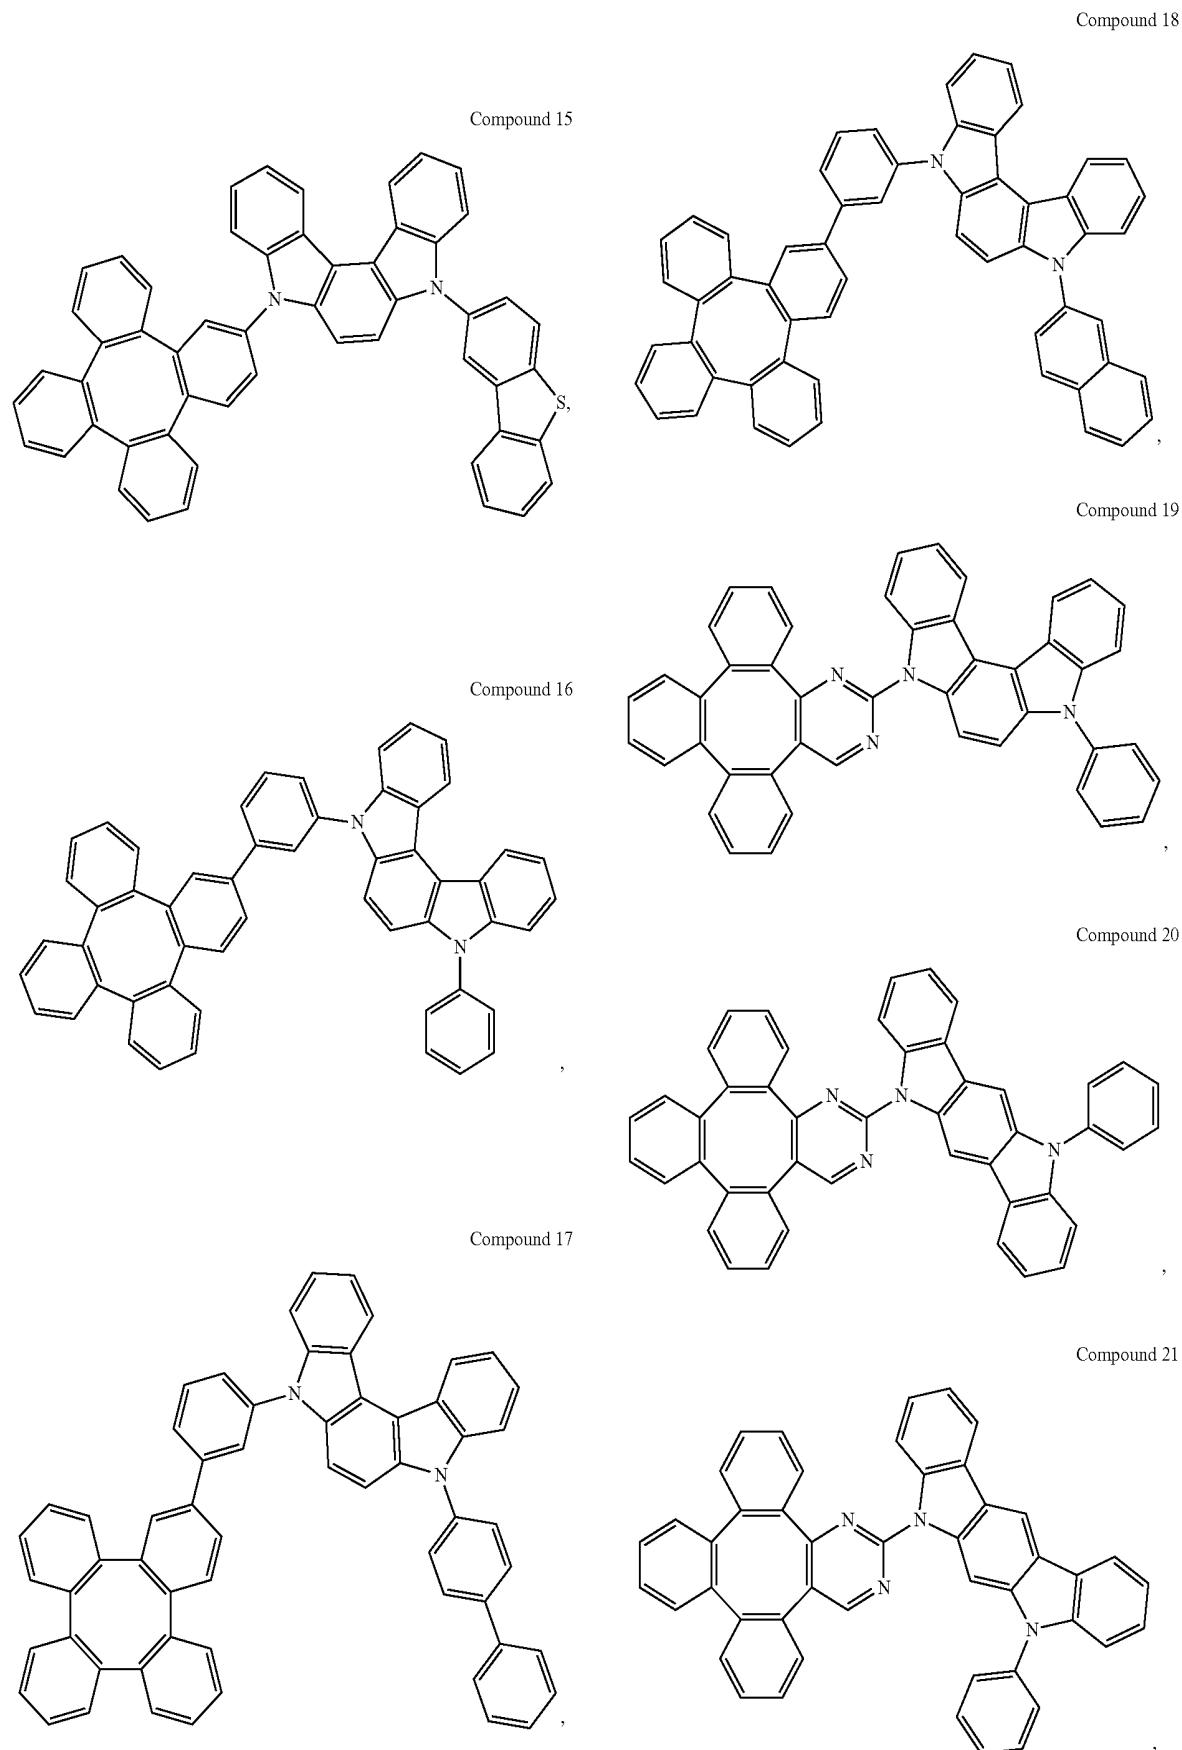


-continued

Compound 22

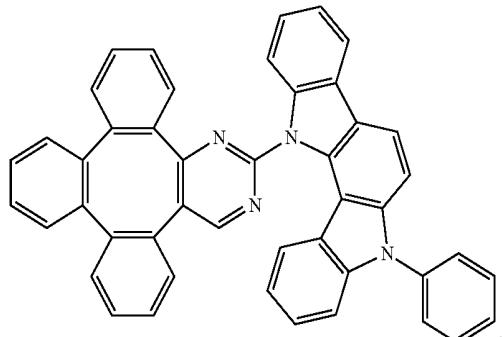


-continued


Compound 26

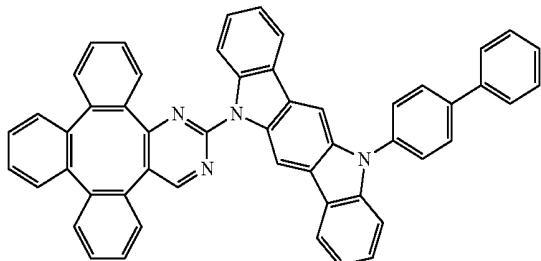


Compound 27

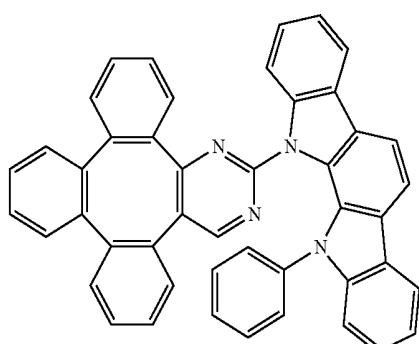


Compound 23

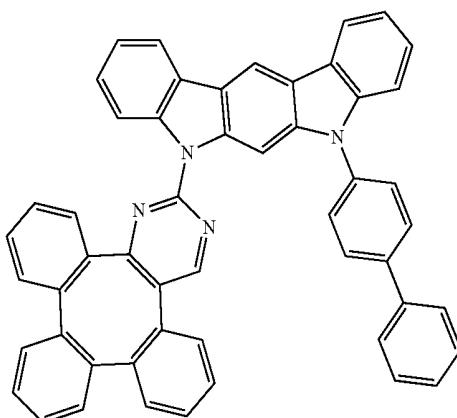


Compound 28

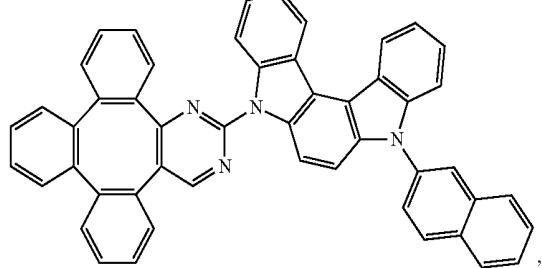


Compound 24

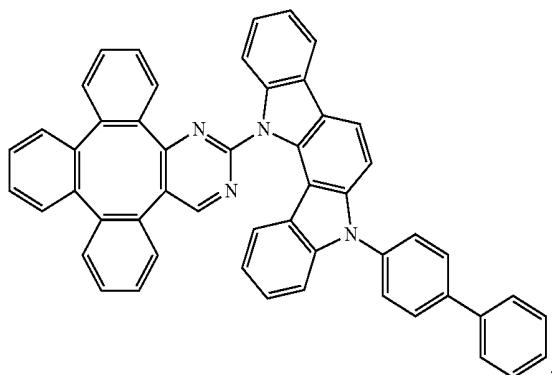

Compound 29

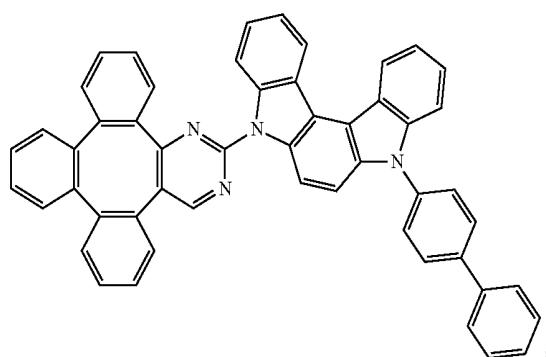


Compound 25

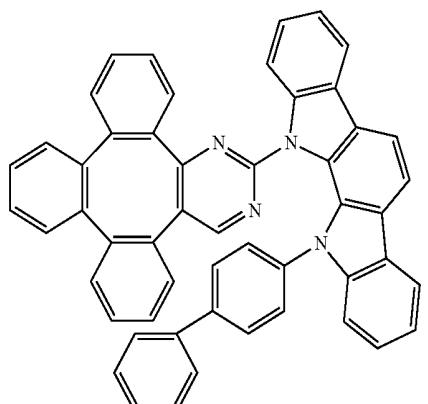


-continued

Compound 30

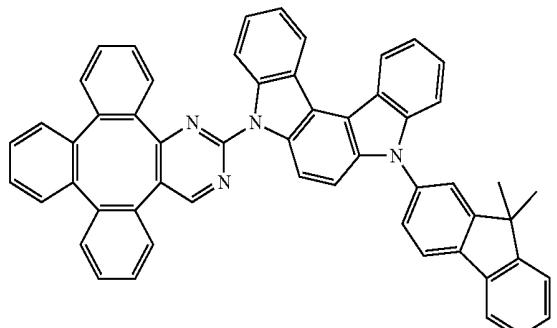



-continued

Compound 34

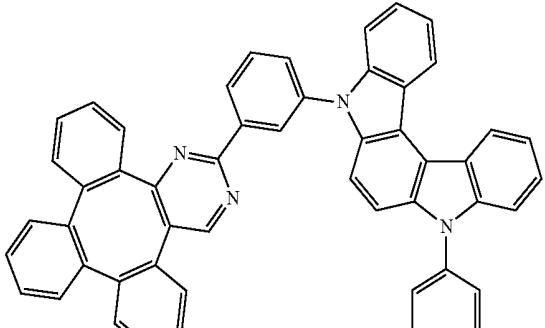



Compound 35

Compound 31

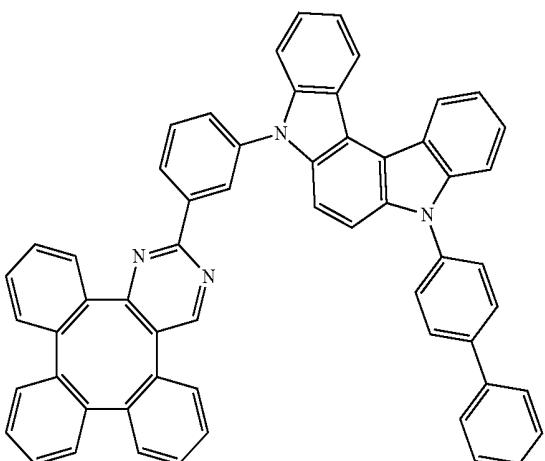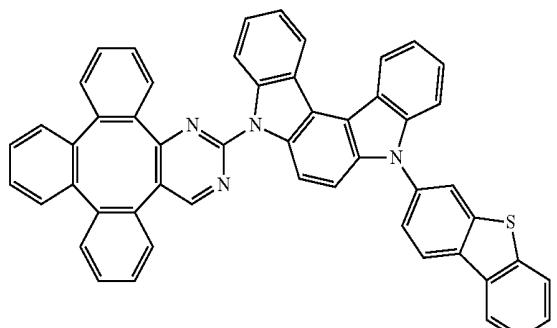



Compound 36

Compound 32

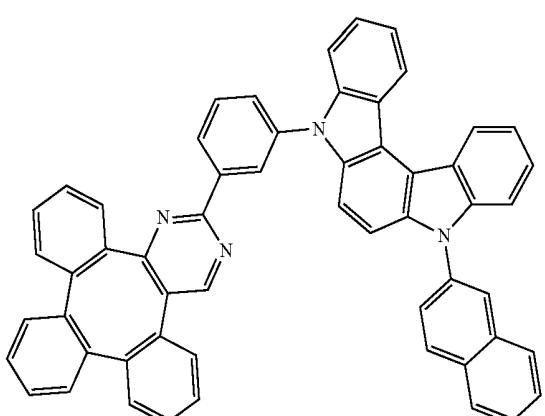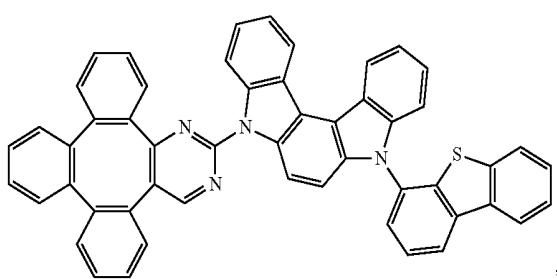


Compound 37

Compound 33

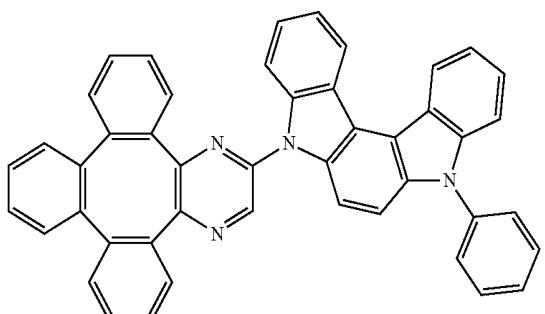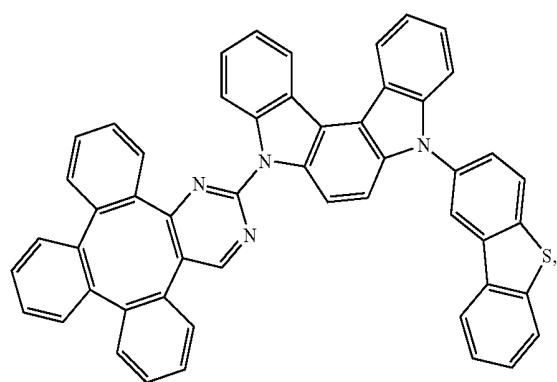


-continued

Compound 38

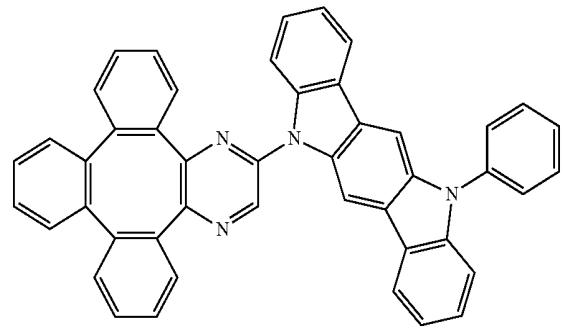


-continued


Compound 42

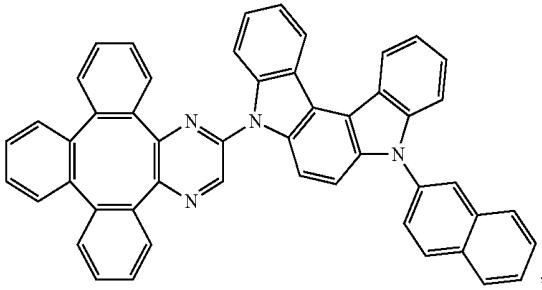


Compound 39

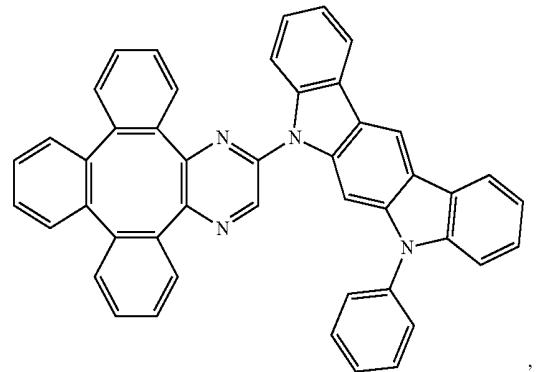


Compound 43

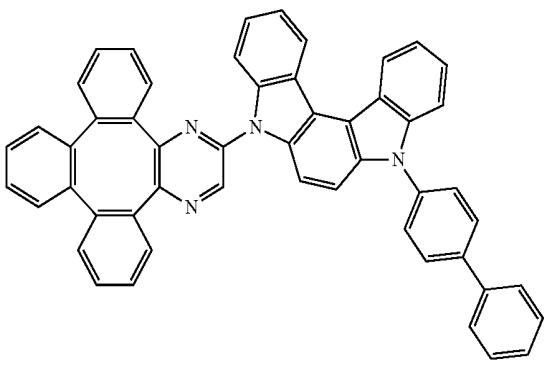


Compound 40

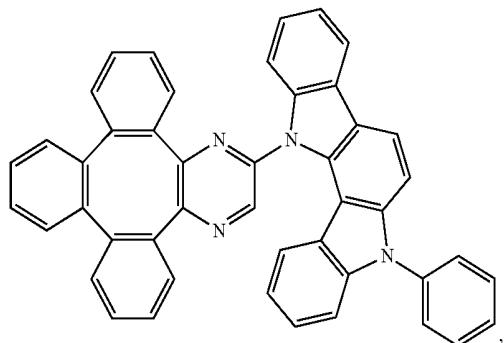


Compound 44

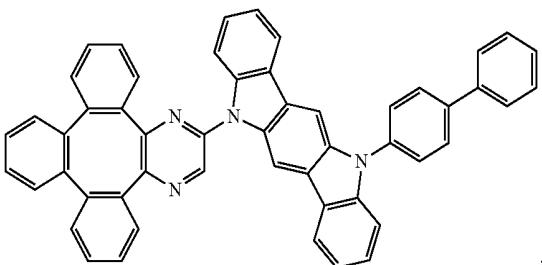

Compound 41

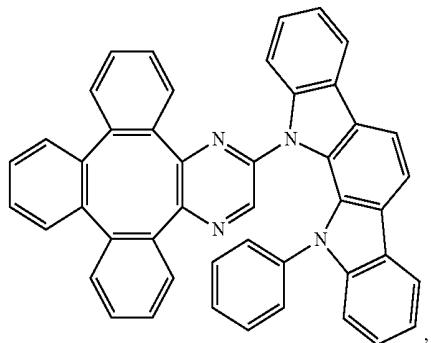


Compound 45

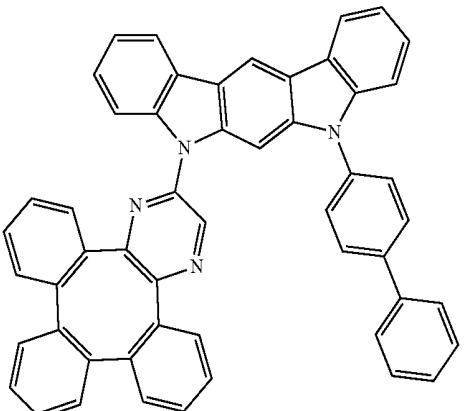


-continued

Compound 46

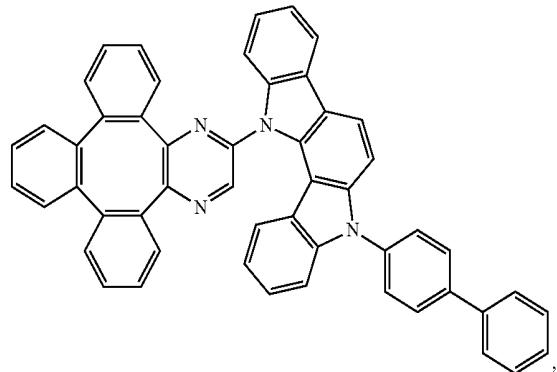



-continued

Compound 50

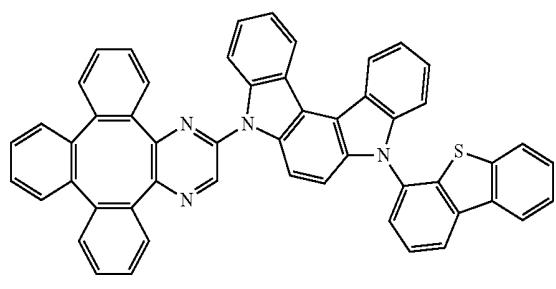



Compound 51

Compound 47

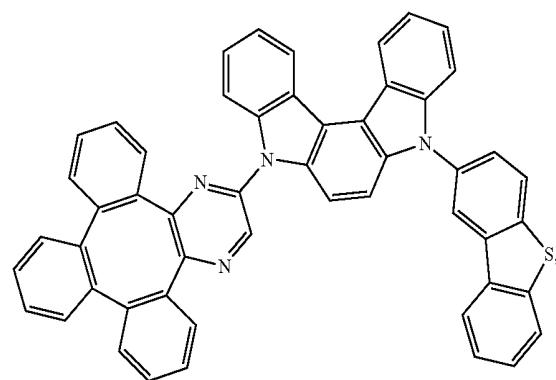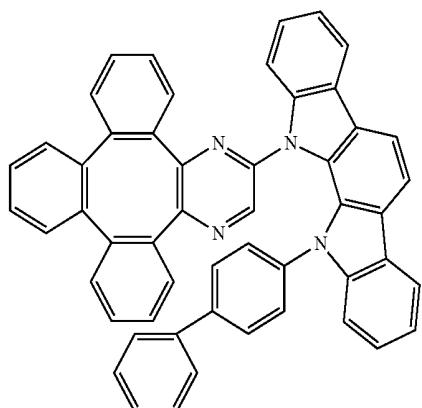



Compound 52

Compound 48

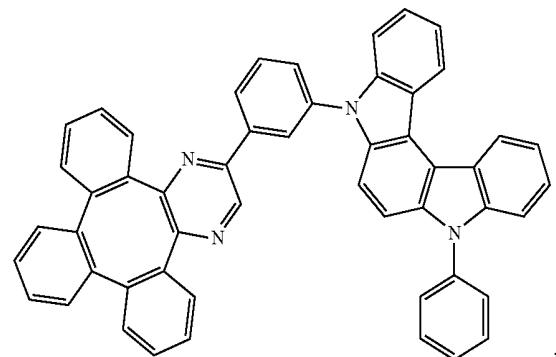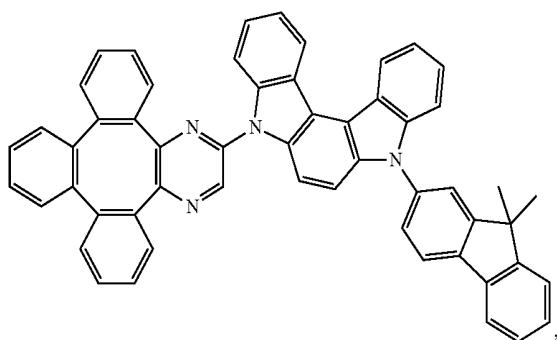


Compound 53

Compound 49

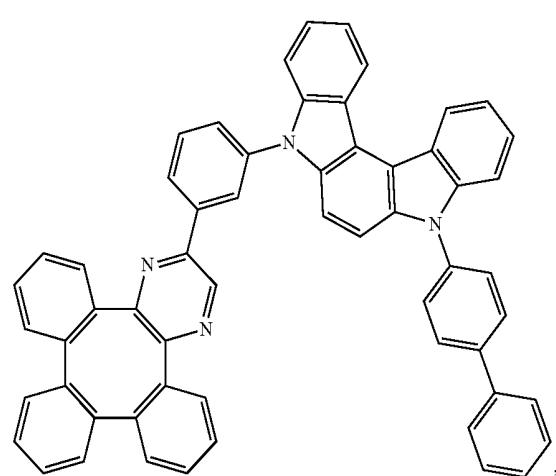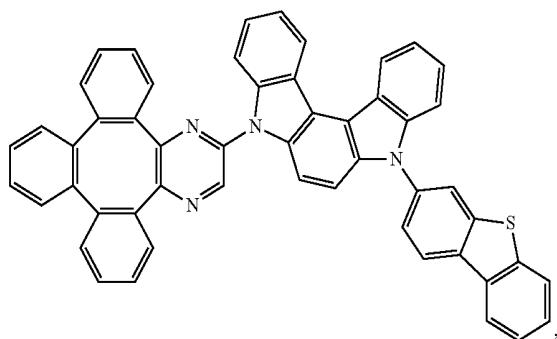


-continued

Compound 54

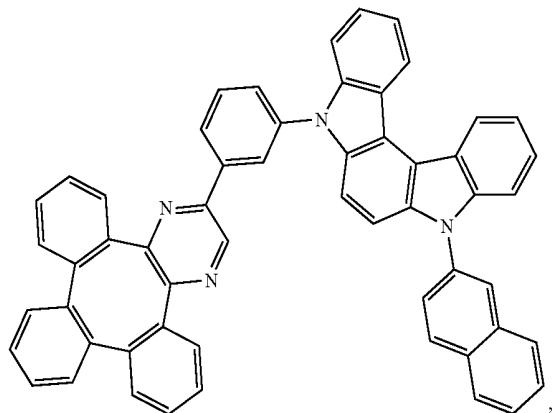


-continued


Compound 58

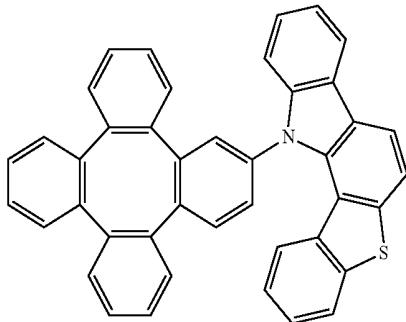


Compound 55

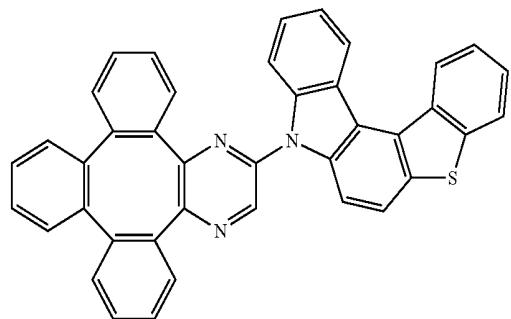


Compound 59

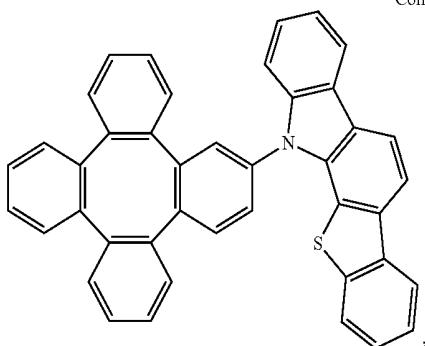


Compound 56

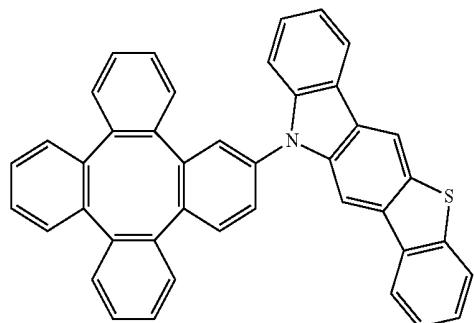


Compound 60

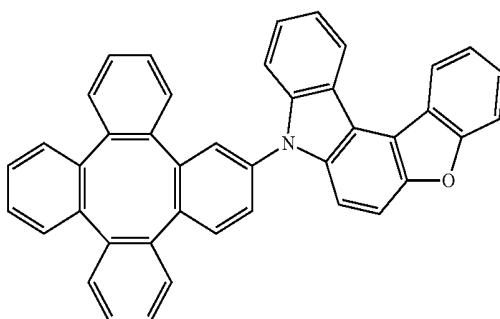

Compound 57


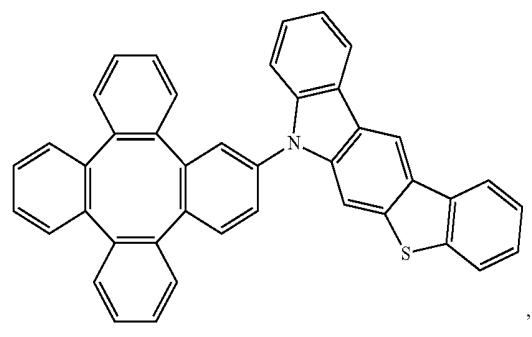


Compound 61


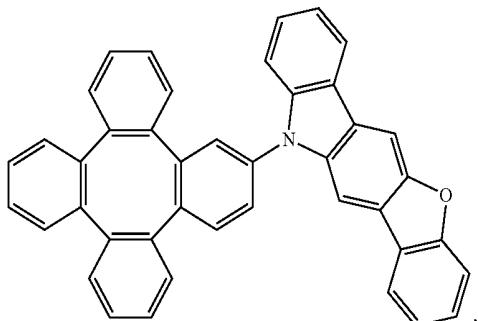


-continued



-continued

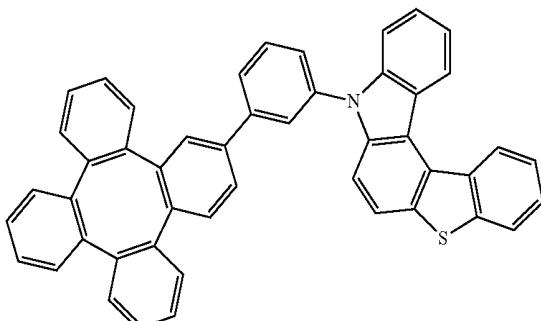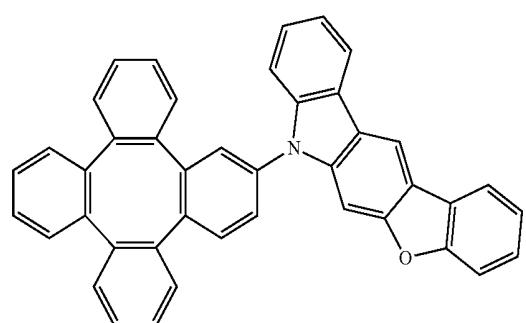



Compound 66

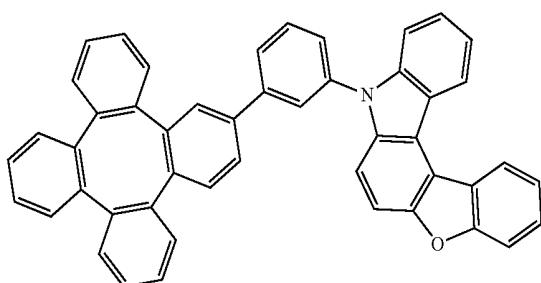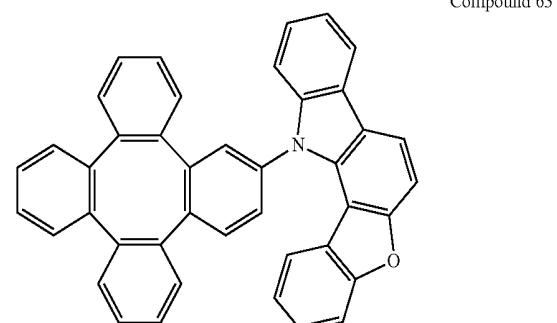



Compound 67

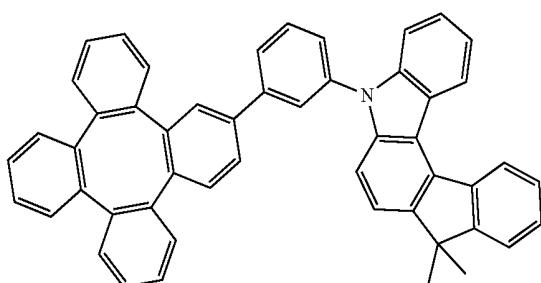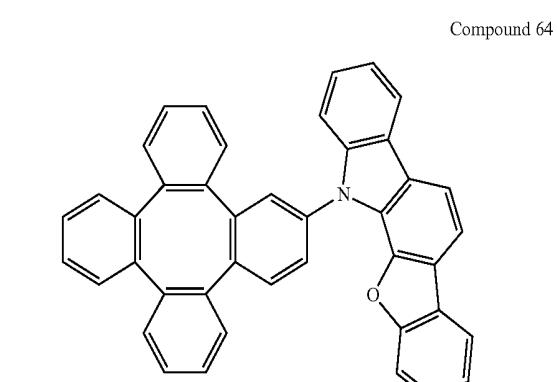

Compound 68

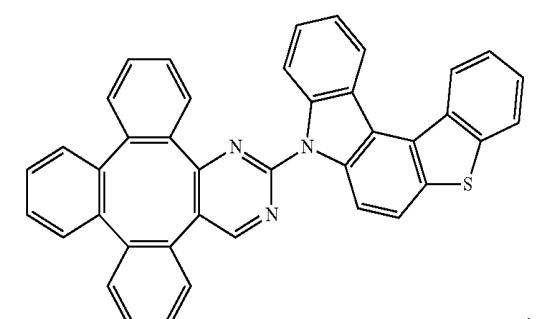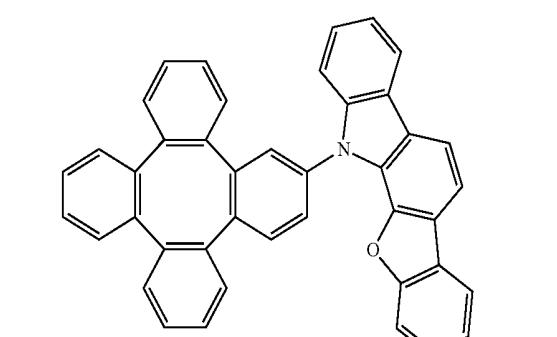

Compound 69

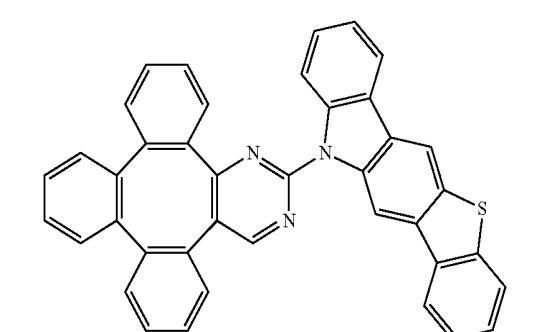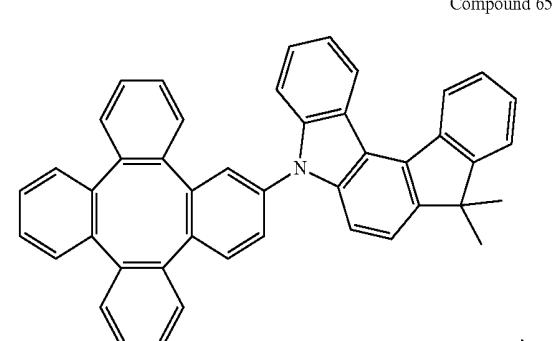


Compound 70


-continued

-continued


Compound 71

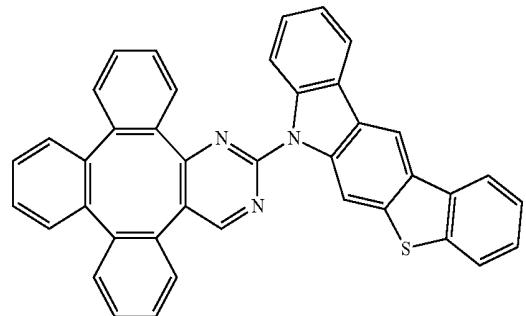


Compound 75

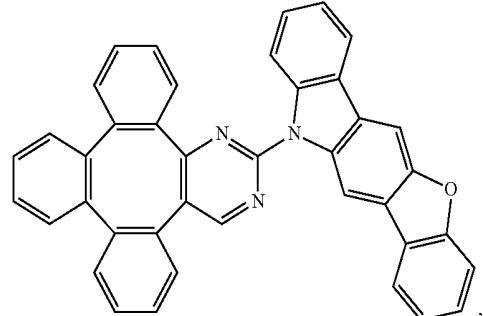


Compound 72

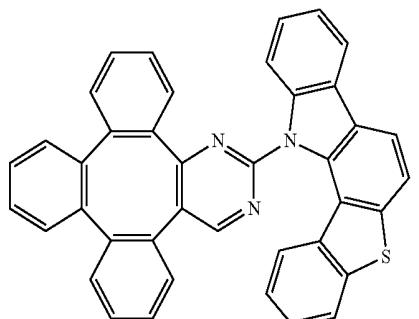


Compound 76

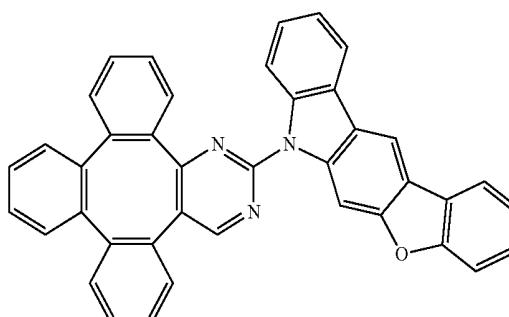


Compound 73

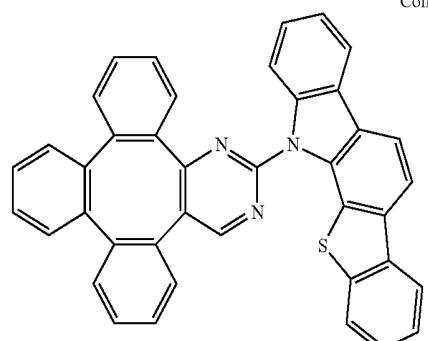


Compound 77

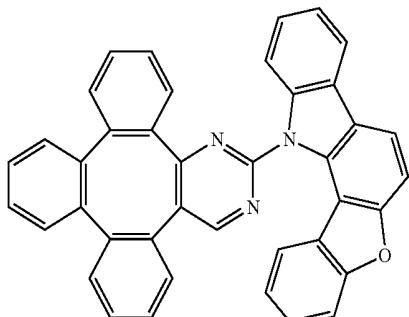

Compound 74

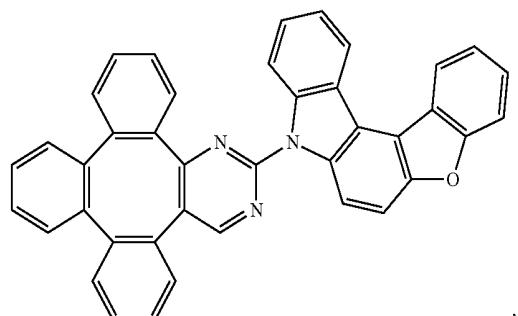


Compound 78

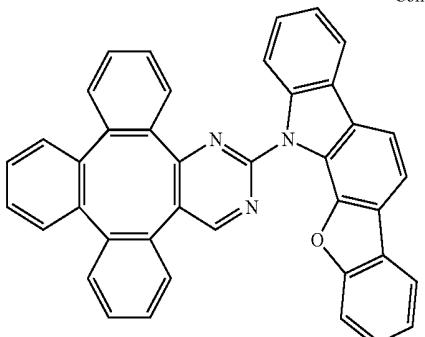


-continued


Compound 79

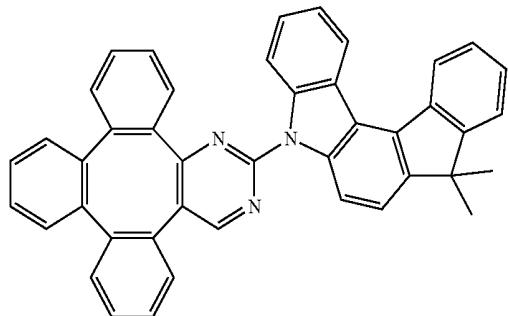


Compound 80

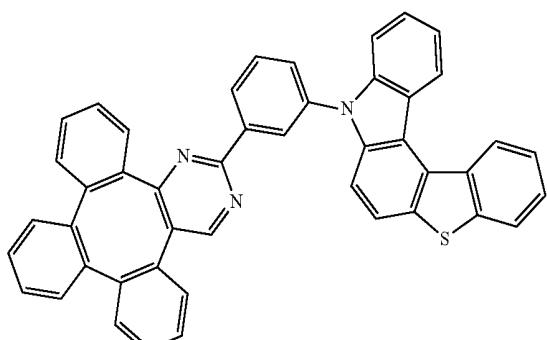


Compound 81

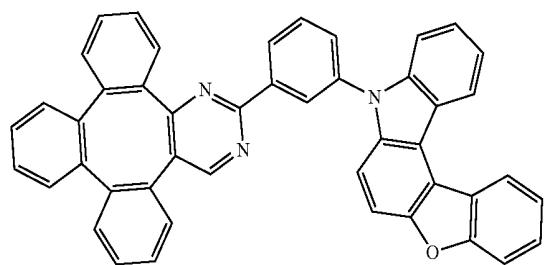

Compound 82

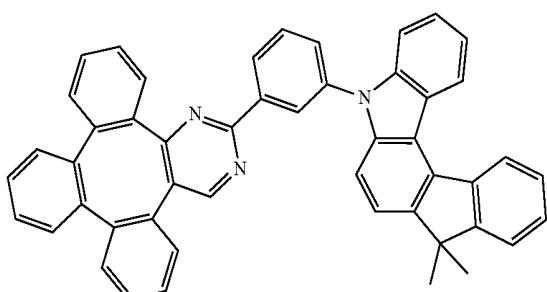


Compound 83

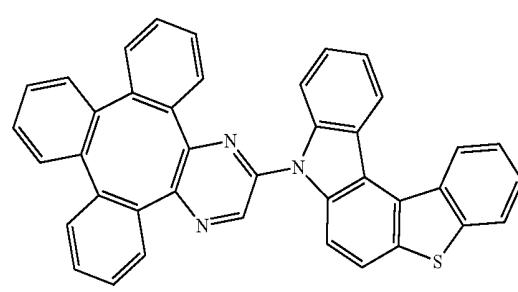


-continued


Compound 84

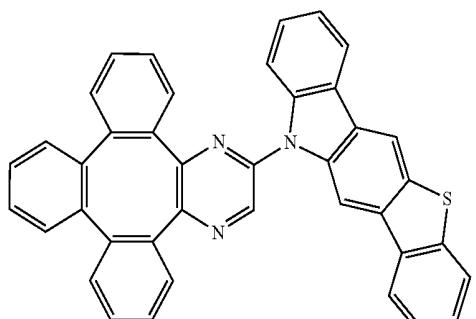


Compound 85

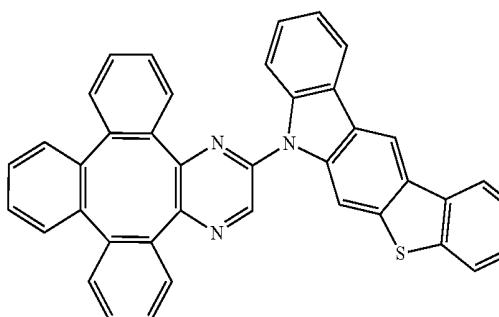

Compound 86


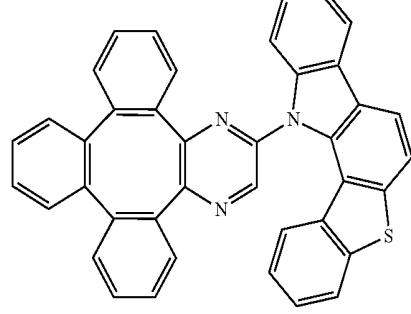


Compound 87


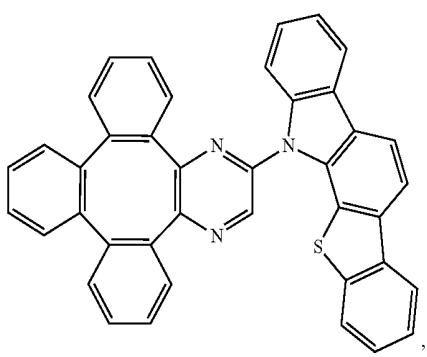


-continued



-continued

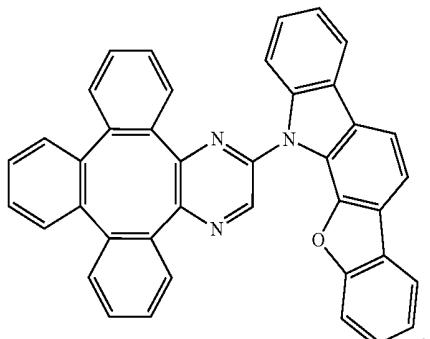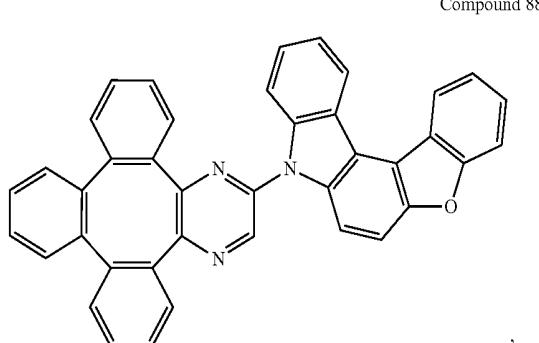



Compound 89

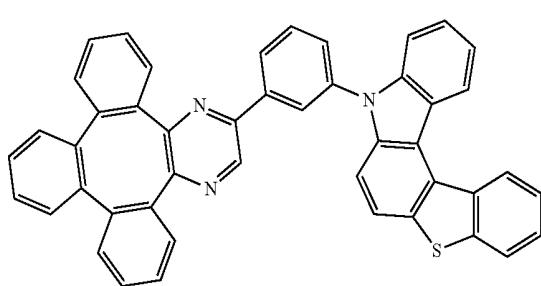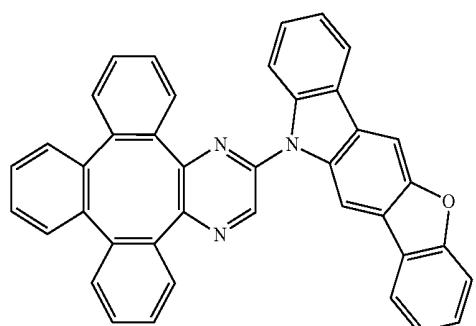

Compound 90

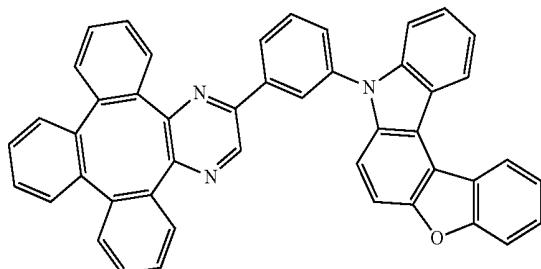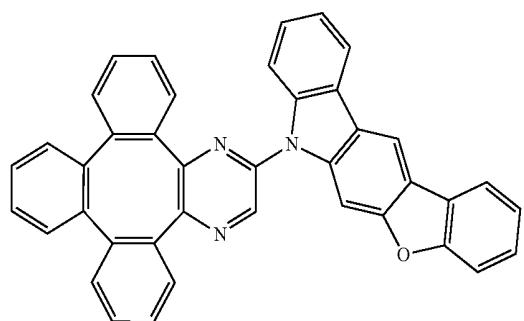


Compound 91

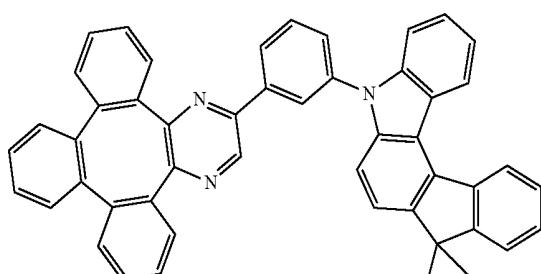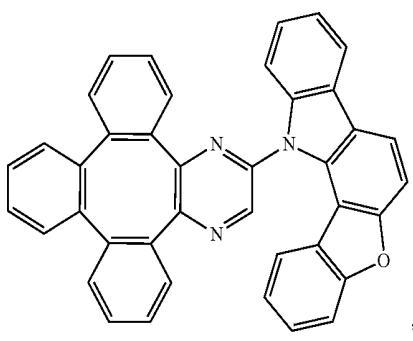

7. An electroluminescent device comprises:
an anode,
a cathode,

and an organic layer, disposed between the anode and the cathode, comprising a compound having formula 1:

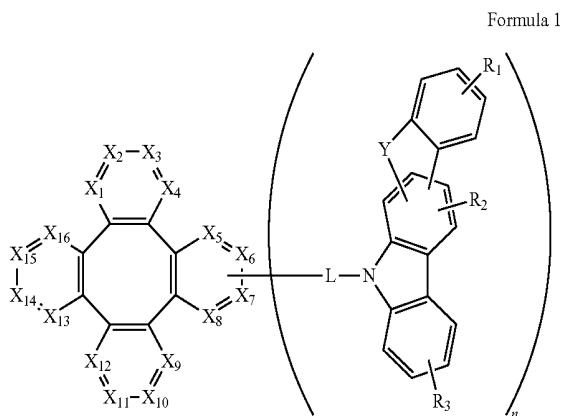

Wherein

X_1 to X_{16} are each independently selected from the group consisting of C, CR, and N;

L is selected from the group consisting of a single bond, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 4 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms;

Y is O, S, Se, NR', or CR"R"';

R_1 and R_3 represents mono, di, tri, or tetra substitution or no substitution;

R_2 represents mono or di substitution or no substitution;

R , R' , R'' , R_1 , R_2 , and R_3 are each independently selected from the group consisting of hydrogen, deuterium, halogen, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted cycloalkyl group having 3 to 20 ring carbon atoms, a substituted or unsubstituted heteroalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted arylalkyl group having 7 to 30 carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryloxy group having 6 to 30 carbon atoms, a substituted or unsubstituted alkenyl group having 2 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 3 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms, a substituted or unsubstituted amino group having 0 to 20 carbon atoms, an acyl group, a carbonyl group, a carboxylic acid group, an ester group, a nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof;

Any adjacent substitution can be optionally joined to form a ring or fused structure;

n is selected from 1, 2, 3, or 4;

when n is 2 or more, L, Y, R_1 , R_2 , and R_3 can be the same or different.


8. The device of claim 7, wherein the organic layer is a charge transporting layer.

9. The device of claim 7, wherein the organic layer is a charge blocking layer.

10. The device of claim 7, wherein the organic layer is an emissive layer and the compound is a host.

11. The device of claim 7, wherein the organic layer further comprises a phosphorescent emitter.

12. The device of claim 7, wherein the organic layer further comprises a phosphorescent emitter and the phosphorescent emitter is a metal complex having at least one ligand comprising the structure selected from the group consisting of:

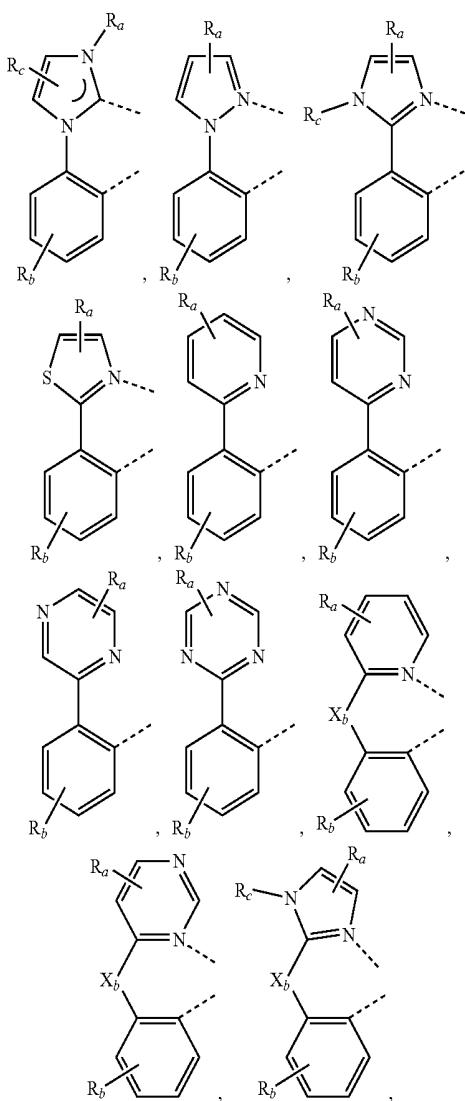

Wherein

R_a , R_b , and R_c can represent mono, di, tri, or tetra substitution or no substitution;

X_b is selected from the group consisting of O, S, Se, NR_{N1} , and $CR_{C1}R_{C2}$;

R_a , R_b , R_c , R_{N1} , R_{C1} , and R_{C2} are each independently selected from the group consisting of hydrogen, deuterium, halogen, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or

unsubstituted cycloalkyl group having 3 to 20 ring carbon atoms, a substituted or unsubstituted heteroalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted arylalkyl group having 7 to 30 carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryloxy group having 6 to 30 carbon atoms, a substituted or unsubstituted alkenyl group having 2 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms, a substituted or unsubstituted heteroaryl group having 3 to 30 carbon atoms, a substituted or unsubstituted alkylsilyl group having 3 to 20 carbon atoms, a substituted or unsubstituted arylsilyl group having 6 to 20 carbon atoms, a substituted or unsubstituted amino group having 0 to 20 carbon atoms, an acyl group, a carbonyl group, a carboxylic acid group, an ester group, a nitrile group, an isonitrile group, a sulfanyl group, a sulfinyl group, a sulfonyl group, a phosphino group, and combinations thereof;

Any adjacent substitution can be optionally joined to form a ring.

13. The device of claim 7, wherein the organic layer is the emissive layer and the compound of formula 1 is the thermally delayed fluorescent dopant.

14. A formulation comprises the compound of claim 1.

* * * * *

专利名称(译)	吲哚并咔唑四亚苯基化合物		
公开(公告)号	US20190123286A1	公开(公告)日	2019-04-25
申请号	US16/137663	申请日	2018-09-21
[标]申请(专利权)人(译)	夏传军		
申请(专利权)人(译)	夏, 川军		
当前申请(专利权)人(译)	夏, 川军		
[标]发明人	XIA CHUANJUN		
发明人	XIA, CHUANJUN		
IPC分类号	H01L51/00 C07D487/04 C09K11/02 C09K11/06		
CPC分类号	H01L51/0072 C07D487/04 C09K11/025 H01L51/0085 C09K11/06 H01L51/5096 H01L51/5016 H01L51/5012 H01L51/5088 H01L51/5056 H01L51/5072 H01L2251/558 H01L51/001 H01L51/56 C09K2211/1018 C09K2211/1033		
优先权	62/574761 2017-10-20 US		
外部链接	Espacenet USPTO		

摘要(译)

公开了吲哚并咔唑四亚苯基化合物。这些新化合物含有四亚芳基或四亚芳基，它们可用作有机电致发光器件中的电荷传输材料，电荷阻挡材料，主体或发光体。这些新型化合物比不含四亚芳基或四亚芳基结构的对比化合物提供更好的器件性能。还公开了电致发光器件和配方。

