




US 20200058625A1

(19) **United States**(12) **Patent Application Publication**
CHEN et al.(10) **Pub. No.: US 2020/0058625 A1**(43) **Pub. Date: Feb. 20, 2020**(54) **TRANSPARENT DISPLAY PANEL****Publication Classification**(71) Applicant: **PLAYNITRIDE INC.**, Zhubei City (TW)(51) **Int. Cl.**
H01L 25/075 (2006.01)
H01L 33/62 (2006.01)
H01L 33/58 (2006.01)(72) Inventors: **Pei-Hsin CHEN**, Zhubei City (TW);
Yi-Chun SHIH, Zhubei City (TW);
Yi-Ching CHEN, Zhubei City (TW);
Ying-Tsang LIU, Zhubei City (TW);
Yu-Chu LI, Zhubei City (TW)(52) **U.S. Cl.**
CPC **H01L 25/0753** (2013.01); **H01L 33/58** (2013.01); **H01L 33/62** (2013.01)(73) Assignee: **PLAYNITRIDE INC.**, Zhubei City (TW)(57) **ABSTRACT**(21) Appl. No.: **16/539,483**(22) Filed: **Aug. 13, 2019**(30) **Foreign Application Priority Data**

Aug. 15, 2018 (TW) 107128460

A transparent display panel with a light-transmitting substrate, a plurality of top-emitting micro light emitting diodes, a plurality of bottom-emitting micro light emitting diodes, and a light shielding layer. The light transmissive substrate has a surface. These top-emitting micro light emitting diodes and these bottom-emitting micro light emitting diodes are disposed on the surface of the light transmissive substrate. The bottom-emitting micro light emitting diodes has an epitaxial structure and a light shielding member, the epitaxial structure has a pair of upper and lower surfaces on the opposite sides, the lower surface faces toward the light transmissive substrate, and the light shielding member is disposed on the upper surface to shield the light emitted by the bottom-emitting micro light emitting diodes towards the upper surface.

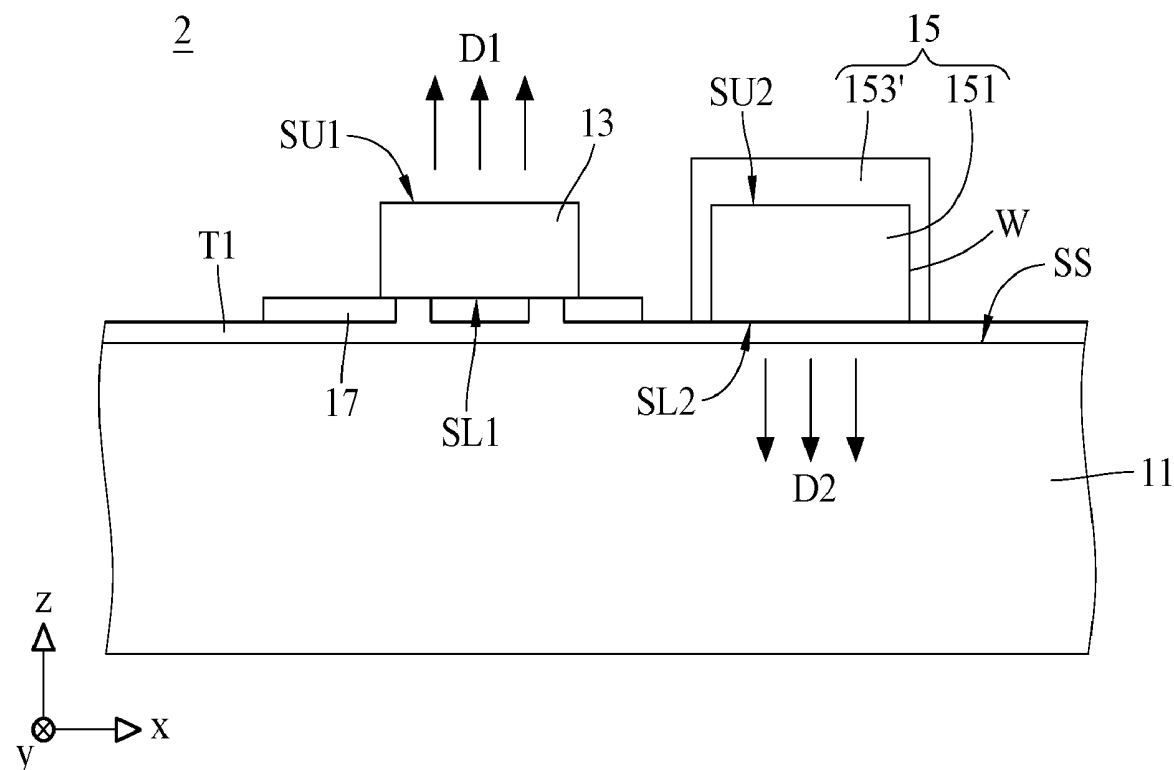

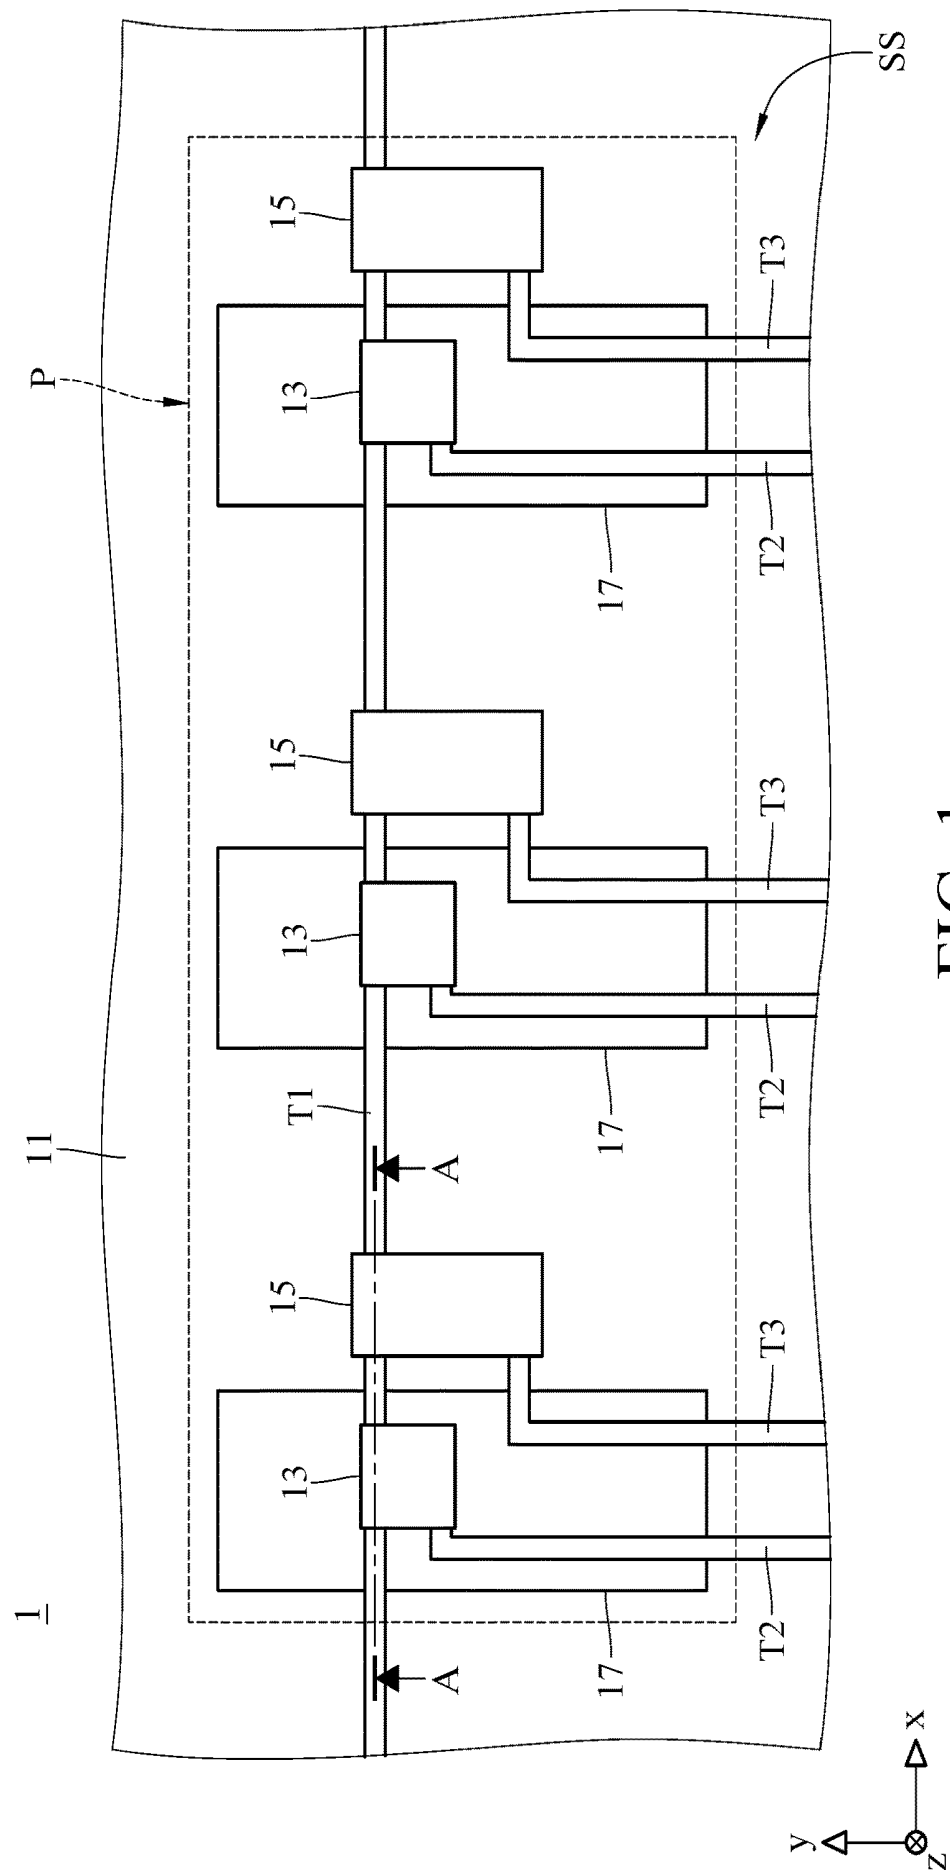


FIG. 1

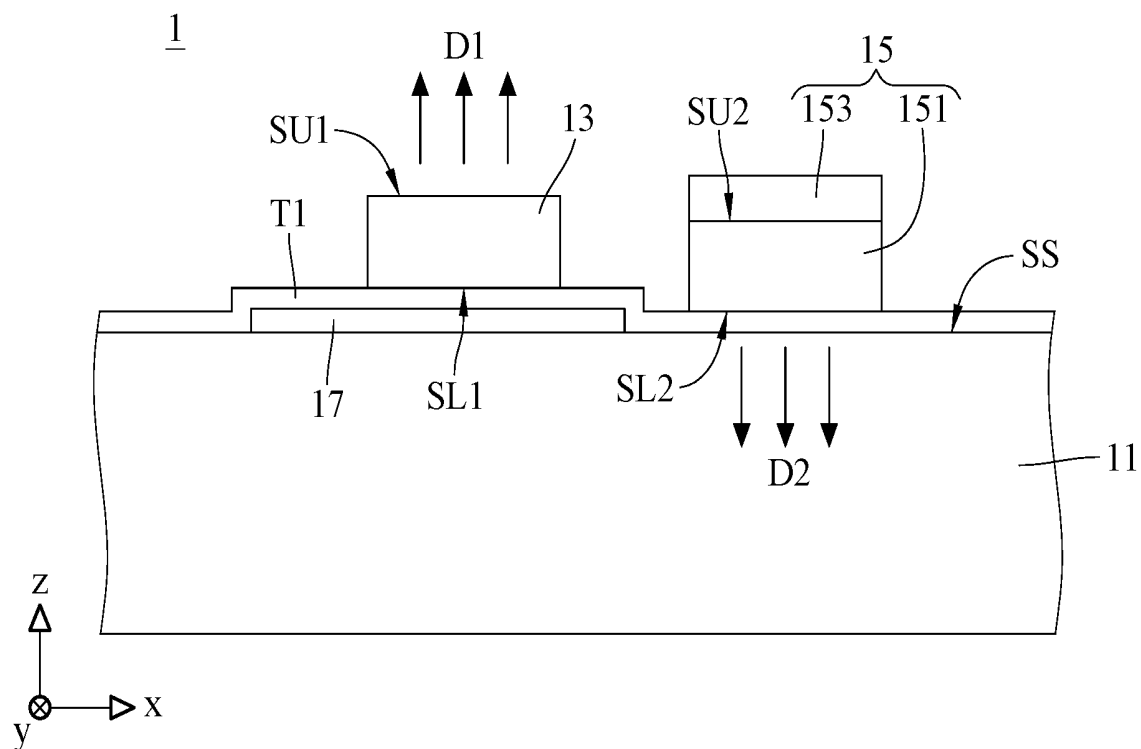


FIG. 2

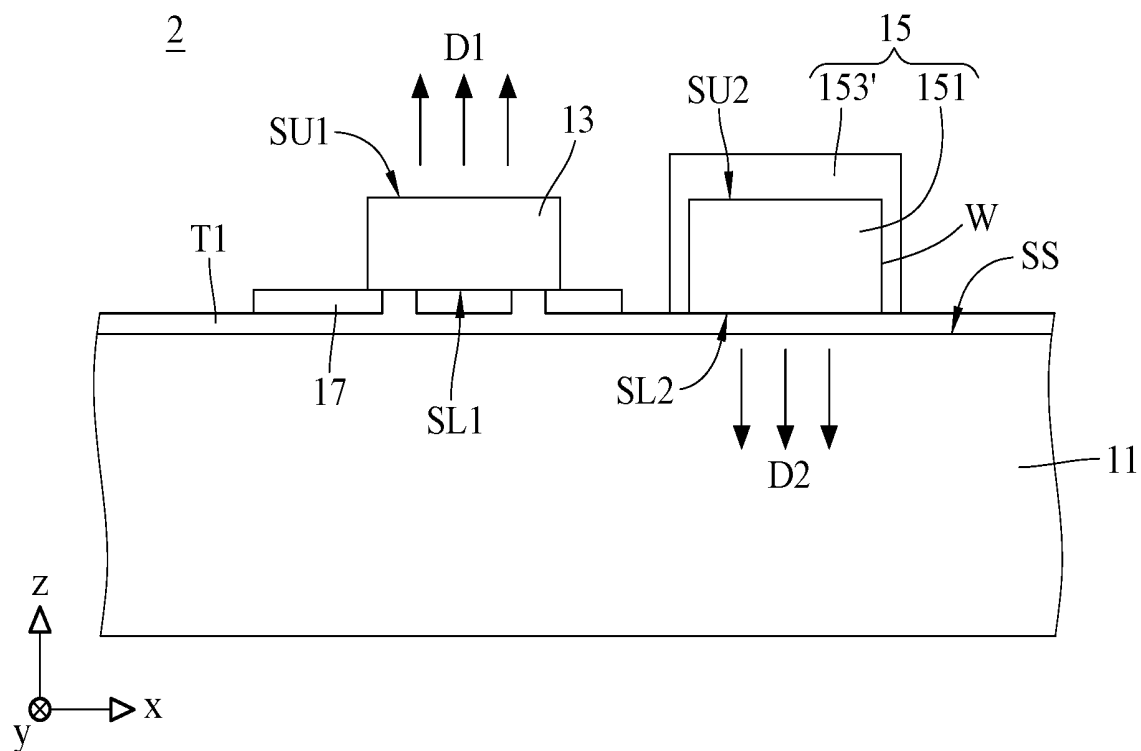
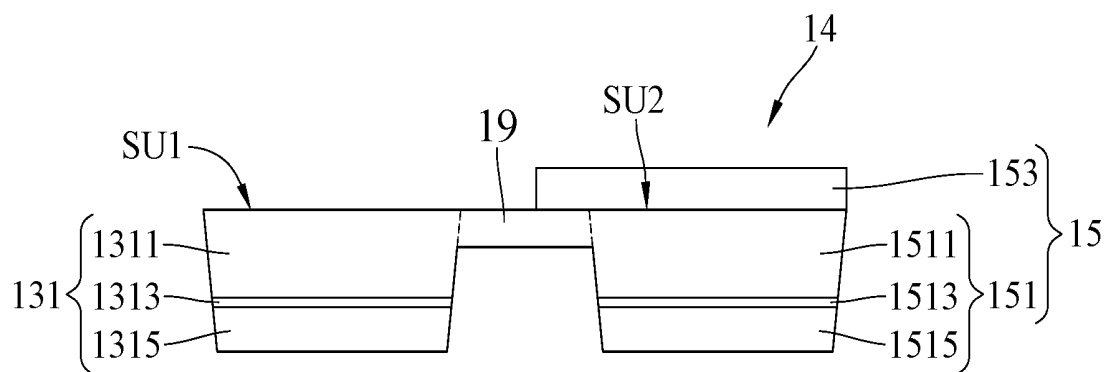
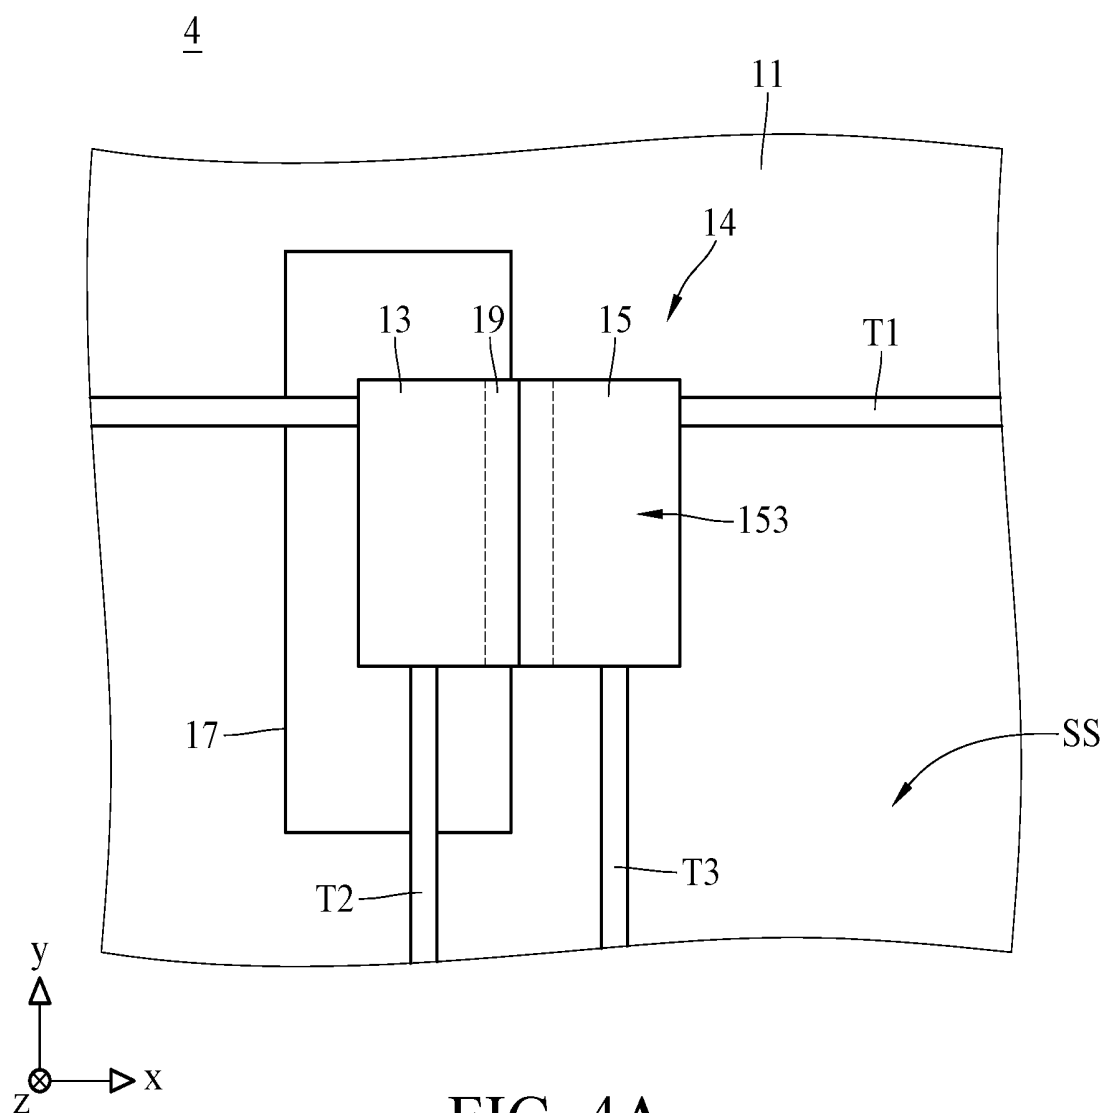


FIG. 3



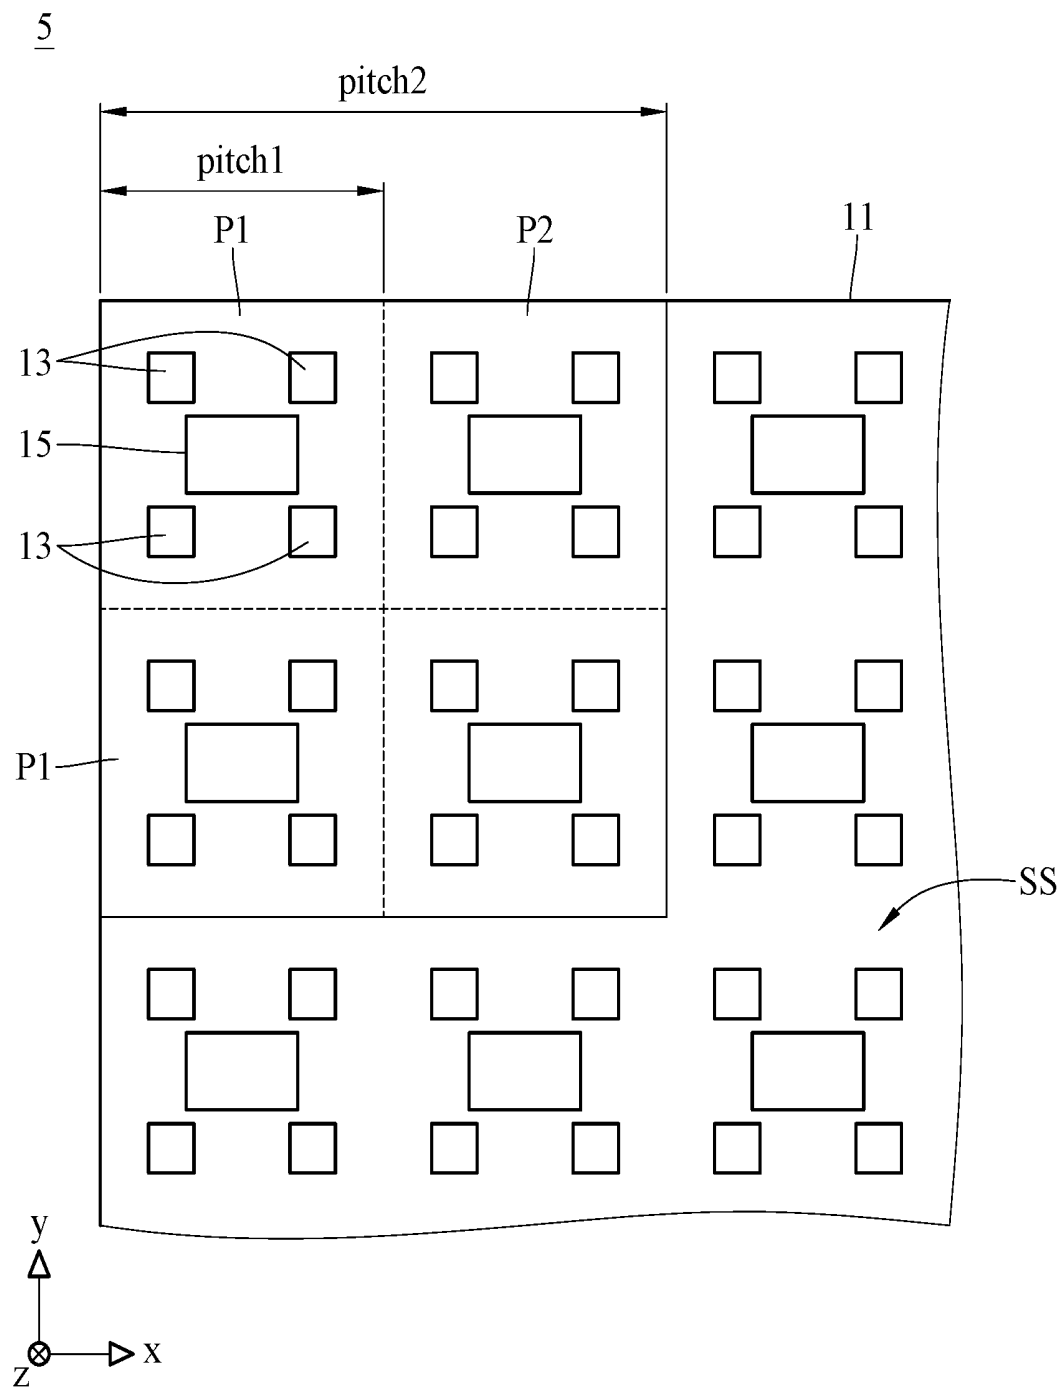


FIG. 5

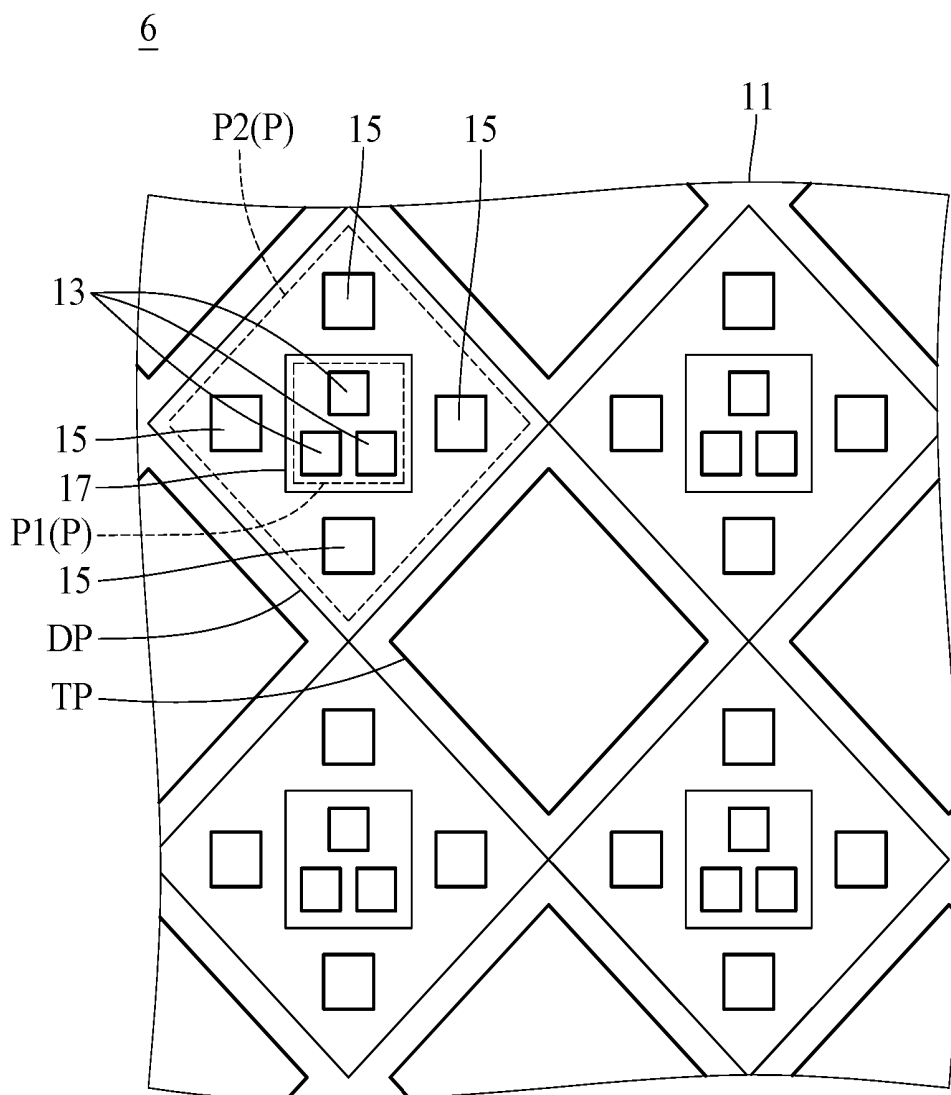


FIG. 6

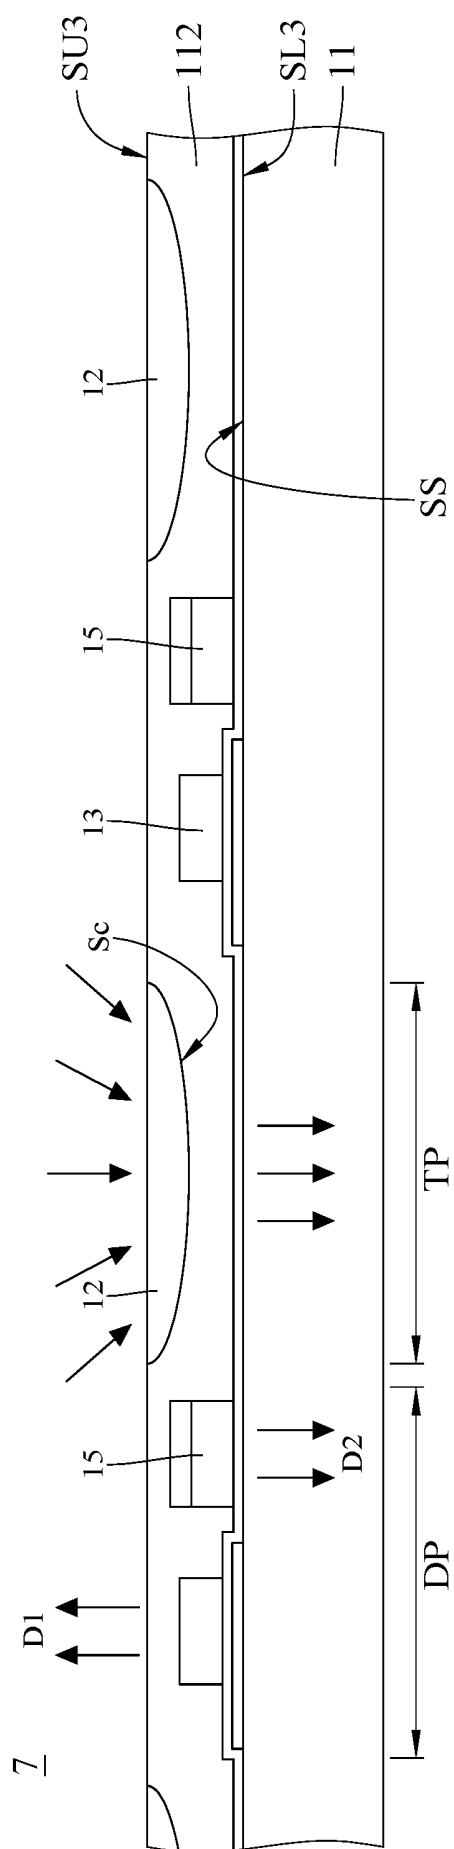


FIG. 7

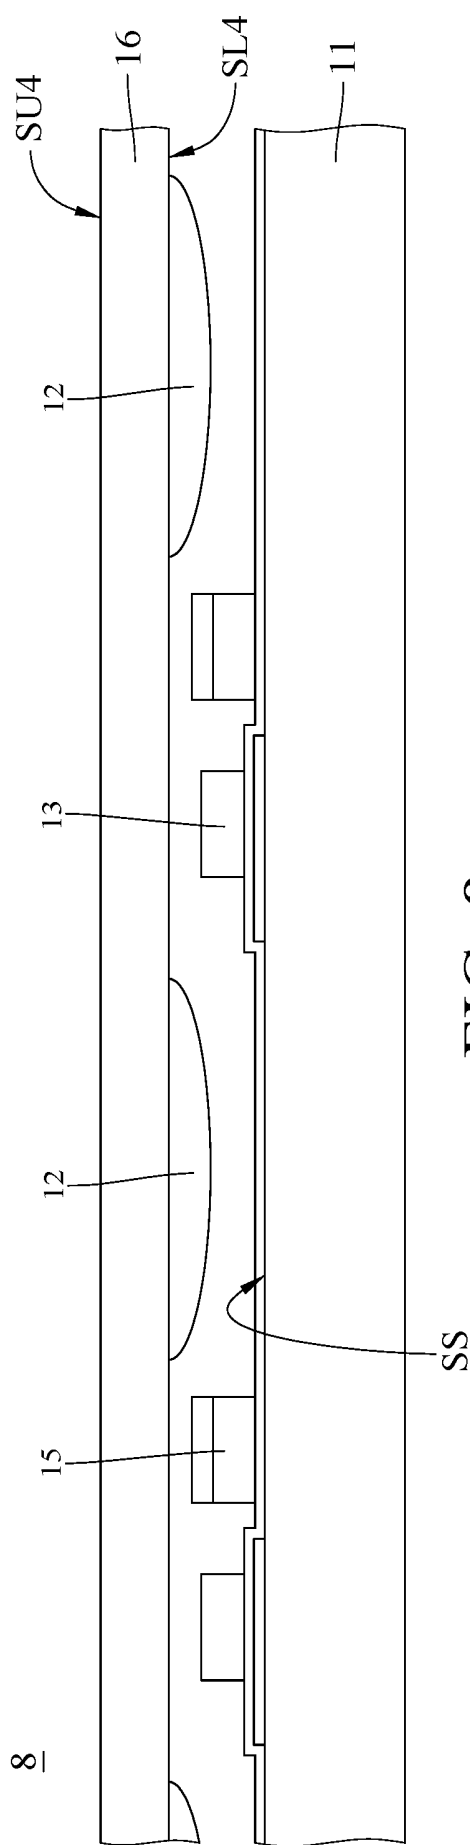


FIG. 8

TRANSPARENT DISPLAY PANEL

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This non-provisional application claims priority under 35 U.S.C. § 119(a) on Patent Application No(s). 107128460 filed in Taiwan, R. O. C. on Aug. 15, 2018, the entire contents of which are hereby incorporated by reference.

BACKGROUND

Technical Field

[0002] The present disclosure is related to transparent display panel, and more particularly to a transparent display panel having a plurality of display surfaces.

Related Art

[0003] A transparent display panel generally refers to a display panel that a user can see an object behind it from a display surface. Furthermore, some applications of display panels need to provide a double-sided display function, that is, a display panel may have multiple display surfaces, and the user can see the multiple images provided by the display panel from the display surfaces respectively. The display panel with multiple images can be used such as window displays, conferences or signage.

[0004] However, as far as the current technology is concerned, the display panel with multiple images is combined two display panels. In the case of a display panel with double-sided display, the thickness and weight of the display module considerably huge, and the transparency may be limited, therefore the utility would be reduced.

SUMMARY

[0005] The present disclosure is to provide a transparent display panel, which reduces the overall thickness of the transparent display panel while providing multi-image display.

[0006] The present disclosure a transparent display panel. The transparent display panel has a light transmissive substrate, a plurality of top-emitting micro light emitting diodes, a plurality of bottom-emitting micro light emitting diodes and a light shielding layer. The light transmissive substrate has a surface. These top-emitting micro light emitting diodes are disposed on the surface of the light transmissive substrate. These bottom-emitting micro light emitting diodes are also disposed on the surface of the light transmissive substrate. Each of the micro light emitting diodes has an epitaxial structure and a light-shielding component, and the epitaxial structure has an upper surface and a lower surface on the opposite side, the lower surface faces toward the light transmissive substrate, and the light-shielding component is disposed on the upper surface to shield the light emitted by the bottom-emitting micro light emitting diodes toward the upper surface. The light shielding layer is disposed on the surface of the light transmissive substrate, and a portion of the light shielding layer is disposed between the top-emitting micro light emitting diode and the light transmissive substrate to shield light emitted from the top-emitting micro light emitting diodes toward the light transmissive substrate.

[0007] The above description of the disclosure and the following description of the embodiments of the present

disclosure are intended to illustrate and explain the spirit and principles of the invention, and can give a further explain of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The present disclosure will become more fully understood from the detailed description given here in below and the accompanying drawings which are given by way of illustration only and thus are not limitative of the present disclosure and wherein:

[0009] FIG. 1 is a partial top view of a transparent display panel according to an embodiment of the disclosure.

[0010] FIG. 2 is a cross-sectional view showing an embodiment of an AA cross section of the transparent display panel illustrated in FIG. 1 according to the present disclosure.

[0011] FIG. 3 is a cross-sectional view showing another embodiment of the transparent display panel illustrated in FIG. 1 according to the present disclosure.

[0012] FIG. 4A is a partial top view of a transparent display panel according to an embodiment of the disclosure.

[0013] FIG. 4B is a cross-sectional view of a micro light emitting diode crystal of the transparent display panel illustrated in FIG. 4A according to the present disclosure.

[0014] FIG. 5 is a partial top view of a transparent display panel according to an embodiment of the disclosure.

[0015] FIG. 6 is a partial top view of a transparent display panel according to another embodiment of the disclosure.

[0016] FIG. 7 is a partial cross-sectional view showing a transparent display panel according to yet another embodiment of the present disclosure.

[0017] FIG. 8 is a partial cross-sectional view showing another embodiment of a transparent display panel according to yet another embodiment of the present disclosure.

DETAILED DESCRIPTION

[0018] In the following detailed description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the disclosed embodiments. It will be apparent, however, that one or more embodiments may be practiced without these specific details. In other instances, well-known structures and devices are schematically shown in order to simplify the drawings.

[0019] Please refer to FIG. 1. FIG. 1 is a partial top view of a transparent display panel according to an embodiment of the present disclosure. As shown in FIG. 1, the transparent display panel 1 has a light transmissive substrate 11, an top-emitting micro light emitting diode 13, a bottom-emitting micro light emitting diode 15, and a light shielding layer 17. The light transmissive substrate 11 has a surface SS. The top-emitting micro light emitting diode 13, the bottom-emitting micro light emitting diode 15, and the light shielding layer 17 are all disposed on the surface SS. A portion of the light shielding layer 17 is located between the top-emitting micro light emitting diode 13 and the surface SS. In more detail, the surface SS is further provided with control wires T1, T2, T3, the top-emitting micro light emitting diode 13 has two electrodes with different type, such as an N-type electrode and a P-type electrode, and the bottom-emitting micro light emitting diode 15 has two electrodes with different type. In this embodiment, the top-emitting micro light emitting diode 13 and the bottom-emitting micro light

emitting diode **15** are electrically connected to the control wires **T1**, **T2**, and **T3** via the electrodes. That is, by controlling the electric signals transmitted by the control wires **T1**, **T2**, and **T3**, light would be emitted by the top-emitting micro light emitting diode **13** and the bottom-emitting micro light emitting diode **15**. In practice, the electrodes of the top-emitting micro light emitting diode **13** and the electrodes of the bottom-emitting micro light emitting diode **15** are electrically connected, for example, via bumps and fixed to the corresponding control wires **T1**, **T2** and **T3**. In brief description, the electrodes of each micro light emitting diode and the bumps are omitted in FIG. 1. The orthographic projection of the light shielding layer **17** on the surface **SS** of the light transmissive substrate **11** covers the orthographic projection of the top-emitting micro light emitting diode **13** on the surface **SS** of the light transmissive substrate **11**, and an area of the orthographic projection of the light shielding layer **17** is preferably larger than an area of the orthographic projection of the top-emitting micro light emitting diode **13**. Moreover, the area of the orthographic projection of the top-emitting micro light emitting diode **13** disposes entirely in the area of the orthographic projection of the light shielding layer **17**. In addition, the orthographic projection of the light shielding layer **17** on the surface **SS** of the light transmissive substrate **11** and the orthographic projection of the bottom-emitting micro light emitting diode **15** are separated from each other and have a distance between them, that is, the orthographic projection of the light shielding layer **17** and the orthographic projections of the bottom-emitting micro light emitting diodes **15** do not overlap each other. Further, the area of the orthographic projection of the bottom-emitting micro light emitting diode **15** on the surface **SS** of the light transmissive substrate **11** is larger than the total area of the orthographic projection of the upper light transmissive substrate **11** on the surface **SS** of the light transmissive substrate **11**.

[0020] Referring to FIG. 1 and FIG. 2, FIG. 2 is a cross-sectional view showing the AA cross section of the transparent display panel **1** shown in FIG. 1 according to the present disclosure. In this embodiment, the top-emitting micro light emitting diodes **13** are electrically connected and fixed to the control wires **T1** and **T2** respectively, and the bottom-emitting micro light emitting diodes **15** are electrically connected and fixed to the control traces **T1** and **T3** respectively. The control wire **T1** is, for example, a common electrode conductive layer for providing a reference voltage to the top-emitting micro light emitting diodes **13** and the bottom-emitting micro light emitting diodes **15**, and the control wires **T2** and **T3** are respectively used to provide corresponding control voltage to control the driving current to the top-emitting micro light emitting diode **13** and the bottom-emitting micro light emitting diode **15**. The transparent display panel **1** further has a plurality of pixels **P**. In the embodiment, each of the pixels **P** is provided with three top-emitting micro light emitting diodes **13** respectively emitting red, blue and green light, and three bottom-emitting micro light emitting diodes **15** respectively emitting red, blue and green light. That is, the top-emitting micro light emitting diodes **13** forms an image in the light-emitting direction **D1**, and the bottom-emitting micro light emitting diodes **15** forms another image in the light-emitting direction **D2**, and the resolution of the image in the light-emitting direction **D1** is equivalent to the resolution of the image in the light-emitting direction **D2**. Furthermore, there is a

image display surface in the light-emitting direction **D1** for the viewer, and the top-emitting micro light emitting diodes **13** are light source for this image display surface, and there is another image display surface in light-emitting direction **D2** for the viewer, and the bottom-emitting micro light emitting diodes **15** are light source for this image display surface. The images on the two image display surfaces can be the same or can also be controlled independently.

[0021] The top-emitting micro light emitting diode **13** has an upper surface **SU1** and lower surface **SL1** opposite the upper surface **SU1**. The lower surface **SL1** faces the surface **SS**, and the light shielding layer **17** is located between the lower surface **SL1** and the surface **SS**. In practice, the light shielding layer **17** may be a non-transparent layer, such as a black photoresist; or the light shielding layer **17** may be a reflective layer, such as a multilayer film (Bragg mirror), an organic coating, a metal, or something alike. The light shielding layer **17** can shield the light emitted from the top-emitting micro light emitting diode **13** in the negative z-axis direction. In the case of the light shielding layer **17** formed by reflective material, the light-shielding layer **17** can reflect the light which emitted from the top-emitting micro light emitting diode **13** towards the negative z-axis direction into toward the positive z-axis direction. Based on the above structure, the main light emitting direction of the top-emitting micro light emitting diodes **13** is the light emitting direction **D1** (ie, the positive z-axis direction described above), and the light shielding layer **17** can reduce the light emitted by the top-emitting micro light emitting diodes **13** to the light emitting direction **D2**, so that it can reduce the interference to the image displayed in the **D2** direction.

[0022] An epitaxial structure **151** of the bottom-emitting micro light emitting diode **15** has an upper surface **SU2** and lower surface **SL2** opposite the upper surface **SU2**. The lower surface **SL2** faces the surface **SS**. The bottom-emitting micro light emitting diode **15** further has a light shielding component **153** disposed on the upper surface **SU2**. Similar to the light shielding layer **17**, the light shielding component **153** may be a nontransparent layer, such as a blackened metal or a resin material; or the light blocking member **153** may be a reflective layer, such as a multilayer film (Bragg mirror), an organic coating, a metal, etc. The light shielding component **153** can shield or reflect the light emitted by the bottom-emitting micro light emitting diode **15** in the positive z-axis direction. Furthermore, the light emitted by the bottom-emitting micro light emitting diode **15** emits to the negative z-axis direction mostly. Therefore, the light shielding component **153** can shield the light emitted by the bottom-emitting micro light emitting diode **15** toward the light-emitting direction **D1**, so that it can reduce the interference to the image displayed in the **D1** direction.

[0023] The top-emitting micro light emitting diodes **13** and the bottom-emitting micro light emitting diodes **15** emit light in the positive z-axis direction (light-emitting direction **D1**) and the negative z-axis direction (light-emitting direction **D2**), respectively. The transparent display panel **1** can provide the same or different images in the positive z-axis direction and the negative z-axis direction at the same time. Therefore, according to the corresponding control manner, the user can see the same or different images from the two sides of the transparent display panel **1**, respectively.

[0024] It should be noted that, in the embodiment shown in FIG. 1, the bottom-emitting micro light emitting diode **15**

is larger than the top-emitting micro light emitting diode **13** such that the light-emitting surface of the bottom-emitting micro light emitting diode **15** is larger than the light-emitting surface of the top-emitting micro light emitting diode **13**. Since the light provided by the bottom-emitting micro light emitting diode **15** needs to pass through the light-shielding region of the light transmissive substrate **11** and the wiring layer, the light intensity thereof is affected. Thus, the area of the light-emitting surface is adjusted by adjusting the size of the bottom-emitting micro light emitting diode **15** to improve the light intensity to display the image in the light-emitting direction **D2**. Although this example is carried out in this way, but in general, the bottom-emitting micro light emitting diode **15** is not necessarily larger than the top-emitting micro light emitting diode **13**.

[0025] Please refer to FIG. 3. FIG. 3 is a cross-sectional view of the transparent display panel **2** according to another embodiment of the present disclosure. With compared to FIG. 2, control wires (including **T1**, **T2**, **T3**, and in this section only shows **T1**) is formed on the surface **SS** of the light transmissive substrate **11** in FIG. 3, and the light shielding layer **17** is formed on the control wires. In other words, the light shielding layer **17** is disposed between the control wire **T1** and the top-emitting micro light emitting diode **13**. Further, the epitaxial structure **151** of the bottom-emitting micro light emitting diode **15** has a side wall **W**. Two ends of the side wall **W** are in contact with the upper surface **SU2** and the lower surface **SL2**, respectively. The light shielding component **153'** of the bottom-emitting micro light emitting diode **15** covers at least a portion of the side wall **W**. Thereby, the light emitted from the bottom-emitting micro light emitting diode **15** in the light-emitting direction **D1** is blocked, and the display quality is improved.

[0026] Please refer to FIG. 4A and FIG. 4B, FIG. 4A is a partial top view of a transparent display panel **4** according to an embodiment of this disclosure, and FIG. 4B is a schematic view of the micro light emitting diode chip **14** of FIG. 4A according to the present disclosure. In this embodiment, one of the top-emitting micro light emitting diode **13** connects to one of the bottom-emitting micro light emitting diode **15** to form the micro light emitting diode chip **14**. As shown in FIG. 4B, the epitaxial structure **151** of the bottom-emitting micro light emitting diode **15** has a I-type semiconductor layer **1511**, a light-emitting layer **1513** and a II-type semiconductor layer **1515**, and the light-emitting layer **1513** is located between the I-type semiconductor layer **1511** and the II-type semiconductor layer **1515**. The epitaxial structure **131** of the top-emitting micro light emitting diode **13** has a I-type semiconductor layer **1311**, a light-emitting layer **1313** and a II-type semiconductor layer **1315**, and the light-emitting layer **1313** is located between the I-type semiconductor layer **1311** and the II-type semiconductor layer **1315**. The I-type semiconductor layer **1511** of the bottom-emitting micro light emitting diode **15** is connected to the I-type semiconductor layer **1311** of the top-emitting micro light emitting diode **13** with a connection portion **19**.

[0027] In practice, the material of the I-type semiconductor layer **1311** and **1511** is the same. In one embodiment, an epitaxial layer concludes the I-type semiconductor layer **1311**, the connection portion **19** and the I-type semiconductor layer **1511**. The light shielding component **153** is formed on I-type semiconductor layer **1511** and covers the light-

emitting layer **1513**, but does not cover the I-type semiconductor layer **1311** and the light-emitting layer **1313**.

[0028] The I-type semiconductor layer **1311**, the connection portion **19** and the I-type semiconductor layer **1511** are a N-type semiconductor, and the II-type semiconductor layer **1315** and **1515** are P-type semiconductor. In the transparent display panel **4** of the present embodiment, the top-emitting micro light emitting diode **13** and the bottom-emitting micro light emitting diode **15** are combined to form one micro light emitting diode chip **14**, so that the number of the micro light emitting diode chips being transferred can be reduced by half, and the transfer process can be reduced, thereby improving the process yield.

[0029] Please refer to FIG. 5. FIG. 5 is a partial top view of a transparent display panel **5** according to an embodiment of this disclosure. The transparent display panel **5** has a plurality of first pixels **P1** and a plurality of second pixels **P2**. The top-emitting micro light emitting diode **13** is disposed on the first pixel **P1**, and the bottom-emitting micro light emitting diode **15** is disposed on the second pixel **P2**. Each of the first pixels **P1** includes a plurality of top-emitting micro light emitting diodes **13** respectively used to provide light of different colors. Similarly, each second pixel **P2** includes a plurality of bottom-emitting micro light emitting diodes **15** as described above and respectively used to provide light of different colors. In other words, the first pixels constitute an image displayed in the positive z-axis direction, and the second pixels constitute another image displayed in the negative z-axis direction, and the pitch of the first pixels **P1** is different from the pitch of the second pixels **P2**. The resolution of the image displayed in the positive z-axis direction is different from the resolution of the image displayed in the negative z-axis direction.

[0030] In this embodiment, one of the first pixels **P1** has four top-emitting micro light emitting diodes **13** with an arrangement of RGBY or RGBW; one of the second pixels **P2** has four bottom-emitting micro light emitting diodes **15** with an arrangement of RGBY or RGBW. In addition, a second pixel **P2** corresponds to four first pixels **P1**, that is, the resolution of the image displayed by the bottom-emitting micro light emitting diodes **15** is only a quarter of the resolution of the image displayed by the top-emitting micro light emitting diodes **13**. In other words, the number of bottom-emitting micro light emitting diodes **15** is less than the number of top-emitting micro light emitting diodes **13**. By reducing the number of the second pixels in one of the display directions, the transparency can be increased, and process cost can down. On the other hand, the micro light emitting diodes in each pixel are arranged in RGBY or RGBW, the light provided by each pixel may have greater brightness or better color rendering. In practice, the first pixels **P1** or the second pixels **P2** may also adopt an RGB configuration, which is not limited herein. A first image is shown by the first pixels **P1** on one side of the light transmissive substrate **11**, and a second image is shown by the second pixels **P2** on another side of the light transmissive substrate **11**.

[0031] Referring to FIG. 6 again, FIG. 6 is a partial top view of the transparent display panel **6** according to another embodiment of this disclosure. In this embodiment, the transparent display panel **6** is similar to the transparent display panel **1**, and the differences are as follows. The transparent display panel **6** further includes a plurality of light transmitting areas **TP** and a plurality of component

setting areas DP. The top-emitting micro light emitting diodes **13**, the bottom-emitting micro light emitting diodes **15** and most of the control wires (not shown) are disposed in the component setting areas DP, and the light transmissive areas TP allows the light to pass through the light transmissive substrate **11**. The transparent display panel **6** includes a plurality of pixels P disposed in component setting areas DP respectively. Each pixel P includes a first pixel P1 composed of three top-emitting micro light emitting diodes **13** and a second pixel P2 composed of four bottom-emitting micro light emitting diodes **15**. The light shielding layer **17** is disposed between the top-emitting micro light emitting diodes **13** and the light transmissive substrate **11** in every first pixel P1 to shield the light emitted from the top-emitting micro light emitting diodes **13** in the direction towards the light transmissive substrate **11**. The second pixel P2 may adopt an arrangement of RGBW or RGBY, so that the light provided by the second pixel P2 can improve brightness or color recognition after passing through the light transmissive substrate **11**. In other embodiment, the micro light emitting diodes **13** in each first pixel P1 can be arranged in RGB, RGBW, RGBY or other feasible pixel arrangement, and is not necessarily the same as the arrangement of the second pixel, and is not limited therein. In one embodiment, one of the first pixels P1 overlaps one of the second pixels P2.

[0032] Referring to FIG. 7, FIG. 7 is a partial cross-sectional view of a transparent display panel **7** according to a further embodiment of the present disclosure. The transparent display panel **7** is similar to the transparent display panel **6** shown in FIG. 6. The main differences are as follows: The transparent display panel **7** further has a plurality of lens components **12** and a transparent insulation layer **112**. The transparent insulation layer **112** is disposed on the surface SS of the light transmissive substrate **11**, and the lens components **12** are disposed on the transparent insulation layer **112** and on the transparent regions TP. A light-concentrating surface Sc of the lens component **12** faces toward the surface SS of the light transmissive substrate **11**. By the arrangement of the lens components **12**, more light can be collected to pass through the light transmissive substrate **11** to increase the transparency of the transparent display panel **7**.

[0033] Please refer to FIG. 8. FIG. 8 is a partial cross-sectional view showing a transparent display panel **8** according to a further embodiment of the present disclosure. The structure of the transparent display panel **8** is similar to that of the transparent display panel **7**. The difference is that the transparent display panel **8** has a cover substrate **16** disposed on the transmissive substrate **11**. The cover substrate **16** has an upper surface SU4 and a lower surface SL4 opposite to the upper surface SU4, and the lower surface SL4 faces toward the light transmissive substrate **11**. The lens components **12** are disposed on the lower surface SL4 of the cover substrate **16**, and the light-concentrating surfaces Sc of the lens components **12** face the surface SS of the light transmissive substrate **11**. The cover substrate **16** is also made of a light-transmitting material, and can be selected from the same material as the light transmissive substrate **11**.

[0034] In other embodiments, the lens component **12** can be a concave lens structure, a convex lens structure, or even a combination of different lenses, wherein the light is concentrated to increase transparency.

[0035] In summary, the present disclosure provides a transparent display panel having top-emitting micro light emitting diodes and a bottom-emitting micro light emitting diodes.

[0036] A portion of a light shielding layer is disposed between the top-emitting micro light emitting diode and a light transmissive substrate. The bottom-emitting micro light emitting diode has a light shielding component and a surface far away from the light transmissive substrate, and the light shielding component disposes on the surface. Thereby, the transparent display panel can provide a light source in different directions by the top-emitting micro light emitting diodes and the bottom-emitting micro light emitting diodes. Since the top-emitting micro light emitting diode and the bottom-emitting micro light emitting diode are disposed on the same panel, the thickness of the transparent display panel can reduce.

What is claimed is:

1. A transparent display panel comprising:

a light transmissive substrate, with a surface;

a plurality of top-emitting micro light emitting diodes for emitting rays upwards, disposed on the surface of the light transmissive substrate;

a plurality of bottom-emitting micro light emitting diodes for emitting rays downwards, disposed on the surface of the light transmissive substrate, wherein each of the bottom-emitting micro light emitting diodes has an epitaxial structure and a light shielding component, the epitaxial structure has an upper surface and a lower surface, the lower surface faces the light transmissive substrate, and the light shielding component is disposed on the upper surface to shield the light emitted from the bottom-emitting micro light emitting diode towards the upper surface; and

a light shielding layer, disposed on the surface of the light transmissive substrate, wherein a portion of the light shielding layer is disposed between the top-emitting micro light emitting diode and the light transmissive substrate to shield the light emitted from the top-emitting micro light emitting diode towards the direction of the light transmissive substrate.

2. The transparent display panel of claim 1, wherein an orthographic projection of the light shielding layer on the surface of the light transmissive substrate covers each of the orthographic projections of the top-emitting micro light emitting diodes on the surface of the light transmissive substrate.

3. The transparent display panel of claim 2, wherein an area of the orthographic projection of the light shielding layer on the surface of the light transmissive substrate is greater than a total area of the orthographic projections of the top-emitting micro light emitting diodes on the surface of the light transmissive substrate.

4. The transparent display panel of claim 1, wherein an orthographic projection of the light shielding layer on the surface of the light transmissive substrate does not overlap an orthographic projection of any bottom-emitting micro light emitting diode.

5. The transparent display panel of claim 1, wherein an area of an orthographic projection of bottom-emitting micro light emitting diode on the surface of the light transmissive substrate is greater than a total area of an orthographic projection of the top-emitting micro light emitting diode on the surface of the light transmissive substrate.

6. The transparent display panel of claim 1, wherein:
the epitaxial structure of each of the bottom-emitting micro light emitting diodes further comprises a I-type semiconductor layer, a light-emitting layer and a II-type semiconductor layer, wherein the light-emitting layer is disposed between the I-type semiconductor layer and the II-type semiconductor layer;
the epitaxial structure of each of the top-emitting micro light emitting diodes further comprises a I-type semiconductor layer, a light-emitting layer and a II-type semiconductor layer, wherein the light-emitting layer is disposed between the I-type semiconductor layer and the II-type semiconductor layer; and
the I-type semiconductor layer of one of the top-emitting micro light emitting diodes is connected to the I-type semiconductor layer of one of the bottom-emitting micro light emitting diodes.
7. The transparent display panel of claim 1, further comprising a common electrode wire layer disposed on the surface of the light transmissive substrate, wherein:
the epitaxial structure of each of the bottom-emitting micro light emitting diodes further comprises a I-type semiconductor layer, a light-emitting layer and a II-type semiconductor layer, wherein the light-emitting layer is disposed between the I-type semiconductor layer and the II-type semiconductor layer;
the epitaxial structure of each of the top-emitting micro light emitting diodes further comprises a I-type semiconductor layer, a light-emitting layer and a II-type semiconductor layer, wherein the light-emitting layer is disposed between the I-type semiconductor layer and the II-type semiconductor layer; and
the I-type semiconductor layer of the upper micro light emitting diodes and the I-type semiconductor layer of the bottom-emitting micro light emitting diodes are electrically connected to the common electrode wiring layer.
8. The transparent display panel of claim 7, wherein, the I-type semiconductor layers of the top-emitting micro light emitting diodes are adjacent to the surface of the light transmissive substrate and the common electrode wiring layer, and the I-type semiconductor layers of the bottom-emitting micro light emitting diodes are adjacent to the surface of the light transmissive substrate and the common electrode wiring layer.
9. The transparent display panel of claim 7, wherein, the I-type semiconductor layers of the top-emitting micro light emitting diodes are adjacent to the surface of the light transmissive substrate, and the II-type semiconductor layers of the bottom-emitting micro light emitting diodes are adjacent to the surface of the light transmissive substrate
10. The transparent display panel of claim 1, further comprising:
a plurality of first pixels, arranged in an array, with each of the first pixels comprising at least two of the top-emitting micro light emitting diodes, wherein the at least two top-emitting micro light emitting diodes are configured to provide different color of light respectively;
a plurality of second pixels, arranged in an array, with each of the second pixels comprising at least two of the bottom-emitting micro light emitting diodes, wherein the at least two bottom-emitting micro light emitting diodes are configured to provide different color of light respectively;
a pitch of the first pixels arrangement is different from a pitch of the second pixels arrangement.
11. The transparent display panel of claim 10, wherein a first image is shown by the first pixels on one side of the light transmissive substrate, and a second image is shown by the second pixels on another side of the light transmissive substrate.
12. The transparent display panel of claim 11, wherein the number of the first pixels is different from the number of the second pixels.
13. The transparent display panel of claim 11, wherein one of the first pixels overlaps one of the second pixels.
14. The transparent display panel of claim 1, wherein the top-emitting micro light emitting diodes surround one of the bottom-emitting micro light emitting diodes.
15. The transparent display panel of claim 7, wherein a portion of the common electrode wiring layer is covered by the light shielding layer.
16. The transparent display panel of claim 1, wherein the epitaxial structure of each of the bottom-emitting micro light emitting diodes further comprises a side wall that is connected to the upper surface and is not parallel to the upper surface, the light shielding component extends from the upper surface and covers at least a portion of the side wall.
17. The transparent display panel of claim 1, further comprising a lens component and a transparent insulation layer, the transparent insulation layer is disposed on light transmissive substrate, wherein the lens component is disposed on the transparent insulation layer, and a light-concentrating surface of the lens component faces the surface of the light transmissive substrate.
18. The transparent display panel of claim 1, further comprising a lens component and an cover substrate, wherein the lens component is disposed on the cover substrate, and the lens component comprises a light-concentrating surface facing the surface of the light transmissive substrate.

* * * * *

| | | | |
|----------------|--|---------|------------|
| 专利名称(译) | 透明显示面板 | | |
| 公开(公告)号 | US20200058625A1 | 公开(公告)日 | 2020-02-20 |
| 申请号 | US16/539483 | 申请日 | 2019-08-13 |
| [标]申请(专利权)人(译) | 鐙创科技股份有限公司 | | |
| 申请(专利权)人(译) | PLAYNITRIDE INC. | | |
| 当前申请(专利权)人(译) | PLAYNITRIDE INC. | | |
| [标]发明人 | CHEN PEI HSIN SHIH YI CHUN CHEN YI CHING LIU YING TSANG LI YU CHU | | |
| 发明人 | CHEN, PEI-HSIN SHIH, YI-CHUN CHEN, YI-CHING LIU, YING-TSANG LI, YU-CHU | | |
| IPC分类号 | H01L25/075 H01L33/62 H01L33/58 | | |
| CPC分类号 | H01L33/58 H01L25/0753 H01L33/62 H01L33/46 | | |
| 优先权 | 107128460 2018-08-15 TW | | |
| 外部链接 | Espacenet USPTO | | |

摘要(译)

一种透明的显示面板，其具有透光性基板，多个顶部发光型微发光二极管，多个底部发光型微发光二极管，以及遮光层。透光基板具有表面。这些顶部发射微发光二极管和这些底部发射微发光二极管设置在透光基板的表面上。底部发射微发光二极管具有外延结构和遮光构件，该外延结构在相对侧上具有一对上表面和下表面，下表面面向透光基板，并且该遮光构件为：布置在上表面上以屏蔽由底部发射微发光二极管向着上表面发射的光。

