



US 20200019018A1

(19) **United States**

(12) **Patent Application Publication**  
**XU**

(10) **Pub. No.: US 2020/0019018 A1**

(43) **Pub. Date: Jan. 16, 2020**

(54) **BACKLIGHT MODULE AND CONTROL  
METHOD THEREOF AND DISPLAY DEVICE**

(52) **U.S. Cl.**

CPC .. *G02F 1/133606* (2013.01); *G02F 1/133526*  
(2013.01); *G09G 3/32* (2013.01); *G02B*  
*6/0068* (2013.01); *G02F 1/133603* (2013.01);  
*G02B 6/003* (2013.01)

(71) Applicants: **HEFEI BOE OPTOELECTRONICS  
TECHNOLOGY CO., LTD.**, Anhui  
(CN); **BOE TECHNOLOGY GROUP  
CO., LTD.**, Beijing (CN)

(72) Inventor: **Jun XU**, Beijing (CN)

(57)

# **ABSTRACT**

(21) Appl. No.: **16/387,699**

(22) Filed: **Apr. 18, 2019**

(30) **Foreign Application Priority Data**

Jul. 11, 2018 (CN) ..... 201810758836.6

## **Publication Classification**


(51) **Int. Cl.**

*G02F 1/1335* (2006.01)

*F21V 8/00* (2006.01)

*G09G 3/32* (2006.01)

A backlight module comprising a plurality of light sources and a light guide plate. The plurality of light sources comprises a plurality of first light sources and a plurality of second light sources. The light guide plate comprises a plurality of concave lens structures and a plurality of convex lens structures on a side of the light guide plate distant from the plurality of light sources. The plurality of concave lens structures and the plurality of convex lens structures correspond to the plurality of first light sources and the plurality of second light sources, respectively. A method for controlling a backlight module and a display device including the backlight module is also provided.

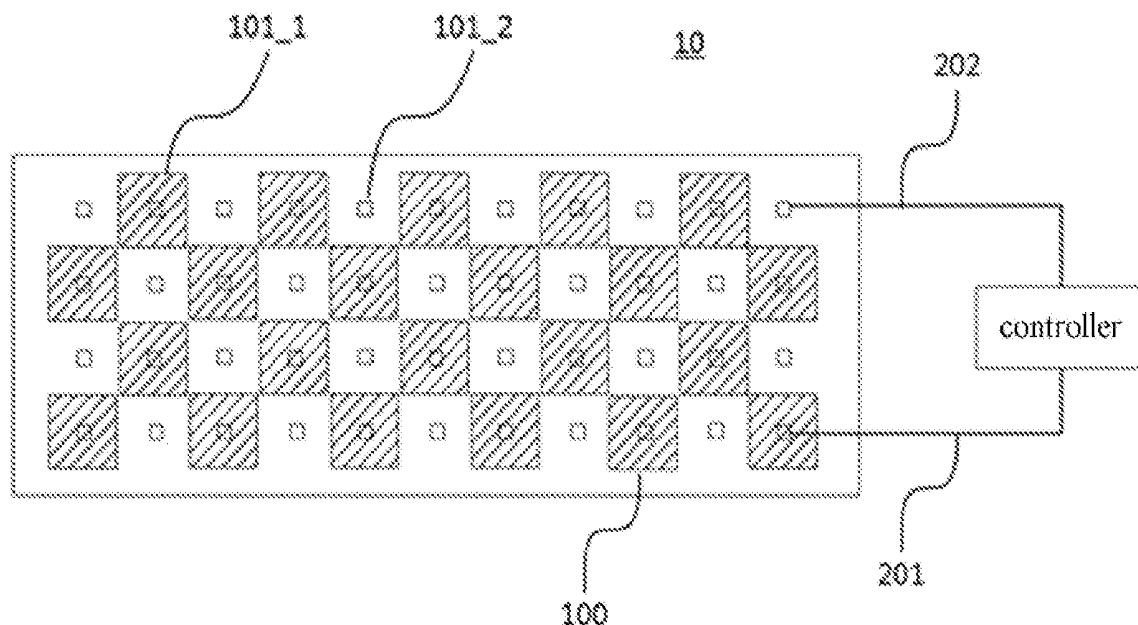

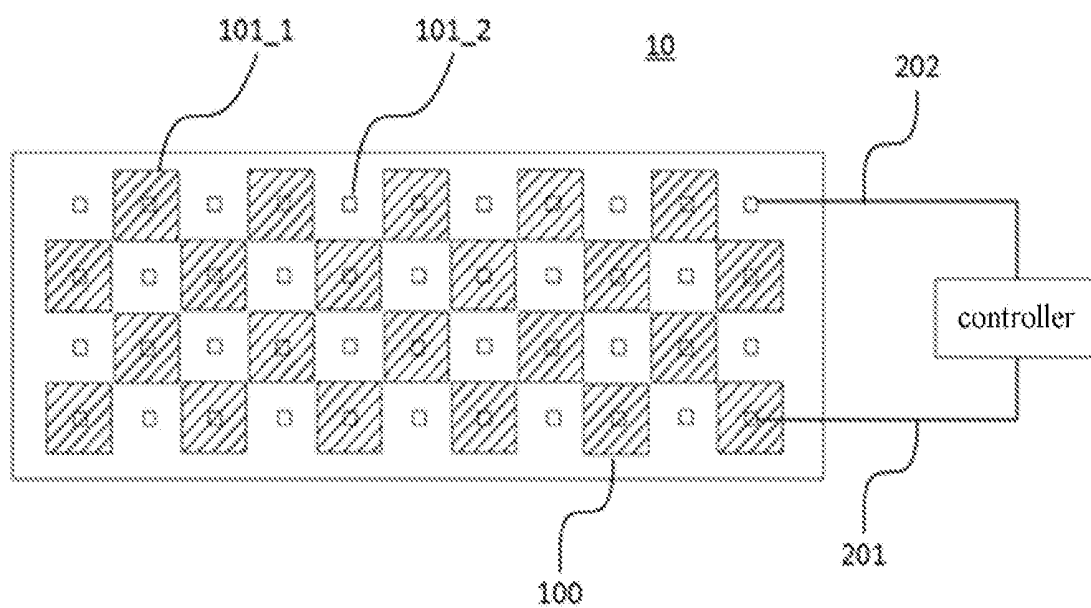


Fig. 1

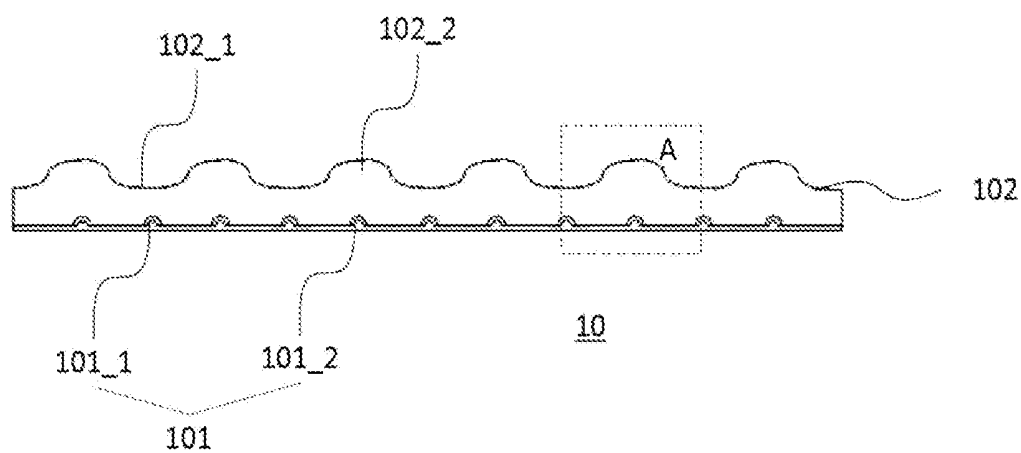


Fig. 2

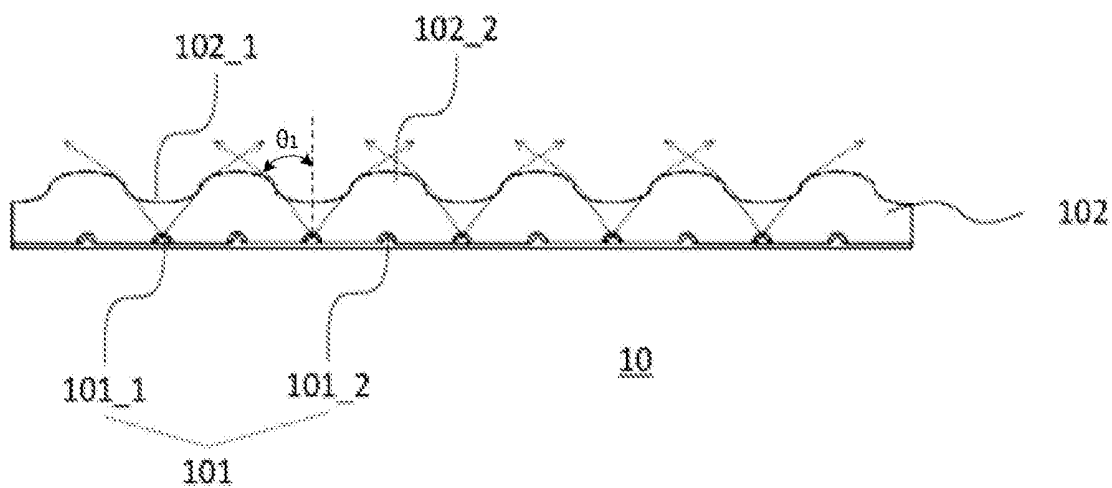


Fig. 3

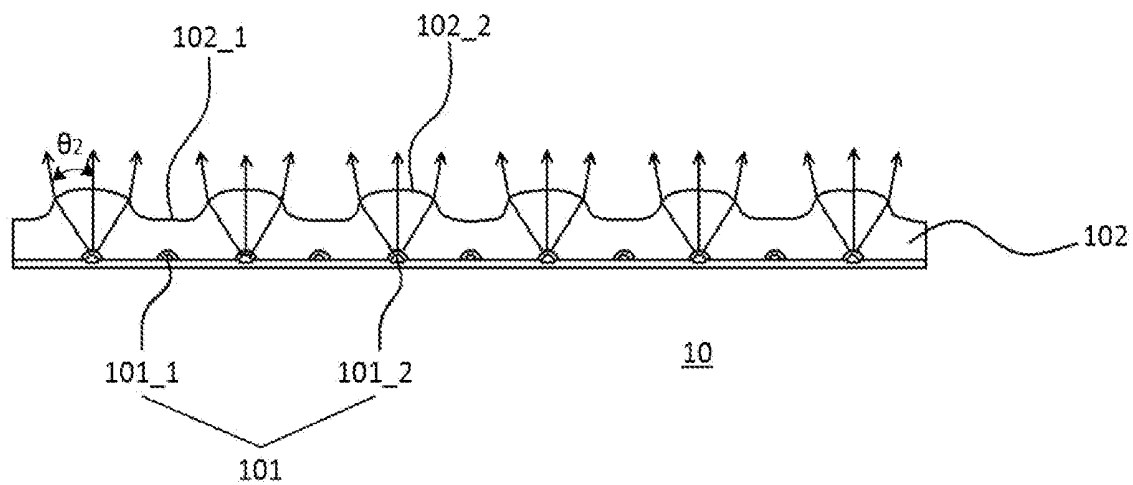


Fig. 4A

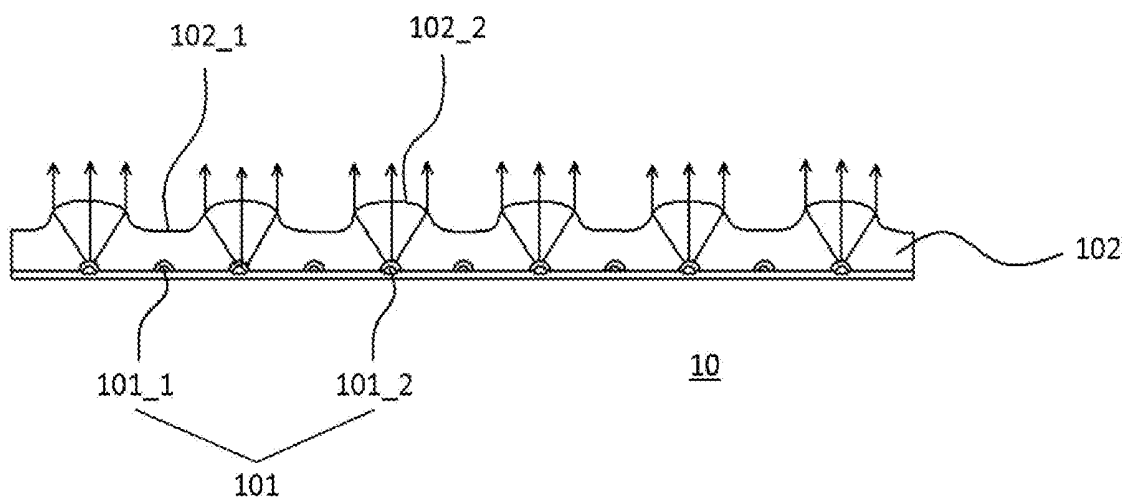


Fig. 4B

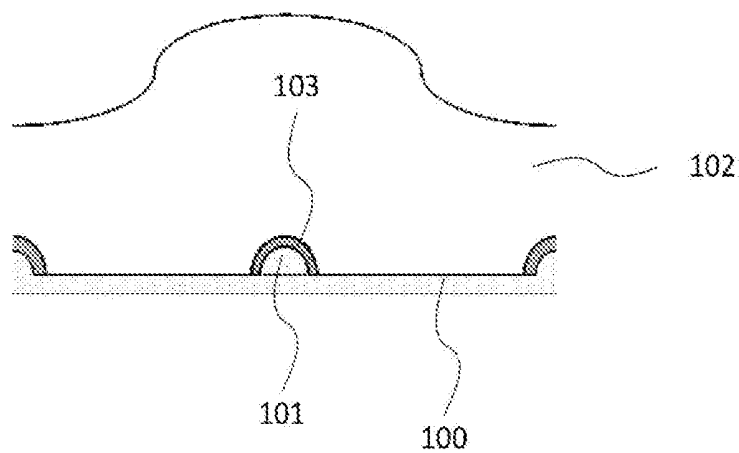


Fig. 5A

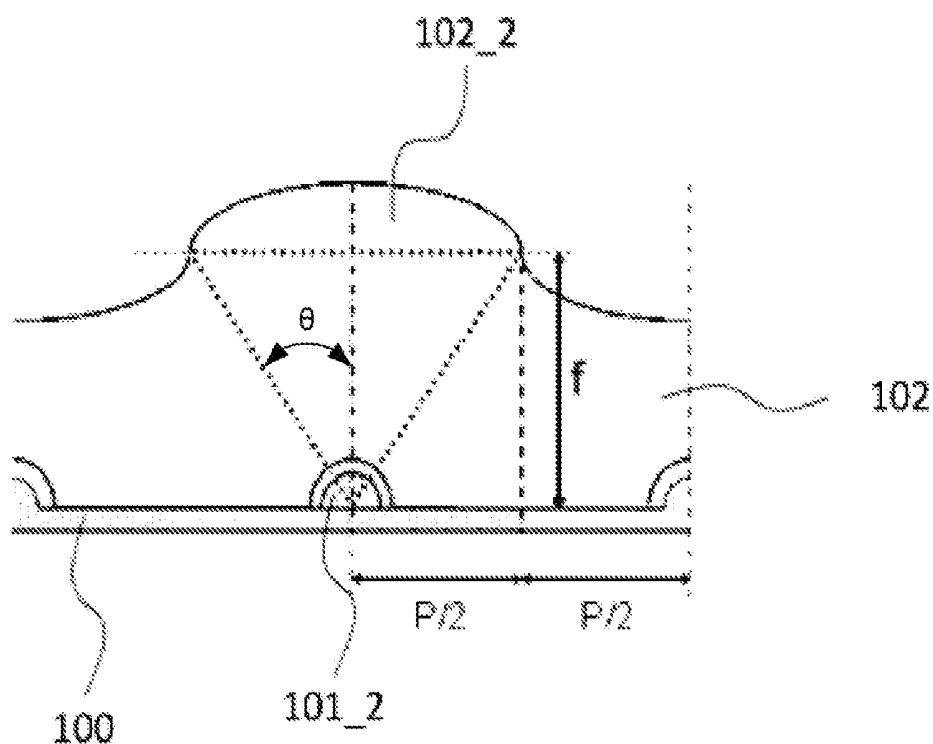


Fig. 5B

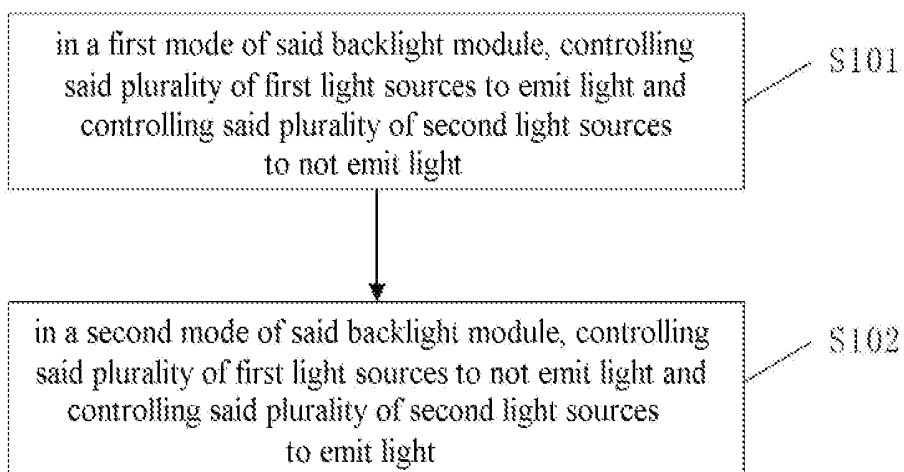


Fig. 6

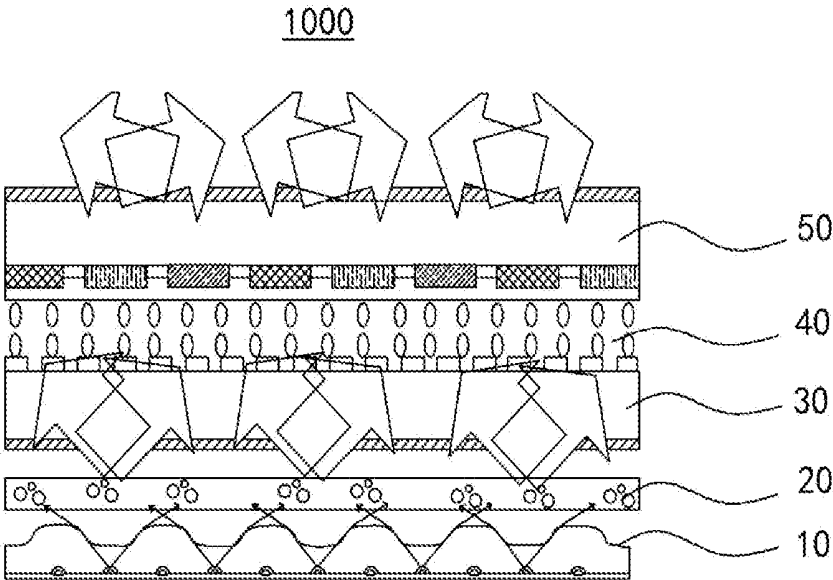


Fig. 7A

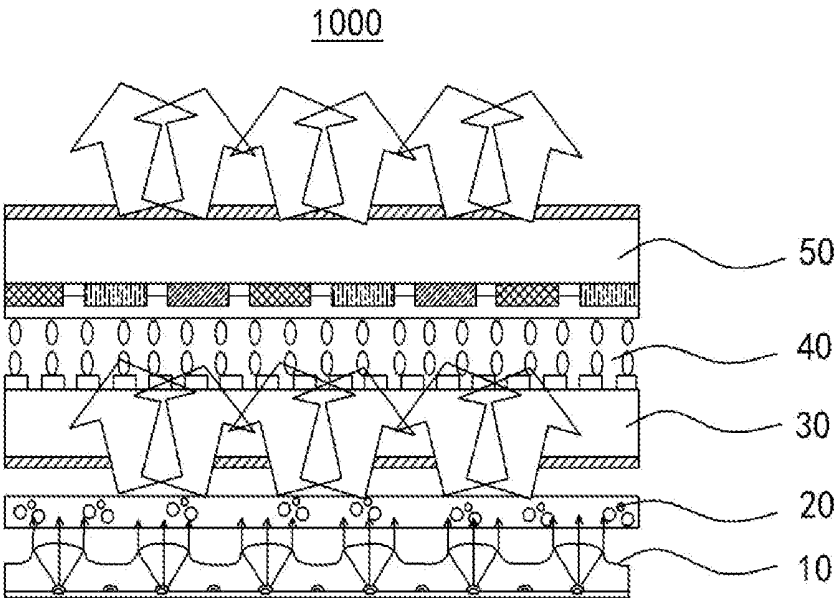


Fig. 7B

## BACKLIGHT MODULE AND CONTROL METHOD THEREOF AND DISPLAY DEVICE

### RELATED ART

[0001] The present application claims the benefit of Chinese Patent Application for invention No. 201810758836.6, filed on Jul. 11, 2018, the entire disclosure of which is incorporated herein by reference.

### TECHNICAL FIELD

[0002] The present disclosure relates to display technology, and particularly relates to a backlight module and control method thereof, and a display device comprising the backlight module.

### BACKGROUND

[0003] Along with development of display technology, various display devices brings various visual experiences to users. Currently, up to 70% users contact privacy information via electronic products in a variety of public places. Thus, peep-proof display technique for privacy information needs to be developed.

[0004] Current Liquid Crystal Display (LCD)-based switchable peep-proof display techniques mainly include two manners: (1) a solution of implementing beam correction based on an electric field change in a panel, two electric field distribution states correspond to a privacy display mode and a normal display mode (i.e. a non-privacy display mode), respectively; (2) a solution based on backlight switching, which can be further divided into a “peep-proof film+ Polymer Dispersed Liquid Crystal (PDLC)” scheme and a “double light guide plates (LGP)” scheme.

### SUMMARY

[0005] The present disclosure provides a backlight module, a method for controlling the backlight module, and a display device comprising the backlight module.

[0006] According to an exemplary embodiment of the present disclosure, a backlight module comprising a plurality of light sources and a light guide plate is provided. Said plurality of light sources comprises a plurality of first light sources and a plurality of second light sources. Said light guide plate comprises a plurality of concave lens structures and a plurality of convex lens structures on a side of the light guide plate distant from said plurality of light sources, and said plurality of concave lens structures and said plurality of convex lens structures correspond to said plurality of first light sources and said plurality of second light sources, respectively.

[0007] According to an embodiment of the present disclosure, said plurality of concave lens structures and said plurality of convex lens structures may be arranged alternately in both a row direction and a column direction, and said plurality of first light sources and said plurality of second light sources may be arranged alternately in both a row direction and a column direction.

[0008] According to an embodiment of the present disclosure, said plurality of concave lens structures may correspond to said plurality of first light sources and each of said plurality of concave lens structures may make light emitted from a corresponding first light source pass through said concave lens structure and exit from said backlight module at a first beam angle; and wherein said plurality of convex

lens structures may correspond to said plurality of second light sources and each of said convex lens structures may make light emitted from a corresponding second light source pass through said convex lens structure and exit from said backlight module at a second beam angle smaller than said first beam angle.

[0009] According to an embodiment of the present disclosure, each of said convex lens structures may make light emitted from a corresponding second light source pass through said convex lens structure and exit from said backlight module in a direction substantially perpendicular with said light guide plate.

[0010] According to an embodiment of the present disclosure, said light guide plate has a plurality of grooves for accommodating said plurality of light sources on a side of the light guide plate facing said plurality of light sources.

[0011] According to an embodiment of the present disclosure, said plurality of convex lens structures may correspond to said plurality of second light sources and each of said second light sources is disposed at a focus position of a corresponding convex lens structure.

[0012] According to an embodiment of the present disclosure, the backlight module may further comprise a controller. Said controller can be connected to said plurality of first light sources via a first control line to control said plurality of first light sources to emit light or not emit light, and said controller can be connected to said plurality of second light sources via a second control line to control said plurality of second light sources to emit light or not emit light.

[0013] According to an embodiment of the present disclosure, in a first mode of said backlight module, said controller may control said plurality of first light sources to emit light and control said plurality of second light sources to not emit light, and in a second mode of said backlight module, said controller may control said plurality of first light sources to not emit light and control said plurality of second light sources to emit light.

[0014] According to an embodiment of the present disclosure, said plurality of light sources comprises at least one of LED, microLED and miniLED.

[0015] According to another exemplary embodiment of the present disclosure, a method for controlling a backlight module is provided, said backlight module comprises a plurality of light sources and a light guide plate, said plurality of light sources comprise a plurality of first light sources and a plurality of second light sources, said backlight module further comprises a controller, said controller is connected to said plurality of first light sources via a first control line and is connected to said plurality of second light sources via a second control line, said light guide plate comprises a plurality of concave lens structures and a plurality of convex lens structures on a side of the light guide plate distant from said plurality of light sources, and said plurality of concave lens structures and said plurality of convex lens structures correspond to said plurality of first light sources and said plurality of second light sources, respectively, said method comprises: in a first mode of said backlight module, said controller controlling said plurality of first light sources to emit light and controlling said plurality of second light sources to not emit light, and in a second mode of said backlight module, said controller controlling said plurality of first light sources to not emit light and controlling said plurality of second light sources to emit light.

**[0016]** According to an embodiment of the present disclosure, said plurality of concave lens structures may correspond to said plurality of first light sources and in a first mode of said backlight module, said controller controls said plurality of first light sources to emit light, wherein each of said plurality of concave lens structures may make light emitted from a corresponding first light source pass through said concave lens structure and exit from said backlight module at a first beam angle; and wherein said plurality of convex lens structures may correspond to said plurality of second light sources and in a second mode of said backlight module, said controller controls said plurality of second light sources to emit light, each of said convex lens structures may make light emitted from a corresponding second light source pass through said convex lens structure and exit from said backlight module at a second beam angle smaller than said first beam angle.

**[0017]** According to an embodiment of the present disclosure, each of said second light sources may be disposed at a focus position of a corresponding convex lens structure, and each of said convex lens structures may make light emitted from a corresponding second light source pass through said convex lens structure and exit from said backlight module in a direction substantially perpendicular with said light guide plate.

**[0018]** According to another exemplary embodiment of the present disclosure, a display device is provided, comprising a backlight module according to the present disclosure and a display panel.

#### DESCRIPTION OF THE DRAWINGS

**[0019]** Embodiments of the present disclosure can be understood more clearly in combination with the following detailed descriptions of the figures, in the drawings:

**[0020]** FIG. 1 is an illustrative top view of a backlight module according to an embodiment of the present disclosure;

**[0021]** FIG. 2 is an illustrative section view of a backlight module according to an embodiment of the present disclosure;

**[0022]** FIG. 3 is an illustrative diagram of a backlight module emitting backlight in a first mode according to an embodiment of the present disclosure;

**[0023]** FIGS. 4A and 4B are illustrative diagrams of a backlight module emitting backlight in a second mode according to an embodiment of the present disclosure;

**[0024]** FIGS. 5A and 5B are local enlarged views of region A in FIG. 2;

**[0025]** FIG. 6 is an illustrative flow chart of a method for controlling a backlight module according to an embodiment of the present disclosure; and

**[0026]** FIGS. 7A and 7B are illustrative cross-sectional views of a liquid crystal display device according to an embodiment of the present disclosure.

#### EMBODIMENTS

**[0027]** Current LCD-based switchable peep-proof display techniques mainly include two manners: a solution of implementing beam correction based on an electric field change in a panel and a solution based on backlight switching. The solution based on backlight switching can be further divided into a “peep-proof film+Polymer Dispersed Liquid Crystal (PDLC)” scheme and a “double light guide plates (LGP)”

scheme. The solution based on an electric field change in a panel is relatively complex, it may affect a displayed picture, and has a limited peep-proof effect. In a “peep-proof film+Polymer Dispersed Liquid Crystal (PDLC)” scheme, a commonly used arrangement manner includes a backlight module emitting parallel light and dimming devices such as PDLC. This implementing manner ensures parallel light exit by absorbing light in non-parallel directions, which has great light loss and results in brightness loss. Besides, in a “peep-proof film+Polymer Dispersed Liquid Crystal (PDLC)” scheme, since PDLC and a peep-proof film are used simultaneously, the thickness will increase and cost is high. Further, driving a PDLC will increase power consumption and structure complexity. A “double light guide plates (LGP)” scheme also has the defects of a high cost, a large thickness and a complex structure.

**[0028]** FIG. 1 is an illustrative top view of a backlight module 10 according to an embodiment of the present disclosure, and FIG. 2 is an illustrative section view of a backlight module 10 according to an embodiment of the present disclosure.

**[0029]** As shown in FIG. 1 and FIG. 2, a backlight module 10 according to an embodiment of the present disclosure may comprise a plurality of light sources 101 and a light guide plate 102. The plurality of light sources 101 may comprise a plurality of first light sources 101\_1 and a plurality of second light sources 101\_2. The light guide plate 102 has a plurality of concave lens structures 102\_1 and a plurality of convex lens structures 102\_2 on a side of the light guide plate distant from said plurality of light sources 101. Said plurality of concave lens structures 102\_1 and said plurality of convex lens structures 102\_2 correspond to said plurality of first light sources 101\_1 and said plurality of second light sources 101\_2, respectively. The backlight module 10 according to an embodiment of the present disclosure may be a direct backlight module.

**[0030]** According to an embodiment of the present disclosure, said plurality of light sources 101 comprises at least one of LED, microLED and miniLED.

**[0031]** MicroLED (also called mLED or  $\mu$ LED) displays have been under attention for their higher brightness and resolution and longer service life. A microLED display is composed of microLED arrays that form different pixel elements. As compared with the widely used LED technology, a microLED display can provide better contrast, faster response time and smaller power consumption. Similar to Organic Light Emitting Diode (OLED), the power consumption of OLED and microLED is significantly reduced as compared with the traditional LED. However, different from OLED, microLED is based on the traditional GaN LED technology, which provides a total brightness much greater than the brightness produced by OLED, even as much as 30 times. Besides, it has better performance in power efficiency and has a longer service life. A miniLED (also called submillimeter LED) refers to a LED having a crystalline grain size of above 100 microns. A miniLED is between a traditional LED and a microLED. To put it simply, a miniLED is an improved version of a traditional LED backlight. In terms of structural principle, microLED is simpler, but miniaturization of LED requires a wafer level technology. In terms of manufacturing process, miniLED has higher yield and special-shaped cutting characteristics as compared with microLED. The advantages of microLED lie in the characteristics of high efficiency, high brightness, high

reliability and fast response time inherited from LED and achieving an effect of power saving with a small volume, small thickness and weight. miniLEDs are mainly applied in backlight sources in a High-Dynamic Range (HDR) or special-shaped displays, etc.

[0032] According to an embodiment of the present disclosure, the light guide plate may be made of a transparent material, including but not limited to glass, polymethyl methacrylate (PMMA), polyethersulfone (PES), or polycarbonate (PC).

[0033] As shown in FIG. 1, according to an embodiment of the present disclosure, a plurality of concave lens structures 102\_1 and a plurality of convex lens structures 102\_2 can be arranged alternately in both a row direction and a column direction, and said plurality of first light sources 101\_1 and said plurality of second light sources 101\_2 can be arranged alternately in both a row direction and a column direction, such that said plurality of concave lens structures 102\_1 can correspond to said plurality of first light sources 101\_1 and said plurality of convex lens structures 102\_2 can correspond to said plurality of second light sources 101\_2. According to an embodiment of the present disclosure, in the top view shown in FIG. 1, said plurality of first light sources 101\_1 and said plurality of second light sources 101\_2 can be arranged in a central region of said plurality of concave lens structures 102\_1 and said plurality of convex lens structures 102\_2, respectively. Light emitted by the plurality of first light sources 101\_1 exits after being adjusted by the plurality of concave lens structures 102\_1, which perform a diverging function to light passing therethrough. Light emitted by the plurality of second light sources 101\_2 exits after being adjusted by the plurality of convex lens structures 102\_2, which perform a converging function to light passing therethrough.

[0034] FIG. 3 is an illustrative diagram of a backlight module emitting backlight in a first mode according to an embodiment of the present disclosure, and FIGS. 4A and 4B are illustrative diagrams of a backlight module emitting backlight in a second mode according to an embodiment of the present disclosure.

[0035] As shown in FIG. 3, said backlight module 10, when operating in a first mode (a normal display mode or a non-privacy display mode), controls said plurality of first light sources 101\_1 to emit light and each of said concave lens structures 102\_1 makes light emitted from a corresponding first light source 101\_1 pass through said concave lens structure 102\_1 and then exit from said backlight module 10 at a first beam angle  $\theta_1$ .

[0036] As shown in FIG. 4A and FIG. 4B, said backlight module 10, when operating in a second mode (i.e. a privacy display mode), controls said plurality of second light sources 101\_2 to emit light, and each of said convex lens structures 102\_2 makes light emitted from a corresponding second light source 101\_2 pass through said convex lens structure 102\_2 and exit from said backlight module 10 at a second beam angle  $\theta_2$  smaller than said first beam angle  $\theta_1$ . Furthermore, each of said convex lens structures 102\_2 makes light emitted from a corresponding second light source 101\_2 pass through said convex lens structure 102\_2 and exit from said backlight module 10 in a direction substantially perpendicular with said light guide plate 102.

[0037] Back to FIG. 1, according to an embodiment of the present disclosure, the backlight module 10 may further comprise a controller 200. The controller 200 can be con-

nected to said plurality of first light sources 101\_1 via a first control line 201 to control said plurality of first light sources 101\_1 to emit light or not emit light. Said controller 200 can be further connected to said plurality of second light sources 101\_2 via a second control line 202 to control said plurality of second light sources 101\_2 to emit light or not emit light. In a first mode (i.e. a normal display mode or a non-privacy display mode) of said backlight module 10, said controller 200 can control said plurality of first light sources 101\_1 to emit light and control said plurality of second light sources 101\_2 to not emit light; in a second mode (i.e. a privacy display mode) of said backlight module 10, said controller 200 can control said plurality of first light sources 101\_1 to not emit light and control said plurality of second light sources 101\_2 to emit light. Although the figure shows that the controller 200 is connected to one first light source 101\_1 and one second light source 101\_2 via the first control line 201 and the second control line 202, respectively, it should be understood that this is only illustrative, and the controller 200 can be connected to the respective first light sources 101\_1 in the backlight module 10 via the first control line 201 and connected to the respective second light sources 101\_2 in the backlight module 10 via the second control line 202. Besides, according to the embodiment disclosed in the present disclosure, the first control line 201 and the second control line 202 may include a plurality of sub-control lines respectively and the controller 200 can be connected to the respective first light sources 101\_1 and the respective second light sources 101\_2 via the sub-control lines respectively to perform group control to the first light sources 101\_1 and the second light sources 101\_2, respectively.

[0038] Although it is described in the above embodiment and shown in FIG. 3 that the controller 200 can control said plurality of first light sources 101\_1 to emit light and control said plurality of second light sources 101\_2 to not emit light in a normal display mode or a non-privacy display mode. However, the present disclosure is not limited thereto. In a normal display mode or a non-privacy display mode, the controller 200 may control said plurality of first light sources 101\_1 and said plurality of second light sources 101\_2 to emit light.

[0039] Although FIG. 1 shows the backlight module is provided with an equal number of first light sources and second light sources, the present disclosure is not limited thereto. The number of the first light sources can be larger or smaller than the number of the second light sources according to the requirement.

[0040] FIGS. 5A and 5B are local enlarged views of region A in FIG. 2.

[0041] Refer to FIG. 5A, a plurality of light sources 101 can be disposed on a substrate 100, which can be a flexible printed circuit board (FPC). A reflector plate (not shown) can be disposed on a side of the substrate 100 opposite to the side, on which light sources 101 are disposed, to enhance light emission efficiency.

[0042] The light guide plate 102 can be assembled with the substrate 100 provided with a plurality of light sources 101 to form a backlight module 10. As shown in FIG. 5, grooves can be provided at positions in the light guide plate 102 corresponding to the respective light sources 101 to accommodate the light sources 101. An optically clear adhesive (OCA) 103 can be provided between the light sources 101 and the light guide plate 102. The optically clear



adhesive (OCA) **103** is selected with its refractive index taken into consideration. An isotropic optically clear adhesive having a refractive index close to the refractive index of the light guide plate **102** can be selected.

[0043] Refer to FIG. 5B, which specifically illustrates second light sources **101\_2** disposed on the substrate **100** and convex lens structure **102\_2** corresponding to the second light sources **101\_2**. A beam angle  $\theta$  of each light source **101** (including a first light source **101\_1** and a second light source **101\_2**) is a known process parameter (which can be understood as an angle formed between an edge light of the output light and the optical axis). The purpose of the present disclosure lies in: in a normal display mode, a first light source **101\_1** corresponding to the concave lens structure **102\_1** emits light such that light exits at a relatively large beam angle  $\theta_1$  (see FIG. 3) larger than the beam angle  $\theta$ , and in a privacy display mode, a second light source **101\_2** corresponding to the convex lens structure **102\_2** emits light such that light exits at a relatively small beam angle  $\theta_2$  (see FIG. 4) smaller than the beam angle  $\theta$ , in this way, switching between a normal display mode and a privacy display mode can be realized by lighting different light sources in the backlight module in different display modes. As shown in FIG. 5B, a distance  $P$  between adjacent light sources **101** can be calculated based on a beam angle  $\theta$  of the light source **101** (i.e. a second light source **101\_2**) and a desired thickness of the backlight module (which is directly correlated to a focal distance  $f$  of the convex lens structure **102\_2**), that is, according to

$$\tan\theta = \frac{f}{P/2},$$

it can be obtained that

$$P = \frac{2f}{\tan\theta}$$

FIG. 6 is an illustrative flow chart of a method for controlling a backlight module according to an embodiment of the present disclosure.

[0044] A method for controlling a backlight module according to an embodiment of the present disclosure can be used to control a backlight module according to the present disclosure. As shown in FIG. 6, said control method may comprise steps S101 and S102.

[0045] At step S101, in a first mode of said backlight module, controlling said plurality of first light sources to emit light and controlling said plurality of second light sources to not emit light.

[0046] At step S102, in a second mode of said backlight module, controlling said plurality of first light sources to not emit light and controlling said plurality of second light sources to emit light.

[0047] Refer to FIG. 1, FIG. 3 and FIG. 6, according to an embodiment of the present disclosure, the first mode can be a normal display mode or a non-privacy display mode, wherein the plurality of first light sources **101\_1** emit light under the control of a controller **200**, and the plurality of second light sources **101\_2** do not emit light under the control of the controller **200**. In the first mode, when the

controller **200** controls the plurality of first light sources **101\_1** to emit light, each of said concave lens structures **102\_1** makes light emitted from a corresponding first light source **101\_1** pass through said concave lens structure **102\_1** and then exit from said backlight module **10** at a first beam angle  $\theta_1$ .

[0048] Refer to FIG. 1, FIG. 4 and FIG. 6, according to an embodiment of the present disclosure, the second mode can be a privacy display mode, wherein the plurality of first light sources **101\_1** do not emit light under the control of a controller **200**, and the plurality of second light sources **101\_2** emit light under the control of the controller **200**. In the second mode, when the controller **200** controls the plurality of second light sources **101\_2** to emit light, each of said convex lens structures **102\_2** makes light emitted from a corresponding second light source **101\_2** pass through said convex lens structure **102\_2** and exit from said backlight module **10** at a second beam angle  $\theta_2$  smaller than said first beam angle  $\theta_1$ .

[0049] Although it is described in the above embodiment that in a normal display mode or a non-privacy display mode, the plurality of first light sources **101\_1** emit light under the control of a controller **200**, and the plurality of second light sources **101\_2** do not emit light under the control of the controller **200**. However, the present disclosure is not limited thereto. In a normal display mode or a non-privacy display mode, the controller **200** may control said plurality of first light sources **101\_1** and said plurality of second light sources **101\_2** to both emit light.

[0050] FIGS. 7A and 7B are illustrative cross-sectional views of a liquid crystal display device **1000** according to an embodiment of the present disclosure.

[0051] As shown in FIGS. 7A and 7B, a liquid crystal display device **1000** according to an embodiment of the present disclosure may comprise a backlight module **10** according to an embodiment of the present disclosure as depicted in FIG. 1-FIG. 5. Besides, a liquid crystal display device **1000** according to an embodiment of the present disclosure may further comprise a diffusion plate **20**, an array substrate **30**, a liquid crystal layer **40** and a color film substrate **50**. The array substrate **30** can be provided with a down polarizer on a side thereof close to the backlight module **10** and provided with pixel electrodes on a side thereof distant from the backlight module **10**. The color film substrate **50** is provided with a color filter and a black matrix on a side thereof close to the backlight module **10** and provided with an up polarizer on a side thereof distant from the backlight module **10**.

[0052] FIG. 7A shows the effect of light exiting from the backlight module **10** in a normal display mode or a non-privacy display mode, and FIG. 7B shows the effect of light exiting from the backlight module **10** in a privacy display mode.

[0053] A liquid crystal display device according to the present disclosure may include (but not limited to) a liquid crystal display, a portable computer, a netbook, a personal digital assistant (PDA), a network panel, a mobile phone, a smart phone, an electronic book, a portable multimedia player (PMP), a digital camera, a digital audio recorder/player, a digital picture/video recorder/player, a portable game machine.

[0054] With reference to the principle of the present disclosure described in the embodiments of the present disclosure, it should be understood that the arrangement

manner and details of the embodiments described herein can be modified and combined in any desired manner without deviating from the principle. Although the above discussion focuses on particular embodiments, other constructions are also considered. Specifically, even if expressions such as “according to an embodiment of the present disclosure” is used in the present disclosure, these phrases generally refer to any possible embodiment rather than aiming to limit the concept of the present disclosure to particular constructions. As used in the present disclosure, these terms can be cited in other embodiments including a combination of the same or different embodiments.

[0055] Although the concept of the present disclosure is particularly illustrated and described with reference to some embodiments of the present disclosure, it should be understood that various modifications in form and detail can be made without deviating from the spirit and scopes of the claims.

1. A backlight module, comprising a plurality of light sources and a light guide plate, wherein

said plurality of light sources comprise a plurality of first light sources and a plurality of second light sources, said light guide plate comprises a plurality of concave lens structures and a plurality of convex lens structures on a side of the light guide plate distant from said plurality of light sources, and

said plurality of concave lens structures and said plurality of convex lens structures correspond to said plurality of first light sources and said plurality of second light sources, respectively.

2. The backlight module according to claim 1, wherein said plurality of concave lens structures and said plurality of convex lens structures are arranged alternately in both a row direction and a column direction, and said plurality of first light sources and said plurality of second light sources are arranged alternately in both a row direction and a column direction.

3. The backlight module according to claim 1, wherein said plurality of concave lens structures correspond to said plurality of first light sources and each of said plurality of concave lens structures makes light emitted from a corresponding first light source pass through said concave lens structures and exit from said backlight module at a first beam angle; and

said plurality of convex lens structures correspond to said plurality of second light sources and each of said convex lens structures makes light emitted from a corresponding second light source pass through said convex lens structures and exit from said backlight module at a second beam angle smaller than said first beam angle.

4. The backlight module according to claim 3, wherein each of said convex lens structures makes light emitted from the corresponding second light source pass through said convex lens structures and exit from said backlight module in a direction substantially perpendicular with said light guide plate.

5. The backlight module according to claim 1, wherein said light guide plate has a plurality of grooves for accommodating said plurality of light sources on a side of the light guide plate facing said plurality of light sources.

6. The backlight module according to claim 5, wherein said plurality of convex lens structures correspond to said

plurality of second light sources and each of said second light sources is disposed at a focus position of a corresponding convex lens structure.

7. The backlight module according to claim 1, further comprising a controller, wherein

said controller is connected to said plurality of first light sources via a first control line to control said plurality of first light sources to emit light or not emit light, and said controller is connected to said plurality of second light sources via a second control line to control said plurality of second light sources to emit light or not emit light.

8. The backlight module according to claim 7, wherein in a first mode of said backlight module, said controller controls said plurality of first light sources to emit light and controls said plurality of second light sources to not emit light, and in a second mode of said backlight module, said controller controls said plurality of first light sources to not emit light and controls said plurality of second light sources to emit light.

9. The backlight module according to claim 1, wherein said plurality of light sources comprises at least one of LED, microLED and miniLED.

10. A method for controlling a backlight module, said backlight module comprising a plurality of light sources and a light guide plate, said plurality of light sources comprising a plurality of first light sources and a plurality of second light sources, said backlight module further comprising a controller, said controller being connected to said plurality of first light sources via a first control line and connected to said plurality of second light sources via a second control line, said light guide plate comprising a plurality of concave lens structures and a plurality of convex lens structures on a side of the light guide plate distant from said plurality of light sources, and said plurality of concave lens structures and said plurality of convex lens structures corresponding to said plurality of first light sources and said plurality of second light sources, respectively, said method comprises:

in a first mode of said backlight module, said controller controlling said plurality of first light sources to emit light and controlling said plurality of second light sources to not emit light, and

in a second mode of said backlight module, said controller controlling said plurality of first light sources to not emit light and controlling said plurality of second light sources to emit light.

11. The method for controlling a backlight module according to claim 10,

wherein said plurality of concave lens structures correspond to said plurality of first light sources and in the first mode of said backlight module, said controller controls said plurality of first light sources to emit light, each of said plurality of concave lens structures makes light emitted from a corresponding first light source pass through said concave lens structures and exit from said backlight module at a first beam angle; and

wherein said plurality of convex lens structures correspond to said plurality of second light sources and in the second mode of said backlight module, said controller controls said plurality of second light sources to emit light, each of said convex lens structures makes light emitted from a corresponding second light source

pass through said convex lens structures and exit from said backlight module at a second beam angle smaller than said first beam angle.

12. The method for controlling a backlight module according to claim 11, wherein each of said second light sources is disposed at a focus position of a corresponding convex lens structure, and each of said convex lens structures makes light emitted from the corresponding second light source pass through said convex lens structures and exit from said backlight module in a direction substantially perpendicular with said light guide plate.

13. A display device, comprising said backlight module according to claim 1 and a display panel.

14. The display device according to claim 13, wherein said plurality of concave lens structures and said plurality of convex lens structures are arranged alternately in both a row direction and a column direction, and said plurality of first light sources and said plurality of second light sources are arranged alternately in both a row direction and a column direction.

15. The display device according to claim 13, wherein said plurality of concave lens structures correspond to said plurality of first light sources and each of said plurality of concave lens structures makes light emitted from a corresponding first light source pass through said concave lens structures and exit from said backlight module at a first beam angle; and

said plurality of convex lens structures correspond to said plurality of second light sources and each of said convex lens structures makes light emitted from a corresponding second light source pass through said convex lens structures and exit from said backlight module at a second beam angle smaller than said first beam angle.

16. The display device according to claim 15, wherein, each of said convex lens structures makes light emitted from the corresponding second light source pass through said convex lens structures and exit from said backlight module in a direction substantially perpendicular with said light guide plate.

17. The display device according to claim 13, wherein said light guide plate has a plurality of grooves for accommodating said plurality of light sources on a side of the light guide plate facing said plurality of light sources.

18. The display device according to claim 17, wherein said plurality of convex lens structures correspond to said plurality of second light sources and each of said second light sources is disposed at a focus position of a corresponding convex lens structure.

19. The display device according to claim 13, further comprising a controller, wherein

said controller is connected to said plurality of first light sources via a first control line to control said plurality of first light sources to emit light or not emit light, and said controller is connected to said plurality of second light sources via a second control line to control said plurality of second light sources to emit light or not emit light.

20. The display device according to claim 19, wherein in a first mode of said backlight module, said controller controls said plurality of first light sources to emit light and controls said plurality of second light sources to not emit light, and

in a second mode of said backlight module, said controller controls said plurality of first light sources to not emit light and controls said plurality of second light sources to emit light.

\* \* \* \* \*

专利名称(译)	背光模块及其控制方法和显示装置		
公开(公告)号	<a href="#">US20200019018A1</a>	公开(公告)日	2020-01-16
申请号	US16/387699	申请日	2019-04-18
[标]申请(专利权)人(译)	合肥京东方光电科技有限公司 京东方科技集团股份有限公司		
申请(专利权)人(译)	合肥京东方光电科技有限公司. 京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	合肥京东方光电科技有限公司. 京东方科技集团股份有限公司.		
[标]发明人	XU JUN		
发明人	XU, JUN		
IPC分类号	G02F1/1335 F21V8/00 G09G3/32		
CPC分类号	G09G3/32 G02B6/003 G02F1/133526 G02B6/0068 G02F1/133603 G02F1/133606 G02F2001/133607 G02B6/0021 G02F1/133602 G09G3/342		
优先权	201810758836.6 2018-07-11 CN		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

背光模块，包括多个光源和导光板。多个光源包括多个第一光源和多个第二光源。导光板包括多个凹透镜结构和在导光板的远离多个光源的一侧上的多个凸透镜结构。多个凹透镜结构和多个凸透镜结构分别对应于多个第一光源和多个第二光源。还提供了一种用于控制背光模块的方法和包括该背光模块的显示装置。

