



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 127 544 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
14.12.2005 Bulletin 2005/50

(51) Int Cl.⁷: **A61B 5/22, A61B 5/00**

(21) Application number: **01660035.5**

(22) Date of filing: **19.02.2001**

(54) Measurement relating to human energy metabolism

Messung bezüglich des menschlichen Energiestoffwechsels

Mesure relative au métabolisme énergétique humain

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **23.02.2000 FI 20000416**

(43) Date of publication of application:
29.08.2001 Bulletin 2001/35

(73) Proprietor: **Polar Electro Oy
90440 Kempele (FI)**

(72) Inventors:
• **Heikkilä, Mr. Ilkka
90240 Oulu (FI)**
• **Nissilä, Mr. Seppo
90550 Oulu (FI)**

(74) Representative: **Antila, Harri Jukka Tapani et al
Kolster Oy Ab,
P.O. Box 148,
Iso Roobertinkatu 23
00121 Helsinki (FI)**

(56) References cited:
**EP-A- 0 845 241 US-A- 4 367 752
US-A- 5 263 491**

- **HASTINGS G ET AL: "A self-organising fuzzy estimator for hypoglycaemia monitoring in diabetic patients" PROCEEDINGS OF THE 20TH ANNUAL INTERNATIONAL CONFERENCE OF THE IEEE ENGINEERING IN MEDICINE AND BIOLOGY SOCIETY. VOL.20 BIOMEDICAL ENGINEERING TOWARDS THE YEAR 2000 AND BEYOND (CAT. NO.98CH36286), PROCEEDINGS OF THE 20TH ANNUAL INTERNATIONAL CONFERENCE, pages 1371-1374 vol.3, XP002170266 1998, Piscataway, NJ, USA, IEEE, USA ISBN: 0-7803-5164-9**
- **GHEVONDIAN N ET AL: "Modelling of blood glucose profiles non-invasively using a neural network algorithm" PROCEEDINGS OF THE FIRST JOINT BMES/EMBS CONFERENCE. 1999 IEEE ENGINEERING IN MEDICINE AND BIOLOGY 21ST ANNUAL CONFERENCE AND THE 1999 ANNUAL FALL MEETING OF THE BIOMEDICAL ENGINEERING SOCIETY (CAT. NO.99CH37015), PROCEEDINGS OF THE FIRST JOINT BMES/, 1999, page 928 vol.2 XP002170267 1999, Piscataway, NJ, USA, IEEE, USA ISBN: 0-7803-5674-8**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 127 544 B1

Description

FIELD OF THE INVENTION

5 **[0001]** The invention relates to health care and sports, particularly to applications which aim to determine variables relating to human energy metabolism in a human body.

BACKGROUND OF THE INVENTION

10 **[0002]** The human energy economics mainly comprises carbohydrates, fats and proteins. How these are used and proportioned depends on bodily condition, the amount of nutrients in use and the intensity of exercise to be performed. The bodily condition can be studied e.g. through activity, temperature and blood pressure. The exercise stress intensity, in turn, can be measured e.g. as a heart rate frequency with respect to time, which gives a temporary, rough estimate of the exercise stress. In connection with various diseases, such as diabetes, it is important to determine the bodily

15 energy balance and glucose content in order to find suitable treatment. Furthermore, the effect of exercise stress level in athletes on the energy balance and energy metabolism is important as regards planning a suitable diet.

[0003] The known methods for determining energy metabolism levels are based on measuring the heart rate during an exercise. Energy consumption has been estimated e.g. by an equation according to Formula (1):

20

$$(1) \quad EE = a + b \cdot HR,$$

wherein

25 **[0004]** EE describes the level of energy consumption, a and b are constants by which the linear dependency between heart rate HR and EE is determined. The known method has serious disadvantages. Energy consumption calculated by the method according to Formula (1) does not take any previous cumulative exercise stress nor the quality thereof into account. The linear model is used because the energy consumption measurements being currently used are mainly based on laboratory measurements during ascending exercise stress or using constant exercise stress at a certain work load.

30 Prior art devices to assess metabolism are disclosed in the following documents:

HASTINGS G ET AL: "A self-organising fuzzy estimator for hypoglycaemia monitoring in diabetic patients" PROCEEDINGS OF THE 20TH ANNUAL INTERNATIONAL CONFERENCE OF THE IEEE ENGINEERING IN MEDICINE AND BIOLOGY SOCIETY. VOL.20 BIOMEDICAL ENGINEERING TOWARDS THE YEAR 2000 AND BEYOND (CAT.NO. 98CH36286), PROCEEDINGS OF THE 20TH ANNUAL INTERNATIONAL CONFERENCE, pages 1371-1374 vol.3, 1998, Piscataway, NJ, USA, IEEE, USA ISBN: 0-7803-5164-9

35 GHEVONDIAN N ET AL: "Modelling of blood glucose profiles non-invasively using a neural network algorithm" PROCEEDINGS OF THE FIRST JOINT BMES/EMBS CONFERENCE. 1999 IEEE ENGINEERING IN MEDICINE AND BIOLOGY 21 ST ANNUAL CONFERENCE AND THE 1999 ANNUAL FALL MEETING OF THE BIOMEDICAL ENGINEERING SOCIETY (CAT. NO.99CH37015), PROCEEDINGS OF THE FIRST JOINT BMES/, 1999, page 928 vol.2, Piscataway, NJ, USA, IEEE, USA ISBN: 0-7803-5674-8

40 EP-A-0 845 241 (SEIKO EPSON CORP) 3 June 1998 (1998-06-03)

BRIEF DESCRIPTION OF THE INVENTION

45 **[0005]** An object of the invention is to provide an improved device for determining human energy metabolism. The invention is as disclosed in the appended claims.

[0006] The invention relates to a heart rate measurement arrangement comprising a calculating unit comprising a mathematical model arranged to form a person's energy metabolism quality describing energy consumption in one or more energy components as an output parameter of the model using as input parameters of the model one or more heart rate parameters and one or more physiological parameters each describing a physiological characteristic of the person, the heart rate measurement arrangement further comprising display means for displaying information formed in the calculating unit.

50

[0007] Preferred embodiments of the invention are disclosed in the dependent claims.

[0008] The invention thus relates to an apparatus for measuring human energy metabolism. The method for using the invention is preferably implemented by a mathematical model which is based on the physiological facts of the human energy metabolism. In connection with the description of the invention, a mathematical model refers to a set of mathematical procedures and rules that are employed to form output parameter values from input parameter values. The mathematical procedures include arithmetic operations, such as adding, subtracting and multiplying. The mathe-

55

mathematical model may of course also be implemented as a table or a database, in which case an output parameter value corresponding to a particular input parameter is read directly from the database. In an embodiment of the invention, the level of energy metabolism, i.e. the amount of energy consumed, is given as output variables of the mathematical model. Energy consumption can be determined as energy/time unit, i.e. kcal/min. In a preferred embodiment of the invention, the quality of energy metabolism, which means that the energy used is divided into different forms of energy, such as carbohydrates, fats and proteins, is given as output parameters of the model. In a preferred embodiment of the invention, the amount of energy left in the body is given as an output variable. In an embodiment, the quality of the remaining energy divided into different energy components is given as an output parameter. More than one output parameter of the output parameters disclosed above may also be simultaneously given as an output parameter of the model.

[0009] The mathematical model according to an embodiment of the invention returns as its output parameter one or more of the following: the glucose used by the body or the amount of glucose left in the person's body.

[0010] The set of input parameters of both the model modelling energy metabolism and the model modelling glucose consumption may vary greatly. In the solution of the invention, at least one or more heart rate parameters to be measured from heart rate information are introduced as input parameters into the model. A heart rate parameter may be e.g. heart rate, standard deviation of the heart rate, rate of change of the heart rate or other such variable measurable from heart beats. Furthermore, at least one physiological parameter describing the physiology of the user is introduced as input information into the model. The physiological parameters include height, weight, age and sex. The model can be made more accurate by using one or more optional parameters as input parameters of the model. In a preferred model, the amount of energy supplied to the body is introduced as an input parameter into the model. The amount of supplied energy refers to energy that has been consumed by eating or drinking or administered e.g. through an injection. In a preferred embodiment, the amount of energy supplied to the body can be divided into carbohydrates, fats and proteins according to the energy quality. An optional input parameter is body temperature, which can be measured e.g. from the skin by a thermometer. Furthermore, an optional input parameter of the model is the surrounding temperature, which affects the metabolism level in the same way as the body's own temperature, i.e. the higher the temperature, the higher the metabolism level. The model may also use a person's blood pressure as an input parameter, the blood pressure affecting the metabolism such that high blood pressure corresponds with high metabolism level. In a preferred embodiment, the model uses the amounts of respiratory gases, i.e. oxygen and carbon dioxide, as optional input parameters.

[0011] In a preferred embodiment of the invention, the above-described mathematical model is implemented as a neural network. In a neural network, the effect of each input parameter on each output parameter is found out by finding out the weighting coefficient describing the effect. The model is preferably trained by a sufficiently large amount of user data to enable the model to conclude the effect of each input parameter on each output parameter. The set of users used in the training is preferably very large, i.e. it comprises a group of hundreds or even thousands of people having physiological characteristics that provide as comprehensive a sample as possible. By supplying a user's physiological parameters into the trained neural network quite a good classification of the user in the model can be achieved. In a preferred embodiment, the results given by the model are improved by a reference exercise. The reference exercise is carried out at a known exercise stress level, enabling the exact values of some input parameters, such as the respiratory gases, to be measured. The operation of the neural network can be further improved by introducing feedback into the model, whereby the model can be further improved by utilizing the measurement results obtained.

[0012] In a solution according to a preferred embodiment of the invention, in order to measure energy metabolism and/or glucose, a person whose energy levels are to be monitored uses a heart rate monitor. A heart rate monitor is a device used in sports and medicine to measure information on a person's heart rate either from an electric impulse transmitted by the heart or from the pressure caused by a heart beat on an arterial vessel. Heart rate monitors are known e.g. to comprise an electrode belt to be arranged on a user's chest to measure the heart rate by means of two or more electrodes. The electrode belt transmits the measured heart rate information inductively as one or more magnetic pulses per heart beat e.g. to a receiver unit worn on the wrist. On account of the received magnetic pulses, the receiver unit calculates the heart rate and, if necessary, other heart rate variables, such as the moving standard deviation of the heart rate. The receiver unit, i.e. the wrist monitor, often also comprises a display for displaying heart rate information to the performer of an exercise, and an interface for the other facilities of the heart rate monitor. In the above-described situation, a heart rate monitor refers to an integrated whole comprising an electrode belt and a receiver unit. The heart rate monitor may also consist of one part only such that the display means are also located on the chest, which means that no information needs to be transmitted to a separate receiver unit. Furthermore, the heart rate monitor may consist of a mere wrist monitor to be arranged on the wrist, operating without an electrode belt arranged on the chest and measuring the heart rate information from the pressure in the vessel. In connection with the description of the invention, a heart rate measurement arrangement refers to the heart rate monitor solutions described above. The heart rate measurement arrangement also comprises solutions wherein the heart rate information is transmitted to an external computer or to an information network comprising display means, such as a display of a

computer, for displaying the information measured or formed by the heart rate monitor.

[0013] The mathematical model required by the method of the invention and the other facilities required by the models are preferably implemented by software using a processor of the heart rate monitor. The models and facilities may also be implemented as ASIC, using separate logic components or the like. In a preferred embodiment of the invention, the heart rate monitor comprises supply means for supplying input parameter values, which supply means may be e.g. a keypad of the heart rate monitor, display equipment supporting the control, speech control, telecommunication gate for external control or the like. The heart rate monitor preferably also comprises display means for displaying output parameters. The output parameters may of course be transmitted to the user in other ways as well, e.g. by means of a speech controller or a telecommunication connection.

[0014] In connection with the description of the invention, a fitness exercise, or an athletic exercise, refers to a physical exercise wherein a person's heart rate level for a given time, e.g. for more than 10 minutes, exceeds a heart rate level corresponding to a rest state. An exercise may be considered to be divided e.g. into the following phases: warm-up phase, active phase and recovery phase, the exercise being preceded and followed by a state of rest. The different phases may be determined and separated e.g. on account of heart rate levels and/or exercise stress levels. A recovery phase, for instance, can then be determined as a performance level on which the heart rate level is dropped from 130 beats/minute to a rest level of 70 beats/minute. The invention is not restricted to measuring during an exercise only but the present invention is well suited to measuring during a rest state as well.

[0015] The invention provides several advantages. In comparison to the known methods, a person's bodily condition can be followed much more accurately as regards the energy metabolism and/or glucose parameters. Indirectly, this means that the energy balance in athletes and persons suffering from certain diseases can be monitored more accurately than in the known methods. Furthermore, when in use, the method and apparatus of the invention provide a non-invasive way of estimating the energy metabolism and/or amount of glucose in a body.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] In the following, the invention will be described in closer detail with reference to the accompanying drawings, in which

[0017] Figure 1 shows a preferred embodiment of a method of the invention,

[0018] Figure 2 is a block diagram showing the structure of a model of the invention,

[0019] Figure 3A shows the structure of a neural network model,

[0020] Figure 3B shows the operation of the neural network model,

[0021] Figure 4A shows a person performing an exercise,

[0022] Figure 4B shows an electrode belt according to a preferred embodiment of the invention, and


[0023] Figure 4C shows a heart rate monitor arrangement of an embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0024] In the following, the invention will be described by means of preferred embodiments and with reference to accompanying Figures 1 to 4C. Figure 1 describes a preferred embodiment of a method of the invention. In step 102, a mathematical model is formed in order to find one or more heart rate parameters and the effect of one or more physiological parameters on a person's metabolism level and/or the amount of glucose in the body. A heart rate parameter refers to the heart rate calculated e.g. from the heart beat frequency, standard deviation of the heart rate or such a parameter calculable from the heart beat. A physiological parameter refers to a person's age, weight, height, sex or other such parameter describing a physiological characteristic of the person. In a preferred embodiment, the mathematical model is a neural network, which is particularly well suited to complex biological modelling situations. A physiological background to the model is provided by the known physiological dependencies of metabolism that will be discussed in the following in view of the basic facts of the model.


[0025] The human energy economics mainly comprises carbohydrates, fats and proteins. How these are used and proportioned depends on the bodily condition, the amount of nutrients in use and the intensity of exercise. The carbohydrates obtained from nutrition produce glucose, which is stored as glycogen in the muscles. In glycolysis, the glucose breaks down releasing energy. The reaction may take place either aerobically or anaerobically.

[0026] Aerobic case:



[0027] Anaerobic case:

EP 1 127 544 B1



5 [0028] In addition to the breakdown of carbohydrates shown above, the breakdowns of fatty acids and protein are provided with corresponding breakdown equations; it is, however, irrelevant to shown them herein. Fatty acids can break down into energy only aerobically. In muscle, the oxidation of fatty acids requires simultaneous burning of glucose. At exercise, the muscles get the energy they need from ATP (adenosine triphosphate). An ATP deficiency formed during exercise should be replenished by producing new ATP from stored energy. At the outset of exercise, during the first 10 to 15 seconds, creatine stocks will suffice to provide energy for forming the ATP necessary for the muscles. 10 After this, it is possible to start using the energy obtainable from the glucose in the body. Only after about 15 minutes from the outset of the exercise is it possible to utilize fatty acids. In a short-term maximal exercise lasting roughly ten to twenty seconds only energy is mainly produced anaerobically. In an exercise lasting few seconds energy is mainly produced by alactic processes by creatine phosphate. However, creatine phosphate stocks are small, and as soon as after a 10-second exercise energy production will mainly take place through lactic processes. In a longer maximal exercise lasting several minutes the proportion of aerobic energy production is increased. However, in a prolonged exercise energy is partly produced by using the same mechanisms as in a short-term exercise.

[0029] The intensity of an exercise can be studied e.g. as a heart rate frequency in regard to time. The intensity, however, only reveals a temporary intensity of the exercise. The difference between a person who is physically fit and a person who is not does not necessarily show in the intensity at which they are able to perform the exercise but first 20 of all in the way they endure the duration of the exercise and in the way the exercise affects the person. The exercise stress level affecting the amount of cumulative metabolism is decreased by rest, so in addition to the mere intensity, a more accurate analysis of the level and quality of the metabolism would also require information on previous exercise as well. An object of the present invention is to acknowledge several different factors that are not taken into account in estimating metabolism in models based on intensity only. In an embodiment according to the model of the invention, 25 the model can be presented by an equation according to Formula (2):

$$(2) \quad EE = F(\text{HR}, \text{Act}, \text{Tem}, \text{Tair}, \text{Time}, \text{BP}, \text{Nfat}, \text{Nch}),$$

30 wherein

[0030] EE describes energy consumption, F refers to a function which depends on the variables in the parenthetical expression, HR describes one or more heart rate parameters, Act refers to a person's activity, Tem to the person's body temperature, Tair to the temperature of the air surrounding the body, Time to the duration of an exercise of a measurement, BP to blood pressure measured e.g. one to three times a day, Nfat to the amount of fat obtained from 35 nutrition, and Nch to the amount of carbohydrates obtained from nutrition. The amount of glucose in the body can be estimated by using a formula corresponding to Formula (2) wherein EE is replaced by GLU to describe the amount of glucose.

[0031] In lieu of a solution based on the neural network, in an embodiment the model of Formula (2) is calibrated manually on account of measurement results. Each person calibrates the model according to the responses produced 40 by his or her own body, e.g. the glucose content of the body can be measured from blood, whereby the parameters of the model can be calibrated appropriately.

[0032] In method step 104 of Figure 1, the neural network is trained by a large amount of user data. The user data is preferably collected e.g. from roughly a thousand users, which enables the neural network to learn and set the weighting coefficients of the synapses such that the model gives as good results as possible. In step 106, user-specific information, such as physiological parameters and information on nutrition consumed, is supplied to the neural network. 45 Preferably, the model is calibrated before the actual use by utilizing the real user data. As to glucose, this means that the real amount of glucose in the blood is measured in the morning using a glucose meter, the real measurement result is supplied to the model, which, using feedback, calibrates the parameters of the model such that the real measured value can be achieved. In a preferred embodiment, the mathematical model is integrated into the heart rate monitor; 50 method step 108 shows the heart rate monitor being used. The heart rate monitor measures one or more heart rate parameters from a person's heart rate on account of which the heart rate monitor forms estimates of the variables describing energy metabolism and the amount of glucose. According to step 110, the heart rate monitor preferably displays on its display the state of energy metabolism and/or glucose content to the user of the heart rate monitor, doctor or trainer.

[0033] Figure 2 shows an embodiment of a mathematical model 200 mainly by means of input parameters 202 to 214 and output parameters 216 to 226 of the model 200. One or more heart rate parameters 202 calculable from a person's heart rate and one or more physiological parameters 204 of the person are introduced into the mathematical model 200, such as a neural network, as an input parameter. In an embodiment, one or more optional parameters or 55

a set of parameters 206 to 214 are introduced into the model 200. An input parameter set 206 describes the amount of energy consumed or otherwise received by the person. In an embodiment, the amount of energy is described by one parameter. In another embodiment, the amount of energy is divided into different forms of energy, such as fats, carbohydrates and proteins, before being supplied into the model 200. An parameter set 208 describes temperatures that affect metabolism. The temperatures are described by one or more parameters, such as the temperature of the person's body or the temperature of the air surrounding the person's body. In a preferred embodiment, the person's blood pressure 210 is introduced into the model 200 as an input variable. The blood pressure can be measured e.g. one to three times a day. An activity parameter 212 describes the person's state, e.g. sleeping and being awake are preferably separated by means of the activity parameter. In a preferred embodiment, respiratory gases 214 are taken into account in calculating the energy metabolism. The respiratory gases 214 describe the amounts of inhaled oxygen and exhaled carbon dioxide. The use of the respiratory gases 214 is an accurate way to describe the energy metabolism, so it is preferable to use them e.g. when the neural network is being trained.

[0034] As output parameters, the model gives one or more of the output parameters or output parameter sets 216 to 226 shown in Figure 2. The output parameter 216 describes the amount of energy consumption e.g. by a variable such as that of kilocalories per time unit. An output parameter set 218 describes the amount of energy consumption divided into different kinds of energy, such as fats, carbohydrates and proteins. An output parameter 220 describes the amount of energy left in the body. In a preferred embodiment, the parameters 220 describing the energy 206 consumed and the amount of energy left coexist in the model 200. A parameter set 222 describes the remaining amount of energy divided into different energy components. An output parameter 224 describes the amount of glucose used, and a parameter 226 the amount of glucose left in the body.

[0035] In a preferred embodiment, the mathematical model forms a person's exercise stress level by means of the person's one or more heart rate parameters and one or more parameters describing the strenuousness of an exercise. An exercise stress parameter may be e.g. the velocity of a runner or the resistance of an exercise bike. In determining the exercise stress, the model preferably employs one or more parameters describing the person's physical condition, such as the maximum oxygen intake capacity. The model of the embodiment is then preferably a two-step one such that an estimate of the person's exercise stress level is formed on account of the heart rate information and the parameters describing the person's energy metabolism are estimated on account of the exercise stress level.

[0036] In an embodiment of the invention, the mathematical model implementing the method of the invention is implemented as a neural network, the operational principles of such a network being described by means of Figures 3A and 3B. A neural network is used for modelling highly complex applications, such as image and speech recognition, robotics applications and medical analysis applications, which are extremely difficult to express as a mathematical model. Referring to Figure 3A, the neural network comprises neurons, e.g. 202A and 202B, 302A and 302B which are provided with a great number of dependencies therebetween, e.g. 304A and 304B. The dependencies 304A and 304B between the neurons are called synapses, and a weighting coefficient, e.g. W11, W12, is determined for each synapsis. The neurons, i.e. nodes, are able to perform simple calculations, e.g. the neuron 302A calculates a sum weighted by the weighting coefficients from the synapses of the previous layer. The neural network comprises at least an input layer comprising neurons 202A to 204A, and an output layer comprising neurons 216 to 220. Since the operation of the two-layer neural network is rather limited, the neural network preferably comprises at least one hidden layer HL comprising neurons 302A and 302B. Neurons on the same level do not have a common synapsis but a node has a synapsis with all neurons on adjacent levels to the level in question. Figure 3B shows the structure of a single neuron 302A in closer detail. As its input the neuron 302A receives the corresponding input parameters 202A to 204A weighted by weighting coefficients P1 to P3 for which the neuron forms a weighted sum S. The neuron supplies the sum S to an activation function, which is typically a non-linear function of the sigmoid type. As its output the neuron 302A gives a terminal value T, which, supplied to the synapsis 304B is multiplied by a weighting coefficient T11 whereas supplied to the node 218, the terminal value is multiplied by weighting coefficient T12.

[0037] A central characteristic of the neural network is training. During a special training phase, the model is being presented with real input and output values that the model compares with the output values it has calculated. The model processes the difference between the real and calculated values, i.e. the error, and as a final result of the processing, the weighting coefficients of the synapses are adjusted in order to minimize the error. As a result of the training phase, the weight of significant synapses increases while the weight of less important synapses becomes extremely small.

[0038] Figure 4A shows a person 400 performing an exercise on a treadmill 406. The heart rate of the person 400 is measured by a transmitter electrode belt 402 to be arranged on the chest. The heart rate is measured by two or more electrodes 410A and 410B provided in the transmitter electrode belt 402, a potential difference being formed therebetween as the heart beats. The transmitter electrode belt 402 is attached around the person's body e.g. by an elastic band made of an elastic material. The measured heart rate is transmitted preferably inductively to a receiver 404 on the wrist which preferably also comprises a display for displaying the measured heart rate. The invention is also suited to heart rate monitors wherein an electrode belt 402 on the chest is, in addition to measuring the heart rate,

also responsible for storing, processing and displaying heart rate information, which means that no separate receiver unit 404 to be arranged on the wrist is needed. The heart rate monitor may also be a mere wrist device wherein the transmitter part and the receiver part are integrated into one device, in which case no transceiver nor receiver electronics is needed. The heart beat may be measured from the wrist either from an ECG signal from the arterial pressure pulse or by observing optically the changes in blood flow absorption or reflection.

[0039] Figure 4B shows in closer detail the electrode belt 402 shown in Figure 4A. In Figure 4B, the electrode belt 402 is shown as seen from the side of the electrodes 410A and 410B, i.e. from the side facing the body. The figure further shows fasteners 416A and 416B by which the electrode belt 402 can be attached to the elastic band to be attached around the body. A dotted line in Figure 4B further designates an electronics unit 412 for processing the heart rate information received from the electrodes 410A and 410B. The electrodes 410A and 410B are connected to the electronics unit 412 by connectors 414A and 414B respectively.

[0040] Figure 4C shows the structures of the transmitter electrode belt 402 and the receiver 404 by means of an embodiment. The transmitter electrode belt 402 is shown at the top of the figure, a sample of heart rate information to be transmitted in the middle of the figure, and relevant parts of the receiver unit 404 at the bottom of the figure. An electronics unit 112 of the transmitter electrode belt 402 receives the heart rate information from the means 410A and 410B for measuring one or more parameters of the heart rate information. The measuring means are preferably electrodes, and the heart rate monitor comprises at least two such electrodes; there may, however, be more of them as well. From the electrodes the signal is supplied to an ECG-preamplifier 420 wherefrom the signal is transmitted to an AGC-preamplifier 422 and, through a power amplifier 424, to a transmitter 426. The transmitter 426 is preferably implemented as a coil which inductively transmits heart rate information 430 to the receiver, such as the receiver unit 404 to be arranged on the wrist, or e.g. to an external computer.

[0041] One heart beat corresponds to e.g. one 5 kHz burst 432A, or one beat may correspond to a group 432A to 432C of several bursts. The distances between the bursts 430A to 430C and 432A and 432B may be of equal or different length, the latter case being shown in Figure 4C. Information may be transmitted inductively or, alternatively, for instance optically or through a conductor. In an embodiment, the receiver 404, such as the receiver to be worn on the wrist, comprises a receiver coil 440 wherefrom the received signal is, via a signal receiver 442, supplied to a central processor 444, which coordinates the operation of the different parts of the receiver 404. The receiver 404 preferably also comprises a memory 448 for storing heart rate information, and display means 450 for displaying the heart rate or heart rate variables, such as the standard deviation, derived therefrom. The display means 450 are e.g. the display or speech controller of the heart rate monitor. In a preferred embodiment, the display means 450 also comprise means for transmitting heart rate or feedback information e.g. to an external computer or to an information network. The transmitting means may be implemented e.g. as an inductive coil, optic transmitter, radio transmitter or by a connector for transmission to be carried out via a connecting cable. If the information measured or formed by the heart rate monitor is transmitted to equipment external to the heart rate monitor, such as a computer, the arrangement is called a heart rate measurement arrangement. Then, according to a preferred embodiment, the display means are situated in the computer, which can be used for displaying the information stored in the memory of the heart rate monitor or measured in real time. The display means 450 may also show the user information relevant to recovering from a fitness exercise, such as the lactate content in the body, value of the sliding heart rate variation, the person's exercise stress level, duration of the recovery exercise or other such information. The display means 450 may also be used for displaying to the user the output parameters 216 to 226 of the mathematical model 200 shown in Figure 2 relating to the energy metabolism or glucose content. The receiver 404 preferably comprises supply means 446, such as a keypad or speech control means. The supply means 446 can be used for supplying e.g. the input parameters 202 to 214 necessary for the models 200. Preferably, the one or more mathematical models 200 required by the method of the invention are implemented in a calculating unit 452 of the receiver 404. It is obvious that the calculating unit 452 does not have to be implemented as a separate device unit but the calculating unit 452 and the mathematical model 200 therein may e.g. be part of the central processor 444. Furthermore, it is obvious that the heart rate monitor does not necessarily have to comprise a calculating unit as a separate device component but the model 200 may be implemented e.g. in the central processor 444.

[0042] In the embodiment of Figure 4C, a heart rate monitor refers to an integrated whole comprising the transmitter electrode belt 402 and the receiver 404. In an embodiment, the heart rate monitor may also be implemented such that the above-described facilities contained in the transmitter electrode belt 402 and the receiver 404 are situated in one device. The one-piece device may be either such that it is arranged on the chest for the heart rate measurement or, alternatively, the device may be used on the wrist. It is obvious to one skilled in the art that the electrode belt 402 and the receiver 404 may also comprise other parts than those shown in Figures 4B and 4C but it is irrelevant to describe those parts in this connection.

[0043] In a preferred embodiment, the facilities, means and one or more mathematical models implementing the above-mentioned method steps of the invention are implemented by software using a general-purpose processor. The means may also be implemented as ASIC, by separate logic components or by employing another such known method.

[0044] Although the invention has been described above with reference to the examples according to the accompanying drawings, it is obvious that the invention is not restricted thereto but can be modified in many ways within the scope of the attached claims.

5

Claims

- 10 1. A heart rate measurement, wherein the heart rate measurement arrangement (402 to 404) comprises a calculating unit (452) comprising a mathematical model (200) arranged to form a person's energy metabolism (216) quality describing energy consumption in one or more energy components as an output parameter of the model using as input parameters of the model one or more heart rate parameters (202) and one or more physiological parameters (204) each describing a physiological characteristic of the person, the heart rate measurement arrangement further comprising display means (450) for displaying information formed in the calculating unit (452).
- 15 2. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the heart rate measurement arrangement comprises a memory for storing the heart rate information and/or information formed in the calculating unit.
- 20 3. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the heart rate measurement arrangement comprises an electrode belt for measuring heart rate and a receiver unit comprising a receiver for receiving information transmitted from a transmitter of the electrode belt, said calculating unit and said display means.
- 25 4. A heart rate measurement arrangement as claimed in claim 3, **characterized in that** the display means are a display of the receiver unit.
- 30 5. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the heart rate measurement arrangement is a one-piece heart rate monitor to be worn on the wrist and comprising one or more sensors for measuring the heart rate, the calculating unit, said display means being the display of the heart rate monitor for displaying the heart rate and/or energy metabolism information.
- 35 6. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the model is arranged to return one or more of the following as an output parameter: amount of energy left in the body or amount of energy in the body as energy quality.
- 40 7. A heart rate measurement arrangement as claimed in claim 1 or 6, **characterized in that** the model contained in the calculating unit is arranged to form the output parameter of the model on account of the person's exercise stress level, which exercise stress level is formed in the model by means of the information on the person's heart rate and one or more exercise stress parameters describing the stressfulness of a fitness exercise.
- 45 8. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the model is arranged to receive as an input parameter one or more of the following: amount of obtained energy, quality of obtained energy, person's activity, temperature of the person's skin, temperature of the air surrounding the person's body, person's blood pressure, exercise stress parameter describing the hardness of exercise, amount of respiratory gases.
- 50 9. A heart rate measurement arrangement as claimed in claim 1, 6 or 8, **characterized in that** the energy component includes one or more of the following: carbohydrates, fats or proteins.
- 55 10. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the mathematical model is a neural network.
11. A heart rate measurement arrangement as claimed in claim 10, **characterized in that** the model is trained on the basis of user information collected from a large group of users.
12. A heart rate measurement arrangement as claimed in claim 11, **characterized in that** in the training of the neural network, weighting coefficients between neurons of the neural network are calibrated by means of feedback by utilizing the value of one or more output parameters.

13. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the heart rate parameter is a heart rate describing the heart beat frequency, standard deviation of the heart rate, rate of change of the heart rate or other such parameter.

5 14. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the physiological parameter is age, sex, height, weight or other such parameter describing a physiological characteristic of the person.

15. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the heart rate measurement arrangement comprises supply means for supplying one or more input parameters into the mathematical model of the heart rate measurement arrangement.

10 16. A heart rate measurement arrangement as claimed in claim 1, **characterized in that** the model is arranged to return one or more of the following as an output parameter: the person's glucose content level, amount of glucose left in the person's body.

15

Patentansprüche

20 1. Herzfrequenzmessenordnung (402 bis 404) mit einer Recheneinheit (452), die ein mathematisches Modell (200) aufweist, das so organisiert ist, dass es die Qualität des E-nergiemetabolismus (216) einer Person bildet, die den Energieverbrauch in einer oder mehreren Energiekomponenten als einen Ausgangsparameter des Modells beschreibt, wobei als Eingangsparameter des Modells ein oder mehrere Herzfrequenzparameter (202) und ein oder mehrere physiologische Parameter (204) verwendet werden, von denen jeder eine physiologische Eigenschaft der Person beschreibt, und wobei die Herzfrequenzmessungsanordnung weiterhin eine Anzeigeeinrichtung (450) zum Anzeigen von Informationen aufweist, die in der Recheneinheit (452) gebildet werden.

25

2. Herzfrequenzmessenordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** sie einen Speicher zum Speichern der Herzfrequenzinformationen und/oder von Informationen aufweist, die in der Recheneinheit gebildet werden.

30

3. Herzfrequenzmessenordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** sie einen Elektrodengürtel zum Messen der Herzfrequenz und eine Empfängereinheit aufweist, zu der ein Empfänger für das Empfangen von Informationen, die von einem Sender des Elektrodengürtels übertragen werden, die Recheneinheit und die Anzeigeeinrichtung gehören.

35

4. Herzfrequenzmessenordnung nach Anspruch 3, **dadurch gekennzeichnet, dass** die Anzeigeeinrichtung eine Anzeige der Empfängereinheit ist.

40 5. Herzfrequenzmessenordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** sie ein einteiliger, am Handgelenk zu tragender Herzfrequenzmonitor ist und einen oder mehrere Sensoren zum Messen der Herzfrequenz, die Recheneinheit und die Anzeigeeinrichtung aufweist, die die Anzeige des Herzfrequenzmonitors zum Anzeigen der Herzfrequenz und/oder von Energiemetabolismusinformationen ist.

45

6. Herzfrequenzmessenordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** das Modell so organisiert ist, dass es einen oder mehrere der folgenden Größen als Ausgangsparameter zurückführt: Menge der im Körper verbliebenen Energie oder Menge der Energie im Körper als Energiequalität.

50

7. Herzfrequenzmessenordnung nach Anspruch 1 oder 6, **dadurch gekennzeichnet, dass** das in der Recheneinheit enthaltene Modell so organisiert ist, dass es den Ausgangsparameter des Modells aufgrund des Übungsstressniveaus der Person bildet, wobei das Übungsstressniveau in dem Modell mittels der Informationen über die Herzfrequenz der Person und mittels eines oder mehrerer Übungsstressparameter gebildet wird, die die Stressigkeit einer Fitnessübung beschreiben.

55

8. Herzfrequenzmessenordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** das Modell so organisiert ist, dass es als Eingangsparameter eine oder mehrere der folgenden Parameter empfängt: Menge der erhaltenen Energie, Qualität der erhaltenen Energie, Aktivität der Person, Temperatur der Haut der Person, Temperatur der Luft, die den Körper der Person umgibt, Blutdruck der Person, Übungsstressparameter, der die Übungshärte beschreibt, Menge der Atmungsgase.

60

EP 1 127 544 B1

9. Herzfrequenzmessanordnung nach Anspruch 1, 6 oder 8, **dadurch gekennzeichnet, dass** die Energiekomponente eine oder mehrere der folgenden aufweist: Kohlenhydrate, Fette oder Proteine.
- 5 10. Herzfrequenzmessanordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** das mathematische Modell ein neurales Netzwerk ist.
11. Herzfrequenzmessanordnung nach Anspruch 10, **dadurch gekennzeichnet, dass** das Modell auf der Basis von Nutzerinformationen geschult wird, die aus einer großen Gruppe von Nutzern gesammelt werden.
- 10 12. Herzfrequenzmessanordnung nach Anspruch 11, **dadurch gekennzeichnet, dass** bei der Schulung des neuronalen Netzwerks Bewertungskoeffizienten zwischen Neuronen des neuronalen Netzwerks mit Hilfe einer Rückkoppelung kalibriert werden, indem der Wert von einem oder mehreren Ausgangsparametern verwendet wird.
13. Herzfrequenzmessanordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** der Herzfrequenzparameter eine Herzfrequenz, die die Herzschlagfrequenz beschreibt, eine Standardabweichung der Herzfrequenz, die Änderungsrate der Herzfrequenz oder ein anderer derartiger Parameter ist.
- 15 14. Herzfrequenzmessanordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** der physiologische Parameter das Alter, das Geschlecht, die Größe, das Gewicht oder ein anderer derartiger Parameter ist, der eine physiologische Kenngröße der Person beschreibt.
- 20 15. Herzfrequenzmessanordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** sie eine Zuführeinrichtung zum Zuführen von einem oder mehreren Eingangsparametern in das mathematische Modell der Herzfrequenzmessanordnung aufweist.
- 25 16. Herzfrequenzmessanordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** das Modell so organisiert ist, dass einer oder mehrere der folgenden Parameter als Ausgangsparameter zurückgeführt werden: das Glukosegehaltniveau der Person, die Glukosemenge, die im Körper der Person verblieben ist.

30

Revendications

1. Agencement de mesure de rythme cardiaque, dans lequel l'agencement (402 à 404) de mesure de rythme cardiaque comprend une unité (452) de calcul comprenant un modèle mathématique (200) agencé pour former une
35 qualité de métabolisme énergétique (216) d'une personne décrivant la consommation énergétique dans un ou plusieurs composants énergétiques en tant que paramètre de sortie du modèle utilisant en tant que paramètres d'entrée du modèle un ou plusieurs paramètres (202) de rythme cardiaque et un ou plusieurs paramètres (204) physiologiques, décrivant chacun une caractéristique physiologique de la personne, l'agencement de mesure de rythme cardiaque comprenant en outre un moyen (450) d'affichage pour afficher les informations formées dans
40 l'unité (452) de calcul.
2. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** l'agencement de mesure de rythme cardiaque comprend une mémoire pour mémoriser les informations de rythme cardiaque et/ou des informations formées dans l'unité de calcul.
- 45 3. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** l'agencement de mesure de rythme cardiaque comprend une ceinture d'électrodes pour mesurer un rythme cardiaque et une unité de récepteur comprenant un récepteur pour recevoir les informations transmises depuis un transmetteur de la ceinture d'électrodes, ladite unité de calcul et ledit moyen d'affichage.
- 50 4. Agencement de mesure de rythme cardiaque selon la revendication 3, **caractérisé en ce que** le moyen d'affichage est un dispositif d'affichage de l'unité de récepteur.
- 55 5. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** l'agencement de mesure de rythme cardiaque est un moniteur de rythme cardiaque en une pièce devant être porté au poignet et comprenant un ou plusieurs capteurs pour mesurer le rythme cardiaque, l'unité de calcul, ledit moyen d'affichage étant le dispositif d'affichage du moniteur de rythme cardiaque pour afficher le rythme cardiaque et/ou les informations de métabolisme énergétique.

EP 1 127 544 B1

6. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** le modèle est agencé pour renvoyer un ou plusieurs parmi les paramètres suivants en tant que paramètres de sortie : une quantité d'énergie restant dans le corps ou une quantité d'énergie dans le corps en tant que qualité énergétique.
- 5 7. Agencement de mesure de rythme cardiaque selon la revendication 1 ou 6, **caractérisé en ce que** le modèle contenu dans l'unité de calcul est agencé pour former le paramètre de sortie du modèle en fonction du niveau d'effort d'exercice de la personne, lequel niveau d'effort d'exercice est formé selon le modèle au moyen des informations sur le rythme cardiaque de la personne et un ou plusieurs paramètres d'effort d'exercice décrivant le niveau d'effort d'un exercice de mise en forme.
- 10 8. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** le modèle est agencé pour recevoir en tant que paramètre d'entrée un ou plusieurs paramètres parmi les suivants : quantité d'énergie obtenue, qualité d'énergie obtenue, activité de la personne, température de la peau de la personne, température de l'air environnant le corps de la personne, pression sanguine de la personne, paramètre d'effort d'exercice décrivant la difficulté de l'exercice, quantité de gaz respiratoire.
- 15 9. Agencement de mesure de rythme cardiaque selon la revendication 1, 6 ou 8, **caractérisé en ce que** le composant énergétique comprend un ou plusieurs parmi les composants suivants : glucides, graisses ou protéines.
- 20 10. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** le modèle mathématique est un réseau neural.
- 25 11. Agencement de mesure de rythme cardiaque selon la revendication 10, **caractérisé en ce que** le modèle est composé sur la base d'informations d'utilisateurs collectées à partir d'un groupe important d'utilisateurs.
- 30 12. Agencement de mesure de rythme cardiaque selon la revendication 11, **caractérisé en ce que** la composition du réseau neural, les coefficients de pondération entre les neurones du réseau neural sont calibrés au moyen d'une rétroaction en utilisant la valeur du ou des paramètres de sortie.
- 35 13. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** le paramètre de rythme cardiaque est un rythme cardiaque décrivant la fréquence de battements cardiaques, une déviation standard du rythme cardiaque, un taux de changement du rythme cardiaque ou un tel autre paramètre.
- 40 14. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** le paramètre physiologique est l'âge, le sexe, la taille, le poids ou un tel autre paramètre décrivant une caractéristique physiologique de la personne.
- 45 15. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** l'agencement de mesure de rythme cardiaque comprend un moyen d'alimentation pour fournir un ou plusieurs paramètres d'entrée dans le modèle mathématique de l'agencement de mesure de rythme cardiaque.
- 50 16. Agencement de mesure de rythme cardiaque selon la revendication 1, **caractérisé en ce que** le modèle est agencé pour renvoyer un ou plusieurs parmi les paramètres suivants en tant qu'un paramètre de sortie : le niveau du contenu de glucose de la personne, la quantité de glucose restant dans le corps de la personne.
- 55

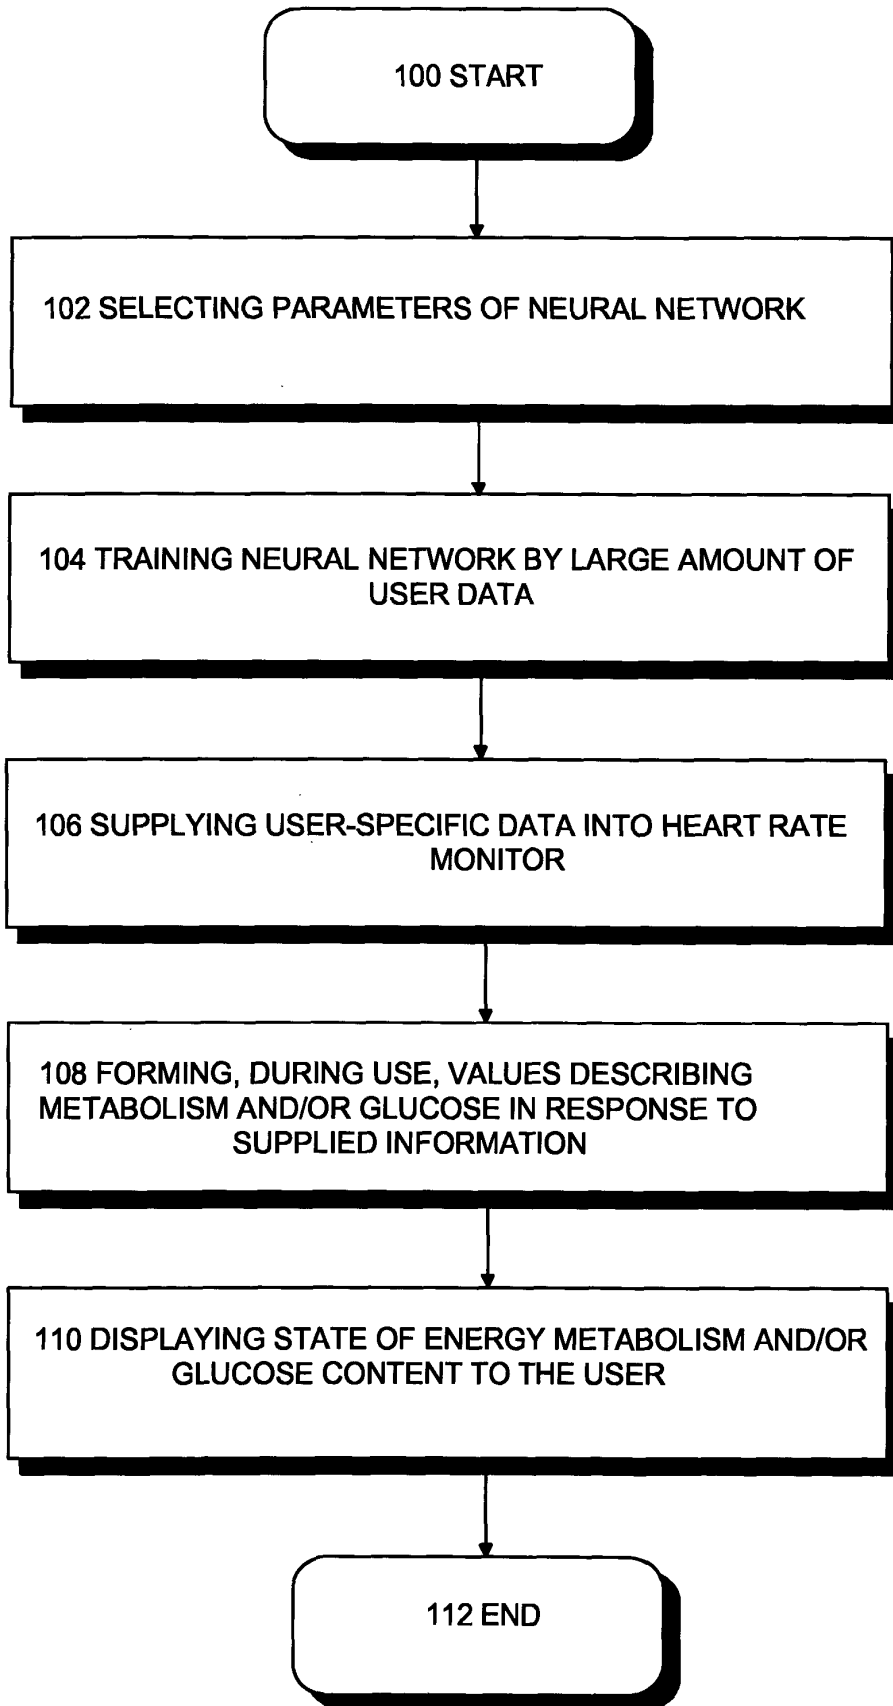


FIG. 1

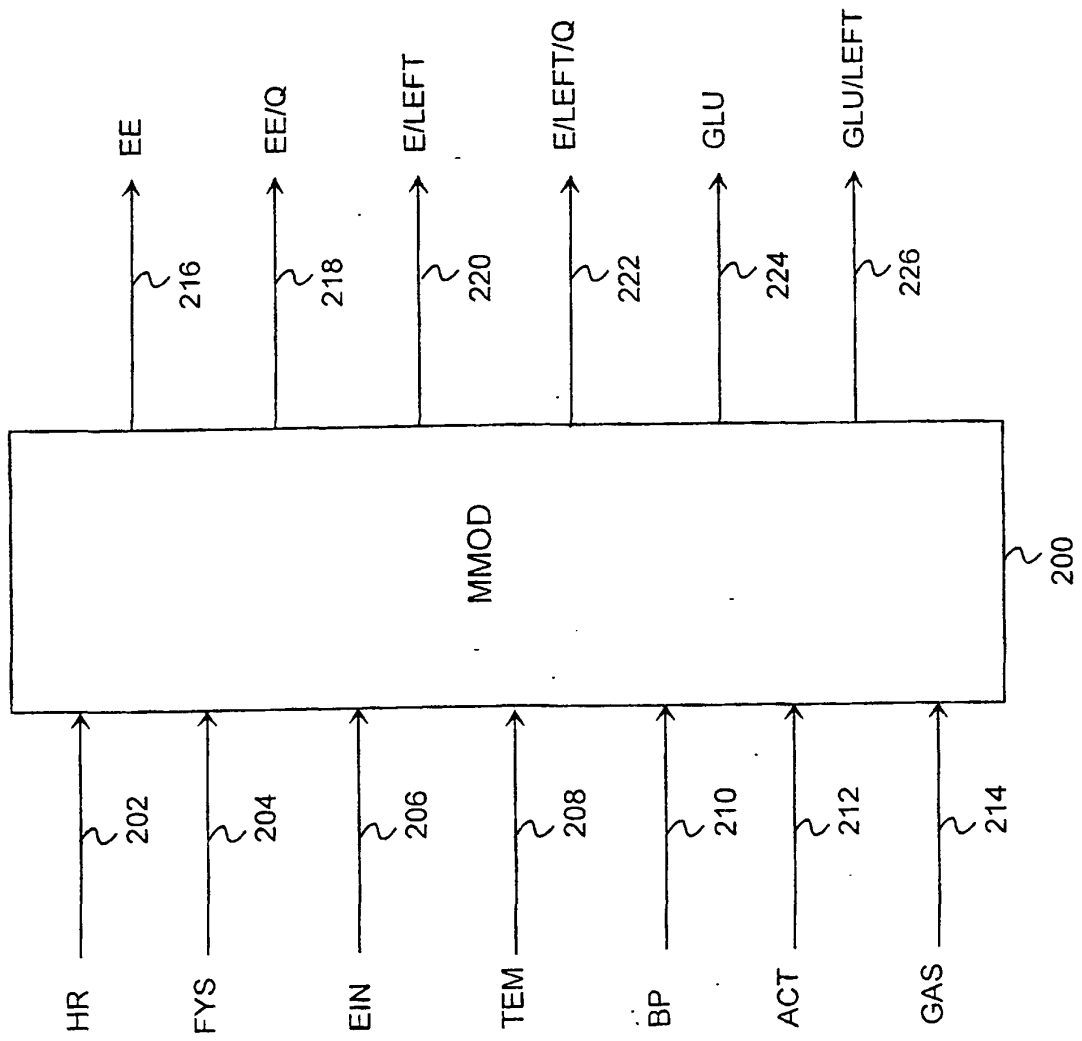


FIG. 2

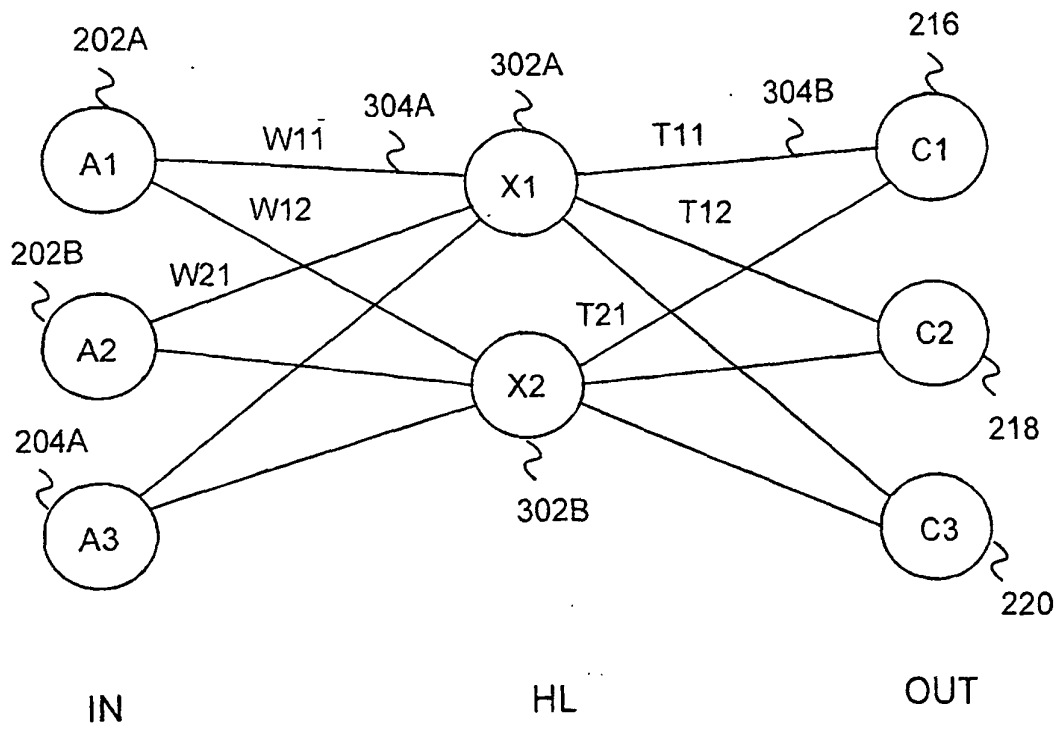


Fig. 3A

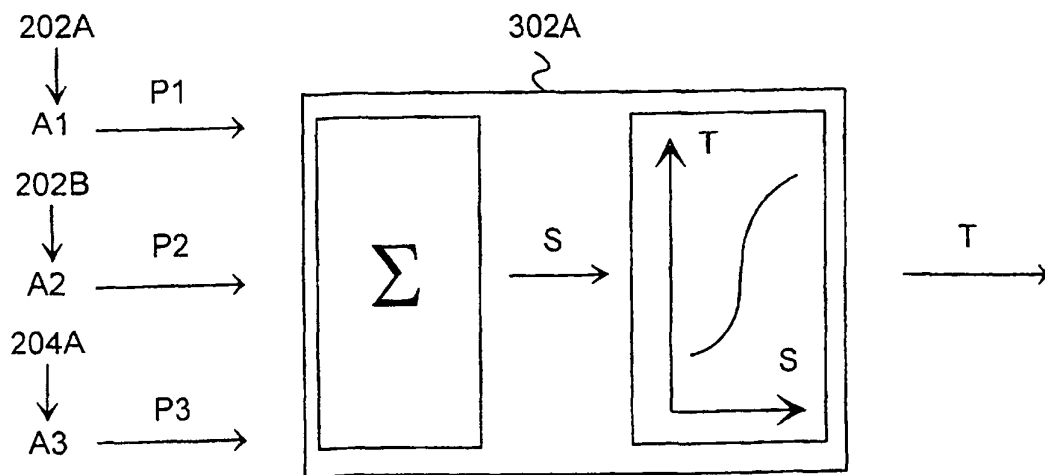


Fig. 3B

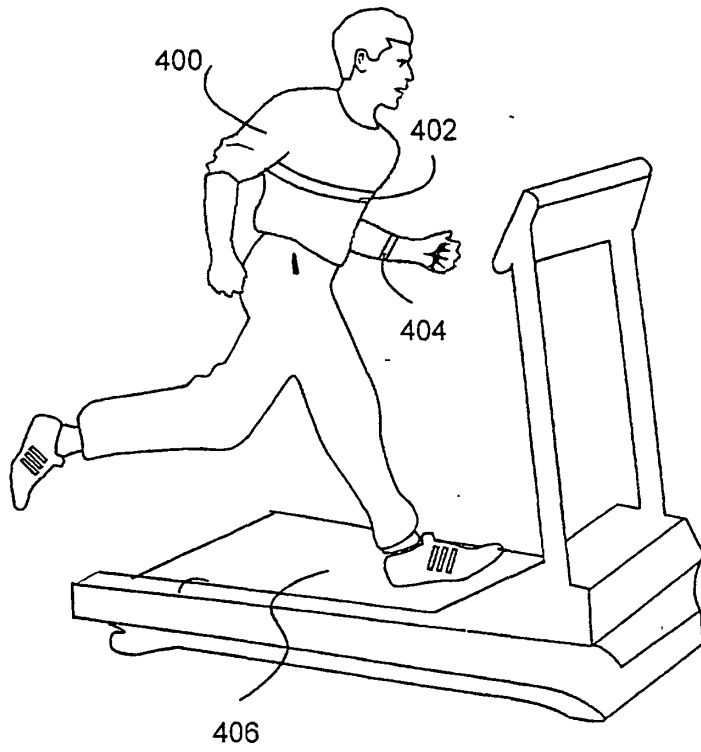
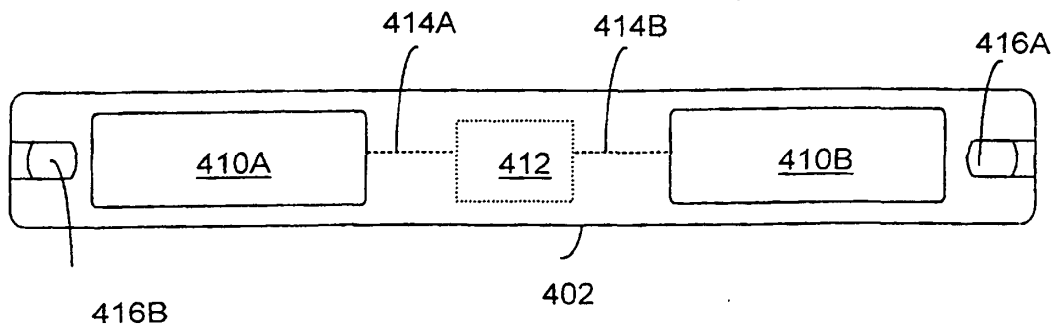


FIG. 4A



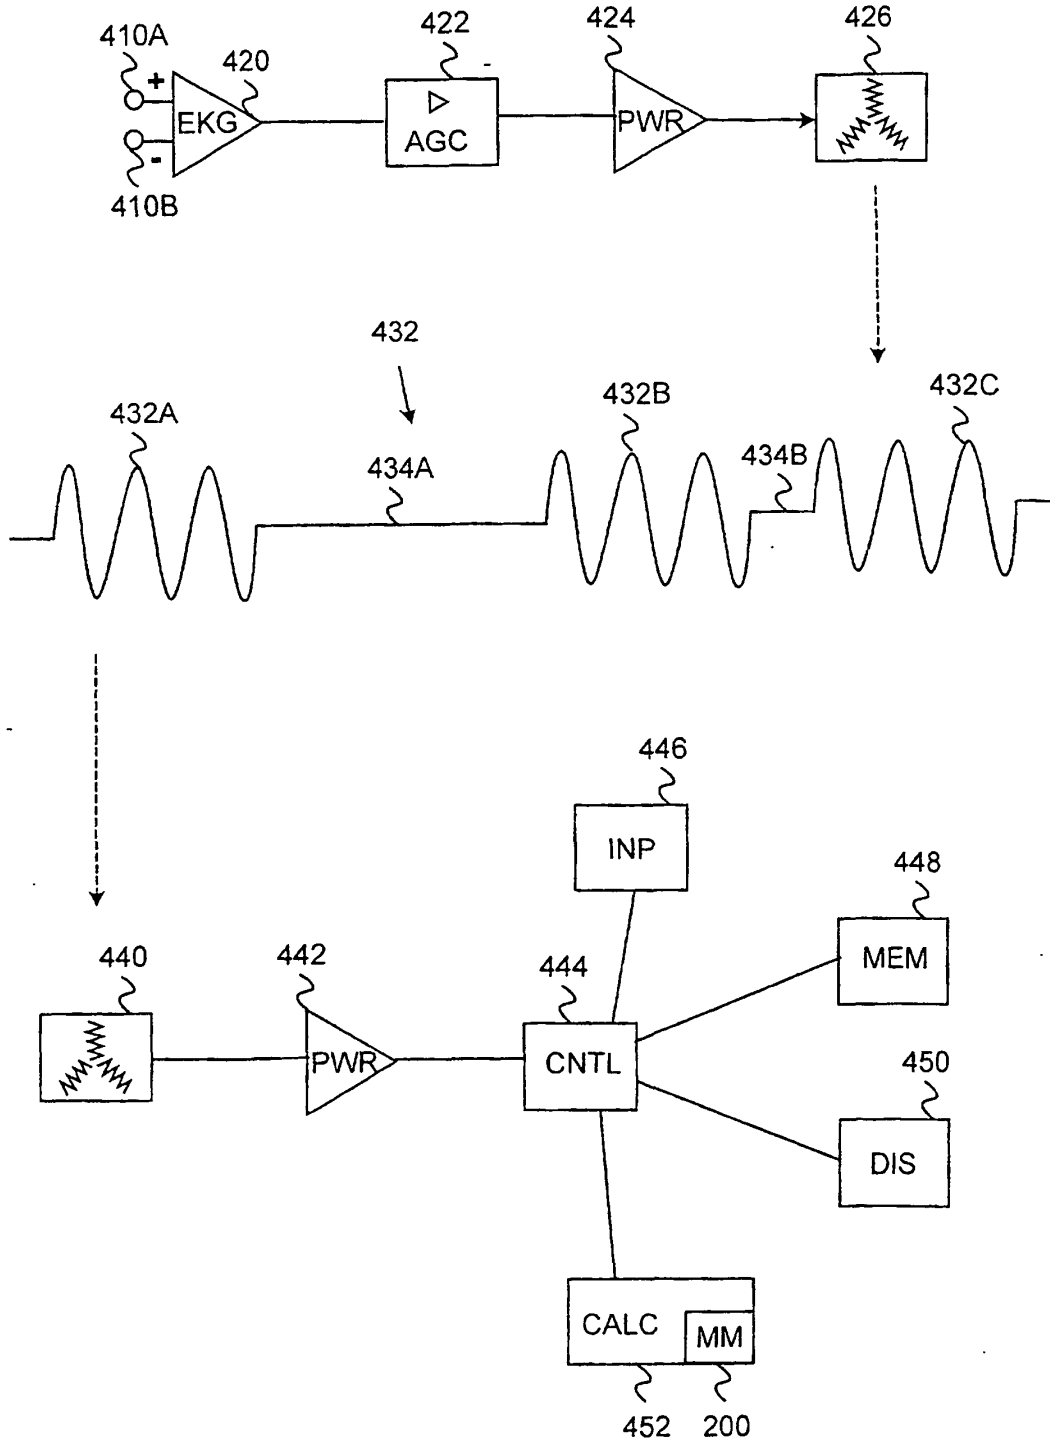


FIG. 4C

专利名称(译)	与人体能量代谢有关的测量		
公开(公告)号	EP1127544B1	公开(公告)日	2005-12-14
申请号	EP2001660035	申请日	2001-02-19
[标]申请(专利权)人(译)	博能电子公司		
申请(专利权)人(译)	Polar Electro Oy公司		
当前申请(专利权)人(译)	Polar Electro Oy公司		
[标]发明人	HEIKKILA MR ILKKA NISSILA MR SEPPO		
发明人	HEIKKILÄ, MR. ILKKA NISSILÄ, MR. SEPPO		
IPC分类号	A61B5/00 A61B5/22		
CPC分类号	A61B5/14532 A61B5/222 A61B5/7267 Y10S128/925		
优先权	2000000416 2000-02-23 FI		
其他公开文献	EP1127544A1		
外部链接	Espacenet		

摘要(译)

一种心率测量装置，其特征在于，心率测量装置（402至404）包括计算单元（452），其包括数学模型（200），其被布置成形成人的能量代谢水平（216）作为模型的输出参数。使用每个描述人的生理特征的一个或多个心率参数（202）和一个或多个生理参数（204）作为模型的输入参数，心率测量装置还包括用于显示形成的信息的显示装置（450）在计算单元（452）中。

