

(19)



(11)

**EP 2 526 856 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**28.11.2012 Bulletin 2012/48**

(51) Int Cl.:  
**A61B 5/00** <sup>(2006.01)</sup> **A61B 5/0205** <sup>(2006.01)</sup>  
**A61B 5/024** <sup>(2006.01)</sup>

(21) Application number: **11167745.6**

(22) Date of filing: **26.05.2011**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**

(72) Inventors:  
• **Van Den Heuvel, Teun**  
**5600 AE Eindhoven (NL)**  
• **Muehlsteff, Jens**  
**5600 AE Eindhoven (NL)**


(71) Applicant: **Koninklijke Philips Electronics N.V.**  
**5621 BA Eindhoven (NL)**

(74) Representative: **Damen, Daniel Martijn**  
**Philips**  
**Intellectual Property & Standards**  
**P.O. Box 220**  
**5600 AE Eindhoven (NL)**

(54) **Fever detection apparatus**

(57) The invention relates to a fever detection apparatus for detecting fever of a living being. A heart rate providing unit (3) provides a heart rate value and a peripheral physiological value providing unit (3) provides a peripheral physiological value, wherein a heart rate characteristics determination unit (4) determines heart rate characteristics from the heart rate value and a peripheral

characteristics determination unit (5) determines peripheral characteristics from the peripheral physiological value. A fever detection unit (6) detects fever depending on the heart rate characteristics and the peripheral characteristics. Since the heart rate characteristics and the peripheral characteristics are influenced by fever, the fever detection apparatus can be used to reliably and preferentially unobtrusively detect fever.

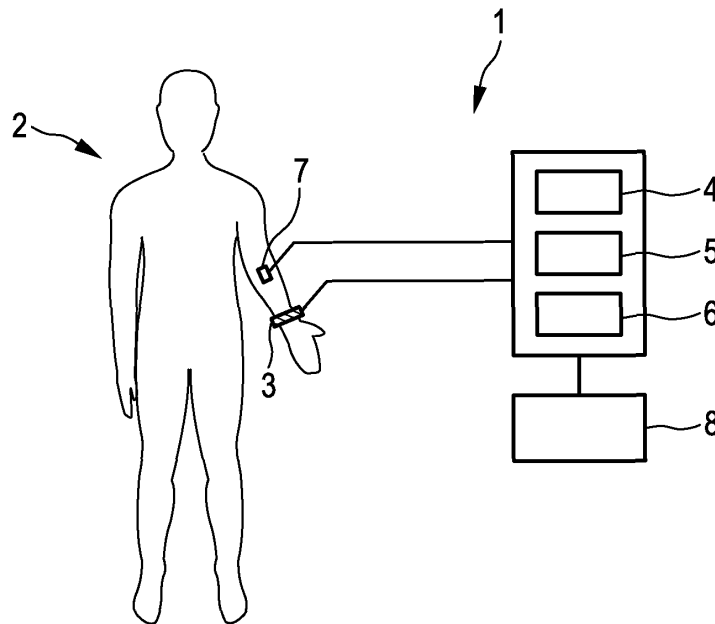

**FIG. 1**

**EP 2 526 856 A1**

**Description**

## FIELD OF THE INVENTION

**[0001]** The invention relates to a fever detection apparatus, a fever detection method and a fever detection computer program for detecting fever of a living being.

## BACKGROUND OF THE INVENTION

**[0002]** US 2005/0177064 A1 discloses a fever alarm system comprising a body temperature measurement device which includes a unit that continuously measures the body temperature and transmits the measurement through a radio frequency transmitter to a display unit. The body temperature is measured by measuring the skin temperature and an ambient room temperature and by determining the body temperature depending on the measured skin temperature and the measured ambient room temperature. The display unit includes a radio frequency receiver, an adjustable threshold alarm circuit and a display that shows the body temperature. The adjustable threshold alarm circuit is adapted to turn on an alarm whenever the measured body temperature rises above a defined threshold. However, the body temperature, which is determined as described above, may be increased, even if fever is not present, and fever may be present, even if the determined body temperature is not increased, thereby reducing the reliability of detecting fever.

## SUMMARY OF THE INVENTION

**[0003]** It is an object of the present invention to provide a fever detection apparatus, a fever detection method and a fever detection computer program for detecting fever of a living being, wherein the reliability of detecting fever can be improved.

**[0004]** In a first aspect of the present invention a fever detection apparatus for detecting fever of a living being is presented, wherein the fever detection apparatus comprises:

- a heart rate providing unit for providing a heart rate value being indicative of the heart rate of the living being measured over time,
- a peripheral physiological value providing unit for providing a peripheral physiological value being indicative of a peripheral physiological property of the living being measured over time,
- a heart rate characteristics determination unit for determining heart rate characteristics from the heart rate value measured over time,
- a peripheral characteristics determination unit for determining peripheral characteristics from the peripheral physiological value measured over time,
- a fever detection unit for detecting fever depending on the heart rate characteristics and the peripheral

characteristics.

**[0005]** Fever is characterized by an increased neural set point of the core body temperature control. At the onset of fever, the set point is higher than the initial core body temperature. The body therefore acts to increase the core body temperature by increasing heat production and preventing heat loss to its surroundings. Physiological mechanisms for the regulation of body heat production relate to metabolism, which in turn is strongly related to heart rate. A major physiological mechanism for the regulation of body heat loss involves regulation of the peripheral physiological properties like the skin temperature and/or the amount of superficial and peripheral blood perfusion. The heart rate characteristics determined from the heart rate measured over time and the peripheral characteristics determined from the peripheral physiological value measured over time are therefore influenced by fever and can therefore be combined and used for improving the reliability of detecting fever.

**[0006]** The heart rate providing unit can be a heart rate measuring unit for measuring the heart rate values, or a storing unit for storing already measured heart rate values, wherein the heart values can be retrieved from the storing unit for retrieving the same. Moreover, the heart rate providing unit can also be a receiving unit for receiving the heart rate values from, for example, a corresponding measuring unit and for providing the received heart rate values. Similarly, also the peripheral physiological value providing unit or optional further providing units for providing further properties can be, for example, a measuring unit, a storing unit or a receiving unit.

**[0007]** The heart rate characteristics and the peripheral characteristics can be temporal characteristics, in particular, temporal patterns.

**[0008]** The living being is preferentially a person or a warm-blooded animal.

**[0009]** The peripheral physiological value is indicative of a physiological property of the periphery of the living being, in particular, of the skin and/or an extremity like a finger of the living being. The heart rate value is, for example, the pulse rate. However, the heart rate value can also be any other value being indicative of the heart rate.

**[0010]** In a preferred embodiment, the heart rate and the peripheral physiological property are measured unobtrusively, i.e. the fever detection apparatus is preferentially adapted to unobtrusively detect fever with improved reliability.

**[0011]** It is preferred that the fever detection unit is adapted to apply predefined fever detection rules to the heart rate characteristics and the peripheral characteristics. It is also preferred that a) the heart rate characteristics and the peripheral characteristics are determined such and b) the fever detection rules are predefined such that fever is detected, if the heart rate value increases and the peripheral physiological value decreases in a same time interval. In particular, the fever detection unit is adapted to detect fever, if the increase of the heart rate

value and the decrease of the peripheral physiological value are measured simultaneously.

**[0012]** The fever detection unit can be adapted to determine a heart rate gradient from the heart rate value measured over time as heart rate characteristics and a peripheral gradient from the peripheral physiological value measured over time as peripheral characteristics. The gradient is preferentially determined by determining how the amplitude of the respective value has changed between two different points in time. This allows determining and quantifying changes in the heart rate and in the peripheral physiological value in a relatively simple way.

**[0013]** In an embodiment, the fever detection rules are predefined such that fever is detected, if the heart rate gradient is positive indicating a heart rate increase and the peripheral gradient is negative indicating a decrease of the peripheral physiological property within a same time interval. In particular, the fever detection rules are predefined such that fever is detected, if simultaneously the peripheral gradient is negative indicating a decrease of the peripheral physiological value and the heart rate gradient is positive indicating a heart rate increase within a same time interval. Moreover, the fever detection rules can be predefined such that fever is detected, if additionally the absolute peripheral gradient is larger than a peripheral threshold and the absolute heart rate gradient is larger than a heart rate threshold. The peripheral and heart rate thresholds are, for example, predefined constant thresholds or adaptive threshold, which may depend on a property of the living being like the body posture. This allows detecting fever only if a substantial decrease in the peripheral physiological value, for example, in skin temperature and/or in peripheral perfusion, is detected together with a substantial increase in heart rate. This further improves the reliability of detecting fever.

**[0014]** In a further embodiment, the heart rate providing unit is adapted to provide an initial heart rate value and an actual heart rate value, wherein the peripheral physiological value providing unit is adapted to provide an initial physiological value and an actual physiological value, wherein the fever detection unit is adapted to determine a heart rate change based on the provided initial and actual heart rates as heart rate characteristics and a peripheral change based on the provided initial and actual physiological values as peripheral characteristics, and wherein the fever detection rules are predefined such that fever is detected, if the heart rate change indicates an increase of the heart rate and the peripheral change indicates a decrease of the peripheral physiological value in a same time interval. The initial values can be regarded as basal values, which can be measured at the beginning of a monitoring process and/or after a condition of the living being like the body posture has been changed. The heart rate change and the peripheral change can be, for example, differences or ratios. If, for instance, at the beginning of a monitoring process it has been determined by, for example, a nurse or a caregiver that the living being does not have fever, the fever detection apparatus

can continuously determine the heart rate change and the peripheral change and detect fever depending on the determined heart rate and peripheral changes. Also in this embodiment, the fever detection rules can be predefined such that fever is detected, if additionally the absolute heart rate change and the absolute peripheral change are larger than corresponding peripheral and heart rate thresholds. These thresholds can be predefined constant thresholds or adaptive thresholds, which depend, for instance, on the initial heart rate value and the initial peripheral value.

**[0015]** It is further preferred that the fever detection unit is adapted to apply predefined fever probability rules to the peripheral characteristics and the heart rate characteristics for determining a fever property value being indicative of the probability of having fever. Thus, the fever detection unit cannot only be adapted to perform a binary decision whether fever is present or not, but the fever detection unit can also be adapted to determine the probability of having fever. For example, the fever probability rules can provide assignments between a) different fever probability values and b) peripheral characteristics and heart rate characteristics. The fever probability rules, i.e., for example, the assignments, can be determined by determining the percentage of situations in which the respective characteristics have been found to relate to fever. The probability values can be defined such that a probability of 0 % relates to a condition, in which fever is surely not present, and a probability value of 100 % corresponds to a condition, in which the living being surely has fever. The probability values between 0 % and 100 % can be defined with respect to any convenient scale. The fever probability rules can also include the fever detection rules, i.e. if fever probability rules are used, it can be defined that fever is detected if the probability value is larger than a probability threshold, in particular, if the probability value is 100 %. Further, separate fever detection rules are then not necessarily needed. Also the probability threshold can be a predefined constant threshold or an adaptive threshold, which may depend on a property of the living being like the body posture.

**[0016]** In a preferred embodiment, the fever detection unit is further adapted to detect recovery from fever depending on the heart rate characteristics and the peripheral characteristics. The fever detection unit can be adapted to apply predefined fever recovery rules to the peripheral characteristics and the heart rate characteristics for detecting recovery from fever. In particular, the fever detection unit can be adapted to apply predefined fever recovery rules to the peripheral characteristics and the heart rate characteristics for detecting recovery from fever, wherein a) the peripheral characteristics and the heart rate characteristics are determined such and b) the fever recovery rules are predefined such that recovery from fever is detected, if the peripheral physiological value increases and the heart rate decreases in a same time interval. Thus, if fever has been detected, the recovery

from fever can also be detected by the fever detection unit.

**[0017]** The fever detection apparatus can further comprise a property measurement unit for measuring a further property of the living being or a property of the surrounding of the living being, wherein the fever detection unit is adapted to detect fever depending on the peripheral physiological value, the heart rate value and the property measured by the property measurement unit. In an embodiment, the property measurement unit is adapted to measure at least one of: ambient temperature, respiratory rate, physical activity type, physical activity level, body posture, body movement. The further property measured by the property measurement unit can also be used to determine the fever probability value and/or to detect a recovery from fever. Moreover, the above mentioned rules can be adapted to be also applied to the further property, in order to further improve the reliability of detecting fever, recovery from fever and/or the reliability of determining the fever probability. For example, thresholds used by the rules can depend on the measured further property. In an embodiment, the above mentioned peripheral and/or heart rate thresholds can depend on the posture of the living being.

**[0018]** In an embodiment, the property measurement unit measures the movement and/or relative height of the part of the living being at which the peripheral physiological property is measured. For example, the movement and/or relative height of the hand or arm can be measured, and the fever detection unit can be adapted such that a fever detection procedure is only performed, if the movement is below a predefined threshold and/or the relative height is within a predefined acceptance window. Furthermore, the fever detection unit may be adapted to determine whether fever is present or not depending on a perfusion measurement, only if the movement is below the predefined threshold and/or the relative height is within the predefined acceptance window and optionally only after a predefined time interval after the movement was above the predefined threshold and/or the relative height was outside of the predefined acceptance window. The movement can be measured by using, for example, an accelerometer. The measurement of the relative height can be performed by using, for example, a barometer. The relative height can be determined with respect to a reference height which can be a height measured at the beginning of the monitoring process. For example, the relative height can be the ratio of the actual height to the reference height. The property measurement unit can be adapted to automatically measure the reference height, when a fever monitoring process starts, or the property measurement unit can be adapted to allow a user like a nurse or care giver to trigger a determination of the reference height, in particular, if the person is in a predefined posture, for which the fever detection apparatus may be calibrated.

**[0019]** The fever detection apparatus preferentially further comprises an output unit for outputting a signal, if

fever has been detected.

**[0020]** It is also preferred that the heart rate providing unit is a heart rate measuring unit and the peripheral physiological value providing unit is a peripheral measuring unit, wherein the heart rate measuring unit and peripheral measuring unit are combined in a pulse oximeter for measuring a pulse rate as the heart rate value and a perfusion value as the peripheral physiological value. This allows measuring the heart rate value and the peripheral physiological value relatively easily with a single measurement device, which can be attached to the living being and which may further be used to serve other functions like blood oxygenation monitoring.

**[0021]** In a further aspect of the present invention a fever detection method for detecting fever of a living being is presented, wherein the fever detection method comprises:

- providing a heart rate value being indicative of the heart rate of the living being measured over time by a heart rate measuring unit,
- providing a peripheral physiological value being indicative of a peripheral physiological property of the living being measured over time by a peripheral measuring unit,
- determining heart rate characteristics from the heart rate value measured over time by a heart rate characteristics determination unit,
- determining peripheral characteristics from the peripheral physiological value measured over time by a peripheral characteristics determination unit,
- detecting fever depending on the heart rate characteristics and the peripheral characteristics by a fever detection unit.

**[0022]** In a further aspect of the present invention a fever detection computer program for detecting fever of a living being is presented, wherein the fever detection computer program comprises program code means for causing a fever detection apparatus as defined in claim 1 to carry out the steps of the fever detection method as defined in claim 14, when the fever detection computer program is run on a computer controlling the fever detection apparatus.

**[0023]** It shall be understood that fever detection apparatus of claim 1, the fever detection method of claim 14 and the fever detection computer program of claim 15 have similar and/or identical preferred embodiments as defined in the dependent claims.

**[0024]** It shall be understood that a preferred embodiment of the invention can also be any combination of the dependent claims with the respective independent claim.

**[0025]** These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0026]**

Fig. 1 shows schematically and exemplarily an embodiment of a fever detection apparatus for detecting fever of a living being,

Fig. 2 shows a heart rate value and a peripheral physiological value measured over time in a situation, in which fever is detected,

Fig. 3 shows schematically and exemplarily a heart rate value and a peripheral physiological value measured over time in a situation, in which fever is not detected, and

Fig. 4 shows a flowchart exemplarily illustrating an embodiment of a fever detection method for detecting fever of a living being.

## DETAILED DESCRIPTION OF EMBODIMENTS

**[0027]** Fig. 1 shows schematically and exemplarily an embodiment of a fever detection apparatus for detecting fever of a living being. The living being is, in this embodiment, a person 2. However, in another embodiment the living being can also be an animal. The fever detection apparatus 1 comprises a combined measuring unit 3 including a heart rate measuring unit for measuring a heart rate value being indicative of the heart rate of the person 2 over time and a peripheral measuring unit for measuring a peripheral physiological value being indicative of a peripheral physiological property of the person 2 over time. In particular, the combined measuring unit 3 is adapted to measure the pulse rate as heart rate value and to measure at least one of a skin temperature value being indicative of a skin temperature of the person 2 and a peripheral perfusion value being indicative of the blood perfusion in the periphery of the person 2 as the peripheral physiological value. In this embodiment, the combined measuring unit 3 is attached to an arm of the person 2 and measures the pulse rate and at least one of the skin temperature and the superficial blood perfusion as the peripheral physiological value. For measuring the pulse rate and the superficial blood perfusion a pulse oximeter is preferentially used as the combined measuring unit 3.

**[0028]** The fever detection apparatus 1 further comprises a heart rate characteristics determination unit 4 for determining heart rate characteristics from the heart rate measured over time and a peripheral characteristics determination unit 5 for determining peripheral characteristics from the peripheral physiological value measured over time. The heart rate characteristics and the peripheral characteristics can be temporal characteristics defining a temporal pattern. For example, the heart rate characteristics and the peripheral characteristics describe how the heart rate or the peripheral physiological value increase or decrease in a certain time interval.

**[0029]** The fever detection apparatus 1 further com-

prises a fever detection unit 6 for detecting fever depending on the heart rate characteristics and the peripheral characteristics. In particular, the fever detection unit 6 is adapted to apply predefined fever detection rules to the heart rate characteristics and the peripheral characteristics, wherein a) the heart rate characteristics and the peripheral characteristics are determined such and b) the fever detection rules are predefined such that fever is detected, if the heart rate value increases and the peripheral physiological value decreases in a same time interval. The fever detection unit 6 is preferentially adapted to detect fever, if a substantial increase of the heart rate value and a substantial decrease of the peripheral physiological value are measured simultaneously. Such a situation is schematically and exemplarily shown in Fig. 2.

**[0030]** Fig. 2 shows schematically and exemplarily the measured peripheral physiological value 9 depending on time and the measured heart rate value 10 depending on time. The peripheral physiological value 10 shows an increase 12 and the heart rate value shows a decrease 11 simultaneously, thereby allowing the fever detection unit 6 to detect fever.

**[0031]** Fig. 3 shows schematically and exemplarily other behaviors of the peripheral physiological value 9 and the heart rate value 10. Also in Fig. 3 the peripheral physiological value shows a decrease 11. However, at the time, at which the peripheral physiological value decreases, the heart rate value 10 does not increase. Moreover, also the heart rate value 10 shows an increase 12, but at the time, at which this increase 12 is present, there is no substantial decrease of the peripheral physiological value 9. Thus, in the situation shown in Fig. 3 the fever detection unit 6 will not detect fever.

**[0032]** In order to automatically detect fever, the fever detection unit can be adapted to, for example, determine a heart rate gradient from the heart rate value measured over time as heart rate characteristics and a peripheral gradient from the peripheral physiological value measured over time as peripheral characteristics, wherein the fever detection rules can be predefined such that fever is detected, if the heart rate gradient is positive indicating the heart rate increase and the peripheral gradient is negative indicating a decrease of the peripheral physiological property within a same time interval, in particular, simultaneously. In order to consider only substantial increases and decreases, the fever detection rules can be predefined such that fever is detected only, if additionally the absolute peripheral gradient is larger than a predefined peripheral threshold and the absolute heart rate gradient is larger than a predefined heart rate threshold.

**[0033]** The fever detection rules, for example, the temporal length of the same time interval, the peripheral threshold, the heart rate threshold, et cetera, can be determined by calibration measurements, wherein the heart rate characteristics and the peripheral characteristics are determined, while it is known whether the living being has fever or not, for example, by performing a parallel

continuous measurement of the core body temperature using a rectal probe, and wherein the rules are predefined such that, if they are applied to the determined heart rate characteristics and peripheral characteristics, the known fever result, i.e. whether the living being has fever or not, is achieved.

**[0034]** The fever detection unit 6 can be further adapted to apply predefined fever probability rules to the peripheral characteristics and the heart rate characteristics for determining a fever property value being indicative of the probability of having fever. Thus, the fever detection unit can be adapted to not only provide a binary decision, according to which the living being has fever or not, but also a fever probability can be provided. Assignments between a) the peripheral characteristics and the heart rate characteristics and b) the probability values, which can define the fever probability rules, can be determined by determining the percentage of situations in which the respective characteristics have been found to relate to fever. The fever probability can therefore also be regarded as being an uncertainty measure to the fever detection.

**[0035]** The fever detection unit 6 is preferentially further adapted to detect recovery from fever depending on the heart rate characteristics and the peripheral characteristics. The fever detection unit 6 can be adapted to apply predefined fever recovery rules to the peripheral characteristics and the heart rate characteristics for detecting recovery from fever, wherein the predefined fever recovery rules are preferentially predefined such that recovery from fever is detected, if the peripheral physiological value substantially increases and the heart rate substantially decreases in the same time interval, in particular, simultaneously. Also this situation can be determined by, for example, determining corresponding gradients and comparing the absolute values of these gradients with corresponding thresholds.

**[0036]** The fever detection apparatus 1 can comprise a property measurement unit 7 for measuring a further property of the person 2 or a property of the surrounding of the person 2, wherein the fever detection unit 6 can be adapted to detect fever depending on the peripheral physiological value, the heart rate and the property measured by the property measurement unit. The measured property is, for example, the ambient temperature, the respiratory rate, the physical activity type, the physical activity level, the body posture, the body movement, the relative height of the combined measuring unit 3, et cetera. One or several property measurement units can be provided for measuring one or several of these properties. If one or several of these properties are also used for, for example, detecting fever, detecting a recovery from fever, and/or a probability of having fever, the corresponding rules are adapted such that they can be applied to the heart rate, the peripheral physiological value and the one or several further properties. For example, thresholds used by the rules can depend on the measured further property. In an embodiment, the above men-

tioned peripheral and/or heart rate thresholds can depend on the posture of the living being.

**[0037]** The fever detection apparatus 1 further comprises an output unit 8 for outputting a signal, if fever has been detected. For example, the output unit 8 can be a display showing a corresponding warning.

**[0038]** Fig. 4 shows a flowchart exemplarily illustrating an embodiment of a fever detection method for detecting fever of a living being.

**[0039]** In step 101, the heart rate value being indicative of the heart rate of the living being and the peripheral physiological value being indicative of a peripheral physiological property of the living being are measured over time by the combined measuring unit 3 including the heart rate measuring unit and the peripheral measuring unit. For example, the skin temperature or the peripheral perfusion index is measured as the peripheral physiological value.

**[0040]** In step 102, heart rate characteristics are determined from the heart rate measured over time by the heart rate characteristics determination unit 4 and peripheral characteristics are determined from the peripheral physiological value measured over time by the peripheral characteristics determination unit 5. In step 103, the fever detection unit 6 detects whether the living being has fever or not depending on the heart rate characteristics and the peripheral characteristics. For example, fever is detected if the heart rate characteristics and the peripheral characteristics indicate that simultaneously a substantial increase of the heart rate and a substantial decrease of the peripheral physiological value are present. In step 104, the output unit 8 outputs whether fever has been detected or not.

**[0041]** The detection of fever is of major medical interest, since it may indicate infection. Moreover, very high fever poses a direct medical risk itself, as critical body functions tend to fail with high temperatures.

**[0042]** Fever is characterized by an increased neural set point for core body temperature control. At the onset of fever, the set point is higher than the initial core body temperature. The body therefore acts to increase the core body temperature by increasing heat production and preventing heat loss to its surroundings. These effects can subside somewhat as soon as the core body temperature matches the new, elevated neural set point. With recovery from fever, opposite effects occur: the set point is lowered so that the elevated core body temperature is experienced as too high, and the body acts to maximize heat loss and minimize heat production.

**[0043]** Physiological mechanisms for the regulation of body heat production relate to metabolism, which in turn is strongly related to the heart rate and, thus, the pulse rate. Therefore, the onset of fever can be associated with increased heart and pulse rates. A major physiological mechanism for the regulation of body heat loss involves regulation of the amount of superficial and peripheral blood perfusion: if heat is to be conserved, this perfusion may be minimized, most clearly so in the extremities.

Therefore, the onset of fever can also be associated with a decreased peripheral perfusion index (PI), which is a measure of the degree of blood perfusion in, for example, a finger. Similarly, recovery from fever can be associated with an increased PI. The decreased perfusion can also lead to a decreased skin temperature such that a decreased skin temperature can also be associated with the onset of fever. Correspondingly, recovery from fever can be associated with an increased skin temperature.

**[0044]** The fever detection apparatus and method are therefore preferentially adapted to make use of combined temporal pattern detection in a) PI and/or skin temperature and b) pulse/heart rate, and with that optionally make use of pulse oximetry, for the purpose of automatic fever detection.

**[0045]** Common methods for fever detection involve observation or estimation of core body temperature. Since core body temperature cannot be observed directly from the outside of the body, these methods somehow have to compromise either reliability because of imperfection in estimation or patient comfort because of obtrusiveness or even invasiveness. Moreover, many of such methods require effort from a medically skilled person and are not feasible for continuous monitoring. The fever detection apparatus and method are preferentially adapted to overcome at least one of these disadvantages.

**[0046]** As already mentioned above, the fever detection apparatus and method are preferentially adapted to make use of combined information on a) PI and/or skin temperature and b) pulse rate, in particular, their changes over time, for the purpose of fever detection. Preferentially, temporal patterns in a) PI and/or skin temperature and b) pulse rate, in particular, their combinations, may be used for automatic detection of fever, i.e. the onset of fever, making observation or estimation of core temperature preferentially largely redundant.

**[0047]** The fever detection apparatus and method comprises at least some means to observe PI or skin temperature and some means to observe pulse rate/heart rate. A well known system to observe PI and pulse rate is a pulse oximeter which may be comprised by the fever detection apparatus. The observations over time, in particular, their changes, are recorded automatically. An automatic process is then provided to compare the records to preset criteria for the detection of onset of fever, which criteria include preferentially at least a) a substantial decrease in PI and/or skin temperature together with b) a substantial increase in pulse rate. Once it has been established that the detection criteria have been met, the detection of fever is communicated, for example, as a warning to a user or, more generally, as a message to an external system.

**[0048]** The fever detection apparatus and method are preferentially adapted such that, in a first processing level, both a) PI and/or skin temperature and b) pulse/heart rate are sampled. Preferentially, samples are subsequently fed into chronological lists of recent values. Based on these lists and on preset time and amplitude

parameters, a) substantial decreases of PI or skin temperature and b) substantial increases of pulse/heart rate are detected. If both are detected simultaneously, detection of fever onset is constituted and communicated to an external system.

**[0049]** The sampling, recording, detection and messaging steps can be implemented on a dedicated electronic platform or on a personal computer, for example. For a wireless implementation, radio communication may be established to link any lower processing level to the subsequent level. Appropriate settings for parameters such as sampling rates and detection criteria like rates of increase and decrease, time windows, et cetera can be determined empirically.

**[0050]** Besides a) PI and/or skin temperature and b) pulse rate, also any, several or all of skin temperature, ambient temperature, respiratory rate, physical activity type, physical activity level and body posture may be observed and sampled to serve more accurate detection of fever onset, e.g. through improved sensitivity or targeted false alarm reduction. Typical fever related patterns in these properties, in particular, in combinations of these properties, can be determined empirically before application.

**[0051]** Especially in embodiments with PI observation on the hand or arm, it is preferred to also observe and consider the movement and/or relative height of the hand or arm, since these can affect PI substantially leading to false alarms if ignored. For example, PI observations may be ignored from the start until some time after arm movement as observed, for example, through an accelerometer.

**[0052]** In an above described embodiment, the fever detection apparatus and method are adapted to detect recovery from fever, if PI and/or skin temperature increases. However, additional measurements may also be employed to detect recovery from fever, as, for example, ambient temperature may drop because the patient typically feels hot and tries to establish a colder environment.

**[0053]** In an embodiment, at least parts of the fever detection apparatus like sensors, which may be combined with a battery, signal processing equipment and optional other components, may be integrated in a compact wireless device suited for attachment to the human body at a suitable location like a hand or an arm. Communication of fever detection messages may be realized through, for example, radio transmission, visual signs like blinking light-emitting diodes or an electronic display, or through sound via a loudspeaker.

**[0054]** The detection apparatus and method may be used in any situation where detection of fever is meaningful, especially in patient monitoring applications with medium to low risk levels like in general hospital wards and in home health care.

**[0055]** Although in the above described embodiments the fever detection apparatus is adapted to detect fever depending on heart rate characteristics and peripheral

characteristics in certain ways, the fever detection apparatus can also be adapted to detect fever depending on the heart rate characteristics and the peripheral characteristics in another way. For example, the heart rate providing unit can be adapted to provide an initial heart rate value and an actual heart rate value, and the peripheral physiological value providing unit can be adapted to provide an initial physiological value and an actual physiological value. The fever detection unit can then be adapted to determine a heart rate change based on the provided initial and actual heart rates as heart rate characteristics and a peripheral change based on the provided initial and actual physiological values as peripheral characteristics, wherein the fever detection rules can be predefined such that fever is detected, if the heart rate change indicates an increase of the heart rate and the peripheral change indicates a decrease of the peripheral physiological value in a same time interval. Thus, the fever detection apparatus can be adapted to detect fever depending on basal heart rate and peripheral values.

**[0056]** Other variations to the disclosed embodiments can be understood and effected by those skilled in the art in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims.

**[0057]** In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality.

**[0058]** A single unit or device may fulfill the functions of several items recited in the claims. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

**[0059]** Determinations like the determination of heart rate characteristics and peripheral characteristics and the detection of fever depending on the heart rate characteristics and the peripheral characteristics performed by one or several units or devices can be performed by any other number of units or devices. For example, steps 102 and 103 can be performed by a single unit or by any other number of different units. The determination, detection, calculation, et cetera steps and/or the control of the fever detection apparatus in accordance with the above described fever detection method can be implemented as program code means of a computer program and/or as dedicated hardware.

**[0060]** A computer program may be stored/distributed on a suitable medium, such as an optical storage medium or a solid-state medium, supplied together with or as part of other hardware, but may also be distributed in other forms, such as via the Internet or other wired or wireless telecommunication systems.

**[0061]** Any reference signs in the claims should not be construed as limiting the scope.

**[0062]** The invention relates to a fever detection apparatus for detecting fever of a living being. A heart rate providing unit provides a heart rate value and a peripheral physiological value providing unit provides a peripheral physiological value, wherein a heart rate characteristics

determination unit determines heart rate characteristics from the heart rate value and a peripheral characteristics determination unit determines peripheral characteristics from the peripheral physiological value. A fever detection unit detects fever depending on the heart rate characteristics and the peripheral characteristics. Since the heart rate characteristics and the peripheral characteristics are influenced by fever, the fever detection apparatus can be used to reliably and preferentially unobtrusively detect fever.

## Claims

1. A fever detection apparatus for detecting fever of a living being, the fever detection apparatus (1) comprising:
  - a heart rate providing unit (3) for providing a heart rate value being indicative of the heart rate of the living being (2) measured over time,
  - a peripheral physiological value providing unit (3) for providing a peripheral physiological value being indicative of a peripheral physiological property of the living being (2) measured over time,
  - a heart rate characteristics determination unit (4) for determining heart rate characteristics from the heart rate value measured over time,
  - a peripheral characteristics determination unit (5) for determining peripheral characteristics from the peripheral physiological value measured over time,
  - a fever detection unit (6) for detecting fever depending on the heart rate characteristics and the peripheral characteristics.
2. The fever detection apparatus as defined in claim 1, wherein the peripheral physiological value providing unit (3) is adapted to provide at least one of a skin temperature value being indicative of a skin temperature of the living being (2) and a peripheral perfusion value being indicative of the blood perfusion in the periphery of the living being (2) as the peripheral physiological value.
3. The fever detection apparatus as defined in claim 1, wherein the fever detection unit (6) is adapted to apply predefined fever detection rules to the heart rate characteristics and the peripheral characteristics.
4. The fever detection apparatus as defined in claim 3, wherein a) the heart rate characteristics and the peripheral characteristics are determined such and b) the fever detection rules are predefined such that fever is detected, if the heart rate value increases and the peripheral physiological value decreases in a same time interval.

5. The fever detection apparatus as defined in claim 4, wherein the fever detection unit (6) is adapted to determine a heart rate gradient from the heart rate value measured over time as heart rate characteristics and a peripheral gradient from the peripheral physiological value measured over time as peripheral characteristics.
6. The fever detection apparatus as defined in claim 5, wherein the fever detection rules are predefined such that fever is detected, if the heart rate gradient is positive indicating a heart rate increase and the peripheral gradient is negative indicating an increase of the peripheral physiological property within a same time interval.
7. The fever detection apparatus as defined in claim 6, wherein the fever detection rules are predefined such that fever is detected, if additionally the absolute peripheral gradient is larger than a peripheral threshold and the absolute heart rate gradient is larger than a heart rate threshold.
8. The fever detection apparatus as defined in claim 4, wherein the heart rate providing unit (3) is adapted to provide an initial heart rate value and an actual heart rate value, wherein the peripheral physiological value providing unit (3) is adapted to provide an initial physiological value and an actual physiological value, wherein the fever detection unit (6) is adapted to determine a heart rate change based on the provided initial and actual heart rates as heart rate characteristics and a peripheral change based on the provided initial and actual physiological values as peripheral characteristics, and wherein the fever detection rules are predefined such that fever is detected, if the heart rate change indicates an increase of the heart rate and the peripheral change indicates a decrease of the peripheral physiological value in a same time interval.
9. The fever detection apparatus as defined in claim 1, wherein the fever detection unit (6) is adapted to apply predefined fever probability rules to the peripheral characteristics and the heart rate characteristics for determining a fever property value being indicative of the probability of having fever.
10. The fever detection apparatus as defined in claim 1, wherein the fever detection unit (6) is further adapted to detect recovery from fever depending on the heart rate characteristics and the peripheral characteristics.
11. The fever detection apparatus as defined in claim 10, wherein the fever detection unit (6) is adapted to apply predefined fever recovery rules to the peripheral characteristics and the heart rate characteristics for detecting recovery from fever, wherein a) the peripheral characteristics and the heart rate characteristics are determined such and b) the fever detection rules are predefined such that recovery from fever is detected, if the peripheral physiological value increases and the heart rate decreases in a same time interval.
12. The fever detection apparatus as defined in claim 1, wherein the fever detection apparatus (1) further comprises a property providing unit (7) for providing a further measured property of the living being or a property of the surrounding of the living being, wherein the fever detection unit is adapted to detect fever depending on the peripheral physiological value, the heart rate and the property provided by the property measurement unit.
13. The fever detection apparatus as defined in claim 1, wherein the heart rate providing unit is a heart rate measuring unit and the peripheral physiological value providing unit is a peripheral measuring unit, wherein the heart rate measuring unit and peripheral measuring unit are combined in a pulse oximeter for measuring a pulse rate as the heart rate value and a perfusion value as the peripheral physiological value.
14. A fever detection method for detecting fever of a living being, the fever detection method comprising:
- providing a heart rate value being indicative of the heart rate of the living being measured over time by a heart rate providing unit,
  - providing a peripheral physiological value being indicative of a peripheral physiological property of the living being measured over time by a peripheral physiological value providing unit,
  - determining heart rate characteristics from the heart rate value measured over time by a heart rate characteristics determination unit,
  - determining peripheral characteristics from the peripheral physiological value measured over time by a peripheral characteristics determination unit,
  - detecting fever depending on the heart rate characteristics and the peripheral characteristics by a fever detection unit.
15. A fever detection computer program for detecting fever of a living being, the fever detection computer program comprising program code means for causing a fever detection apparatus as defined in claim 1 to carry out the steps of the fever detection method as defined in claim 14, when the fever detection computer program is run on a computer controlling the fever detection apparatus.

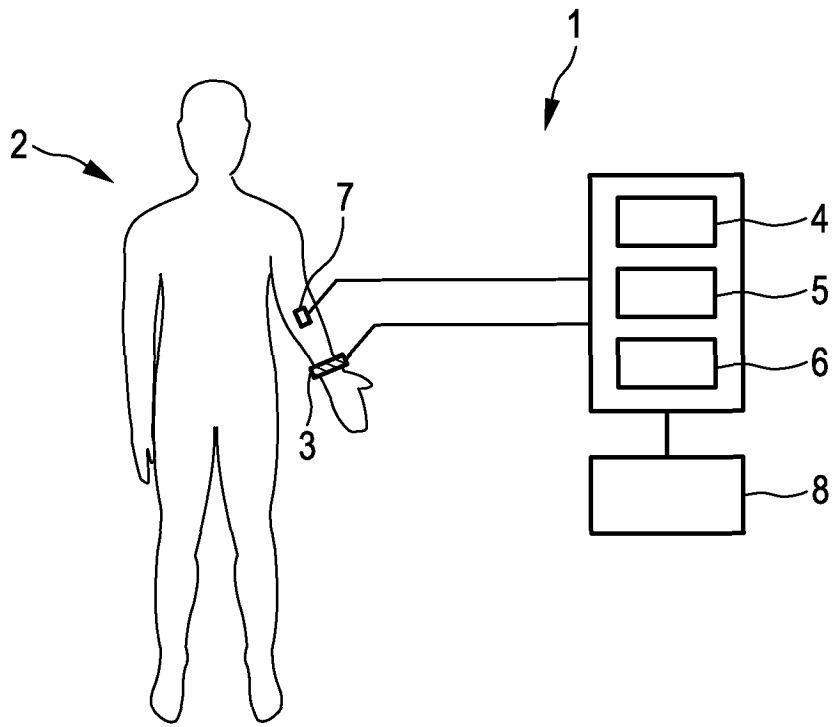


FIG. 1

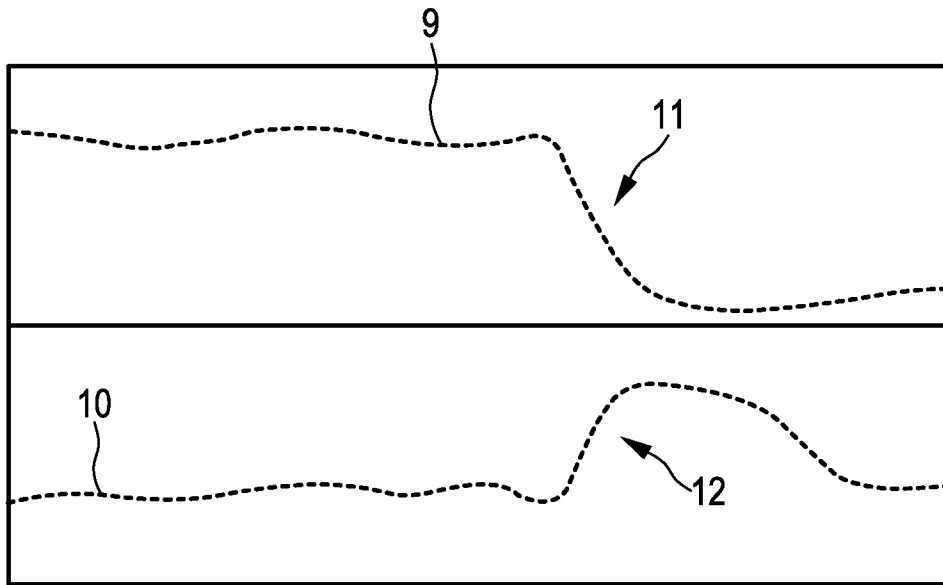


FIG. 2

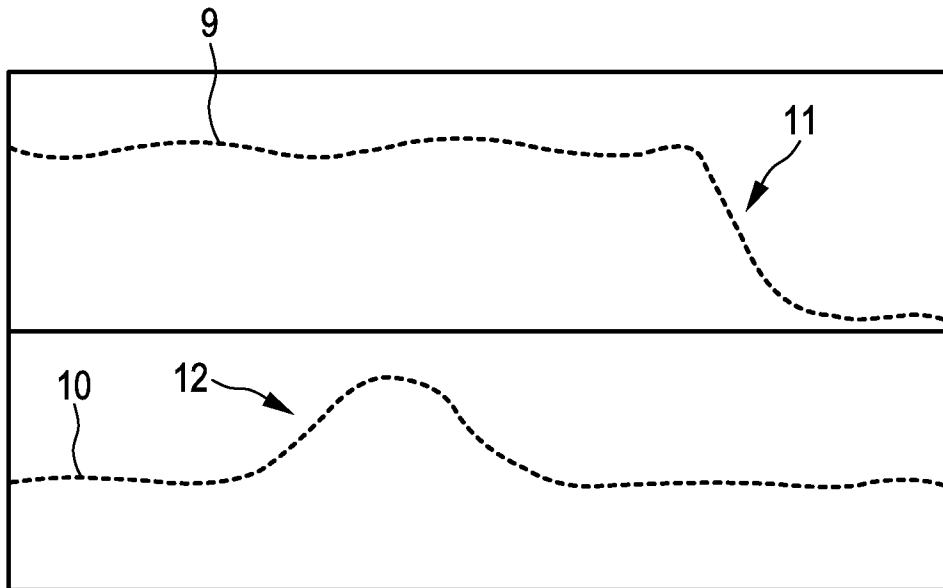


FIG. 3

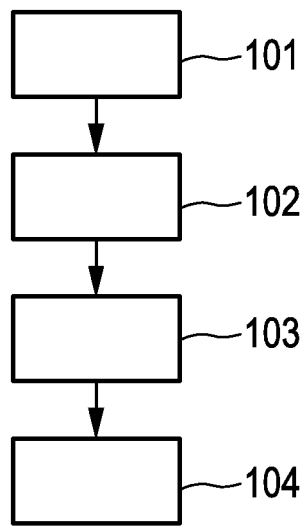


FIG. 4



EUROPEAN SEARCH REPORT

Application Number  
EP 11 16 7745

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2005/276309 A1 (KOCH JOCHIM [DE]) 15 December 2005 (2005-12-15) * paragraphs [0020] - [0022], [0024], [0027], [0032], [0034], [0035] * -----	1-13,15	INV. A61B5/00 A61B5/0205 A61B5/024
X	US 2001/044588 A1 (MAULT JAMES R [US]) 22 November 2001 (2001-11-22) * paragraphs [0012], [0017], [0069], [0070] * -----	1-13,15	
X	US 2008/221419 A1 (FURMAN DAN GUR [IL]) 11 September 2008 (2008-09-11) * paragraphs [0026], [0035], [0063] * -----	1-13,15	
A	US 2009/105560 A1 (SOLOMON DAVID [IL]) 23 April 2009 (2009-04-23) * paragraph [0018] * -----	4-9,11	
			TECHNICAL FIELDS SEARCHED (IPC)
			A61B G01K
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		9 November 2011	Vanderperren, Yves
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

2  
EPO FORM 1503 03/82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number  
EP 11 16 7745

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2005/276309 A1 (KOCH JOCHIM [DE]) 15 December 2005 (2005-12-15) * paragraphs [0020] - [0022], [0024], [0027], [0032], [0034], [0035] *	1-13,15	INV. A61B5/00 A61B5/0205 A61B5/024
X	US 2001/044588 A1 (MAULT JAMES R [US]) 22 November 2001 (2001-11-22) * paragraphs [0012], [0017], [0069], [0070] *	1-13,15	
X	US 2008/221419 A1 (FURMAN DAN GUR [IL]) 11 September 2008 (2008-09-11) * paragraphs [0026], [0035], [0063] *	1-13,15	
A	US 2009/105560 A1 (SOLOMON DAVID [IL]) 23 April 2009 (2009-04-23) * paragraph [0018] *	4-9,11	
			TECHNICAL FIELDS SEARCHED (IPC)
			A61B G01K
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		9 November 2011	Vanderperren, Yves
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

2  
EPO FORM 1503 03.82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 16 7745

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-11-2011

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005276309 A1	15-12-2005	DE 102004028359 A1 GB 2415050 A US 2005276309 A1	05-01-2006 14-12-2005 15-12-2005
US 2001044588 A1	22-11-2001	NONE	
US 2008221419 A1	11-09-2008	US 2008221419 A1 US 2008249379 A1 US 2008275321 A1 US 2008287800 A1	11-09-2008 09-10-2008 06-11-2008 20-11-2008
US 2009105560 A1	23-04-2009	NONE	

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20050177064 A1 [0002]

专利名称(译)	发热检测装置		
公开(公告)号	<a href="#">EP2526856A1</a>	公开(公告)日	2012-11-28
申请号	EP2011167745	申请日	2011-05-26
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	皇家飞利浦N.V.		
[标]发明人	VAN DEN HEUVEL TEUN MUEHLSTEFF JENS		
发明人	VAN DEN HEUVEL, TEUN MUEHLSTEFF, JENS		
IPC分类号	A61B5/00 A61B5/0205 A61B5/024		
CPC分类号	A61B5/02055 A61B5/0008 A61B5/01 A61B5/024 A61B5/02416 A61B5/02438 A61B5/026 A61B5/6824 A61B5/7275 A61B5/7282		
代理机构(译)	DAMEN , DANIEL马亭		
审查员(译)	VANDERPERREN , YVES		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

本发明涉及一种用于检测生物发热的发热检测装置。心率提供单元(3)提供心率值,并且外围生理值提供单元(3)提供外围生理值,其中心率特征确定单元(4)根据心率值确定心率特征和外围特征确定单元(5)根据外围生理值确定外围特征。发热检测单元(6)根据心率特征和外围特征来检测发热。由于心率特征和外围特征受到发热的影响,所以发热检测装置可用于可靠且优先地不引人注意地检测发热。

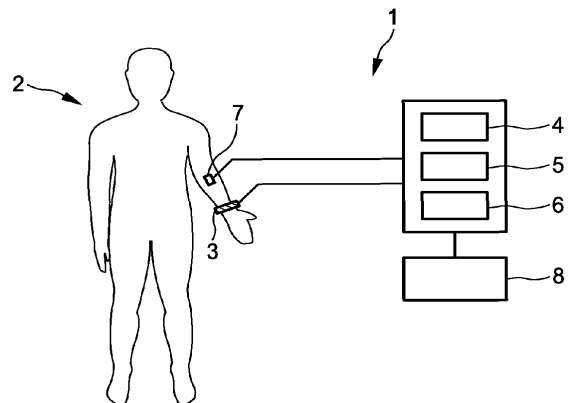


FIG. 1