

(19)



(11)

EP 3 102 099 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
19.07.2017 Bulletin 2017/29

(51) Int Cl.:
A61B 5/024^(2006.01) A61B 5/00^(2006.01)

(21) Application number: **15702991.9**

(86) International application number:
PCT/EP2015/051179

(22) Date of filing: **22.01.2015**

(87) International publication number:
WO 2015/117829 (13.08.2015 Gazette 2015/32)

(54) OPTICAL DEVICE FOR MEASURING A HEART RATE OF A USER

OPTISCHE VORRICHTUNG ZUR MESSUNG EINER HERZFREQUENZ EINES BENUTZERS
DISPOSITIF OPTIQUE DE MESURE DE FRÉQUENCE CARDIAQUE D'UN UTILISATEUR

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventor: **PRESURA, Cristian Nicolae**
5656 AE Eindhoven (NL)

(30) Priority: **04.02.2014 EP 14153738**

(74) Representative: **Roche, Denis**
Philips IP&S
High Tech Campus 5
5656 AE Eindhoven (NL)

(43) Date of publication of application:
14.12.2016 Bulletin 2016/50

(56) References cited:
WO-A1-98/22018 JP-A- 2005 160 641
US-A- 5 285 784 US-A1- 2012 283 535
US-B1- 7 043 287

(73) Proprietor: **Koninklijke Philips N.V.**
5656 AE Eindhoven (NL)

EP 3 102 099 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**FIELD OF THE INVENTION**

[0001] The invention relates to an optical device for measuring a heart rate of a user.

BACKGROUND OF THE INVENTION

[0002] The principle of optical heart rate measurement is based on the use of a light source that emits light into the skin of a user. Such a measurement is called photoplethysmography (PPG). The emitted light is scattered within the skin, where it is absorbed partially by blood. Reflected light exits the skin and is captured by a sensor. The amount of the signal on the sensor is an indication of the blood volume. The blood volume in the skin changes when the blood stream pulsates and, as a consequence, the signal on the sensor changes directly in response to the pulsation. Hence, the sensor measures directly a pulse of the user in the skin and can thus determine the actual heart rate of the user at a given moment.

[0003] The measurement of the heart rate becomes more complex when the user is in motion. Such a motion, even slight, generates motion artefact, which can be defined as a noise signal on top of the pulse signal. Therefore, in order to obtain a highly reliable heartbeat measurement, the motion artefact should be eliminated from the measured pulse signal.

[0004] European patent application EP1354553 discloses an apparatus for detecting a heartbeat by using photoplethysmography, and which is capable of detecting the heartbeat even under motion of a user. Such an apparatus comprises a filtering unit for selectively passing only a signal within a specific frequency band among the PPG signal detected by the PPG sensor unit. Such a solution is quite complex and might not always be reliable.

[0005] US 5285784 discloses an optical device for measuring a heart rate of a user, said device comprising two light sources for emitting light into the skin of the user, and a sensor for receiving light signals from the light emitted by each of the two light sources and reflected through the skin of the user so as to determine the heart rate of the user. The two light sources are situated at different distances from the sensor such that the light signals received from each of the two light sources have a different penetration depth into the skin.

SUMMARY OF THE INVENTION

[0006] It is an object of the present invention to propose an optical device for measuring a heart rate of a user that has better performances than the one of the prior art. The invention is defined by the independent claim; the dependent claims define advantageous embodiments.

[0007] In accordance with the invention, it is proposed

an optical device for measuring a heart rate of a user, said device comprising:

- two light sources for emitting light into the skin of the user,
- a sensor for receiving light signals from the light emitted by each of the two light sources and reflected through the skin of the user so as to determine the heart rate of the user.

The two light sources are situated at different distances from the sensor such that the light signals received from each of the two light sources have a different penetration depth into the skin. The device further comprises a temperature sensor for measuring an ambient temperature and a control unit which is configured to select the light source which is farthest from the sensor when the ambient temperature measured by the temperature sensor is below a predetermined threshold.

[0008] In such a configuration, the light signals emitted by each of the two light sources interfere at different depths with blood vessels. Therefore, such an optical device makes it possible to use two light sources so as to create two light signals interfering with different blood vessels, and to combine the light signals received from the two light sources such that motion artefacts are substantially eliminated and heart rate can be assessed reliably.

[0009] In accordance with the invention, the optical device comprises a temperature sensor for measuring an ambient temperature and a control unit for selecting one of the light sources in dependence on the measured ambient temperature. This makes it possible to select one light source depending on a relevant criterion.

[0010] In accordance with another preferred embodiment of the invention, the light signals emitted by the two light sources may have an identical or similar wavelength. In accordance with another embodiment of the invention, the light signals emitted by two light sources may also have different wavelengths.

[0011] In accordance with still another preferred embodiment of the invention, one light source is lifted up with respect to the surface of the skin of the user.

[0012] These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

BRIEF DESCRIPTION OF THE DRAWING

[0013] The present invention will now be described in more detail, by way of example, with reference to the accompanying drawing, wherein:

Fig. 1 shows the operation of an optical device according to a first embodiment of the invention, Fig. 2 shows how the pulse component and the motion artefact component are combined to obtain the light signal received by the sensor in accordance with the configuration of light sources of the first embod-

iment, and

Fig. 3 shows the operation of an optical device according to a second embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0014] The present invention relates to an optical device for measuring the heart rate of a user. Said device comprises at least two light sources for emitting light into the skin of the user, and a sensor for receiving light signals from the light emitted by each of the two light sources and reflected through the skin of the user so as to determine the heart rate of the user. The optical device comprises a processing unit for receiving the sensor-signal and for determining the pulse and/or heart rate of the user in response to the sensor-signal. According to the invention, the two light sources are situated at different distances from the sensor such that the light signals received from each of the two light sources have a different penetration depth into the skin. The waveforms of said light signals can be made different in terms of amplitude and/or phase. This and other aspects of the invention will be explained in more details in the following embodiments. In the different embodiments, the two light sources are as an example two Light Emitting Devices LEDs. Alternatively, the light sources can also be lasers. In the following, the sensor is also preferably a photo-detector diode. It may also be a phototransistor. The optical device can be in the form of a watch, which is worn at a wrist or arm of the user.

[0015] According to a first preferred embodiment of the invention, as shown in Fig. 1, it is proposed to use the lights emitted by two LEDs having identical wavelength. The two LEDs 1 and 2 emit light into the skin of a user. The two LEDs 1 and 2 are for example two green LEDs. The emitted light is scattered within the skin, where it is absorbed partially by blood depending how deep the emitted light interferes with the blood vessels such as capillary loop C, arteriole A and venule V. The reflected light exits the skin and is captured by a photo-detector diode 3. In the present embodiment, it can be seen on Fig. 1 that the two LEDs 1 and 2 are located at different distances from the photo-detector diode 3. Since the distances between each of the two LEDs 1 and 2 and the photo-detector diode 3 are different, this creates different penetration depths for the light that reaches the photo-detector diode 3. The two LEDs 1 and 2 are pulsed at different times and synchronized with the photo-detector diode 3, and the signals from both depths can be measured simultaneously. In Fig. 1, signal $a_1 \cdot p(t)$ represents the small pulse signal received from the LED 1 and signal $a_2 \cdot p(t)$ represents the large pulse signal received from the LED 2, both pulse signals being used to determine the heart rate, and a_1 and a_2 being constants depending on blood absorption. One advantage of such configuration of LEDs and photo-detector diode is that the amplitude of the pulse signal depends on the penetration depth of said signal. The deeper the blood vessels, the larger

the pulse signal. The more shallow that blood vessels, the lower the signal, because those vessels are mostly capillaries and do not bare much of the heart rate signal.

[0016] As explained before, the measurement of the heart rate is more complex when the user is in motion, in which case a motion artefact signal is added to the pulse signal. This is illustrated in Fig. 2 where we can see that the resulting light signal $l(t)$ received by the photo-detector diode is the sum of the pulse signal $p(t)$ and the motion artefact signal $m(t)$. More specifically, the first light signal $l_1(t)$ received from the first LED is the sum of the small pulse signal $a_1 \cdot p(t)$ and the first motion artefact signal $b_1 \cdot m(t)$, and the second light signal $l_2(t)$ received from the second LED is the sum of the large pulse signal $a_2 \cdot p(t)$ and the second motion artefact signal $b_2 \cdot m(t)$. It is clear from Fig. 2 that motion artefacts are present in both light signals but the motion artefact signal has much more influence on the small pulse signal than on the large pulse signal. As a matter of fact the two motion artefact signals are quite similar. This is because the color of the two LEDs is identical and light travels the same side of the detector. Therefore the invention makes it possible to mix in different ratios the pulse component and the motion artefact component of the light signal, both measured in reflectivity.

[0017] According to a second preferred embodiment of the invention as shown in Fig. 3, it is proposed to lift up one of the LED with respect to the surface of the skin of the user. On Fig. 3, the first LED 11 which is the closest to the photo-detector diode has been lift up.

[0018] As in the first embodiment, two LEDs 11 and 12 emit light into the skin of a user but in the second embodiment, the LED 11 is lift up of a distance d with respect to the surface of the skin of the user. The two LEDs 11 and 12 are also for example two green LEDs. As explained before, the emitted light is scattered within the skin, and it is absorbed partially by blood depending how deep the emitted light interferes with the blood vessels such as capillary loop C, arteriole A and venule V. The reflected light exits the skin and is captured by a photo-detector diode 13. According to this second embodiment, the first light signal received from the first LED 11 does not penetrate deeply through the skin and is therefore more absorbed. This drastically reduces the pulse component in comparison with the first embodiment and therefore increases the contribution from the motion artefact component in the first light signal.

[0019] According to another preferred embodiment of the invention, the light signals emitted by the two LEDs have different wavelengths. For example, the LED which is the closest to the photo-detector diode is a blue LED, the other LED being a green LED. As a matter of fact, blue light has a smaller penetration depth than green light. Because the wavelengths are different, the motion artefacts will differ to a larger extent from the green LED to the blue LED.

[0020] An optical device according to the invention comprises two LEDs and a photo-detector diode, the light

signals emitted by the two LEDs having an identical or similar wavelength, and the two LEDs being situated at different distances from the photo-detector diode. The optical device according to such an embodiment further comprises a temperature sensor for measuring an ambient temperature and a control unit, such as a controller, for selecting one of the two LEDs in dependence on the measured ambient temperature.

[0021] Such an embodiment has been implemented based on the following observations. When the distance between the LED and the photo-detector diode increases, then the amount of light received by the photo-detector diode decreases drastically and the pulse amplitude increases. Because the amount of light received by the photo-detector diode is more important at a lower distance, it may be preferable to use the LED which is the closest to the photo-detector diode, however, at the cost of lower pulse amplitude. The situation may become different when the ambient temperature decreases, which leads to a lower blood perfusion into the skin, especially in the superficial layer of the skin. The consequence is that the amplitude of the pulse signal of the first LED that is the closest to the photo-detector diode decreases fast, which is not the same for the second LED that is at a larger distance from the photo-detector diode. As a matter of fact, the light signal emitted by this second LED goes in deeper layers of the skin where blood vessels are larger and which are moreover less affected by a decrease of the ambient temperature, resulting in a much larger pulse signal.

[0022] Based on the above, it is proposed an optical device having thus two LEDs situated at different distances from the photo-detector diode, a temperature sensor and a controlling unit to choose automatically one of the two LEDs based on the temperature measured by the temperature sensor. In power save mode, the control unit is configured to switch to the first LED which is the closest to the photo-detector diode. When it is cold outside, e.g. when the ambient temperature measured by the temperature sensor is below a predetermined threshold such as 10 °C, the control unit is configured to switch automatically to the second LED which is situated at a larger distance.

[0023] In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

Claims

1. Optical device for measuring a heart rate of a user, said device comprising:
 - two light sources (1,2;11,12;21,22) for emitting light into the skin of the user,
 - a sensor (3;13;23) for receiving light signals

from the light emitted by each of the two light sources and reflected through the skin of the user so as to determine the heart rate of the user,

wherein the two light sources (1,2) are situated at different distances from the sensor such that the light signals (I_1, I_2) received from each of the two light sources have a different penetration depth into the skin.

characterized in that the device further comprises a temperature sensor for measuring an ambient temperature and a control unit which is configured to select the light source which is farthest from the sensor when the ambient temperature measured by the temperature sensor is below a predetermined threshold.

2. Optical device as claimed in claim 1, wherein the control unit is further configured to select the light source which is the closest to the sensor in power save mode.
3. Optical device as claimed in claims 1 or 2, wherein the light signals emitted by two light sources have an identical or similar wavelength.
4. Optical device as claimed in claim 3, wherein the color of the light emitted by the two light sources is green.
5. Optical device as claimed in claims 1 or 2, wherein the light signals emitted by two light sources have different wavelengths.
6. Optical device as claimed in claim 5, wherein the color of the light emitted by one light source is green and the color of the light emitted by the other light source is blue and wherein the green light source is placed at a larger distance from the sensor than the blue light source.
7. Optical device as claimed in any of the previous claims, wherein one light source (12) is lift up with respect to the surface of the skin of the user.
8. Optical device as claimed in any of the previous claims, wherein the light signals emitted by the light sources are pulsed at different times and synchronized with the sensor.
9. Optical device as claimed in any of the previous claims, where the light sources are light emitting diodes.
10. Optical device as claimed in any of the previous claims, where the sensor is a photo-detector diode.
11. Optical device as claimed in any of the previous

claims, arranged for being worn at the wrist.

Patentansprüche

1. Optische Vorrichtung zum Messen einer Herzfrequenz eines Benutzers, wobei die Vorrichtung Folgendes umfasst:

- zwei Lichtquellen (1, 2; 11, 12; 21, 22) zum Emittieren von Licht in die Haut des Benutzers,
- einen Sensor (3; 13; 23) zum Empfangen von Lichtsignalen von dem durch jede der beiden Lichtquellen emittierten und durch die Haut des Benutzers reflektierten Licht, um so die Herzfrequenz des Benutzers zu ermitteln,

wobei sich die beiden Lichtquellen (1, 2) in verschiedenen Abständen von dem Sensor befinden, so dass die von jeder der beiden Lichtquellen empfangenen Lichtsignale (I_1 , I_2) eine unterschiedliche Eindringtiefe in die Haut haben,

dadurch gekennzeichnet, dass die Vorrichtung weiterhin einen Temperatursensor zum Messen einer Umgebungstemperatur und eine Steuereinheit umfasst, die konfiguriert ist, um die Lichtquelle auszuwählen, die am weitesten von dem Sensor entfernt ist, wenn die durch den Temperatursensor gemessene Umgebungstemperatur unter einem vorgegebenen Schwellenwert liegt.

2. Optische Vorrichtung nach Anspruch 1, wobei die Steuereinheit weiterhin konfiguriert ist, um im Stromsparbetrieb die Lichtquelle auszuwählen, die dem Sensor am nächsten ist.
3. Optische Vorrichtung nach Anspruch 1 oder 2, wobei die durch die beiden Lichtquellen emittierten Lichtsignale eine identische oder ähnliche Wellenlänge haben.
4. Optische Vorrichtung nach Anspruch 3, wobei die Farbe des durch die beiden Lichtquellen emittierten Lichts grün ist.
5. Optische Vorrichtung nach Anspruch 1 oder 2, wobei die durch die beiden Lichtquellen emittierten Lichtsignale unterschiedliche Wellenlängen haben.
6. Optische Vorrichtung nach Anspruch 5, wobei die Farbe des durch eine Lichtquelle emittierten Lichts grün ist und die Farbe des durch die andere Lichtquelle emittierten Lichts blau ist, und wobei die grüne Lichtquelle in einer größeren Entfernung von dem Sensor platziert ist als die blaue Lichtquelle.
7. Optische Vorrichtung nach einem der vorhergehenden Ansprüche, wobei eine Lichtquelle (12) in Bezug

auf die Hautoberfläche des Benutzers angehoben ist.

8. Optische Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die durch die Lichtquellen emittierten Lichtsignale zu verschiedenen Zeitpunkten gepulst und mit dem Sensor synchronisiert werden.
9. Optische Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die Lichtquellen Leuchtdioden sind.
10. Optische Vorrichtung nach einem der vorhergehenden Ansprüche, wobei der Sensor eine Fotodetektordiode ist.
11. Optische Vorrichtung nach einem der vorhergehenden Ansprüche, die vorgesehen ist, um am Handgelenk getragen zu werden.

Revendications

1. Dispositif optique pour mesurer une fréquence cardiaque d'un utilisateur, ledit dispositif comprenant :
- deux sources de lumière (1, 2 ; 11, 12 ; 21, 22) pour émettre de la lumière dans la peau de l'utilisateur,
- un capteur (3 ; 13 ; 23) pour recevoir des signaux lumineux à partir de la lumière émise par chacune des deux sources de lumière et réfléchie à travers la peau de l'utilisateur de manière à déterminer la fréquence cardiaque de l'utilisateur,
- dans lequel les deux sources de lumière (1, 2) se situent à des distances différentes du capteur de telle sorte que les signaux lumineux (I_1 , I_2) reçus depuis chacune des deux sources de lumière ont une profondeur de pénétration différente dans la peau, **caractérisé en ce que** le dispositif comprend en outre un capteur de température destiné à mesurer une température ambiante et une unité de commande qui est configurée pour sélectionner la source de lumière qui est la plus éloignée du capteur quand la température ambiante mesurée par le capteur de température est sous un seuil prédéterminé.
2. Dispositif optique selon la revendication 1, dans lequel l'unité de commande est en outre configurée pour sélectionner la source de lumière qui est la proche du capteur dans un mode économie d'énergie.
3. Dispositif optique selon la revendication 1 ou 2, dans lequel les signaux lumineux émis par deux sources de lumière ont une longueur d'onde identique ou si-

miliaire.

4. Dispositif optique selon la revendication 3, dans lequel la couleur de la lumière émise par les deux sources de lumière est verte. 5
5. Dispositif optique selon les revendications 1 ou 2, dans lequel les signaux lumineux émis par deux sources de lumière ont des longueurs d'onde différentes. 10
6. Dispositif optique selon la revendication 5, dans lequel la couleur de la lumière émise par une source de lumière est verte et la couleur de la lumière émise par l'autre source de lumière est bleue et dans lequel la source de lumière verte est placée à une distance plus importante du capteur que ne l'est la source de lumière bleue. 15
7. Dispositif optique selon l'une quelconque des revendications précédentes, dans lequel une source de lumière (12) est soulevée par rapport à la surface de la peau de l'utilisateur. 20
8. Dispositif optique selon l'une quelconque des revendications précédentes, dans lequel les signaux lumineux émis par les sources de lumière sont pulsés à différents moments et synchronisés avec le capteur. 25
9. Dispositif optique selon l'une quelconque des revendications précédentes, où les sources de lumière sont des diodes électroluminescentes. 30
10. Dispositif optique selon l'une quelconque des revendications précédentes, dans lequel le capteur est une diode photodéetectrice. 35
11. Dispositif optique selon l'une quelconque des revendications précédentes, agencé pour être porté au niveau du poignet. 40

45

50

55

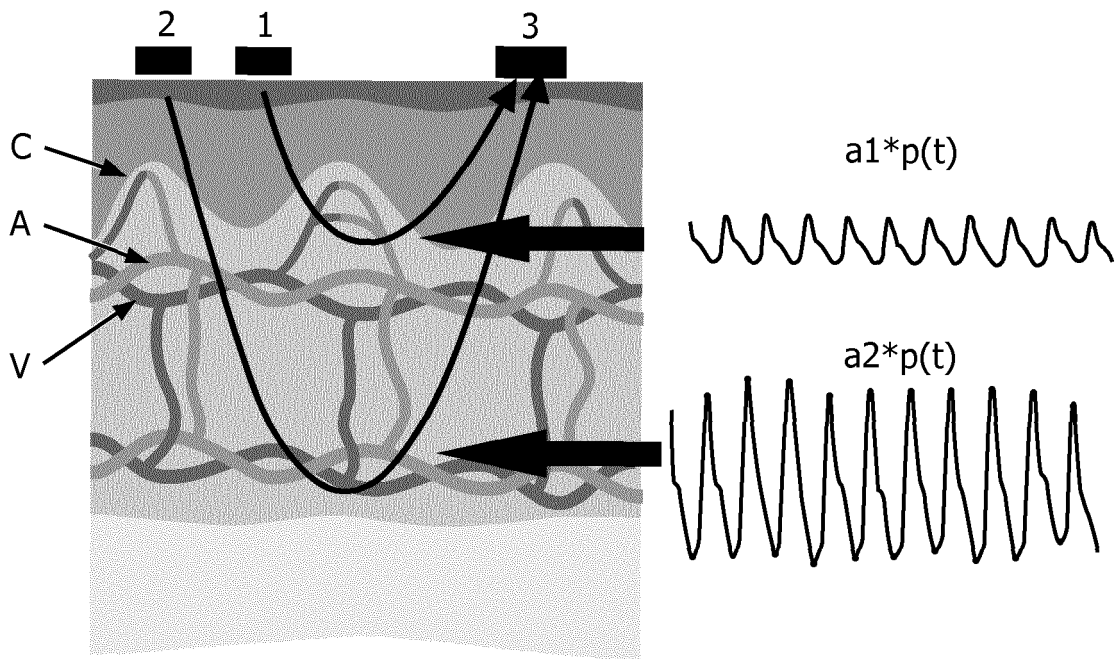


FIG. 1

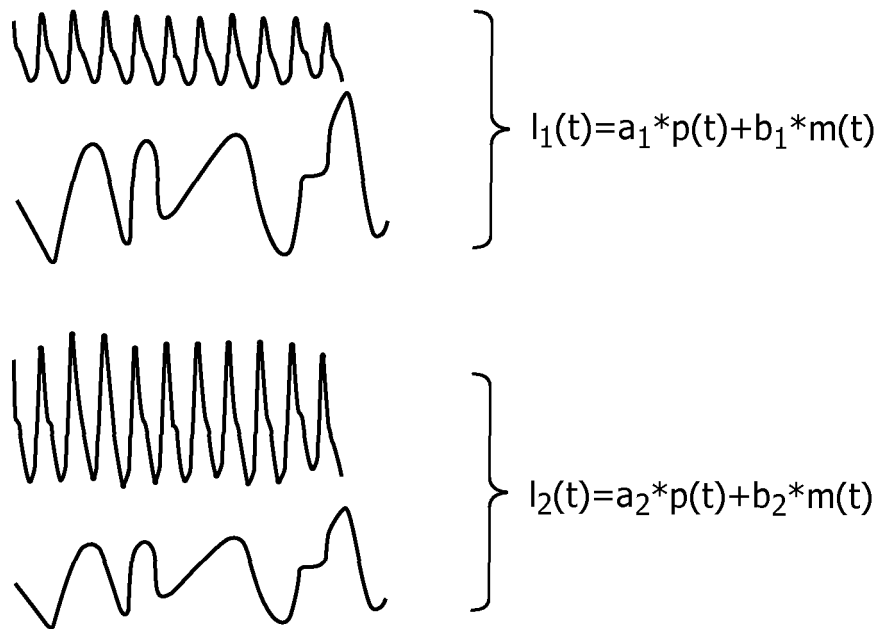


FIG. 2

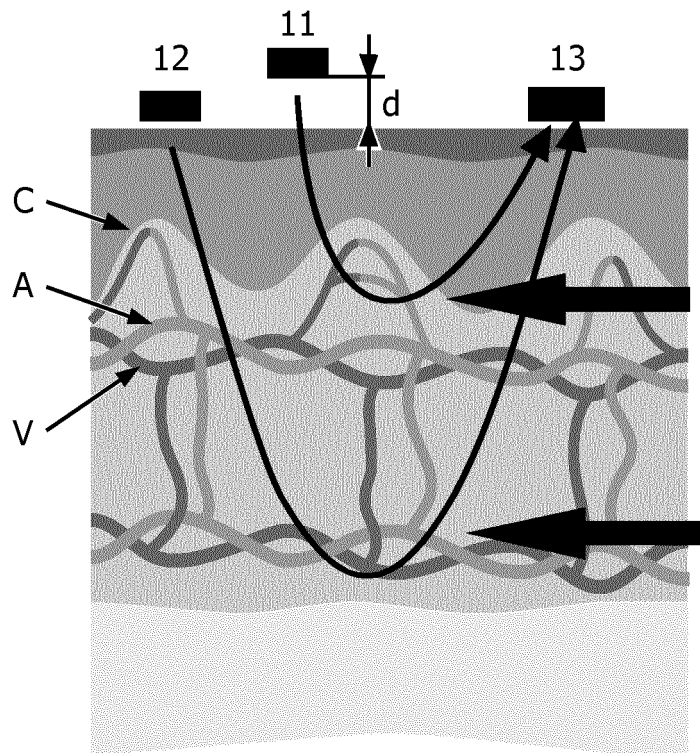


FIG. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1354553 A [0004]
- US 5285784 A [0005]

专利名称(译)	用于测量用户心率的光学装置		
公开(公告)号	EP3102099B1	公开(公告)日	2017-07-19
申请号	EP2015702991	申请日	2015-01-22
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦N.V.		
当前申请(专利权)人(译)	皇家飞利浦N.V.		
[标]发明人	PRESURA CRISTIAN NICOLAE		
发明人	PRESURA, CRISTIAN NICOLAE		
IPC分类号	A61B5/024 A61B5/00		
CPC分类号	A61B5/02427 A61B5/02438 A61B5/6824 A61B5/7214 A61B2560/0209 A61B2560/0242 A61B2562/0242		
代理机构(译)	ROCHE, DENIS		
优先权	2014153738 2014-02-04 EP		
其他公开文献	EP3102099A1		
外部链接	Espacenet		

摘要(译)

本发明涉及一种用于测量用户心率的光学装置。所述光学装置包括： - 两个光源（1,2），用于将光发射到用户的皮肤中； - 传感器（3），用于感测由两个光源中的每一个发射的光信号并通过皮肤反射。用户以确定用户的心率。两个光源（1,2）位于距传感器不同的距离处，使得从两个光源中的每一个接收的光信号具有进入皮肤的不同穿透深度。

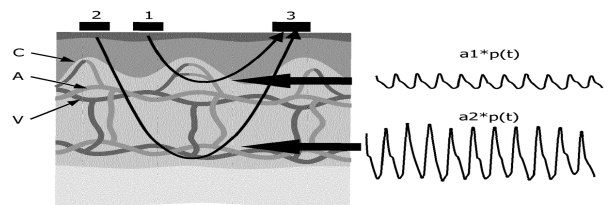


FIG. 1

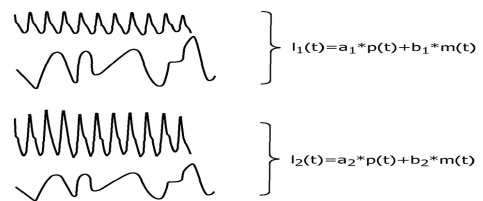


FIG. 2