

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
3 September 2009 (03.09.2009)

PCT

(10) International Publication Number  
**WO 2009/106691 A1**

- (51) **International Patent Classification:**  
A61B 5/024 (2006.01) A61B 5/11 (2006.01)
- (21) **International Application Number:**  
PCT/FI2009/050165
- (22) **International Filing Date:**  
26 February 2009 (26.02.2009)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
20085173 26 February 2008 (26.02.2008) FI
- (71) **Applicant (for all designated States except US):** FIN-SOR OY [FI/FI]; Tekniikantie 21, FI-Espoo 02150 (FI).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** PAALASMAA, Joonas [FI/FI]; Abrahaminkatu 15B b 19, FI-00180 Helsinki (FI).
- (74) **Agent:** ESPATENT OY; Kaivokatu 10 A, FI-00100 Helsinki (FI).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))

(54) **Title:** A METHOD, APPARATUS AND COMPUTER PROGRAM PRODUCT FOR DETECTING HEART RATE

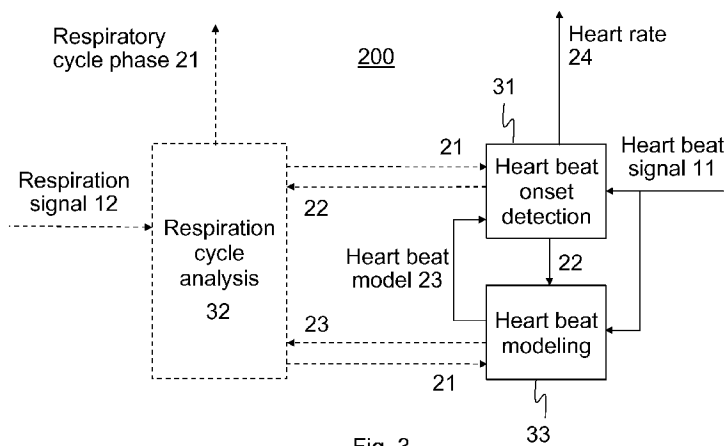


Fig. 3

(57) **Abstract:** The invention relates to a method that includes retrieving a signal that measures an activity of a cardiac system. A heart beat model is created based on the retrieved signal, and heart beats are detected using the heart beat model. The model can be trained using a machine learning technique and also respiratory cycle phase information can be used in training the model. The invention also relates to a related algorithm, apparatus and computer program.

WO 2009/106691 A1

A method, apparatus and computer program product for detecting heart rate

## 5 FIELD OF THE INVENTION

The present invention relates to methods, apparatus and computer program products for detecting heart rate.

## 10 BACKGROUND OF THE INVENTION

There are various methods for contactless measurement of the heart rate of a person lying on a bed. A fair share of the methods are based on measuring the almost periodically repeating vibrations of the heart by analyzing the output signal  
15 of a force sensor that measures the horizontal or vertical vibrations of the body. An example of a force sensor has been presented in the European patent publication *EP 1 563 286*.

In addition to the force sensor, the heart rate analysis system requires a signal  
20 processing unit that extracts the heart rate from the sensor's signal using a signal processing algorithm. These algorithms conventionally use strategies such as cross-correlation with the beat prototype, as suggested in *S.H. Woodward et al., "Estimating heart rate and RSA from the mattress-recorded kinetocardiogram," Psychophysiology, vol. 44, Jul. 2007, pp. 635-638*, bandpass filtering, as  
25 suggested in international patent application publication *WO 2006/003243*, or peak detection, as suggested in *S. Okada et al., "Proposal for a Method of Non-restrictive Measurement of Resting Heart Rate in a Lying Position," Journal of PHYSIOLOGICAL ANTHROPOLOGY, vol. 25, 2006, pp. 299-305*.

30 A drawback of the prior art signal processing algorithms is that typically they are able to detect the heart rate reliably only if the monitored person stays still and does not make any movements that would distort the signal. Movements such as speaking or waving a hand may render the algorithms useless.

## SUMMARY

According to a first aspect of the invention there is provided a method, comprising:  
5 retrieving a signal that measures an activity of a cardiac system, wherein the method further comprises:

creating a heart beat model based on the retrieved signal; and

detecting heart beats using the heart beat model.

- 10 In certain embodiments, the activity of the cardiac system means mechanical activity of the cardiac system. Accordingly, the signal that measures an activity of the cardiac system measures mechanical activity of the cardiac system. Examples of signals that are indicative of (or measure) mechanical activity of the cardiac system are a movement signal and an acoustic signal. In certain embodiments,  
15 the signal is a ballistocardiography signal.

By a movement signal is typically meant a signal measuring the mechanical movements of a monitored person. A movement signal is generally obtained by measuring for example the displacement, acceleration or velocity of the body or  
20 body part. A movement signal may be received for example from a force sensor, an acceleration sensor or a radar system. Movement signals can in some connections also be called as mechanical movement signals or mechanical signals.

25 By an acoustic signal is typically meant a signal measuring the acoustic activity of the cardiac system. An acoustic signal may be received for example from an electronic stethoscope or a microphone.

Movement signals and acoustic signals can be measured for example from parts  
30 of the body, the whole body, a structure supporting the body or a structure supporting a part of the body.

In certain embodiments, the method further comprises:

updating the heart beat model by training the model using a machine learning technique, such as supervised learning.

- 5 In certain embodiments, the method comprises using heart beat shape information and/or heart beat interval information and/or respiratory cycle phase information in training the model.

In certain embodiments, the heart beat model is a supervised learning classifier.

10

In certain embodiments, the method further comprises:

providing an estimation of an expected heart beat shape based on the model.

In certain embodiments, the method comprises:

- 15 using information about a respiratory cycle phase in training the heart beat model.

In certain embodiments, the method comprises:

calculating an estimation of heart beat onset times; and using the estimation in the detection of heart beats.

20

Yet in certain embodiments, the method comprises:

creating an inverse model of an original heart beat shape that gives as a result the shape of the heart beat before it has been mixed with adjacent beats; and

solving the inverse model and using the recovered heart beat shape in heart beat

- 25 model creation and heart beat detection.

According to a second aspect of the invention there is provided an apparatus, comprising:

means configured for retrieving a signal that measures an activity of a cardiac

- 30 system, wherein the apparatus comprises:

means configured for creating a heart beat model based on the retrieved signal; and

means configured for detecting heart beats using the heart beat model.

In certain embodiments, the apparatus is configured to output data directly or indirectly indicative of an instant heart beat rate.

- 5 In certain embodiments, the apparatus is configured to update the heart beat model by training the model using a machine learning technique, such as supervised learning. In certain embodiments, the model is a supervised learning classifier.
- 10 In certain embodiments, the apparatus is configured to use information about a respiratory cycle phase in training the heart beat model.

In certain embodiments, the apparatus is configured to cancel the interference of overlapping heart beat impulses by inverse modeling.

15

According to a third aspect of the invention there is provided a computer readable medium having stored thereon a computer program executable in an apparatus, the computer program comprising:

- 20 program code for implementing an algorithm that controls the apparatus to retrieve a signal that measures an activity of a cardiac system, further controls the apparatus to create a heart beat model based on the retrieved signal, and further controls the apparatus to detect heart beats using the heart beat model.

25 Embodiments of the invention offer an advanced signal processing algorithm that is able to detect the heart rate of a person even if he or she makes some movements during monitoring. A signal processing algorithm introduced by certain embodiments makes heart beat detection more reliable by utilizing information about the respiratory cycle, canceling the interference of adjacent beats as well as building a model of the heart beat's shape.

30

Various exemplary embodiments of the present invention are illustrated hereinafter in the detailed description of the invention as well as in the dependent claims appended hereto. The embodiments are illustrated with reference to selected

aspects of the invention. A person skilled in the art appreciates that any embodiment of the invention may apply to other aspects as well either alone or in combination with other embodiments.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

- 10 Figure 1 shows a framework for carrying out selected embodiments of the invention;
- Figure 2 shows a schematic high-level illustration of an algorithm in accordance with certain embodiments;
- Figure 3 shows a more detailed illustration of an algorithm in accordance with  
15 certain embodiments;
- Figure 4 shows the correlation between heart beat amplitude, interval and respiratory cycle phase in certain embodiments; and
- Figure 5 shows the difference between heart beat shapes extracted using  
inverse modeling and averaging.

20

## DETAILED DESCRIPTION

Figure 1 shows an exemplary framework in which selected embodiments of the invention can be implemented. This framework comprises a processing unit 110  
25 which processes a signal containing measurement data on vibrations of a person whose cardiac system is being monitored.

The signal may be retrieved on-line from a sensor 101. The sensor 101 may be a force sensor described in *EP 1 563 286* placed in the near proximity of the  
30 monitored person (e.g., under a bed post or mattress). The signal is received by the processing unit 110 via a wired or wireless communications method. A suitable communication interface 102, depending on the implementation, is implemented in the processing unit 110. For example, a serial bus or a Bluetooth connection can

be used. In a further embodiment, the processing unit 110 can be integrated into the sensor unit 101.

The received signal is processed by a processor 103 of the processing unit 110 in accordance with an algorithm, also referred to as a signal processing algorithm. A  
5 memory 104 comprised by the processing unit 110 comprises software 105 containing instructions and/or program code for implementing the algorithm. The signal processing algorithm, when performed, produces desired output, e.g., the heart beat rate and/or heart beat onset times of the monitored person.

10

Alternatively, instead of using on-line data, the processing unit 110 may process a beforehand stored signal retrieved from the internal memory 104 or from an external memory (not shown).

15 The processing unit 110 may further contain a user interface controller 106 for receiving user input, e.g., from a keyboard (not shown), and for giving visual output for a user, e.g., in a display unit (not shown).

Figure 2 shows a schematic high-level illustration of a signal processing algorithm  
20 200 in accordance with certain embodiments. The algorithm uses at least one input and produces at least one output. In an embodiment, the algorithm 200 uses as an input signal the signal retrieved from the sensor 101 (Fig. 1) or a signal retrieved from a memory, or a corresponding signal. This signal comprises detected vibrations of a monitored body, in particular also vibrations which are due  
25 to heart beats. Accordingly, this input signal is here referred to as heart beat signal 11. In a more general embodiment, the heart beat signal 11 is any signal which can be assumed to represent, at least partially, an activity of cardiac system. The signal processing algorithm 200 produces desired output, e.g., the heart beat rate 24. The form of the output may vary depending on the implementation. The output  
30 may directly indicate the instant heart rate or indicate the heart rate indirectly, e.g., by outputting its inverse value (reciprocal) or similar.

The signal processing algorithm 200 may optionally use also other inputs, such as

a signal which is here referred to as respiration signal 12. In an embodiment, this signal 12 may be the same signal as the heart beat signal 11, as the signal retrieved, e.g., from a sensor also comprises vibrations caused by respiration. In a more general embodiment, the respiration signal 12 is any signal which can be  
5 assumed to represent, at least partially, a respiration activity. An optional output of the signal processing algorithm 200 is respiratory cycle phase information 21 indicating a detected phase in a respiratory cycle.

Figure 3 shows a more detailed illustration of a signal processing algorithm 200 in  
10 accordance with certain embodiments.

In an embodiment, the algorithm 200 is divided into three modules: Heart beat onsets are detected in module 31, an optional respiratory cycle analysis is carried out in module 32, and module 33 initializes and maintains a model of the shape of  
15 a single heart beat impulse.

Module 31 receives as input the heart beat signal 11, optionally respiratory cycle phase information 21 and the heart beat model 23. Module 31 calculates heart beat onset times 22 from the inputs and outputs them to module 33. Module 31  
20 may also calculate the heart rate 24 based on the heart beat onset times.

The optional module 32 receives as input a signal 12 that can be used to detect the respiratory cycles of the person. Module 32 detects the respiratory cycles from the signal and outputs the respiratory cycle phase information 21 to modules 31  
25 and 33. Module 32 can alternatively also receive inputs 22 and 23 from modules 21 and 23, respectively, with the purpose of enhancing the detection of the respiratory cycle.

Module 33 receives as input the heart beat signal 11, optionally respiratory cycle phase information 21 and heart beat onset times 22. Module 33 creates and maintains the heart beat model 23 based on the inputs and outputs the model 23  
30 to module 31.

In the following the operation of certain embodiments of the invention is explained in yet further detail. As indicated in the preceding, the heart rate of a person can be detected (or calculated) by using a signal processing algorithm which receives as input a signal measuring the cardiac activity of the person.

5

In its simple form, the procedure followed by the algorithm can basically comprise only the following:

- 1) Retrieving a signal that measures the activity of the cardiac system;
- 10 2) Creating, based on said signal, a model of a heart beat impulse;
- 3) Detecting heart beats by using the heart beat model.

In certain embodiments, the heart beat model is a supervised learning classifier with one or more input features and one output label. One of the input features is the heart beat shape. The output label is binary and defines if the input variable(s)  
15 represent a heart beat (BEAT) or not (NON-BEAT). The heart beat shape input feature of the model can be in the form of a signal segment that represents the shape of a single heart beat impulse or in a transformed form such as a set of wavelet coefficients. The classifier can use any suitable classification method such  
20 as naïve Bayes or support vector machines.

The model initialization (creation) phase basically requires only the heart beat signal 11. Initialization is carried out in an embodiment by finding an almost periodically repeating phenomenon from the signal that is repeated at a rate that  
25 would be possible for a heart beat (e.g., interval in the range 0.3 – 2 seconds). If such an almost periodically repeating phenomenon is found, they are likely to be the heart beat impulses in the signal. The heart beat model can be initialized by training it with input-output pairs where each output label is BEAT and the inputs are formed from the positions where beat impulses were found. Also, the model is  
30 trained with sufficiently many input-output pairs where each output label is NON-BEAT and the inputs are formed from positions where beat impulses were not found. In an embodiment, the almost periodic phenomenon is found by applying a minimum-entropy deconvolution method to the signal that represents the cardiac

activity. The idea of minimum entropy deconvolution is to find a convolution kernel  $h(n)$  that, when convolved with the input signal  $y(n)$ , produces an output signal  $w(n)$  with as low an entropy as possible. Entropy can be minimized by maximizing the kurtosis of the output signal  $w(n)$ . If the input signal contains a repeating  
5 phenomenon, they can be located by finding the peaks of  $w(n)$ . The details of the minimum-entropy deconvolution method as such are known to a skilled person and will not be described here more closely. Alternatively, an autocorrelation method, also known as such, can be applied to the signal instead of the minimum-entropy deconvolution method.

10

Once module 33 has initialized the heart beat model 23 and starts feeding it to module 31, module 31 starts to detect beat onsets from the heart beat signal 11 with the model.

15 Detecting the beat onsets from the signal using the model can be done in many ways.

In an embodiment, the signal is windowed to extract the shape of the signal at consecutive time instants. The shapes are fed to the model that classifies them  
20 with labels BEAT or NON-BEAT. Window positions that are classified as BEAT are used in an embodiment as beat onset positions 22 and fed to module 33.

When module 33 receives a heart beat onset time 22 from module 31, it extracts in an embodiment the heart beat impulse shape from the heart beat signal 11 using  
25 the onset time. Using the extracted heart beat impulse shape, module 33 trains the heart beat model with an input-output pair comprising the heart beat impulse shape and a BEAT label. In addition to training with found beats, shapes that represent segments where a beat cannot be found are used to train the model with the NON-BEAT label.

30

In another implementation, the interval to the previous beat onset is used as the model's input feature, in addition to the heart beat shape. In yet another implementation, respiratory cycle phase is used as the model's input feature, in

addition to the heart beat shape, with or without using the interval to the previous beat onset as an input feature. If the respiratory cycle phase and/or beat interval are used as input features, they are used in module 33 to train the model and in module 31 to classify signal positions as BEAT or NON-BEAT. The benefit from  
5 using these additional input features is that there is a clear correlation between the respiratory cycle phase, heart beat shape and heart beat interval, as illustrated in Figure 4. The uppermost graph of Figure 4 shows a high-pass-filtered (with cutoff at 1 Hz) ballistocardiography (BCG) signal. The vertical axis denotes force and the horizontal axis denotes time. The second graph shows heart beat intervals and the  
10 third graph heart beat amplitudes during the same observation period. The fourth graph shows the BCG signal after band-pass-filtering (with 0.1 – 1.0 Hz passband). The lowermost graph shows transitions between the respiratory cycle phases.

15 It is possible to detect the respiratory cycle from a force sensor signal (or respiration signal) 12 using prior art methods. In accordance with an embodiment, the respiratory cycle is detected, for example, by bandpass-filtering the respiration signal 12 (e.g., with 0.1 – 1.0 Hz passband) and observing crossings of a pre-defined threshold in the filtered signal. If heart beat information is available,  
20 detection can be further aided by utilizing the correlation of heart beat intervals and amplitude with the phase of the respiratory cycle. Accordingly, in order to enhance the respiratory cycle analysis, heart beat interval 22 and/or shape data 23 from the heart beat analysis modules 31 and 33, respectively, can be inputted to the respiratory cycle analysis module 32.

25

The respiratory cycle is generally modeled mathematically as a cyclic transition between the following states: inhalation begin, inhalation end, exhalation begin, exhalation end. For the purposes of supervised learning, inhalation begin is represented by value -1, inhalation end by 0, exhalation begin by 0, and exhalation  
30 end by 1. Transition between the states is illustrated in the lowermost graph of Fig. 4. The horizontal axis denotes time.

Yet another embodiment concerns canceling the interference of overlapping heart

beat impulses. Once module 31 has detected consecutive heart beat onsets, it becomes possible to analyze the shape of the original heart beat impulse prior to its mixing with adjacent heart beats. As a single heart beat impulse generally lasts longer than the interval between heart beats (the interval meaning the reciprocal of the heart rate), the adjacent impulses get mixed making detecting heart beats more difficult. The original impulses can be recovered in an embodiment from the signal by formulating an inverse model that solves the shape of the original beat impulses before they were mixed with adjacent beats. In a simple form, the mixing of beats can be represented with the equation

10

$$y(n) = \sum_{i=1}^N s(n-d_i)$$

where  $s(n)$  represents a single heart beat impulse,  $d_i$  are the  $N$  positions of the heart beat impulses and  $y(n)$  is the signal after the mixing of the beats. As  $y(n)$  (the heart beat signal) and  $d_i$  (the heart beat times) are known,  $s(n)$  can be solved by formulating the inverse model as a system of linear equations. The result of modeling the heart beat shape is illustrated in Fig. 5. As seen in the figure, the heart beat shape calculated using an inverse model is less distorted by adjacent beats than the shape calculated by just averaging heart beat shapes. The above mentioned inverse model assumes that the heart beat shape is invariant across all heart beats, but the model can be made even more precise by allowing varying shapes for different heart beats.

Canceling the overlapping impulses benefits both modules 31 and 33. In module 33, the heart beat model 23 can be created without interference from adjacent beats, so it becomes more precise. When canceling of overlapping impulses is utilized in module 31, the interference of adjacent beats in the detection of beat onsets is removed so beat detection becomes more precise.

Various embodiments have been presented. It should be appreciated that in this document, words comprise, include and contain are each used as open-ended

expressions with no intended exclusivity.

The foregoing description has provided by way of non-limiting examples of particular implementations and embodiments of the invention a full and informative  
5 description of the best mode presently contemplated by the inventors for carrying out the invention. It is however clear to a person skilled in the art that the invention is not restricted to details of the embodiments presented above, but that it can be implemented in other embodiments using equivalent means without deviating from the characteristics of the invention.

10

Furthermore, some of the features of the above-disclosed embodiments of this invention may be used to advantage without the corresponding use of other features. As such, the foregoing description should be considered as merely illustrative of the principles of the present invention, and not in limitation thereof.

15

Hence, the scope of the invention is only restricted by the appended patent claims.

## Claims

1. A method, comprising:
  - retrieving a signal that measures an activity of a cardiac system,  
**characterized** in that the method further comprises:
  - 5       creating a heart beat model based on the retrieved signal; and
  - detecting heart beats using the heart beat model.
  
2. The method of claim 1, wherein the signal measures mechanical activity of a cardiac system.
  
- 10   3. The method of claim 1 or 2, further comprising utilizing information about the respiratory cycle in the heart beat detection.
  
4. The method of any preceding claim, wherein the signal that measures an activity of a cardiac system is a ballistocardiography signal.
  
- 15   5. The method of any preceding claim, wherein the signal that measures an activity of a cardiac system is a signal from a force sensor.
  
- 20   6. The method of any preceding claim, comprising outputting data directly or indirectly indicative of heart beat rate.
  
7. The method of any preceding claim, further comprising:
  - updating the heart beat model by training the model using a machine
  - 25       learning technique, such as supervised learning.
  
8. The method of any preceding claim, wherein the heart beat model is a supervised learning classifier.
  
- 30   9. The method of any preceding claim, wherein the method comprises:
  - using a heart beat shape information in training the model.
  
10. The method of any preceding claim, wherein the method comprises:

using a heart beat interval information in training the model.

11. The method of any preceding claim, wherein the method comprises:  
using a respiratory cycle phase information in training the model.

5

12. The method of any preceding claim, wherein the method comprises:  
providing an estimation of an expected heart beat shape based on the  
model.

10 13. The method of any preceding claim, comprising:  
calculating an estimation of heart beat onset times; and using the estimation  
in the detection of heart beats.

14. The method of any preceding claim, comprising:  
15 creating an inverse model of an original heart beat shape that gives as a  
result the shape of the heart beat before it has been mixed with adjacent  
beats; and  
solving the inverse model and using the recovered heart beat shape in  
heart beat model creation and heart beat detection.

20

15. An apparatus, comprising:  
a processing unit configured for retrieving a signal that measures an activity  
of a cardiac system, **characterized** in that the processing unit is configured to  
create a heart beat model based on the retrieved signal; and wherein  
25 the processing unit is further configured to detect heart beats using the  
heart beat model.

16. The apparatus of claim 15, wherein said model is indicative of an actual shape  
of a heart beat impulse.

30

17. The apparatus of claim 15 or 16, wherein the apparatus is configured to output  
data directly or indirectly indicative of heart beat rate.

18. The apparatus of any preceding claim 15–17, wherein the apparatus is configured to update the heart beat model by training the model using a machine learning technique, such as supervised learning.
- 5 19. The apparatus of any preceding claim 15–18, wherein the model is a supervised learning classifier.
20. The apparatus of any preceding claim 15–19, wherein the apparatus is configured to provide an estimation of an expected heart beat shape based on  
10 the model.
21. The apparatus of any of preceding claim 15–20, wherein the apparatus is configured to use information about a respiratory cycle phase in training the heart beat model.
- 15 22. The apparatus of any of preceding claim 15–21, wherein  
the processing unit is configured to calculate an estimation of heart beat onset times, and wherein  
the processing unit is further configured to use the estimation in the  
20 detection of heart beats.
23. The apparatus of any preceding claim 15–22, wherein the processing unit is configured to implement an algorithm to cancel the interference of overlapping heart beat impulses.
- 25 24. The apparatus of any of preceding claim 15–23, wherein the apparatus is configured to create an inverse model of an original heart beat shape that gives as a result the shape of the heart beat before it has been mixed with adjacent beats, and to solve the inverse model and to use the recovered heart beat  
30 shape in heart beat model creation and heart beat detection.
25. The apparatus of any preceding claim 15–24, wherein the signal measures mechanical activity of a cardiac system.

26. The apparatus of any preceding claim 15-25, wherein the signal that measures an activity of a cardiac system is a ballistocardiography signal.

5 27. Computer readable medium having stored thereon a computer program executable in an apparatus, the computer program comprising:  
program code for implementing an algorithm that controls the apparatus to  
retrieve a signal that measures an activity of a cardiac system, further controls  
the apparatus to create a heart beat model based on the retrieved signal, and  
10 further controls the apparatus to detect heart beats using the heart beat  
model.

28. Computer readable medium having stored thereon a computer program  
executable in an apparatus, and when executed configured to implement the  
15 method of any of the claims 1-14.

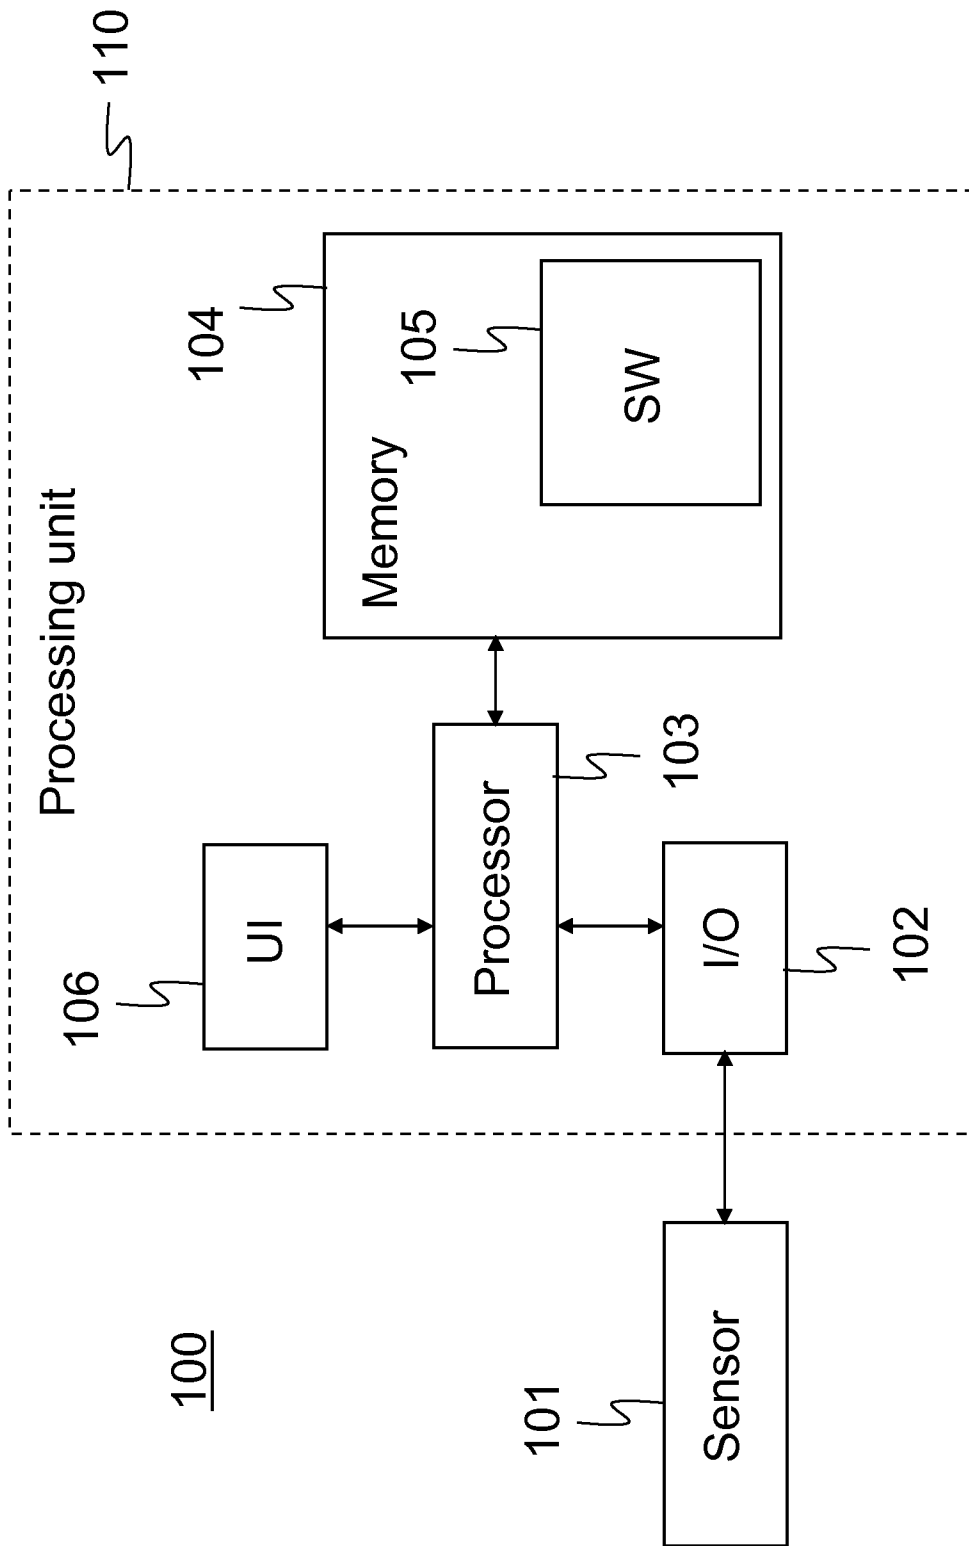


Fig. 1

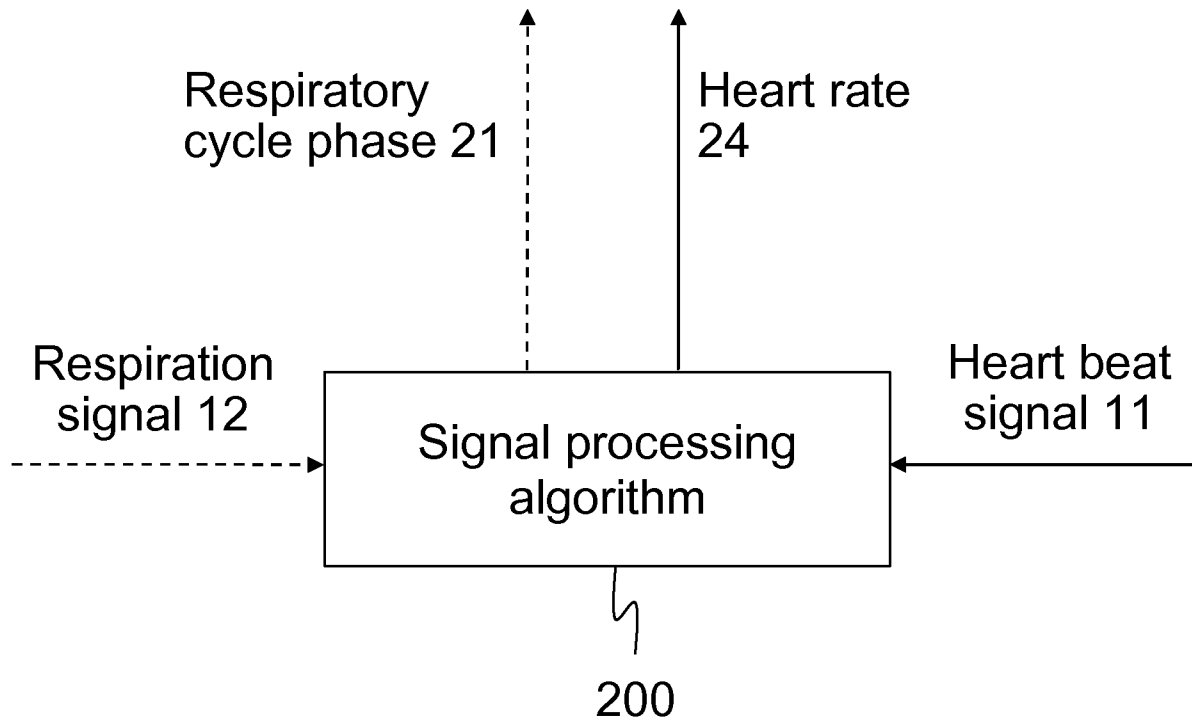


Fig. 2

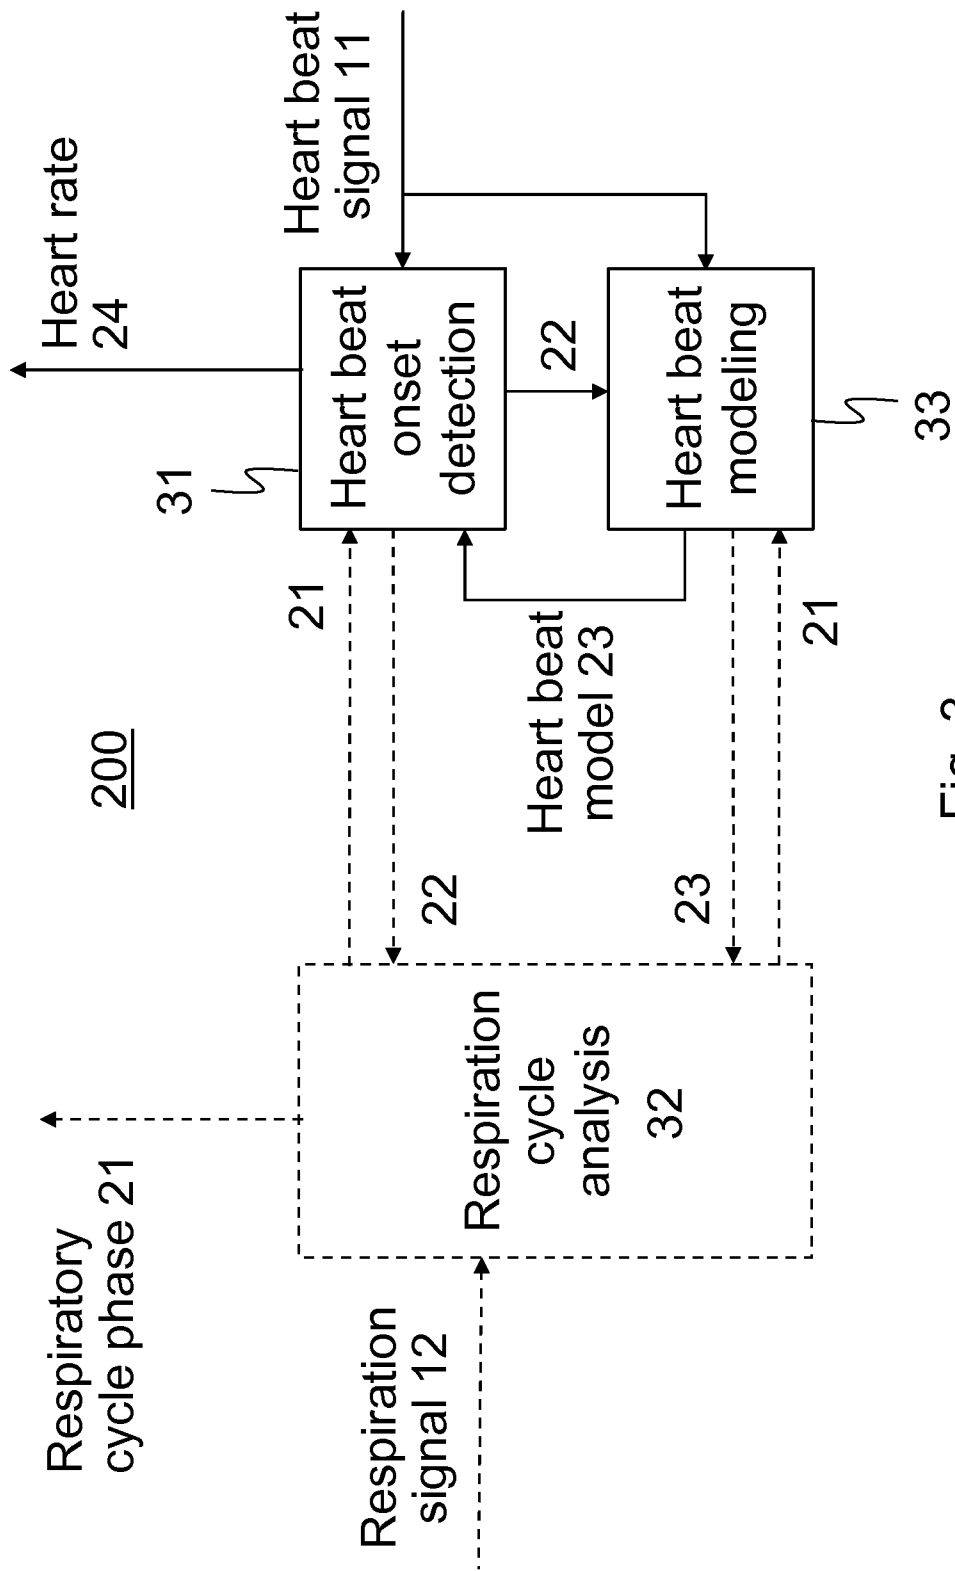


Fig. 3

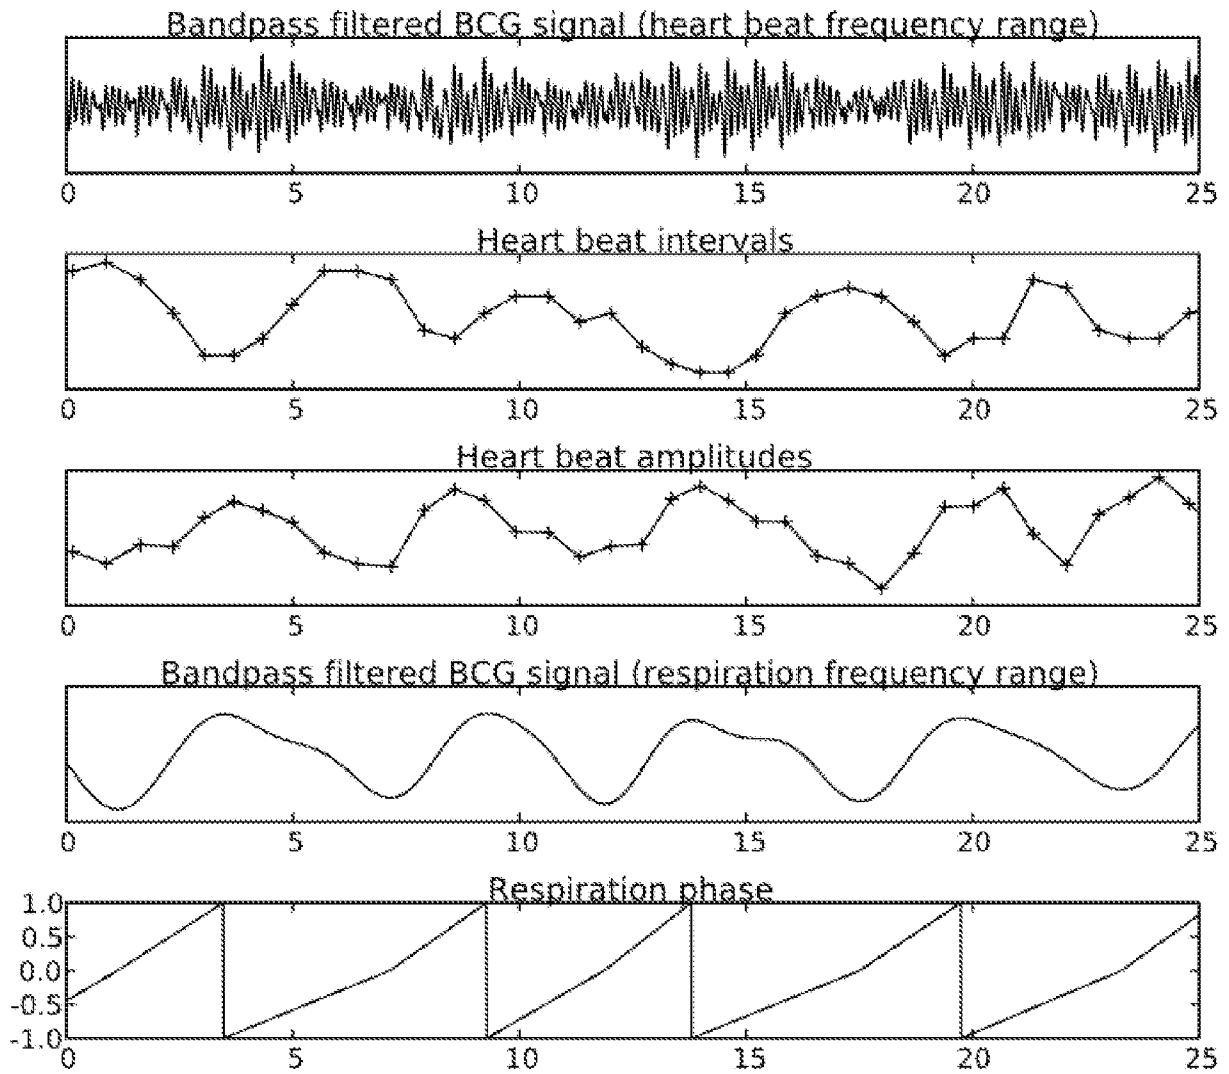


Fig. 4

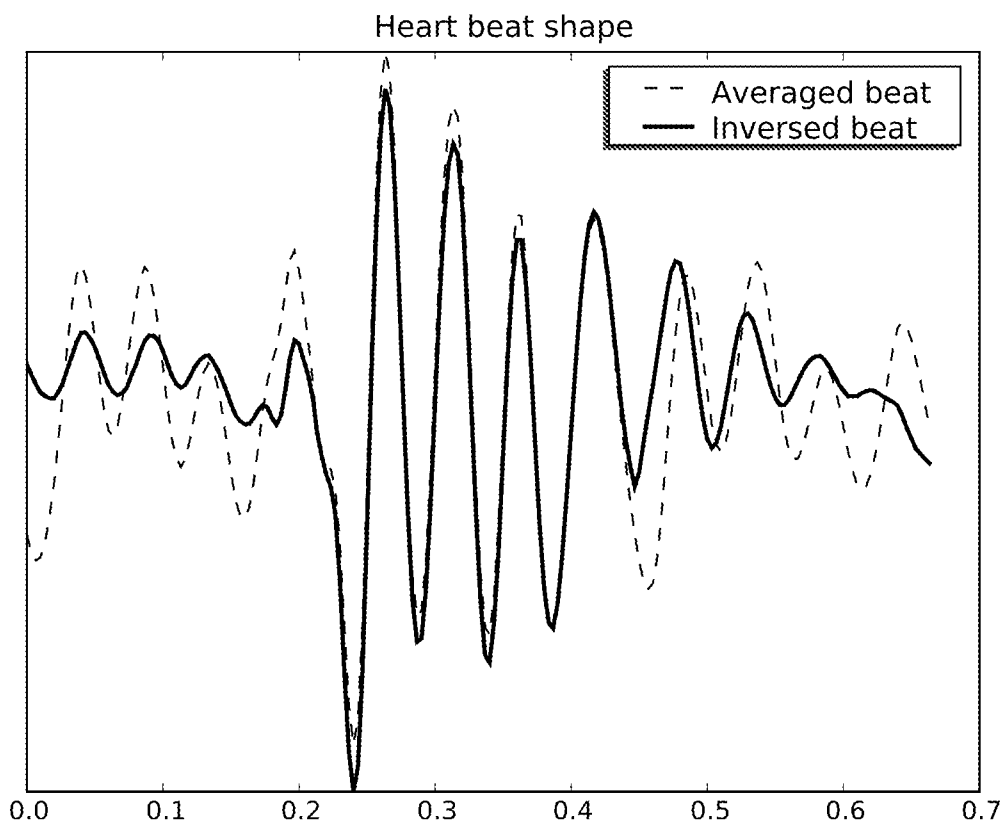


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/FI2009/050165

A. CLASSIFICATION OF SUBJECT MATTER		
IPC: see extra sheet According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC: A61B, G06F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
EPO-INTERNAL, WPI DATA, PAJ, INSPEC, BIOSIS, MEDLINE, TDB, COMPDX, EMBASE, NPL, XPIEE, XPI3E		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 20070118054 A1 (PINHAS I. ET AL), 24 May 2007 (24.05.2007), paragraphs [0173]-[0182]	1-6,15-17, 25-28
A	--	7-14,18-24
X	US 20030233034 A1 (VARRI A. ET AL), 18 December 2003 (18.12.2003), paragraphs [0015]-[0016],[0034]-[0039],[0048],[0059]-[0060]	1-6,15-17, 25-28
A	--	7-14,18-24
A	EP 1623667 A1 (SCALISE, L. ET AL), 8 February 2006 (08.02.2006), the whole document	1-28
	--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents:		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search	Date of mailing of the international search report	
8 June 2009	15 -06- 2009	
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer  Anna MalMBERG/ELY Telephone No. +46 8 782 25 00	

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2009/050165

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 03055395 A1 (CARDIODIGITAL LIMITED), 10 July 2003 (10.07.2003), page 4, line 9 - page 5, line 3, abstract ---	1-28
P,X	WO 2009023524 A1 (SALUTRON, INC.), 19 February 2009 (19.02.2009), abstract, the whole document --- -----	1,15,27-28

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/FI2009/050165

**International patent classification (IPC)**

**A61B 5/024** (2006.01)

**A61B 5/11** (2006.01)

**Download your patent documents at [www.prv.se](http://www.prv.se)**

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at [www.prv.se](http://www.prv.se) (English version)
- From "Anförda dokument" found under "e-tjänster" at [www.prv.se](http://www.prv.se) (Swedish version)

Use the application number as username. The password is **TXMRFJVMZ**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2009/050165

US	20070118054	A1	24/05/2007	NONE		
US	20030233034	A1	18/12/2003	NONE		
EP	1623667	A1	08/02/2006	NONE		
WO	03055395	A1	10/07/2003	AU	2002356324 A	15/07/2003
WO	2009023524	A1	19/02/2009	US	20090043216 A	12/02/2009

专利名称(译)	一种用于检测心率的方法，装置和计算机程序产品		
公开(公告)号	<a href="#">EP2247233A1</a>	公开(公告)日	2010-11-10
申请号	EP2009714930	申请日	2009-02-26
[标]申请(专利权)人(译)	FINSOR		
申请(专利权)人(译)	FINSOR OY		
当前申请(专利权)人(译)	BEDDIT OY		
[标]发明人	PAALASMAA JOONAS		
发明人	PAALASMAA, JOONAS		
IPC分类号	A61B5/024 A61B5/11 A61B5/00 A61B5/0205 A61B5/113 A61B7/02		
CPC分类号	A61B5/024 A61B5/0205 A61B5/1102 A61B5/113 A61B5/6887 A61B5/7203 A61B5/7264 A61B5/7267 A61B7/02		
优先权	2008005173 2008-02-26 FI		
其他公开文献	EP2247233A4 EP2247233B1		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

本发明涉及一种包括检索测量心脏系统活动的信号的方法。基于检索到的信号创建心跳模型，并且使用心跳模型检测心跳。可以使用机器学习技术训练模型，并且还可以使用呼吸循环阶段信息来训练模型。本发明还涉及相关的算法，装置和计算机程序。