



(51) International Patent Classification:

A61B 5/00 (2006.01) *A61B 5/02* (2006.01)
A61B 5/04 (2006.01) *A61B 5/0402* (2006.01)
A61B 5/16 (2006.01) *A61B 5/0476* (2006.01)
A61B 5/107 (2006.01) *A61B 3/11* (2006.01)

KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/EP2016/075748

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(22) International Filing Date:

26 October 2016 (26.10.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; S-164 83 Stockholm (SE).

Published:

— with international search report (Art. 21(3))

(72) Inventors: **ANDERSSON, Lars**; Edvin Adolphsons v. 9, 169 40 Solna (SE). **LAWRENSON, Matthew, John**; Rue de Lausanne 20 A, 1030 Bussigny (CH).

(74) Agent: **ERICSSON**; Torshamnsgatan 21-23, 164 80 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW,

(54) Title: IDENTIFYING SENSORY INPUTS AFFECTING WORKING MEMORY LOAD OF AN INDIVIDUAL

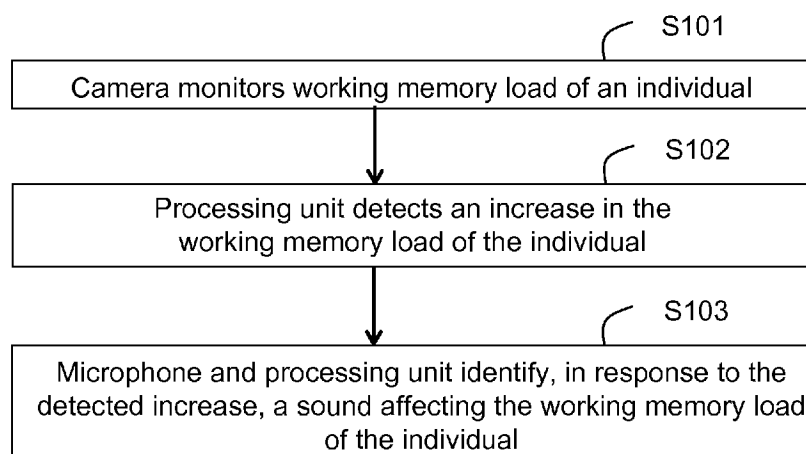


Fig. 3

(57) Abstract: In an aspect of the invention, a method of identifying sensory inputs affecting working memory load of an individual is provided. The method comprises monitoring (S101) working memory load of the individual using a sensor device, detecting (S102) an increase in the working memory load of the individual, and identifying (S103), in response to the detected increase, at least one sensory input affecting the working memory load of the individual.



IDENTIFYING SENSORY INPUTS AFFECTING WORKING MEMORY LOAD OF AN INDIVIDUAL

TECHNICAL FIELD

The invention relates to a method of identifying sensory inputs affecting
5 working memory load of an individual, a device for identifying sensory inputs
affecting working memory load of an individual, a corresponding computer
program, and a corresponding computer program product.

BACKGROUND

Concentration makes people less susceptible to distraction, but involves
10 considerable cognitive straining. The extent to which people can focus on a
certain task depends on the exact nature and difficulty of that task and the
modality (e.g., visual, verbal) of the distraction in comparison with the task.

Working memory is the small amount of information in a person's mind that
they can readily access. The working memory is used for cognitive tasks such
15 as reasoning and problem solving. The information retained in one's working
memory is temporary; it disappears unless it is stored in the long-term
memory. Also, the amount of information that can be stored in the working
memory is limited. Competing sensory inputs (i.e., distractions) can result in
high working memory load, which can limit one's cognitive capabilities.

20 Measurement of pupil diameter can be used to obtain information about
demand for working memory in different cognitive activities.

Cognitive load can be exemplified by measuring pupillary response as a
person is undergoing various mental processes. Studies show the mental
effort required to perform a calculation, and how this effort changes
25 throughout the process of the task.

For instance, a study has been performed that attempted to correlate
different pupil measurements, namely fixation duration and pupil size, with
memory load and processing load. The study discovered that the increase in
fixation duration with number of targets both within and above working

memory capacity suggests that in free viewing, fixation duration is sensitive to actual memory load as well as to processing load, whereas pupil size is indicative of processing load only. Hence, it was concluded that fixation duration is selective to memory load for targets. In contrast, changes in pupil
5 size are too slow for isolating instances of memory accumulation such as target encoding in the free viewing search task. Pupil size most likely reflects an overall processing load which incorporates several cognitive processes.

The effect that the performing of tasks has on the human pupil is called ‘task-evoked pupillary response’. Recent work, for instance “Measuring the Task-
10 Evoked Pupillary Response with a Remote Eye Tracker” by J. Klingner, R. Kumar, and P. Hanrahan, in Proceedings of the 2008 symposium on Eye tracking research & applications (ETRA '08), pages 69–72, ACM New York, 2008, has found that remote video eye trackers have enough precision to be used for detailed task-evoked pupillary measurements.

15 An electroencephalogram (EEG) is a technique whereby electrical signals on the scalp, forehead or in-ear regions are measured for determining brain activity. In the literature it has been shown that EEG measurements can be linked to cognitive tasks. For instance, the measuring of EEG signals can be used to classify a mental task with relatively high accuracy. As an example,
20 mentally letter writing, in which subjects were instructed to mentally compose a letter to a friend without vocalizing, could be distinguished from the task of mentally multiplying two multi-digit numbers, such as 49 times 78.

A number of devices and associated methods are available to gather
25 knowledge of what sensory inputs are in the local area of a subject or user, i.e., what is nearby that could be sensed by the user. Some examples are given in the following.

Imaging sensors can be used to identify objects within the field of view of the sensors. The use of image sensors in object recognition has become

particularly powerful due to the development of machine-learning algorithms which can identify objects in images or video with a high degree of accuracy.

Lightfield cameras are able to capture data about the lightfield emanating from a scene. As such more data can be obtained than if just a single plane is recorded, as per a standard camera. As such 3D images can be obtained using
5 a single camera with a single lens.

Sensors based on LIDAR (“Light Detection And Ranging”) are able to scan their environment to gain a 3D map of their environment, and thus provide data to an algorithm that can identify objects. Recently ‘on chip’
10 implementations of LIDAR has been prototyped, providing a path to low cost implementations as low as \$10. RADAR (“Radio Detection And Ranging”) also has the capability to identify objects.

Audio sensors, i.e., microphones, can also be used to identify different events. Algorithms have been developed for identifying events based on the sounds
15 they produce. When combined with directional microphones this allows a user to associate an action (event) and location with an event.

Devices that are able to identify smell (so called electronic noses) have been developed. While these vary greatly in terms of the underlying technology some extremely powerful devices are now available at mass market prices,
20 and in fact have been incorporated into devices such as those to detect use of alcohol or marijuana.

A number of devices and associated methods are available to obscure sensory inputs from a user – i.e., either mask or remove a sensory input such that it is no longer noticed by the user. Some examples are given in the following.

25 Augmented Reality (AR) is a technology which allows to change how the physical environment appears to the user, by artificially adding computer generated content that blends with the environment. This can be visual content, e.g., using AR headsets. AR has potential in entertainment (media, gaming) but also in education and for professional use.

Recently a number of ‘active hearing’ devices have been released to the market or announced. Examples include, the ‘Here One’ from Doppler Labs and the ‘Pilot’ from Waverly Labs. Whilst the Pilot demonstrates the ability to add intelligence to hearing devices (purportedly it will translate between
5 users speaking different languages), the Here One modifies the level to which various sounds are either heard or not heard.

Devices that are able to synthesise odour are available in the market or have been announced, an example being the ‘Cyrano’. Other groups have worked on screens that can project smells by using fans to locate a smell on a certain
10 part of a screen. Odour can be masked by another odour where a first smell is replaced by a stronger second smell, or it can be masked by using white odour. Scientists discovered that similarly to white light, where the combination of many wavelengths produce white (seemingly colourless) light, mixtures with many odour components can produce a smell that is difficult to distinguish.

15 Content filtering is a way of altering or restricting digital content, such as advertisement, inappropriate material, or potentially hostile applications. Content filtering software is used for different reasons, one of which can be the blocking of unwanted distractions while browsing the Internet. The use of AR offers the possibility of “real world” ad blocking, which is the blocking of
20 e.g., brand logos and advertisements in the physical environment of the AR device user.

Productivity apps are computer programs that help increased productivity and improve concentration and focus, e.g., by filtering or blocking of distracting content, by setting timers, or by scheduling work and breaks
25 taking into account the user’s attention span.

However, existing solutions have problems.

As regards identification and removal of potentially distracting sensory inputs:

- working memory load: existing solutions require the user to think actively about what is distracting them, being itself detrimental to the working memory load of the user;
- universality: existing solutions only target certain types of distracters (e.g., block website advertisements) or focus on just one of the user's sensory inputs (e.g., only block audio inputs).

As regards feedback/control:

- focus detection: existing solutions do not directly measure the actual working memory load of the user, and thus have less information about the need for the removal of distracters and what distracters should be removed;
- effect of removal: existing solutions do not directly measure the effectiveness of the removal of individual distracters on the user's working memory load.

SUMMARY

15 An object of the present invention is to solve or, at least mitigate, the problem in the art of how to provide method of identifying sensory inputs affecting working memory load of an individual.

This object is attained in a first aspect of the invention by a method of identifying sensory inputs affecting working memory load of an individual.

20 The method comprises monitoring working memory load of the individual using a sensor device, detecting an increase in the working memory load of the individual and identifying, in response to the detected increase, at least one sensory input affecting the working memory load of the individual

This object is attained in a second aspect of the invention by a device for identifying sensory inputs affecting working memory load of an individual.

25 The device comprises a sensor device configured to monitor working memory load of the individual, and a processing unit configured to detect an increase in the working memory load of the individual and to identify, in response to

detecting the increase, at least one sensory input affecting the working memory load of the individual.

Hence, a sensor device is used to monitor working memory load of an individual. In an example, the individual is seated in front of her computer
5 and a built-in camera of the computer is used as a sensor device for monitoring the working memory load by monitoring one or both eyes of the individual.

The example camera may further be used in combination with a processing unit of the computer for detecting any increase in the working memory load
10 of the individual. For instance, the processing unit may, during the monitoring by the camera of the individual, detect a change in working memory load in the form of, e.g., a sudden increase in pupil size of one or both eyes of the individual. Such detection indicates an increase in working memory load of the individual.

15 Upon such detection, the processing unit of the computer may identify at least one sensory input affecting the working memory load of the individual. For example, a built-in microphone of the computer is used in combination with the processing unit and registers a sound being likely to be the sensory input causing the detected increase in working memory load.

20 This identification of sensory inputs affecting the working memory load of the individual is highly advantageous and can, as will be discussed in various embodiments in the following, be used for many purposes.

In an embodiment of the invention, after having identified at least one sensory input affecting the working memory load of the individual, the
25 processing unit is configured to diminish an impact that the identified at least one sensory input has on the working memory load of the individual.

For instance, if the individual resides in a connected home where many functions such as heating, light and blind control, activation of kitchen equipment etc., are connected to a local area network, such as a Wireless

Local Area Network (WLAN), along with any computers, tablets, smart phones, etc, actions may be initiated to mitigate the negative effect which the sensory inputs have on the working memory load of the individual.

Now, if a change in working memory load is monitored and detected by a
5 camera and processing unit of a tablet or smartphone currently operated by the individual, by observing an increased pupil diameter, the processing unit of the individual's tablet may identify – by measuring ambient temperature or communicating with a heat control system - that it is the heating of the home that is set to a too high temperature which negatively affects the
10 working memory load of the individual.

As a result thereof, the processing unit of the tablet transmits a control signal via the WLAN to a home heating control system, i.e., a source of the identified sensory input, to lower the temperature to thereby advantageously diminish an impact that the identified at least one sensory input has on the
15 working memory load of the individual.

It is noted that in this example, a slightly too high indoor temperature would typically not cause a sudden change in the working memory load but a change that must be monitored over an extended period of time.

In another example, the individual wears a pair of headphones equipped with
20 noise-reducing capability, and the camera and processing unit of the tablet that the individual currently is operating detect an increase in pupil size, thereby indicating an increased working memory load of the individual.

The noise-reducing headphones are further equipped with a microphone acting as a sensory input detection device in combination with a processing
25 unit of the headphones for registering disturbing background noise. After receiving a wireless or wired signal from the computer indicating that an increase in working memory load has been detected, the processing unit of the noise-reducing headphones initiates a countermeasure to the identified sensory input by subjecting the individual to a signal which is an out-of-phase

representation of the background noise, thereby effectively cancelling out the background noise.

In another embodiment of the invention, the identifying of a sensory input affecting the working memory load of the individual is advantageously
5 performed by identifying a sensory input coinciding in time with the detected increase in the working memory load, wherein the identified at least one sensory input is considered to be the sensory input affecting the working memory load of the individual.

This is advantageous if a sensory input occurs which gives rise to a rather
10 sudden increase in working memory load such as, e.g., when the individual is subjected to a sound or a light having an immediate impact on the working memory load. However, in case the individual is subjected to a less evident sensory input, such as, e.g., a change in temperature which generally is a much slower process, a processing unit acting as a sensory input detection
15 device may have to evaluate events which have happened during a recent period of time, for instance during the last 10 minutes. As an example, the sensory input detection device may be a temperature sensor used in combination with the processing unit for evaluating whether an increase in temperature has occurred over the last 10 minutes, or even a gas sensor
20 evaluating whether a particular chemical substance is present in ambient air.

In another embodiment of the invention, for each identified sensory input, a measure with which the identified at least one sensory input affects the working memory load of the individual is advantageously determined. For instance, the measure may be configured to assume a value between 10 and
25 100, where 10 would imply a small impact, while 100 would imply a major impact on the working memory load of the individual.

In another embodiment of the invention, the measure associated with a particular sensory input may be stored in a database for later use. In practice, in a situation where the individual is subjected to a plurality of sensory

inputs, it may be difficult to assess which particular input(s) affect(s) the individual the most.

In an embodiment of the invention, by utilizing a database comprising a measure associated with each type of sensory input, the processing unit being
5 configured to diminish the impact of the sensory input(s) may conclude by assessing the database that one or a couple of different sensory inputs usually affect the individual to higher degree than others, and accordingly diminishes the effect of these high-impact sensory inputs.

Advantageously, in an embodiment of the invention, it is possible to utilize a
10 learning phase during which the individual purposely is subjected to different sensory inputs while changes in the working memory load of the individual are monitored. Further, a measure associated with each sensory input is estimated and stored in a database for subsequent use.

In the above examples, the change in the individual's work load is detected by
15 means of a processing unit analysing images captured by a camera. However, other sensor devices are envisaged, such as EEG sensors, electrocardiogram (EKG) sensors, heart rate meters, etc.

Further, as has been discussed with reference to what is known in the art in
20 the above, a number of different sensory input detection devices may be envisaged.

Further provided is a computer program comprising computer-executable instructions for causing a device to perform steps of the method according to the first aspect of the invention, when the computer-executable instructions are executed on a processing unit included in the device.

25 Further provided is a computer program product comprising a computer readable medium, the computer readable medium having the computer program of the device embodied thereon.

Generally, all terms used in the claims are to be interpreted according to their ordinary meaning in the technical field, unless explicitly defined otherwise herein. All references to "a/an/the element, apparatus, component, means, step, etc." are to be interpreted openly as referring to at least one instance of
5 the element, apparatus, component, means, step, etc., unless explicitly stated otherwise. The steps of any method disclosed herein do not have to be performed in the exact order disclosed, unless explicitly stated.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is now described, by way of example, with reference to the
10 accompanying drawings, in which:

Figure 1 illustrates a device for identifying sensory inputs affecting working memory load of an individual, according to an embodiment of the invention;

Figure 2 shows a top view of the device of Figure 1 with a user seated in front of the device;

15 Figure 3 illustrates a flowchart of a method of identifying sensory inputs affecting working memory load of an individual, according to an embodiment of the invention;

Figure 4 illustrates a flowchart of a method of identifying sensory inputs affecting working memory load of an individual, according to another
20 embodiment of the invention;

Figure 5 shows a top view of the device of Figure 1 with a user seated in front of the device equipped with a pair of headphones with noise-reducing capability;

Figure 6 illustrates a flowchart of a method of identifying sensory inputs
25 affecting working memory load of an individual, according to yet another embodiment of the invention;

Figure 7 illustrates a flowchart of a method of identifying sensory inputs affecting working memory load of an individual, according to a further embodiment of the invention;

Figure 8 illustrates a flowchart of a method of identifying sensory inputs affecting working memory load of an individual, according to yet a further embodiment of the invention; and

Figure 9 illustrates a device for identifying sensory inputs affecting working memory load of an individual, according to another embodiment of the invention.

10 DETAILED DESCRIPTION

The invention will now be described more fully hereinafter with reference to the accompanying drawings, in which certain embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided by way of example so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout the description.

Figure 1 illustrates a device 10 for identifying sensory inputs affecting working memory load of an individual according to an embodiment of the invention. The device is and shows a device exemplified in the form of a desktop computer 10 in a front view, having a screen 11, a camera 12, a microphone 13, and a loudspeaker 14.

Figure 2 shows a top view of the desktop computer 10, with a user 20 seated in front of it. As can be seen, the camera 12, the microphone 13, and the loudspeaker 14 are operatively coupled to a processing unit 15 embodied in the form of one or more microprocessors arranged to execute a computer program 16 downloaded to a suitable storage medium 17 associated with the microprocessor 15, such as a Random Access Memory (RAM), a Flash memory, a hard disk drive, a cloud service or other information storage

devices. The processing unit 15 is arranged to control operation of the desktop computer 10 when the appropriate computer program 16 comprising computer-executable instructions is downloaded to the storage medium 17 and executed by the processing unit 15. The storage medium 17 may also be a computer program product comprising the computer program 16.

Alternatively, the computer program 16 may be transferred to the storage medium by means of a suitable computer program product, such as a Digital Versatile Disc (DVD) or a memory stick. As a further alternative, the computer program may be downloaded to the storage medium 17 over a network. The processing unit 15 may alternatively be embodied in the form of a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field-programmable gate array (FPGA), a complex programmable logic device (CPLD), etc.

As discussed hereinbefore, the computer 10 is in an embodiment configured to identify events that have an unwanted effect on the focus of the user, e.g., whilst the user performs a cognitively demanding task.

As can be seen in Figure 2, the user 20 of the computer 10 is, when seated in front of the screen 11, positioned in a field of view of the camera 12. A method of identifying sensory inputs affecting working memory load of an individual - i.e., the user 20 - will be described in the following with reference to Figure 2 and further to Figure 3 illustrating a flowchart of the method.

A sensor device is used to monitor working memory load of an individual in step S101. In this particular exemplifying embodiment, the sensor device is embodied by the camera 12 which monitors one or both eyes of the user 20. Now, if the user 20 becomes distracted by a sensory input, the working memory load will increase, which typically results in an increase of the pupils of the user's eyes.

In an embodiment of the invention, it is envisaged that if the diameter of the pupil of one of the user's eyes increase above a threshold value, for instance 0.5 mm, the working memory load of the user 20 is considered to have

increased. It is further envisaged that different threshold values are used; for example, a 0.2 mm increase represents a first working memory load value A, a 0.4 mm increase represents a second working memory load value B, a 0.6 mm increase represents a third working memory load value C, and so on.

- 5 In step S102, the camera 12 (or the processing unit 15 analysing images captured by the camera 12), detects an increase in the working memory load of the user 20, for instance by concluding that the diameter of the pupils of the user's eyes has increased above a certain threshold value.

In response to the detected increase in the user's working memory load, a
10 sensory input detection device - in this particular embodiment being exemplified by the processing unit 15 receiving signals from the microphone 13 – advantageously identifies one or more sensory inputs affecting the working memory load of the user 20 in step S103. In this example, the built-in microphone 13 of the computer 20 registers a sound
15 being likely to be the sensory input causing the detected change in working memory load of the user 20.

In an embodiment, the sensory input, in this example being a sound, is advantageously identified by the processing unit 15 to coincide in time with the detected increase in the working memory load, thereby being considered
20 to be the sensory input causing the increase. Thus, if the sound was recorded just before the increase in working memory load was detected, the sound is considered be the sensory input causing the increase.

In an embodiment, upon having identified a sensory input affecting the working memory load of the user 20, actions are taken to diminish the
25 impact that the sensory input has on the working memory load, as will be discussed in the following.

In the embodiment illustrated in the flowchart of Figure 4, after the microphone 13 has recorded a sound being considered to be the sensory input causing the increase in working memory load in step S103, the processing
30 unit 15 of the computer 10 concludes that the user 20 herself just started an

audio player of the computer 10 and advantageously lowers a sound level being output by the audio player via the loudspeaker 14 of the computer 10 in step S104a, since the selected audio level is too high and thus affects the working memory load of the user 20. Hence, in this particular embodiment, the impact that the identified sensory input has on the working memory load of the user is diminished using the processing unit 15 controlling the very source of the identified sensory input, in this case being the computer loudspeaker 14.

In another embodiment illustrated with reference to Figures 5 and 6, the impact of the sensory input on the user's working memory load is diminished by initiating a countermeasure to the identified one sensory input.

As can be seen in Figure 5, the user 20 wears a pair of headphones 21 which in this example is equipped with noise-reducing capability. Now, the camera 12 of the computer 10 in cooperation with the processing unit 15 monitor and detect an increase in the working memory load of the user 20 in steps S101 and S102 as illustrated in Figure 6, and a processing unit and microphone (not shown) of the headphones 21 serve as a sensory input detection device for registering disturbing background noise in step S103, as illustrated with the identified sound 22.

After receiving a wireless or wired signal 23 from the computer 10 indicating that an increase in working memory load has been detected in step S102, the processing unit of the noise-reducing headphones 21 advantageously initiates a countermeasure to the identified sensory input by subjecting the individual to a signal 24 which is an out-of-phase representation of the background noise 23 in step S104b, thereby effectively cancelling out the background noise.

In the above discussed embodiments, the camera 12 is used as a sensor device for monitoring and detecting an increase in working memory load of the user 20 in cooperation with the processing unit 15, by detecting changes in the pupil size of the user's eyes. It may further be envisaged that the

camera 12 is used as a gaze detector with capability to track a direction of the user's visual attention and its duration.

Generally, people have a tendency to look at an object when using it for a task – someone working at a laptop will spend most of the task time looking at the
5 laptop. Hence, if their gaze is suddenly shifted, this may be an indication that they have been distracted. When gaze is shifted to another object that is providing a sensory input (e.g., making a sound, displaying changing images, etc.), this may indicate that that object is causing distraction.

However, people may also shift gaze to concentrate, or for inspiration, such
10 as looking skywards.

By tracking the user's gaze, and in particular recording the times she changes gaze from a device she is using for her task and toward an object providing a sensory input, a measurement can be made as to how often the user is likely being distracted. A signature 'inspiration' or 'concentration' gaze can be
15 learnt for a given user and discounted from this measurement.

Further, it is envisaged that a worn device equipped with a camera is used as a sensor device for monitoring and detecting an increase in working memory load of the user in cooperation with a processing unit of the worn device, such as a virtual reality (VR) headset or a Google Glass type eyewear.

Moreover, activity tracking sensor devices that is able to identify specific
20 activities the user is engaged in and possibly the user's efficiency in these activities is envisaged.

Similar to gaze, a person's motion can be used to assess the likelihood they are being distracted. Hence if the sensor device is a motion tracking sensor,
25 and if the user shifts position often, particular in response to an object providing sensory input (e.g., a television) then the sensor's output can provide an indication that object is distracting. Therefore, by monitoring the person's motion, and if possible correlating this with objects in the room,

then a measure can be made as to whether they are being distracted and by what.

An activity tracking sensor device may also track the progress of a task, for example number of words written in a document, increase in size of a file of a drawing file, number of cells adjusted in an Excel file etc.

Various sensor devices other than cameras can be envisaged, e.g., EEG sensors, EKG sensors, heart rate meters, etc.

Different properties may further be combined to detect an increase in the working memory load of the user, for instance by considering a combination of two or more of pupil size, gaze, heart rate, activity, EEG, etc.

Further, a number of types of devices for identifying sensory inputs affecting working memory load of an individual can be envisaged, such as laptops, tablets, smart phones, smart watches (using for instance heart rate as a measure of working memory load), television sets, etc.

In yet another embodiment, the user is during a learning phase of the device purposely subjected to different sensory inputs while changes in the working memory load of the individual are monitored. Further, a measure associated with each particular sensory input is estimated and stored in a database for subsequent use.

For instance, for any given user, a nominal working memory load may be recorded when the user practically is not subjected to any (disturbing) sensory input in her work environment. This lowest working memory load is denoted "Load_{NOM}", and corresponds to pupil size denoted "PupilSize_{NOM}".

Now, the user is subjected to different sensory inputs, and an increase in pupil size of the user's eyes is detected and a corresponding increase in working memory load, as will be illustrated in Table 1 herein below.

Hence, in an embodiment of the invention, a representation of any identified sensory input, and the corresponding measure with which said any identified

sensory input affects the working memory load of the individual, is entered in a database as illustrated in Table 1.

Reference is further made to the flowchart of Figure 7.

In a first round, the user 20 is subjected to three different sound levels of music selected from one of her playlists (i.e., music that the user indeed appreciates) and played through the loudspeaker 14 of her computer, while the camera 12 monitors the pupil size of the user's eyes in step S101 and the processing unit 15 detects a 0.1 mm increase, a 0.3 mm increase and a 0.5 mm increase, respectively, for the three (increasing) sound levels Sound level 1, Sound level 2, and Sound level 3, in step S102, which are considered in step S105 to correspond to a 10%, 30% and 50% increase in working memory load with respect to Load_{NOM}. The different sounds are identified by the microphone 13 and the processing unit 15 in step S103.

Hence, for each identified sensory input of the plurality of sensory inputs affecting the working memory load of the user 20, a measure with which each identified sensory input affects the working memory load of the user 20 is determined and entered in the database. This assessment is typically performed by the processing unit 15, but could alternatively be performed by the camera 12 itself. The three recorded sounds and their respective impact on the working memory load correspond to Items 1, 2, and 3, in Table 1.

In a second round, the user 20 is subjected to lighting conditions corresponding to indoor lighting of the office during a winterday. Again, the camera 12 monitors the pupil size of the user's eyes and the processing unit 15 detects a 0.2 mm increase, which is considered to correspond to a 20% increase in working memory load with respect to Load_{NOM}. This corresponds to Item 4 in Table 1.

In a third round, the user 20 is subjected to the sound of the office air conditioning system starting. The camera 12 monitors the pupil size of the user's eyes and the processing unit 15 detects a 0.1 mm increase, which is

considered to correspond to a 10% increase in working memory load with respect to $Load_{NOM}$. This corresponds to Item 5 in Table 1.

Sensory input	Change in pupil size from nominal size	Increase in working memory load from nominal load
Sound level 1 of audio player	$PupilSize_{NOM} + 0.1 \text{ mm}$	$Load_{NOM} + 10\%$
Sound level 2 of audio player	$PupilSize_{NOM} + 0.3 \text{ mm}$	$Load_{NOM} + 30\%$
Sound level 3 of audio player	$PupilSize_{NOM} + 0.5 \text{ mm}$	$Load_{NOM} + 50\%$
Wintertime indoor lighting	$PupilSize_{NOM} + 0.2 \text{ mm}$	$Load_{NOM} + 20\%$
Air condition sound	$PupilSize_{NOM} + 0.1 \text{ mm}$	$Load_{NOM} + 10\%$

Table 1. Recorded sensory inputs vs. increase in working memory load.

- 5 Table 1 exemplifies five different items, while in a real-life scenario, tens of different sensory inputs may be recorded in order to cover an abundance of situations having potential to occur and thus increase the working memory load of the user.

10 It should be noted that a database such as that of Table 1 may be built with purposely subjecting the user 20 to sensory inputs, but can be built while the user 20 is “naturally” subjected to the sensory inputs. Further, the naturally occurring sensory inputs can be added to a database comprising sensory inputs to which the user 20 purposely has been subjected.

In a further embodiment illustrated with reference to the flowchart of Figure 8, the database of Table 1 is utilized to select which out of a number of sensory inputs that the user 20 is subjected to should be diminished to effectively decrease the working memory load of the user 20.

- 5 If an increase in working memory load of the user 20 is detected, some sensory inputs (i.e., sounds, visual inputs, and potentially even odours) may be removed or obscured in order to reduce the load on the user's working memory.

In other words - as distractions taking place within the locality of the user
10 (i.e., within a distance that those activities can impact the senses of the user) provide sensory inputs that do not contribute to the execution of the user's task, the presence of these sensory inputs may be mitigated or even eliminated.

Assuming that that the user 20 of Figure 2 is subjected to a plurality of
15 sensory inputs, for instance those listed in Table 1, as identified by the microphone 13 as regards the audible sensory inputs and a photometer (not shown) identifying the indoor lighting in step S103 after an increase in load has been detected by the processing unit 15 in step S102. In such scenario, a problem which may arise is related to distinguishing which of the sensory
20 inputs affects the user 20 the most.

By turning to the database of Table 1 in step S103a – assuming that the audio player of the computer 10 outputs music at Sound level 2 – the processing unit 15 concludes that the audio player playing at Sound level 2 affects the user 20 as much as the indoor lighting and the sound of the air condition do
25 jointly.

The processing unit 15 of the computer 10 may hence determine that the audio player is to be turned off in step S104a, or at least that its output sound level should be reduced, thereby advantageously decreasing the working memory load of the user 20.

Figure 9 illustrates a device 10 for identifying identify sensory inputs affecting working memory load of an individual. The device 10 comprises monitoring means 30 adapted to monitor working memory load of the individual, detecting means 31 adapted to detect an increase in the working
5 memory load of the individual, and identifying means 32 adapted to identify, in response to detecting the increase, at least one sensory input affecting the working memory load of the individual.

The monitoring means 30, detecting means 31 and identifying means 32 may comprise communications interface(s) for receiving and providing
10 information, and further a local storage for storing data, and may (in analogy with that previously discussed) be implemented by a processor embodied in the form of one or more microprocessors arranged to execute a computer program downloaded to a suitable storage medium associated with the microprocessor, such as a RAM, a Flash memory or a hard disk drive.

15 The invention has mainly been described above with reference to a few embodiments. However, as is readily appreciated by a person skilled in the art, other embodiments than the ones disclosed above are equally possible within the scope of the invention, as defined by the appended patent claims.

CLAIMS

1. A method of identifying sensory inputs affecting working memory load of an individual (20), comprising:
 - monitoring (S101) working memory load of the individual (20) using a
 - 5 sensor device (12);
 - detecting (S102) an increase in the working memory load of the individual (20);
 - identifying (S103), in response to detecting the increase, at least one sensory input affecting the working memory load of the individual (20).
- 10 2. The method according to claim 1, wherein the identifying (S103) at least one sensory input affecting the working memory load of the individual (20) comprises:
 - identifying at least one sensory input coinciding in time with the detected increase in the working memory load.
- 15 3. The method according to claims 1 or 2, further comprising:
 - diminishing (S104a, S104b) an impact that the identified at least one sensory input has on the working memory load of the individual (20).
4. The method according to claim 3, wherein the diminishing (S104a) of the impact comprises:
 - 20 controlling a source (14) of the identified at least one sensory input to diminish an impact that the identified at least one sensory input has on the working memory load of the individual (20).
5. The method according to claims 3 or 4, wherein the diminishing (104b) of the impact comprises:
 - 25 initiating a countermeasure (24) to the identified at least one sensory input (22) to diminish an impact that the identified at least one sensory input has on the working memory load of the individual (20).
6. The method according to any one of claims 1 to 5, wherein the identifying (S103) of at least one sensory input affecting the working memory

load of the individual (20) comprises:

identifying a plurality of sensory inputs affecting the working memory load of the individual; and wherein the method further comprises:

determining (S105), for each identified sensory input of the plurality of
5 sensory inputs affecting the working memory load of the individual (20), a
measure with which said each identified sensory input affects the working
memory load of the individual (20).

7. The method according to claim 6, wherein the identifying (S103) of at
least one sensory input affecting the working memory load of the individual
10 (20) comprises:

subjecting the individual (20) to the plurality of sensory inputs.

8. The method according to claims 6 or 7, wherein the determining (S105)
of a measure with which said each identified sensory input affects the
working memory load of the individual (20) further comprises:

15 entering a representation of any identified sensory input, and the
corresponding measure with which said any identified sensory input affects
the working memory load of the individual (20), in a database.

9. The method according to any one of claims 6 to 8, wherein the
diminishing (S104a, S104b) of an impact that the identified at least one
20 sensory input has on the working memory load of the individual (20)
comprises:

assessing (S103a) the database to determine, if a plurality of sensory
inputs are identified, which of the identified sensory inputs have a high
impact on the working memory load; wherein
25 the impact of one or more of the determined high-impact sensory inputs
on the working memory load of the individual (20) is diminished.

10. The method according to any one of claims 1 to 9, wherein the identified
sensory input comprises one or more of: audible input, visual input, changes
in temperature, changes in humidity, odours.

11. The method according to any one of claims 1 to 10, wherein the sensor device (12) configured to monitoring working memory load of the individual (20) is selected from a group comprising: an imaging sensor, a heart rate meter, an electroencephalogram (EEG) sensor, an electrocardiogram (EKG) sensor.
12. A computer program (16) comprising computer-executable instructions for causing a device (10) to perform the steps recited in any one of claims 1 to 11 when the computer-executable instructions are executed on a processing unit (15) included in the device.
13. A computer program product comprising a computer readable medium (17), the computer readable medium having the computer program (16) according to claim 12 embodied thereon.
14. A device (10) for identifying sensory inputs affecting working memory load of an individual (20), the device comprising:
- 15 a sensor device (12) configured to monitor working memory load of the individual (20); and
- a processing unit (15) configured to detect an increase in the working memory load of the individual (20) and to identify, in response to detecting the increase, at least one sensory input affecting the working memory load of the individual (20).
15. The device (10) according to claim 14, wherein the processing unit (15) is configured to, when identifying at least one sensory input affecting the working memory load of the individual (20):
- 25 identify at least one sensory input coinciding in time with the detected increase in the working memory load.
16. The device (10) according to claims 14 or 15, the processing unit (15) being configured to:
- diminish (S104a, S104b) an impact that the identified at least one sensory input has on the working memory load of the individual (20).

17. The device (10) according to claim 16, the processing unit (15) being configured to:

control a source (14) of the identified at least one sensory input to diminish an impact that the identified at least one sensory input has on the
5 working memory load of the individual (20).

18. The device (10) according to claims 16 or 17, the processing unit being configured to:

initiate a countermeasure (24) to the identified at least one sensory input (22) to diminish an impact that the identified at least one sensory input
10 has on the working memory load of the individual (20).

19. The device (10) according to any one of claims 14 to 18, wherein the processing unit (15) is configured to, when identifying at least one sensory input affecting the working memory load of the individual (20):

identify a plurality of sensory inputs affecting the working memory load
15 of the individual (20); and wherein the processing unit (15) further is configured to:

determine, for each identified sensory input of the plurality of sensory inputs affecting the working memory load of the individual (20), a measure with which said each identified sensory input affects the working memory
20 load of the individual (20).

20. The device (10) according to claim 19, further being configured to:
subject the individual (20) to the plurality of sensory inputs.

21. The device (10) according to claims 19 or 20, the processing unit (15) further being configured to, when determining a measure with which said
25 each identified sensory input affects the working memory load of the individual (20):

enter a representation of any identified sensory input, and the corresponding measure with which said any identified sensory input affects the working memory load of the individual (20), in a database.

22. The device (10) according to any one of claims 19 to 21, wherein the processing unit (15) further is configured to, when diminishing an impact that the identified at least one sensory input has on the working memory load of the individual (20):

5 assess the database to determine, if a plurality of sensory inputs are identified, which of the identified sensory inputs have a high impact on the working memory load; wherein

 the impact of one or more of the determined high-impact sensory inputs on the working memory load of the individual (20) is diminished.

10 23. The device (10) according to any one of claims 14 to 22, wherein the identified sensory input comprises one or more of: audible input, visual input, changes in temperature, changes in humidity, odours.

 24. The device (10) according to any one of claims 14 to 23, wherein the sensor device (12) configured to monitoring working memory load of the
15 individual (20) is selected from a group comprising: an imaging sensor, a heart rate meter, an electroencephalogram (EEG) sensor, an electrocardiogram (EKG) sensor.

1/6

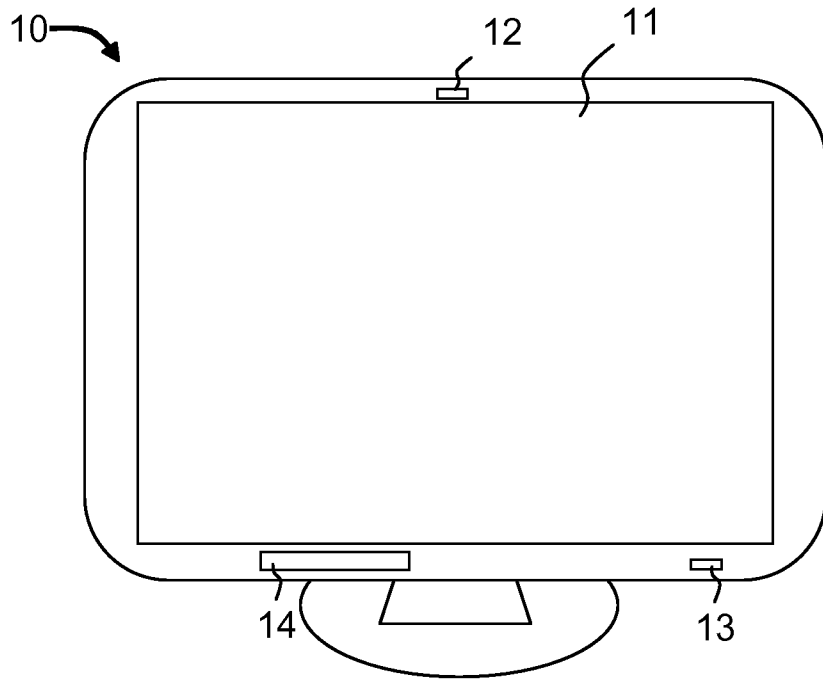


Fig. 1

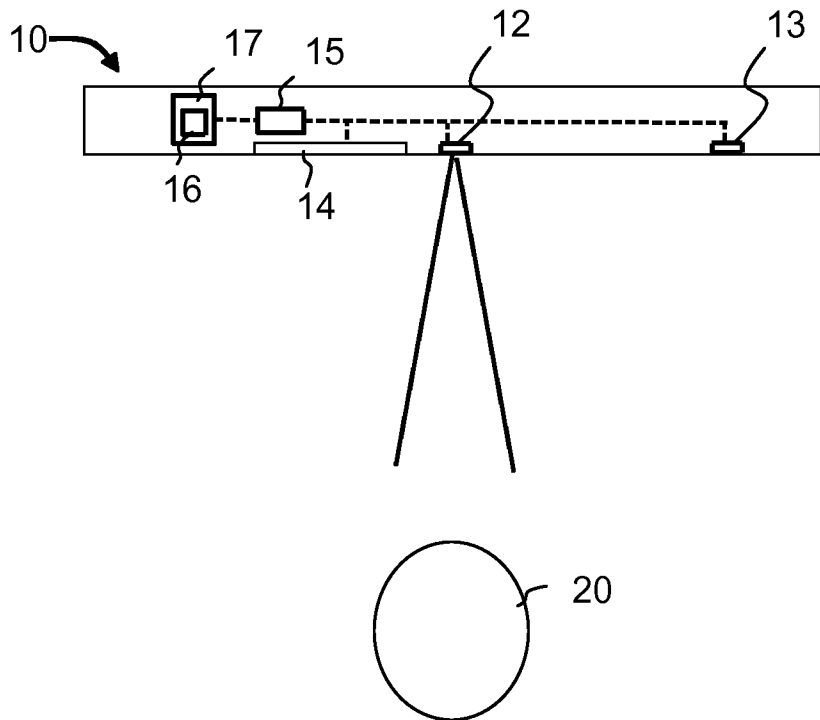


Fig. 2

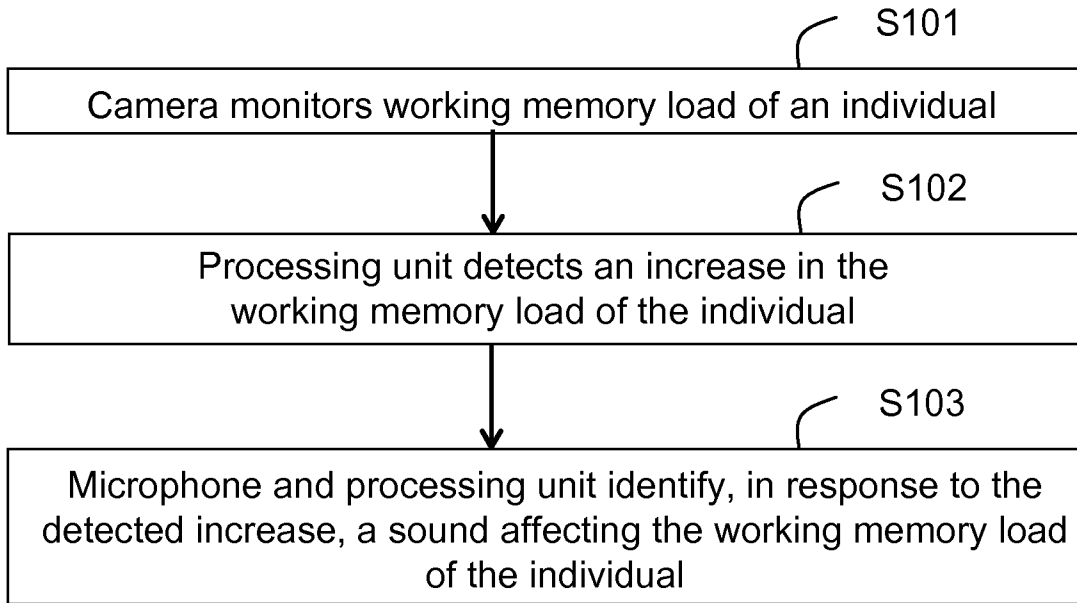


Fig. 3

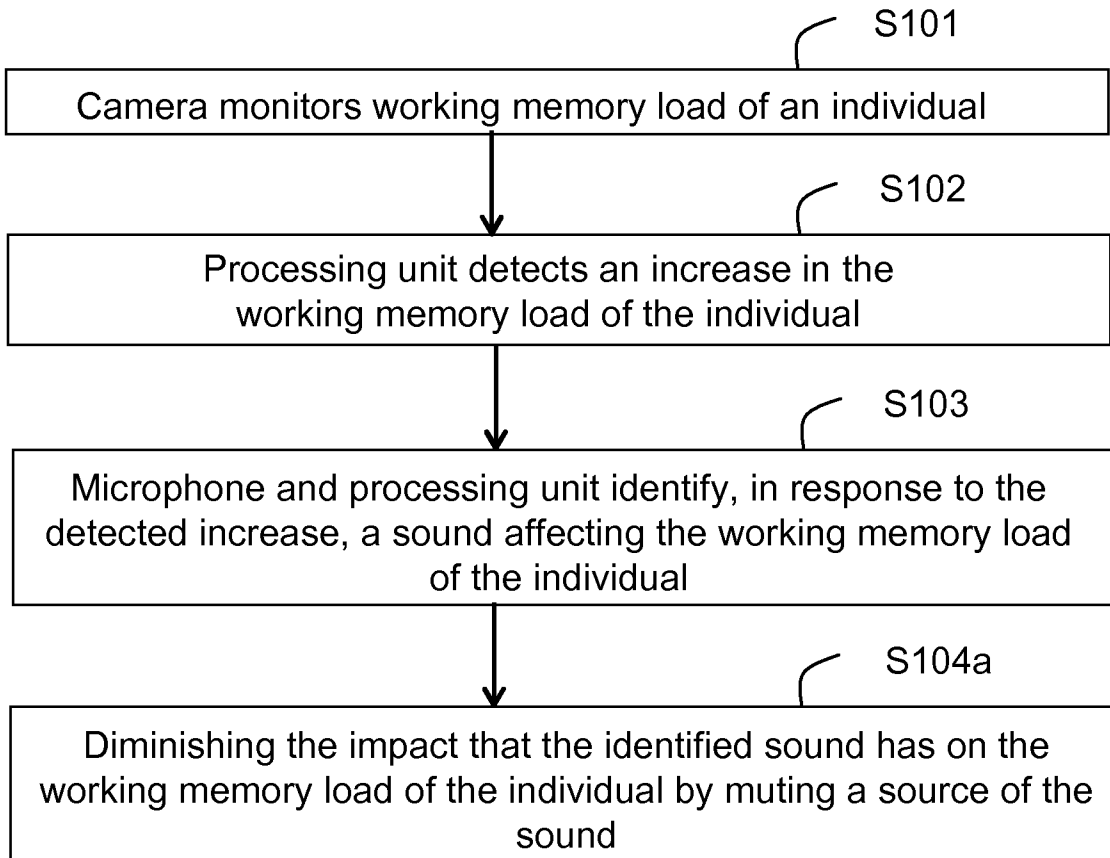


Fig. 4

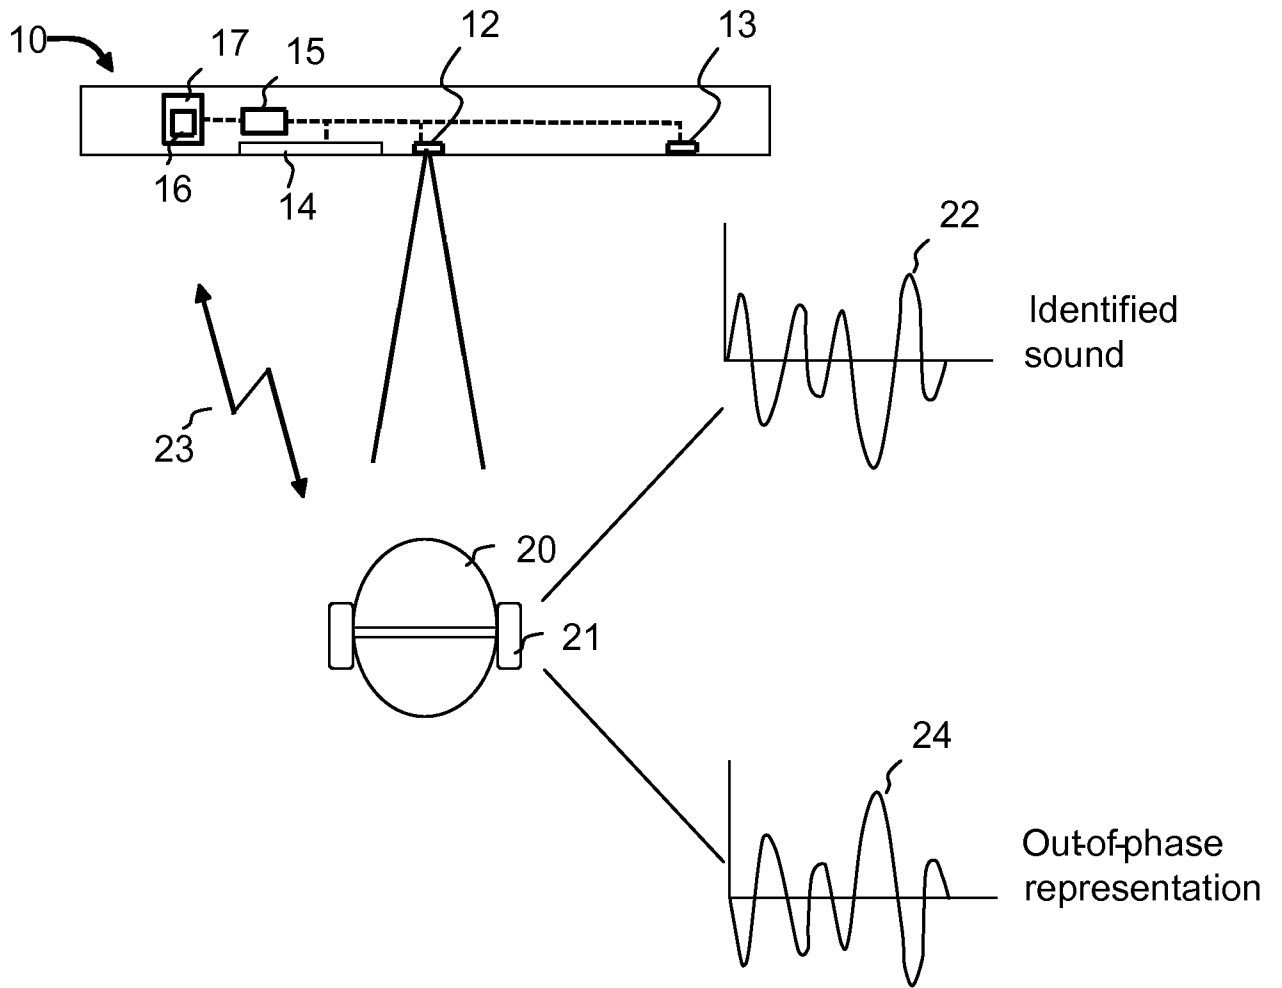


Fig. 5

4/6

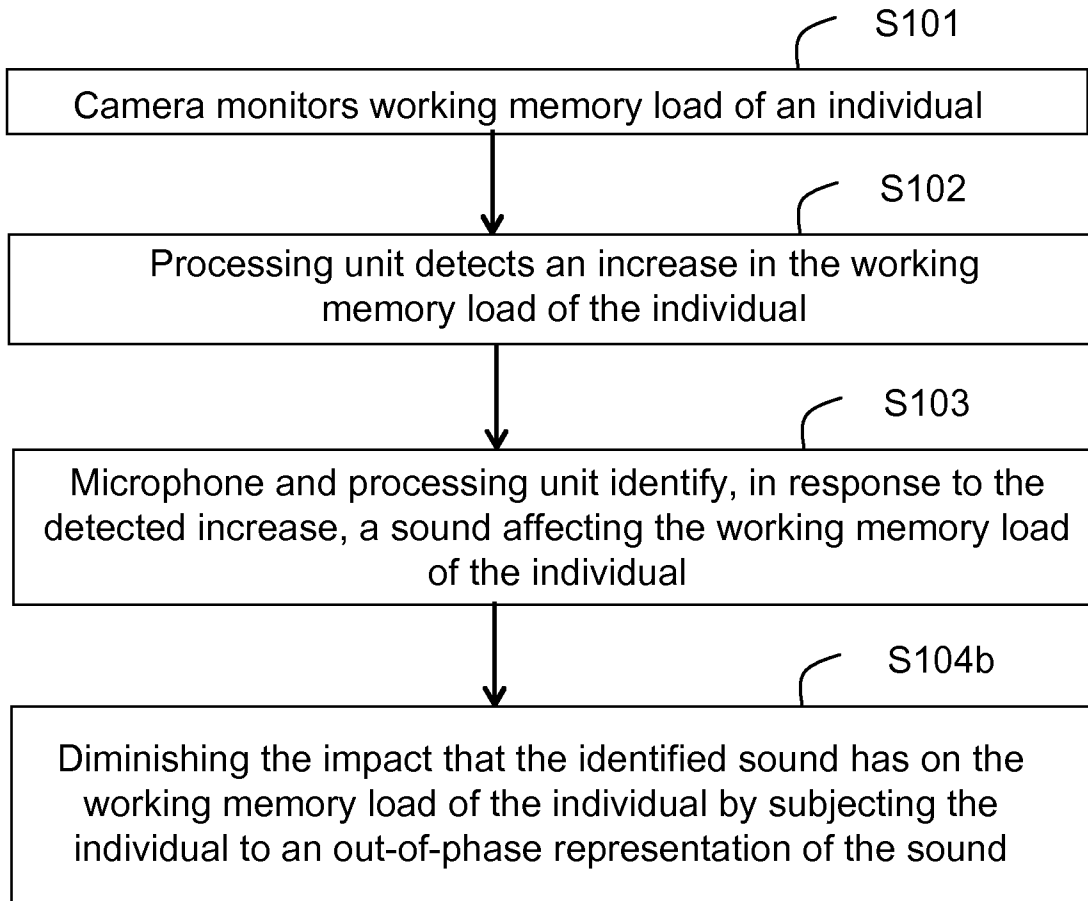


Fig. 6

5/6

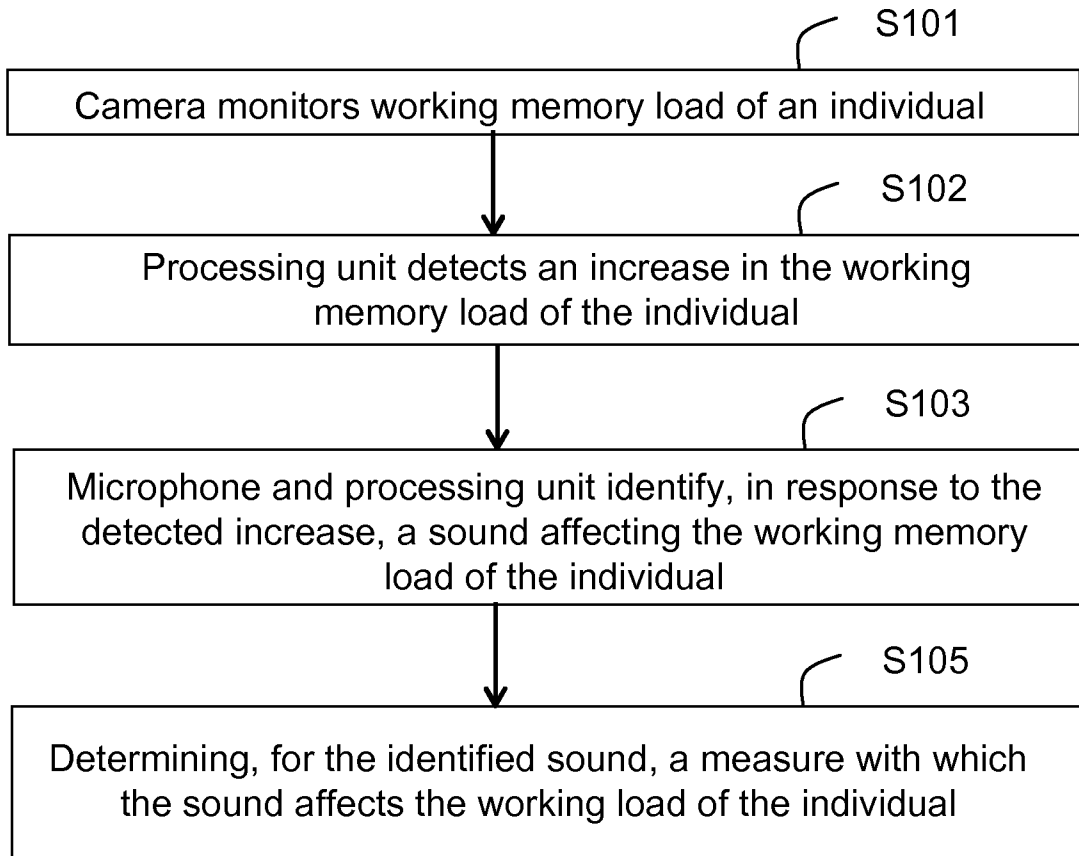


Fig. 7

6/6

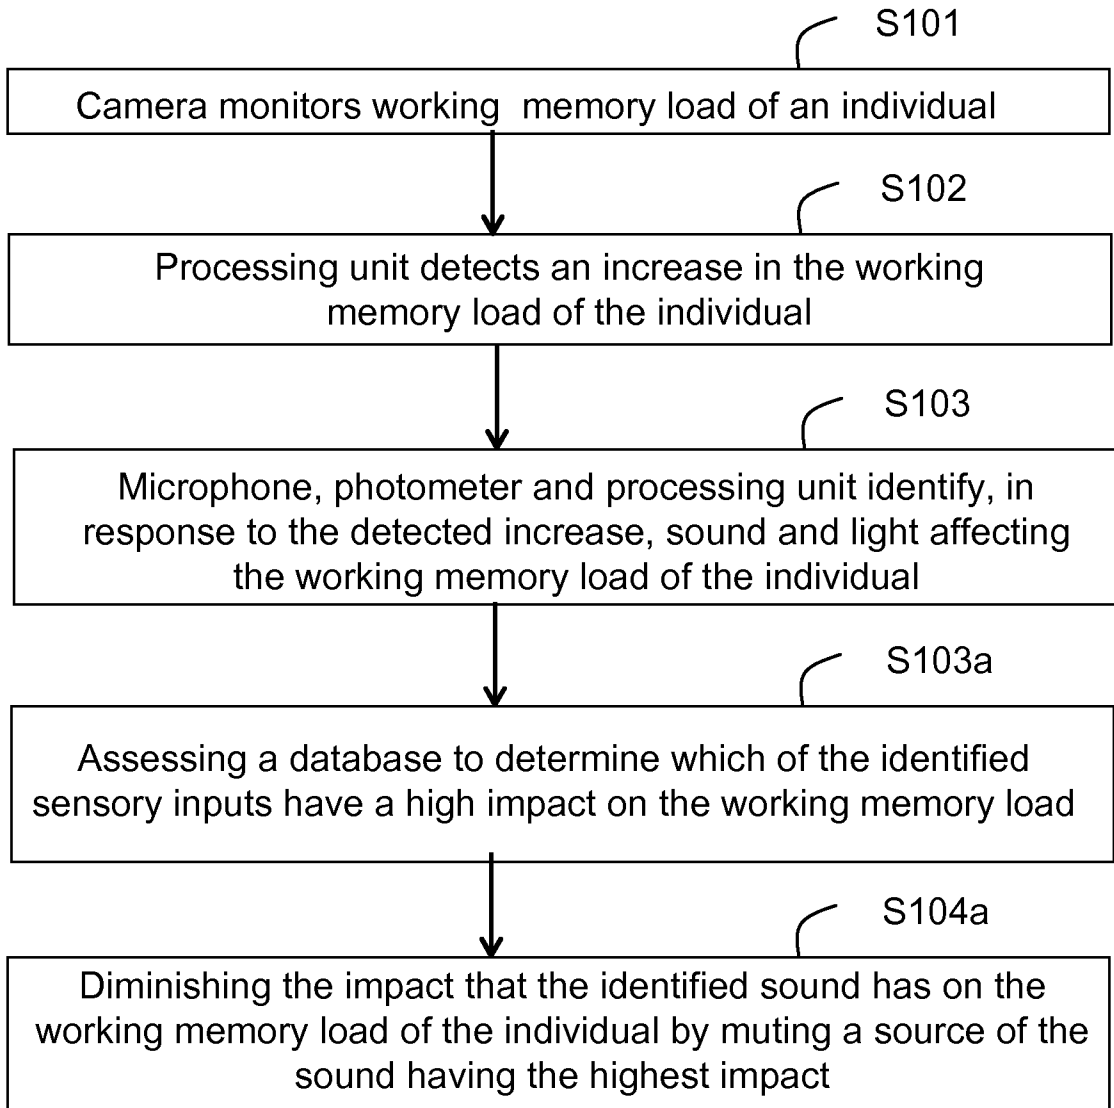


Fig. 8

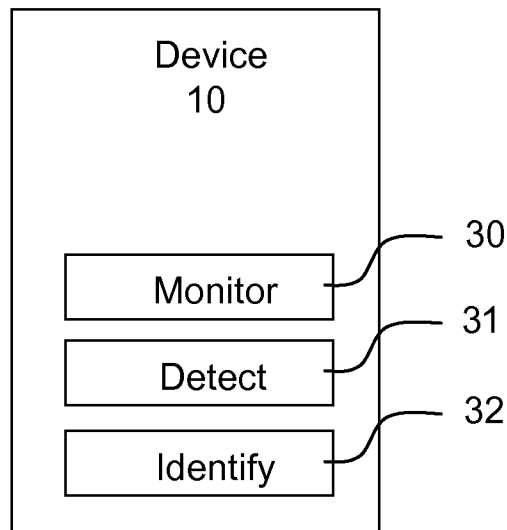


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/075748

A. CLASSIFICATION OF SUBJECT MATTER
 INV. A61B5/00 A61B5/04 A61B5/16 A61B5/107 A61B5/02
 A61B5/0402 A61B5/0476 A61B3/11
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data, COMPENDEX, EMBASE, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007/165019 A1 (HALE KELLY S [US] ET AL) 19 July 2007 (2007-07-19) abstract paragraphs [0007], [0008], [0011] - [0014]; figures; tables 3,4 ----- -/--	1-24

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 15 June 2017	Date of mailing of the international search report 23/06/2017
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Juárez Colera, M
--	--

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2016/075748

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	NIERHAUS T ET AL: "Background and evoked activity and their interaction in the human brain", MAGNETIC RESONANCE IMAGING, ELSEVIER SCIENCE, TARRYTOWN, NY, US, vol. 27, no. 8, 1 October 2009 (2009-10-01), pages 1140-1150, XP026601966, ISSN: 0730-725X, DOI: 10.1016/J.MRI.2009.04.001 [retrieved on 2009-06-04]	1,2,6-8, 10-15, 19-21, 23,24
A	abstract paragraphs [0002] - [0004]; figures 2,3 -----	3-5,9, 16-18,22
X	WILSCH ANNA ET AL: "What works in auditory working memory? A neural oscillations perspective", BRAIN RESEARCH, vol. 1640, 1 January 2014 (2014-01-01), pages 193-207, XP029544723, ISSN: 0006-8993, DOI: 10.1016/J.BRAINRES.2015.10.054	1,2,6-8, 10-15, 19-21, 23,24
A	abstract paragraphs [0002] - [0004]; figures 1,2 -----	3-5,9, 16-18,22
A	US 2009/312665 A1 (DAIMOTO HIROSHI [JP] ET AL) 17 December 2009 (2009-12-17) the whole document -----	1-24
A	VEERLE ROSS ET AL: "Investigating the influence of working memory capacity when driving behavior is combined with cognitive load: An LCT study of young novice drivers", ACCIDENT ANALYSIS & PREVENTION, vol. 62, 1 January 2014 (2014-01-01), pages 377-387, XP055381934, GB ISSN: 0001-4575, DOI: 10.1016/j.aap.2013.06.032 the whole document -----	1-24

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/075748

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007165019 A1	19-07-2007	US 2007165019 A1	19-07-2007
		US 2011218953 A1	08-09-2011

US 2009312665 A1	17-12-2009	JP 5127576 B2	23-01-2013
		JP 2009297129 A	24-12-2009
		US 2009312665 A1	17-12-2009

专利名称(译)	识别影响个人工作记忆负荷的感觉输入		
公开(公告)号	EP3531892A1	公开(公告)日	2019-09-04
申请号	EP2016790915	申请日	2016-10-26
[标]申请(专利权)人(译)	艾利森电话股份有限公司		
申请(专利权)人(译)	爱立信公司 (PUBL)		
当前申请(专利权)人(译)	爱立信公司 (PUBL)		
[标]发明人	ANDERSSON LARS LAWRENSON MATTHEW JOHN		
发明人	ANDERSSON, LARS LAWRENSON, MATTHEW, JOHN		
IPC分类号	A61B5/00 A61B5/04 A61B5/16 A61B5/107 A61B5/02 A61B5/0402 A61B5/0476 A61B3/11		
CPC分类号	A61B3/112 A61B5/02 A61B5/04001 A61B5/0402 A61B5/0476 A61B5/1079 A61B5/163 A61B5/165 A61B5/4005 A61B5/4088 A61B5/4836 A61B5/6897 A61B2503/24 A61B5/0036 A61B5/0077 A61B5 /0205 A61B5/024 A61B5/04842 A61B5/04845 A61B5/04847 A61B5/168		
代理机构(译)	ERICSSON		
外部链接	Espacenet		

摘要(译)

在本发明的一个方面，提供了一种识别影响个体工作记忆负荷的感觉输入的方法。该方法包括：使用传感器装置监测 (S101) 个体的工作记忆负荷;检测 (S102) 个体的工作记忆负荷的增加;以及响应于检测到的增加识别 (S103) 至少一个感觉影响个人工作记忆负荷的输入。