



(11)

EP 3 669 772 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
24.06.2020 Bulletin 2020/26

(51) Int Cl.:
A61B 5/042 (2006.01) A61B 5/00 (2006.01)

(21) Application number: **19218127.9**

(22) Date of filing: **19.12.2019**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **COHEN, Assaf**
2066717 Yokneam (IL)
• **COHN, Goren**
2066717 Yokneam (IL)
• **ILAN, Ido**
2066717 Yokneam (IL)
• **TURGEMAN, Aharon**
2066717 Yokneam (IL)

(30) Priority: **20.12.2018 US 201816228426**

(71) Applicant: **Biosense Webster (Israel) Ltd.**
Yokneam, 2066717 (IL)


(74) Representative: **Small, Gary James**
Carpmaels & Ransford LLP
One Southampton Row
London WC1B 5HA (GB)

(54) **ELECTROPHYSIOLOGICAL RIPPLE MAPPING VISUALIZATION METHOD**

(57) A method includes receiving an anatomical map of at least a portion of a heart. Positions and respective electrocardiogram (ECG) signal amplitudes measured at the positions are received for at least a region of the anatomical map. The ECG signal amplitudes are interpo-

lated to derive a surface representation of the ECG signal amplitudes over the region. The surface representation of the ECG signal amplitudes is presented overlaid on the anatomical map.

FIG. 1

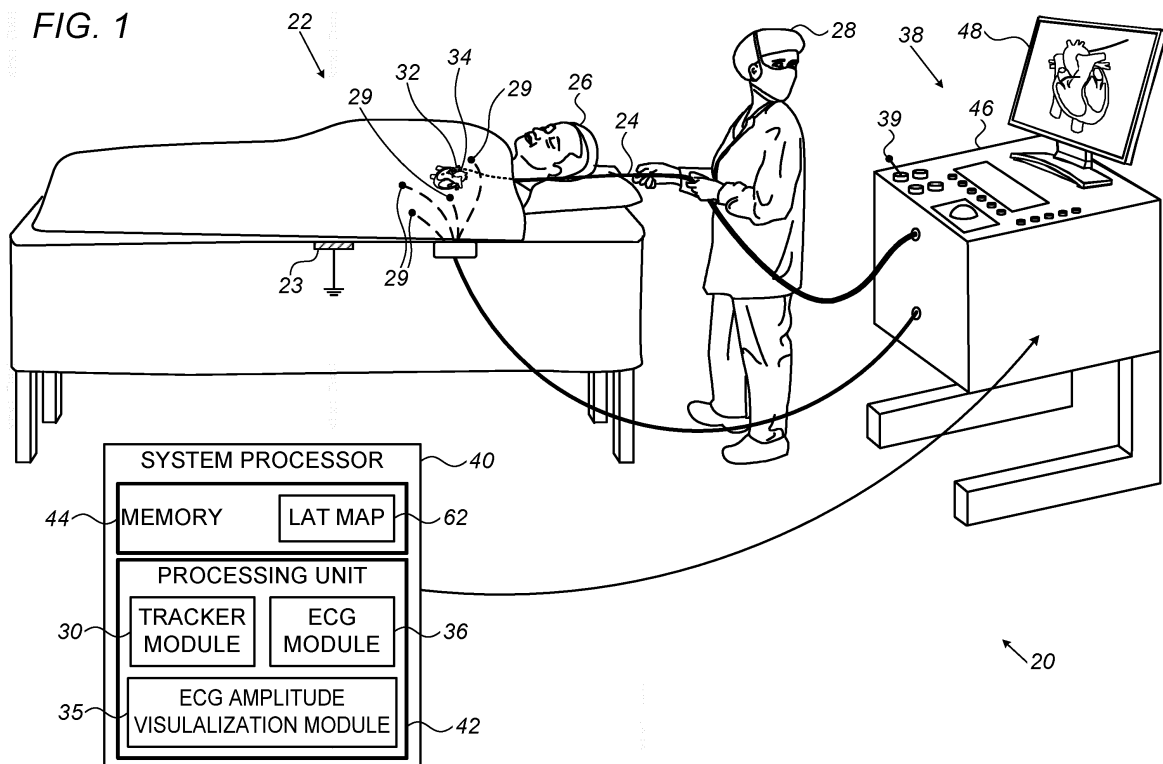

Description

FIELD OF THE INVENTION

[0001] The present invention relates generally to electrophysiological mapping, and particularly to visualization of cardiac electrophysiological maps.

BACKGROUND OF THE INVENTION

[0002] Electrophysiological (EP) cardiac mapping may use visualizations methods previously proposed in the patent literature, to ease an interpretation of an EP map. For example, 2017/0049348 describes a method for determining EP properties of cardiac tissue in order to classify an arrhythmia. An eccentricity parameter reflecting the uniformity of a local conduction velocity, and divergence and curl-like sums or closed path integral parameters associated with the local velocity vectors are provided, and a rhythm classification responsive to catheter movement is displayed, thereby facilitating identification of types and causes of arrhythmia disorders. In an embodiment, conduction velocity vector maps are coupled with local activation time (LAT) maps. Generally, the display is updated immediately following each local depolarization and persisting or gradually fading out until the next local depolarization. Finally, some or all isochrones may be displayed as curved lines on the cardiac surface, for instance at specific intervals since the start of depolarization. This reduces visual clutter and allows a more interpretable superposition of conduction velocity arrows.

[0003] As another example, U.S. Patent Application Publication 2010/0268059 describes a method that includes accessing cardiac information acquired via a catheter located at various positions in a venous network of a heart of a patient. The cardiac information comprises position information, electrical information and mechanical information. The method maps local electrical activation times to anatomic positions to generate an electrical activation time map. The method maps local mechanical activation times to anatomic positions to generate a mechanical activation time map. The method further generates an electromechanical delay map by subtracting local electrical activation times from corresponding local mechanical activation times, and renders at least the electromechanical delay map to a display.

SUMMARY OF THE INVENTION

[0004] An embodiment of the present invention provides a method including receiving an anatomical map of at least a portion of a heart. Positions and respective electrocardiogram (ECG) signal amplitudes measured at the positions are received for at least a region of the anatomical map. The ECG signal amplitudes are interpolated to derive a surface representation of the ECG signal amplitudes over the region. The surface representation of the ECG signal amplitudes is presented overlaid on

the anatomical map.

[0005] In some embodiments, presenting the surface representation includes visualizing respective values of the surface representation as topographical heights above the anatomical map.

[0006] In some embodiments, presenting the surface representation includes presenting a semi-transparent surface that retains the anatomical map visible.

[0007] In an embodiment, interpolating the ECG signal amplitudes includes forming a shape including the interpolated and measured ECG amplitude values.

[0008] In some embodiments, the anatomical map presents Local Activation Times (LAT).

[0009] There is additionally provided, in accordance with an embodiment of the present invention, a system including a memory and a processor. The memory is configured to store an anatomical map of at least a portion of a heart, and to store, for at least a region of the anatomical map, positions and respective electrocardiogram (ECG) signal amplitudes measured at the positions. The processor is configured to interpolate the ECG signal amplitudes to derive a surface representation of the ECG signal amplitudes over the region, and present the surface representation of the ECG signal amplitudes overlaid on the anatomical map.

[0010] The present invention will be more fully understood from the following detailed description of the embodiments thereof, taken together with the drawings in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Fig. 1 is a schematic, pictorial illustration of a cardiac three-dimensional (3D) navigation and electrophysiological (EP) signal analysis system, in accordance with an embodiment of the present invention;

Fig. 2 is a volume rendering showing ripple-mapping visualization of ECG amplitudes overlaid on a cardiac chamber anatomy, in accordance with an embodiment of the present invention; and

Fig. 3 is flow chart that schematically illustrates a method and algorithm for ripple-mapping visualization of ECG amplitudes shown in Fig. 2, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

OVERVIEW

[0012] In order to characterize cardiac electrophysiological (EP) abnormalities of a patient, a catheter-based EP mapping system may be used for generating an EP map of at least part of the heart of the patient, such as an EP map of a cardiac chamber. In a typical catheter-based EP mapping procedure, a distal end of a catheter, which comprises sensing-electrodes, is inserted into the heart

to sense EP signals. As a physician operating the system moves the distal end inside the heart, the EP mapping system acquires EP signals at various cardiac locations, as well as the respective positions of the distal end. Based on these acquired signals, a processor of the mapping system generates the required EP map.

[0013] In some cases, the processor of the EP mapping system presents the measured EP map overlaid on a heart anatomy visualized by, for example, a volume (3D) rendering of at least a portion of the heart. Such an EP overlaid rendering may be very useful in diagnosing cardiac irregularities. For example, ECG "spikes" overlaid on an anatomical map may be used, where the height of the spikes gives a measure of the ECG signal amplitude at the spike position. The spike representation may indicate an anomalous conduction path causing an arrhythmia.

[0014] However, this kind of visualization often tends to be too coarse and/or hides other features of diagnostic value. Moreover, such spikes only give a value of the signal at the given position, not in any intermediate positions, causing discontinuities in visualization, and furthermore the spikes may hide map details beneath or behind the spikes.

[0015] Embodiments of the present invention that are described hereinafter use a processor to interpolate between measured values of the ECG signal at points near a selected location, and represent these interpolated values as topographical heights above the 3D rendering. The topographical heights are connected graphically to give a 3D surface referred to as a "sail," having a continuous ripple, instead of a collection of spikes. In an embodiment, the "sails" are made semi-transparent in order not to hide details.

[0016] Typically, the processor is programmed in software containing a particular algorithm that enables the processor to conduct each of the processor related steps and functions outlined above.

[0017] The disclosed visualization technique to overlay interpolated ECG ripples, that may be semi-transparent, on 3D cardiac anatomy, may improve the diagnostic value of catheter-based EP mapping procedures.

SYSTEM DESCRIPTION

[0018] Fig. 1 is a schematic, pictorial illustration of a cardiac three-dimensional (3D) navigation and electrophysiological (EP) signal analysis system 20, in accordance with an embodiment of the present invention. System 20 may be configured to analyze substantially any physiological parameter or combinations of such parameters. In the description herein, by way of example, the signals analyzed are assumed to be intra-cardiac and/or extra-cardiac (body surface) electrocardiogram (ECG) potential-time relationships. In order to fully characterize such relationships, a processor 40 uses the ECG signals to produce an EP map, such as a local activation time (LAT) map. A method for generating an LAT map is de-

scribed in U.S Patent 9,050,011, whose disclosure is fully incorporated herein by reference.

[0019] In the context of this disclosure, the term "anatomical map" refers to a map that models the 3D shape of at least a portion of the heart, and may have one or more parameters overlaid thereon. An EP map is one special case of an anatomical map, in which one or more electrophysiological parameters are overlaid. A LAT map is an example of an EP map, and thus also regarded as a type of anatomical map.

[0020] Fig. 1 shows an investigative procedure wherein system 20 measures actual electrical activity of a heart 34, using a probe 24. Typically, probe 24 comprises a catheter which is inserted into the body of patient 26 during a mapping procedure performed by a physician 28 using system 20. A distal end 32 of probe 24 is assumed to have electrodes 22. During the procedure patient 26 is assumed to be attached to a grounding electrode 23. In addition, electrodes 29 are assumed to be attached to the skin of patient 26, in the region of heart 34. In an embodiment, probe 24 acquires local intra-cardiac ECG as the probe moves over a portion of the heart chamber. At these instances, probe 24 location is recorded as well. The measured signals are used, as noted above and among other usages, to create an LAT map of at least part of the wall tissue of heart 34 of a patient 26.

[0021] System 20 is controlled by a system processor 40, comprising a processing unit 42 communicating with a memory 44. In some embodiments, a memory 44, which is included in system processor 40, stores an LAT and/or ECG map 62 of at least part of wall tissue of heart 34 of patient 26. Processor 40 is typically mounted in a console 46, which comprises operating controls 38, typically including a pointing device 39 such as a mouse or trackball, that physician 28 uses to interact with the processor.

[0022] Processor 40 (specifically processing unit 42) runs software, comprising a probe tracker module 30, an ECG module 36, and an ECG amplitude visualization module 35, used for visualizing ECG amplitudes over a 3D rendering of a portion of heart 26 anatomy (i.e., in the form of "sails"), as described above and described in further detail below. ECG module 36 is coupled to receive actual electrical signals from electrodes 22 and electrodes 29. The module is configured to analyze the actual signals and may present the results of the analysis in a standard ECG format, typically a graphical representation moving with time, on display 48.

[0023] Probe tracker module 30 typically tracks the location of distal end 32 of probe 24 within the heart of patient 26. The tracker module may use any method for location tracking probes known in the art. For example, module 30 may operate a magnetic-field-based location tracking sub-system. (For simplicity, components of such a sub-system are not shown in Fig. 1.) Using tracker module 30, processor 40 is able to measure locations of distal end 32. In addition, using both tracker module 30 and ECG module 36, the processor is able to measure loca-

tions of the distal end, as well as LATs of the actual electrical signals detected at these particular locations.

[0024] Alternatively or additionally, tracker module 30 may track probe 24 by measuring impedances between electrode 23, electrodes 29, and electrodes 22, as well as the impedances to other electrodes which may be located on the probe. (In this case electrodes 22 and/or electrodes 29 may provide both ECG and location tracking signals.) The Carto3® system, produced by Biosense-Webster (Irvine, California), uses both magnetic field location tracking and impedance measurements for location tracking.

[0025] Results of the operations and visualizations performed by processor 40 are presented to physician 28 on a display 48, which typically presents a graphic user interface to the physician, a visual representation of the ECG signals sensed by electrodes 22, and/or an image or map of heart 34 while it is being investigated. In an embodiment, EP activation analysis module 35 presents to the physician a LAT map overlaid with the interpolated ECG amplitude "sails."

[0026] The software run by processor 40 may be downloaded to processor 40 in electronic form, over a network, for example, or it may, alternatively or additionally, be provided and/or stored on non-transitory tangible media, such as magnetic, optical, or electronic memory. In particular, processor 40 runs a dedicated algorithm that enables processor 40 to perform the disclosed steps, as described below.

ELECTROPHYSIOLOGICAL RIPPLE MAPPING VISUALIZATION METHOD

[0027] Fig. 2 is a volume rendering showing ripple-mapping visualization of ECG amplitudes overlaid on a cardiac chamber 50 anatomy, in accordance with an embodiment of the present invention. In Fig. 2, ECG measured values, i.e., spikes 55, are overlaid on a grey-scale anatomical map, where the height of spikes 55 gives a measure of the ECG signal amplitude at the spike positions. As seen, the disclosed visualization method not only gives the value of the ECG spikes at the given position, but also at any intermediate positions, which forms sail 60 shapes of the local ECG amplitudes.

[0028] As noted above, to visualize ECG signals as disclosed, processor 40 interpolates values of ECG signals 55 at points near a selected location, and connects the topographical height values above the 3D rendering so as to produce the disclosed continuous ripple visualization. In an embodiment (not shown in Fig. 2), processor 40 generates semi-transparent sails 60 in order not to hide details behind them (i.e., to show details of underlying map).

[0029] The example ripple-mapping visualization shown in Fig. 2 is chosen purely for the sake of conceptual clarity. Various additional visualization tools may apply, such a presenting numbers, a magnifying glass effect to view sails 60 in detail, and others.

[0030] Fig. 3 is flow chart that schematically illustrates a method for ripple-mapping visualization of ECG amplitudes shown in Fig. 2, in accordance with an embodiment of the present invention. The algorithm, according to the presented embodiment, carries out a process that begins with processor 40 assigning measured ECG amplitudes 55 to respective locations over an anatomical map of a cardiac chamber (i.e., overlaid on the electro-anatomically - such as LAT - mapped surface of chamber 50), at an ECG amplitude assigning step 70.

[0031] Next, at interpolation step 72, processor 40 interpolates over values of ECG at points near each location. Next, at each location, processor 40 connects measured and interpolated ECG amplitudes to create sails 60, at an interconnecting ECG amplitudes step 74. In an embodiment, processor 40 further makes sails 60 semi-transparent, at a sail visualization step 76. Processor 40 presents the resulting visualization (LAT map with overlaid interpolated ECG amplitudes) to physician 28 on display 48.

[0032] The example flow chart shown in Fig. 3 is chosen purely for the sake of conceptual clarity. The present embodiment also comprises additional steps of the algorithm. Examples include additional visualizations, such as conduction arrows between and under sails 60. Such additional steps have been omitted from the disclosure herein purposely on order to provide a more simplified flow chart.

[0033] It will be appreciated that the embodiments described above are cited by way of example, and that the present invention is not limited to what has been particularly shown and described hereinabove. Rather, the scope of the present invention includes both combinations and subcombinations of the various features described hereinabove, as well as variations and modifications thereof which would occur to persons skilled in the art upon reading the foregoing description and which are not disclosed in the prior art. Documents incorporated by reference in the present patent application are to be considered an integral part of the application except that to the extent any terms are defined in these incorporated documents in a manner that conflicts with the definitions made explicitly or implicitly in the present specification, only the definitions in the present specification should be considered.

Claims

1. A method, comprising:


receiving an anatomical map of at least a portion of a heart;
receiving, for at least a region of the anatomical map, positions and respective electrocardiogram (ECG) signal amplitudes measured at the positions;
interpolating the ECG signal amplitudes, to de-

rive a surface representation of the ECG signal amplitudes over the region; and
presenting the surface representation of the ECG signal amplitudes overlaid on the anatomical map.

lated and measured ECG amplitude values.

2. The method according to claim 1, wherein presenting the surface representation comprises visualizing respective values of the surface representation as topographical heights above the anatomical map. 10
3. The method according to claim 1, wherein presenting the surface representation comprises presenting a semi-transparent surface that retains the anatomical map visible. 15
4. The method according to claim 1, wherein interpolating the ECG signal amplitudes comprises forming a shape comprising the interpolated and measured ECG amplitude values. 20
5. The method according to claim 1, wherein the anatomical map presents Local Activation Times (LAT).
6. A system, comprising: 25
 - a memory, which is configured to:
 - store an anatomical map of at least a portion of a heart; and 30
 - store, for at least a region of the anatomical map, positions and respective electrocardiogram (ECG) signal amplitudes measured at the positions; and 35
 - a processor, which is configured to:
 - interpolate the ECG signal amplitudes to derive a surface representation of the ECG signal amplitudes over the region; and 40
 - present the surface representation of the ECG signal amplitudes overlaid on the anatomical map.
7. The system according to claim 6, wherein the processor is configured to present the surface representation by visualizing respective values of the surface representation as topographical heights above the anatomical map. 45
8. The system according to claim 6, wherein the processor is configured to present the surface representation by presenting a semi-transparent surface that retains the anatomical map visible. 50
9. The system according to claim 6, wherein the processor is configured to interpolate the ECG signal amplitudes by forming a shape comprising the interpo- 55

10. The system according to claim 6, wherein the anatomical map presents Local Activation Times (LAT).

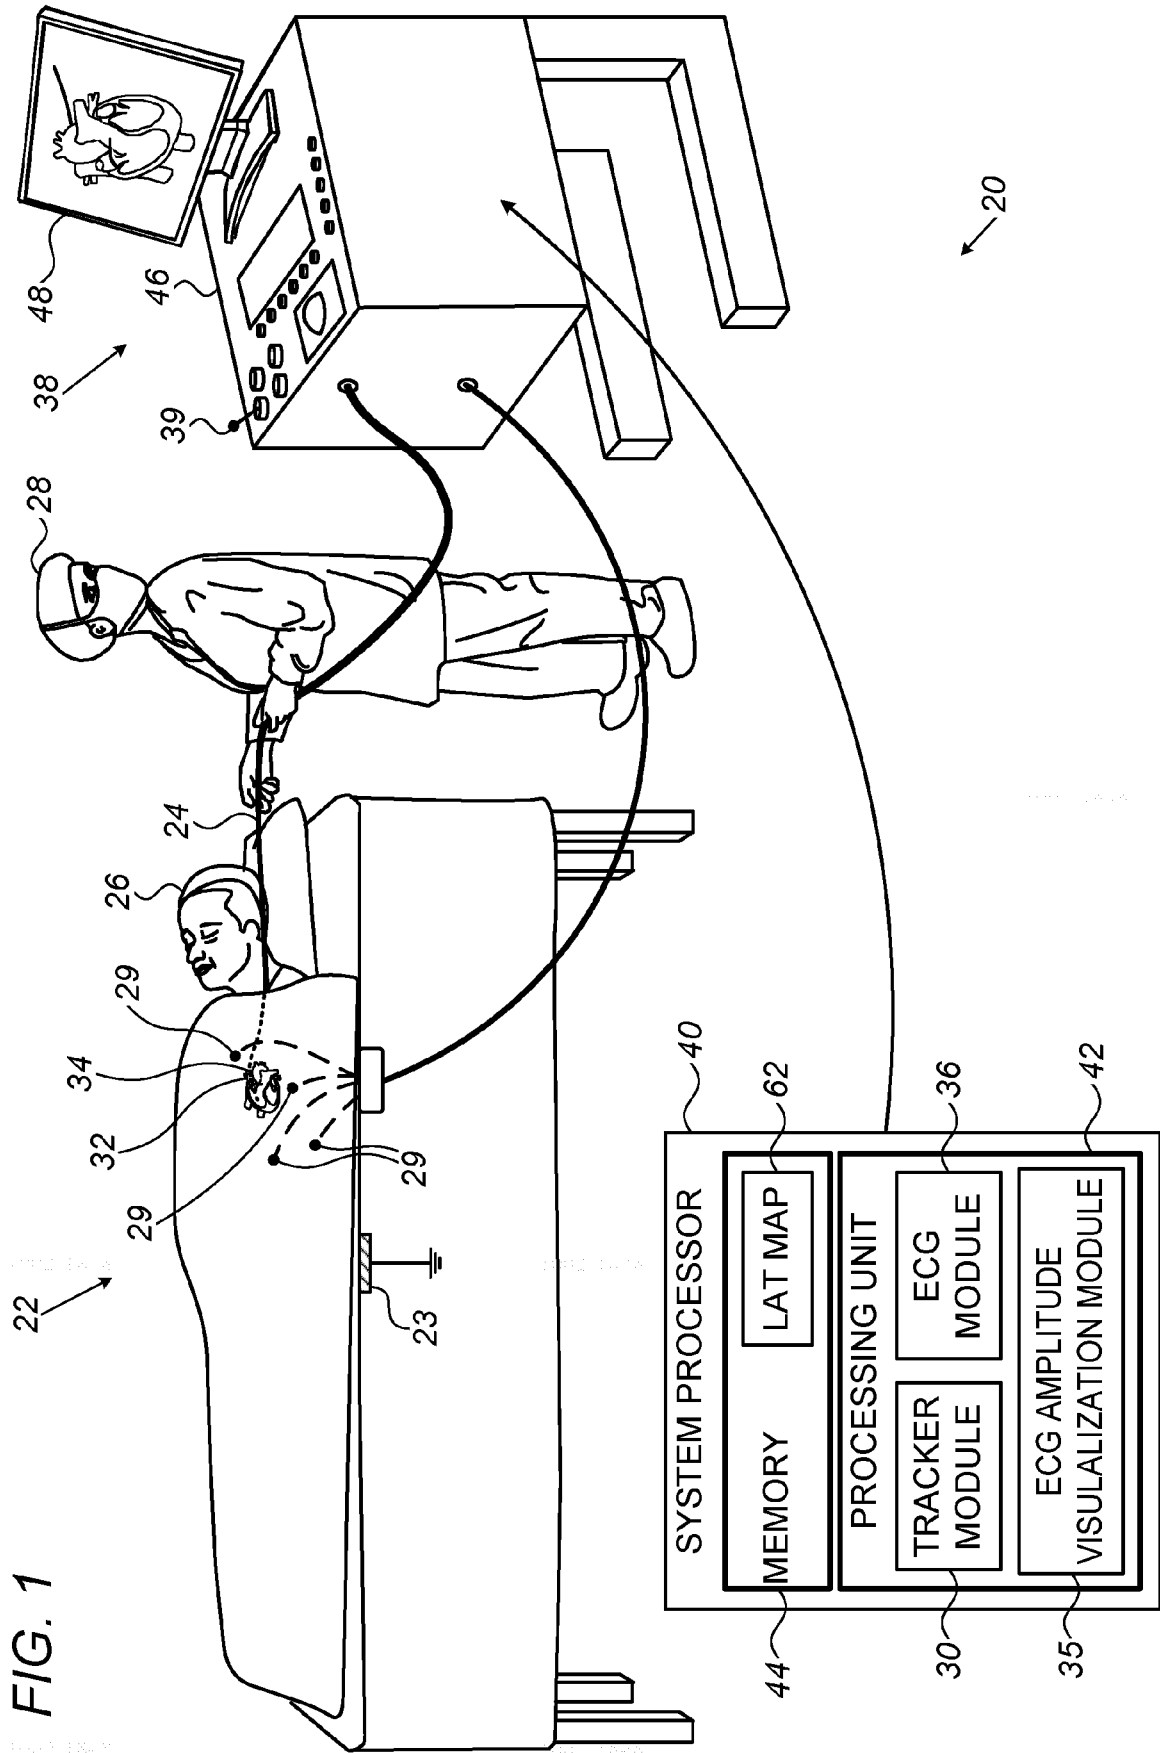

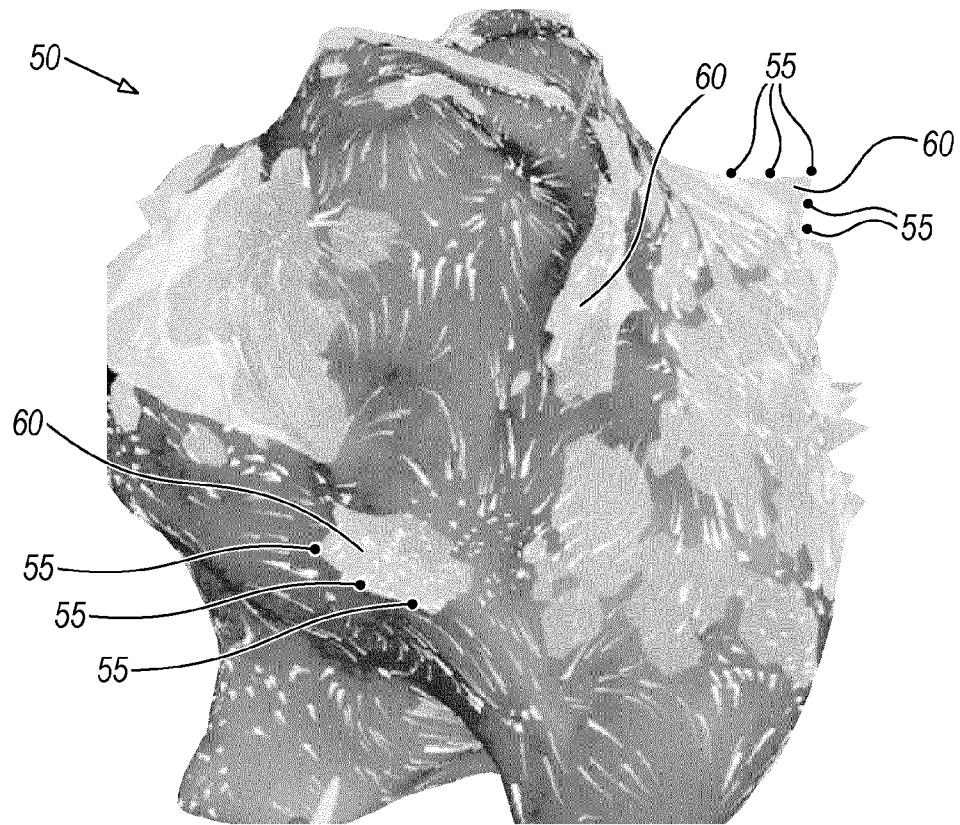


FIG. 2

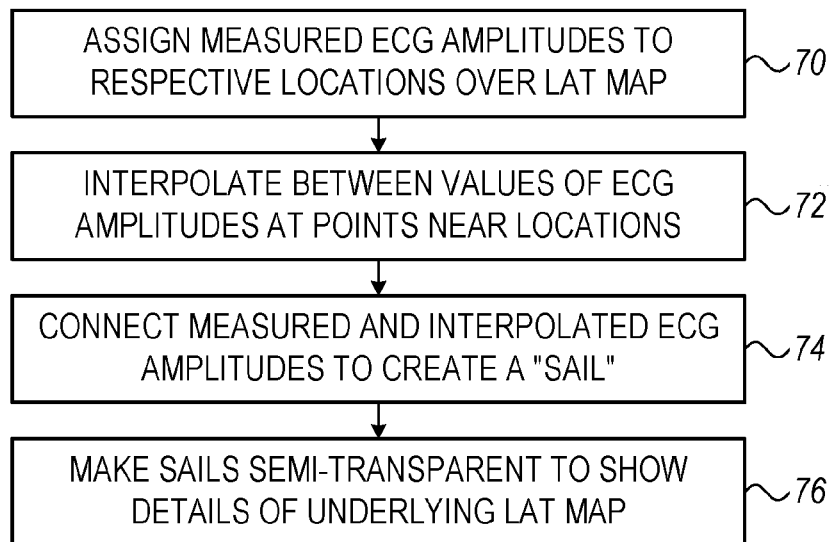


FIG. 3



EUROPEAN SEARCH REPORT

Application Number
EP 19 21 8127

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	LINTON N W F ET AL: "Cardiac ripple mapping: A novel three-dimensional visualization method for use with electroanatomic mapping of cardiac arrhythmias", HEART RHYTHM, ELSEVIER, US, vol. 6, no. 12, 1 December 2009 (2009-12-01), pages 1754-1762, XP026857376, ISSN: 1547-5271 [retrieved on 2009-09-03] * the whole document *	1-10	INV. A61B5/042 A61B5/00
X	GEORGE KATRITSIS ET AL: "Arrhythmia Mechanisms Revealed by Ripple Mapping", ARRHYTHMIA & ELECTROPHYSIOLOGY REVIEW, vol. 7, no. 4, 1 January 2018 (2018-01-01) , page 1, XP055687356, ISSN: 2050-3377, DOI: 10.15420/aer.2018.44.3 * the whole document *	1-10	
A	US 2007/232949 A1 (SAKSENA SANJEEV [US]) 4 October 2007 (2007-10-04) * paragraph [0034] - paragraph [0036] *	1-10	TECHNICAL FIELDS SEARCHED (IPC) A61B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 20 April 2020	Examiner Van Dop, Erik
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 21 8127

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-04-2020

10	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
15	US 2007232949	A1	04-10-2007	NONE
20	-----			
25				
30				
35				
40				
45				
50				
55				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 20170049348 A [0002]
- US 20100268059 [0003]
- US 9050011 B [0018]

专利名称(译)	电生理波映射查看方法		
公开(公告)号	EP3669772A1	公开(公告)日	2020-06-24
申请号	EP2019218127	申请日	2019-12-19
[标]申请(专利权)人(译)	韦伯斯特生物官能(以色列)有限公司		
申请(专利权)人(译)	生物传感韦伯斯特 (以色列) LTD.		
当前申请(专利权)人(译)	生物传感韦伯斯特 (以色列) LTD.		
[标]发明人	COHEN ASSAF COHN GOREN ILAN IDO TURGEMAN AHARON		
发明人	COHEN, ASSAF COHN, GOREN ILAN, IDO TURGEMAN, AHARON		
IPC分类号	A61B5/042 A61B5/00		
CPC分类号	A61B5/0422 A61B5/7425 A61B5/04011 A61B5/0402 A61B5/042 A61B5/044		
优先权	16/228426 2018-12-20 US		
外部链接	Espacenet		

摘要(译)

一种方法包括接收心脏的至少一部分的解剖图。对于解剖图的至少一个区域，接收位置和在該位置处测量的各个心电图 (ECG) 信号幅度。对 ECG信号幅度进行插值，以得出该区域上ECG信号幅度的表面表示。ECG信号幅度的表面表示呈现在解剖图上。

