



(51) International Patent Classification:

A61B 5/0245 (2006.01) A61B 5/024 (2006.01)  
A61B 5/00 (2006.01) A61B 5/046 (2006.01)

(21) International Application Number:

PCT/US2017/049622

(22) International Filing Date:

31 August 2017 (31.08.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/382,227 31 August 2016 (31.08.2016) US

(71) Applicant: ALIVECOR, INC. [US/US]; 444 Castro Street, Suite 600, Mountain View, California 94041 (US).

(72) Inventors: PETERSON, Frank; 444 Castro Street, Suite 600, Mountain View, California 94041 (US). MCLEAN, Melissa; 444 Castro Street, Suite 600, Mountain View, California 94041 (US). OKAMOTO, Arthur; 444 Castro Street, Suite 600, Mountain View, California 94041 (US). JENKINS, James; 444 Castro Street, Suite 600, Mountain View, California 94041 (US). GUNDOTRA, Vivek; 444 Castro Street, Suite 600, Mountain View, California

94041 (US). ALBERT, David; 444 Castro Street, Suite 600, Mountain View, California 94041 (US).

(74) Agent: OVANEZIAN, Daniel, E. et al.; Womble Bond Dickinson (US) LLP, P.O. Box 7037, Atlanta, Georgia 30357-0037 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: DEVICES, SYSTEMS, AND METHODS FOR PHYSIOLOGY MONITORING

(57) Abstract: Software applications, devices, systems, and methods are provided for monitoring, recording, and tracking cardiac health related metrics using an associated computing device. The software applications may monitor, record, and track physiological data such as cardiac electrical activity, heart rate, and blood pressure. Data transmission between a patient and a healthcare provider may also be enabled via the software applications disclosed herein.

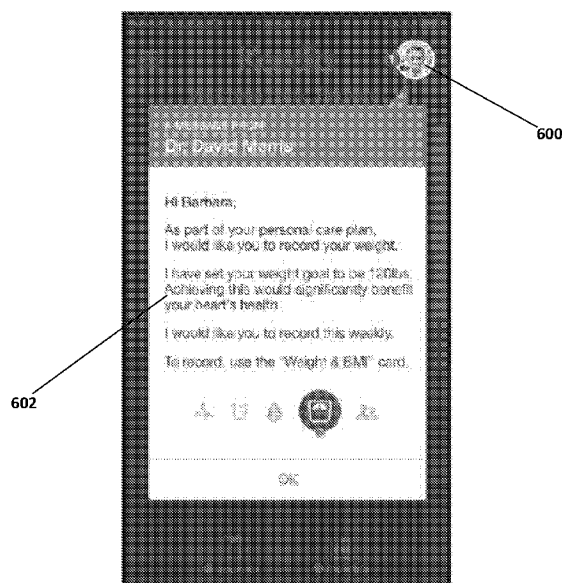


FIG. 6



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

**Published:**

- *with international search report (Art. 21(3))*

**DEVICES, SYSTEMS, AND METHODS FOR PHYSIOLOGY MONITORING****CROSS-REFERENCE**

[0001] This application claims the benefit of U.S. Provisional Application No. 62/382,227, filed August 31, 2016, which is incorporated herein by reference in its entirety.

**BACKGROUND**

[0002] The use of smartphones, tablet computers, wearable computers, and “smart” accessories is becoming increasingly prevalent. Smartphones are almost ubiquitous in high income countries and are increasingly popular in middle and low income countries as the costs of production decrease and Internet access becomes more available. This increased prevalence of computing power and devices offers many opportunities for improved ways of monitoring health and placing health management more in the control of the patient.

[0003] Cardiovascular disease is a leading cause of death in the world and is prevalent in the populations of high-income and low-income countries alike. Heart rate measurement, blood pressure measurement, and electrocardiography are widely used techniques for diagnosing the cardiovascular health of a patient.

**SUMMARY OF THE DISCLOSURE**

[0004] Described herein are software, systems, devices, and methods for linking a patient with a healthcare provider for the purpose of providing effective healthcare to the patient while increasing the efficiency of the healthcare provider. Software as described herein, in some embodiments, comprises one or more integrated applications on a single platform that connects a patient with a healthcare provider.

[0005] Described herein is a platform comprising: a patient application comprising: a software module for receiving sensed data from a sensor configured to sense a physiologic parameter of a patient; a software module for transmitting one or more of the sensed data and a patient communication to a healthcare provider; a software module for receiving a healthcare provider communication; a healthcare provider application comprising: a software module for receiving one or more of the sensed data and the patient communication; a software module for generating the healthcare provider communication and transmitting the healthcare provider communication to the patient; wherein the healthcare provider communication is automatically generated and transmitted in response to one or more of the sensed data or a patient communication that references the sensed data; wherein the healthcare provider communication references the sensed data; and wherein the healthcare provider communication includes an indicia that the healthcare provider communication was generated by the healthcare provider. In some

embodiments, the physical parameter comprises a vital sign of the patient. In some embodiments, the physical parameter comprises a heart sound of the patient. In some embodiments, the patient communication is transmitted around a time that the physical parameter is sensed. In some embodiments, the patient communication comprises an audio recording of the patient. In some embodiments, the patient communication comprises a video recording of the patient. In some embodiments, the patient communication is recorded and transmitted to the healthcare provider application in real-time. In some embodiments, the platform comprises the sensor and wherein the sensor is configured to operably couple with a mobile computing device. In some embodiments, the sensor is integrated with the mobile computing device. In some embodiments, the sensor comprises two ECG electrodes. In some embodiments, the healthcare provider communication comprises a message of encouragement or congratulation that is personalized to the patient. In some embodiments, the indicia comprises one or more of an image of the healthcare provider and a logo associated with the healthcare provider. In some embodiments, the healthcare provider application comprises a database comprising data sensed from a plurality of patients, and the healthcare provider application comprises a software module for organizing and segregating the data for each of the plurality of patients. In some embodiments, the patient application and the healthcare provider application each comprise a software module for real-time video communication between the patient and the healthcare provider. In some embodiments, at least a portion of the patient application is unlocked with an e-prescription that is received. Described herein is a computer implemented method comprising: sensing a physical parameter of a patient with a sensor; transmitting one or more of the physical parameter and a patient communication that references the physical parameter; and transmitting to the patient an automatically generated communication in response to one or more of the physical parameter and the patient communication that is transmitted; wherein the automatically generated communication references one or more of the physical parameter and the communication; and wherein the automatically generated communication includes indicia that it was sent by a healthcare provider. In some embodiments, the physical parameter comprises a vital sign of the patient. In some embodiments, the physical parameter comprises a heart sound of the patient. In some embodiments, the patient communication is transmitted around a time that the physical parameter is sensed. In some embodiments, the patient communication comprises an audio recording of the patient. In some embodiments, the patient communication comprises a video recording of the patient. In some embodiments, the patient communication is recorded and transmitted to the healthcare provider in real-time. In some embodiments, the sensor is configured to operably couple with a mobile computing device. In some embodiments, the sensor is integrated with the mobile computing device. In

some embodiments, the sensor comprises two ECG electrodes. In some embodiments, the automatically generated communication comprises a message of encouragement or congratulation that is personalized to the patient. In some embodiments, the indicia comprises one or more of an image of the healthcare provider and a logo associated with the healthcare provider. In some embodiments, the method comprises receiving, by the healthcare provider, data sensed from a plurality of patients, and organizing and segregating the data for each of the plurality of patients using a database. In some embodiments, transmitting a real-time video communication between the patient and the healthcare provider. In some embodiments, the step of sensing the physical parameter requires first receiving an e-prescription from the healthcare provider.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The novel features of the subject matter disclosed herein are set forth with particularity in the appended claims. A better understanding of the features and advantages of the subject matter disclosed herein will be obtained by reference to the following detailed description that sets forth illustrative embodiments, in which the principles of the subject matter disclosed herein are utilized, and the accompanying drawings of which:

[0007] **FIG. 1** shows an exemplary embodiment of a platform as described herein comprising a digital processing device.

[0008] **FIG. 2A** shows an embodiment of an initial home screen interface a patient encounters when he or she has not yet signed into a patient application that is operating on a computing device as described herein.

[0009] **FIGS. 2B-E** show screenshots of exemplary interfaces of a patient application that are viewed by the patient once the patient logs in to the patient application. **Fig. 2B** shows a screenshot of an exemplary interface for sensing an ECG; **FIG. 2C** shows a screenshot of an exemplary interface for sensing a heart rate of a patient; **FIG. 2D** shows a screenshot of an exemplary interface for sensing a blood pressure of a patient; **FIG. 2E** shows a screenshot of an exemplary interface for sensing a weight of a patient

[00010] **FIG. 3** shows a screenshot of an exemplary patient interface a patient encounters during the sensing of an ECG.

[00011] **FIG. 4A** shows a screenshot of an exemplary patient interface during sensing of a physiologic parameter comprising a blood pressure measurement.

[00012] **FIG. 4B** shows an exemplary screenshot of a patient interface showing recorded blood pressure measurements over a period of time.

[00013] **FIG. 5** shows an exemplary screenshot of a patient interface **500** displaying multiple historical physiologic measurements and includes analysis and/or insights regarding the physiologic parameters..

[00014] **FIG. 6** shows an exemplary screenshot of a patient application showing an exemplary healthcare provider communication..

[00015] **FIG. 7** shows a screenshot of an exemplary patient interface on a patient application, wherein a patient is given a task that corresponds to a patient care plan.

[00016] **FIG. 8** shows a screenshot of an exemplary healthcare provider communication transmitted in response to received patient data

[00017] **FIG. 9A** shows a screenshot of an exemplary initial home screen interface of a healthcare provider application as would be viewed by a healthcare provider when browsing his or her list of patients using the healthcare provider application.

[00018] **FIG. 9B** shows a screenshot of an exemplary interface of a healthcare provider application displaying received data.

[00019] **FIG. 9C** shows a screenshot of an exemplary interface of a healthcare provider application that allows a healthcare provider to select a descriptor of a received patient ECG.

[00020] **FIG. 9D** shows a screenshot of an exemplary interface of a healthcare provider application that allows a healthcare provider to type in remarks relating to a received patient ECG.

### **DETAILED DESCRIPTION**

[00021] The term “patient” as used herein refers to a human that may use the software platform disclosed herein. None of the terms require or are limited to a situation characterized by the supervision (e.g. constant or intermittent) of a healthcare provider (e.g. a doctor, a registered nurse, a nurse practitioner, a healthcare provider’s assistant, an orderly, or a hospice worker).

[00022] The terms “sensor” and “sensing device” includes any hardware configured to sense a patient parameter including stand-alone sensors and sensors that include processors or additional computing and/or hardware components (e.g. transmitters or displays).

[00023] The term “operably coupled” includes coupling through an operative connection. Such coupling may further comprise a physical integration or a reversible coupling of components. Or, such coupling may be entirely between physically separate components.

#### ***Platforms***

[00024] Described herein are software platforms (or “platforms”), systems, devices, and methods for providing effective healthcare to a patient while increasing the efficiency of the healthcare provider. A platform provides effective healthcare to a patient through, but not limited to, monitoring of the physical parameters and therapeutic objectives of the patient. In

addition, a platform is further configured to provide a communication link between a patient and a healthcare provider. The platform is configured so that a patient is provided with more direct and timely access to a healthcare provider while at the same time numerous monitoring tasks and/or communications from the healthcare provider to the patient are automated saving the healthcare provider time and thereby increasing their efficiency.

**[00025]** A platform comprises one or more customized software applications (or “applications”) configured to interact with one another. Applications of a platform as described herein are configured to provide monitoring and communication features.

**[00026]** In some embodiments of the platform, the platform includes one or more hardware components (e.g. one or more sensing devices).

**[00027]** In some embodiments, a platform is configured to operate together with one or more devices and/or one or more systems. That is, a device as described herein, in some embodiments, is configured to run an application of a platform using a built-in processor, and in some embodiments, a platform is utilized by a system comprising one or more computing devices that interact with or run one or more applications of the platform. A method as described herein includes, for example, steps for connecting a patient and a healthcare provider using a platform as described herein

**[00028]** A platform comprises one or more applications, wherein at least one application comprises a patient application and one application comprises a healthcare provider application. In some embodiments, a platform comprises an additional monitoring application (i.e. in addition to the patient and healthcare provider application) that is located on a computing device at a remote monitoring location. For example, a third party, in some embodiments, has a monitoring application that allows the third party to monitor and/or interact with one or more applications of one or more platforms. For example, a monitoring service that monitors patient data would utilize a monitoring application.

**[00029]** **FIG. 1** shows an exemplary embodiment of a platform as described herein comprising a digital processing device **101**. The digital processing device **101** includes either a patient application or a physician application as described herein. The device **101** is configured to run the application. The digital processing device **101** includes a central processing unit (CPU, also “processor” and “computer processor” herein) **105**, which is either a single core or multi-core processor, or a plurality of processors for parallel processing. The digital processing device **101** also includes either memory or a memory location **110** (e.g., random-access memory, read-only memory, flash memory), electronic storage unit **115** (e.g., hard disk), power source **125**, and communication interface **120** (e.g., network adapter) for communicating with one or more other systems, and peripheral devices **135**. The memory **110**, storage unit **115**, interface **120** and

remote devices **135** are configured to communicate with the CPU **105** through a communication bus (solid lines), such as a motherboard. The digital processing device **101** is, in some embodiments, operatively coupled to a computer network (“network”) **130** with the aid of the communication interface **120**. The network **130**, in some embodiments, comprises the Internet. The network **130** in some embodiments is a telecommunication and/or data network.

[00030] The CPU **105** is configured to execute machine-readable instructions embodied in a software application or module. The instructions may be stored in a memory location, such as the memory **110**.

[00031] The storage unit **115** in some embodiments is configured to store files, such as user data, e.g., user preferences, and user programs.

[00032] Certain methods as described herein are implemented by way of machine (e.g., computer processor) executable code stored on an electronic storage location of the digital processing device **101**, such as, for example, on the memory **110** or electronic storage unit **115**. The machine executable or machine readable code is provided in the form of a software application or software module. During use, the code is executed by the processor **105**. In some cases, the code is retrieved from the storage unit **115** and stored on the memory **110** for ready access by the processor **105**. In some situations, the electronic storage unit **115** is precluded, and machine-executable instructions are stored on memory **110**.

[00033] In some embodiments, a remote device **135** is configured to communicate with the digital processing device **101**, and comprises any mobile computing device, non-limiting examples of which include a tablet computer, laptop computer, smartphone, or smartwatch. In some embodiments, a remote device **135** comprises a physiologic sensor.

[00034] The applications as described herein (i.e. patient application, healthcare provider application, and monitoring application) comprise one or more software modules. Software modules as described herein comprise computer readable and executable code. In various embodiments, a software module comprises a file, a section of code, a programming object, a programming structure, or combinations thereof. In further various embodiments, a software module comprises a plurality of files, a plurality of sections of code, a plurality of programming objects, a plurality of programming structures, or combinations thereof. In various embodiments, the one or more software modules comprise, by way of non-limiting examples, a web application, a mobile application, and a standalone application. In some embodiments, software modules are in one computer program or application. In other embodiments, software modules are in more than one computer program or application. In some embodiments, software modules are hosted on one machine. In other embodiments, software modules are hosted on more than one machine. In further embodiments, software modules are hosted on cloud

computing platforms. In some embodiments, software modules are hosted on one or more machines in one location. In other embodiments, software modules are hosted on one or more machines in more than one location.

**[00035]** A computing device as described herein includes an operating system that enables it to run the software applications of the disclosure. Non-limiting examples of such operating systems are: Android, iOS, Chrome, Windows 10 Mobile, Blackberry 10, Firefox OS, Sailfish OS, Tizen, Ubuntu Touch OS, and H5OS. Non-limiting examples of manufacturers that produce said mobile computing devices compatible with the software applications disclosed herein are: Apple, Samsung, Sony, HTC, LG, and Motorola Mobility.

### *Sensing Device*

**[00036]** In some embodiments of a platform, one or more sensors (or “sensing devices”) are configured to monitor one or more physiologic parameters of an individual. In some embodiments, a local sensing device, for example, a sensing device located with a patient, is configured to communicate with one or more remote computing devices. As used here, a remote computing device is either a device not located with the patient or one that is not integrated with a computing device on which the patient application is running.

**[00037]** A sensing device, in some embodiments, is integrated with a patient computing device. For example, a sensing device comprising one or more ECG electrodes is integrated into a housing and/or processor of a computing device such as a smartphone or smartwatch. A sensing device, in some embodiments, operably couples to a patient computing device. For example, a sensing device having a coupler such as a magnetic or adhesive coupler is configured to couple with a computing device via the magnetic or adhesive coupler. In some embodiments, a sensing device is integrated with a housing of a protective case for a smartphone. In some embodiments, a sensing device is integrated with a watch band of a smartwatch.

**[00038]** A sensing device, in some embodiments, comprises a stand-alone device configured to transmit data to a patient application and/or a healthcare provider application. Non-limiting examples of sensing devices configured to operate with the platform described herein include thermometers, heart-rate sensors, activity sensors (e.g. an accelerometer, a gyroscope), location sensors (including position sensors), blood pressure sensors, oxygen saturation sensors, weight sensors (e.g. a scale), sweat sensors (e.g. a capacitive sensor), respiration sensors, EEG sensors, and ECG sensors.

### *Patient Application*

**[00039]** A patient application is configured to be operated by a patient and a healthcare provider application is configured to be operated by a healthcare provider. In some

embodiments of the platform, a patient application is on a computing device that is located with the patient and is remotely located from a healthcare provider.

**[00040]** A platform is configured so that one or more patient applications are linked to one or more health care provider applications. For example, data and communications are transmitted back and forth from patient to healthcare provider and from healthcare provider to patient through one or more applications of the platform. In certain embodiments, data received from a patient application results in a computer-generated response from an application within the platform (e.g. a healthcare provider application or a monitoring application).

**[00041]** A patient application is configured to monitor the health of a patient in either an episodic or continuous fashion. One manner in which the patient application continuously monitors the health of a patient is in an embodiment in which a sensor is continuously worn, contacted, or otherwise engaged by a patient.

**[00042]** A patient application is configured to receive, organize, and/or track patient data including sensed physiologic parameters. For example, a patient application is configured, in some embodiments, to receive a heart rate of a patient from a heart rate sensor. For further example, in some embodiments, a patient application is configured to receive a sensed ECG of a patient.

**[00043]** A patient application, in some embodiments, is configured to receive multiple health metrics or physiologic parameters. For example, the patient application comprises one or more interfaces presented to the patient that allow for the sensing and receiving of several parameters. Non-limiting examples of sensed patient parameters received by a patient application include an ECG, blood pressure, heart rate, height, weight, age, and physical activity level.

**[00044]** The patient application, in some embodiments, is configured to provide simultaneous measurement and sensing of cardiac health data. In addition, the patient application, in some embodiments, is configured to transmit data (e.g. cardiac health data or notifications) to another application within the platform. Transmission of sensed data to another application within the platform occurs simultaneously to the sensing of the data in some embodiments of the platform.

**[00045]** In some embodiments, the patient application is configured to organize and/or track data received from a sensing device, whereas in alternative embodiments a second, possibly remote, application organizes and tracks data received from a sensing device. Organizing received data on a patient application, in some embodiments, comprises sorting the data in a searchable patient interactive database. In some embodiments of the patient application, tracking received data comprises monitoring for specific data values or data ranges within the received data. In some embodiments, sensed data is transmitted directly to a healthcare provider application without being transmitted to a patient application.

**[00046]** A patient application is configured to work on or in conjunction with a computing device. For example, a first computing device comprises one or more sensors (either physically integrated with the computing device or not physically integrated with the computing device) configured to sense a physiologic parameter of a patient. For example, a patient may utilize an ECG monitor, a blood pressure monitor or a pulse oximeter, and the patient application to record and save or store his or her cardiac electric activity and blood pressure. Furthermore, the patient may elect to send said cardiac electric activity and blood pressure data or oxygen saturation data to his or her healthcare provider via the software application of the disclosure. Furthermore, the patient application, in some embodiments, is configured to simultaneously monitor and/or record multiple physiologic parameters.

**[00047]** Sensed data is transmitted to an application of the platform (e.g. patient application, healthcare provider application, monitoring application) either through a wired connection or a wireless connection via, for example, a WiFi transmitter, a Bluetooth transmitter, an audio or ultrasound acoustic transmitter.

**[00048]** A patient application comprises one or more interfaces (e.g. a graphical interface, an audio interface, a video interface). One or more patient interfaces of the software applications enable the patient to: for example, obtain physiological information from a sensing device or from other health-based software applications (e.g. Apple Health), store sensed data from a sensing device, transmit and receive communications, track completion of tasks, and/or transmit physiological, audio, and visual data to a healthcare provider.

**[00049]** In some embodiments of the patient application, the patient application is configured to communicate with another application running within the platform described herein, and, in some embodiments, is also configured to communicate with software applications that are not a part of the platform in order to transfer and/or receive data such as height, weight, age, physical activity level, heart rate, blood pressure, and/or ECG data from a sensing device. For example, in some embodiments, the patient transfers to and/or receives data from other health based software applications including, but not limited to, Apple Health, Google Fit, S Health, and/or Fitbit and save it to his or her cardiac monitoring device.

**[00050]** The patient application provides patients with one or more patient interfaces that provide for selection by the patient of specific data to be transmitted to a healthcare provider, and/or data that may be transmitted from the patient application to the healthcare provider automatically. Data transmitted to a healthcare provider application from the patient application comprises, for example, height data, weight data, age data, physical activity level data, heart rate data, blood pressure data, and ECG data.

[00051] **FIG. 2A** shows an embodiment of an initial home screen interface encountered by a patient when he or she has not yet signed into a patient application that is operating on a computing device as described herein. The patient application typically includes a log in feature **200** that prompts the patient to provide, for example, his or her email and password in order to log in.

[00052] In some embodiments, either the entire patient application or a portion of the application is provided to the patient in a locked state, where in order to operate the application or a portion of the application, a patient must first be granted access by another party (e.g. a healthcare provider, hospital, employer, or insurance provider). For example, a healthcare provider grants a patient access to the patient application by providing the patient with a traditional prescription or an e-prescription containing an access code or password through which a patient obtains access to the locked patient application or locked portion of the patient application by entering the password as a login and/or password in the login-in feature **200**. In some embodiments of the applications described herein, an e-prescription comprises an email sent from the healthcare provider to the patient (or caused to be sent by the healthcare provider application to the patient) that contains an access code or password to access the software application. In another example, a healthcare provider provides an e-prescription comprising a hyperlink that when clicked on by the patient unlocks the patient application or a locked portion thereof. In another example, a healthcare provider sends a patient a text message containing either a link or a code that is used by the patient to unlock the patient application or a portion thereof. In some embodiments of the platform, access to the patient application is automatically granted by the platform in response to a request by a healthcare provider.

[00053] In another example, a healthcare provider provides a patient with an e-prescription for a health monitoring device that utilizes and/or includes a patient application as described herein. For example, a healthcare provider provides a patient with a prescription for a device that is configured to run the patient application as described herein. For further example, a cardiologist provides the patient with an e-prescription for a device comprising electrodes that is configured to sense an ECG of the patient and interface with the patient application which was also prescribed to the patient.

[00054] Once a patient accesses the patient application by entering an access code or password provided by another party (e.g. a healthcare provider, hospital, employer, or insurance provider), the patient application, in some embodiments, displays an image associated with the healthcare provider such as, for example, an image of a healthcare provider and/or one or more logos associated with the healthcare provider and/or the healthcare provider's practice and/or a hospital associated with the healthcare provider.

[00055] **FIGS. 2B-E** show screenshots of exemplary interfaces of a patient application that are viewed by the patient once the patient logs in to the patient application. **FIGS. 2B and 2C** show a patient interface component **204** that provides the patient with the ability to select to record an ECG or a heart using, for example, an ECG sensing device **200** that is configured to interact with the software application. The patient interface component **204**, in some embodiments, comprises a touchscreen button.

[00056] In some embodiments of the patient application, a patient interface comprises a dashboard **210** and/or interface **204**, which the patient engages with in order to carry out a task such as sense, for example, one or more physiologic parameters using a sensing device such as, for example, resting heart rate (**FIG. 2C**), blood pressure (**FIG. 2D**), physical activity, and weight BMI (**FIG. 2E**). In some embodiments, when engaged by the patient, interface **204** causes the sensing of a physiologic parameter of a patient by a sensing device **200, 206, or 208** (which are depicted on the screen shot of the patient application in the exemplary embodiments of **FIGS. 2B-E**). First sensing device **200** comprises a smartphone operably coupled to one or more ECG electrodes (not shown). As described herein, in some embodiments, a patient application is running on the first sensing device **200**. A second sensing device **206** comprises a blood pressure cuff and a third sensing device **208** comprises a scale. As described herein, in some embodiments, a patient application receives sensed data transmitted from a sensing device on which it is not running such as, for example, embodiments of the second and third sensing devices **206** and **208**.

[00057] **FIG. 3** shows a screenshot of an exemplary patient interface a patient encounters during the sensing of an ECG – displayed on the interface at **300** – using an ECG sensing device. . In some embodiments of the patient application, a patient is able to select an option in the patient interface, for example, using a touchscreen button **306** that allows the patient to record audio and/or video using a computing device that is interacting with the patient application (e.g. a smartphone that is running the patient application as an app). For example, a patient may sense an ECG with an ECG sensing device, transmit the sensed ECG to a processor on a computing device (e.g. a smartphone or a smartwatch), and record an audio and/or video recording that the patient application associates with the sensed ECG. For example, a patient may record an audio recording that says “I’m having chest pain” together with a sensed ECG. The patient application is configured to associate the sensed ECG together with the recorded audio and/or video recording and store them locally on a computing device interacting with the patient application and/or transmit ECG and audio and/or video recording together to another computing device (e.g. a computing device of a healthcare provider or monitoring service). The patient interface component may prompt the patient to verbally state any notes the patient has to

add by, for example, engaging the patient interface at **306** by touching the touch-screen interface at **306**. Once engaged at **306**, for example, the patient verbally describes any symptoms he or she is experiencing, for example, during that day or while the ECG is being sensed. Such verbal (e.g. video or audio) description is recorded by the patient application and transmitted to a physician application and/or a monitoring application and/or stored. The addition of verbal notes by the patient to the ECG data provides for a correlation between symptoms and cardiac health metrics. Heart rate displayed on the exemplary interface at **304** and other parameters specific to ECG data such as filter, gain, and speed are displayed on the ECG measurement interface at **302** in some embodiments or are provided as metadata.

**[00058]** A patient application, in some embodiments, displays sensed patient data via a patient interface such as the exemplary interface displayed in **FIG. 3**. One or more health metrics displayed in the patient interface are displayed graphically or textually. The patient interface may also display an ECG at **300** and heart rate recordings at **304** over a period of time; the ECG, heart rate recordings, and time may be displayed graphically or textually.

**[00059]** The patient interface may further, for example, display the status of an ECG measurement, wherein the status may reflect: a normal ECG measurement and may be labeled as “normal;” or an abnormal ECG measurement may be labeled as “atrial fibrillation.” In other aspects, the patient dashboard interface may enable the patient to add notes to each recorded health metric

**[00060]** In some embodiments of the patient application, the data in the patient interface of the patient application is also viewable by the healthcare provider application. That is, in a platform wherein a healthcare provider and a patient are running software applications on their respective computing devices, a healthcare provider, in some embodiments of the platform, is able to view the patient’s patient interface as it appears to the patient using the healthcare provider application running on a computing device of the healthcare provider. Alternatively, the data may be viewed in the healthcare provider application at time later than acquisition of the data.

**[00061]** **FIG. 4A** shows a screenshot of an exemplary patient interface during sensing of a physiologic parameter comprising a blood pressure measurement. A sensing device, in some embodiments, comprises a blood pressure monitor comprising an electronic sphygmomanometer configured to sense a patient blood pressure and transmit the sensed blood pressure to the patient application. In some embodiments, a patient is prompted to record a blood pressure measurement by the patient application through the transmission of an alert or alarm **400** displayed on the interface or otherwise transmitted through a computing device interfacing with the patient application. The patient is then prompted, in some embodiments, to transfer the blood pressure recording from the blood pressure device to the patient application by, for

example, engaging touchscreen button **402**, and furthermore, the patient may store said blood pressure recording in a computing device via the patient application, whereas, in some embodiments, storage and transmission of a sensed parameter is done automatically.

**[00062]** As shown in **FIG. 4B**, which shows an exemplary screenshot of a patient interface, a patient is able to view stored blood pressure recordings over a period of time as depicted graphically at **404**. The patient interface shown in **FIG. 4B** further displays at **402** the most recent recordings to the patients by labeling them as “new” and including the time on which the blood pressure recording was saved. In addition, the patient may view other metrics sensed over a period of time such as, for example, stored weight and BMI recordings over a period of time.

**[00063]** **FIG. 5** shows an exemplary screenshot of a patient interface **500** displaying multiple historical physiologic measurements and includes analysis and/or insights regarding the physiologic parameters. For example, interface **500** is configured in some embodiments to display graphical representation of one or more physiologic parameters sensed over time. For example, interface **500** is configured in some embodiments to display an assessment of a sensed physiologic parameter such as if the sensed parameter is normal or abnormal.

**[00064]** **FIG. 6** shows an exemplary screenshot of a patient application showing an exemplary healthcare provider communication **602**. A communication to a patient through the platform is either sent directly from a healthcare provider or is automatically generated and contains an indicia **600** that it was generated by a healthcare provider (i.e. even though it was generated automatically).

**[00065]** An automatically generated communication as described herein is a computer generated communication yet it has indicia of having been created and transmitted by a healthcare provider. In this way, a patient is given the impression that a computer generated communication was created and generated by a healthcare provider. An example of a computer generated communications includes a communication of congratulation to a patient for successfully completing a task such as, for example, losing 5 pounds of weight. In some embodiments of the platform described herein, a computer generated communication contains indicia that the communication was generated and transmitted by a healthcare provider such as, for example, an electronic message containing an image of the healthcare provider or a logo associated with the healthcare provider. It is very beneficial to automatically generate (i.e. computer generate) such communications rather than having a healthcare provider generate them in that it saves the healthcare provider time in monitoring and responding to routine patient monitoring changes. While at the same time the indicia of the communication having originated from the healthcare provider provides emotional benefits to the patient. Computer generated communications are one way in which the platform as described herein functions as a healthcare

provider extender or assistant, saving the healthcare provider time while providing valuable patient monitoring and feedback.

[00066] The applications of the present disclosure also provide patients with a patient interface where the tasks provided by a healthcare provider are received and displayed. In this case, as shown in **FIG. 6**, a healthcare provider has provided to the patient a care plan comprising of recording his or her weight.

[00067] The software application also provides an interface where push notifications sent by the healthcare provider are received and displayed. An additional interface component, in some embodiments, allows the patient to track or affirm completion of various health-related tasks such as physical activity or taking medications.

[00068] **FIG. 7** shows a screenshot of an exemplary patient interface on a patient application, wherein a patient is given a task **700** that corresponds to a patient care plan (in this case, the care plan of **FIG. 6**). Once the patient engages with a scale, in some embodiments, pressing a touchscreen button **702** causes the transmission of data from the scale (while in others, the scale does so automatically), or alternatively the patient inputs the weight data into the interface and affirms the data by selecting a button.

[00069] In some embodiments, a healthcare provider application is configured to generate a comprehensive patient care plan using received patient data. The patient care plan, for example, is transmitted to a patient application and, for example, is configured to monitor, record, and/or track multiple health metrics in a patient such as ECG, blood pressure, weight, physical activity levels, BMI, and medication compliance.

[00070] The healthcare provider applications described herein, in some embodiments, are configured to provide a patient with the ability to perform an exercise stress test in order to test for the presence heart disease. For example, a patient application instructs a patient to perform an exercise for a set period of time, such as walking on a treadmill for 20 minutes, while contacting an ECG sensing device that is in communication with the patient application, which, for some embodiments, transmits that data to the healthcare provider application for analysis.

[00071] An exercise stress test is used to aid in the diagnosis of cardiovascular disease. Specifically, the exercise stress test is performed by a healthcare provider in a professional clinic or medical center to determine the amount of stress that a patient's heart is able to withstand before developing either evidence of ischemia or an abnormal heart rhythm. Different types of stress tests may comprise a treadmill or exercise stress test, dobutamine or adenosine stress test, stress echocardiogram, or nuclear stress test. An exercise stress test is used to measure the effect of exercise on the heart. An exercise test performed in a professional clinic comprises monitoring a patient's cardiac electric activity as the patient walks on a treadmill. The

healthcare provider monitors the patient's cardiac electric activity by placing electrodes in ten small areas of the patient's body, which are connected to an ECG monitor. The healthcare provider takes baseline measurements of blood pressure, ECG, and heart rate prior to commencing the exercise stress test. The exercise stress test begins when the patient starts walking on the treadmill for specific period of time. If any abnormal changes in the ECG or any chest pains develop, the test is stopped and such abnormal changes are noted.

[00072] In some embodiments, the patient application described herein may provide the patient with the ability to perform an at-home exercise stress test to test for heart disease. The patient may use the cardiac health monitoring device and the patient application to monitor cardiac electric activity, blood pressure, and heart rate while performing the exercise stress test. The patient application may instruct the patient to place a cardiac health monitoring device in contact with his or her skin, and take a baseline ECG measurement. The interface may further instruct the patient to take a baseline blood pressure measurement prior to starting the exercise stress test. The patient application may have an interface that prompts the patient to begin an exercise stress test. The interface may prompt the patient to walk for a determined amount of time while physically contacting the cardiac health monitoring device. For example, the patient may be using a smartphone or other mobile computing device, which incorporates sensing electrodes, as a cardiac health monitoring device to perform the at-home exercise stress test. Furthermore, the patient may use said smartphone (or other mobile computing device) comprising sensing electrodes and may place his or her hands over said sensing electrodes while he or she engages in walking as part of the exercise stress test. At the conclusion of the period of time, the heart rate is measured over 2 minutes to calculate the time required for the heart to recover from the exercise. The interface may comprise a component to provide the patient with the option to record, save, and/or send all data collected during the exercise stress test, once the stress test has been completed, which data may then be transmitted or shared with the healthcare professional in the healthcare professional application via transmitting means known to the skilled artisan.

[00073] FIG. 8 shows a screenshot of an exemplary healthcare provider communication transmitted in response to received patient data. In this case, the patient having successfully completed the care plan of FIG. 6 by recording and transmitting his or her weight as shown in FIG. 7 receives a congratulatory message. As described, such a healthcare provider communication is either generated and sent by the healthcare provider or is generated and sent automatically, for example, by the healthcare provider application.

[00074] As shown, an indicia 800 authenticates the healthcare provider generated and transmitted the message and may include an image or logo of the healthcare provider. A healthcare provider communication 802 is generated automatically, in some embodiments, when

a patient achieves a certain goal as indicated by received sensed physiologic data. In this example, once a patient achieves a goal weight, a congratulatory communication **802** is automatically sent to the patient application. In some embodiments, a patient communication references achievement of a goal or task, such as, for example, a patient sending an email to the healthcare provider application that states that the patient achieved a weight loss goal. In some embodiments, a patient communication referencing a specific physiologic parameter or achievement of a task (e.g. weight loss) is analyzed by an algorithm that in response generates an automatic healthcare provider communication.

**[00075]** As shown, in some embodiments, a healthcare provider communication references the received sensed data that triggered the sending of the healthcare provider communication. For example, a patient instructed to lose ten pounds and transmits data or a communication indicating that he or she has successfully done so receives a congratulatory message referencing the ten pound weight loss or weight loss generally.

**[00076]** In general, behavioral notifications may be sent by the healthcare provider to a patient of their choice. The behavioral notifications sent to patients by healthcare providers may be automatically generated. The notifications sent to patients may be personalized push notifications that are automatically generated and sent to patients when patients complete a prescribed task. For example, a healthcare provider's application may automatically generate and send a push notification to a patient congratulating a patient for achieving a prescribed task. Examples of prescribed tasks may be performing a physical activity, losing weight, decreasing BMI points, recording ECG data, and/or recording blood pressure measurements.

**[00077]** Behavioral notifications may also be sent by a patient's family members. The software application of the disclosure may prompt the patient to "add" patients and connect with them via the software application. The family members that accept and connect with the patients may receive notifications when the patient achieves specific tasks such as correctly adhering to their prescription regimen. The family members may send a behavioral notification congratulating the patient for achieving their prescribed task.

#### ***Healthcare Provider Application***

**[00078]** **FIG. 9A** shows a screenshot of an exemplary initial home screen interface of a healthcare provider application as would be viewed by a healthcare provider when browsing his or her list of patients using the healthcare provider application. In some embodiments of the healthcare provider application, the healthcare provider sorts his or her list of patients by other healthcare providers' names or technician's' name. In some embodiments of the software application, the initial home screen interface comprises a "virtual stack" **900** displaying, for example, all ECGs provided to the healthcare provider. For example, the interface may provide

the healthcare provider with the option to select an ECG from a virtual stack of ECGs and view a 3 second segment of the ECG recording. The 3 second segment is displayed next to the reviewer and diagnostic information on the virtual stack **900**. In some embodiments of the healthcare provider application, the 3 second segment is selected to be the ECG segment that is most representative of the diagnosis. The display of the entire ECG is used to quickly identify an ECG recording from a list in the different subfolders of the virtual stack (e.g. “All ECGs,” “Abnormal,” “Normal,” “No Analysis,” or “Unreadable”).

**[00079]** A feature of the healthcare provider application, in some embodiments, is to receive and display patient data, as shown in **FIG. 9A**. Non-limiting examples of such patient data are height, weight, body mass index (BMI), age, physical activity level, heart rate, blood pressure, and/or ECG data. Patient data received by the healthcare provider is stored via the healthcare provider application in a computing device running or connected to the healthcare provider application. Furthermore, the healthcare application aids the healthcare provider in analyzing the data. For instance, the healthcare provider application, in some embodiments, comprises audio or video data analysis capabilities.

**[00080]** A healthcare provider application is configured to receive, organize, and/or track patient data received from one or more patient applications (e.g. from one patient or a plurality of patients). As shown in **FIG. 9B** at **902**, a healthcare provider application is configured, to analyze and organize received ECG data (i.e. indicate if analysis reveals a possible abnormality).

**[00081]** The healthcare provider application is configured to analyze received patient data. For example, in some embodiments, a healthcare provider application is configured to calculate and generate risk scores based on patient population data. For example, a risk score may be calculated to predict the likelihood of an individual to suffer from cardiovascular disease in the future. Such algorithms, for example, use physiological data, such as ECG data, to recognize a patient's identity based on patient population data or to recognize a change in patient's health based on historical data for the patient. The software application may comprise machine learning algorithms, which improve analysis of an individual's data based inputting that data into a machine learning algorithm trained to predict health outcome probabilities for any number of health conditions. In addition, such algorithms may provide with unique identification of individual patients based on analysis of aggregate data such as ECG recordings or measurements. Unique identification of patients by machine learning algorithms may comprise identification of gender, identification of individual, identification of change in health, and/or identification of heart age. In some embodiments of the software application, heart age may be a representative age of a patient's heart that reflects the overall health of the patient's heart and a general indication of the patient's cardiac health. Similar to heart age, machine learning

algorithms may also serve as a risk assessment tool to calculate a risk score used to predict the likelihood of an individual to suffer from cardiovascular disease in the future or to give the patient an overall perspective of their current cardiac health status. Machine learning algorithms may be used to predict a risk score and/or predict a change in health, whether negative or positive.

**[00082]** The healthcare provider's inbox interface may contain different folders, such as, but not limited to: a "triage" folder, a "healthcare provider's" folder, a "confirmed and archived" folder. The healthcare provider may move and organize data, such as patient's data, in said folders.

**[00083]** The healthcare provider application may alert the healthcare provider if certain data are received. For example, an interface of the healthcare provider's software application may show a list of notifications displaying information such as the patient's name, gender, age, phone number, and corresponding status update. In some embodiments of the software application, a status update may comprise a notification regarding a patient's ECG recording or the percentage of abnormal ECG data of a patient. Other examples of patient status updates that the healthcare provider may choose to activate notifications for are: possible atrial fibrillation detected, possible atrial fibrillation detected with heart rate surpassing a customizable number, heart rate surpassing a customizable number, heart rate under a customizable number, and no ECG data received in a customizable number of days. The frequency in which notifications are sent may be set to different parameters such as never, once, or always.

**[00084]** In some embodiments of the software applications described herein, the healthcare provider may add an interpretation to each ECG recording from the available options, which include: Sinus Rhythm, Sinus Brady, Sinus Tach, SVT, Atrial Fibrillation, Atrial Flutter, Paced, Junctional, V Tach, or Unreadable, as shown in **FIG. 9C**. As shown, in some embodiments, a highlighting tool **904** allows a healthcare provider to select a particular ECG segment, and an interactive check-box formatted list **906** allows a healthcare provider to choose an assessment of the highlighted ECG.

**[00085]** In some embodiments of the healthcare provider application, the healthcare provider may also add an optional note to an ECG recording by selecting the "Add Optional Note" option **908** as illustrated by **FIG. 9D**. The healthcare provider application interface may provide for selection by the healthcare provider to adjust and/or select which types of status updates may be assigned to be notified. The software application interface may display the healthcare provider's total number of patients that are currently using the software application and have connected with the healthcare provider. An interface component provides for selection by the healthcare provider to add a new patient and send an invitation code via email. The healthcare provider

may also send an electronic prescription for a cardiac health monitoring device or for regular cardiac health monitoring. The software application interface may display the healthcare provider's total number of patients that are currently pending acceptance of the healthcare provider's invitation to use the software application.

**[00086]** Notifications may not only be received by the healthcare provider, but they may also be sent by the healthcare provider to a patient of their choice. The notifications sent to patients may be automatically generated. The notifications sent to patients may be personalized push notifications that are automatically generated and sent to patients when patients complete a prescribed task. For example, a healthcare provider's software application may automatically generate and send a push notification to a patient congratulating a patient for achieving a prescribed task. Examples of prescribed tasks may be performing a physical activity, losing weight, decreasing BMI points, recording ECG data, and/or recording blood pressure measurements.

**[00087]** An additional interface of the healthcare provider's application may comprise a viewable, interactive patient directory or database. The patient directory or database may comprise a list of all patients that may be currently pending or may have accepted the healthcare provider's invitation to begin using the cardiac health monitoring software application. The patient directory may further display patient information such as name, phone number, age, gender, and an indication of whether or not they are connected and are using the cardiac health monitoring software application. Furthermore, the interface may also comprise a component to provide the healthcare provider with the option to electronically prescribe a cardiac health monitoring device and/or cardiac health monitoring. Such interface component may be placed in close proximity to the patient's name for ease of accessibility.

**[00088]** The interface may also comprise a component to provide the healthcare provider with the option to add a new patient. This interface component may be displayed in the patient directory interface of the software application. Upon selection by the healthcare provider, the "add new patient" interface component opens up a new interface. Such new interface may prompt the healthcare provider to enter potential new patient information such as patient medical record number, first name, last name, email address, mobile phone number, date of birth, and gender. Once the healthcare provider decides to add a new patient he or she may select the option to prescribe the cardiac health monitoring application as displayed on the interface. Moreover, once the cardiac health monitoring application is prescribed, the software application may automatically generate and send an email and a text message to the new patient instructing them on how to operate the cardiac health monitoring software application. The interface may also comprise a component to provide the healthcare provider with the option to select the length

of time the healthcare provider monitors a patient and the amount of money charged per month to said patient. The automatically generated email may comprise an activation or referral code for the patient to use in order to obtain access to the software application.

**[00089]** An additional interface of the healthcare provider application may comprise an interactive interface to quickly view or scan relative distances between the R-R peaks in an ECG recording. The interface, in some embodiments, provides an array of R-R peak distances displayed by horizontal lines that the healthcare provider may interact with by clicking on each horizontal line. When the healthcare provider clicks on a horizontal line representing an R-R peak distance, the interface automatically zooms in on the segment of the ECG recording that corresponds to such R-R peak distance. In this manner, the interactive interface allows for the healthcare provider to quickly scan multiple R-R peak distances.

**[00090]** The platform, in some embodiments, provides different payment plans in order to obtain access to the disclosed software application. For example, a healthcare provider may purchase the software application, while a patient may purchase the health monitoring device associated with the software application, and the healthcare provider may bill the patient a recurrent fee for utilizing the software application. In some embodiments of the software applications, systems, devices, and methods described herein, a healthcare provider purchases the software application, while a patient purchases the health monitoring device associated with the software application, and the company selling the health monitoring device may bill the patient a recurrent fee for utilizing the software application. In some embodiments of the software applications, systems, devices, and methods described herein, an insurance company may offer a patient a free trial period wherein the patient may be offered the health monitoring device associated with the software application and the software application at no monetary charge for a specific time period; upon termination of said time period, the patient may elect to purchase the health monitoring device and the software application. The patient may be presented with the option to upgrade to a “Pro” or “Premium” membership plan wherein the patient may be charged a higher fee than the normal membership plan fee. The “Pro” or “Premium” plan may comprise access to a care plan. The care plan may comprise automatically- or healthcare provider-generated tasks for the patient to complete and reminders to complete such tasks. Such tasks may be based on the patient’s current health status and may provide specific health goals to meet.

### ***Billing Features***

**[00091]** The platforms, devices, systems, and methods described herein, in some embodiments, provide payment and billing features for patients and healthcare providers. For example, a healthcare provider may purchase the platform, while a patient may purchase the health

monitoring device associated with the platform, and the healthcare provider may bill the patient a recurrent fee for utilizing the platform. Some of the payment and billing features described herein, provide a healthcare provider the ability to purchase a platform (such as the platforms described herein), while a patient is provided the ability to purchase the health monitoring device having a platform incorporated therewith. In this embodiment, the company selling the health monitoring device may, for example, bill the patient a recurrent fee for utilizing the platform. In some embodiments of the platform of the payment and billing features, an insurance company offers a patient a free trial period wherein the patient may be offered the health monitoring device associated with the platform and the platform at no monetary charge for a specific time period; upon termination of said time period, the patient may elect to purchase the health monitoring device and the platform.

**[00092]** The platforms, devices, systems, and methods may include different types of payment and billing methods for patients and healthcare providers. For example, a healthcare provider may purchase the platform, while a patient may purchase the health monitoring device associated with the platform, and the healthcare provider may bill the patient a recurrent fee for utilizing the platform. In another aspect, a healthcare provider may purchase the platform, while a patient may purchase the health monitoring device associated with the platform, and the company selling the health monitoring device may bill the patient a recurrent fee for utilizing the platform. In some embodiments of the platform, an insurance company may offer a patient a free trial period wherein the patient may be offered the health monitoring device associated with the platform and the platform at no monetary charge for a specific time period; upon termination of said time period, the patient may elect to purchase the health monitoring device and the platform.

**[00093]** The patient may be presented with the option to upgrade to a “Pro” or “Premium” membership plan wherein the patient may be charged a higher fee than the normal membership plan fee. The “Pro” or “Premium” plan may comprise access to a care plan. The care plan platform interface may prompt a healthcare provider to automatically or manually generate tasks for the patient to complete. The platform may automatically generate reminders for the patient to complete such tasks. Such tasks may be based on the patient’s current health status and may provide specific health goals to meet. The care plan interface may comprise the option to connect with family members via the platform, optionally alert the family members of the status of the patient’s cardiac health, and optionally alert the family members of the status of the patient’s task completions. The care plan platform may enable family members to automatically or manually send behavioral notifications to a patient upon successful completion of prescribed tasks such as correctly following a medication dosage regimen.

**[00094]** While preferred embodiments of the present invention have been shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art without departing from the invention. It should be understood that various alternatives to the embodiments of the invention described herein may be employed in practicing the invention. It is intended that the following claims define the scope of the invention and that methods and structures within the scope of these claims and their equivalents be covered thereby.

## CLAIMS

## WHAT IS CLAIMED IS:

1. A platform comprising:
  - a. a patient application comprising:
    - i. a software module for receiving sensed data from a sensor configured to sense a physiologic parameter of a patient;
    - ii. a software module for transmitting one or more of the sensed data and a patient communication to a healthcare provider;
    - iii. a software module for receiving a healthcare provider communication;
  - b. a healthcare provider application comprising:
    - i. a software module for receiving one or more of the sensed data and the patient communication;
    - ii. a software module for generating the healthcare provider communication and transmitting the healthcare provider communication to the patient;wherein the healthcare provider communication is automatically generated and transmitted in response to one or more of the sensed data or a patient communication that references the sensed data;  
wherein the healthcare provider communication references the sensed data; and  
wherein the healthcare provider communication includes an indicia that the healthcare provider communication was generated by the healthcare provider.
2. The platform of claim 1, wherein the physical parameter comprises a vital sign of the patient.
3. The platform of claim 1, wherein the physical parameter comprises a heart sound of the patient.
4. The platform of claim 1, wherein the patient communication is transmitted around a time that the physical parameter is sensed.
5. The platform of claim 4, wherein the patient communication comprises an audio recording of the patient.
6. The platform of claim 4, wherein the patient communication comprises a video recording of the patient

7. The platform of claim 4, wherein the patient communication is recorded and transmitted to the healthcare provider application in real-time.
8. The platform of claim 1, comprising the sensor and wherein the sensor is configured to operably couple with a mobile computing device.
9. The platform of claim 8, wherein the sensor is integrated with the mobile computing device.
10. The platform of claim 8, wherein the sensor comprises two ECG electrodes.
11. The platform of claim 1, wherein the healthcare provider communication comprises a message of encouragement or congratulation that is personalized to the patient.
12. The platform of claim 1, wherein the indicia comprises one or more of an image of the healthcare provider and a logo associated with the healthcare provider.
13. The platform of claim 1, wherein the healthcare provider application comprises a database comprising data sensed from a plurality of patients, and the healthcare provider application comprises a software module for organizing and segregating the data for each of the plurality of patients.
14. The platform of claim 1, wherein the patient application and the healthcare provider application each comprise a software module for real-time video communication between the patient and the healthcare provider.
15. The platform of claim 1, wherein at least a portion of the patient application is unlocked with an e-prescription that is received.
16. A computer implemented method comprising:
  - sensing a physical parameter of a patient with a sensor;
  - transmitting one or more of the physical parameter and a patient communication that references the physical parameter; and
  - transmitting to the patient an automatically generated communication in response to one or more of the physical parameter and the patient communication that is transmitted;

wherein the automatically generated communication references one or more of the physical parameter and the communication; and

wherein the automatically generated communication includes indicia that it was sent by a healthcare provider.

17. The method of claim 16, wherein the physical parameter comprises a vital sign of the patient.
18. The method of claim 16, wherein the physical parameter comprises a heart sound of the patient.
19. The method of claim 16, wherein the patient communication is transmitted around a time that the physical parameter is sensed.
20. The method of claim 19, wherein the patient communication comprises an audio recording of the patient.
21. The method of claim 19, wherein the patient communication comprises a video recording of the patient
22. The method of claim 19, wherein the patient communication is recorded and transmitted to the healthcare provider in real-time.
23. The method of claim 16, wherein the sensor is configured to operably couple with a mobile computing device.
24. The method of claim 23, wherein the sensor is integrated with the mobile computing device.
25. The method of claim 23, wherein the sensor comprises two ECG electrodes.
26. The method of claim 16, wherein the automatically generated communication comprises a message of encouragement or congratulation that is personalized to the patient.
27. The method of claim 16, wherein the indicia comprises one or more of an image of the healthcare provider and a logo associated with the healthcare provider.

28. The method of claim 16, comprising receiving, by the healthcare provider, data sensed from a plurality of patients, and organizing and segregating the data for each of the plurality of patents using a database.
29. The method of claim 16, transmitting a real-time video communication between the patient and the healthcare provider.
30. The method of claim 16, wherein the step of sensing the physical parameter requires first receiving an e-prescription from the healthcare provider.

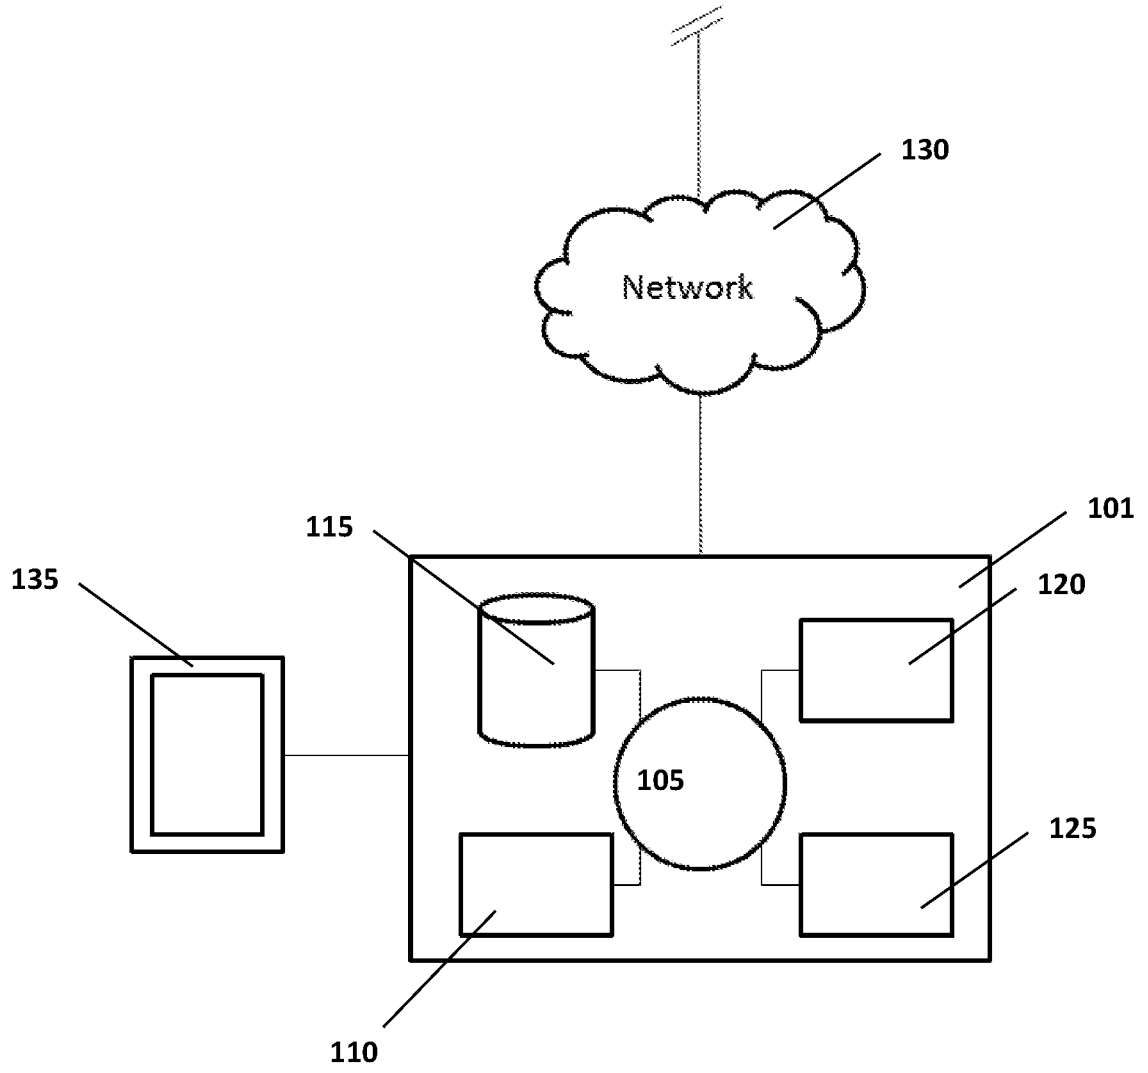


FIG. 1


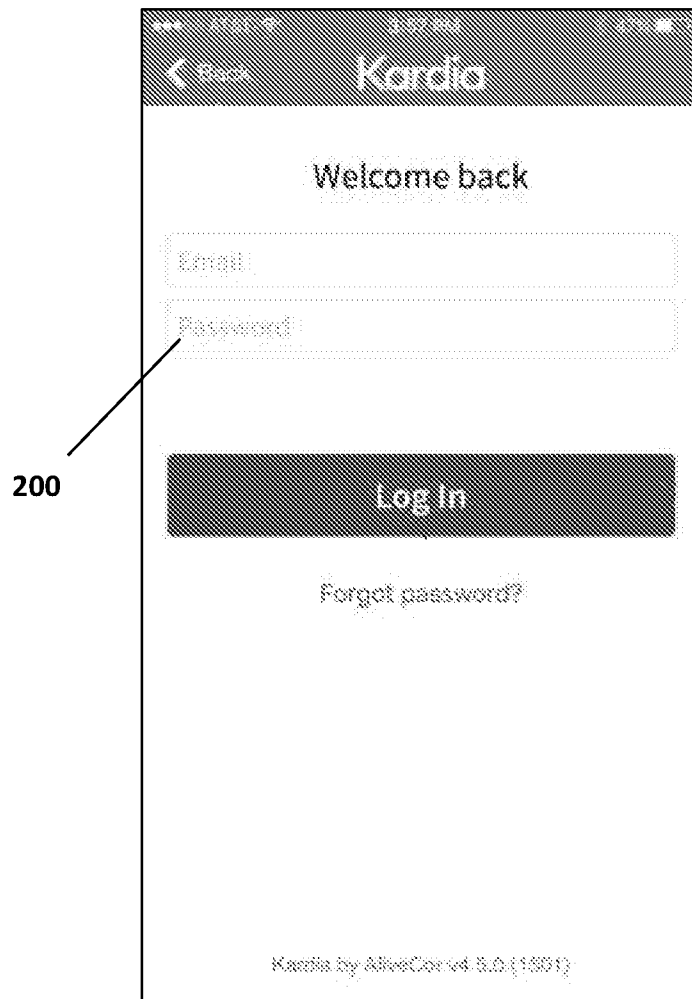


FIG. 2A

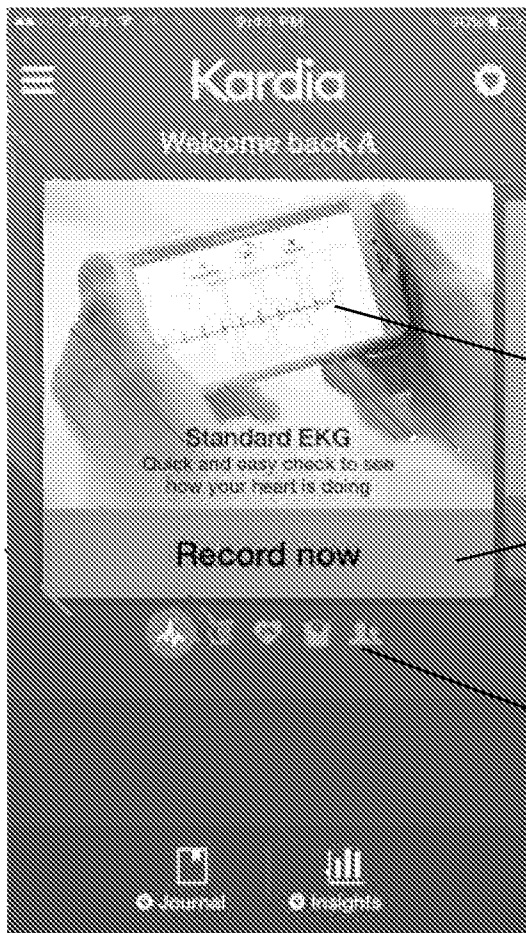

202

204

210

FIG. 2B

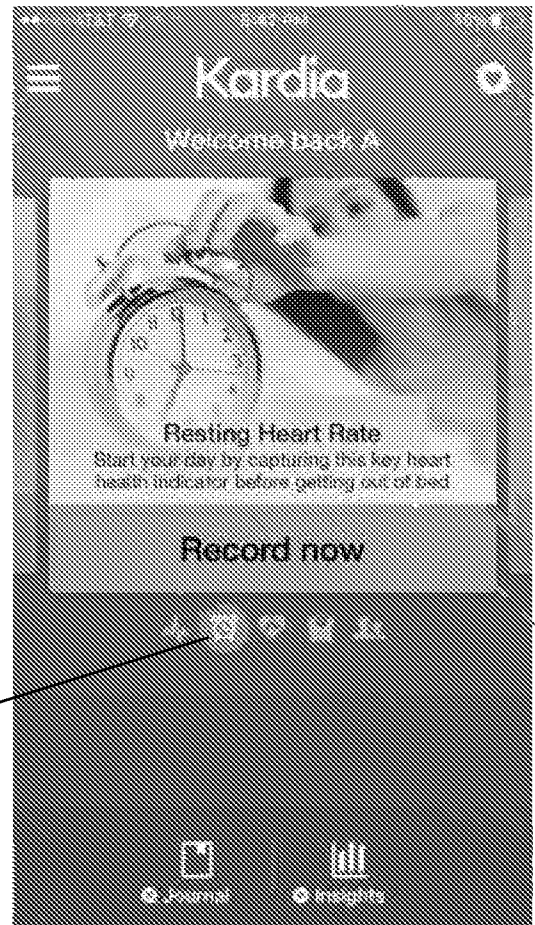


FIG. 2C

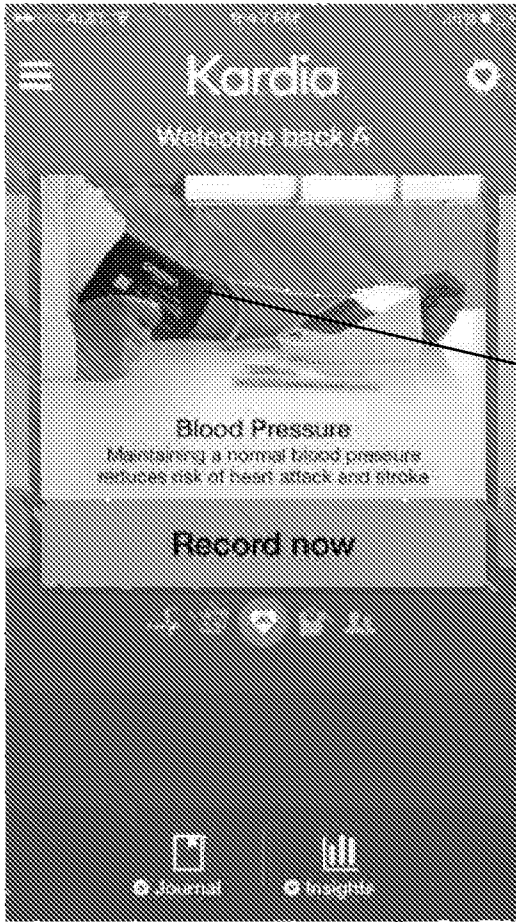


FIG. 2D

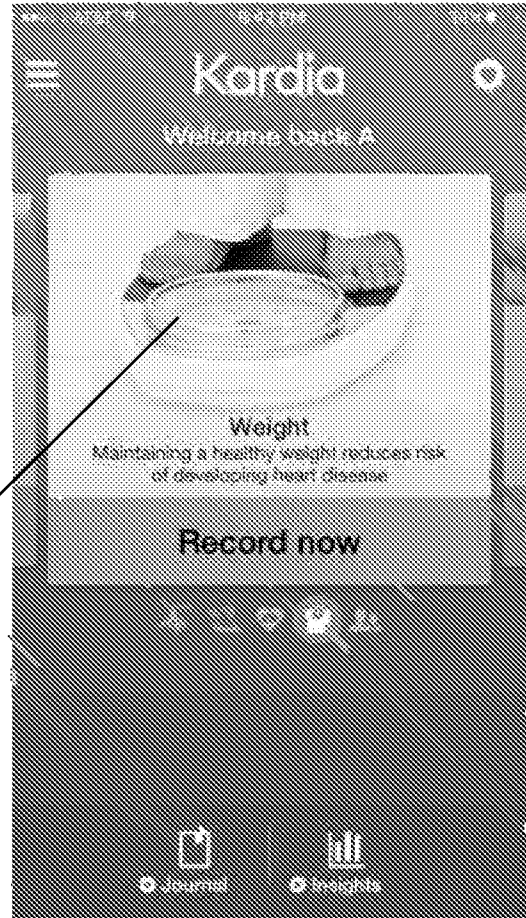


FIG. 2E


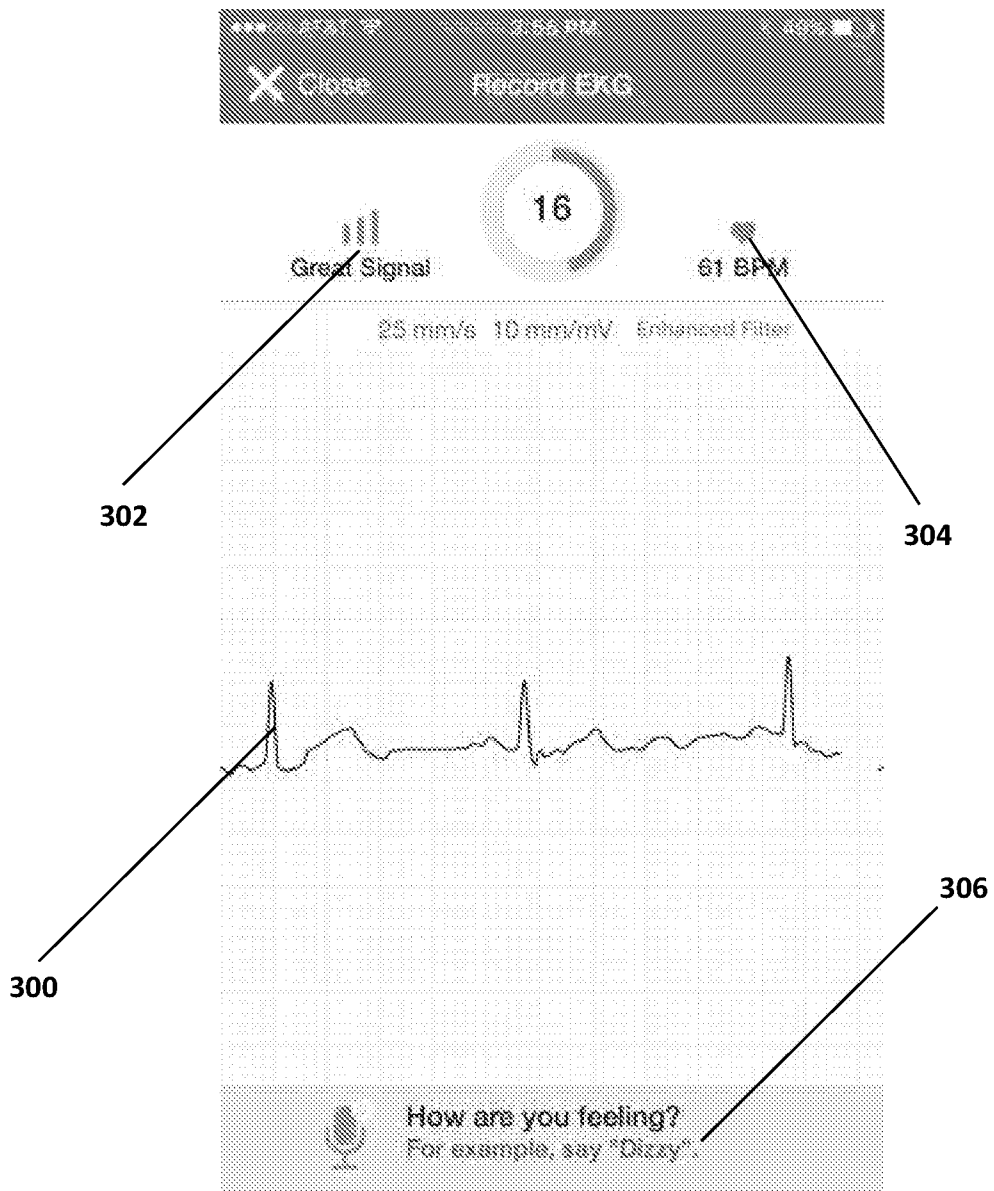



FIG. 3

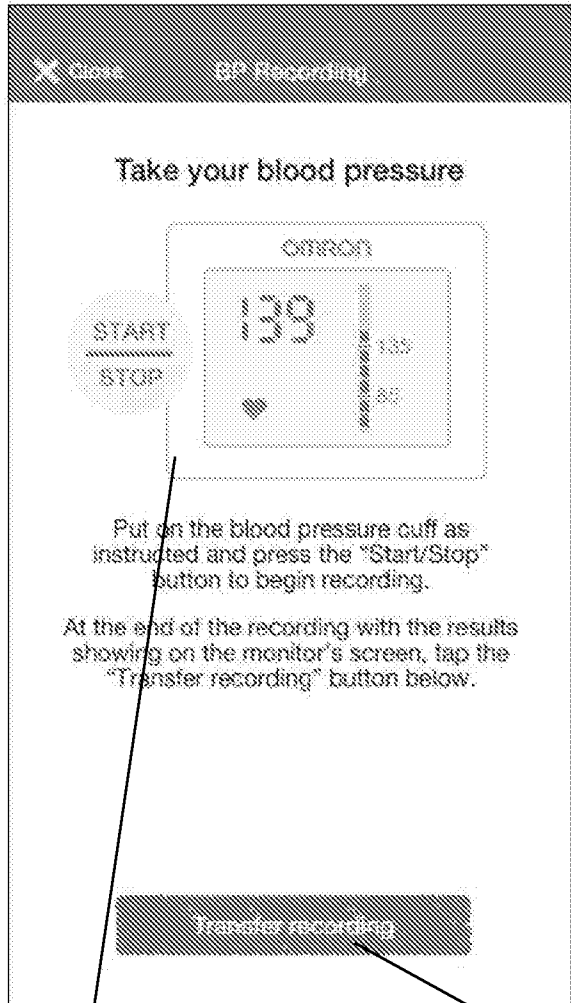

400

402

FIG. 4A

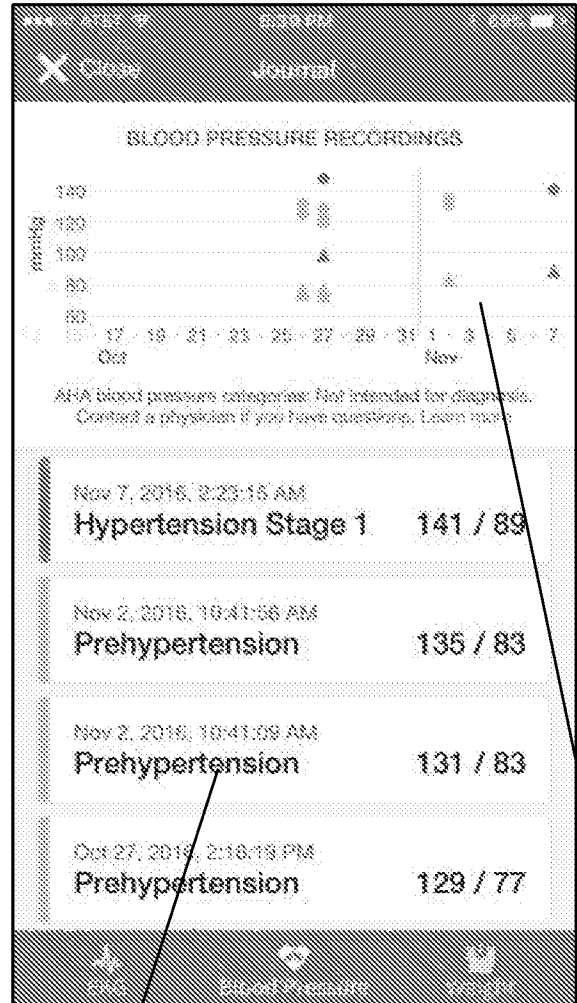

404

406

FIG. 4B

500

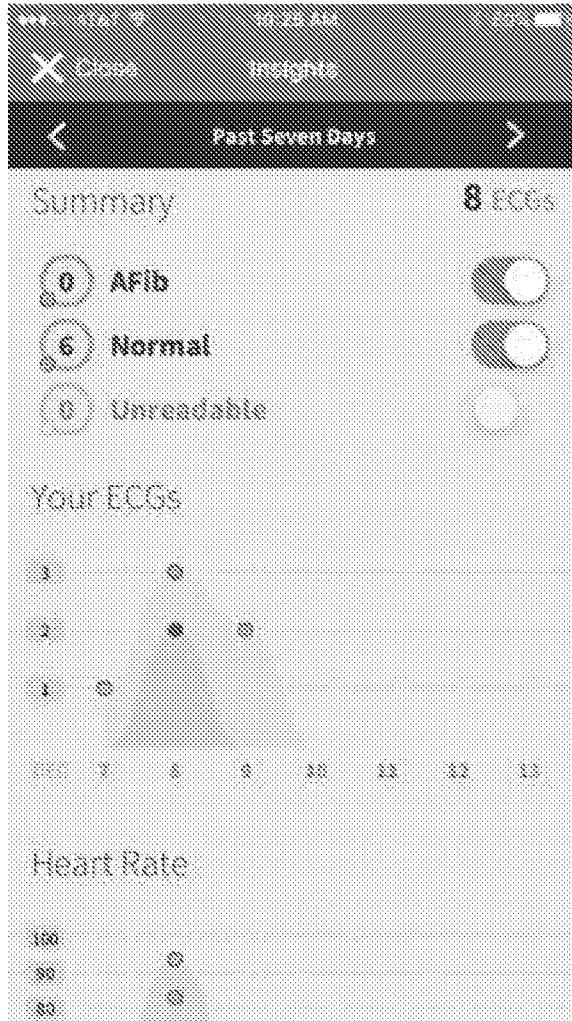


FIG. 5

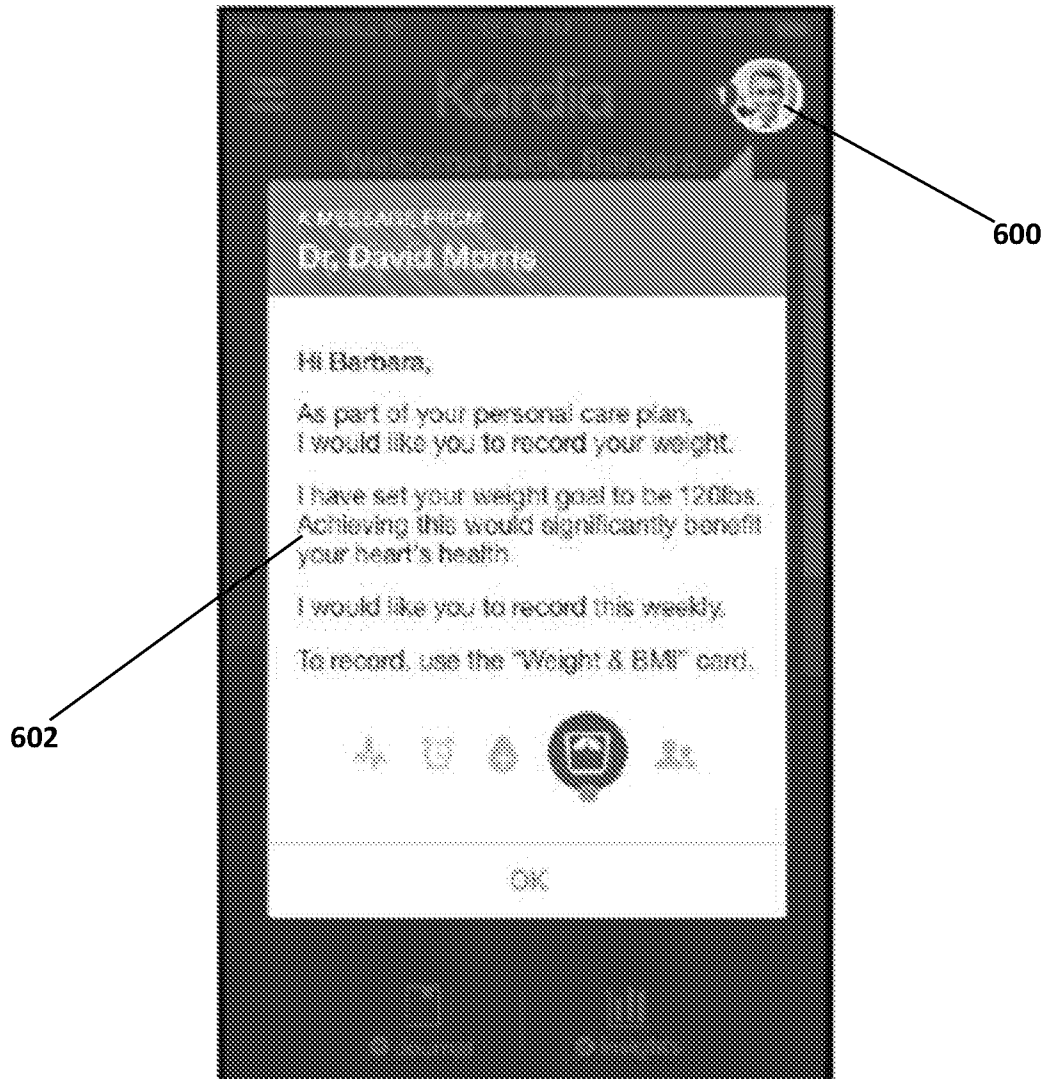


FIG. 6

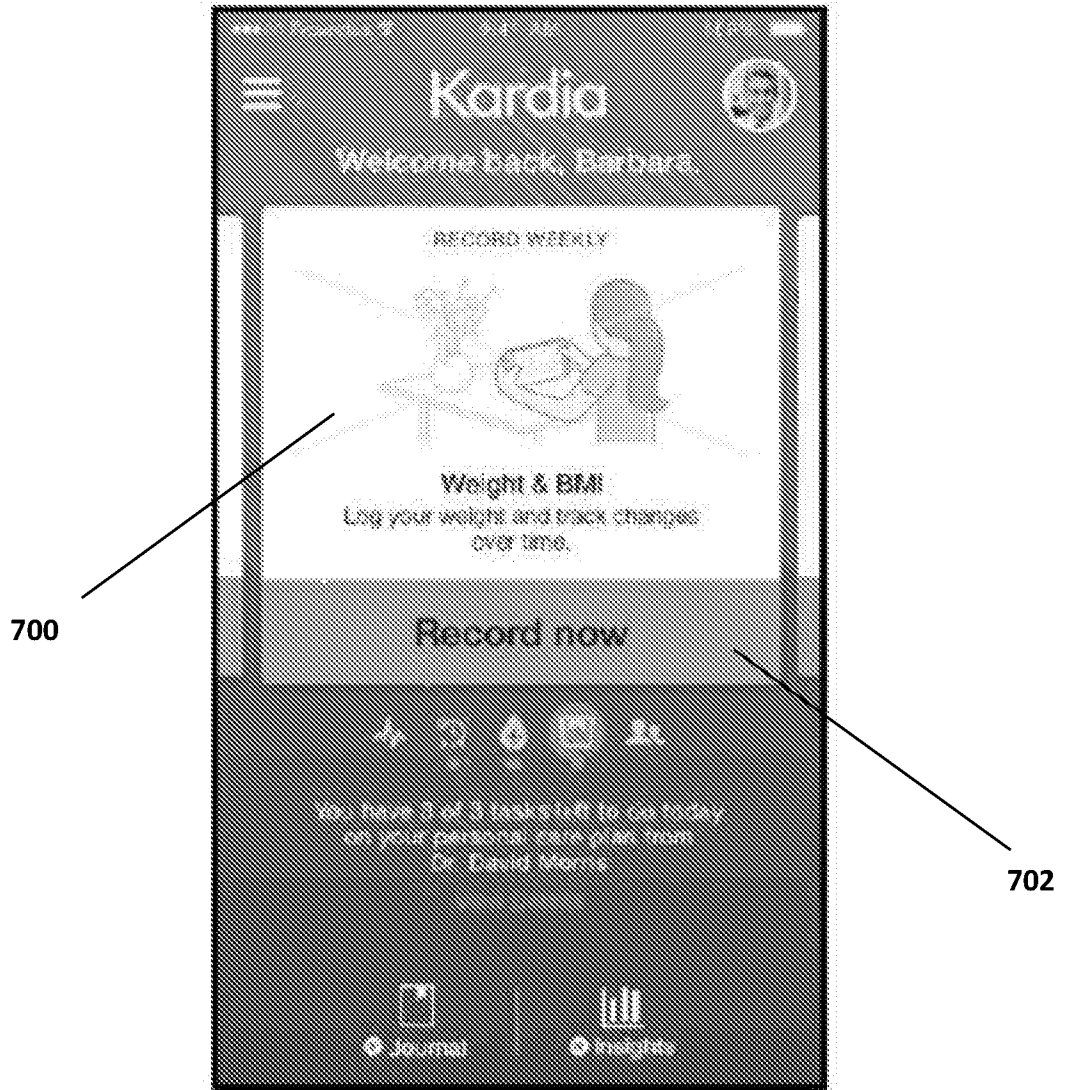
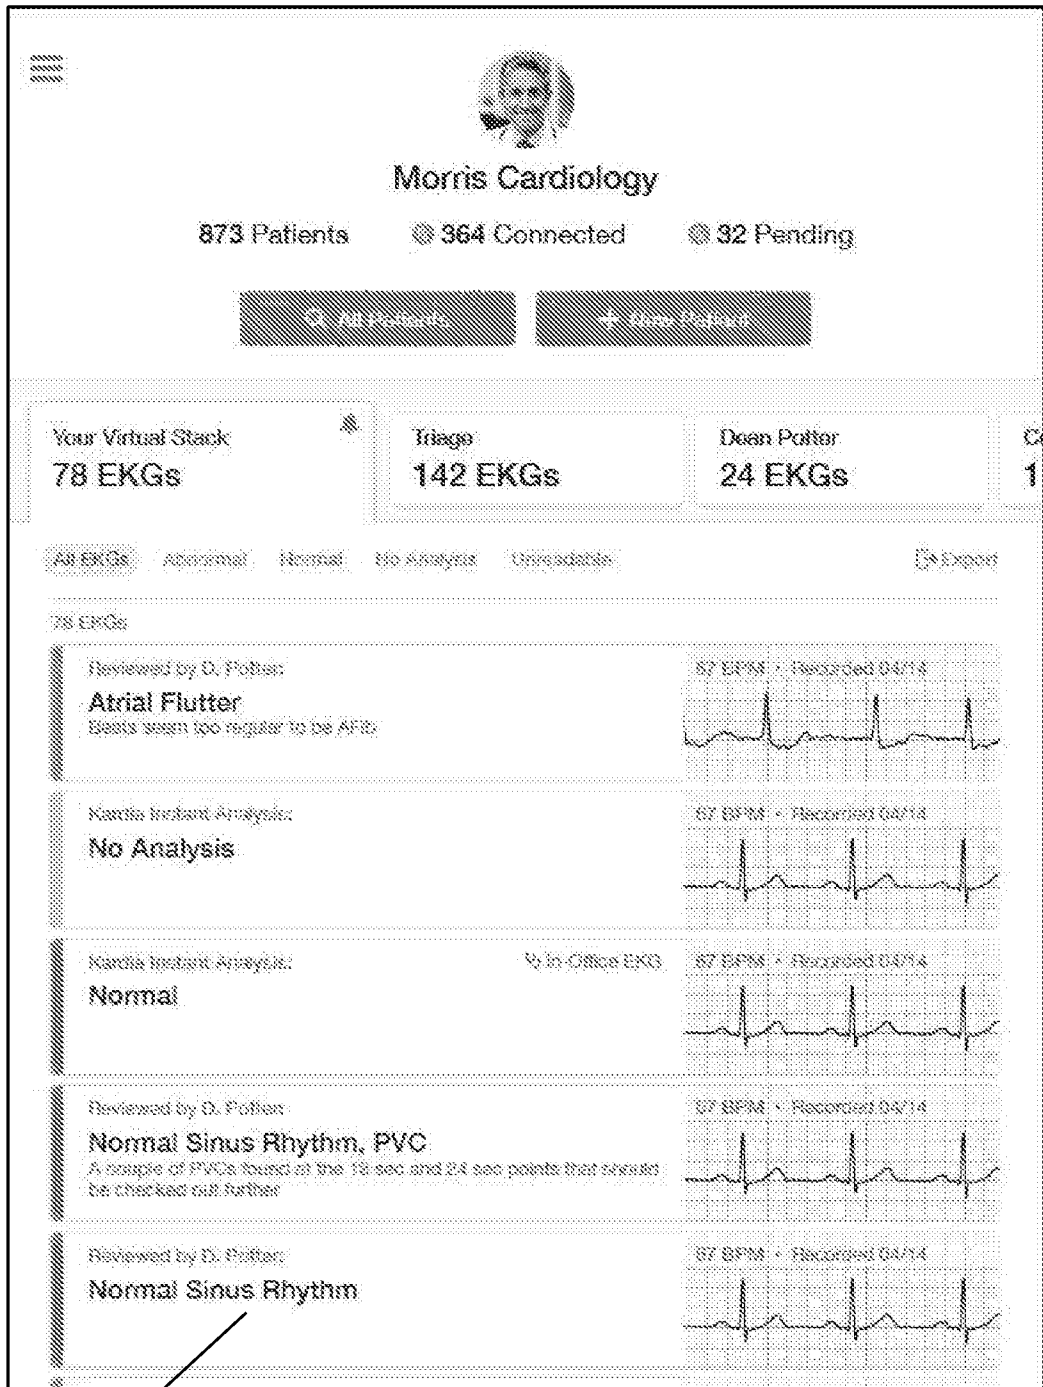


FIG. 7

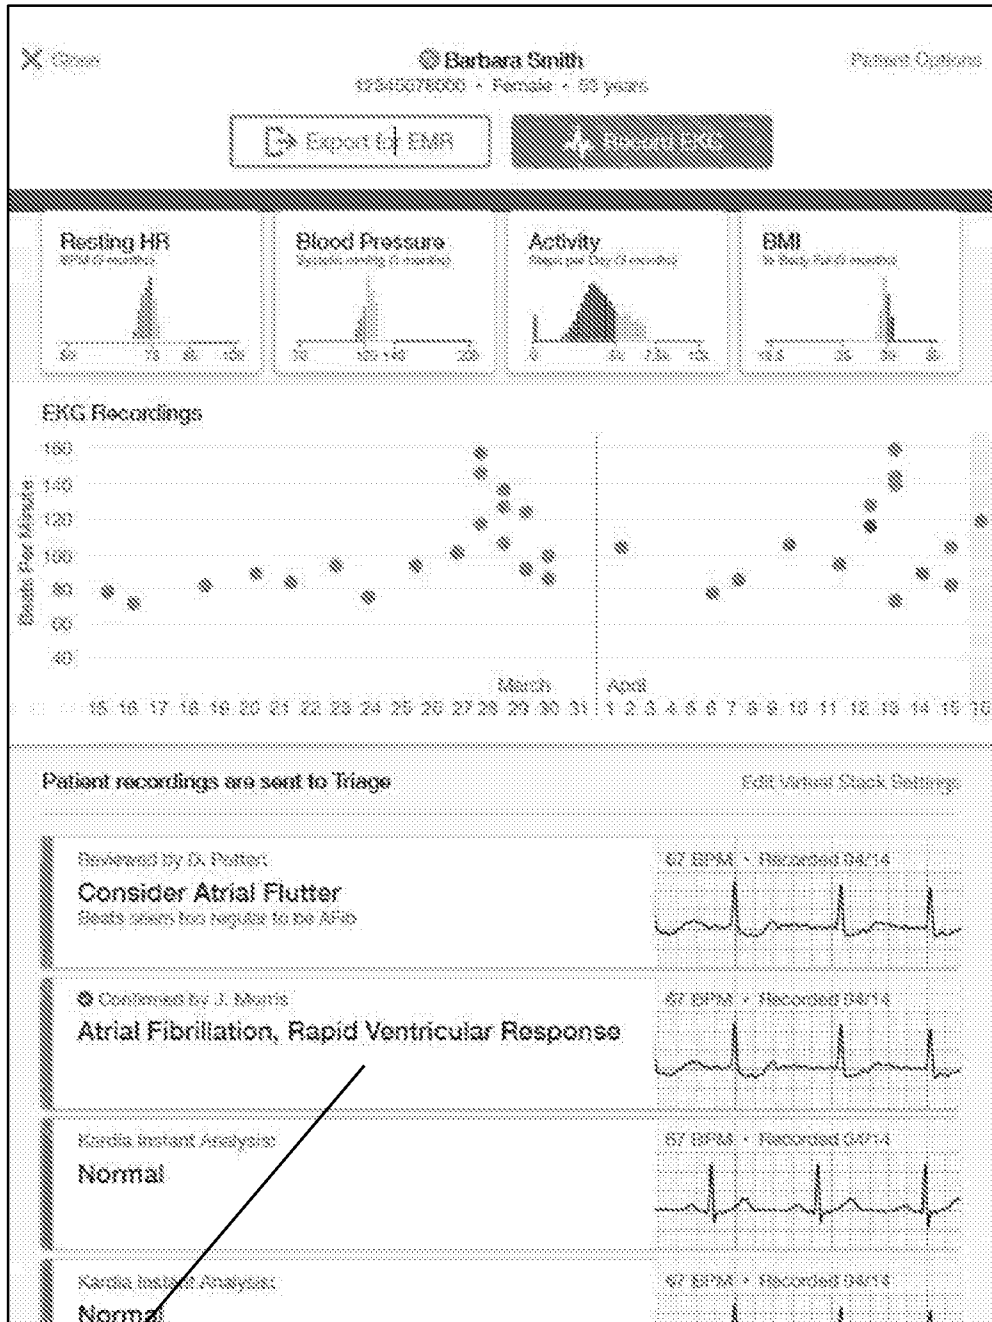


FIG. 8




900

FIG. 9A



902


FIG. 9B

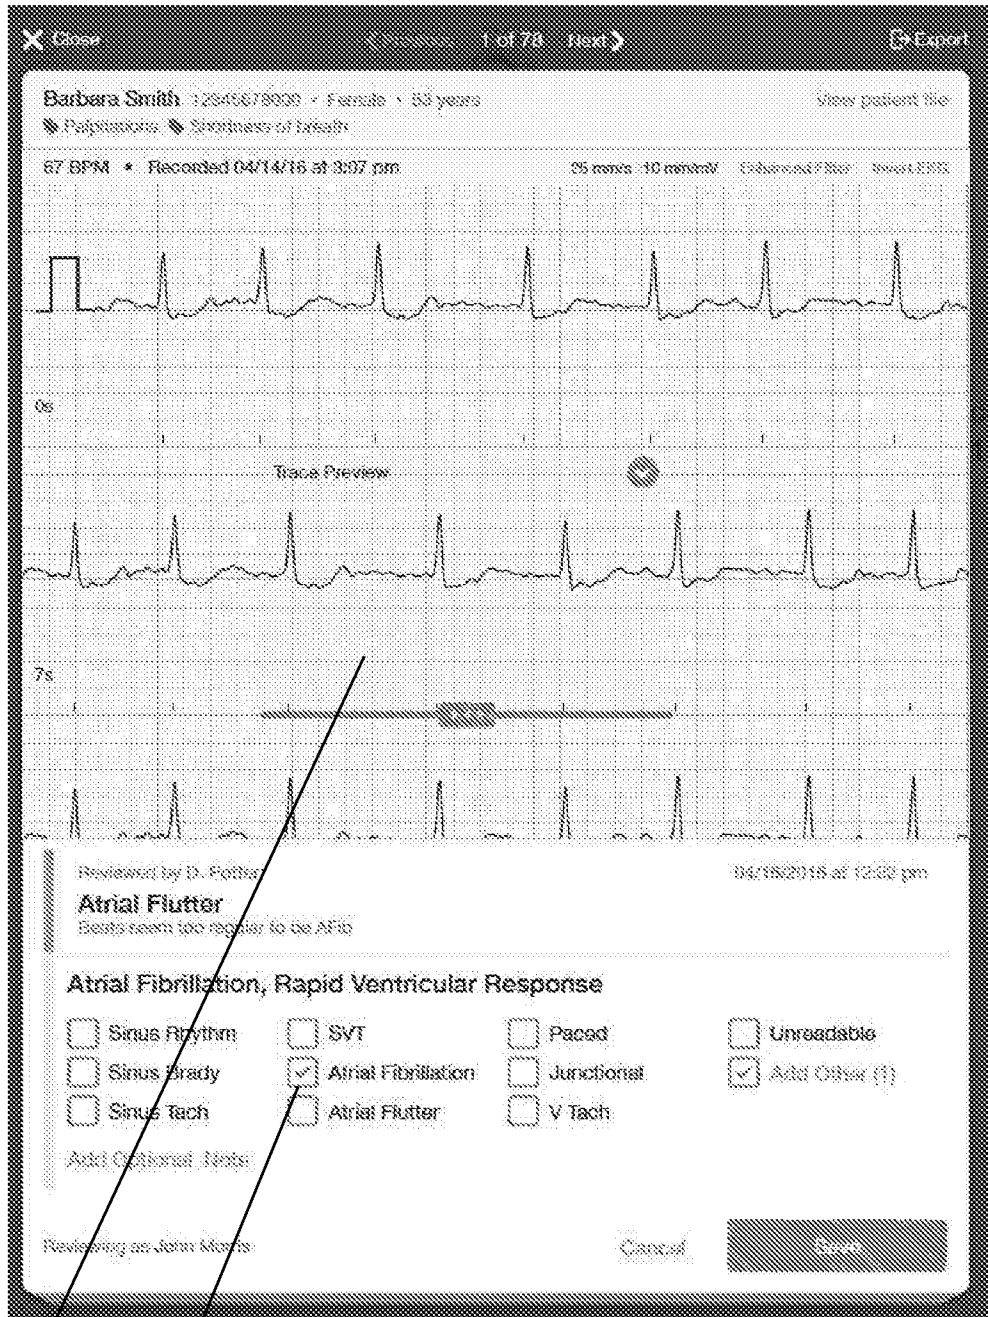

904

906

FIG. 9C

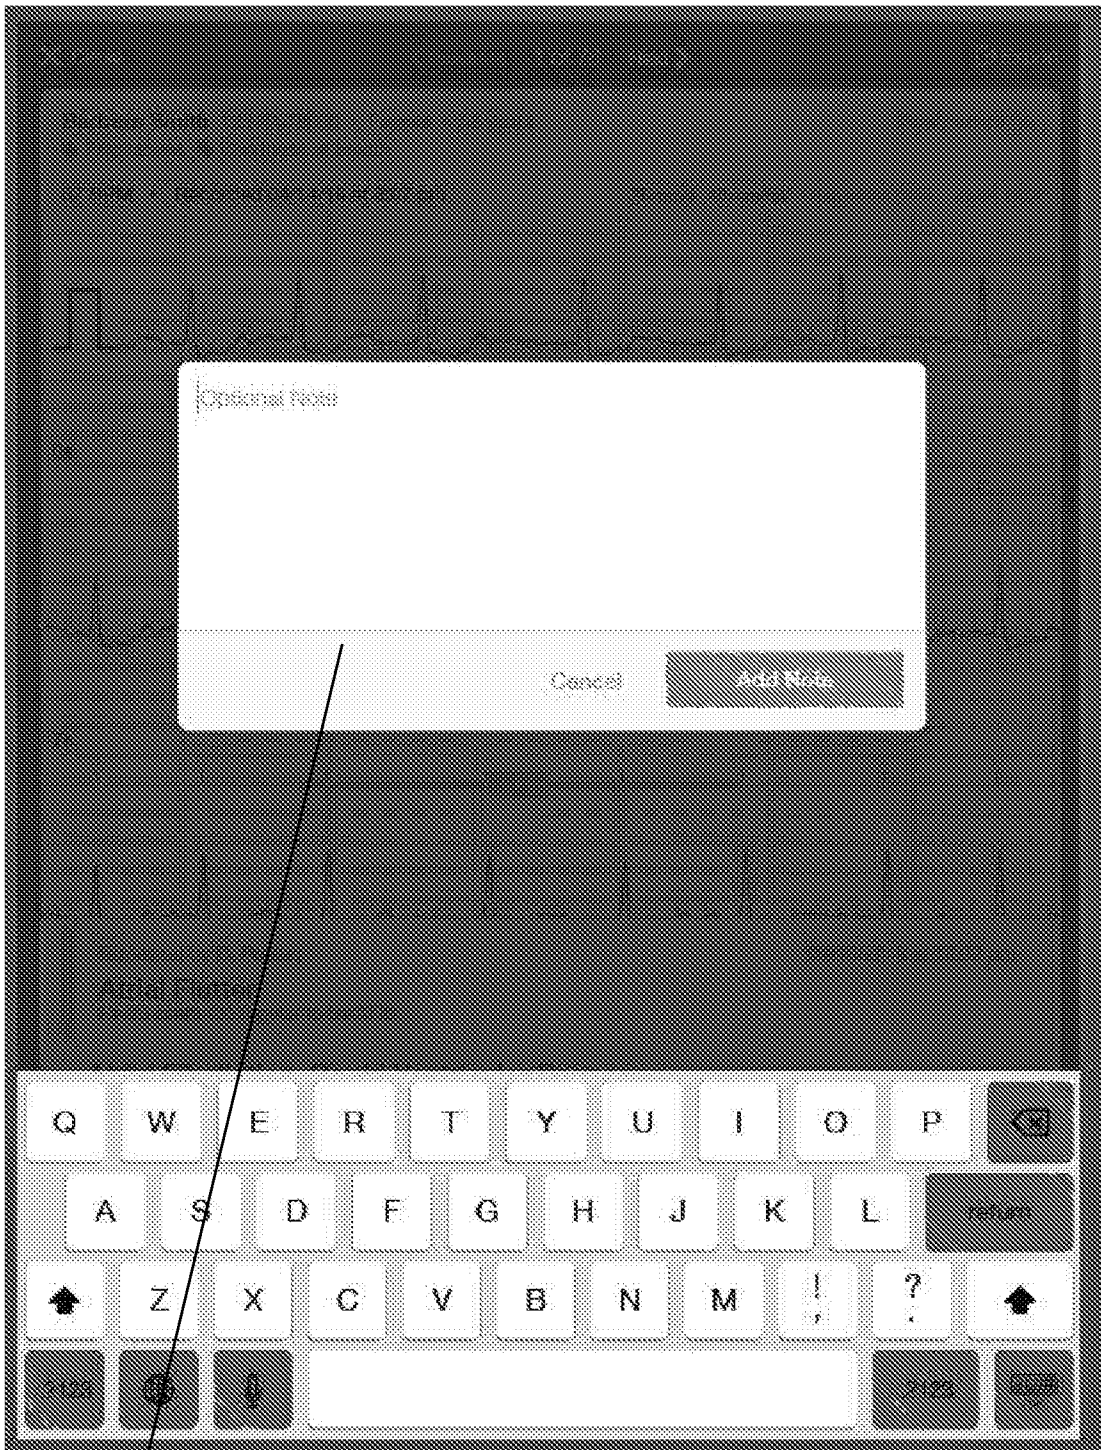

908

FIG. 9D

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2017/049622

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61B 5/0245; A61B 5/00; A61B 5/024; A61B 5/046 (2017.01)

CPC - A61B 5/02055; A61B 5/02405; A61B 5/02416; A61B 5/0245; A61B 5/046 (2017.08)

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC - 600/508 (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2015/0164349 A1 (ALIVECOR, INC.) 18 June 2015 (18.06.2015) entire document	1-30
A	US 2004/0210458 A1 (EVANS et al) 21 October 2004 (21.10.2004) entire document	1-30
A	US 2011/0010200 A1 (FIROZVI et al) 13 January 2011 (13.01.2011) entire document	1-30
A	US 2009/0144089 A1 (HEYWOOD et al) 04 June 2009 (04.06.2009) entire document	1-30

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

17 October 2017

Date of mailing of the international search report

06 NOV 2017

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents  
P.O. Box 1450, Alexandria, VA 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300  
PCT OSP: 571-272-7774

专利名称(译)	用于生理学监测的装置，系统和方法		
公开(公告)号	<a href="#">EP3506820A1</a>	公开(公告)日	2019-07-10
申请号	EP2017847548	申请日	2017-08-31
[标]申请(专利权)人(译)	阿利弗克公司		
申请(专利权)人(译)	ALIVECOR INC.		
当前申请(专利权)人(译)	ALIVECOR INC.		
[标]发明人	PETTERSON FRANK MCLEAN MELISSA OKAMOTO ARTHUR JENKINS JAMES GUNDOTRA VIVEK ALBERT DAVID		
发明人	PETTERSON, FRANK MCLEAN, MELISSA OKAMOTO, ARTHUR JENKINS, JAMES GUNDOTRA, VIVEK ALBERT, DAVID		
IPC分类号	A61B5/0245 A61B5/00 A61B5/024 A61B5/046		
CPC分类号	G16H10/20 G16H10/60 G16H40/63 G16H40/67 G16H50/20 G16H50/30 G16H80/00 G16H15/00		
优先权	62/382227 2016-08-31 US		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

提供软件应用程序，设备，系统和方法，用于使用关联的计算设备监视，记录和跟踪心脏健康相关指标。软件应用程序可能会监测，记录和跟踪生理数据，如心脏电活动，心率和血压。患者和医疗保健提供者之间的数据传输也可以经由这里公开的软件应用程序来启用。