



- (51) International Patent Classification:
A61B 5/00 (2006.01) A61B 5/024 (2006.01)
- (21) International Application Number:
PCT/EP2017/080137
- (22) International Filing Date:
23 November 2017 (23.11.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
16201124.1 29 November 2016 (29.11.2016) EP
- (71) Applicant: KONINKLIJKE PHILIPS N.V. [NL/NL];
High Tech Campus 5, 5656 AE Eindhoven (NL).
- (72) Inventor: BONOMI, Alberto, Giovanni; High Tech Cam-
pus 5, 5656 AE Eindhoven (NL).
- (74) Agent: CLAVEAU, Olivier et al.; Philips International
B.V. – Intellectual Property & Standards High Tech Cam-
pus 5, 5656 AE Eindhoven (NL).

- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(54) Title: METHOD AND SYSTEM OF MONITORING CARDIAC ACTIVITY OF A USER

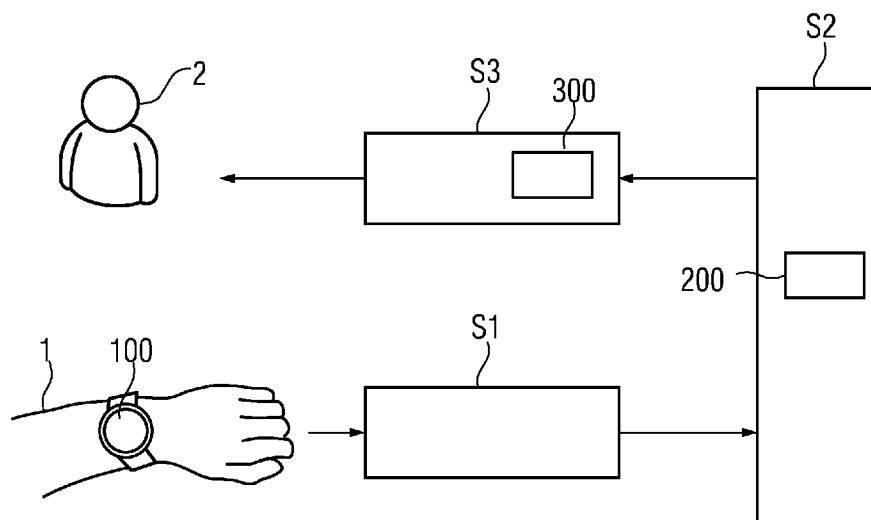


FIG. 1

(57) Abstract: A method of monitoring cardiac activity of a user is provided. Heart beat time data is detected by a PPG sensor (110) in a health sensor (100) worn by the user (1). Motion data is detected by a motion sensor (120) in the health sensor (100). The output data of the PPG sensor (110), which comprises heart beat time data, is analyzed to detect arrhythmia periods. The detected heart beat time data, the detected motion data and the detected arrhythmia are forwarded to an external device, where the data can be stored. The output data of the PPG sensor (110) comprising the heart beat time data, the detected motion data and the detected arrhythmia periods are displayed such that a medical professional (2) can analyze this data to determine whether a suspected arrhythmia period is valid.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

Method and system of monitoring cardiac activity of a user

FIELD OF THE INVENTION

The invention relates to a method and system of monitoring cardiac activity of a user.

5 BACKGROUND OF THE INVENTION

One cardiac condition which needs to be monitored is atrial fibrillation AF. Atrial fibrillation AF can lead to embolic stroke and heart failure. Therefore, an early detection of atrial fibrillation AF is required. However, the detection of AF can be problematic as AF can appear suddenly and stop autonomously. Hence, long term monitoring
10 of the cardiac activity of a user is required if AF events are to be captured effectively. A long term monitoring of the cardiac activity of the user is however often obtrusive and costly as the required devices such as a Holter monitor is expensive. While the Holter monitor can efficiently collect the patient's ECG, such a Holter monitor is obtrusive such that a long term monitoring can be quite cumbersome for a user.

15 Wearable devices which comprise a photo-plethysmographic PPG sensor are known which are able to unobtrusively detect a heart rate and heart rhythm of a user. WO 2005/150199 discloses a system for detecting variations of a heart rate of a user. A PPG sensor is used to measure a heart beat-related optical signal. Heart beat variations are derived from the heart beat-related optical signal. In an analyzing unit, the derived heart rate variation
20 signal is compared to a reference heart rate range.

US 9,179,849 discloses a method of monitoring cardiac activity of a user. A heart rate and motion data is detected and analyzed.

SUMMARY OF THE INVENTION

25 It is an object of the invention to provide a method of monitoring cardiac activity of a user in an unobtrusive manner to efficiently detect atrial fibrillation.

According to the invention, a method of monitoring cardiac activity of a user is provided. Heart beat time data is detected by a photo-plethysmographic PPG sensor in a health sensor, such as a wearable health sensor worn by the user. Motion data is detected by a

motion sensor in the health sensor. The output data of the PPG sensor, which comprises heart beat time data, is analyzed to detect suspected arrhythmia periods. The detected heart beat time data, the detected motion data and the detected arrhythmia periods are forwarded to an external device, where the data can be stored. The output data of the PPG sensor comprising the heart beat time data, the detected motion data and the raw signal or data as detected during the detected arrhythmia periods are displayed such that a medical professional can analyze this data to determine whether a suspected arrhythmia period is valid.

A message is output to the user to operate a specific movement protocol with the body part where the health sensor is located to avoid motion artefacts in the output signal of the PPG sensor when the suspected arrhythmia period is detected.

A health sensor position and orientation is detected based on the detected motion data. Data templates of heart rate time data and heart rate time signal waveforms are generated during the detection of the heart beat time data. A data template is selected to compare with the current measurement according to position and orientation of the sensor. The selected data template is displayed together with the output signal of the PPG sensor.

According to an aspect of the invention, user symptoms are inputted by the user, heart rate rhythm irregularities in the output data of the PPG sensor are detected and the user symptoms and the heart rate rhythm irregularities are displayed together with the output signal of the PPG sensor.

According to an aspect of the invention, the arrhythmia period is an atrial fibrillation period, a heart beat pause period, a tachycardia period, a bradycardia period or supra-ventricular arrhythmia periods.

According to an aspect of the invention, a system and method for monitoring cardiac activity of a user is provided. A health sensor, such as for example a wearable health sensor, which comprises a photo-plethysmographic PPG sensor as well as a motion sensor or an acceleration sensor, which may be worn on the skin of the user in order to detect heart rate data and the motion of the user. The PPG sensor provides a signal which changes its amplitude with the occurrence of heart beats which cause pulsatile volumetric variation in the blood underneath the skin surface. Thus, the PPG sensor detects heart rate data and the output signal of the PPG sensor comprises heart rate data. The heart rate data can be heart beat time data and/or heart beat rhythm data. As the sensor may be a wearable sensor like a wrist worn sensor or a sensor worn in or behind the ear of a user, the detection of heart rate data can be performed unobtrusively. The sensor can detect the heart rate or cardiac activity of a user as well as its motion. The PPG signal used to derive heart rate (like heart beat time data) and the

heart rhythm information can be analyzed in order to detect an atrial fibrillation AF. The analysis can be performed in the sensor or externally from the sensor. The heart rate data (like heart beat time data), the motion data and optionally the analysis of the heart rate data (like heart beat time data) can be forwarded to an external device (which can be a backend unit or a cloud unit) via wires or wirelessly. The data can be stored in the backend unit or the cloud unit.

The data can be further processed and analyzed in order to detect an atrial fibrillation AF. If an atrial fibrillation AF is detected or analyzed, then the corresponding PPG data which includes heart rate data and motion data can be displayed such that a clinical professional can analyze such data in order to determine whether the detected atrial fibrillation AF is valid atrial fibrillation AF or whether the detection was only due to for example motion artefacts or sporadic premature beats. The clinical professional can optionally combine information on the symptoms of the patient, the heart rhythm abnormalities and the PPG morphology to assess clinical relevance of an atrial fibrillation episode. Thus, the clinical professional can examine the detected atrial fibrillation more efficiently.

It should be noted that although the PPG sensors may be able to provide an AF detection, the output of the PPG sensors may include motion artefacts which may lead to a wrongful atrial fibrillation. Because of the possibility of a wrongful atrial fibrillation detection, for example due to motion artefacts in the output of the PPG sensor, it is advisable that the atrial fibrillation AF detection should be monitored or controlled by a clinical technician, a doctor or a clinical professional. Otherwise the display of atrial fibrillation could lead to false alarms and inappropriately generate anxiety in patients. Thus, the advantages of the non-obtrusive PPG sensors for an unobtrusive and long term monitoring of arrhythmia detection can be combined with the experience of a medical professional.

According to an aspect of the invention, a sensor, such as for example a wearable sensor, is used to detect heart rate data (like heart beat time data) as well as motion data. If an atrial fibrillation is detected, a doctor or a clinical professional can review the raw data of the motion detection and raw output data of the PPG sensor in order to determine whether an actual atrial fibrillation has taken place.

According to the invention, a photo-plethysmographic PPG sensor can be used to detect atrial fibrillation AF unobtrusively and during long periods of time. Because of the nature of the PPG sensor, it is sensitive towards premature beats and motion artefacts. Accordingly, a large amount of suspected AF episodes may be detected which clinical

professionals will have to examine in more detail in order to properly evaluate the entity of the AF burden of the patient.

According to an aspect of the invention, the PPG data as well as the motion data and the detected atrial fibrillation AF episodes may be reviewed by a medical professional. Furthermore, symptoms of the patient as well as reference signal templates may be used by the medical professional to examine the suspected AF episodes. By using a (wearable) PPG sensor and by also collecting the corresponding motion data, the effectiveness of the diagnostics of potential atrial fibrillation may be increased. For example, a cardiologist would then be able to verify the detected or suspected atrial fibrillation AF episodes by directly verifying or examining the PPG data as well as the motion data.

Additionally, the motion sensor can provide information on the posture and orientation of the body where the PPG signal is collected so that morphology features of the PPG signal could be better evaluated by a human expert. PPG signal templates collected in periods of normal cardiac rhythm for the same orientation of the body location can be displayed together with the PPG signal during AF to facilitate data interpretation. Any meaningful deviation in the PPG morphology for a given body posture/orientation may suggest a true AF episode.

Accordingly, the PPG sensor data may be used to detect an atrial fibrillation. The motion data may be used to verify whether the suspected atrial fibrillation episode is related to motion artefacts or not. For example, if the motion sensor has not detected any major movement, the suspected atrial fibrillation episode may be a valid atrial fibrillation episode. However, on the other hand, if the motion detector detects a high amount of motion, the suspected atrial fibrillation episode may not be a valid atrial fibrillation episode but may relate to motion artefacts.

With the system and method according to the invention, it is possible to perform a long term monitoring of the patient's vital signs or cardiac activity such that also a long term atrial fibrillation detection can be performed in an unobtrusive manner.

The PPG sensor data as well as the motion data optionally together with the detected or suspected atrial fibrillation data may be transmitted wirelessly for example via a smart device or directly to an external storage device. Alternatively, the transmission may also be performed when the PPG sensor is connected to a computer or smart device via cable. It shall be understood that a preferred embodiment of the present invention can also be a combination of the dependent claims or above embodiments or aspects with respective independent claims.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiment(s) described hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

5 In the following drawings:

Fig. 1 shows a basic representation of a method of monitoring cardiac activity of a user,

Fig. 2 shows a basic representation of a method of monitoring cardiac activity of a user according to an aspect of the invention,

10 Fig. 3 shows a flow chart of a method of monitoring cardiac activity of a user according to an aspect of the invention,

Fig. 4 shows graphs depicting a motion level and an output of a PPG sensor according to an aspect of the invention,

15 Fig. 5 shows graphs depicting a PPG signal as well as a motion level of a user according to an aspect of the invention, and

Fig. 6 shows different graphs depicting a PPG signal and a motion level of a user.

DETAILED DESCRIPTION OF EMBODIMENTS

20 Fig. 1 shows a basic representation of a method of monitoring cardiac activity of a user. A user 1 can wear a vital signs sensor like wearable health monitor 100. The wearable health monitor can be embodied as a wrist worn device and can comprise at least one PPG sensor, a motion detector and optionally a control unit. The wearable health monitor detects heart rate data via the PPG sensor as well as motion, orientation and posture
25 information with the motion detector. The output of the PPG sensor can optionally be analyzed in the control unit in order to detect an atrial fibrillation AF. Alternatively, the analysis of the raw data of the output of the PPG sensor can also be performed in an external device 200.

30 The PPG sensor outputs an output signal which changes its amplitude with the occurrences of heart beats. The output of the PPG sensor therefore comprises heart rate data. This heart rate data can comprise heart beat time data and/or heart beat rhythm data.

In step S1, the heart rate data (like heart beat time data) as well as the motion data are measured by the wearable health monitor 100. In step S2, the output data of the PPG sensor is analyzed in order to detect possible atrial fibrillations AF. If a suspected or possible

atrial fibrillation was detected, the corresponding heart rate data and the motion data are forwarded to an external storage device 200 where the data can be stored and optionally analyzed. The storage and analysis can be performed in step S2. The external unit 200 can be a cloud storage or a smart device or computer to which the wearable health monitor can be coupled to in order to exchange data. Optionally, the heart rate data and the motion data are stored in the health monitor 100 which can be a smart watch or the like.

The stored information can be visualized on a display 300 in step S3 such that for example a doctor or a clinical professional can analyze the output data of the PPG sensor 110 as well as the motion data in order to verify whether an atrial fibrillation AF was detected or not.

In the control unit, optionally an automatic detection of rhythm irregularities can be performed. This can for example be performed using a statistical Markov module. Here, the interbeat interval series is processed. Alternatively, an irregularity of the heart rhythm can be tested using entropy metrics like the sample entropy.

According to an aspect of the invention, heart beat time data can be present in the output signal or output data of the PPG sensor. Based on the heart beat time data, arrhythmia periods are detected. The detected heart rate time data, the detected motion data and the detected arrhythmia periods and in particular the raw signal or raw data of the output of the PPG sensor which were detected during an arrhythmia period can be forwarded to the external device and can be displayed to a medical professional.

Fig. 2 shows a basic representation of a method of monitoring cardiac activity of a user according to an aspect of the invention. The wearable health monitor 100 can be embodied as a wrist worn device 100 and can comprise at least one PPG sensor 110, a motion detector 120 and optionally a control unit 130. The wearable health monitor 100 detects heart rate data via the PPG sensor 110 as well as motion, orientation and posture information with the motion detector 120. The output of the PPG sensor 110 can optionally be analyzed in the control unit 130 in order to detect an atrial fibrillation AF. Alternatively, the analysis of the raw data of the output of the PPG sensor 110 can also be performed in an external device 200. It should be noted that in the aspect as described in Fig. 1 or Fig. 2, due to motion artefacts false positive AF classifications can occur in the output signal of the PPG sensor. According to the aspect of Fig. 2, the output of the PPG 110 sensor as well as the output of the motion sensor 120 is analyzed in order to detect an atrial fibrillation AF. In particular, heart beat time data and/or heart rhythm data are analyzed to determine an atrial fibrillation episode. If an atrial fibrillation is detected in step S10, then in step S11 an alert is outputted

and optionally the user is asked not to move. Then in step S12, the heart rate of a user can be detected without any motion artefacts, i.e. a motion verification of the expected user action is determined and in step S13, the raw data of the PPG sensor as well as the motion data is detected and can be analyzed.

5 In other words, if an atrial fibrillation episode AF is detected, the user can be asked to refrain from moving in order to detect the heart rate data again but without any movement to avoid motion artefacts. For example, the user may be asked to keep his arm in a steady position to enable a recollection of the PPG signal to re-evaluate arrhythmias and AF, or the arm or wrist of a user may be positioned in a specific location such as at the chest or
10 the like. Alternatively, the user may be asked to maintain his arms steadily on a flat surface. During this period, the heart rate data as well as the motion data are detected and can be forwarded to the external device.

 Optionally, the motion or acceleration data can be used to detect a start and stop of the wrist motion and to detect the orientation of the wrist on which the health monitor
15 is worn.

 Accordingly, based on the motion and acceleration data, a wrist position awareness can be achieved. This information regarding the wrist position can be used to generate a reference template and to create advance visualizations of the measured signals like the PPG morphology, heart rate, motion and AF probability.

20 Accordingly, a position dependent PPG morphology during normal sinus rhythm can be compared to the output of the PPG signal in order to highlight a pathological condition. Optionally, the PPG signal is only collected or the data is only forwarded if the accelerometer has determined a steady position of the wrist. If no steady position of the wrist is detected, then the PPG signal is discarded or the PPG sensor is not activated. Optionally, a
25 measurement record may include the raw PPG data, the acceleration or motion data, the position and orientation of the wrist, the location of the detected pulses due to cardio-vascular activity, an AF probability and symptoms of the user. The symptoms of the user can be inputted to the wearable health monitor.

 According to an aspect of the invention, the user may also initiate the above-
30 described measuring procedure if he considers it necessary, for example in case of a sudden unset of cardiac symptoms.

 Other types of suspected arrhythmia may also be used as trigger for a user action to perform a motion-controlled acquisition of the PPG signal. For example heart pauses, tachycardia, bradycardia, or other types of supra-ventricular arrhythmias may be

automatically detected from the inter-beat interval time series and generate alarms for follow up user verification maneuvers.

The data of the PPG sensor and the motion data etc. is stored in a storage device and can be processed later on.

5 Fig. 3 shows a flow chart of a method of monitoring cardiac activity of a user according to an aspect of the invention. In step S20, the data of the PPG sensor, motion data, an atrial fibrillation AF probability, symptoms of the user etc. can be detected. In step S21, the motion intensity can be calculated based on the detected motion data. In step S23, position and/or orientation dependent data templates may be generated. In step S22, the PPG
10 signal may be filtered. In step S24, a visualisation engine is used to visualize the PPG data, the motion data as well as optionally a detected atrial fibrillation. In step S25, motion data, detected heart beats, template differences may be highlighted.

Fig. 4 shows graphs depicting a motion level and an output of a PPG sensor according to an aspect of the invention. In Fig. 4, the PPG signal PPGS and a motion level
15 ML is depicted for a normal sinus rhythm NSR as well as a sinus rhythm without motion artefacts MA as well as with motion artefacts. As can be seen from Fig. 4, a regular peak pattern and the distorted peak pattern is disclosed, wherein the distorted peak pattern is due to motion artefacts.

Fig. 5 shows graphs depicting a PPG signal as well as a motion level of a user according to an aspect of the invention. In Fig. 5, the PPG sensor and motion sensor of a
20 detected atrial fibrillation AF as well as a normal sinus rhythm NSR is depicted. In Fig. 5, a number of irregular peaks with relatively small magnitude is present during an atrial fibrillation AF. As the motion level ML is zero, the output of the PPG sensor PPGS appears to be reliable as no motion artefacts should be present.

Fig. 6 shows different graphs depicting a PPG signal PPGS and a motion level
25 ML of a user. In Fig. 6, the PPG signal as well as the motion level is depicted for a first premature beat PB1 as well as second premature beats PB2. In Fig. 6, the influence of premature beats on the output signal of the PPG sensor is depicted.

According to an aspect of the invention, a position dependent PPG
30 morphology with a normal sinus rhythm as depicted in Fig. 6 can be compared to the actual output of a PPG signal for example as depicted in Fig. 5. By comparing the signals, a pathological condition can be detected.

The PPG signal can optionally be filtered to remove baseline fluctuations for example using a high-pass filter. Accordingly, the output signal may then comprise

information such as the temporal location of heart beat and cardiac activity more clearly. The data of the accelerometer or the motion data can be processed to determine a motion level for example by computing the maximum acceleration value on each axis of the accelerometer and allow more straightforward review by a medical professional as to judge whether the filtered PPG signal is affected by motion artefacts as shown in Fig. 4.

The orientation of the wrist or of the body location where the wearable sensor is located during the detection of raw data can be determined by assessing the direction of the gravity component in of a tri-axial accelerometer used as motion sensor in the system. If the wrist is on the chest or on a flat surface, this can be detected. The wrist position and orientation can be used to determine from a data base containing previous recordings from the patient the most relevant PPG template to forward in the visualization tool in order to improve interpretation of the records during clinical review.

In Fig. 5, the raw data of the PPG signal and the motion level are depicted and can be compared to the same data during a normal sinus rhythm. As can be seen in Fig. 5, the actual PPG signal indeed indicates a pathological cardiac activity as the PPG signal morphology shows irregular fluctuations and have a small magnitude as compared to the signals during the normal sinus rhythm.

In Fig. 6, the filtered PPG signal as well as the motion level are depicted for the presence of premature beats. The presence of premature heart beats could lead to a false detection of an AF. However, the medical professional may use the graph of Fig. 6 to determine whether the suspected AF is valid.

The data as depicted in the Figs. 4 to 6 can be presented to a doctor or a clinical professional such that he can examine the data in order to confirm whether an atrial fibrillation has indeed taken place.

Other variations of the disclosed embodiment can be understood and effected by those skilled in the art in practicing the claimed invention from a study of the drawings, the disclosure and the appended claims.

In the claims, the word “comprising” does not exclude other elements or steps and in the indefinite article “a” or “an” does not exclude a plurality.

A single unit or device may fulfil the functions of several items recited in the claims. The mere fact that certain measures are recited in mutual different dependent claims does not indicate that a combination of these measurements cannot be used to advantage. A computer program may be stored/distributed on a suitable medium such as an optical storage medium or a solid state medium, supplied together with or as a part of other hardware, but

may also be distributed in other forms such as via the internet or other wired or wireless telecommunication systems.

Any reference signs in the claims should not be construed as limiting the scope.

CLAIMS:

1. Method of monitoring cardiac activity of a user, comprising the steps of:
detecting heart beat time data by a photo-plethysmographic PPG sensor (110) in a health
sensor (100) worn by a user (1),
detecting motion data by a motion sensor (120) in the health sensor (100),
5 analyzing output data of the PPG sensor (110) comprising heart beat time data
to detect suspected arrhythmia periods,
outputting a message to the user to operate a specific movement protocol with
a body part where the health sensor (100) is located to avoid motion artefacts in the output
signal of the PPG sensor (110) when the suspected arrhythmia periods are detected,
10 detecting heart beat time data and motion data including a health sensor position and
orientation during the specific movement protocol,
analyzing the motion data detected during the specific motion protocol to
determine whether the user has followed the specific motion protocol,
analyzing the heart beat time data detected during the specific movement
15 protocol to detect suspected arrhythmia periods,
forwarding the detected heart beat time data, the detected motion data and the
detected arrhythmia period to an external device, where the data can be stored,
generating data templates of heart beat time data and heart beat time signal
waveforms during the detection of the heart beat time data, said reference templates also
20 include information on health sensor positions and orientations detected during the specific
movement protocol,
displaying the data template of the PPG sensor (110) comprising heart beat
time data and a raw signal of the output data of the PPG sensor (110) detected during the
suspected arrhythmia periods, the detected motion data as well as at least one previously
25 generated data template to serve as reference such that a medical professional can analyze
this data to determine whether the suspected arrhythmia period is a valid arrhythmia period,
and

forwarding the data templates including detected heart beat time data, the detected motion data, the detected arrhythmia period, the health sensor position and orientation to an external device, where the data can be stored for future reference.

- 5 2. Method according to claim 1, further comprising the steps of:
inputting user symptoms,
detecting heart rate rhythm irregularities in the output data of the PPG sensor
(110), and
displaying the user symptoms and the heart rate rhythm irregularities together
10 with the output signal of the PPG sensor (110), the heart rate data, the motion data and the
suspected arrhythmia period.
3. Method according to claim 1, wherein the arrhythmia period is an atrial
fibrillation period.
15
4. Method according to claim 1, wherein the arrhythmia period is heart pause
period, a tachycardia period, a bradycardia period or supra-ventricular arrhythmia periods.
5. A system of monitoring cardiac activity of a user, comprising
20 a health sensor (100) which comprises a photo-plethysmographic PPG sensor
(110) configured to detect heart beat time data, a motion sensor (120) configured to detect
motion data of the user and a control unit (130) configured to analyze output data of the PPG
sensor comprising heart beat time data to detect suspected arrhythmia periods of the user,
wherein the health sensor (100) is configured to output a message to the user
25 to operate a specific movement protocol with the body part where the health sensor (100) is
located to avoid motion artefacts in the output signal of the PPG sensor (110) when the
suspected arrhythmia periods are detected,
wherein the health sensor (100) is configured to detect heart beat time data and
motion data including a health sensor position and orientation during the specific movement
30 protocol,
wherein the control unit (130) is configured to analyze the motion data to
determine whether the user has followed the specific motion protocol and to analyze the heart
rate time data detected during the specific motion protocol to determine suspected arrhythmia
periods,

wherein the health sensor (100) is configured to generate data templates of heart beat time data and heart beat time signal waveforms during the detection of the heart beat time data during the specific movement protocol, wherein said reference template include information on health sensor positions and orientations,

5 a display unit (300) configured to display the data templates of the PPG sensor, comprising heart beat time data, the detected motion data and the detected raw signal during suspected arrhythmia periods as well as previously generated data templates such that a medical professional can analyze this data to determine whether a suspected arrhythmia period is a valid arrhythmia period, and

10 a storage unit (200) to which the detected heart beat time data, the detected motion data, the detected suspected arrhythmia periods and the data templates are forwarded by the health sensor (100) to be stored for future reference.

6. A cardiac activity monitoring computer program comprising program code
15 means for causing a system for monitoring cardiac activity of a user according to claim 5 to carry out the method of monitoring cardiac activity of a user as defined in claim 1, when the computer program is run on the system of monitoring cardiac activity of a user.

7. The method of any of the claims 1 to 4, or the system of claim 5, wherein the
20 health sensor is a wearable health sensor to be worn by the user.

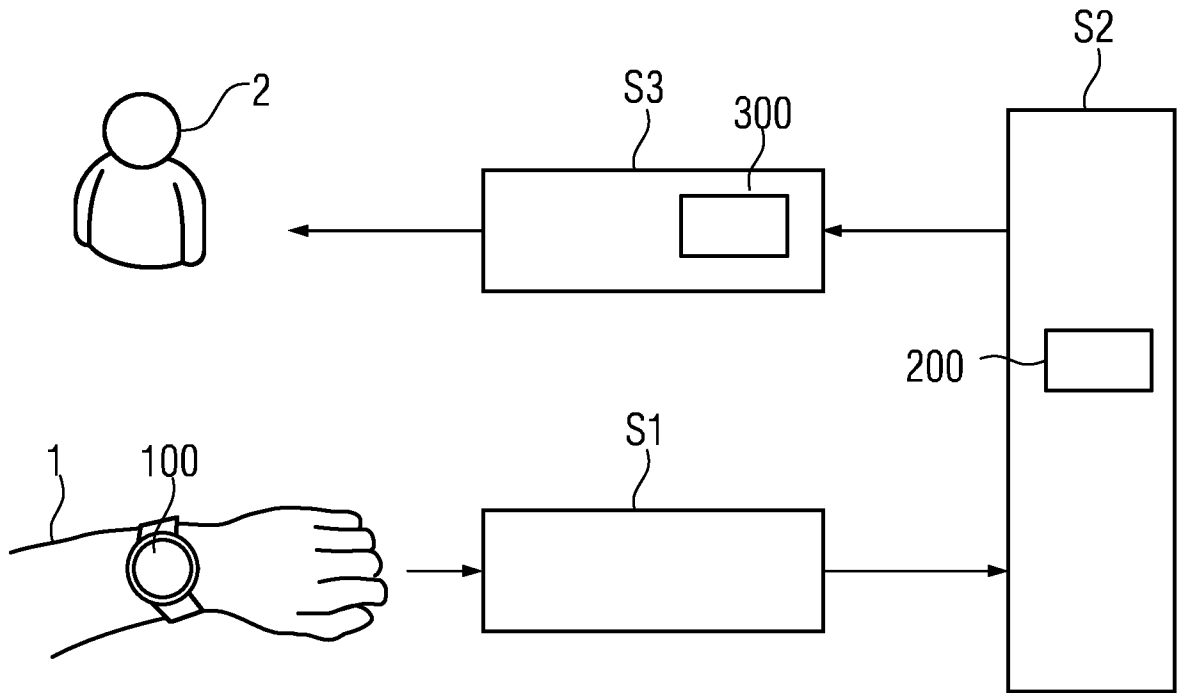


FIG. 1

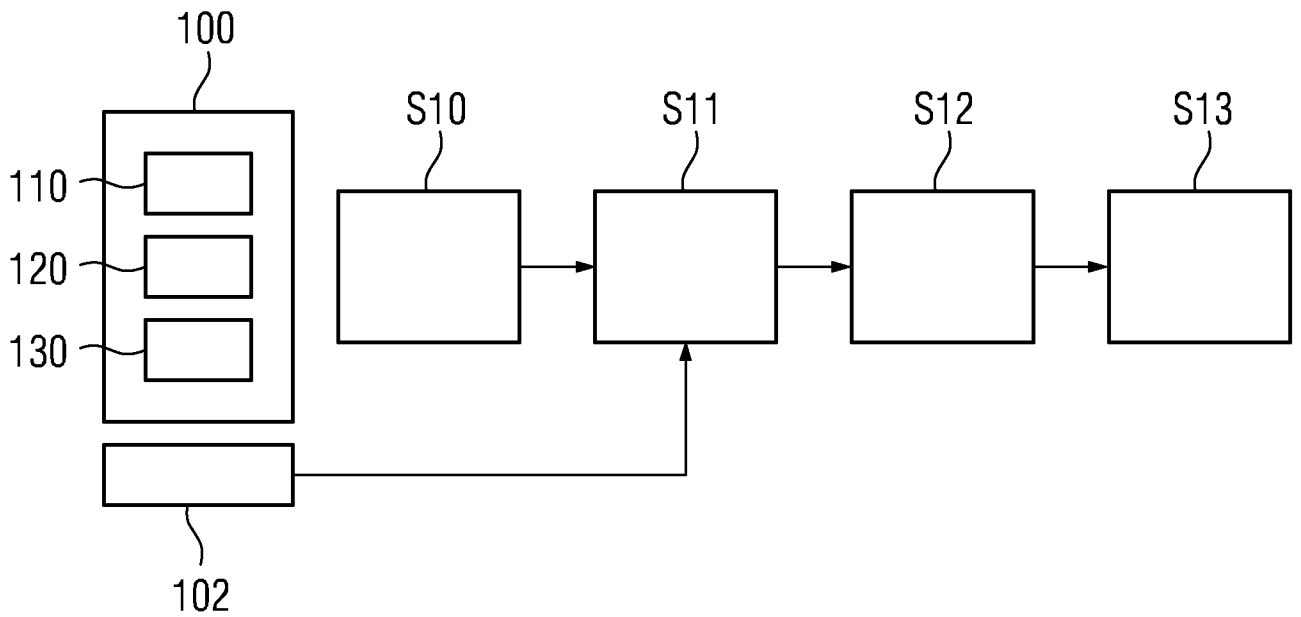


FIG. 2

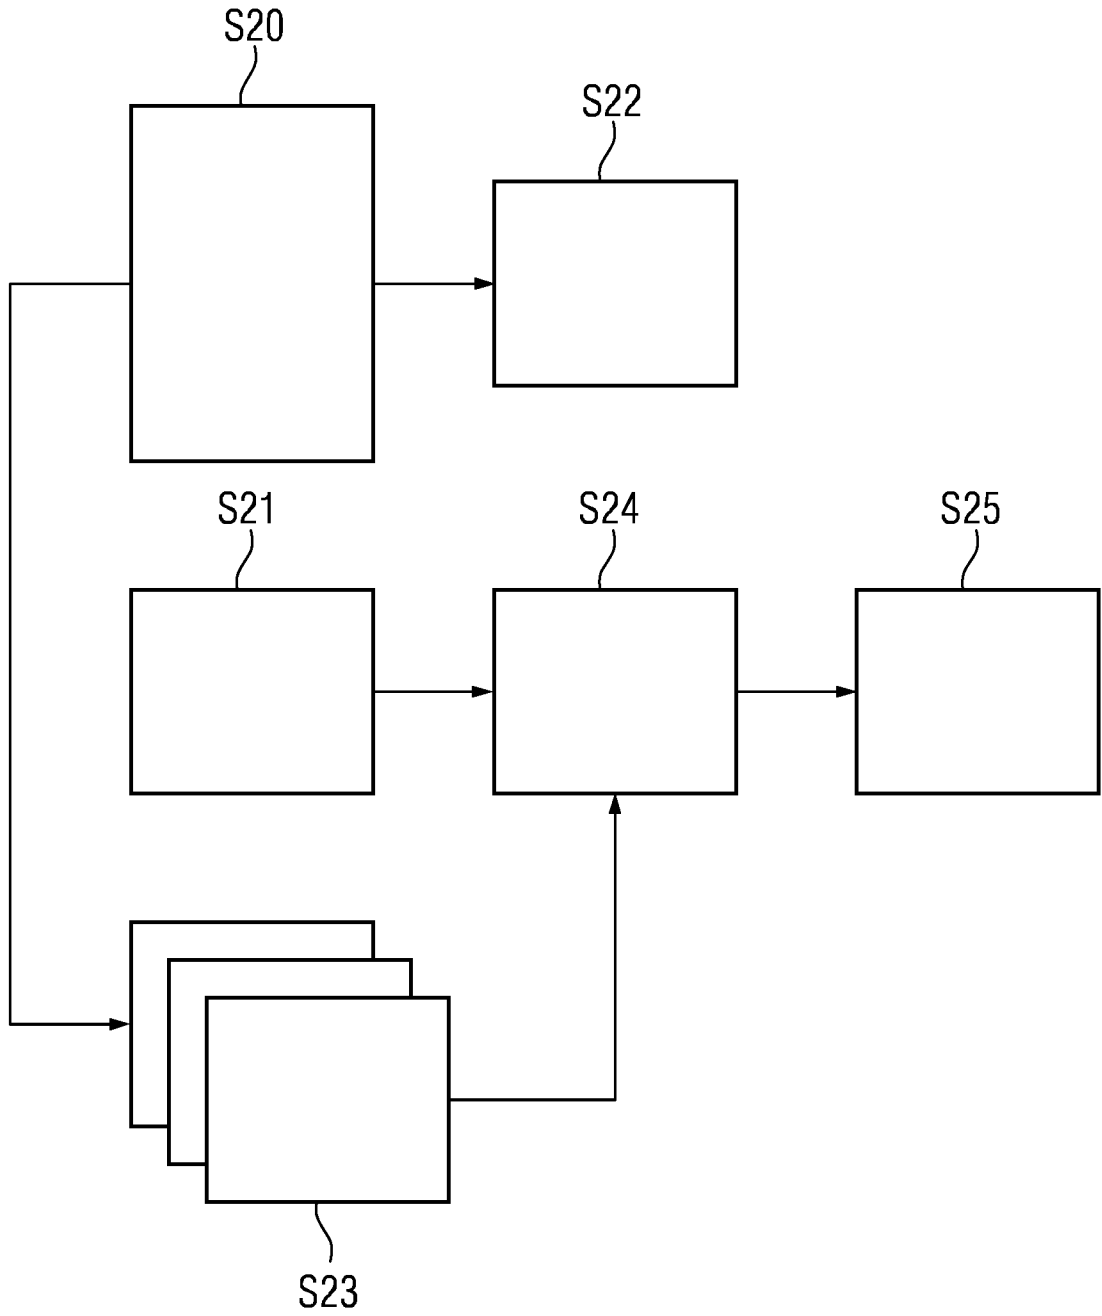


FIG. 3

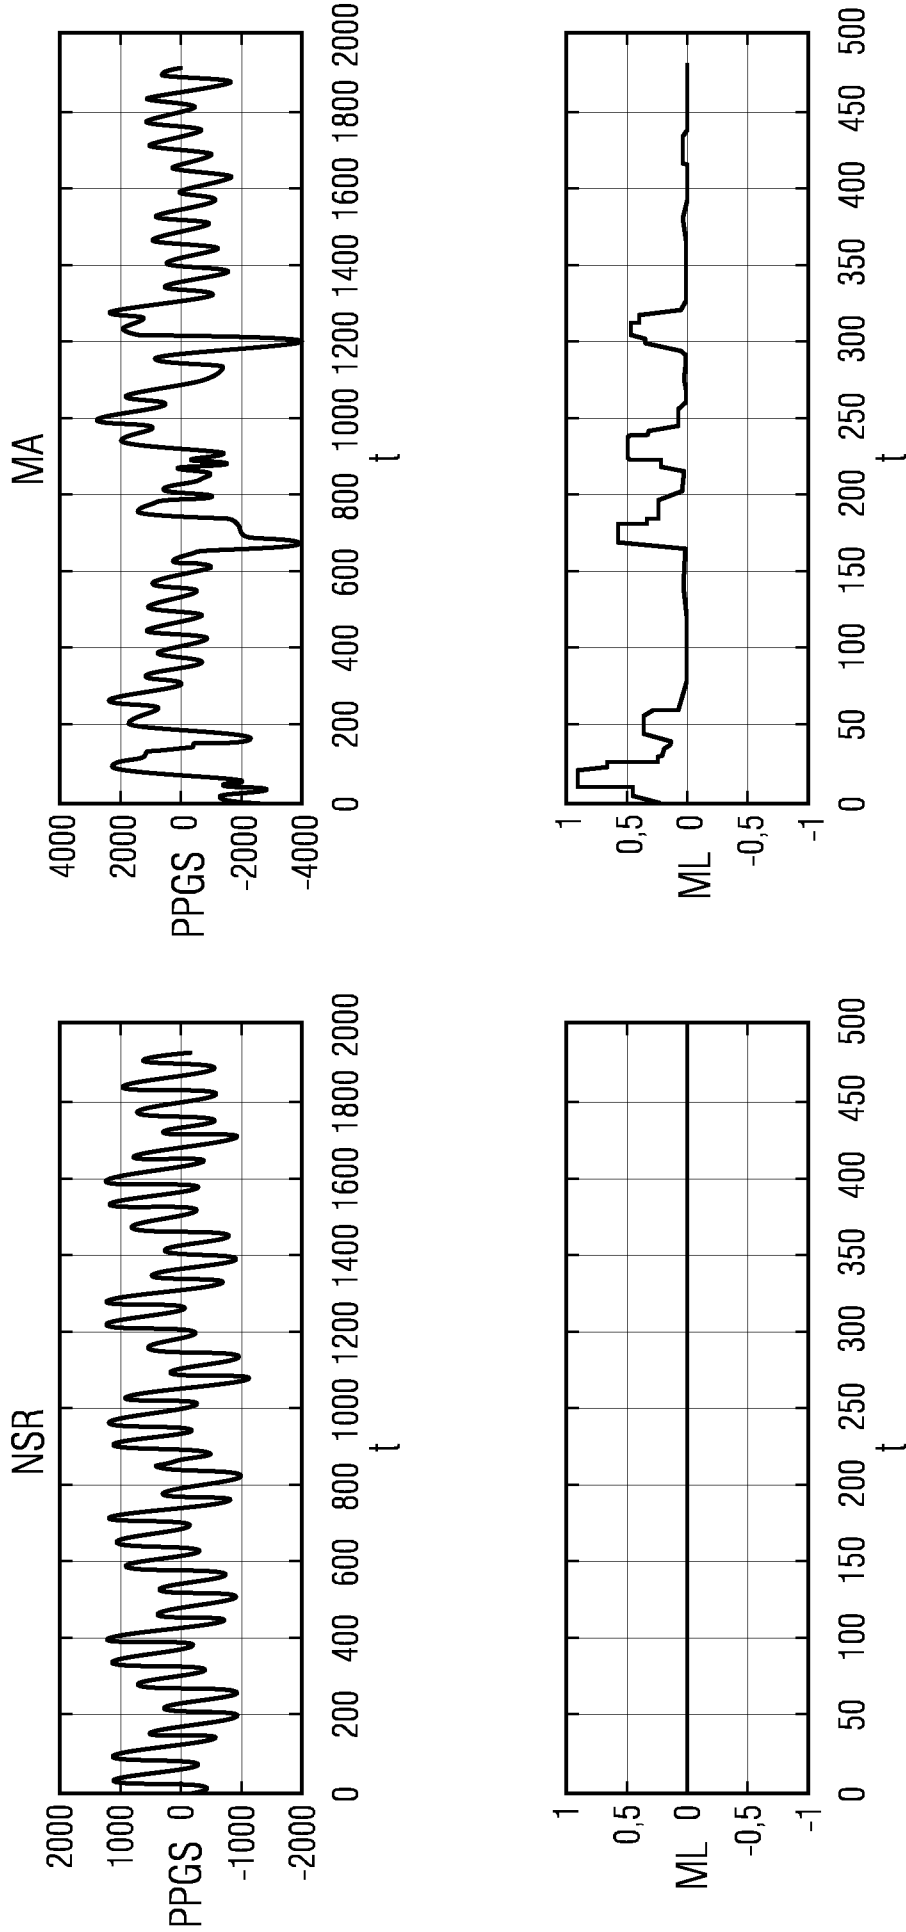


FIG. 4

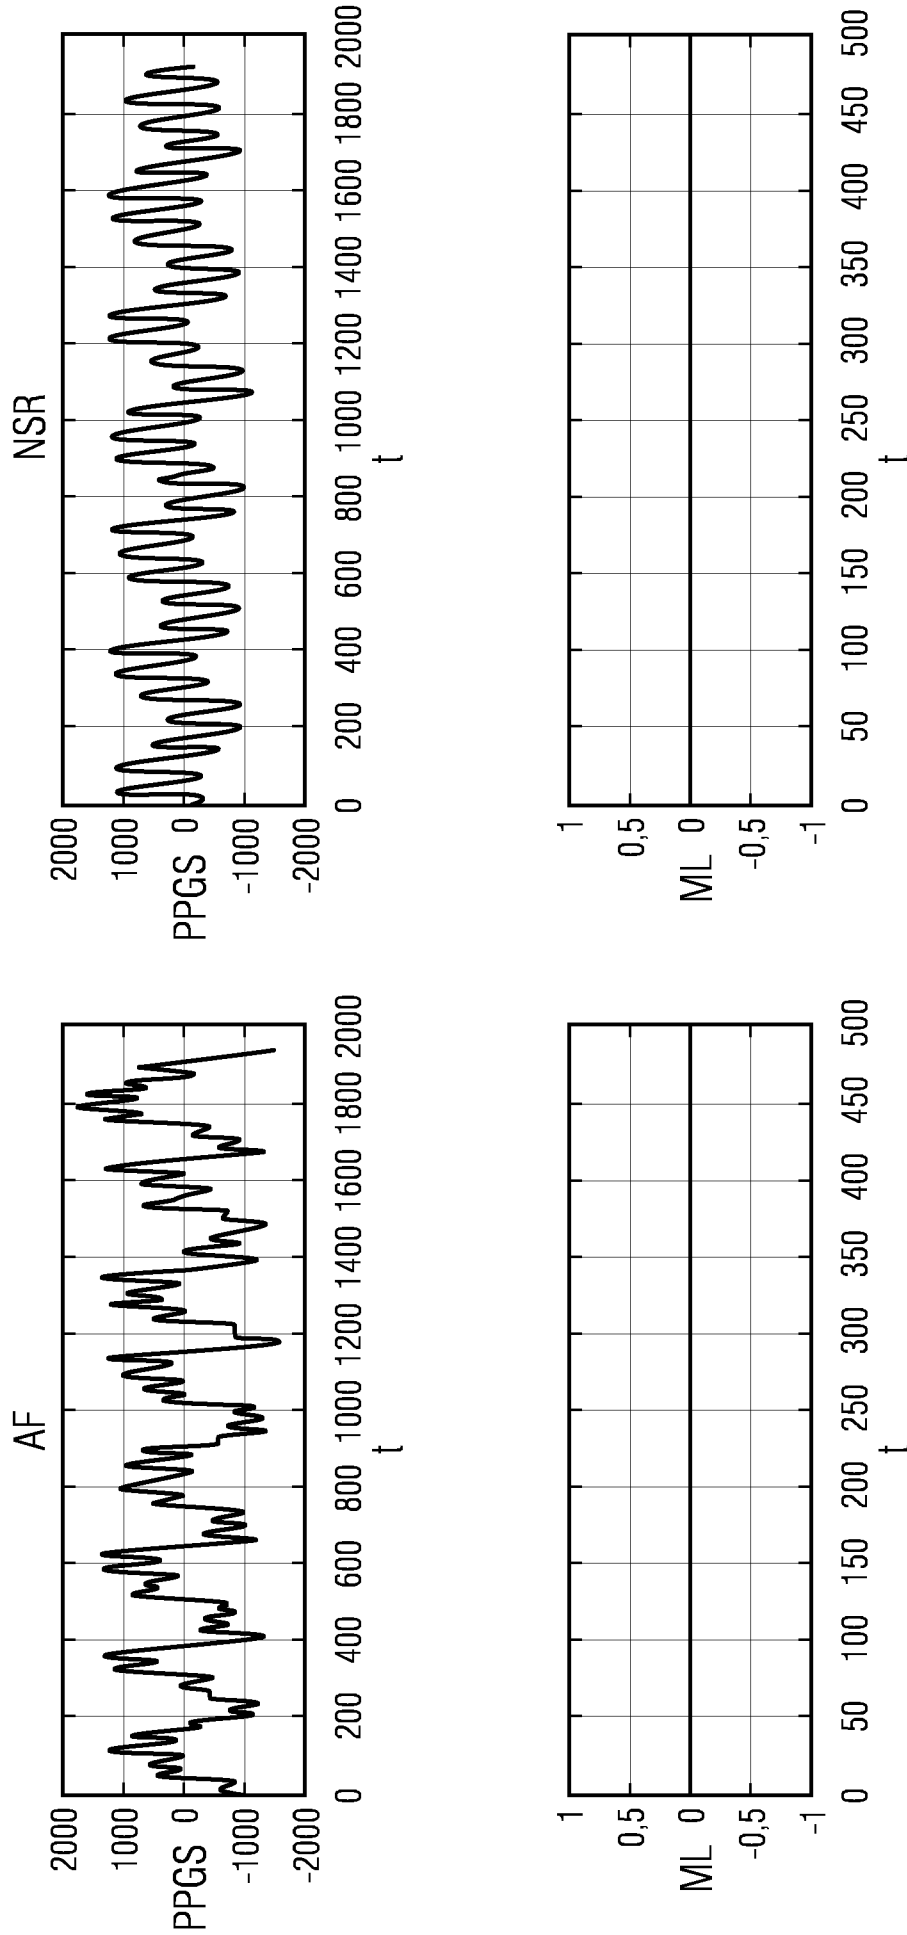


FIG. 5

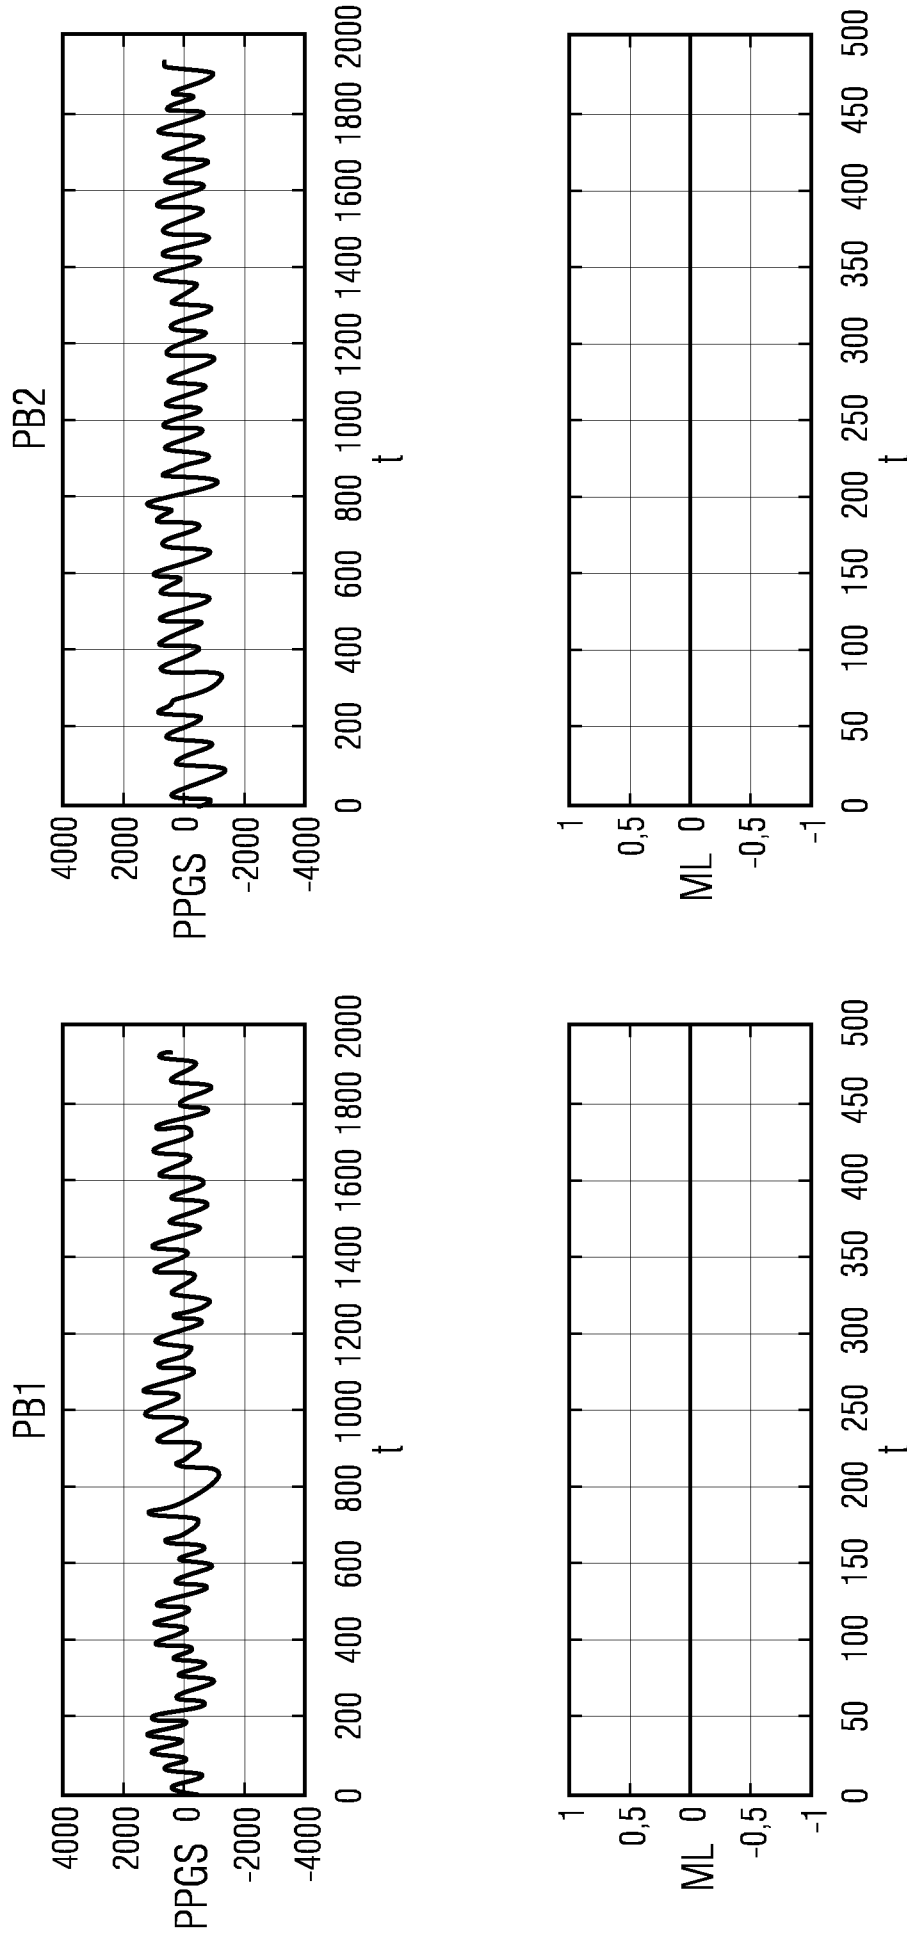


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/080137

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61B5/00 A61B5/024
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 9 179 849 B1 (BRADY DONALD [US] ET AL) 10 November 2015 (2015-11-10) column 2, line 37 - line 67 column 6, line 30 - line 67 column 7, line 40 - line 57 -----	1-7
A	US 2015/223705 A1 (SADHU RAJENDRA PADMA [US]) 13 August 2015 (2015-08-13) the whole document -----	1-7
A	WO 2016/003269 A1 (SCINT B V [NL]) 7 January 2016 (2016-01-07) abstract page 8, line 11 - line 16 page 9, line 4 - line 5 page 18, line 28 - page 19, line 5 page 32, line 6 - line 17 -----	1-7

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 24 January 2018	Date of mailing of the international search report 01/02/2018
---	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Van Dop, Erik
--	--

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2017/080137

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 9179849	B1	10-11-2015	US 9179849 B1 10-11-2015
			US 9314174 B1 19-04-2016
			US 9629562 B1 25-04-2017

US 2015223705	A1	13-08-2015	NONE

WO 2016003269	A1	07-01-2016	EP 3160337 A1 03-05-2017
			US 2017172476 A1 22-06-2017
			WO 2016003269 A1 07-01-2016

专利名称(译)	监视用户的心脏活动的方法和系统		
公开(公告)号	EP3547901A1	公开(公告)日	2019-10-09
申请号	EP2017804869	申请日	2017-11-23
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦N.V.		
当前申请(专利权)人(译)	皇家飞利浦N.V.		
[标]发明人	BONOMI ALBERTO GIOVANNI		
发明人	BONOMI, ALBERTO, GIOVANNI		
IPC分类号	A61B5/00 A61B5/024		
CPC分类号	A61B5/0004 A61B5/02416 A61B5/4836 A61B5/681 A61B5/721 A61B5/7282 A61B5/7465 G16H80/00		
优先权	2016201124 2016-11-29 EP		
外部链接	Espacenet		

摘要(译)

提供了监测用户的心脏活动的方法。心跳时间数据由用户 (1) 佩戴的健康传感器 (100) 中的PPG传感器 (110) 检测。运动数据由健康传感器 (100) 中的运动传感器 (120) 检测。分析包括心跳时间数据的PPG传感器 (110) 的输出数据以检测心律失常周期。检测到的心跳时间数据, 检测到的运动数据和检测到的心律失常被转发到可存储数据的外部设备。包括心跳时间数据, 检测到的运动数据和检测到的心律失常周期的PPG传感器 (110) 的输出数据被显示, 使得医学专业人员 (2) 可以分析该数据以确定可疑的心律失常周期是否有效。