

(19)



(11)

EP 1 685 535 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
30.04.2014 Bulletin 2014/18

(51) Int Cl.:
G06T 7/00 (2006.01) G06T 3/40 (2006.01)
A61B 5/00 (2006.01) A61B 6/00 (2006.01)
A61B 6/12 (2006.01)

(21) Application number: **04744779.2**

(86) International application number:
PCT/IB2004/051446

(22) Date of filing: **11.08.2004**

(87) International publication number:
WO 2005/020147 (03.03.2005 Gazette 2005/09)

(54) DEVICE AND METHOD FOR COMBINING TWO IMAGES

EINRICHTUNG UND VERFAHREN ZUM KOMBINIEREN ZWEIER BILDER
DISPOSITIF ET PROCEDURE PERMETTANT DE FONDRE DEUX IMAGES

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

- **STEGEUIS, Herman,**
Philips Int. Prop. & St. GmbH
52066 Aachen (DE)
- **GIJSBERS, Geert,**
Philips Int. Prop & Stand. GmbH
52066 Aachen (DE)

(30) Priority: **21.08.2003 EP 03102615**

(43) Date of publication of application:
02.08.2006 Bulletin 2006/31

(74) Representative: **Verweij, Petronella Danielle et al**
Philips Intellectual Property & Standards
P.O. Box 220
5600 AE Eindhoven (NL)

(73) Proprietors:
• **Philips Intellectual Property & Standards GmbH**
20099 Hamburg (DE)
Designated Contracting States:
DE
• **Koninklijke Philips N.V.**
5656 AE Eindhoven (NL)
Designated Contracting States:
AT BE BG CH CY CZ DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(56) References cited:
WO-A-01/20552 WO-A-02/41780

(72) Inventors:
• **ECK, Kai,**
Philips Int. Property & Standards GmbH
52066 Aachen (DE)
• **BREDNO, Jörg,**
Philips Int. Prop. & Standards GmbH
52066 Aachen (DE)
• **DESMEDT, Paul A. C.,**
Philips I. P. & Stand. GmbH
52066 Aachen (DE)
• **RONGEN, Peter M. J.,**
Philips Int. Prop. & S. GmbH
52066 Aachen (DE)

- **NETSCH T ET AL: "Towards real-time multi-modality 3-D medical image registration" PROCEEDINGS EIGHTH IEEE INTERNATIONAL CONFERENCE ON COMPUTER VISION. ICCV 2001 IEEE COMPUT. SOC LOS ALAMITOS, CA, USA, vol. 1, 7 July 2001 (2001-07-07), pages 718-725, XP010554053**
- **BENTOUTOU Y ET AL: "An invariant approach for image registration in digital subtraction angiography" PATTERN RECOGNITION, ELSEVIER, KIDLINGTON, GB, vol. 35, no. 12, December 2002 (2002-12), pages 2853-2865, XP004379654 ISSN: 0031-3203**

EP 1 685 535 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

- **KERRIEN E ET AL: "FULLY AUTOMATIC 3D/2D SUBTRACTED ANGIOGRAPHY REGISTRATION" MEDICAL IMAGE COMPUTING AND COMPUTER-ASSISTED INTERVENTION. MICCAI. INTERNATIONAL CONFERENCE. PROCEEDINGS, XX, XX, 21 March 1999 (1999-03-21), pages 664-671, XP008010055**
- **MAINTZ J B A ET AL: "A SURVEY OF MEDICAL IMAGE REGISTRATION" MEDICAL IMAGE ANALYSIS, OXFORD UNIVERSITY PRESS, OXFORD, GB, vol. 2, no. 1, 1998, pages 1-37, XP001032679 ISSN: 1361-8423**

Description

[0001] The invention relates to a device and to a method for combining a current image of an object and a map image of the dwell region of the object.

[0002] The combination of a current image of an object and a map image of the object surroundings is performed, for example when navigating a catheter through the vascular system of a patient. The underlying problem will therefore be explained subsequently considering as example a cardiac catheter examination, although the present invention is not restricted to this area of application. In the case of the systems customarily used for cardiac treatment, static angiograms and fluoroscopic images currently being recorded are displayed on two different monitors side by side. Angiograms are here depictions of the vascular system, in which the vessels are displayed highlighted, for example by administering a contrast medium. In the case of these systems, it is left to the doctor carrying out treatment to relate the position of an object, such as, for example, a catheter or a guide wire, recognizable on the current picture, to the map image of the vascular system, that is, to superimpose in his mind the two monitor images displayed side by side.

[0003] In this context, a device is known from JP-A-2002-237996, in which a current fluoroscopic image and a static vascular map are superimposed on the same monitor. The difficulty with such superimpositions is that owing to an overall movement of the patient as well as his heartbeat and breathing, the position and form of organs in the current images constantly change, so that to some extent considerable geometrical and anatomical discrepancies exist between the superimposed images. To alleviate this problem, data banks containing static vascular maps from different phases of the cardiac and/or respiratory cycle can be used in order by means of an electrocardiogram (ECG) and/or the measured respiration phase to allocate a current fluoroscopic image to the static vascular map (from the same or a similar cardiac or respiratory cycle) that is the best match for it. Even when using such advanced methods, geometric discrepancies between the superimposed images still remain, which can seriously impair the optical impression and consequently the usefulness of the superimposition.

[0004] WO 01/20552 A1 relates to a method for rendering medical images in real-time. Images of a heart are acquired with a high resolution medical imaging system used to construct a dynamic high resolution 4D model. During a medical procedure, such as endocardial physiology mapping and ablation, real-time images are produced by an ultrasonic transducer inserted into the heart. The high resolution heart model is registered with the acquired real-time images and used to produce dynamic, high resolution images for display during the medical procedure. An electrical activation map which depicts the spatial distribution of heart wall electrical activation is merged with the anatomic images to facilitate cardiac ablation therapy.

[0005] "Towards real-time multi-modality 3D medical image registration", by Thomas Netsch et al., 2001, relates to the alignment of medial images. A multi-modality measure based on local cross-correlation coefficients is described.

[0006] "An invariant approach for image registration in digital subtraction angiography", by Y. Bentoutou et al., 2002, relates to the registration of digital angiographic image sequences, based on local similarity detection by means of template matching according to a combined invariance-based similarity measure and on thin-plate spline image warping.

[0007] Against this background, it is an object of the present invention to provide means for improved combined representation of a current image of an object and a map image of the dwell region of the object.

[0008] That object is achieved by a device having the features of claims 1 and 12 and by a method having the features of claim 13. Advantageous embodiments are contained in the subsidiary claims.

[0009] The device according to the invention is used for combination (e.g. combined display) of an image of an object and a map image of the (especially form-changing) dwell region of the object. The first-mentioned image is referred to hereinafter as the "current image", without a restriction being associated with this in relation to specific periods of time. Neither are there any fundamental restrictions in respect of the dimensions of the current image and the map image (1D, 2D, 3D, 4D,). The object can in general be any object or region to be displayed for the purpose of a "motive". For example, the "object" can be an anatomical structure of interest (organ, bone, tumor etc.), a functionally defined region (e.g. an area with specific activity of metabolism or blood vessel formation), a catheter tip or a guide wire in the vascular system of a patient, or a capsule located in the gastrointestinal tract. The last-mentioned examples pertain to an especially important situation in which the object is located in a path network and is able to move only along the paths allowed by this. In these cases, the map image preferably portrays the path network in highlighted form. For example, the map image can be an angiogram that has been prepared from the vascular system of a patient to whom contrast medium has been administered. The term "map image" is incidentally, however, to be understood quite generally as any collection of information that is or can be assigned to locations in the dwell region of the object. Mathematically, a map image can typically generally be described by a single-valued or multiple-valued function across a one-dimensional or higher-dimensional definition range.

[0010] The device contains a data-processing system, which is designed to perform the following steps:

- a) To estimate the position of the object of interest in relation to the map image. This means that in the current image the position of the object is established and the position corresponding thereto in the map

image is estimated. If the position and form of the dwell region of the object on the current image and on the map image were the same, then it would be possible to determine the corresponding position exactly. In reality, however, the dwell region changes its form and position in an unknown manner, so that the corresponding position has to be estimated. At the same time, it can optionally be considered corrective that the object must inevitably be located in a path network, if this condition applies in the case of the underlying application.

b) The map image is combined with the current image in such a way that the estimated position of the object in the map image coincides with the actual position of the object in the current image; for the combination, only a section of the map image and/or a section of the current image are/is used. The "combination" of the map image and the current image can include in particular an additive superimposition of the images, or alternatively a subtraction, a contour emphasis or any other operation for combining the image contents. In the following, the case in which only a section of the map image is used will be taken as a representative basis (the relevant remarks shall apply correspondingly also to the use of a section of the current image). As a rule, the entire current image is then used in the combination. Limitation to a sub-region of the current image is also possible, however, wherein in that case the sizes of the map image section and sub-region will preferably correspond.

[0011] With the device described it is possible to combine a "current" image of an object with a static map image of the dwell region thereof without disruptive global discrepancies between the two images occurring. This is achieved in that from the map image (or the current image) only a section around the object of interest is used for the combination. Such a - comparatively small - section can be allocated with great accuracy and geometrically correctly to the actual position of the object, since during the image registration the coincidence between current image and map image does not have to be oriented to a global (mean) dimension. Using the device, in particular also a satisfactory, geometrically correct superimposition is therefore possible in the case of path networks, such as the vascular system of a patient for example, which have an inherent deformability that can be described only with difficulty or only with unsatisfactory accuracy by mathematical transformations. Restriction of the combination to a local section can advantageously be used irrespective of the specifically used method of image registration (rigid, non-rigid, unimodal, multimodal etc.) and in many cases allows the use of new or known algorithms that were not suitable for a global registration. A further advantage of the restriction lies in the fact that as a rule the image registration is clearly less costly as regards its time and memory requirement.

[0012] In an optional embodiment of the invention, the map image can contain additional information about structures and/or functions of the dwell region of the object. For example, it can reproduce the (assumed) position of organs, the intensity of blood vessel formation and/or the metabolic activity in the dwell region of the object. In that respect there is a virtually unlimited number of applications in which the "multimodal" registration of information from different sources is desired and helpful for the user. The combination of CT pictures of part of the skeleton with NMR (magnetic resonance) pictures of the tissue in the associated region of the bones and the joints can be mentioned as representative of this. According to the proposed method, in this case a section of a NMR image can be brought locally into register with a CT image or conversely a section of a CT image can be brought into register with a NMR image. The object forming the basis of the registration can in this case be, for example a swelling of the tissue that is on the one hand a typical indication of a fracture, but on the other hand does not show up on X-ray images. In the case of those fractures that cannot readily be identified on an X-ray image, using the proposed method the site of the swelling observable on the NMR image can be localized on the X-ray image and the region that is to be examined with greatest attention for a fracture can be indicated on the X-ray image.

[0013] The device can in particular contain a monitor linked to the data-processing arrangement, on which the combination of the current image and the map image (or the corresponding sections) is displayed. In the context of a catheter investigation, for example, a doctor can then observe on the monitor fluoroscopic live images of the catheter, which at the same time show him the vascular structure around the catheter as a section of a vascular map.

[0014] According to a further aspect of the device, this contains a memory for storing a number of map images, the map images being categorized according to a varying state of the dwell region of the object. In this instance it is possible to select from among the several map images an optimum map image for the combination to be effected.

[0015] The device contains furthermore preferably a sensor device for detecting at least one parameter that describes a varying state of the dwell region of the object. In particular, the sensor device can be designed to detect an electrocardiogram and/or the respiratory cycle of a patient undergoing examination. Such a sensor device can be used in conjunction with the above-mentioned memory for a number of map images, in order on the one hand to categorize the stored map images according to the associated state of the path network and in order on the other hand to determine the state of the dwell region pertaining to the current image.

[0016] In conjunction with the above-mentioned embodiment of the device containing a memory, the data-processing system can furthermore be arranged to select

from the memory of the device those map images of which the "index" or associated state of the dwell region of the object is the best match for the state of the said dwell region that existed as the current image was being taken. If, for example, the memory contains several map images of the vascular system of a patient at different phases of the cardiac cycle, one can select from these the one that comes from the same phase of the cardiac cycle as the current image. In this manner it is possible to take into account parameterizable and especially cyclical spontaneous movements of the path network and from the outset to combine the current image only with a map image that is the best possible match.

[0017] There are various options for estimating the correspondent position of the object in a map image within the framework of an image registration of current image and map image. In particular, with the existence of a spatially-defined structure, such as an organ or a path network, for example, the data-processing system can be arranged to assign to each pixel in a map image a probability that it will belong to the structure (e.g. to the path network). In many cases of application, it is in fact impossible to distinguish reliably between pixels that belong to a structure and those that do not belong to it. In such cases, when using the map image a probability-based segmentation allows the highest possible probability for the accuracy of the result to be sought and the reliability of the result to be quantified.

[0018] Furthermore, the data-processing system can be arranged to produce a distance image from the map image by a distance transformation. A distance transformation is an operation known from digital image-processing (cf. Jähne, Digital Bildverarbeitung, 5th edition, Chapter 18, Springer Verlag Berlin Heidelberg, 2002). Here, a pixel of the distance image can in particular contain information about in which direction and/or at what spacing from that point there is a greater probability for the existence of a specific segmentation object. The distance image is therefore well suited for estimating the position of an object relative to the map image. For example, a roughly estimated starting position of a catheter on the map image can be converted by means of the distance information into a position of the catheter that lies with greater probability in the vascular system (path network). Distance images can advantageously be calculated in advance from the existing map images, so that they are ready and available during the processing of a current image. This allows an error-tolerant estimation of the position of the object in real time. Superimposition of map image and current image can therefore be carried out so quickly and so accurately that it represents real assistance for the eye-hand co-ordination of the doctor.

[0019] Depending on the application, the section that is used from the current image and/or the map image can be of different size and of different form. In particular, it can be rectangular or oval. Typically, the size (area, volume) of the section amounts to about 5% to 50%, preferably about 10% to 30%, of the size of the map image

or current image. According to an optional embodiment of the device, the section contains only the separate representation of a spatially-defined structure, such as a path network for example. All points that do not lie on the structure are then transparent in the section. In that way, the section accentuates only the said structure around the object of interest, without concealing other image information of the current image.

[0020] The device can contain in particular an imaging means, such as an X-ray apparatus, for example, and/or an NMR apparatus, with which the current image of the object can be produced. Furthermore, the imaging means can be used to produce the map images of the dwell region of the object as well. Such a device is especially suitable for navigating a catheter in the case of surgical treatment. The device can in particular contain more than one imaging means, for example, an X-ray apparatus and an NMR apparatus, so that the current image and the map image(s) can originate from different modalities.

[0021] The invention relates furthermore to a device and to a method for combined portrayal of a current image of an object that is located in a path network and a map image of the path network. The device contains a data-processing system that is arranged to execute the said method, the method comprising the following steps:

- a) in the map image, to assign to each pixel a probability that it belongs to the path network;
- b) to produce a distance image from the map image by a distance transformation;
- c) by means of the distance image to estimate the position of the object in relation to the map image of the path network, and
- d) to superimpose the map image wholly or partially on the current image or a section thereof so that the estimated position of the object in the map image is brought into register with the actual position of the object in the current image.

[0022] When in step d) only a section of the map image and/or of the current image are/is used, the device corresponds to a variant of the above-defined device as claimed in claim 1. For a more detailed explanation, the reader can therefore be referred largely to the above description. According to an independent aspect of the invention, the above-defined device nevertheless also includes the case in which a different section of the map image or the entire map image is superimposed on the current image. The advantage of the device in this regard lies in enabling an error-tolerant superimposition in real time with a probability-based segmentation and a distance imaging, which significantly increases the value of the superimposition, for example, within the scope of a monitor display.

[0023] Finally, the invention also relates to a method for combining a current image of an object and a map image of the dwell region of the object. The method here

contains the following steps:

- a) estimation of the position of the object in relation to the map image,
- b) combination of the map image around the estimated position of the object with the current image, the estimated position of the object in the map image being brought into register with the actual position of the object in the current image, and only a section of the map image and/or of the current image being used.

[0024] The method implements in general form the steps that can be performed with a device of the kind described above. As regards the definition of terms, advantages and further aspects of the method, the reader is therefore referred to the above description of the device.

[0025] These and other aspects of the invention are apparent from and will be elucidated, by way of non-limitative example, with reference to the embodiments described hereinafter.

[0026] The single Figure shows schematically the components of a device according to the invention for superimposed representation of two images.

[0027] In the case of the medical application illustrated in the Figure as a representative example, the movement of a catheter 2 or more precisely of the catheter tip and/or a guide wire 8 in the vascular system 9 of a patient 1 is to be observed. For that purpose, fluoroscopic X-rays images of the body volume being examined are produced with an X-ray apparatus 4, and are transferred as current images A to a data-processing system 5. The difficulty with such fluoroscopic images is that the vascular system 9 stands out only faintly thereon, so that with this system reliable navigation of the catheter or a guide wire to a specific location within the vascular system is hardly possible. A better portrayal of the vascular system could, admittedly, be achieved by injection of a contrast medium, but such measures must be used as sparingly as possible, owing to the stress associated therewith for the patient.

[0028] To improve catheter navigation, in the case of the system illustrated several angiograms B are prepared with the X-ray apparatus 4 before or during the actual catheter examination 4 and are stored in a memory 6 of the data-processing system 5. The angiograms can be produced, for example, by injections of contrast medium, so that the vascular tree of the patient can easily be seen on them. They are therefore hereinafter referred to also as "map images or "vascular maps" (road maps).

[0029] Since the heartbeat has significant effects on the position and form of the vascular system of the heart and the adjoining organs, map images B from different phases of the cardiac cycle of the patient 1 are archived in the memory. The cardiac phase belonging to a particular map image B is here indicated by an electrocardiogram, which is recorded by an electrocardiograph 3 in

parallel with the X-ray images. Furthermore, map images can be prepared also at different phases of the respiratory cycle, which is detected by a respiration sensor such as a chest belt or similar. For the sake of clarity, such an additional or alternative indication of the map images B by way of the respiratory cycle is not specifically shown in the Figure.

[0030] During the catheter examination carried out for therapeutic or diagnostic purposes, fluoroscopic images A of the catheter tip or a guide wire 8 are continuously produced and passed together with the associated ECG to the data-processing system 5. The phase of the electrocardiogram or of the cardiac cycle pertaining to a current image A is then established by the data-processing system 5, and the map image B that matches this cardiac phase best is selected from the memory 6.

[0031] The current image A and the map image B can in principle be displayed side by side on two different monitors or superimposed on one another on the same monitor. Since the map image B to the matching cardiac phase was selected, the geometrical or anatomical correspondence between the images A, B thus superimposed would already be a comparatively good one. Nevertheless, because of parallax in the image production, because of soft tissue movement and as a result of similar influences, in practice slight discrepancies always appear between the superimposed aggregate images, and cannot be eliminated by global transformations. These discrepancies can be visually very disruptive and considerably diminish the use of the superimposition.

[0032] To avoid the above-described problems in the complete superimposition of a current image A and a map image B, it is proposed in the combined portrayal C to use just one more or less small section 7 of the map image B for the superimposition, which just covers the region of interest around the catheter tip or the guide wire 8. Typically, the area of the section 7 amounts to about 25% of the area of the map image B. In such a limited region, the positioning or registering of the section 7 can be carried out with greater accuracy than with a global registering of two images A, B. Moreover, all bothersome inconsistencies between the two superimposed images outside the region 7 are omitted. In the superimposed portrayal C, the current image A therefore remains largely unchanged, whilst in the overlap region 7 even relatively small shifts, which are created, for example, by parallax or patient movements, can be compensated for with good accuracy.

[0033] The preceding and following remarks naturally apply analogously also in the case of an equivalent embodiment of the method, in which a section of the current image A is superimposed on a map image B (or a part thereof).

[0034] In a preferred algorithm for superimposing a section 7 of the map image B on a current image A, in the map images B the vascular tree is roughly pre-segmented. Segmentation in image processing is understood to mean the assignment of pixels to objects. Since

in the case of real X-ray images of the vascular system it is not normally possible to assign a pixel reliably to a vessel, a probability-based segmentation is preferably effected here. In this, each pixel is assigned a value that describes the probability that the pixel belongs to a vessel. Furthermore, for each such map image a distance image D is produced by means of a distance transformation. The value of a pixel of the distance image indicates in what direction from or at what distance from the point under consideration there is a greater probability of the presence of a vessel. The probability-based map image B can be rendered visible, for example, by a height relief across an image area, in which the highest points of the relief have the greatest probability of belonging to the vascular system. The associated distance image can then be defined as the gradient field of the relief, wherein each gradient vector points in the direction of the most direct route to a vessel. The calculation of the probability-based map images B and the associated distance images D can advantageously be effected off-line or in advance, the results being held in the memory 6. During the medical examination, these calculations therefore do not impede implementation of the method.

[0035] After selecting from the memory 6 the map image B that best matches the current image A, the distance image D pertaining to this map image B is used to estimate the position of the object of interest (catheter or guide wire) on the map image B. For that purpose, first of all, the (radio-opaque) object in the current image A is segmented. The map image B is then brought into register with the segmented object using the distances of all object pixels out of the distance image D. At the same time, only a rigid displacement (shift and/or rotation) of the segmented object relative to the map image B is permitted.

[0036] As a result of the described registration, the best possible estimated position of the catheter or the guide wire 8 relative to the map image B is known. Using this information, depending on the application, a section 7 from the map image B can then be fixed around the estimated position of the object. On a monitor 10, this section 7 is finally superimposed on the current image A in a combination image C, the estimated position of the object in section 7 being brought into register with the actual position of the object (e.g. the guide wire 8) on the current image A. The geometrical discrepancy between the superimposed structures is extremely small in the combination image C.

[0037] The form of the section 7 can in principle be selected as desired. Apart from the elliptical form illustrated in the Figure, alternatively a rectangular form or any desired different form could be selected. Moreover, the section 7 could contain merely the vessel itself, and otherwise be transparent. Furthermore, a digital contrast enhancement is preferably carried out within the region 7, in order to improve the recognizability of the guide wire 8.

Claims

1. A device for combining a current image (A) of an object (8) and a map image (B) of the dwell region (9) of the object (8),
characterized in that
the device is containing a data-processing system (5) that is arranged
 - a) to estimate the position of the object (8) in relation to the map image (B), and
 - b) to combine the map image (B) around the estimated position of the object (8) with the current image (A), the estimated position of the object in the map image (B) being brought into register with the actual position of the object in the current image (A), and only a section (7) of the map image (B) and/or of the current image (A) being used.
2. A device as claimed in claim 1, **characterized in that** the object (8) is located in a path network (9) and the map image (B) at least partially reproduces the path network (9).
3. A device as claimed in claim 1, **characterized in that** the map image (B) contains additional information about the structures and/or functions of the dwell region (9) of the object (8).
4. A device as claimed in claim 1, **characterized in that** it contains a monitor (10) for displaying the combination of the current image (A) and the section (7) of the map image (B).
5. A device as claimed in claim 1, **characterized in that** it has a memory (6) for storing a number of map images (B), which are being categorized according to a varying state of the dwell region (9) of the object (8).
6. A device as claimed in claim 1, **characterized in that** it has a sensor device (3) for detecting at least one parameter that describes a varying state of the dwell region of the object (8), preferably for detecting an electrocardiogram and/or the respiratory cycle.
7. A device as claimed in claim 5, **characterized in that** the data-processing system (5) is arranged to select from the memory (6) a map image (B) whose associated state of the dwell region (9) of the object (8) is a best possible match for the state of the dwell region during the current image (A).
8. A device as claimed in claim 1, **characterized in that** the data-processing system (5) is arranged to assign in the map image (B) to each pixel a probability that it belongs to a spatially-defined structure,

such as a path network (9) for example.

9. A device as claimed in claim 1, **characterized in that** the data-processing system (5) is arranged to produce a distance image (D) from the map image (B) by a distance transformation. 5
10. A device as claimed in claim 1, **characterized in that**, in the section (7), points not belonging to a spatially-defined structure, such as a path network (9) for example, are transparent. 10
11. A device as claimed in claim 1, **characterized in that** it has an imaging means, especially an X-ray apparatus (4) and/or an NMR apparatus, for producing the current image (A) and optionally the map image (B). 15
12. A device for combined portrayal of a current image (A) of an object (8) that is located in a path network (9) and a map image (B) of the path network (9), **characterized in that** the device is containing a data-processing system (5) that is arranged 20
- a) in the map image (B) to assign to each pixel a probability that it belongs to the path network (9);
- b) to produce a distance image (D) from the map image (B) by a distance transformation;
- c) by means of the distance image (D) to estimate the position of the object (8) in relation to the map image (B) of the path network (9), and
- d) to superimpose the map image (B) wholly or in sections on the current image (A) or a section thereof so that the estimated position of the object in the map image (B) is brought into register with the actual position of the object in the current image (A). 25
13. A method for combining a current image (A) of an object (8) and a map image (B) of the dwell region of the object, **characterized in that** the method is containing the following steps: 30
- a) estimation of the position of the object (8) in relation to the map image (B);
- b) combination of the map image (B) around the estimated position of the object with the current image (A), the estimated position of the object in the map image (B) being brought into register with the actual position of the object in the current image, and only a section (7) of the map image (B) and/or of the current image (A) being used. 35

Patentansprüche

1. Vorrichtung zum Kombinieren eines aktuellen Bildes (A) eines Objekts (8) und eines Kartenbilds (B) der Verweilregion (9) des Objekts (8), **dadurch gekennzeichnet, dass** die Vorrichtung einen Datenprozessor (5) umfasst, der ausgelegt ist 5
- a) für die Schätzung der Position des Objekts (8) in Bezug auf das Kartenbild (B) und
- b) für die Kombination des Kartenbilds (B) um die geschätzte Position des Objekts (8) herum mit dem aktuellen Bild (A), wobei die geschätzte Position des Objekts in dem Kartenbild (B) mit der tatsächlichen Position des Objekts in dem aktuellen Bild (A) registriert wird und nur ein Abschnitt (7) des Kartenbilds (B) und/oder des aktuellen Bildes (A) verwendet wird. 10
2. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** sich das Objekt (8) in einem Wegenetz (9) befindet und das Kartenbild (B) zumindest teilweise das Wegenetz (9) abbildet. 15
3. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** das Kartenbild (B) zusätzliche Informationen über die Strukturen und/oder Funktionen der Verweilregion (9) des Objekts (8) enthält. 20
4. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** sie einen Monitor (10) zur Anzeige der Kombination des aktuellen Bildes (A) und des Abschnitts (7) des Kartenbildes (B) umfasst. 25
5. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** sie einen Speicher (6) zur Speicherung einer Anzahl von Kartenbildern (B) aufweist, die gemäß einem sich verändernden Zustand der Verweilregion (9) des Objekts (8) kategorisiert sind. 30
6. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** sie einen Sensor (3) zur Erkennung zumindest eines Parameters aufweist, der einen sich verändernden Zustand der Verweilregion des Objekts (8) beschreibt, vorzugsweise zur Erkennung eines Elektrokardiogramms und/oder des Atemzyklus. 35
7. Vorrichtung nach Anspruch 5, **dadurch gekennzeichnet, dass** der Datenprozessor (5) so ausgelegt ist, dass er aus dem Speicher (6) ein Kartenbild (B) auswählt, dessen zugehöriger Zustand der Verweilregion (9) des Objekts (8) die bestmögliche Übereinstimmung mit dem Zustand der Verweilregion während des aktuellen Bildes (A) darstellt. 40
8. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet,** 45

zeichnet, dass der Datenprozessor (5) für die Zuordnung einer Wahrscheinlichkeit zu jedem Pixel in dem Kartenbild (B) ausgelegt ist, dass es zu einer räumlich festgelegten Struktur, wie beispielsweise einem Wegenetz (9), gehört.

9. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der Datenprozessor (5) für die Erzeugung eines Distanzbildes (D) durch eine Distanztransformation ausgehend von dem Kartenbild (B) ausgelegt ist.

10. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** in dem Abschnitt (7) Punkte, die nicht zu einer räumlich festgelegten Struktur, wie beispielsweise einem Wegenetz (9), gehören, transparent sind.

11. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** sie Abbildungsmittel, im Besonderen ein Röntgengerät (4) und/oder ein Kernspinresonanzgerät, zur Erzeugung des aktuellen Bildes (A) und optional des Kartenbildes (B) aufweist.

12. Vorrichtung zur kombinierten Darstellung eines aktuellen Bildes (A) eines Objekts (8), das sich in einem Wegenetz (9) befindet, und eines Kartenbildes (B) des Wegenetzes (9), **dadurch gekennzeichnet, dass** die Vorrichtung einen Datenprozessor (5) umfasst, der ausgelegt ist

- a) für die Zuordnung einer Wahrscheinlichkeit zu jedem Pixel in dem Kartenbild (B), dass es zu dem Wegenetz (9) gehört,
- b) für die Erzeugung eines Distanzbildes (D) durch eine Distanztransformation ausgehend von dem Kartenbild (B),
- c) für die Schätzung anhand des Distanzbildes der Position des Objekts (8) in Bezug auf das Kartenbild (B) des Wegenetzes (9) und
- d) für die Überlagerung des Kartenbildes (B) im Ganzen oder in Abschnitten auf das aktuelle Bild (A) oder einen Abschnitt davon, so dass die geschätzte Position des Objekts in dem Kartenbild (B) mit der tatsächlichen Position des Objekts in dem aktuellen Bild (A) registriert wird.

13. Verfahren zur Kombination eines aktuellen Bildes (A) eines Objekts (8) und eines Kartenbildes (B) der Verweilregion des Objekts, **dadurch gekennzeichnet, dass** das Verfahren die folgenden Schritte umfasst:

- a) Schätzung der Position des Objekts (8) in Bezug auf das Kartenbild (B) und
- b) Kombination des Kartenbildes (B) um die geschätzte Position des Objekts (8) herum mit dem aktuellen Bild (A), wobei die geschätzte Position

des Objekts in dem Kartenbild (B) mit der tatsächlichen Position des Objekts in dem aktuellen Bild (A) registriert wird und nur ein Abschnitt (7) des Kartenbildes (B) und/oder des aktuellen Bildes (A) verwendet wird.

Revendications

1. Dispositif permettant de combiner une image active (A) d'un objet (8) et une image cartographique (B) de la région de séjour (9) de l'objet (8), **caractérisé en ce que** le dispositif contient un système de traitement de données (5) qui est conçu

- a) pour estimer la position de l'objet (8) par rapport à l'image cartographique (B), et
- b) pour combiner l'image cartographique (B) autour de la position estimée de l'objet (8) avec l'image active (A), la position estimée de l'objet sur l'image cartographique (B) étant alignée avec la position réelle de l'objet sur l'image active (A) et seulement une section (7) de l'image cartographique (B) et/ou de l'image active (A) étant utilisée.

2. Dispositif selon la revendication 1, **caractérisé en ce que** l'objet (8) est situé dans un réseau de voies (9) et l'image cartographique (B) reproduit au moins partiellement le réseau de voies (9).

3. Dispositif selon la revendication 1, **caractérisé en ce que** l'image cartographique (B) contient des informations supplémentaires concernant les structures et/ou les fonctions de la région de séjour (9) de l'objet (8).

4. Dispositif selon la revendication 1, **caractérisé en ce qu'il** contient un moniteur (10) servant à afficher la combinaison de l'image active (A) et de la section (7) de l'image cartographique (B).

5. Dispositif selon la revendication 1, **caractérisé en ce qu'il** comporte une mémoire (6) servant à stocker un certain nombre d'images cartographiques (B) qui sont classées en fonction d'un état variable de la région de séjour (9) de l'objet (8).

6. Dispositif selon la revendication 1, **caractérisé en ce qu'il** comporte un dispositif de détection (3) servant à détecter au moins un paramètre qui décrit un état variable de la région de séjour de l'objet (8), de préférence pour détecter un électrocardiogramme et/ou le cycle respiratoire.

7. Dispositif selon la revendication 5, **caractérisé en ce que** le système de traitement de données (5) est

conçu pour sélectionner dans la mémoire (6) une image cartographique (B) dont l'état associé de la région de séjour (9) de l'objet (8) est la meilleure correspondance possible pour l'état de la région de séjour pendant l'image active (A).

- 5
8. Dispositif selon la revendication 1, **caractérisé en ce que** le système de traitement de données (5) est conçu pour attribuer à chaque pixel de l'image cartographique (B) une probabilité qu'il appartienne à une structure spatialement définie, tel qu'un réseau de voies (9) par exemple.
- 10
9. Dispositif selon la revendication 1, **caractérisé en ce que** le système de traitement de données (5) est conçu pour produire une image de distance (D) à partir de l'image cartographique (B) par une transformation de distance.
- 15
10. Dispositif selon la revendication 1, **caractérisé en ce que**, dans la section (7), des points n'appartenant pas à une structure spatialement définie, telle qu'un réseau de voies (9) par exemple, sont transparents.
- 20
11. Dispositif selon la revendication 1, **caractérisé en ce qu'il** comporte un moyen d'imagerie, en particulier un appareil à rayons X (4) et/ou un appareil RMN, servant à produire l'image active (A) et éventuellement l'image cartographique (B).
- 25
- 30
12. Dispositif de représentation combiné d'une image active (A) d'un objet (8) qui est situé dans un réseau de voies (9) et d'une image cartographique (B) du réseau de voies (9), **caractérisé en ce que** le dispositif contient un système de traitement de données (5) qui est conçu
- 35
- a) pour attribuer à chaque pixel de l'image cartographique (B) une probabilité qu'il appartienne au réseau de voies (9) ;
- 40
- b) pour produire une image de distance (D) à partir de l'image cartographique (B) par une transformation de distance ;
- c) pour estimer, au moyen de l'image de distance (D), la position de l'objet (8) par rapport à l'image cartographique (B) du réseau de voies (9), et
- 45
- d) pour superposer l'image cartographique (B) entièrement ou en sections sur l'image active (A) ou une section de celle-ci, de façon que la position estimée de l'objet sur l'image cartographique (B) soit alignée avec la position réelle de l'objet sur l'image active (A).
- 50
13. Procédé de combinaison d'une image active (A) d'un objet (8) et d'une image cartographique (B) de la région de séjour de l'objet (8), **caractérisé en ce que** le procédé comprend les éta-
- 55

pes suivantes :

- a) l'estimation de la position de l'objet (8) par rapport à l'image cartographique (B) ;
- b) la combinaison de l'image cartographique (B) autour de la position estimée de l'objet avec l'image active (A), la position estimée de l'objet sur l'image cartographique (B) étant alignée avec la position réelle de l'objet sur l'image active et seulement une section (7) de l'image cartographique (B) et/ou de l'image active (A) étant utilisée.

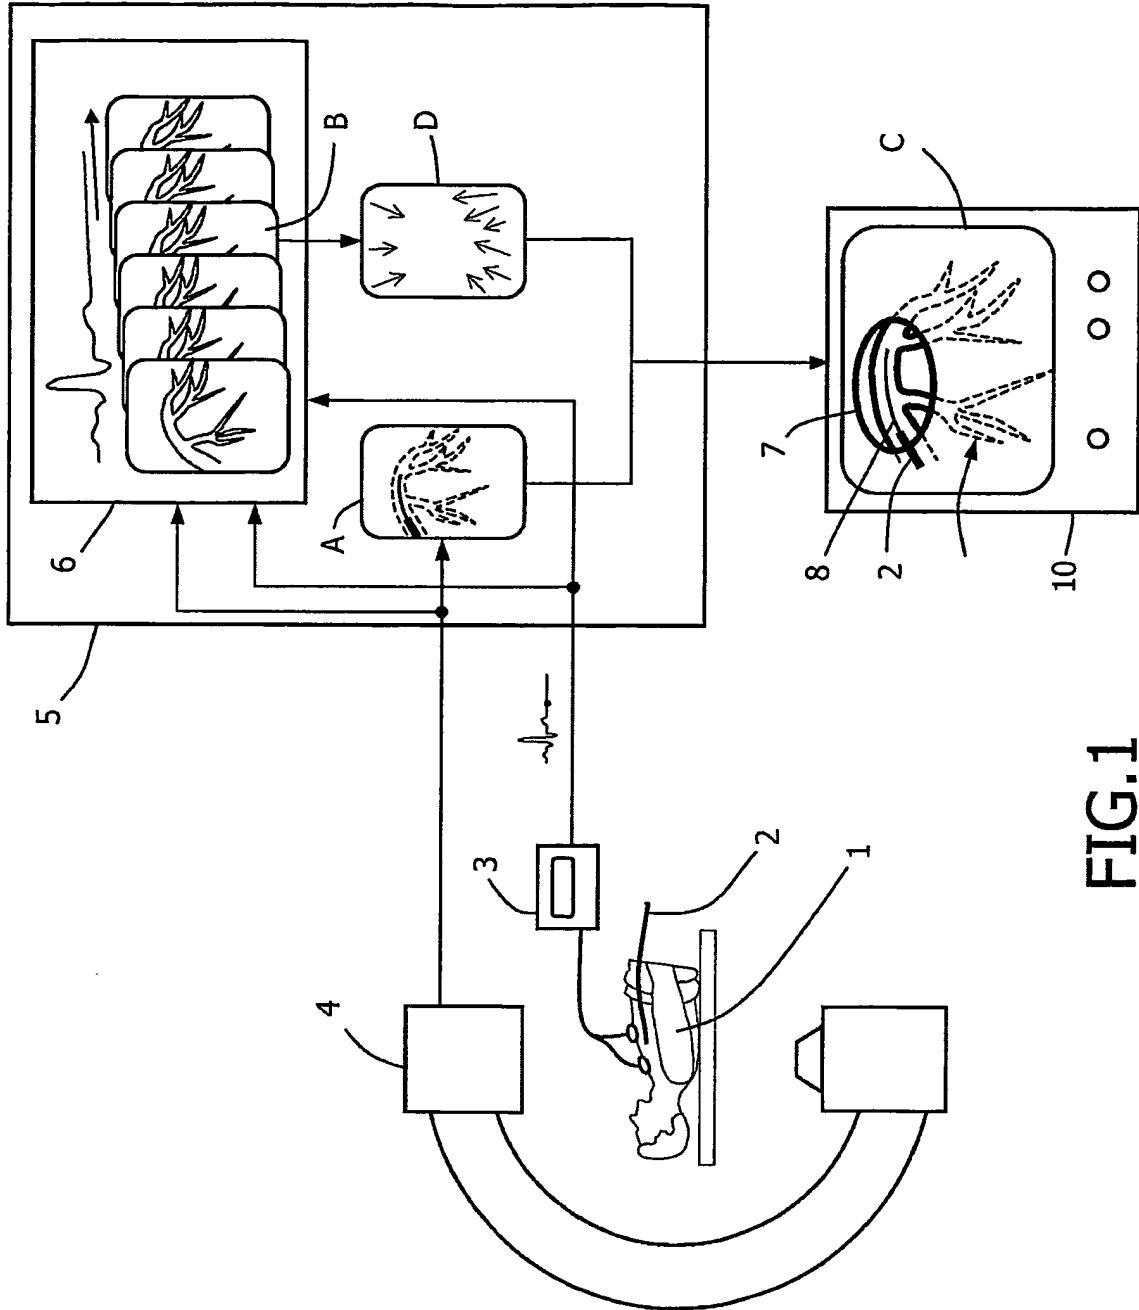


FIG.1

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2002237996 A [0003]
- WO 0120552 A1 [0004]

Non-patent literature cited in the description

- **Y. BENTOUTOU et al.** *An invariant approach for image registration in digital subtraction angiography*, 2002 [0006]
- **JÄHNE.** *Digital Bildverarbeitung*. Springer Verlag, 2002 [0018]

| | | | |
|----------------|--|---------|------------|
| 专利名称(译) | 用于组合两个图像的设备和方法 | | |
| 公开(公告)号 | EP1685535B1 | 公开(公告)日 | 2014-04-30 |
| 申请号 | EP2004744779 | 申请日 | 2004-08-11 |
| [标]申请(专利权)人(译) | 皇家飞利浦电子股份有限公司 | | |
| 申请(专利权)人(译) | 飞利浦知识产权及标准部GMBH 皇家飞利浦电子N.V. | | |
| 当前申请(专利权)人(译) | 飞利浦知识产权及标准部GMBH 皇家飞利浦N.V. | | |
| [标]发明人 | ECK KAI PHILIPS INT PROPERTY & STANDARDS GMBH BREDNO JORG PHILIPS INT PROP & STANDARDS GMBH DESMEDT PAUL A C PHILIPS I P & STAND GMBH RONGEN PETER M J PHILIPS INT PROP & S GMBH STEGEHUIS HERMAN PHILIPS INT PROP & ST GMBH GIJSBERS GEERT PHILIPS INT PROP & STAND GMBH | | |
| 发明人 | ECK, KAI, PHILIPS INT. PROPERTY & STANDARDS GMBH BREDNO, JÖRG, PHILIPS INT. PROP. & STANDARDS GMBH DESMEDT, PAUL A. C., PHILIPS I. P. & STAND. GMBH RONGEN, PETER M. J., PHILIPS INT. PROP. & S. GMBH STEGEHUIS, HERMAN, PHILIPS INT. PROP. & ST. GMBH GIJSBERS, GEERT, PHILIPS INT. PROP & STAND. GMBH | | |
| IPC分类号 | G06T7/00 G06T3/40 A61B5/00 A61B6/00 A61B6/12 G06T3/00 | | |
| CPC分类号 | G06T3/4053 A61B5/7289 A61B6/12 A61B6/481 A61B6/504 A61B6/5235 A61B6/5247 G06T7/30 G06T2207/10116 G06T2207/30101 | | |
| 代理机构(译) | VERWEIJ, PETRONELLA DANIELLE | | |
| 优先权 | 2003102615 2003-08-21 EP | | |
| 其他公开文献 | EP1685535A1 | | |
| 外部链接 | Espacenet | | |

摘要(译)

本发明涉及一种用于组合两个图像的装置和方法，特别是用于叠加静态血管图 (B)，其在心动周期和/或呼吸周期的不同阶段拍摄并且存档在存储器中 (6)，在血管系统 (9) 中的导管 (2,8) 的当前图像 (A) 上。在该方法中，选择围绕估计的导管实际位置的地图图像 (B) 的限定部分，并将其叠加显示在监视器 (10) 上的图像 (C) 中的当前图像 (A) 上。用于此的地图图像 (B) 优选地通过心电图选择以匹配特定的心动周期。可以使用距离图像 (D) 来估计导管相对于地图图像 (B) 的位置。

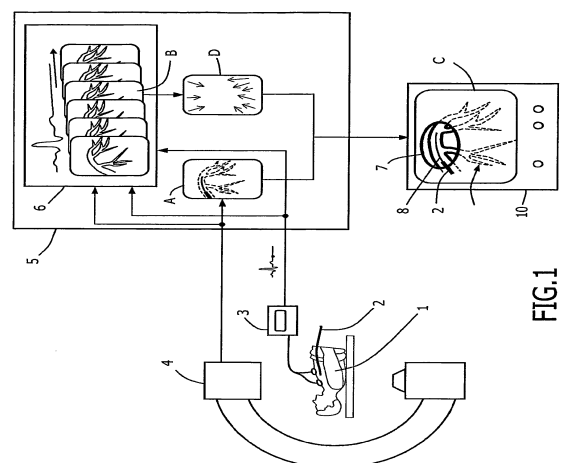


FIG.1