

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 March 2005 (03.03.2005)

PCT

(10) International Publication Number
WO 2005/020147 A1

(51) International Patent Classification⁷: **G06T 7/00**

(21) International Application Number:
PCT/IB2004/051446

(22) International Filing Date: 11 August 2004 (11.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03102615.6 21 August 2003 (21.08.2003) EP

(71) Applicant (for DE only): **PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-
damm 94, 20099 Hamburg (DE).

(71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CY, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG,

UZ, VC, VN, YU, ZA, ZM, ZW only): **KONINKLIJKE PHILIPS ELECTRONICS N. V.** [NL/NL]; Groenewoud-
seweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **ECK, Kai** [AT/DE]; c/o Philips Intellectual Property &, Standards GmbH Weissshausstr. 2, 52066 Aachen (DE). **BREDNO, Jörg** [DE/DE]; c/o Philips Intellectual Property &, Standards GmbH Weissshausstr. 2, 52066 Aachen (DE). **DESMEDT, Paul Anton Cyriel** [BE/DE]; c/o Philips Intellectual Property &, Standards GmbH Weissshausstr. 2, 52066 Aachen (DE). **RONGEN, Peter Maria Johannes** [NL/DE]; c/o Philips Intellectual Property &, Standards GmbH Weissshausstr. 2, 52066 Aachen (DE). **STEGEHUIS, Herman** [NL/DE]; c/o Philips Intellectual Property &, Standards GmbH Weissshausstr. 2, 52066 Aachen (DE). **GIJSBERS, Geert** [NL/DE]; c/o Philips Intellectual Property &, Standards GmbH Weissshausstr. 2, 52066 Aachen (DE).

(74) Agent: **VOLMER, Georg**; Philips Intellectual Property &, Standards GmbH Weissshausstr. 2, 52066 Aachen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

[Continued on next page]

(54) Title: DEVICE AND METHOD FOR COMBINING TWO IMAGES

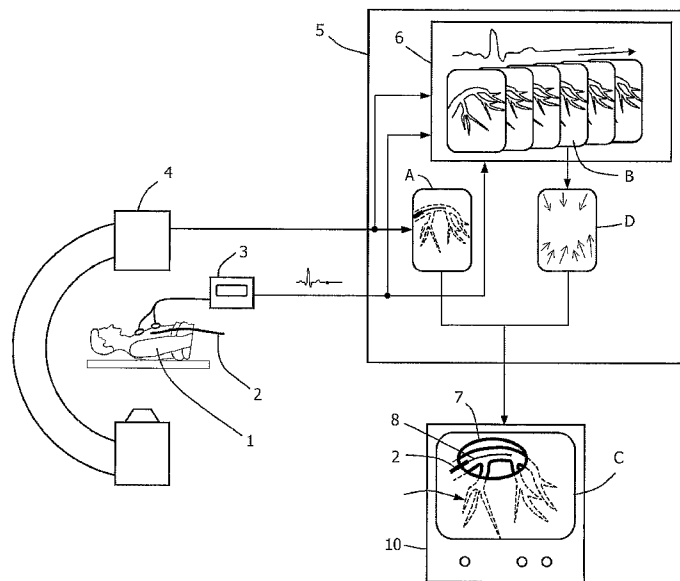

(57) Abstract: The invention relates to a device and to a method for combining two images, especially for superimposition of static vascular maps (B), which were taken at different phases of the cardiac cycle and/or the respiratory cycle and were archived in a memory (6), on a current image (A) of a catheter (2, 8) in the vascular system (9). In the method, a defined section of a map image (B) around the estimated actual position of the catheter is selected and is displayed superimposed on the current image (A) in an image (C) on a monitor (10). The map image (B) used for this is preferably selected by means of an electrocardiogram to match the particular cardiac cycle. The position of the catheter relative to the map image (B) can be estimated using a distance image (D).

WO 2005/020147 A1



AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Device and method for combining two images

The invention relates to a device and to a method for combining a current image of an object and a map image of the dwell region of the object.

The combination of a current image of an object and a map image of the object surroundings is performed, for example when navigating a catheter through the vascular system of a patient. The underlying problem will therefore be explained subsequently considering as example a cardiac catheter examination, although the present invention is not restricted to this area of application. In the case of the systems customarily used for cardiac treatment, static angiograms and fluoroscopic images currently being recorded are displayed on two different monitors side by side. Angiograms are here depictions of the vascular system, in which the vessels are displayed highlighted, for example by administering a contrast medium. In the case of these systems, it is left to the doctor carrying out treatment to relate the position of an object, such as, for example, a catheter or a guide wire, recognizable on the current picture, to the map image of the vascular system, that is, to superimpose in his mind the two monitor images displayed side by side.

15

In this context, a device is known from JP-A-2002-237996, in which a current fluoroscopic image and a static vascular map are superimposed on the same monitor. The difficulty with such superimpositions is that owing to an overall movement of the patient as well as his heartbeat and breathing, the position and form of organs in the current images constantly change, so that to some extent considerable geometrical and anatomical discrepancies exist between the superimposed images. To alleviate this problem, data banks containing static vascular maps from different phases of the cardiac and/or respiratory cycle can be used in order by means of an electrocardiogram (ECG) and/or the measured respiration phase to allocate a current fluoroscopic image to the static vascular map (from the same or a similar cardiac or respiratory cycle) that is the best match for it. Even when using such advanced methods, geometric discrepancies between the superimposed images still remain, which can seriously impair the optical impression and consequently the usefulness of the superimposition.

25

Against this background, it is an object of the present invention to provide means for improved combined representation of a current image of an object and a map image of the dwell region of the object.

That object is achieved by a device having the features of claims 1 and 12 and by a method having the features of claim 13. Advantageous embodiments are contained in the subsidiary claims.

The device according to the invention is used for combination (e.g. combined display) of an image of an object and a map image of the (especially form-changing) dwell region of the object. The first-mentioned image is referred to hereinafter as the "current image", without a restriction being associated with this in relation to specific periods of time. Neither are there any fundamental restrictions in respect of the dimensions of the current image and the map image (1D, 2D, 3D, 4D,). The object can in general be any object or region to be displayed for the purpose of a "motive". For example, the "object" can be an anatomical structure of interest (organ, bone, tumor etc.), a functionally defined region (e.g. an area with specific activity of metabolism or blood vessel formation), a catheter tip or a guide wire in the vascular system of a patient, or a capsule located in the gastrointestinal tract. The last-mentioned examples pertain to an especially important situation in which the object is located in a path network and is able to move only along the paths allowed by this. In these cases, the map image preferably portrays the path network in highlighted form. For example, the map image can be an angiogram that has been prepared from the vascular system of a patient to whom contrast medium has been administered. The term "map image" is incidentally, however, to be understood quite generally as any collection of information that is or can be assigned to locations in the dwell region of the object. Mathematically, a map image can typically generally be described by a single-valued or multiple-valued function across a one-dimensional or higher-dimensional definition range.

The device contains a data-processing system, which is designed to perform the following steps:

- a) To estimate the position of the object of interest in relation to the map image. This means that in the current image the position of the object is established and the position corresponding thereto in the map image is estimated. If the position and form of the dwell region of the object on the current image and on the map image were the same, then it would be possible to determine the corresponding position exactly. In reality, however, the dwell

region changes its form and position in an unknown manner, so that the corresponding position has to be estimated. At the same time, it can optionally be considered corrective that the object must inevitably be located in a path network, if this condition applies in the case of the underlying application.

- 5 b) The map image is combined with the current image in such a way that the estimated position of the object in the map image coincides with the actual position of the object in the current image; for the combination, only a section of the map image and/or a section of the current image are/is used. The “combination” of the map image and the current image can include in particular an additive superimposition of the images, or alternatively a
10 subtraction, a contour emphasis or any other operation for combining the image contents. In the following, the case in which only a section of the map image is used will be taken as a representative basis (the relevant remarks shall apply correspondingly also to the use of a section of the current image). As a rule, the entire current image is then used in the combination. Limitation to a sub-region of the current image is also possible, however,
15 wherein in that case the sizes of the map image section and sub-region will preferably correspond.

With the device described it is possible to combine a “current” image of an object with a static map image of the dwell region thereof without disruptive global discrepancies between the two images occurring. This is achieved in that from the map image
20 (or the current image) only a section around the object of interest is used for the combination. Such a – comparatively small – section can be allocated with great accuracy and geometrically correctly to the actual position of the object, since during the image registration the coincidence between current image and map image does not have to be oriented to a global (mean) dimension. Using the device, in particular also a satisfactory, geometrically
25 correct superimposition is therefore possible in the case of path networks, such as the vascular system of a patient for example, which have an inherent deformability that can be described only with difficulty or only with unsatisfactory accuracy by mathematical transformations. Restriction of the combination to a local section can advantageously be used irrespective of the specifically used method of image registration (rigid, non-rigid, unimodal,
30 multimodal etc.) and in many cases allows the use of new or known algorithms that were not suitable for a global registration. A further advantage of the restriction lies in the fact that as a rule the image registration is clearly less costly as regards its time and memory requirement.

In an optional embodiment of the invention, the map image can contain additional information about structures and/or functions of the dwell region of the object. For

example, it can reproduce the (assumed) position of organs, the intensity of blood vessel formation and/or the metabolic activity in the dwell region of the object. In that respect there is a virtually unlimited number of applications in which the "multimodal" registration of information from different sources is desired and helpful for the user. The combination of CT pictures of part of the skeleton with NMR (magnetic resonance) pictures of the tissue in the associated region of the bones and the joints can be mentioned as representative of this.

According to the proposed method, in this case a section of a NMR image can be brought locally into register with a CT image or conversely a section of a CT image can be brought into register with a NMR image. The object forming the basis of the registration can in this case be, for example a swelling of the tissue that is on the one hand a typical indication of a fracture, but on the other hand does not show up on X-ray images. In the case of those fractures that cannot readily be identified on an X-ray image, using the proposed method the site of the swelling observable on the NMR image can be localized on the X-ray image and the region that is to be examined with greatest attention for a fracture can be indicated on the X-ray image.

The device can in particular contain a monitor linked to the data- processing arrangement, on which the combination of the current image and the map image (or the corresponding sections) is displayed. In the context of a catheter investigation, for example, a doctor can then observe on the monitor fluoroscopic live images of the catheter, which at the same time show him the vascular structure around the catheter as a section of a vascular map.

According to a further aspect of the device, this contains a memory for storing a number of map images, the map images being categorized according to a varying state of the dwell region of the object. In this instance it is possible to select from among the several map images an optimum map image for the combination to be effected.

The device contains furthermore preferably a sensor device for detecting at least one parameter that describes a varying state of the dwell region of the object. In particular, the sensor device can be designed to detect an electrocardiogram and/or the respiratory cycle of a patient undergoing examination. Such a sensor device can be used in conjunction with the above-mentioned memory for a number of map images, in order on the one hand to categorize the stored map images according to the associated state of the path network and in order on the other hand to determine the state of the dwell region pertaining to the current image.

In conjunction with the above-mentioned embodiment of the device containing a memory, the data-processing system can furthermore be arranged to select from the

memory of the device those map images of which the “index” or associated state of the dwell region of the object is the best match for the state of the said dwell region that existed as the current image was being taken. If, for example, the memory contains several map images of the vascular system of a patient at different phases of the cardiac cycle, one can select from these the one that comes from the same phase of the cardiac cycle as the current image. In this manner it is possible to take into account parameterizable and especially cyclical spontaneous movements of the path network and from the outset to combine the current image only with a map image that is the best possible match.

There are various options for estimating the correspondent position of the object in a map image within the framework of an image registration of current image and map image. In particular, with the existence of a spatially-defined structure, such as an organ or a path network, for example, the data-processing system can be arranged to assign to each pixel in a map image a probability that it will belong to the structure (e.g. to the path network). In many cases of application, it is in fact impossible to distinguish reliably between pixels that belong to a structure and those that do not belong to it. In such cases, when using the map image a probability-based segmentation allows the highest possible probability for the accuracy of the result to be sought and the reliability of the result to be quantified.

Furthermore, the data-processing system can be arranged to produce a distance image from the map image by a distance transformation. A distance transformation is an operation known from digital image-processing (cf. Jähne, *Digital Bildverarbeitung*, 5th edition, Chapter 18, Springer Verlag Berlin Heidelberg, 2002). Here, a pixel of the distance image can in particular contain information about in which direction and/or at what spacing from that point there is a greater probability for the existence of a specific segmentation object. The distance image is therefore well suited for estimating the position of an object relative to the map image. For example, a roughly estimated starting position of a catheter on the map image can be converted by means of the distance information into a position of the catheter that lies with greater probability in the vascular system (path network). Distance images can advantageously be calculated in advance from the existing map images, so that they are ready and available during the processing of a current image. This allows an error-tolerant estimation of the position of the object in real time. Superimposition of map image and current image can therefore be carried out so quickly and so accurately that it represents real assistance for the eye-hand co-ordination of the doctor.

Depending on the application, the section that is used from the current image and/or the map image can be of different size and of different form. In particular, it can be

rectangular or oval. Typically, the size (area, volume) of the section amounts to about 5% to 50%, preferably about 10% to 30%, of the size of the map image or current image. According to an optional embodiment of the device, the section contains only the separate representation of a spatially-defined structure, such as a path network for example. All points that do not lie
5 on the structure are then transparent in the section. In that way, the section accentuates only the said structure around the object of interest, without concealing other image information of the current image.

The device can contain in particular an imaging means, such as an X-ray apparatus, for example, and/or an NMR apparatus, with which the current image of the object
10 can be produced. Furthermore, the imaging means can be used to produce the map images of the dwell region of the object as well. Such a device is especially suitable for navigating a catheter in the case of surgical treatment. The device can in particular contain more than one imaging means, for example, an X-ray apparatus and an NMR apparatus, so that the current image and the map image(s) can originate from different modalities.

15 The invention relates furthermore to a device and to a method for combined portrayal of a current image of an object that is located in a path network and a map image of the path network. The device contains a data-processing system that is arranged to execute the said method, the method comprising the following steps:

- a) in the map image, to assign to each pixel a probability that it belongs to the
20 path network;
- b) to produce a distance image from the map image by a distance transformation;
- c) by means of the distance image to estimate the position of the object in relation to the map image of the path network, and
- d) to superimpose the map image wholly or partially on the current image or a
25 section thereof so that the estimated position of the object in the map image is brought into register with the actual position of the object in the current image.

When in step d) only a section of the map image and/or of the current image are/is used, the device corresponds to a variant of the above-defined device as claimed in claim 1. For a more detailed explanation, the reader can therefore be referred largely to the
30 above description. According to an independent aspect of the invention, the above-defined device nevertheless also includes the case in which a different section of the map image or the entire map image is superimposed on the current image. The advantage of the device in this regard lies in enabling an error-tolerant superimposition in real time with a probability-

based segmentation and a distance imaging, which significantly increases the value of the superimposition, for example, within the scope of a monitor display.

Finally, the invention also relates to a method for combining a current image of an object and a map image of the dwell region of the object. The method here contains the following steps:

- a) estimation of the position of the object in relation to the map image,
- b) combination of the map image around the estimated position of the object with the current image, the estimated position of the object in the map image being brought into register with the actual position of the object in the current image, and only a section of the map image and/or of the current image being used.

The method implements in general form the steps that can be performed with a device of the kind described above. As regards the definition of terms, advantages and further aspects of the method, the reader is therefore referred to the above description of the device.

These and other aspects of the invention are apparent from and will be elucidated, by way of non-limitative example, with reference to the embodiments described hereinafter.

The single Figure shows schematically the components of a device according to the invention for superimposed representation of two images.

In the case of the medical application illustrated in the Figure as a representative example, the movement of a catheter 2 or more precisely of the catheter tip and/or a guide wire 8 in the vascular system 9 of a patient 1 is to be observed. For that purpose, fluoroscopic X-rays images of the body volume being examined are produced with an X-ray apparatus 4, and are transferred as current images A to a data-processing system 5. The difficulty with such fluoroscopic images is that the vascular system 9 stands out only faintly thereon, so that with this system reliable navigation of the catheter or a guide wire to a specific location within the vascular system is hardly possible. A better portrayal of the vascular system could, admittedly, be achieved by injection of a contrast medium, but such measures must be used as sparingly as possible, owing to the stress associated therewith for the patient.

To improve catheter navigation, in the case of the system illustrated several angiograms B are prepared with the X-ray apparatus 4 before or during the actual catheter examination 4 and are stored in a memory 6 of the data-processing system 5. The angiograms can be produced, for example, by injections of contrast medium, so that the vascular tree of the patient can easily be seen on them. They are therefore hereinafter referred to also as “map images or “vascular maps” (road maps).

Since the heartbeat has significant effects on the position and form of the vascular system of the heart and the adjoining organs, map images B from different phases of the cardiac cycle of the patient 1 are archived in the memory. The cardiac phase belonging to a particular map image B is here indicated by an electrocardiogram, which is recorded by an electrocardiograph 3 in parallel with the X-ray images. Furthermore, map images can be prepared also at different phases of the respiratory cycle, which is detected by a respiration sensor such as a chest belt or similar. For the sake of clarity, such an additional or alternative indication of the map images B by way of the respiratory cycle is not specifically shown in the Figure.

During the catheter examination carried out for therapeutic or diagnostic purposes, fluoroscopic images A of the catheter tip or a guide wire 8 are continuously produced and passed together with the associated ECG to the data-processing system 5. The phase of the electrocardiogram or of the cardiac cycle pertaining to a current image A is then established by the data-processing system 5, and the map image B that matches this cardiac phase best is selected from the memory 6.

The current image A and the map image B can in principle be displayed side by side on two different monitors or superimposed on one another on the same monitor. Since the map image B to the matching cardiac phase was selected, the geometrical or anatomical correspondence between the images A, B thus superimposed would already be a comparatively good one. Nevertheless, because of parallax in the image production, because of soft tissue movement and as a result of similar influences, in practice slight discrepancies always appear between the superimposed aggregate images, and cannot be eliminated by global transformations. These discrepancies can be visually very disruptive and considerably diminish the use of the superimposition.

To avoid the above-described problems in the complete superimposition of a current image A and a map image B, it is proposed in the combined portrayal C to use just one more or less small section 7 of the map image B for the superimposition, which just covers the region of interest around the catheter tip or the guide wire 8. Typically, the area of

the section 7 amounts to about 25% of the area of the map image B. In such a limited region, the positioning or registering of the section 7 can be carried out with greater accuracy than with a global registering of two images A. B. Moreover, all bothersome inconsistencies between the two superimposed images outside the region 7 are omitted. In the superimposed portrayal C, the current image A therefore remains largely unchanged, whilst in the overlap region 7 even relatively small shifts, which are created, for example, by parallax or patient movements, can be compensated for with good accuracy.

The preceding and following remarks naturally apply analogously also in the case of an equivalent embodiment of the method, in which a section of the current image A is superimposed on a map image B (or a part thereof).

In a preferred algorithm for superimposing a section 7 of the map image B on a current image A, in the map images B the vascular tree is roughly pre-segmented. Segmentation in image processing is understood to mean the assignment of pixels to objects. Since in the case of real X-ray images of the vascular system it is not normally possible to assign a pixel reliably to a vessel, a probability-based segmentation is preferably effected here. In this, each pixel is assigned a value that describes the probability that the pixel belongs to a vessel. Furthermore, for each such map image a distance image D is produced by means of a distance transformation. The value of a pixel of the distance image indicates in what direction from or at what distance from the point under consideration there is a greater probability of the presence of a vessel. The probability-based map image B can be rendered visible, for example, by a height relief across an image area, in which the highest points of the relief have the greatest probability of belonging to the vascular system. The associated distance image can then be defined as the gradient field of the relief, wherein each gradient vector points in the direction of the most direct route to a vessel. The calculation of the probability-based map images B and the associated distance images D can advantageously be effected off-line or in advance, the results being held in the memory 6. During the medical examination, these calculations therefore do not impede implementation of the method.

After selecting from the memory 6 the map image B that best matches the current image A, the distance image D pertaining to this map image B is used to estimate the position of the object of interest (catheter or guide wire) on the map image B. For that purpose, first of all, the (radio-opaque) object in the current image A is segmented. The map image B is then brought into register with the segmented object using the distances of all object pixels out of the distance image D. At the same time, only a rigid displacement (shift and/or rotation) of the segmented object relative to the map image B is permitted.

As a result of the described registration, the best possible estimated position of the catheter or the guide wire 8 relative to the map image B is known. Using this information, depending on the application, a section 7 from the map image B can then be fixed around the estimated position of the object. On a monitor 10, this section 7 is finally superimposed on
5 the current image A in a combination image C, the estimated position of the object in section 7 being brought into register with the actual position of the object (e.g. the guide wire 8) on the current image A. The geometrical discrepancy between the superimposed structures is extremely small in the combination image C.

The form of the section 7 can in principle be selected as desired. Apart from
10 the elliptical form illustrated in the Figure, alternatively a rectangular form or any desired different form could be selected. Moreover, the section 7 could contain merely the vessel itself, and otherwise be transparent. Furthermore, a digital contrast enhancement is preferably carried out within the region 7, in order to improve the recognizability of the guide wire 8.

CLAIMS:

1. A device for combining a current image (A) of an object (8) and a map image (B) of the dwell region (9) of the object (8), containing a data-processing system (5) that is arranged
 - a) to estimate the position of the object (8) in relation to the map image (B), and
 - 5 b) to combine the map image (B) around the estimated position of the object (8) with the current image (A), the estimated position of the object in the map image (B) being brought into register with the actual position of the object in the current image (A), and only a section (7) of the map image (B) and/or of the current image (A) being used.
- 10 2. A device as claimed in claim 1, characterized in that the object (8) is located in a path network (9) and the map image (B) at least partially reproduces the path network (9).
3. A device as claimed in claim 1, characterized in that the map image (B) contains additional information about the structures and/or functions of the dwell region (9)
15 of the object (8).
4. A device as claimed in claim 1, characterized in that it contains a monitor (10) for displaying the combination of the current image (A) and the section (7) of the map image (B).
20
5. A device as claimed in claim 1, characterized in that it has a memory (6) for storing a number of map images (B), which are being categorized according to a varying state of the dwell region (9) of the object (8).
- 25 6. A device as claimed in claim 1, characterized in that it has a sensor device (3) for detecting at least one parameter that describes a varying state of the dwell region of the object (8), preferably for detecting an electrocardiogram and/or the respiratory cycle.

7. A device as claimed in claim 5, characterized in that the data-processing system (5) is arranged to select from the memory (6) a map image (B) whose associated state of the dwell region (9) of the object (8) is a best possible match for the state of the dwell region during the current image (A).

5

8. A device as claimed in claim 1, characterized in that the data-processing system (5) is arranged to assign in the map image (B) to each pixel a probability that it belongs to a spatially-defined structure, such as a path network (9) for example.

10 9. A device as claimed in claim 1, characterized in that the data-processing system (5) is arranged to produce a distance image (D) from the map image (B) by a distance transformation.

10. A device as claimed in claim 1, characterized in that, in the section (7), points
15 not belonging to a spatially-defined structure, such as a path network (9) for example, are transparent.

11. A device as claimed in claim 1, characterized in that it has an imaging means, especially an X-ray apparatus (4) and/or an NMR apparatus, for producing the current image
20 (A) and optionally the map image (B).

12. A device for combined portrayal of a current image (A) of an object (8) that is located in a path network (9) and a map image (B) of the path network (9), containing a data-processing system (5) that is arranged

- 25 a) in the map image (B) to assign to each pixel a probability that it belongs to the path network (9);
b) to produce a distance image (D) from the map image (B) by a distance transformation;
c) by means of the distance image (D) to estimate the position of the object (8) in
30 relation to the map image (B) of the path network (9), and
d) to superimpose the map image (B) wholly or in sections on the current image (A) or a section thereof so that the estimated position of the object in the map image (B) is brought into register with the actual position of the object in the current image (A).

13. A method for combining a current image (A) of an object (8) and a map image (B) of the dwell region of the object, containing the following steps:
- a) estimation of the position of the object (8) in relation to the map image (B);
 - b) combination of the map image (B) around the estimated position of the object
- 5 with the current image (A), the estimated position of the object in the map image (B) being brought into register with the actual position of the object in the current image, and only a section (7) of the map image (B) and/or of the current image (A) being used.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/051446

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 G06T7/00				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) IPC 7 G06T				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ, INSPEC, IBM-TDB				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	NETSCH T ET AL: "Towards real-time multi-modality 3-D medical image registration" PROCEEDINGS EIGHTH IEEE INTERNATIONAL CONFERENCE ON COMPUTER VISION. ICCV 2001 IEEE COMPUT. SOC LOS ALAMITOS, CA, USA, vol. 1, 7 July 2001 (2001-07-07), pages 718-725, XP010554053 the whole document	1-13		
A	----- WO 01/20552 A (MAYO FOUNDATION) 22 March 2001 (2001-03-22) abstract; figures 1,2,8,9 page 3, line 1 - page 4, line 16 page 6, line 1 - page 11, line 28 ----- -/--	1-13		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.				
<input checked="" type="checkbox"/> Patent family members are listed in annex.				
° Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family </td> </tr> </table>			*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family			
Date of the actual completion of the international search <p style="text-align: center; font-size: 1.2em;">2 December 2004</p>		Date of mailing of the international search report <p style="text-align: center; font-size: 1.2em;">23/12/2004</p>		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <p style="text-align: center; font-size: 1.2em;">Herter, J</p>		

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB2004/051446

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>BENTOUTOU Y ET AL: "An invariant approach for image registration in digital subtraction angiography" PATTERN RECOGNITION, ELSEVIER, KIDLINGTON, GB, vol. 35, no. 12, December 2002 (2002-12), pages 2853-2865, XP004379654 ISSN: 0031-3203 the whole document</p> <p style="text-align: center;">-----</p>	1-13
A	<p>KERRIEN E ET AL: "FULLY AUTOMATIC 3D/2D SUBTRACTED ANGIOGRAPHY REGISTRATION" MEDICAL IMAGE COMPUTING AND COMPUTER-ASSISTED INTERVENTION. MICCAI. INTERNATIONAL CONFERENCE. PROCEEDINGS, XX, XX, 21 March 1999 (1999-03-21), pages 664-671, XP008010055 the whole document</p> <p style="text-align: center;">-----</p>	1-13
A	<p>WO 02/41780 A (PHILIPS MEDICAL SYSTEMS CLEVEL) 30 May 2002 (2002-05-30) abstract; figures 1-4 page 1, line 4 - page 3, line 38</p> <p style="text-align: center;">-----</p>	1-13
A	<p>MAINTZ J B A ET AL: "A SURVEY OF MEDICAL IMAGE REGISTRATION" MEDICAL IMAGE ANALYSIS, OXFORDUNIVERSITY PRESS, OXFORD, GB, vol. 2, no. 1, 1998, pages 1-37, XP001032679 ISSN: 1361-8423 the whole document</p> <p style="text-align: center;">-----</p>	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB2004/051446

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0120552	A	22-03-2001	US	6556695 B1		29-04-2003
			AU	7481100 A		17-04-2001
			DE	60010309 D1		03-06-2004
			EP	1224621 A1		24-07-2002
			JP	2003509145 T		11-03-2003
			WO	0120552 A1		22-03-2001

WO 0241780	A	30-05-2002	US	6473634 B1		29-10-2002
			EP	1365685 A2		03-12-2003
			JP	2004513735 T		13-05-2004
			WO	0241780 A2		30-05-2002

专利名称(译)	用于组合两个图像的设备和方法		
公开(公告)号	EP1685535A1	公开(公告)日	2006-08-02
申请号	EP2004744779	申请日	2004-08-11
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	飞利浦知识产权及标准部GMBH 皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	飞利浦知识产权及标准部GMBH 皇家飞利浦N.V.		
[标]发明人	ECK KAI PHILIPS INT PROPERTY & STANDARDS GMBH BREDNO JORG PHILIPS INT PROP & STANDARDS GMBH DESMEDT PAUL A C PHILIPS I P & STAND GMBH RONGEN PETER M J PHILIPS INT PROP & S GMBH STEGEHUIS HERMAN PHILIPS INT PROP & ST GMBH GIJSBERS GEERT PHILIPS INT PROP & STAND GMBH		
发明人	ECK, KAI, PHILIPS INT. PROPERTY & STANDARDS GMBH BREDNO, JÖRG, PHILIPS INT. PROP. & STANDARDS GMBH DESMEDT, PAUL A. C., PHILIPS I. P. & STAND. GMBH RONGEN, PETER M. J., PHILIPS INT. PROP. & S. GMBH STEGEHUIS, HERMAN, PHILIPS INT. PROP. & ST. GMBH GIJSBERS, GEERT, PHILIPS INT. PROP & STAND. GMBH		
IPC分类号	G06T7/00 A61B5/00 A61B6/00 A61B6/12 G06T3/00 G06T3/40		
CPC分类号	G06T3/4053 A61B5/7289 A61B6/12 A61B6/481 A61B6/504 A61B6/5235 A61B6/5247 G06T7/30 G06T2207/10116 G06T2207/30101		
优先权	2003102615 2003-08-21 EP		
其他公开文献	EP1685535B1		
外部链接	Espacenet		

摘要(译)

本发明涉及一种用于组合两个图像的装置和方法，特别是用于叠加静态血管图（B），其在心动周期和/或呼吸周期的不同阶段拍摄并且存档在存储器中（6），在血管系统（9）中的导管（2,8）的当前图像（A）上。在该方法中，选择围绕估计的导管实际位置的地图图像（B）的限定部分，并将其叠加显示在监视器（10）上的图像（C）中的当前图像（A）上。用于此的地图图像（B）优选地通过心电图选择以匹配特定的心动周期。可以使用距离图像（D）来估计导管相对于地图图像（B）的位置。