



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
11.10.2017 Bulletin 2017/41

(51) Int Cl.:
A61B 5/103 (2006.01) **A41D 13/00** (2006.01)
A61B 5/024 (2006.01) **A61B 5/00** (2006.01)
A61B 5/0245 (2006.01)

(21) Application number: **17170172.5**

(22) Date of filing: **16.03.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventor: **NORDSTROM, Matthew D.**
Beaverton, OR 97005-6453 (US)

(30) Priority: **18.03.2011 US 201113051770**

(74) Representative: **Beattie, Alex Thomas Stewart**
Forresters IP LLP
Skygarden
Erika-Mann-Strasse 11
80636 München (DE)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
12761274.5 / 2 685 893

Remarks:

This application was filed on 09.05.2017 as a divisional application to the application mentioned under INID code 62.

(71) Applicant: **NIKE Innovate C.V.**
Beaverton, OR 97005-6453 (US)

(54) **APPAREL FOR PHYSIOLOGICAL TELEMETRY DURING AHTLETICS**

(57) A user interface component and system for physiological parameters telemetry is provided. A user interface component may be reversibly or irreversibly attached to a garment that allows connection to a user's skin, such as via one or more holes in the garment. Sig-

nals transmitted through a conductive transfer layer in the user interface component are provided to a signal receiving unit which can collect and transmit physiological data.

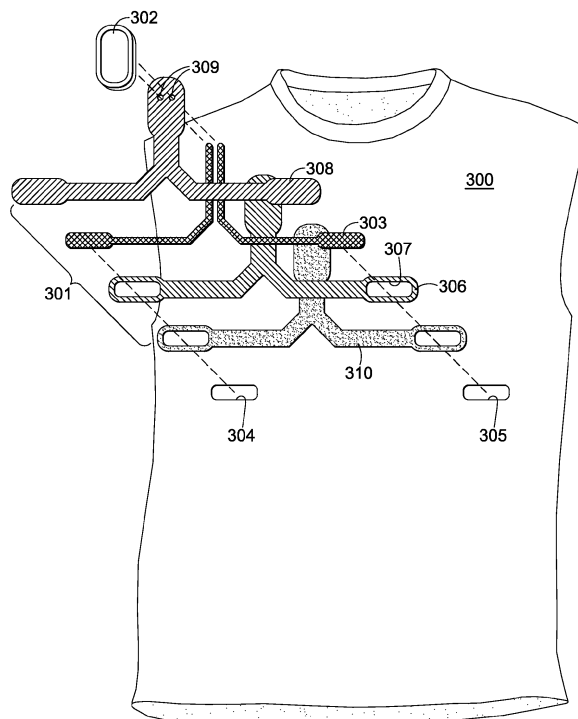


FIG. 3

Description

FIELD OF THE INVENTION

[0001] The present disclosure relates to telemetry of physiological data.

BACKGROUND OF THE INVENTION

[0002] During exercise or activity, physiological parameters of an athlete or other individual may fluctuate. Tracking these physiological parameters can provide important data in the study of athletic performance. Monitoring physiological parameters during exertion can be a useful route to optimizing performance and safeguarding the health of an athlete.

SUMMARY OF THE INVENTION

[0003] Accordingly, many approaches to monitoring physiological parameters of an athlete are obtrusive and cumbersome, which can discourage use by athletes and other users. For example, a conventional heart rate monitor may require a strap encircling the chest of the wearer that some athletes may find uncomfortable or restrictive during training or competition. Some types of conventional physiological data collection devices may not be practical to wear during athletic training or competition at all. Moreover the amount and types of parameters or data that may be monitored or collected with conventional data collection devices may be limited due to the added weight and dimension of additional conventional monitoring devices. However, collecting physiological data during athletic training and/or competition can provide valuable insights to maximize the benefits of training while minimizing the risk of overtraining and injury. An apparel telemetry heat transfer device or component is presented herein that is easily integrated into apparel and provides less conspicuous athlete telemetry.

[0004] In one example, a system for physiological parameters telemetry is provided comprising at least one user interface component comprising at least one conductive transfer layer having a bottom side and a top side, such that at least a portion of the bottom side of the conductive transfer layer is adapted to contact a user's skin. The system also comprises at least one signal receiving unit connected to the top side of the at least one conductive transfer layer and a garment having a back side contacting the user's skin and a face side. The garment is adapted to receive the at least one signal receiving unit at the face side and is further adapted to receiving the at least one user interface component on at least one of the face side or the back side. In one example, the garment may comprise one or more holes exposing the user's skin such that the portion of the bottom side of the user interface component contacts the user's skin at the one or more holes. In another example, the top side of the user interface component is on the back side of the gar-

ment.

[0005] In additional examples, the at least one user interface component of the system may comprise a bottom insulating layer contacting the bottom side and isolating at least a portion of the bottom side of the at least one conductive transfer layer from the face side of the garment. The at least one user interface component may also comprise a top insulating layer contacting the top side of the at least one conductive transfer layer. The at least one user interface component may comprise an adhesive layer at least in part between the bottom insulating layer and the face side of the garment. In one example, the garment may be a shirt and the one or more holes may be located at the chest area of the shirt. The conductive transfer layer may be an electrically conductive heat transfer layer.

[0006] In another example, a user interface component for physiological parameters telemetry is provided, the component comprising at least one conductive transfer layer having a bottom side and a top side and at least a portion of the bottom side is adapted to contact a user's skin through one or more holes in a garment, the garment having a face side and a back side. The user interface component may also comprise a bottom insulating layer contacting the bottom side of the at least one conductive transfer layer and isolating at least a portion of the bottom side of the at least one conductive transfer layer from the face side of the garment. The user interface component may also comprise a top insulating layer contacting the top side of the at least one conductive transfer layer.

[0007] Additionally, the user interface component may comprise an adhesive layer at least in part between the bottom insulating layer and the face side of the garment. The user interface component may have the bottom insulating layer bonded to the face side of the garment. Furthermore, the at least one conductive transfer layer may be an electrically conductive heat transfer layer. The at least one conductive transfer layer may comprise a metal or the at least one conductive transfer layer may comprise a carbon material. The garment may be a shirt and the one or more holes, through which the portion of the bottom side of the conductive transfer layer contacts a user's skin, may be located at a chest area of the shirt.

[0008] In one example, a user interface component for physiological parameters telemetry is provided, the component comprising at least one conductive transfer layer having a bottom side and a top side and at least a portion of the bottom side is adapted to contact a user's skin when attached to a garment worn by the user, the garment having a face side and a back side. The user interface component may also comprise a bottom insulating layer contacting the bottom side of the at least one conductive transfer layer and isolating at least a portion of the bottom side of the at least one conductive transfer layer. The user interface component may also comprise a top insulating layer contacting the top side of the at least one conductive transfer layer.

[0009] This section provides a general summary of the

disclosure, and is not a comprehensive disclosure of its full scope or all of its features. Further areas of applicability will become apparent from the description provided herein. The description and specific examples in this summary are intended for purposes of illustration only and are not intended to limit the scope of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWING

[0010] The drawings described herein are for illustrative purposes only of selected embodiments and not all possible implementations, and are not intended to limit the scope of the present disclosure.

FIGS. 1A- B illustrate different views of one example of a user interface component.

FIG. 2 illustrates one example of a system for physiological parameters telemetry.

FIG. 3 illustrates another example of a system for physiological parameters telemetry.

FIG. 4 illustrates an additional view of a system for physiological parameters telemetry.

FIG. 5 illustrates a side view example of a physiological parameters telemetry system.

FIG. 6 illustrates a side view example of a physiological parameters telemetry system.

FIG. 7 illustrates an additional example of a physiological parameters telemetry system.

FIGS. 8A-C illustrates additional garments incorporated into a physiological parameters telemetry system.

[0011] Corresponding reference numerals indicate corresponding parts throughout the several views of the drawings.

DETAILED DESCRIPTION OF THE INVENTION

[0012] Referring to FIG. 1A, one example of a user interface component for physiological parameters telemetry is depicted. A user interface component may comprise at least one conductive transfer layer 102 and a signal receiving unit 105 connected to the at least one conductive transfer layer 102. The conductive transfer layer 102 may have a top side 104 and a bottom side 103. Generally, at least a portion of the bottom side 103 of the at least one conductive transfer layer 102 contacts a user's skin 101. Thermal and/or electrical signals may propagate through the at least one conductive transfer layer 102 and be received by the signal receiving unit 105. FIG. 1B illustrates one example of a user interface component 106. The "inverted-T" shape of the user interface component 106 is merely exemplary. Additional shapes of the user interface component and conductive transfer layers may be employed for various locations of a user's body or to accommodate measurement of varying physiological data. The signal receiving unit 105

transmits the collected physiological parameters data to one or more external recording or computing sources. The signal receiving unit 105 may transmit signals in any form using any useful data transfer formats or protocols.

5 For example, signals may be relayed to external sources by radio transmissions and/or cellular telephone transmissions. Signals may utilize 802.11 protocols, Bluetooth, etc. In one example, the signal receiving unit 105 is connected to a portion of the user interface component. 10 The signal receiving unit 105 may also store data for later downloading or transmission through either a wireless or wired connection. Furthermore, the signal receiving unit 105 may be removable so that the user interface component may be launderable without compromising electronics within the signal receiving unit 105.

[0013] One example of a conductive transfer layer may use a silver or silver impregnated substrate to provide conductivity of electric and/or thermal signals. In another example, carbon is used as the conductive material. 20 Alternately or in conjunction, a conducting polymer or other organic material is employed as a conductive portion of the conductive transfer layer. For example, electrically conductive fabric or fibers may be incorporated into a conductive transfer layer. It may be advantageous to include a plurality of materials in order to transmit different physiological signals.

[0014] FIG. 2 illustrates one example of a user interface component incorporated into a system for physiological parameters telemetry. A system for physiological parameters telemetry may include a shirt 200 or other garment or accessory worn such that at least a portion touches the user's skin. A compressive shirt or other compressive garment may be incorporated into a system for physiological parameters telemetry to assure sufficient 30 contact with the user's skin to make measurements. In another example, the system may be incorporated into a belt or sport bra. The example of the shirt 200 includes one or more holes 203, 204 through the fabric of the shirt to provide an area for the conductive transfer layer 205 to contact the user's skin. The holes 203, 204 illustrated in FIG. 2 are not necessarily to scale with the shirt 200. The holes may be of varying size and location to accommodate the user interface component. For example, one or more holes for contact may be in the chest area of a garment and/or the armpit areas of a garment and/or back areas. For some applications, a micro-scale user interface component may be employed, and the contact area to the user's skin provided by the holes may be scaled accordingly. In another example, the garment itself may use conductive portions to bridge between the user's skin and the user interface component so that direct contact of the user's skin with the user interface component is minimized.

[0015] Returning to FIG. 2, a portion of the conductive transfer layer contacts the user's skin through holes 203, 204 in the garment 200. Another portion of the conductive transfer layer 208, 209 contacts the signal receiving unit 207. The signal receiving unit 207 receives thermal and

electrical signals collected from the user through the conductive transfer layer and relays them to various external data collection and analysis units. The user interface component may be removable from the garment 200 and may include a plurality of materials to provide one or more conductive transfer layers. The user interface component may be stitched, bonded, or adhered to the garment to provide stability while being worn by the user. The signal receiving unit 207 may also be separated from the system. The signal receiving unit may be held in place by any means, including stitching, bonding, apparel closures such as snaps or hook-and-eye closures, or using magnetic closures.

[0016] Examples of electronic modules that may be incorporated into the signal receiving unit or the sensor are illustrated in U.S. patent application Ser. No. 11/416,458, published as U.S. Patent Application Publication No. 2007/0260421, the entirety of which is incorporated by reference herein and made part of hereof. Aspects of the invention may relate to U.S. Patent Application Ser. No. 11/166,351, published as U.S. Patent Application 2007/0011919, and also U.S. Patent Application Ser. No. 11/848,988, patented as U.S. Patent No. 7,771,320, both of which are incorporated by reference herein and made part of hereof.

[0017] FIG. 3 illustrates an additional example of user interface component and system for physiological parameters telemetry. The user interface component 301 may comprise a conductive transfer layer 303. The conductive transfer layer 303 may be an electrically conductive heat transfer layer. The conductive transfer layer 303 contacts a portion of the user's skin through one or more holes 304, 305 in a garment 300. The conductive transfer layer 303 also contacts at least one signal receiving units 302. Additionally, the user interface component 301 may include a bottom insulating layer 306 contacting the conductive transfer layer 303 on the bottom side and isolating or insulating a portion of the bottom side of the conductive transfer layer 303 from the garment 302. The bottom insulating layer 306 also provides an exposed region 307 for the conductive transfer layer to line up with the holes 304, 305 provided in the garment 300 for contacting the user's skin.

[0018] The user interface component 301 may also have a top insulating layer 308 contacting the top side of the conductive transfer layer 303. The top insulating layer 308 may protect the conductive transfer layer 303 from environmental contamination and/or damage. The top insulating layer 308 may also have a point of contact 309 to expose the conductive transfer layer 303 and allow the signal receiving unit 302 to connect with the conductive transfer layer 303. The top insulating layer 308 may possess decorative elements. While the top insulating layer 308, the conductive transfer layer 303, and the bottom insulating layer 306 are illustrated as three separate layers, a plurality of layers may be used for any individual layer. In addition, the top insulating layer 308 and the bottom insulating layer 306 may be formed of one mate-

rial and encapsulate the conductive transfer layer 303.

[0019] There may also be provided an adhesive layer 310 on either the garment or on the garment facing side of the bottom insulating layer 306 or directly on the conductive transfer layer 303. The adhesive layer 310 and the bottom insulating layer 306 may be the same layer. The adhesive layer 310 may be provided to any portion of the user interface component 301. The adhesive layer 310 may have glue or other bonding medium to provide robust attachment of the user interface component 301 to the garment 300. The adhesive layer 310 may have a reversible or irreversible attachment mechanism. Alternatively or in conjunction, conventional apparel fasteners, such as hook-and-eye closures, buttons, or snaps, may be employed to attach the user interface component 301 to the garment 300.

[0020] FIG. 4 illustrates a side view of one example of a system for physiological parameters telemetry. Generally, the user interface component may comprise a conductive transfer layer 404 having a top side 405 and a bottom side 406. A portion of the bottom side 406 may contact the user's skin 401. In FIG. 4, a user's skin 401 is illustrated with a fabric or other garment layer 402. The fabric or other garment layer 402 may lie substantially between the user interface component and the user's skin 401. However, the garment or fabric 402 may include at least one hole so that a portion 403 of the conductive transfer layer 404 may contact the user's skin. While FIG. 4 shows direct contact between the conductive transfer layer 404 and the user's skin 401, there may be additional intervening conductive materials or layers. For example, a conductive adhesive or lubricant may be applied to the conductive transfer layer or the user's skin. In another example, the hole in the garment 402 may be supplemented with a conductive polymer impregnated into the fabric so that direct contact of the user's skin can be avoided. The garment itself may be wholly or partially constructed of a thermal and/or electrically conductive material, in which case, the user interface component may be connected with the user skin via the bridge provided by the conductive garment. The system in FIG. 4 may further comprise a signal receiving unit 409 that contacts 410 the conductive transfer layer 404.

[0021] The garment 402 may have a back side against the user's skin and a face side away from the user's skin. The garment 402 worn by the user with at least one hole 403 provided such that the conductive transfer layer 404 contacts a portion of the user's skin 401. In one example, the garment may be a compressive shirt and one or more holes may be in the chest area of the compressive shirt. The conductive transfer layer may have a bottom side 406 and a top side 405. The bottom side of the conductive transfer layer 406 may contact the user's skin. The bottom insulating layer 407 may contact at least a portion of the bottom side 406 of the conductive transfer layer 404. The bottom insulating layer 407 may protect the bottom side 406 of the conductive transfer layer 404 from the user's body and environment. The adhesive layer

411 may allow robust attachment of the bottom insulating layer 407 to the face side of the garment 402. The adhesive layer 411 may cover all or a portion of the bottom insulating layer 407. The adhesive layer 411 may also be applied to the conductive transfer layer 404 while leaving a portion 403 of the conductive transfer layer 404 exposed to allow contact with the user's skin 401. At least a portion of the conductive transfer layer 404 may be exposed by the bottom insulating layer to allow contact with the user's skin 401.

[0022] The top insulating layer 408 contacts a portion of the top side 405 of conductive transfer layer 404 and may provide protection for the conductive transfer layer 404 from the user's environment. The top insulating layer 408 may include a region where the top side 405 of the conductive transfer layer 404 is partially exposed to provide at least one contact point 410 for at least one signal receiving unit 409. While it is illustrated that each layer is in direct contact, the layers may include intervening sublayers and/or other components to bridge the connections or provide other functionality.

[0023] FIG. 5 illustrates one example of a system for physiological parameters telemetry. The garment 500 may be a shirt as illustrated but may be any garment or accessory worn in close fit with the user's skin. One or more user interface components 501 may be appliquéd to the surface of the garment 500. As illustrated, the user interface component 501 is not to scale with the garment. The user interface component 501 may have any size ratio in comparison with the garment, which is particularly advantageous as the dimensions of the user interface component 501 may be determined by the physiological parameters to be collected. In FIG. 5, the user interface component 501 is located in a chest area 503 of the garment 500 and the holes 504, 505 in the garment provided for the conductive transfer layer to contact the user's skin are located in the chest area 503. While it is illustrated that a user interface component is located in a chest area, the user interface component may be located anywhere on the garment. For example, it may be useful to include user interface component(s) at the armpit and/or back regions. While it is illustrated that there is one user interface component to one signal receiving unit, any ratio of user interface components to signal receiving units may be utilized in a system for physiological parameters telemetry. For example, it may be useful to have multiple user interface components connected to a single signal receiving unit. Alternately or in conjunction, a single user interface component may transmit a plurality of signals to a plurality of signal receiving units.

[0024] FIG. 6 illustrates an additional example of a system for physiological parameters telemetry in which the user interface component lies next to the user's skin such as on the inside of a garment, such as a compressive shirt or other form-fitting apparel. The user interface component may be bonded, stitched, or appliquéd to the back side of a garment. Another example might include a system in which the user interface component is embedded

within the shirt. Generally, the user interface component may comprise a conductive transfer layer 604 having a top side 605 and a bottom side 606. A portion of the bottom side 606 may contact the user's skin 601. In FIG. 6, a fabric or other garment layer 602 illustrated with a user interface component that lies substantially between the fabric or other garment layer 602 and the user's skin 601. While FIG. 6 shows direct contact between the conductive transfer layer 604 and the user's skin 601, there may be additional intervening conductive materials or layers. For example, a conductive adhesive or lubricant may be applied to the conductive transfer layer or the user's skin. The system in FIG. 6 may further comprise a signal receiving unit 609 that contacts 610 the conductive transfer layer 604.

[0025] The garment 602 may have a back side against the user's skin and a face side away from the user's skin. The user interface component may be applied against the user's skin and attached to the back side of the garment 602. In one example, the garment may be a compressive shirt and one or more holes may be in the chest area of the compressive shirt. The conductive transfer layer may have a bottom side 606 and a top side 605. The bottom side of the conductive transfer layer 606 may contact the user's skin. The bottom insulating layer 607 may contact at least a portion of the bottom side 606 of the conductive transfer layer 604. The bottom insulating layer 607 may protect the bottom side 606 of the conductive transfer layer 604 from the user's body

[0026] The top insulating layer 608 contacts a portion of the top side 605 of conductive transfer layer 604 and may lie substantially between the conductive transfer layer 604 and garment 602 or the back side of the garment. The top insulating layer 608 may include a region where the top side 605 of the conductive transfer layer 604 is partially exposed to provide at least one contact point 610 for at least one signal receiving unit 609. Contact through the face side and the back side of the garment to the user interface component may be provided by small holes or other conductive bridging materials. While it is illustrated that each layer is in direct contact, the layers may include intervening sublayers and/or other components to bridge the connections or provide other functionality

[0027] The adhesive layer 611 may allow robust attachment of the top insulating layer 608 to the back side of the garment 402. The adhesive layer 611 may cover all or a portion of the top insulating layer 608. The adhesive layer 611 may also be applied to the conductive transfer layer 604 to adhere the conductive transfer layer to the back side of the garment. At least a portion 603 of the conductive transfer layer 604 may be exposed by the top insulating layer 608 to allow contact with the signal receiving unit.

[0028] FIG. 7 illustrates an additional example of user interface component and system for physiological parameters telemetry. The user interface component 701 may comprise a conductive transfer layer 703. The con-

ductive transfer layer 703 may be an electrically conductive heat transfer layer. The conductive transfer layer 703 contacts a portion of the user's skin and lies substantially between the garment and the user's skin. The conductive transfer layer 703 also contacts at least one signal receiving units 702. Additionally, the user interface component 701 may include a bottom insulating layer 706 contacting the conductive transfer layer 703 on the bottom side and isolating or insulating a portion of the bottom side of the conductive transfer layer 703 from the user's skin. The bottom insulating layer 706 also provides an exposed region 707 for contacting the user's skin.

[0029] The user interface component 701 may also have a top insulating layer 708 contacting the top side of the conductive transfer layer 703. The top insulating layer 701 may lie substantially between the garment or fabric and the conductive transfer layer 703. The top insulating layer 708 may also have a point of contact 709 to expose the conductive transfer layer 703 and allow the signal receiving unit 702 to connect with the conductive transfer layer 703. While the top insulating layer 708, the conductive transfer layer 703, and the bottom insulating layer 706 are illustrated as three separate layers, a plurality of layers may be used for any individual layer. In addition, the top insulating layer 708 and the bottom insulating layer 706 may be formed of one material and encapsulate the conductive transfer layer 703.

[0030] There may also be provided an adhesive layer 710 on either the garment or on the garment facing side of the top insulating layer 708 or directly on the top side of the conductive transfer layer 703. The adhesive layer 710 and the top insulating layer 708 may be the same layer. The adhesive layer 710 may be provided to any portion of the user interface component 701. The adhesive layer 710 may have glue or other bonding medium to provide robust attachment of the user interface component 701 to the garment 700. The adhesive layer 710 may have a reversible or irreversible attachment mechanism. Alternately or in conjunction, conventional apparel fasteners, such as hook-and-eye closures, buttons, or snaps, may be employed to attach the user interface component 701 to the garment 700.

[0031] FIGS. 8A-C illustrates additional examples of garments that are incorporated with a system for physiological parameters telemetry. FIG. 8A illustrates a user interface component 801 and signal receiving unit may be attached to a belt 802. FIG. 8B illustrates a user interface component and signal receiving unit 803 may be attached to a sport bra. FIG. 8C illustrates user interface components 805, 807 attached to a pair of shorts 803, particularly close-fitting bottoms such as undergarments or compressive shorts. The general locations illustrated in FIG. 8A-C are merely exemplary and further are not to scale. Locations for user interface components may vary according to the user and the physiological parameters to be monitors. A plurality of user interface components may be applied to areas of several garments to achieve comprehensive physiological telemetry.

[0032] A variety of physiological data may be obtained and transmitted by the described systems. Non-limiting examples of physiological parameters that may be monitored include: skin temperature, perspiration rate and for content, heart rate, blood pressure, heat flux, muscle contraction, etc. For example, skin temperature and/or core body temperature of an athlete at various levels of exertion and in different environments may be monitored. An athlete's pulse rate and/or blood pressure may be tracked as well. Respiratory rate statistics may be collected. Electrolyte loss via sweat may be monitored. Measurement and collection of different physiological data may include locating one or more user interface components at different areas of an athlete's body. For example, pulse rate may be measured near the carotid artery, the wrist, behind the knee or on the chest. In addition, the material and construction of the user interface component may be adjusted for the type of data to be collected. In an additional example, the user interface component may provide a conductive connection between the signal receiving unit and an additional unit connected with the user's skin. For additional sensing applications, it may be useful to provide a small current from the signal receiving unit having a power source to the user interface component.

[0033] The foregoing description of the embodiments has been provided for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention. Individual elements or features of a particular embodiment are generally not limited to that particular embodiment, but, where applicable, are interchangeable and may be used in a selected embodiment, even if not specifically shown or described.

35 CLAUSES

[0034] Preferred features of the invention are defined in the following clauses:

- 40 1. A system for physiological parameters telemetry, the system comprising: at least one user interface component comprising at least one conductive transfer layer having a bottom side and a top side, at least a portion of the bottom side is adapted to contact a user's skin; at least one signal receiving unit connected to the top side of the at least one conductive transfer layer; and a garment having a back side contacting the user's skin and a face side and adapted to receive the at least one signal receiving unit at the face side and adapted to receive the at least one user interface component on at least one of the face side or the back side.
- 50
- 55 2. The system of clause 1, the garment comprising one or more holes exposing the user's skin such that the portion of the bottom side of the at least one user interface component contacts the user's skin at the one or more holes.

3. The system of clause 1, wherein the top side of the user interface component is on the back side of the garment.

4. The system of clause 2, the at least one user interface component further comprising a bottom insulating layer contacting the bottom side and isolating at least a portion of the bottom side of the at least one conductive transfer layer from face side of the garment.

5. The system of clause 1, the at least one user interface component further comprising a top insulating layer contacting the top side of the at least one conductive transfer layer.

6. The system of clause 4, the at least one user interface component further comprising an adhesive layer at least in part between the bottom insulating layer and the face side of the garment.

7. The system of clause 2, wherein the garment is a shirt and the one or more holes is located at a chest area of the shirt.

8. The system of clause 1, the at least one conductive transfer layer is an electrically conductive heat transfer layer.

9. A user interface component for physiological parameters telemetry worn on a garment, the component comprising: at least one conductive transfer layer having a bottom side and a top side, at least a portion of the bottom side is adapted to contact a user's skin through one or more holes in a garment, the garment having a face side and a back side; a bottom insulating layer contacting the bottom side and isolating at least a portion of the bottom side of the at least one conductive transfer layer from the face side of the garment; and a top insulating layer contacting the top side of the at least one conductive transfer layer.

10. The user interface component of clause 9, further comprising an adhesive layer at least in part between the bottom insulating layer and the face side of the garment.

11. The user interface component of clause 9, wherein the bottom insulating layer is bonded to the face side of the garment.

12. The user interface component of clause 9, the at least one conductive transfer layer is an electrically conductive heat transfer layer.

13. The user interface component of clause 9, the at least one conductive transfer layer comprises a

metal.

14. The user interface component of clause 9, the at least one conductive transfer layer comprises a carbon material.

15. The user interface component of clause 9, wherein the garment is a shirt and the one or more holes are located at a chest area of the shirt.

16. A user interface component for physiological parameters telemetry worn on a garment, the component comprising: at least one conductive transfer layer having a bottom side and a top side, at least a portion of the bottom side is adapted to contact a user's skin when attached to a garment worn by the user, the garment having a face side and a back side; a bottom insulating layer contacting the bottom side and isolating at least a portion of the bottom side of the at least one conductive transfer layer; and a top insulating layer contacting the top side of the at least one conductive transfer layer.

25 Claims

1. A user interface component (106, 301, 501, 701, 801, 805, 807) for physiological parameters telemetry worn on a garment (200, 300, 500, 700), the component comprising: at least one conductive transfer layer (102, 205, 208, 209, 303, 404, 604, 703) having a bottom side (103, 406, 606) and a top side (104, 405, 605), at least a portion of the bottom side (103, 406, 606) is adapted to contact a user's skin through one or more holes (203, 204, 304, 305, 504, 505) in a garment (200, 300, 500, 700), the garment having a face side and a back side; a bottom insulating layer (306, 407, 607, 706) contacting the bottom side (103, 406, 606) and isolating at least a portion of the bottom side (103, 406, 606) of the at least one conductive transfer layer (102, 205, 208, 209, 303, 404, 604, 703); and a top insulating layer (308, 408, 608, 708) contacting the top side (104, 405, 605) of the at least one conductive transfer layer (102, 205, 208, 209, 303, 404, 604, 703), the top insulating layer (308, 408, 608, 708) having one or more point contacts (309, 410, 610, 709) to expose the conductive transfer layer (102, 205, 208, 209, 303, 404, 604, 703); and at least one signal receiving unit (302, 409, 502, 609, 702) in contact with the top side of the top insulating layer, the at least one signal receiving unit (302, 409, 502, 609, 702) removably connected to the top side of the conductive transfer layer (102, 205, 208, 209, 303, 404, 604, 703) through the one or more point contacts (309, 410, 610, 709) on the top insulating layer (308, 408, 608, 708).

2. The user interface component (106, 301, 501, 701, 801, 805, 807) of claim 1, wherein the insulating layer (306, 407, 607, 706) isolates at least a portion of bottom side (103, 406, 606) of the at least one conductive transfer layer (102, 205, 208, 209, 303, 404, 604, 703) from the face side of the garment (200, 300, 500, 700). 5
3. The user interface component (106, 301, 501, 701, 801, 805, 807) of claim 1, further comprising an adhesive layer (310, 411, 611, 710) at least in part between the bottom insulating layer (306, 407, 607, 706) and the face side of the garment (200, 300, 500, 700). 10
15
4. The user interface component (106, 301, 501, 701, 801, 805, 807) of claim 1, wherein the bottom insulating layer (306, 407, 607, 706) is bonded to the face side of the garment (200, 300, 500, 700). 20
5. The user interface component (106, 301, 501, 701, 801, 805, 807) of claim 1, the at least one conductive transfer layer (102, 205, 208, 209, 303, 404, 604, 703) is an electrically conductive heat transfer layer. 25
6. The user interface component (106, 301, 501, 701, 801, 805, 807) of claim 1, the at least one conductive transfer layer (102, 205, 208, 209, 303, 404, 604, 703) comprises a metal or a carbon material. 30
7. The user interface component (106, 301, 501, 701, 801, 805, 807) of claim 1, wherein the garment (200, 300, 500, 700) is a shirt and the one or more holes (203, 204, 304, 305, 504, 505) are located at a chest area of the shirt. 35

40

45

50

55

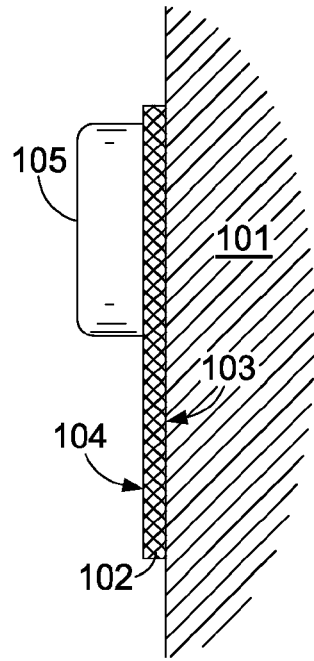


FIG. 1A

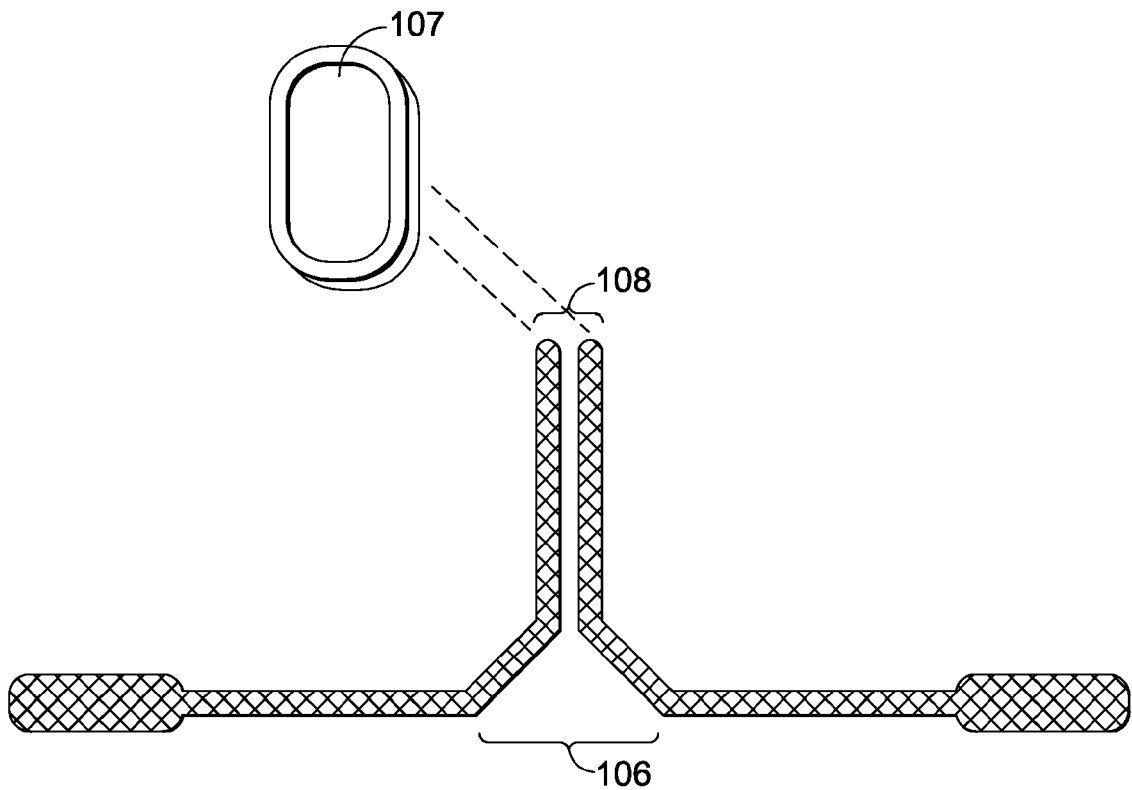


FIG. 1B

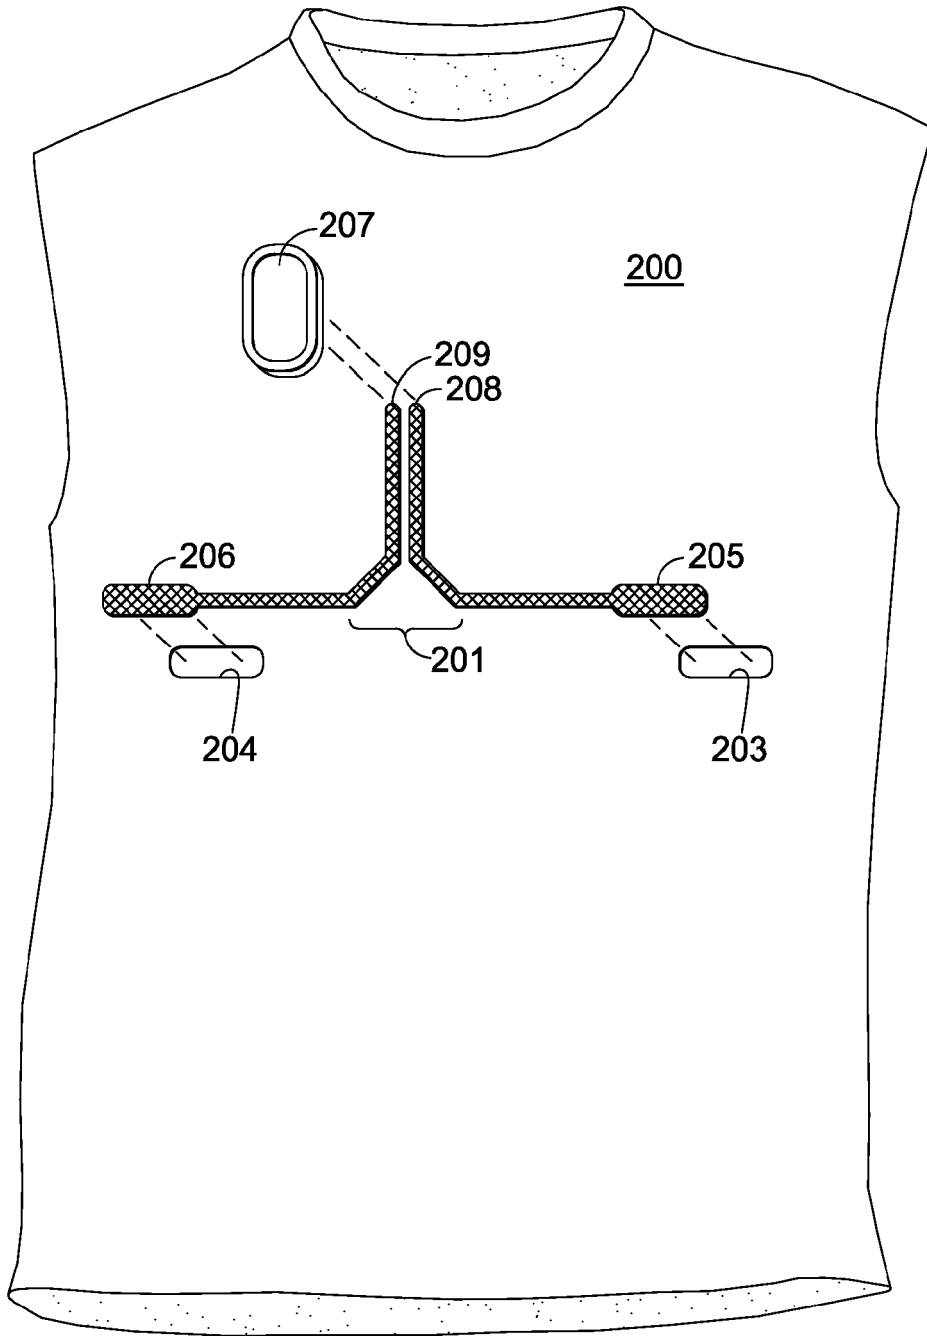


FIG. 2

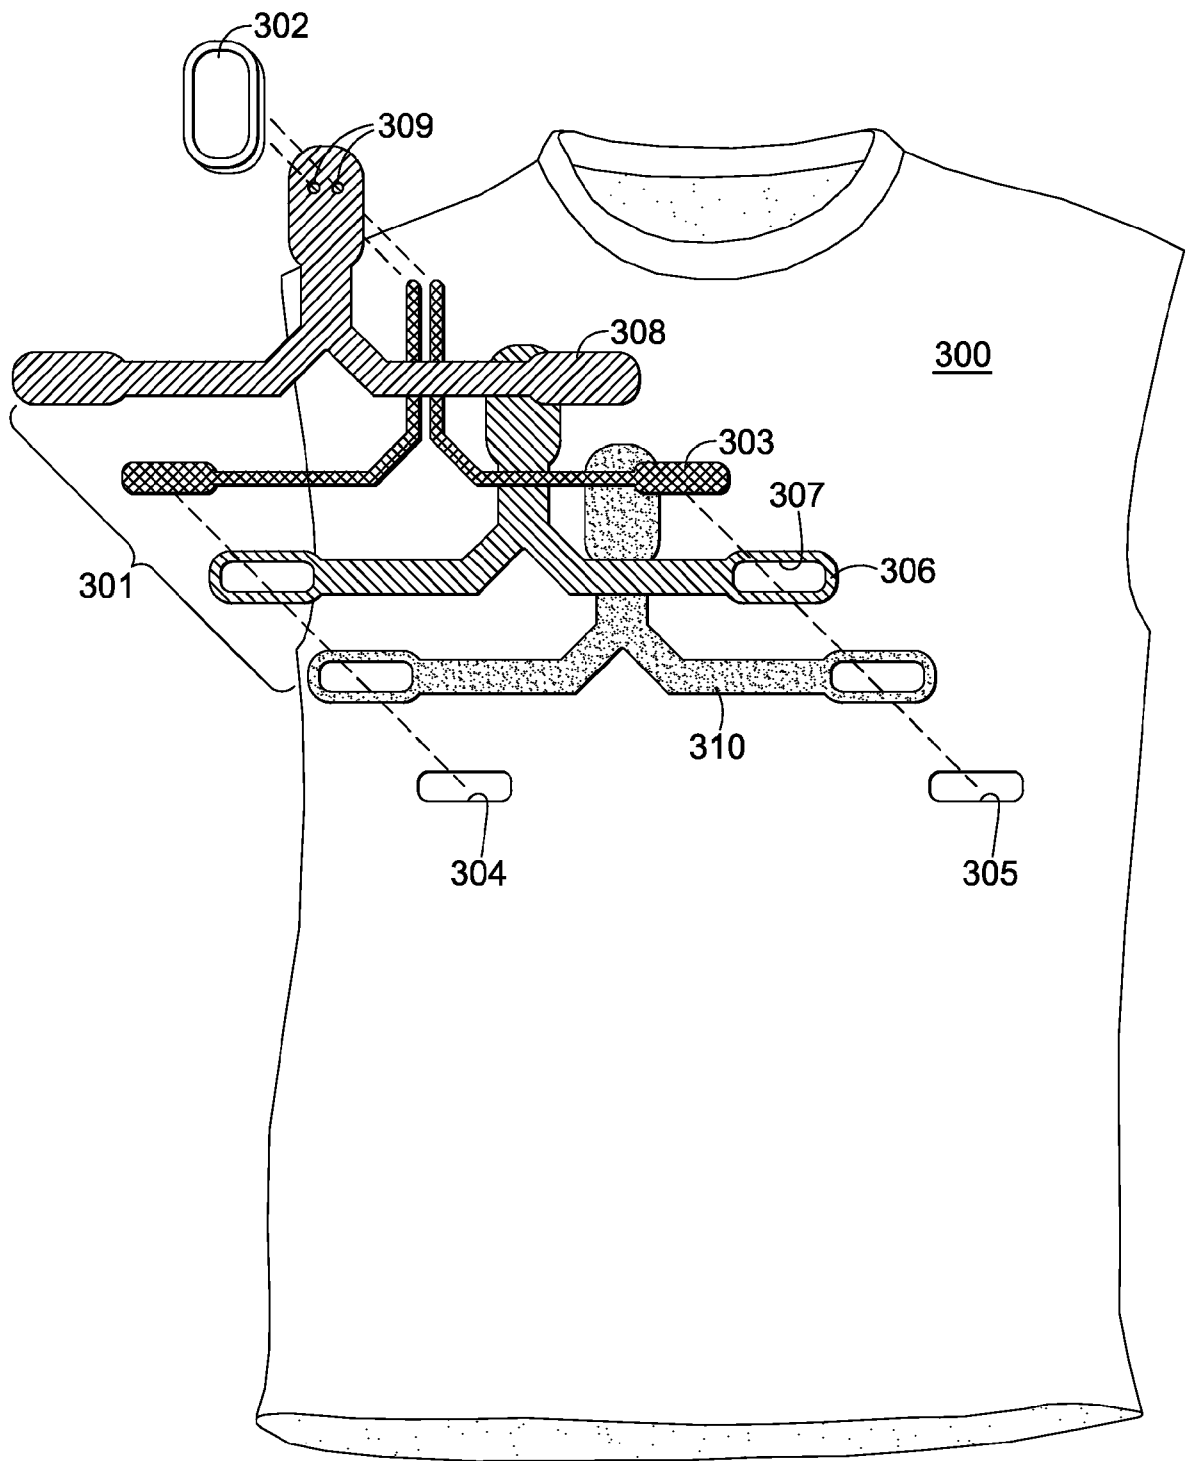


FIG. 3

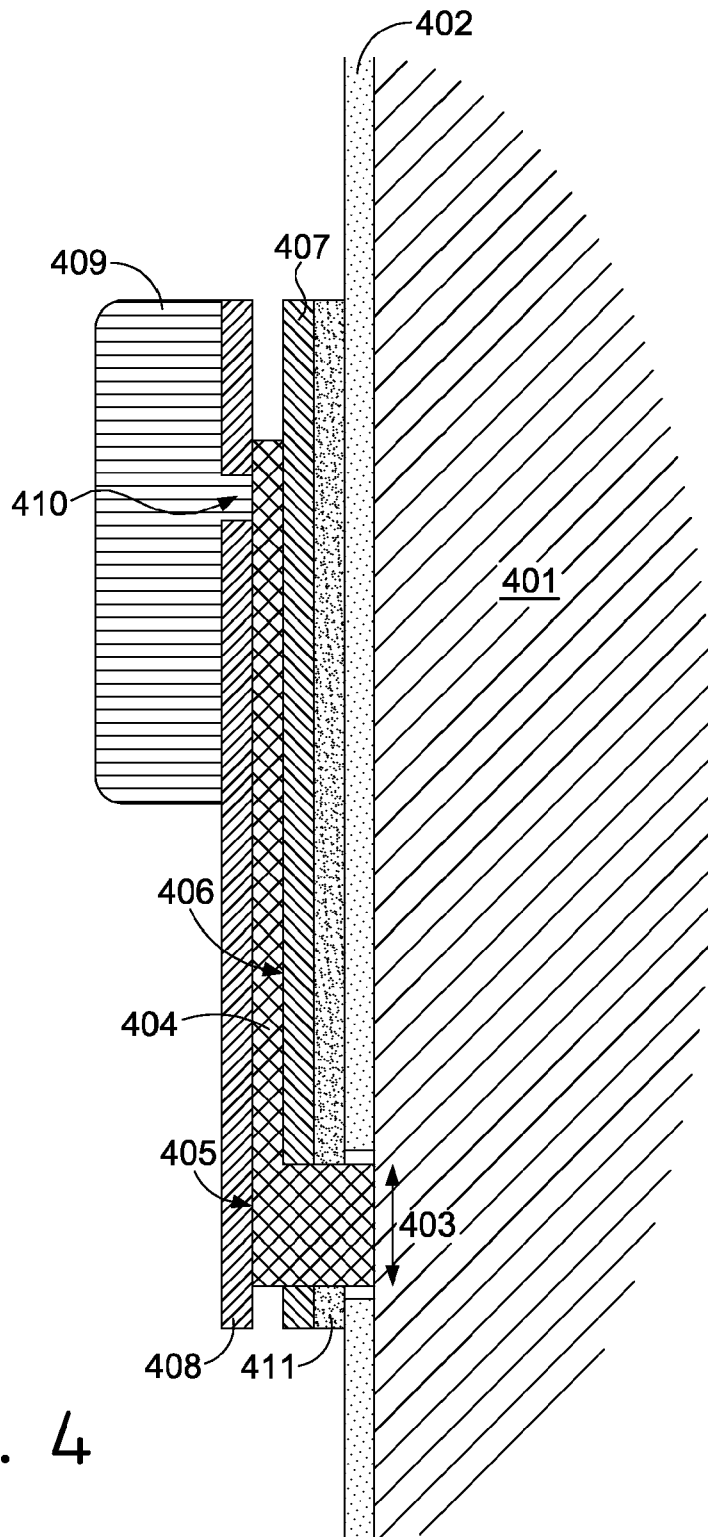


FIG. 4

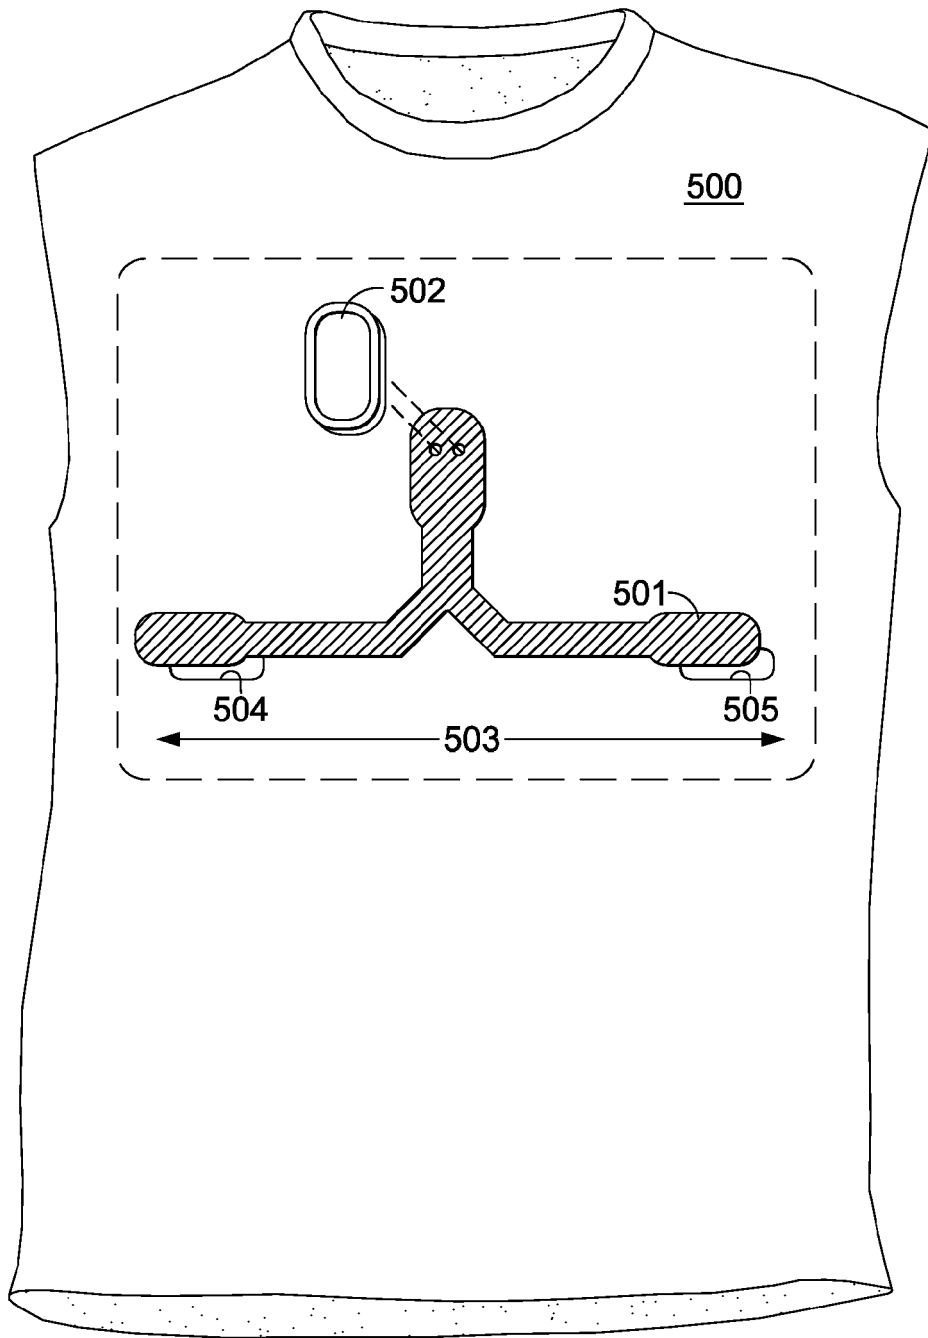


FIG. 5

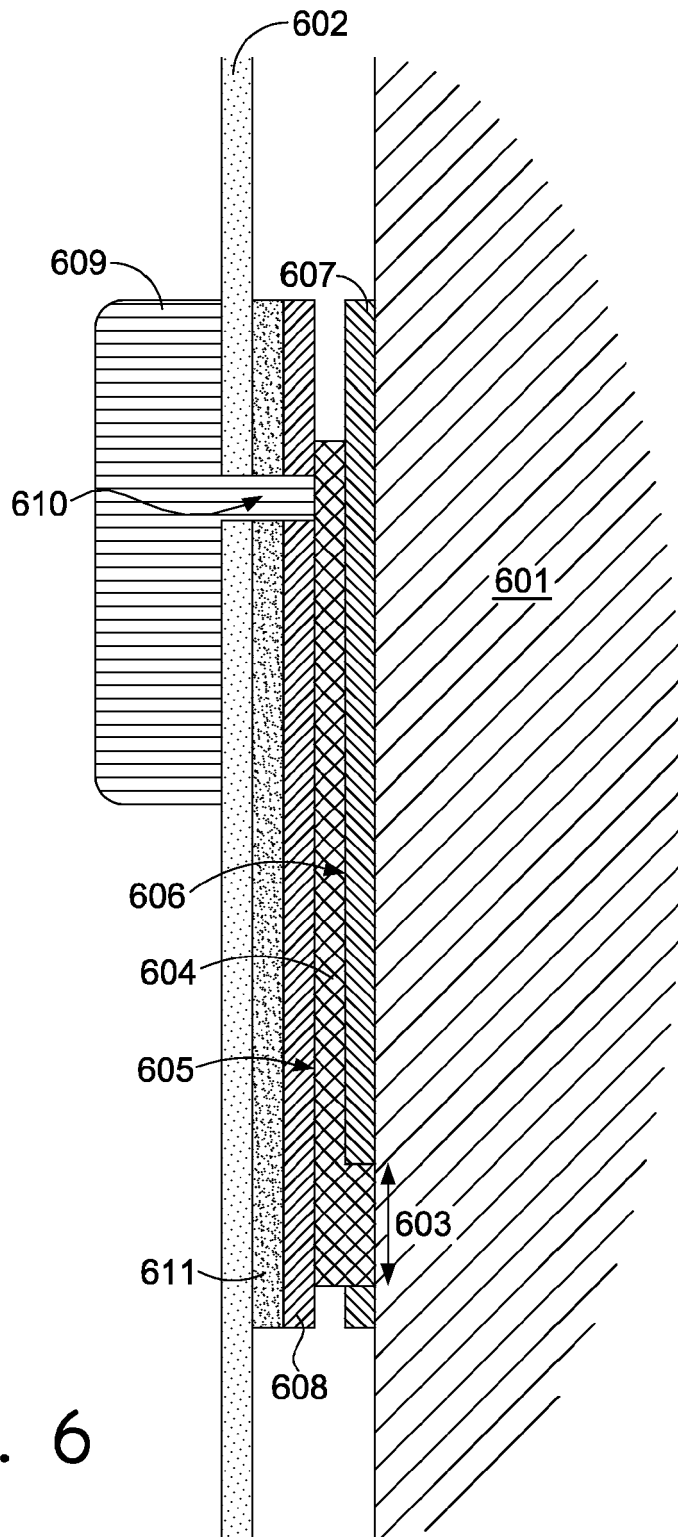


FIG. 6




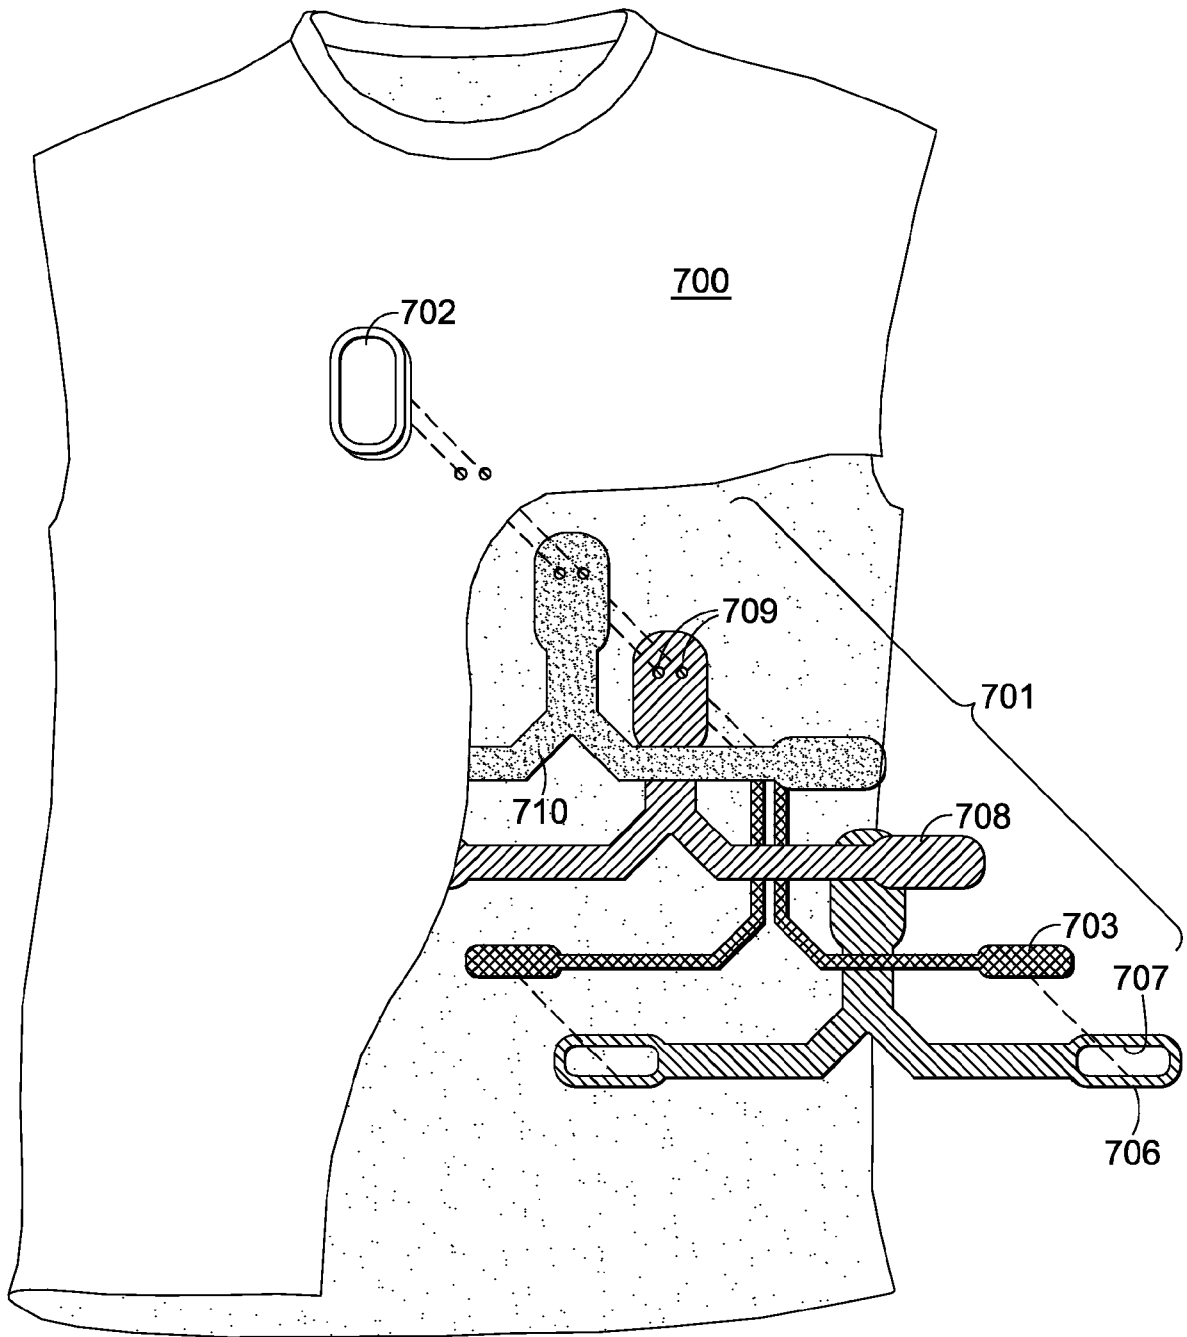


FIG. 7

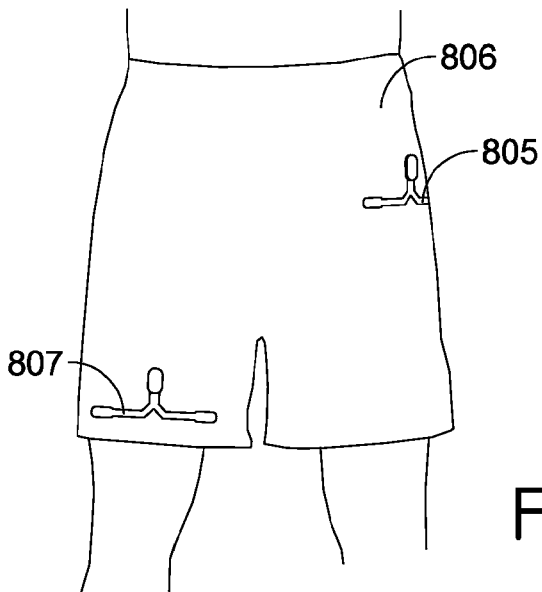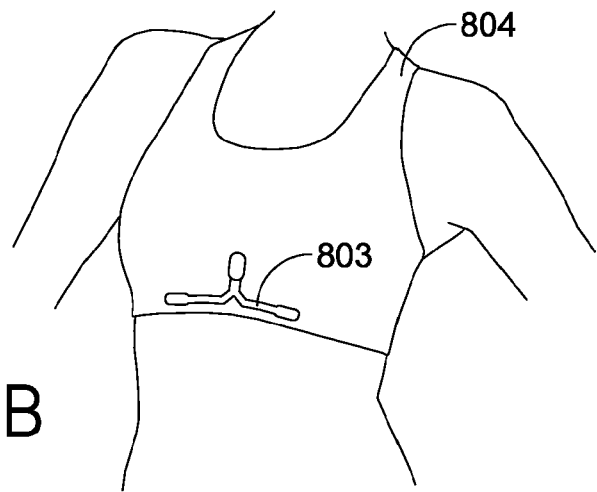

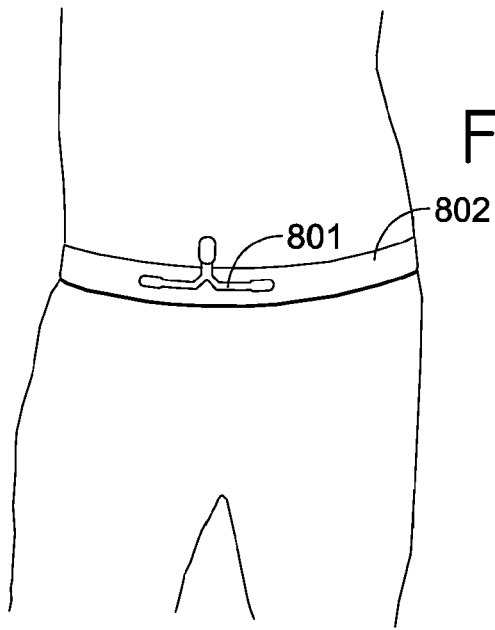

EUROPEAN SEARCH REPORT

Application Number
EP 17 17 0172

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2007/285868 A1 (LINDBERG PHILLIP [FI] ET AL) 13 December 2007 (2007-12-13) * paragraphs [0010], [0022], [0024], [0025], [0030], [0036], [0040], [0041], [0047], [0093] * * figure 2b *	1-7	INV. A61B5/103 A41D13/00 A61B5/024 A61B5/00 A61B5/0245
A	US 2004/009731 A1 (RABINOWICZ SIGI [BE]) 15 January 2004 (2004-01-15) * figures 1, 3 *	1-7	
A	US 2010/185076 A1 (JEONG YEON-HEE [KR] ET AL) 22 July 2010 (2010-07-22) * paragraph [0041] * * figures 1, 4 *	1-7	
A	EP 1 249 204 A1 (GE MED SYS INFORMATION TECH [US]) 16 October 2002 (2002-10-16) * paragraphs [0034], [0039], [0040], [0043] * * figures 3, 4 *	1-7	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC) A61B
Place of search The Hague		Date of completion of the search 30 August 2017	Examiner Worms, Georg
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 17 17 0172

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-08-2017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007285868 A1	13-12-2007	CN 101084826 A	12-12-2007
		CN 105286106 A	03-02-2016
		FI 20065391 A	09-12-2007
		GB 2438953 A	12-12-2007
		US 2007285868 A1	13-12-2007
		US 2013123601 A1	16-05-2013

US 2004009731 A1	15-01-2004	AU 2003247947 A1	02-02-2004
		US 2004009731 A1	15-01-2004
		WO 2004006700 A1	22-01-2004

US 2010185076 A1	22-07-2010	KR 20090009645 A	23-01-2009
		US 2010185076 A1	22-07-2010
		WO 2009014309 A1	29-01-2009

EP 1249204 A1	16-10-2002	EP 1249204 A1	16-10-2002
		JP 2002325740 A	12-11-2002
		US 6453186 B1	17-09-2002

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 416458 A [0016]
- US 20070260421 A [0016]
- US 166351 A [0016]
- US 20070011919 A [0016]
- US 848988 A [0016]
- US 7771320 B [0016]

专利名称(译)	运动期间生理遥测的服装		
公开(公告)号	EP3228248A1	公开(公告)日	2017-10-11
申请号	EP2017170172	申请日	2012-03-16
[标]申请(专利权)人(译)	耐克国际有限公司		
申请(专利权)人(译)	NIKE INNOVATE C.V.		
当前申请(专利权)人(译)	NIKE INNOVATE C.V.		
[标]发明人	NORDSTROM MATTHEW D		
发明人	NORDSTROM, MATTHEW D.		
IPC分类号	A61B5/103 A41D13/00 A61B5/024 A61B5/00 A61B5/0245		
CPC分类号	A61B5/6804 A61B5/0002 A61B5/0006 A61B5/02438 A61B5/02444 A61B5/0245 A61B5/486 A61B5/6805		
优先权	13/051770 2011-03-18 US		
外部链接	Espacenet		

摘要(译)

提供了一种用于生理参数遥测的用户界面组件和系统。用户界面组件可以可逆地或不可逆地附接到衣服上，该衣服允许连接到用户的皮肤，例如通过衣服中的一个或多个孔。通过用户界面组件中的导电转移层发送的信号被提供给信号接收单元，该信号接收单元可以收集和发送生理数据。

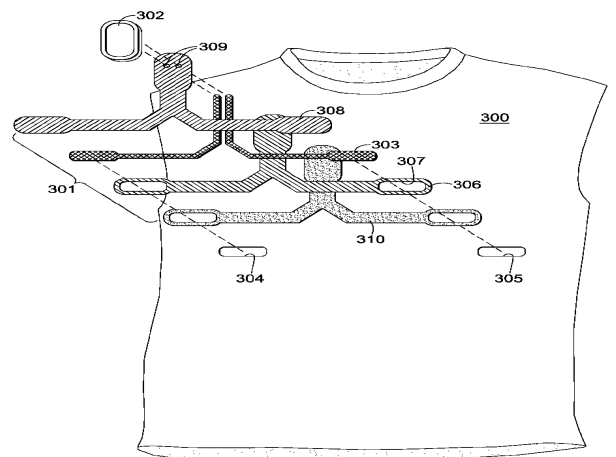


FIG. 3