

(51) International Patent Classification:
A61B 5/00 (2006.01)(21) International Application Number:
PCT/CN2015/075233(22) International Filing Date:
27 March 2015 (27.03.2015)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **NOKIA TECHNOLOGIES OY** [FI/FI];
Karaportti 3, Espoo, FI-02610 (FI).(71) Applicant (for LC only): **NAVTEQ (SHANGHAI)
TRADING CO., LTD.** [CN/CN]; Room 2930, 2933 and
2942, North Tower, Kerry Center, No.1515 Nanjing Road
West, Jing'an District, Shanghai 200040 (CN).(72) Inventors: **CHEN, Yue**; Room 1408, Block 2, No. 1 Ya Zi
Qiao Street, Xicheng District, Beijing 100055 (CN). **LI-
ANG, Yuyang**; 28-2-4, Jia 8 Xin Wai Da Jie, Xicheng
District, Beijing 100088 (CN). **LAN, Peng**; 216-3-302
Wan Ke Qing Qing, Chaoyang District, Beijing 100121(CN). **ZHAO, Wenya**; 37-10131, No. 11 He Ping Li Dong
Jie, Dongcheng District, Beijing 100013 (CN). **WANG,
Dandan**; 37-10131, No. 11 He Ping Li Dong Jie,
Dongcheng District, Beijing 100013 (CN).(74) Agent: **KING & WOOD MALLESONS**; 20th Floor, East
Tower, World Financial Centre, No.1 Dongsanhuan Zhon-
glu, Chaoyang District, Beijing 100020 (CN).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DETECTING BODY-RELATED TEMPERATURE CHANGES

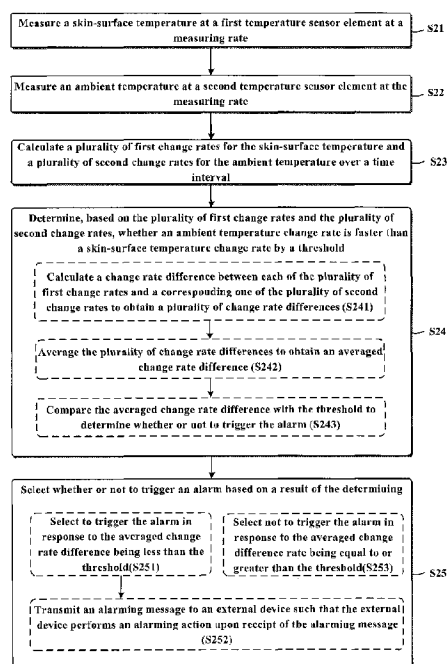


FIG. 4

(57) Abstract: Methods and apparatuses (10) for detecting body-related temperature changes are provided. The method comprises measuring a skin-surface temperature at a first temperature sensor element (12) at a measuring rate (S21) and measuring an ambient temperature at a second temperature sensor element (13) at the measuring rate (S22). The method also comprises calculating a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval (S23). The method further comprises determining, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold (S24). The method additionally comprises selecting whether or not to trigger an alarm based on a result of the determining (S25). With the methods and apparatuses (10), the number of false alarms may be significantly reduced.



TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

METHOD AND APPARATUS FOR DETECTING BODY-RELATED TEMPERATURE CHANGES

TECHNICAL FIELD

5 [0001] The example embodiments of the present disclosure generally relate to a temperature monitoring field. More particularly, the example embodiments of the present disclosure relate to methods and apparatuses for detecting body-related temperature changes.

BACKGROUND

10 [0002] For each family, how to prevent children from being sick has become a common concern for the parents since a sick child may not only cost parents' time, energy, and money, but also decrease the child's own immunity. According to the results of many investigations and observations, children get cold and fever mostly because they often kick their quilts or blankets during the nighttime while sleeping. In hope to keep their children far from sickness, many parents have to keep eyes on the children and cover the quilt for them when the quilt is kicked at the
15 nighttime, which may make parents poor sleeping quality and sometimes severely affect their daily life the next day.

[0003] In view of the above kicking-quilt situations which may occur to the children or patients, some techniques are developed for alerting the parents or health workers when this kicking-quilt event takes place. These techniques are collectively referred to as "Tipi" alarm techniques. In
20 the existing Tipi alarm techniques, whether the child kicked the quilt or not is determined simply by measuring the temperature of the children's skin through one temperature sensor and comparing the measured temperature with a pre-determined threshold. If the measured temperature is less than the pre-determined threshold, then it may be determined that the child at issue kicked the quilt and is very likely to get cold. However, this Tipi solution works only on the most ideal circumstance as
25 shown in **FIG. 1**.

[0004] The plot as illustrated in **FIG. 1** shows a monitoring curve of skin temperature changes occurring at February 5, from 01:06:03 am to 04:04:01 am for a child. As shown, the horizontal axis denotes monitoring times with a time interval of 4 minutes and 14 seconds, and the vertical axis denotes monitored skin temperatures with a 5 degree interval. From the curve, it can be seen that,
30 for the most of the above timeframe, the skin temperature of the child remains relatively stable and,

at about 03:03:00 am, the skin temperature sharply drops. Due to this sharp dropping, the existing Tipi alarm technique may simply make a judgment that the kicking-quilt event occurs at the 03:03:00 am and may further warn the parents to cover the quilt for the child.

[0005] However, the actual skin temperature during sleeping at nighttime frequently changes, and most importantly, not every temperature changing is caused by Tipi, but due to other situations, for example, dreaming, fever etc., according to real temperature data from the experiment shown in FIG. 2.

[0006] As seen from FIG. 2, the monitored skin temperatures dramatically drop nearly five times as indicated by the arrows. According to the existing Tipi technique, there would be five times of warning to the parents accordingly. However, according to the experiment's statistics, some of these temperature-dropping are not due to the kicking-quilt but due to the dreaming. Therefore, the existing Tipi technique may provide some false alarms and if such false alarms are numerous, it may definitely get parents annoyed and exhausted.

SUMMARY

[0007] In order to diminish or alleviate at least some of the above problems, some example embodiments of the subject matter defined herein would provide effective and efficient manners for precisely monitoring the skin-surface and ambient temperature changes and providing correct and true alarms for events, such as the Tipi, thereby avoiding the false alarms as much as possible and giving the alarm accuracy a big boost.

[0008] According to one aspect of the present disclosure, there is provided a method, which comprises measuring a skin-surface temperature at a first temperature sensor element at a measuring rate. The method also comprises measuring an ambient temperature at a second temperature sensor element at the measuring rate. The method further comprises calculating a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval. The method further comprises determining, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold. The method additionally comprises selecting whether or not to trigger an alarm based on a result of the determining.

[0009] According to another aspect of the present disclosure, there is provided an apparatus, which comprises a first temperature sensor element for measuring a skin-surface temperature. The apparatus also comprises a second temperature sensor element for measuring an ambient temperature. The apparatus further comprises a communication interface for communicating with at least one external device. The apparatus also comprises at least one processor and at least one memory including computer program code, wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least to measure the skin-surface temperature at the first temperature sensor element at a measuring rate. The at least one memory and the computer program code are also configured to, working with the at least one processor, cause the apparatus at least to measure the ambient temperature at the second temperature sensor element at the measuring rate. The at least one memory and the computer program code are also configured to, working with the at least one processor, cause the apparatus at least to calculate a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval. The at least one memory and the computer program code are further configured to, working with the at least one processor, cause the apparatus at least to determine, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold. The at least one memory and the computer program code are additionally configured to, working with the at least one processor, cause the apparatus at least to select whether or not to trigger an alarm based on a result of the determining.

[0010] According to one aspect of the present disclosure, there is provided a method which comprises receiving temperature data from a thermometer apparatus, wherein the thermometer apparatus comprises a first temperature sensor element for measuring a skin-surface temperature at a measuring rate and a second temperature sensor element for measuring an ambient temperature at the measuring rate. The method also comprises calculating, based on the received temperature data, a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval. The method further comprises determining, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold. The method additionally comprises selecting whether or not to trigger an alarm based on a result of the determining.

[0011] According to another aspect of the present disclosure, there is provided an apparatus, which comprises at least one processor and at least one memory including computer program code. The at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least to receive temperature data from a thermometer apparatus, wherein the thermometer apparatus comprises a first temperature sensor element for measuring a skin-surface temperature at a measuring rate and a second temperature sensor element for measuring an ambient temperature at the measuring rate. The at least one memory and the computer program code are also configured to, working with the at least one processor, cause the apparatus at least to calculate, based on the received temperature data, a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval. The at least one memory and the computer program code are further configured to, working with the at least one processor, cause the apparatus at least to determine, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold. The at least one memory and the computer program code are additionally configured to, working with the at least one processor, cause the apparatus at least to select whether or not to trigger an alarm based on a result of the determining.

[0012] According to one aspect of the present disclosure, there is provided an apparatus, which comprises means for measuring a skin-surface temperature at a first temperature sensor element at a measuring rate. The apparatus also comprises means for measuring an ambient temperature at a second temperature sensor element at the measuring rate. The apparatus further comprises means for calculating a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval. The apparatus further comprises means for determining, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold. The apparatus additionally comprises means for selecting whether or not to trigger an alarm based on a result of the determining.

[0013] According to another aspect of the present disclosure, there is provided an apparatus, which comprises means for receiving temperature data from a thermometer apparatus, wherein the thermometer apparatus comprises a first temperature sensor element for measuring a skin-surface temperature at a measuring rate and a second temperature sensor element for measuring an ambient

temperature at the measuring rate. The apparatus also comprises means for calculating, based on the received temperature data, a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval. The apparatus further comprises means for determining, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold. The apparatus additionally comprises means for select whether or not to trigger an alarm based on a result of the determining.

[0014] According to another embodiment, a computer-readable storage medium carries one or more sequences of one or more instructions which, when executed by one or more processors, cause, at least in part, an apparatus to perform steps of the methods according to some aspects of the present disclosure.

[0015] Still other aspects, features, and advantages of the present disclosure are readily apparent from the following detailed description, simply by illustrating a number of particular embodiments and implementations. The present disclosure is also capable of other and different embodiments, and its several details can be modified in various respects, all without departing from the spirit and scope of the present disclosure. Accordingly, the drawings and description are to be regarded as illustrative in nature, and not as restrictive.

[0016] The apparatuses as discussed above in some aspects of the present disclosure are fitted with any mobile devices which are capable of providing alarms to the users, such as the parents with young children or medical staff with patients. In this manner, the movements of the children or patient, such as those engendering Tipi, may be well tracked and thereby the parents or medical staff may be timely and properly warned when such movements arise. Further, based on tracking the speed of temperature change rates of the two temperature sensor elements, it may result in fewer false alarms and improvements of the alarm accuracy. Thereby, the parents, who may sleep in their own room, would have good sleep since it is unnecessary for them to constantly worry about whether their child or children kick the quilt and frequently go to check whether the child is well covered with the quilt.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The embodiments of the invention are illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings:

[0018] FIG. 1 is a plot schematically illustrating a monitoring curve of skin-surface temperature changes;

[0019] FIG. 2 is another plot schematically illustrating another monitoring curve of skin-surface temperature changes;

5 [0020] FIG. 3 is a schematic diagram illustrating a thermometer apparatus through which some example embodiments of the present disclosure may be practice;

[0021] FIG. 4 is a schematic flowchart of a method for detecting body-related temperature changes according to some example embodiments of the present disclosure;

10 [0022] FIG. 5 is a schematic diagram illustrating a process for obtaining change rates of the skin-surface temperatures and the ambient temperatures, respectively, according to some example embodiments of the present disclosure;

[0023] FIG. 6 is a schematic diagram illustrating a process for obtaining an averaged change rate difference according to some example embodiments of the present disclosure;

15 [0024] FIG. 7 is a schematic plot illustrating experimental temperature data obtained during a period of time from the skin-surface temperature sensor element and the ambient temperature sensor element, respectively, according to some example embodiments of the present disclosure;

[0025] FIGs. 8a-8b are schematic plots illustrating change rates of the skin-surface temperatures and the ambient temperatures, respectively, according to some example embodiments of the present disclosure;

20 [0026] FIG. 9 is a schematic plot illustrating change rate differences between the skin-surface temperatures and the ambient temperatures according to some example embodiments of the present disclosure;

[0027] FIG. 10 is a schematic plot illustrating averaged change rate differences according to some example embodiments of the present disclosure;

25 [0028] FIG. 11 is a schematic plot illustrating final results that may trigger alarms according to some example embodiments of the present disclosure;

[0029] FIG. 12 is a schematic diagram illustrating an interaction between the thermometer apparatus as illustrated in FIG. 3 and an external device according to some example embodiments of the present disclosure;

[0030] FIG. 13 is a flowchart of another method for detecting body-related temperature changes according to some example embodiments of the present disclosure; and

[0031] FIG. 14 is a schematic block diagram of an apparatus (for example, mobile terminal) that may be used to implement some example embodiments of the present disclosure.

DESCRIPTION OF SOME EMBODIMENTS

[0032] Examples of methods, apparatuses, and a computer-readable storage medium for detecting body-related temperature changes are disclosed. In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of various embodiments of the present disclosure. It is apparent, however, to one skilled in the art that the embodiments of the present disclosure may be practiced without these specific details or with an equivalent arrangement. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring the embodiments of the present disclosure.

[0033] FIG. 3 is a schematic diagram illustrating a thermometer apparatus 10 through which some example embodiments of the present disclosure may be practiced. As illustrated in FIG. 3, the thermometer apparatus 10 according to some example embodiments of the present disclosure mainly includes two portions, that is, a temperature data collecting portion and a temperature data processing portion. The temperature data collecting portion, among other thing, may include a first temperature sensor element 12, a second temperature sensor element 13, and a thermal insulating layer 14 arranged therebetween. The first temperature sensor element 12 may be used to measure a skin-surface temperature of a body, such as human-body, for example, a child's body or a patient's body, whose night activities and rest should be taken care of. The skin-surface temperature may be progressively dropping due to the kicking of quilt, for example, the occurrence of the Tipi event. The second temperature sensor element 13 may be used to measure an ambient temperature. The ambient temperature may be a temperature in the quilt or blanket when the quilt

or the blanket well covers the child. The ambient temperature may turn to be a temperature of, for example, a sleeping room or a bedroom when the Tipi event takes place.

[0034] The first temperature sensor element **12** and the second temperature sensor element **13** herein may be implemented by any suitable existing thermo sensors, such as those available from the current market, for example, thermo sensors from Texas Instruments. The thermal insulating layer **14** herein may be made from any suitable thermal isolation material, such as thermal isolation cotton, as long as such thermal isolation material may efficiently reduce or eliminate heat transfer between the first temperature sensor element **12** and the second temperature sensor element **13**. Accordingly, the thickness of the thermal insulating layer **14** may be determined based upon the requirements for the thermal isolation and may be further customized in view of the whole size of the thermometer apparatus **10**, which, in some embodiments, is preferred to be small such that it is more easily to be portable and hand-held, and may be adapted to the skin-surface without causing irritation or discomfort to a sleeping child.

[0035] It is to be understood that the temperature data collecting portion may include one or more interfaces, which, may connect the temperature data collecting portion to the temperature data processing portion via data buses, address buses and control buses. In this manner, the temperature data sampled by the first temperature sensor elements **12** and **13** at a certain measuring or sampling rate may be transmitted to the temperature data processing portion for further processing. The transmission herein may be carried out on a regular basis according to the configuration and could be suspended or stopped by user input or at a pre-determined time.

[0036] The temperature data processing portion, among other things, may include a central processing unit ("CPU", or a processor) **15** and a memory **16** containing computer program code. The CPU **15** may be of any type suitable to the local technical environment, and may include one or more of general purpose processors, special purpose processors, microprocessors, digital signal processors ("DSPs") and processors based on multi-core processor architecture, as non-limiting examples. The computer program code is assumed to include instructions that, when executed by the CPU **15**, enable the thermometer apparatus **10** to operate in accordance with some example embodiments of the present disclosure, as will be discussed later with respect to the method **20** in reference to **FIGs. 4-11**.

[0037] In various embodiments, the temperature data processing portion may further include a number of the peripheral interfaces, such as a wireless interface 17, a display 18 and a keyboard 19 as shown.

[0038] The wireless interface 17 may be selected from suitable wireless interfaces that are compatible to the existing or future-developed short-range wireless networking techniques, such as Bluetooth, Wi-Fi, and the like. With this wireless interface 17, the thermometer apparatus 10, in some embodiments, may communication in real time with an external device, such as a wireless terminal, for example, a cellphone, a smart phone, a laptop computer, a hand-held computer, a tablet computer, a tab, and etc.

[0039] This way, in some example embodiments of the present disclosure, upon a detection of a Tipi event through the methods as proposed by the present disclosure, the thermometer apparatus 10 may transmit an alarm message to the external device such that the user (for example, parents sleeping in a different bedroom) of the external device may be informed of an occurrence of a Tipi event. In some other example embodiments of the present disclosure, the temperature data measured by the first and second temperature sensor elements 12 and 13 may be transmitted to the external device or apparatus via the wireless interface 17 such that the methods as proposed may be merely implemented at the external device or apparatus. In other words, the external device or apparatus may determine whether a Tipi event takes place based on the received temperature data and may trigger an alarm action, such as initiating an alarm including at least one of an audible alarm, a visible alarm, and a vibrating alarm, upon determining occurrence of such Tipi event.

[0040] The display 18 is used to display to the user, or more particularly, the parents or the healthcare workers, information such as temperature graphs, temperature statistics data, the number of the alarmed Tipi events in a previous day or in the last week, and etc. The display 18 may be one of a liquid crystal display (LCD), a light emitting diode (LED) display, an organic LED (OLED) display, and a touch-sensitive display that allows input by simply touching the display screen with a finger, a stylus or a pen.

[0041] The keyboard 19 may be a simple numeric keyboard, a standard QWERTY keyboard or a virtual keyboard, which is presented on the touch-sensitive display upon a user touch. The keyboard 19 may be used to input commands or user preference items into the thermometer apparatus 10, such as for selecting an appropriate operation mode according to, for example, the age

of the child to be monitored, setting a monitored time period, and a measuring or sampling rate for collecting the skin-surface temperature and the ambient temperature.

[0042] In some example embodiments, in addition to or in lieu of the keyboard 19, the thermometer apparatus 10 may additionally include a remote-control for controlling menus items presented on the display 18 and issuing commands associated with menus items presented on the display 18. The commands may include, for example, turning on or turning off the thermometer apparatus 10, setting the time period to be monitored, such as from 10:00 pm of the day to 06:30 am of the next day, and selecting operating modes, such as those provided for different children with different ages or different body mass.

[0043] It should be noted that FIG. 3 is shown for an illustrative purpose and a person skilled in the art is able to understand that the thermometer apparatus 10 may be designed in one piece with an elastic strip or a wrapping elastic band such that the thermometer apparatus 10 could be worn by the children or patients in a variety of ways. For example, the parents or the health staff may have the thermometer apparatus 10 worn at the children's wrist, elbow or ankle. In an embodiment, the thermometer apparatus 10 may be manufactured as a patch with, for example, a size and a shape similar to a button, which may be pasted on a belly or a thigh of a child, thereby delivering more convenience and comfort.

[0044] FIG. 4 is a schematic flowchart of a method 20 for detecting body-related temperature changes according to some example embodiments of the present disclosure. According to some example embodiments of the present disclosure, the method 20 may be implemented by the thermometer apparatus 10 as illustrated in FIG. 3.

[0045] As illustrated in FIG. 4, the method 20, at S21, measures a skin-surface temperature at a first temperature sensor element at a measuring rate and, at S22, measures an ambient temperature at a second temperature sensor element at the measuring rate. The first and second temperature sensor elements herein may be identical to the first and second temperature sensor elements 12 and 13 as illustrated in FIG. 3 and therefore may be implemented by any suitable existing temperature sensors. The measuring rate herein may be an appropriate sampling rate at which the first and second temperature sensor elements may measure and obtain the temperature data with respect to the skin-surface temperatures and the ambient temperatures. For example, the first and second

temperature sensor elements may measure the skin-surface and the ambient temperature per two seconds.

[0046] At S23, the method 20 calculates a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval.

5 The time interval herein may be a time duration (" T_{Duration} ") based on which one first change rate for the skin-surface temperature and one second change rate for the ambient temperature could be obtained. For example, in one embodiment, one first change rate for the skin-surface temperature may be obtained by a temperature difference between the skin-surface temperature measured at present and the skin-surface temperature measured at T_{Duration} ago divided by the T_{Duration} .
10 Likewise, one second change rate for the ambient temperature may equally be obtained in this manner.

[0047] At S24, the method 20 determines, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold.

15 [0048] At S25 the method 20 selects whether or not to trigger an alarm based on a result of the determining.

[0049] In some example embodiments of the present disclosure, the determining at S24 may include calculating, at S241, a change rate difference between each of the plurality of first change rates and a corresponding one of the plurality of second change rates to obtain a plurality of change
20 rate differences. At S242, the plurality of change rate differences may be averaged to obtain an averaged change rate difference. At S243, the averaged change rate difference may be compared with the threshold to determine whether or not to trigger the alarm.

[0050] In some example embodiments of the present disclosure, the selecting whether or not to trigger the alarm at S25 may comprise selecting to trigger the alarm in response to the averaged
25 change rate difference being less than the threshold at S251. Thereby, at S252, an alarm message may be transmitted to an external device such that the external device performs an alarm action upon receipt of the alarm message.

[0051] As mentioned before, the external device herein may be a mobile station, such as a smart phone, which may have been kept near the parents, for example, on a bedside table. When the
30 alarm message is received from the thermometer apparatus 10, the smart phone may be triggered to

raise one of an audible alarm, a visible alarm, and a vibrating alarm to the parents according to the user's preference and configuration. After that, the parents may be waked up by the alarm and immediately know that their child is sleeping naked, for example, the quilt being kicked. Then, the parents may go to the child's bedroom and cover the quilt for him or her quickly.

5 [0052] In some example embodiments of the present disclosure, the selecting whether or not to trigger the alarm at S25 may comprise selecting not to trigger the alarm in response to the averaged change difference rate being equal to or greater than the threshold at S253.

[0053] From the above descriptions with reference to FIG. 4, it is to be understood that alarm accuracy for informing the parents or healthcare workers of the occurrence of the Tipi or Tipi-like events could be notably improved based on whether the ambient temperature change rate (or dropping speed) is faster than the skin-surface temperature change rate (or dropping speed). Further, based on a proper threshold, which may be determined according to experimental statistics, the number of the false alarms.

15 [0054] For a better understanding of the example embodiments of the present disclosure, the following will elaborate details of how to determine and trigger an alarm message to the external device via pseudo codes together with reference to FIGs. 5-11.

[0055] Below are example pseudo codes according to some example embodiments of the present disclosure:

[0056] Set $T_{\text{sensor1}} = TA$ $T_{\text{sensor2}} = TB$

20 [0057] /*TA denotes a skin-surface temperature as measured by the first temperature sensor element 12 as shown in FIG. 3, and TB denotes an ambient temperatures as measured by the second temperature sensor element 13 as shown in FIG. 3. Assume T_{body} denotes skin temperature. After the child sleeps for a while with the thermometer apparatus 10 attached to the child and inside the quilt, based on the heat exchange principle, $TA = T_{\text{body}}$, and after a period of time, $TB = TA$, that is, $TB = TA = T_{\text{body}}$. If the quilt is kicked, the skin-surface temperature and the ambient temperature (temperature inside the quilt and outside the quilt when the kicking arise) changes but the temperature changing rate is different.*/

25 [0058] Set $t1 = 60$ /*a unit interval which lasts about 2 minutes (for example, 120 seconds) in time duration, assuming that the first temperature sensor element 12 measures or samples the skin-surface temperature every 2 seconds. This unit interval is shown in FIG. 5, which spans from the

TA (t-t1) to the TA (t) or from the TB(t-t1) to the TB (t), wherein the “t” denotes a location of the present time (indicated by “60” at 31) and “t-t1” denotes a location of a time that is t1 ago (indicated by “1” at 31), both depicted in a form of a small box, each lasting 2 seconds*/

[0059] Set $S1 = \frac{TA(t) - TA(t-t1)}{t1}$ /*which is a changing rate of TA in the unit interval t1, as

5 illustrated at 31 in FIG. 3, and which may be expressed in degrees/second, for example, C/sec */

[0060] Set $S2 = \frac{TB(t) - TB(t-t1)}{t1}$ /*which is a changing rate of TB in the unit interval t1, as

illustrated at 34 in FIG. 3, and which may also be expressed in degrees/second */

[0061] Set $S3 = S2 - S1$ /*which is to calculate a change rate difference between S1 and S2 and the first S3 is obtained at the box 60 where the first S1 and the first S2 have been calculated and thus a mutual difference (for example, the first S3) could be obtained */

[0062] Set $t2 = 20$ /*a unit interval which lasts about 40 seconds. After the duration of the t2, twenty S3s would be obtained, as indicated in FIG. 6 at 41, 42, and 43*/

[0063] Set $S4 = \frac{S3(t) + S3(t-1) + S3(t-2) + \dots + S3(t-t2)}{t2}$ /* which is to average the plurality

15 of change rate differences S3 that are obtained in the duration of “t2” to obtain an averaged change rate difference, as indicated in FIG. 6, at 41, 42 and 43, and which may be expressed in degrees/second², for example, C/sec² */

[0064] If (S1<0) and (S2<0)

[0065] Then Return S4 /*that is, if the temperature change of one of the skin-surface temperature and the ambient temperature is rising rather than dropping, then loop the flow from the beginning */

[0066] ELSE Return 0 /*meaning that the flow will proceed*/

[0067] Set $Smin = -0.015$ /*a threshold which could be set based upon empirical values */

[0068] IF $S4 < Smin$

[0069] THEN Return RESULT=“Tipi” /*which is to trigger an alarm since the averaged change rate difference S4 is less than the threshold */

[0070] It should be noted that the above example pseudo codes are only illustrative of the method according to the present disclosure and the method should not be limited to this specific form. A person skilled in the art may amend, revise or modify some of these pseudo codes based upon the teaching of the present disclosure in connection with various example embodiments such that the method could achieve high operation efficiency or accomplish other additional tasks.

[0071] The below will further illustrate the processing operations as shown in the above pseudo codes using experimental temperature data, with reference to **FIGs. 7-11**.

[0072] **FIG. 7** is a schematic plot illustrating experimental temperature data obtained during a period of time from the skin-surface temperature sensor element and the ambient temperature sensor element, respectively, according to some example embodiments of the present disclosure.

[0073] As illustrated in **FIG. 7**, a changing trend of TA and changing trend of TB are respectively shown according to the real temperature changing data obtained from experiments. The real Tipi event happened at observation points **51** and **54**, that are, around at 23:51 pm and 3:29 am.

[0074] **FIG. 8a** and **FIG. 8b** are schematic plots illustrating change rates of the skin-surface temperatures and the ambient temperatures (**S1** and **S2**), respectively, obtained based on the same experimental temperature data. **FIG. 9** shows a schematic plot illustrating change rate differences (**S3**) between the skin-surface temperatures and the ambient temperatures based on the **S1** and **S2** that are respectively illustrated in **FIGs. 8a** and **8b**. As can be seen from **FIG. 9**, although the values of **S3** are obtained, it is still not easy to identify the occurrence of Tipi event due to noise. To this end, according to the above pseudo codes, this noise may be filtered out by averaging the plurality of change rate differences **S3**, that is, calculating the averaged change rate differences **S4**, which is illustrated in **FIG. 10**.

[0075] Further noise could be filtered out based on the below pseudo codes:

[0076] IF ($S1 < 0$) AND ($S2 < 0$) THEN Return S4

[0077] ELSE Return 0

[0078] As shown in **FIGs. 8a** and **8b**, both **S1** and **S2** are lower than 0 at several points such as 23:51pm and 3:29 am, then these points could be excluded and further results are obtained as shown in **FIG. 11**.

[0079] **FIG. 11** is a schematic plot illustrating final results that may trigger alarms according to some example embodiments of the present disclosure.

[0080] As mentioned before, a threshold $S_{min} = -0.015$ is set and based on this threshold, it can be seen from **FIG. 11** that the values of **S4** at the points around 23:51 pm (“91” as shown) and 3:29 am (“92” as shown) are less than the threshold S_{min} . As a result, it can be determined that Tipi event may occur at these two points **91** and **92**.

[0081] The above discusses in detail about the algorithm as proposed by the present disclosure to determine the actual Tipi event. However, these discussions are only for illustrative purposes and a person skilled in the art may add or modify some steps or operations to achieve additional effect without deviating from the spirit and scope of the present disclosure. For example, although the threshold $S_{min} = -0.015$ is applied herein, the value of the threshold may not be limited to this specific one but could be properly selected from a range, such as $-0.010 \sim -0.030$ or $-0.007 \sim -0.017$ as shown in **FIG. 11**, such that different alarm requirements or modes may be achieved.

[0082] **FIG. 12** is a schematic diagram illustrating an interaction between the thermometer apparatus **10** as illustrated in **FIG. 3** and an external device **102** according to some example embodiments of the present disclosure. As previously discussed with reference to **FIG. 3**, the interaction between the thermometer apparatus **10** and the external device **102** could be implemented by one or more wireless interfaces (or modules) built in the thermometer apparatus **10**. The wireless interface herein may be compatible with short-range wireless communication standards, for example Bluetooth, Wi-Fi (802.11), near field communication (“NFC”), ZigBee, Wimedia, IrDA, to name a few.

[0083] In some example embodiments of the present disclosure, the thermometer apparatus **10** may measure and collect the temperature data regarding the skin-surface temperature and the ambient temperature and further determine whether or not to trigger an alarm, as discussed previously with reference to **FIG. 4**.

[0084] In some example embodiments of the present disclosure, the temperature data with respect to the skin-surface temperature and the ambient temperature may be transferred wirelessly to the external device through the wireless interface. By means of the collection of the temperature data from the thermometer apparatus **10**, the external device **102** may by itself determine to raise an alarm if the ambient temperature change rate is faster than the skin-surface temperature change rate

by the threshold. In other words, the external device **102** may play a role of a decision-maker to issue an alarm instead of the thermometer apparatus **10**. In this manner, the thermometer apparatus **10** is only responsible for collecting the skin-surface temperature and the ambient temperature and transferring the collected temperature data to the external device and thereby the processing and storage cost of the thermometer apparatus **10** could be notably lowered since most of the operations would be carried out at the external device **102**.

[0085] For a better understanding of the above example embodiments, the following will describe the operations implemented by the external device for determining whether an alarm is necessary with reference to **FIG. 13**.

[0086] **FIG. 13** is a flowchart of another method **110** for detecting body-related temperature changes according to some example embodiments of the present disclosure. It is to be understood that the method **110** may be performed by the external device or apparatus.

[0087] As illustrated in **FIG. 13**, the method **110** receives, at **S111**, temperature data from a thermometer apparatus, wherein the thermometer apparatus comprises a first temperature sensor element for measuring a skin-surface temperature at a measuring rate and a second temperature sensor element for measuring an ambient temperature at the measuring rate. The thermometer apparatus herein may be identical to the one shown and discussed with reference to **FIG. 3**.

[0088] Then, at **S112**, the method **110** calculates, based on the received temperature data, a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval.

[0089] After calculating the plurality of first and second change rates, the method **110** proceeds to **S113**, at which the method **110** determines, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold. Then, at **S114**, the method **110** selects whether or not to trigger an alarm based on a result of the determining.

[0090] In some embodiments of the present disclosure, the determining as performed at **S113** may comprise calculating a change rate difference between each of the plurality of first change rates and a corresponding one of the plurality of second change rates to obtain a plurality of change rate differences at **S115**. Then, at **S116**, the plurality of change rate differences may be averaged to

obtain an averaged change rate difference. After that, at **S117**, the averaged change rate difference may be compared with the threshold to determine whether or not to trigger the alarm.

[0091] In some example embodiments of the present disclosure, the selecting whether or not to trigger the alarm at **S114** may comprise selecting to trigger the alarm in response to the averaged change rate difference being less than the threshold at **S118** and selecting not to trigger the alarm in response to the averaged change difference rate being equal to or greater than the threshold at **S119**.

[0092] In some example embodiments of the present disclosure, the alarm may include at least one of an audible alarm, a visible alarm, and a vibrating alarm.

[0093] From the above discussions made in reference to **FIG. 13**, it is to be understood that the determining algorithm as proposed by the present disclosure may also be implemented at the external device, such as a smart phone. Since the determining algorithm regarding whether or not to trigger the alarm run at the thermometer apparatus and the one run at the external device are the same, the details about this determining algorithm as discussed with reference to **FIGs. 3 and 4** may be equally applied to the external device and therefore further details are omitted herein for a simplifying purpose. Further, in some example embodiments, whether the thermometer apparatus or the external device to perform the determining algorithm may be configured or selected by the user.

[0100] **FIG. 14** is a schematic block diagram of an apparatus **120** (for example, mobile terminal) that may be used to implement some example embodiments of the present disclosure. In some embodiments, the apparatus **120**, or a portion thereof, constitutes a means for performing one or more steps as discussed with reference to **FIG. 11**. Generally, a radio receiver is often defined in terms of front-end and back-end characteristics. The front-end of the receiver encompasses all of the Radio Frequency ("RF") circuitry whereas the back-end encompasses all of the base-band processing circuitry.

[0101] Pertinent internal components of the apparatus **120** include a Main Control Unit ("MCU") **121**, a Digital Signal Processor ("DSP") **122**, and a receiver/transmitter unit including a microphone gain control unit and a speaker gain control unit. A main display unit **123** provides a display to the user in support of various applications and functions that perform or support the steps as discussed with reference to **FIG. 11**. The display **123** includes display circuitry configured to display at least a portion of a user interface of the apparatus **120**. Additionally, the display **123**

and display circuitry are configured to facilitate user control of at least some functions of the apparatus **120**. An audio function circuitry **124** includes a microphone **125** and microphone amplifier that amplifies the speech signal output from the microphone **125**. The amplified speech signal output from the microphone **125** is fed to a coder/decoder (CODEC) **126**.

5 **[0102]** A radio section **127** amplifies power and converts frequency in order to communicate with a base station, which is included in a mobile communication system, via antenna **128**. The power amplifier (PA) **129** and the transmitter/modulation circuitry are operationally responsive to the MCU **121**, with an output from the PA **129** coupled to the duplexer **130** or circulator or antenna switch, as known in the prior art. The PA **129** also couples to a battery interface and power control
10 unit **131**.

[0103] In use, a user of the apparatus **120** speaks into the microphone **125** and his or her voice along with any detected background noise is converted into an analog voltage. The analog voltage is then converted into a digital signal through the Analog to Digital Converter (ADC) **132**. The control unit **121** routes the digital signal into the DSP **122** for processing therein, such as speech
15 encoding, channel encoding, encrypting, and interleaving. In one embodiment, the processed voice signals are encoded, by units not separately shown, using a cellular transmission protocol such as enhanced data rates for global evolution (EDGE), general packet radio service (GPRS), global system for mobile communications (GSM), Internet protocol multimedia subsystem (IMS), universal mobile telecommunications system (UMTS), etc., as well as any other suitable wireless medium, for
20 example, microwave access (WiMAX), Long Term Evolution (LTE) networks, code division multiple access (CDMA), wideband code division multiple access (WCDMA), wireless fidelity (WiFi), satellite, and the like, or any combination thereof.

[0104] The encoded signals are then routed to an equalizer **133** for compensation of any frequency-dependent impairments that occur during transmission through the air such as phase and
25 amplitude distortion. After equalizing the bit stream, the modulator **134** combines the signal with a RF signal generated in the RF interface **135**. The modulator **134** generates a sine wave by way of frequency or phase modulation. In order to prepare the signal for transmission, an up-converter **136** combines the sine wave output from the modulator **134** with another sine wave generated by a synthesizer **137** to achieve the desired frequency of transmission. The signal is then sent through a
30 PA **129** to increase the signal to an appropriate power level. In practical systems, the PA **129** acts as a variable gain amplifier whose gain is controlled by the DSP **122** from information received from

a network base station. The signal is then filtered within the duplexer **130** and optionally sent to an antenna coupler **138** to match impedances to provide maximum power transfer. Finally, the signal is transmitted via antenna **128** to a local base station. An automatic gain control (“AGC”) can be supplied to control the gain of the final stages of the receiver. The signals may be forwarded from there to a remote telephone which may be another cellular telephone, the thermometer apparatus **10** as illustrated in **FIG. 3**, any other mobile phone or a land-line connected to a Public Switched Telephone Network (“PSTN”), or other telephony networks.

[0105] Voice signals transmitted to the apparatus **120** are received via antenna **128** and immediately amplified by a low noise amplifier (“LNA”) **139**. A down-converter **140** lowers the carrier frequency while the demodulator **141** strips away the RF leaving only a digital bit stream. The signal then goes through the equalizer **133** and is processed by the DSP **122**. A Digital to Analog Converter (“DAC”) **142** converts voice signal and the resulting output is transmitted to the user through the speaker **143**, all under control of a Main Control Unit (MCU) **121** which can be implemented as a Central Processing Unit (“CPU”).

[0106] The MCU **121** receives various signals including input signals from the keyboard **144**. The keyboard **144** and/or the MCU **121** in combination with other user input components (for example, the microphone **125**) comprise a user interface circuitry for managing user input. The MCU **121** runs a user interface software to facilitate user control of at least some functions of the apparatus **120** to, for example, receive the temperature data and determine whether or not to trigger the alarm if a Tipi event is detected. The MCU **121** also delivers a display command and a switch command to the display **123** and to the speech output switching controller, respectively. Further, the MCU **121** exchanges information with the DSP **122** and can access an optionally incorporated SIM card **145** and a memory **146**. In addition, the MCU **121** executes various control functions required of the apparatus **120**.

[0107] The memory device **146** stores various data including call incoming tone data and is capable of storing other data including temperature data received from the thermometer apparatus and computer program codes or instructions for performing each operation as shown in **FIG. 13**. The software module could reside in RAM memory, flash memory, registers, or any other form of writable storage medium known in the art. The memory device **146** may be, but not limited to, a single memory, ROM, RAM, EEPROM, optical storage, magnetic disk storage, flash memory

storage, or any other non-volatile storage medium capable of storing digital data, such as the temperature data.

5 [0108] While the disclosure has been described in connection with a number of embodiments and implementations, the disclosure is not so limited but covers various obvious modifications and equivalent arrangements, which fall within the purview of the appended claims. Although features of the disclosure are expressed in certain combinations among the claims, it is contemplated that these features can be arranged in any combination and order.

WHAT IS CLAIMED IS:

1. A method, comprising:
measuring a skin-surface temperature at a first temperature sensor element at a measuring rate;
5 measuring an ambient temperature at a second temperature sensor element at the measuring rate;
calculating a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval;
determining, based on the plurality of first change rates and the plurality of second change rates,
10 whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold; and
selecting whether or not to trigger an alarm based on a result of the determining.
2. The method according to claim 1, wherein a thermal insulating layer is arranged between the first temperature sensor element and the second temperature sensor element.
- 15 3. The method according to claim 1, wherein the determining comprises:
calculating a change rate difference between each of the plurality of first change rates and a corresponding one of the plurality of second change rates to obtain a plurality of change rate differences;
averaging the plurality of change rate differences to obtain an averaged change rate difference;
20 and
comparing the averaged change rate difference with the threshold to determine whether or not to trigger the alarm.
4. The method according to claim 3, wherein the selecting whether or not to trigger the alarm comprises:
25 selecting to trigger the alarm in response to the averaged change rate difference being less than the threshold.
5. The method according to claim 4, further comprising:
transmitting an alarm message to an external device such that the external device performs an alarm action upon receipt of the alarm message.
- 30 6. The method according to claim 3, wherein the selecting whether or not to trigger the alarm comprises:

selecting not to trigger the alarm in response to the averaged change difference rate being equal to or greater than the threshold.

7. An apparatus, comprising:

a first temperature sensor element for measuring a skin-surface temperature;
a second temperature sensor element for measuring an ambient temperature;
a communication interface for communicating with at least one external device;
at least one processor,
at least one memory including computer program code,

wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least to:

measure the skin-surface temperature at the first temperature sensor element at a measuring rate;

measure the ambient temperature at the second temperature sensor element at the measuring rate;

calculate a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval;

determine, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold; and

select whether or not to trigger an alarm based on a result of the determining.

8. The apparatus according to claim 7, wherein a thermal insulating layer is arranged between the first temperature sensor element and the second temperature sensor element.

9. The apparatus according to claim 7, wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least to:

calculate a change rate difference between each of the plurality of first change rates and a corresponding one of the plurality of second change rates to obtain a plurality of change rate differences;

average the plurality of change rate differences to obtain an averaged change rate difference;

and

compare the averaged change rate difference with the threshold to determine whether or not to trigger the alarm.

10. The apparatus according to claim 9, wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least to:

5 select to trigger the alarm in response to the averaged change rate difference being less than the threshold.

11. The apparatus according to claim 10, wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least to:

10 transmit an alarm message to an external device via the communication interface such that the at least one external device performs an alarm action upon receipt of the alarm message.

12. The apparatus according to claim 9, wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least to:

15 select not to trigger the alarm in response to the averaged change difference rate being equal to or greater than the threshold.

13. A method, comprising:

20 receiving temperature data from a thermometer apparatus, wherein the thermometer apparatus comprises a first temperature sensor element for measuring a skin-surface temperature at a measuring rate and a second temperature sensor element for measuring an ambient temperature at the measuring rate;

calculating, based on the received temperature data, a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval;

25 determining, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold; and

selecting whether or not to trigger an alarm based on a result of the determining.

14. The method according to claim 13, wherein the determining comprises:

30 calculating a change rate difference between each of the plurality of first change rates and a corresponding one of the plurality of second change rates to obtain a plurality of change rate differences;

averaging the plurality of change rate differences to obtain an averaged change rate difference;

and

comparing the averaged change rate difference with the threshold to determine whether or not to trigger the alarm.

15. The method according to claim 14, wherein the selecting whether or not to trigger the
5 alarm comprises:

selecting to trigger the alarm in response to the averaged change rate difference being less than the threshold.

16. The method according to claim 14, wherein the selecting whether or not to trigger the
10 alarm comprises:
selecting not to trigger the alarm in response to the averaged change difference rate being equal to or greater than the threshold.

17. The method according to any of claims 13-16, wherein the alarm includes at least one of an audible alarm, a visible alarm, and a vibrating alarm.

18. An apparatus, comprising:
15 at least one processor,
at least one memory including computer program code,
wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least to:

20 receive temperature data from a thermometer apparatus, wherein the thermometer apparatus comprises a first temperature sensor element for measuring a skin-surface temperature at a measuring rate and a second temperature sensor element for measuring an ambient temperature at the measuring rate;

25 calculate, based on the received temperature data, a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval;

determine, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold; and

select whether or not to trigger an alarm based on a result of the determining.

30 19. The apparatus according to claim 18, wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least to:

calculate a change rate difference between each of the plurality of first change rates and a corresponding one of the plurality of second change rates to obtain a plurality of change rate differences;

average the plurality of change rate differences to obtain an averaged change rate difference;

5 and

compare the averaged change rate difference with the threshold to determine whether or not to trigger the alarm.

20. The apparatus according to claim 19, wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least
10 to:

select to trigger the alarm in response to the averaged change rate difference being less than the threshold.

21. The apparatus according to claim 19, wherein the at least one memory and the computer program code are configured to, working with the at least one processor, cause the apparatus at least
15 to:

select not to trigger the alarm in response to the averaged change difference rate being equal to or greater than the threshold.

22. The apparatus according to any of claims 18-21, wherein the alarm includes at least one of an audible alarm, a visible alarm, and a vibrating alarm.

20 23. An apparatus, comprising:

means for measuring a skin-surface temperature at a first temperature sensor element at a measuring rate;

means for measuring an ambient temperature at a second temperature sensor element at the measuring rate;

25 means for calculating a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval;

means for determining, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold; and

30 means for selecting whether or not to trigger an alarm based on a result of the determining.

24. An apparatus, comprising:

means for receiving temperature data from a thermometer apparatus, wherein the thermometer

apparatus comprises a first temperature sensor element for measuring a skin-surface temperature at a measuring rate and a second temperature sensor element for measuring an ambient temperature at the measuring rate;

5 means for calculating, based on the received temperature data, a plurality of first change rates for the skin-surface temperature and a plurality of second change rates for the ambient temperature over a time interval;

means for determining, based on the plurality of first change rates and the plurality of second change rates, whether an ambient temperature change rate is faster than a skin-surface temperature change rate by a threshold; and

10 means for selecting whether or not to trigger an alarm based on a result of the determining.

25. A computer-readable storage medium carries one or more sequences of one or more instructions, which, when executed by one or more processors, cause, at least in part, an apparatus to perform steps of any of claims 1-6 and 13-17.

15 26. An apparatus comprising means to perform a method according to at least one of claims 1-6.

27. An apparatus comprising means to perform a method according to at least one of claims 13-17.

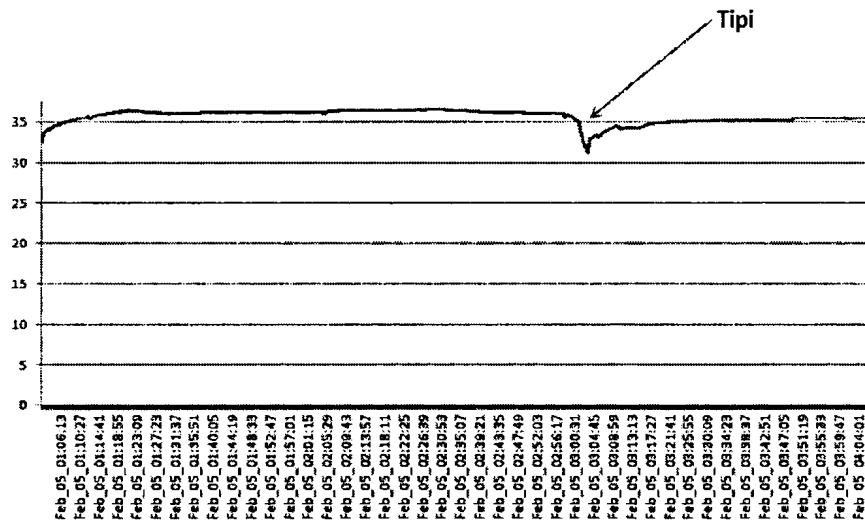


FIG. 1

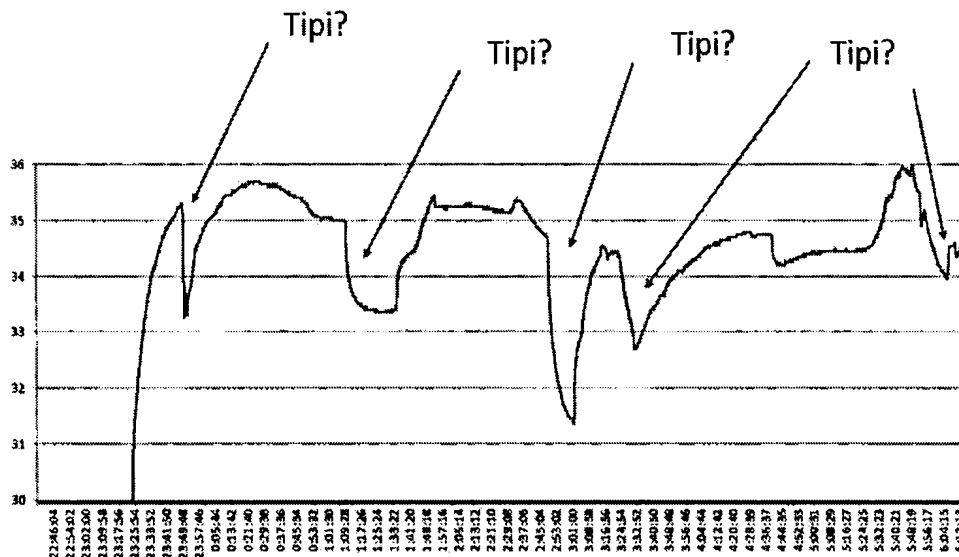


FIG. 2

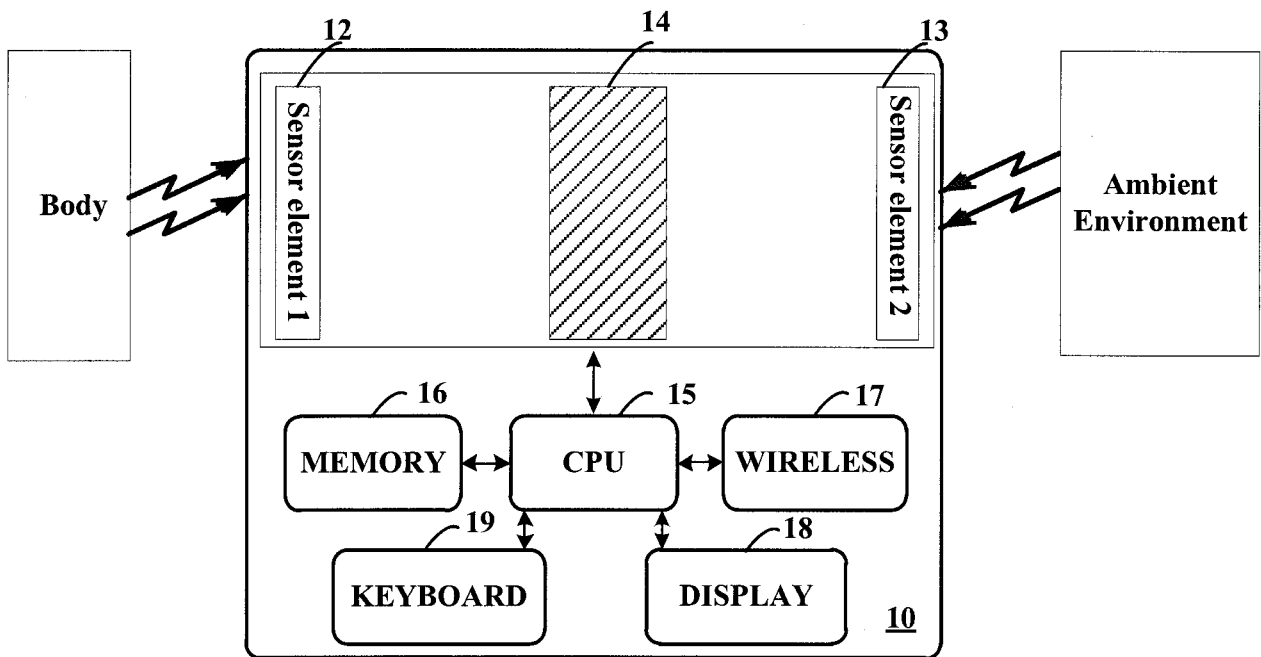
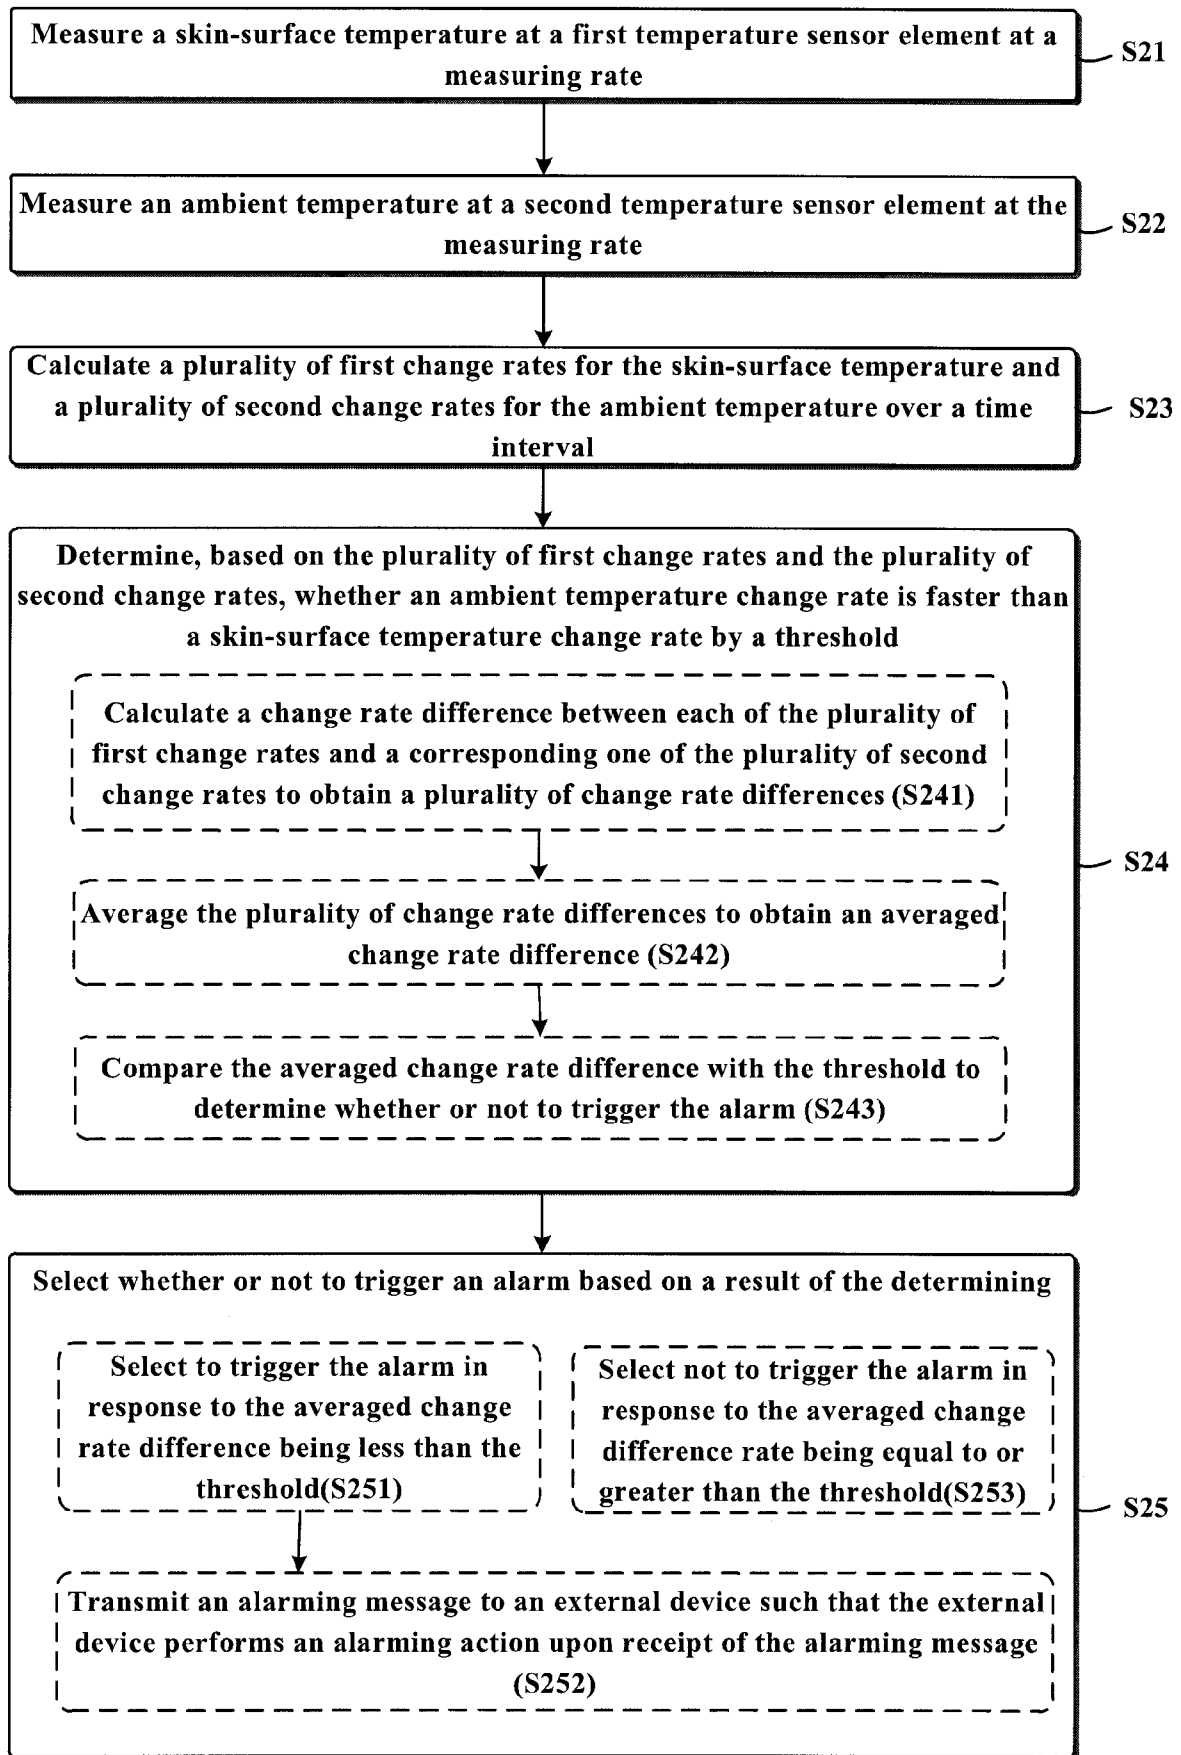


FIG. 3



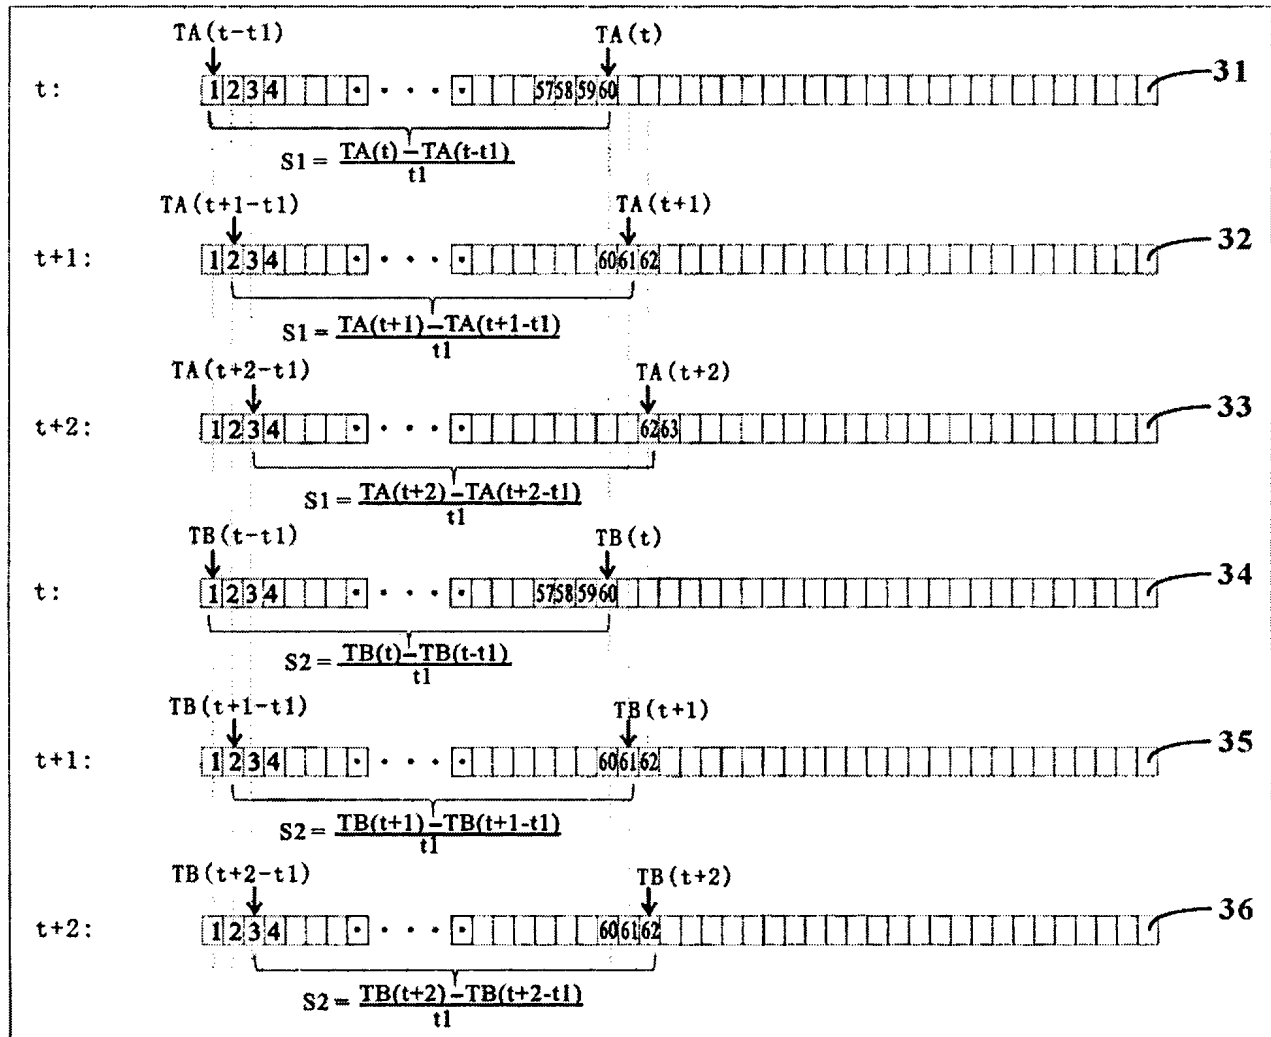


FIG. 5

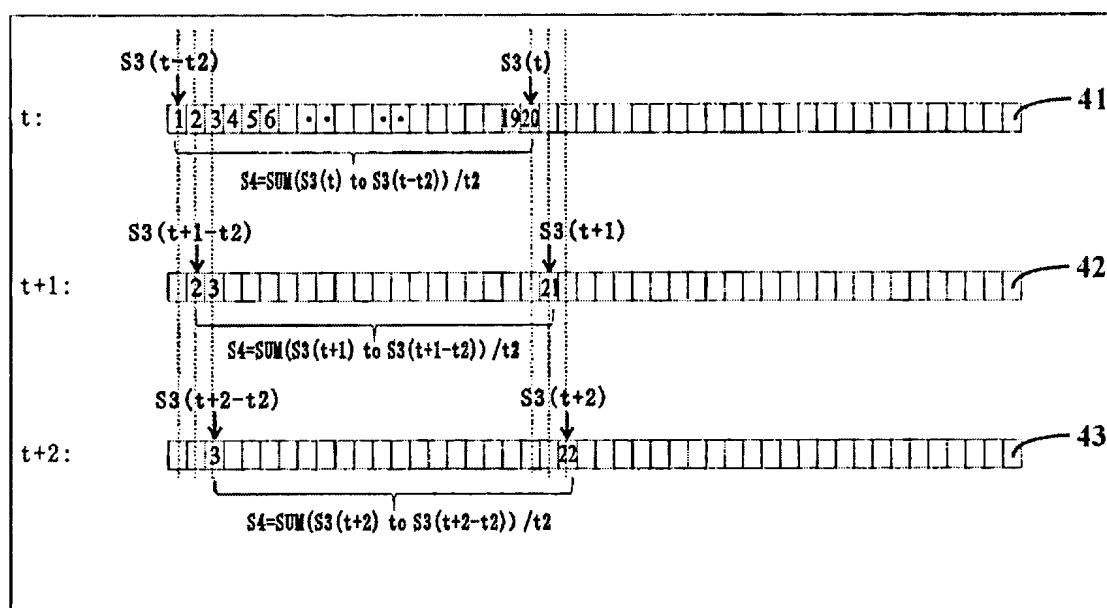


FIG. 6

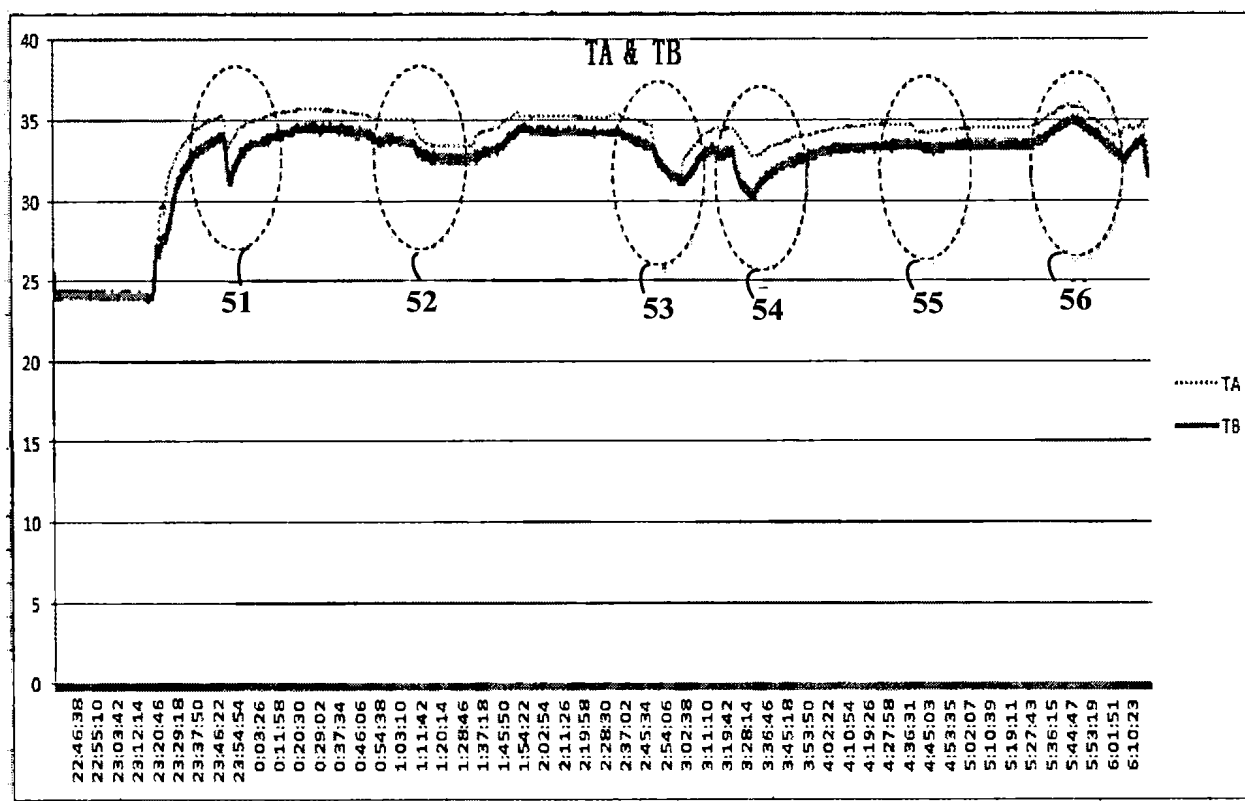


FIG. 7

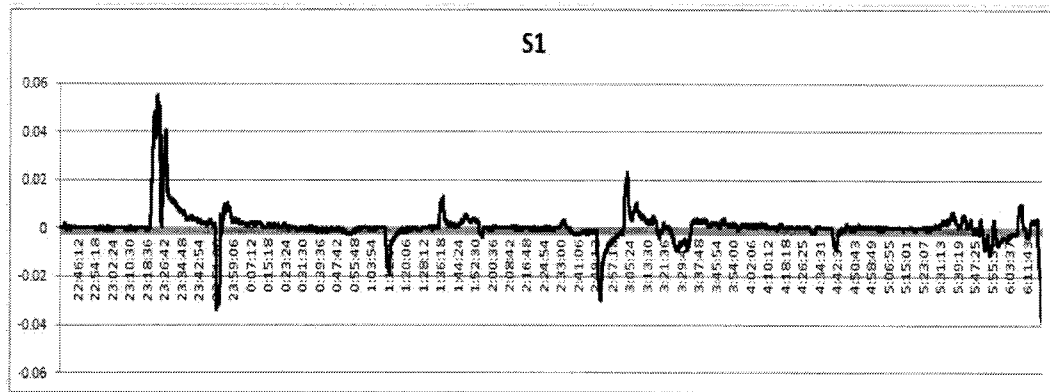


FIG. 8a

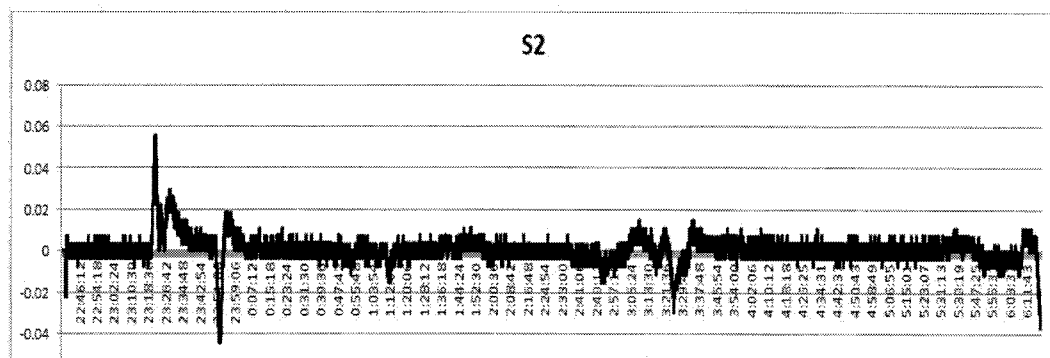


FIG. 8b

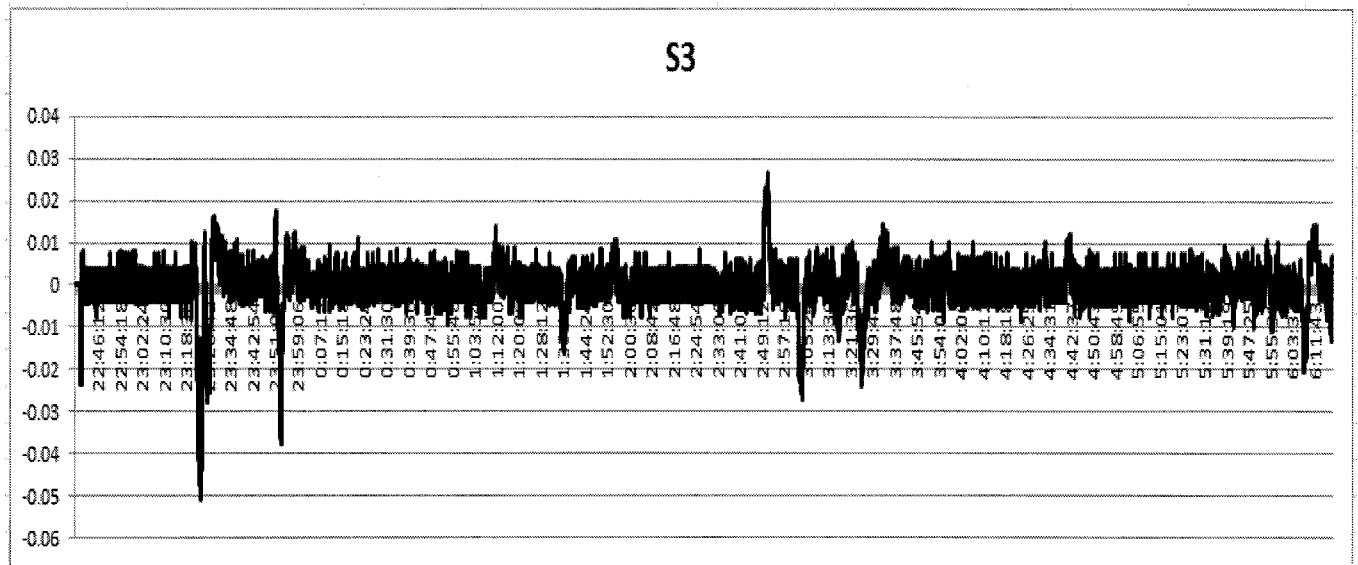


FIG.9

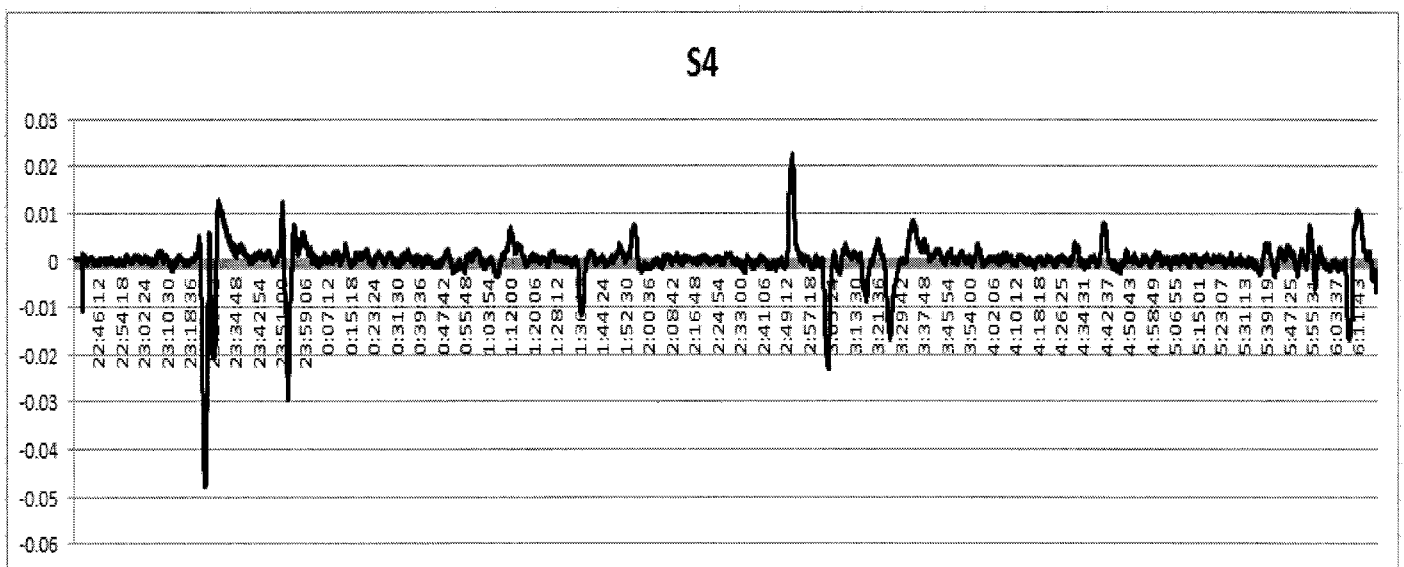


FIG. 10

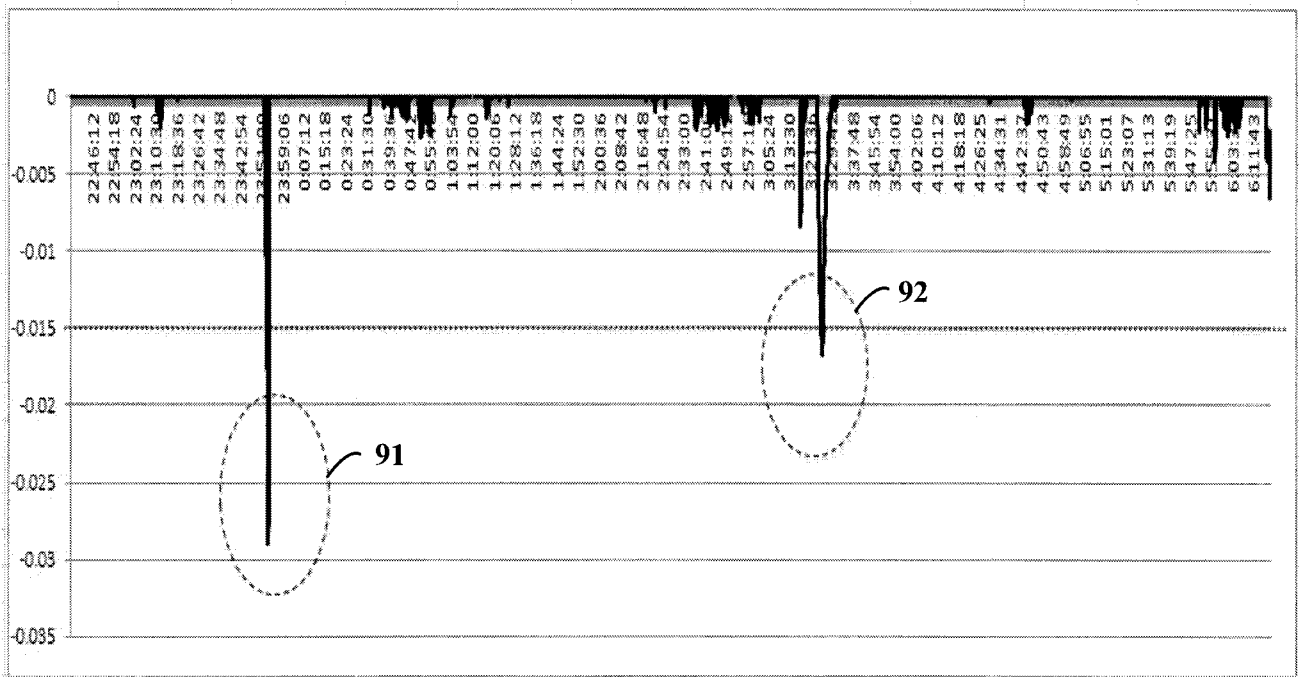


FIG. 11

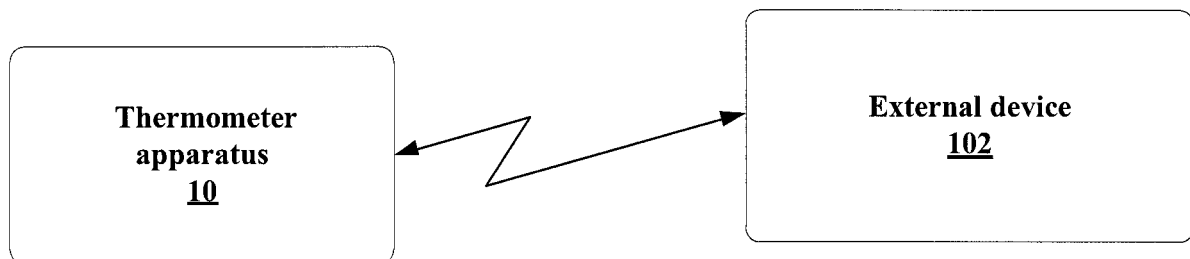
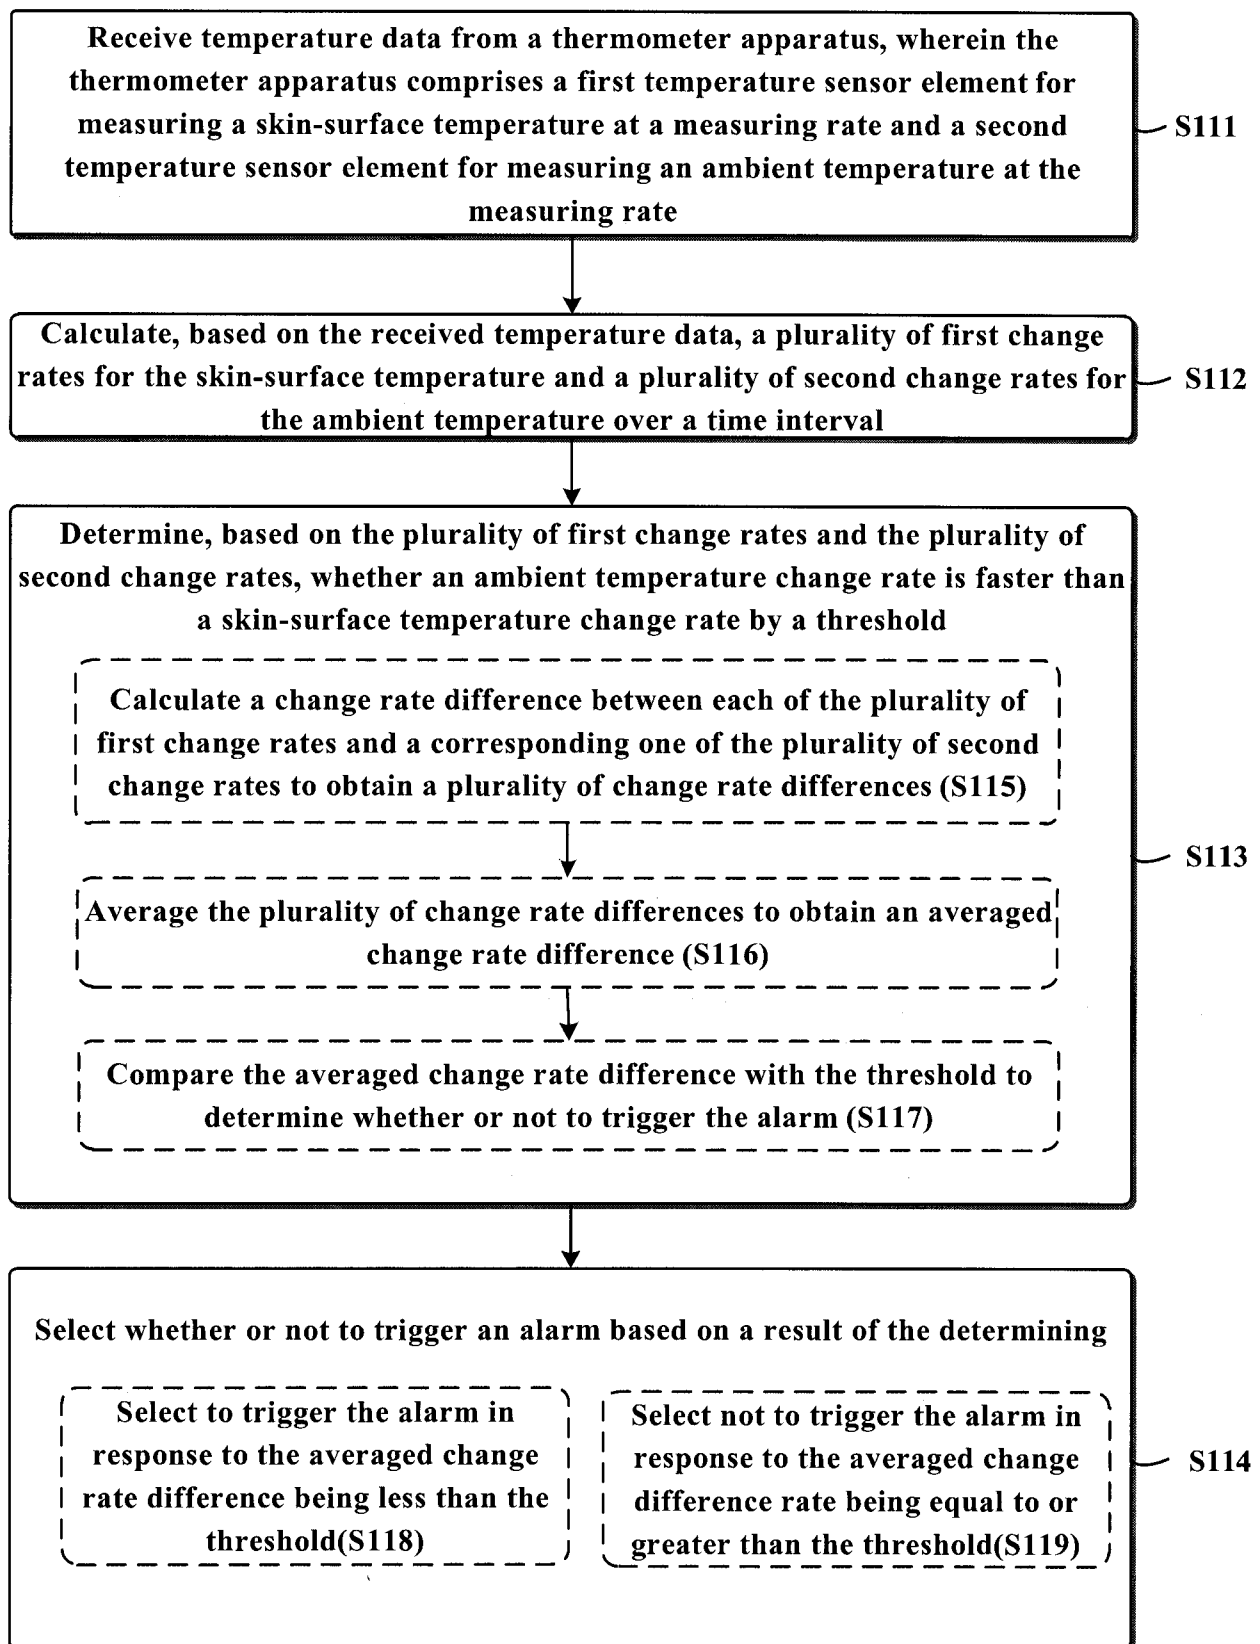


FIG. 12



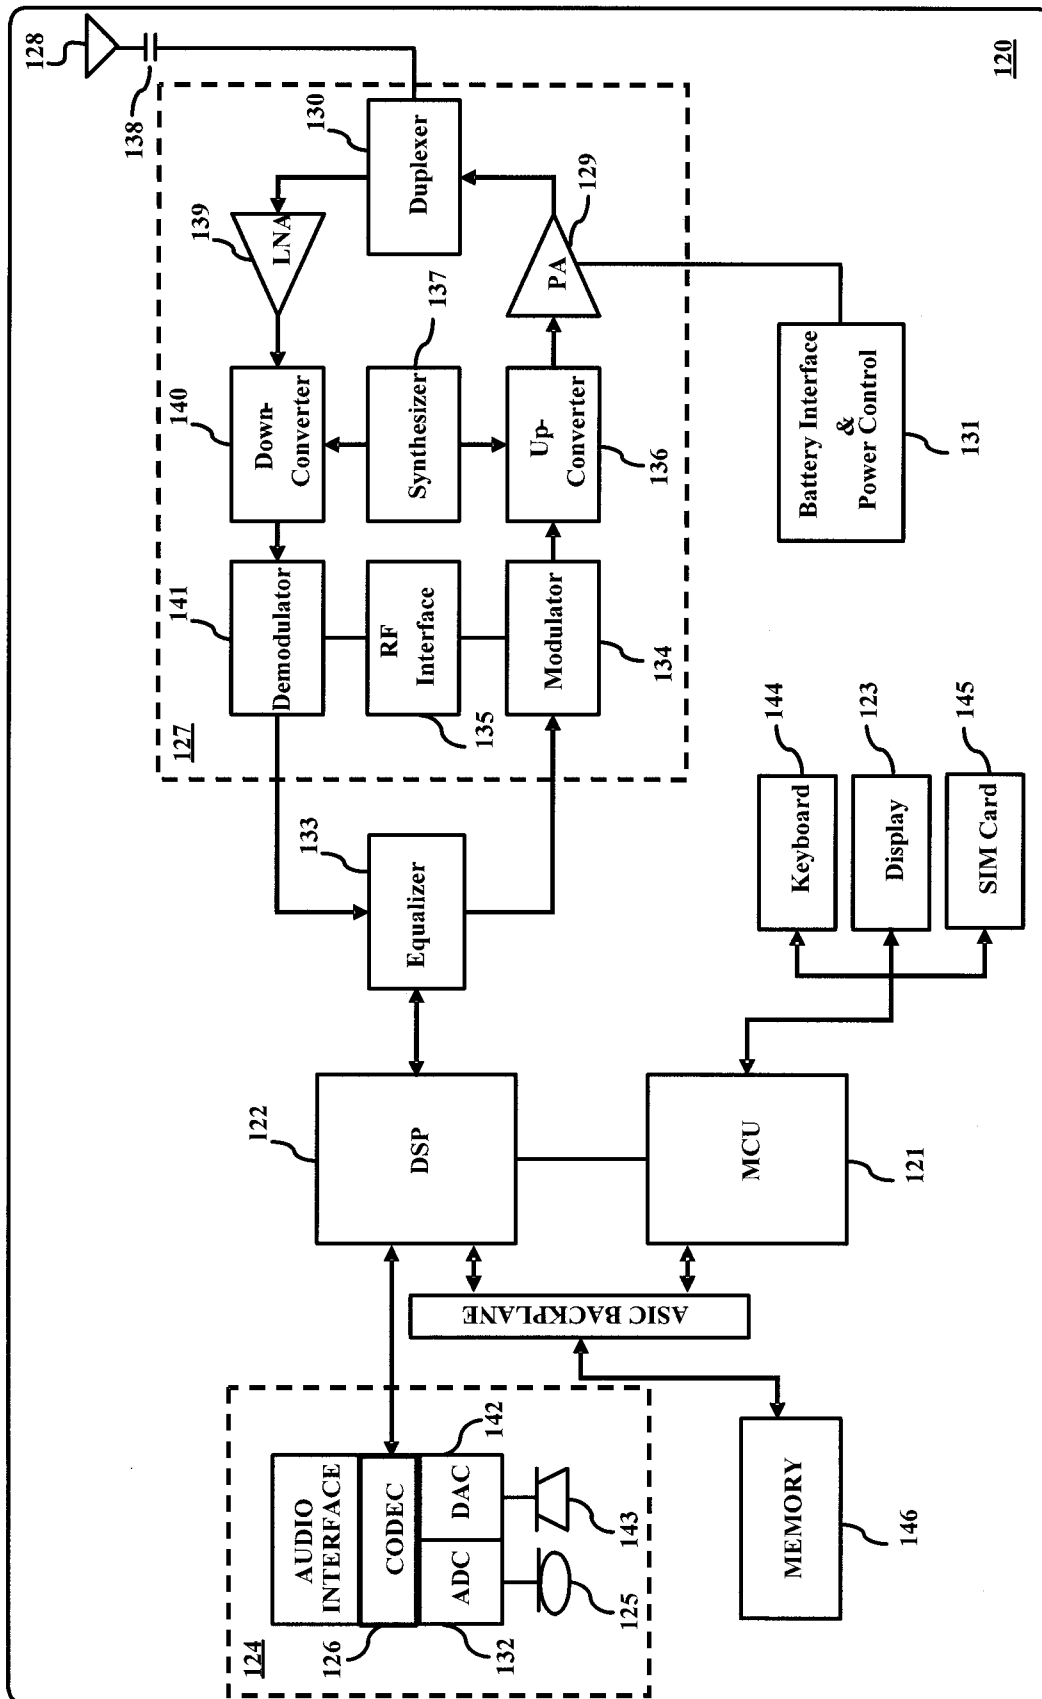


FIG. 14

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/075233

A. CLASSIFICATION OF SUBJECT MATTER

A61B 5/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT,CNKI,WPI,EPODOC: nokia, navteq, chen yue, liang yuyang, lan peng, zhao wenya, wang dandan, tipi, temperature, hermometer, kid, child, baby, infant, sleep+, sensor, enviroment, ambient, change rate, threshold, alarm, derivat+

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2014060938 A1 (NIGHT-SENSE, LTD.) 24 April 2014 (2014-04-24) description, page 6, line 6 to page 7, line 15, page 14, line 3 to line 14, page 21, line 1 to line 7 and figures 1-4	1-27
A	CN 201757683 U (SU, YUANSHEG) 09 March 2011 (2011-03-09) the whole document	1-27
A	CN 204105949 U (PERFFUN TECHNOLOGY SHANGHAI CO., LTD.) 21 January 2015 (2015-01-21) the whole document	1-27
A	CN 201576343 U (XU, XINGYE) 08 September 2010 (2010-09-08) the whole document	1-27
A	JP 2008048819 A (FUJIFILM CORP.) 06 March 2008 (2008-03-06) the whole document	1-27
A	US 2015081136 A1 (SUTHERLAND, MICHAEL J. ET AL.) 19 March 2015 (2015-03-19) the whole document	1-27



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

07 December 2015

Date of mailing of the international search report

17 December 2015

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088, China

Authorized officer

LI, Yincen

Facsimile No. (86-10)62019451

Telephone No. (86-10)61648440

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/075233

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 8830068 B2 (COLORADO STATE UNIVERSITY RESEARCH FOUNDATION) 09 September 2014 (2014-09-09) the whole document	1-27

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/075233

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
WO	2014060938	A1	24 April 2014	US	2015272500	A1	01 October 2015
				EP	2908718	A1	26 August 2015
CN	201757683	U	09 March 2011	None			
CN	204105949	U	21 January 2015	None			
CN	201576343	U	08 September 2010	None			
JP	2008048819	A	06 March 2008	None			
US	2015081136	A1	19 March 2015	US	2014340218	A1	20 November 2014
US	8830068	B2	09 September 2014	US	2012068848	A1	22 March 2012

专利名称(译)	用于检测与身体相关的温度变化的方法和设备		
公开(公告)号	EP3273841A4	公开(公告)日	2018-10-24
申请号	EP2015886792	申请日	2015-03-27
[标]申请(专利权)人(译)	诺基亚技术有限公司		
申请(专利权)人(译)	NOKIA TECHNOLOGIES OY		
当前申请(专利权)人(译)	NOKIA TECHNOLOGIES OY		
[标]发明人	CHEN YUE LIANG YUYANG LAN PENG ZHAO WENYA WANG DANDAN		
发明人	CHEN, YUE LIANG, YUYANG LAN, PENG ZHAO, WENYA WANG, DANDAN		
IPC分类号	A61B5/00		
CPC分类号	A61B5/0008 A61B5/01 A61B2560/0252 A61B5/746 A61B2503/06 A61B2562/0271		
其他公开文献	EP3273841A1		
外部链接	Espacenet		

摘要(译)

提供了用于检测与身体相关的温度变化的方法和设备 (10)。该方法包括以测量速率 (S21) 测量第一温度传感器元件 (12) 处的皮肤表面温度，并以测量速率测量第二温度传感器元件 (13) 处的环境温度 (S22)。该方法还包括在一段时间间隔内计算皮肤表面温度的多个第一变化率和环境温度的多个第二变化率 (S23)。该方法还包括基于多个第一变化率和多个第二变化率确定环境温度变化率是否比皮肤表面温度变化率快一个阈值 (S24)。该方法还包括基于确定的结果选择是否触发警报 (S25)。利用这些方法和装置 (10)，可以显著减少误报的数量。