



(11) **EP 3 434 180 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.01.2019 Bulletin 2019/05

(51) Int Cl.:
A61B 5/00 (2006.01) **A61B 5/042 (2006.01)**
A61B 5/06 (2006.01)

(21) Application number: **18192797.1**

(22) Date of filing: **08.06.2017**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(30) Priority: **09.06.2016 US 201615177775**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
17174936.9 / 3 254 613

(71) Applicant: **Biosense Webster (Israel) Ltd.
Yokneam 2066717 (IL)**

(72) Inventors:
• **LEVIN, Michael
2066717 Yokneam (IL)**

- **REUVENI, Avi
2066717 Yokneam (IL)**
- **BAR-TAL, Meir
2066717 Yokneam (IL)**
- **HIGHSMITH, Debby Esther
Irwindale, CA California 91706 (US)**
- **GARCIA, Ariel
Irwindale, CA California 91706 (US)**
- **OSADCHY, Daniel
2066717 Yokneam (IL)**
- **AUERBACH, Shmuel
2066717 Yokneam (IL)**

(74) Representative: **Small, Gary James
Carpmaels & Ransford LLP
One Southampton Row
London WC1B 5HA (GB)**

Remarks:

This application was filed on 05-09-2018 as a
divisional application to the application mentioned
under INID code 62.

(54) **DUAL-FUNCTION SENSORS FOR A BASKET CATHETER**

(57) Described embodiments include a catheter, which includes a plurality of splines at a distal end of the catheter, and a plurality of helical conducting elements disposed on the splines. Other embodiments are also described.

EP 3 434 180 A1

Description

FIELD OF THE INVENTION

[0001] Embodiments of the present invention relate generally to the field of medical devices, and particularly to catheters for recording intracardiac electrocardiogram (ECG) signals.

BACKGROUND

[0002] In some applications, a basket catheter, comprising a large number of electrodes disposed on a plurality of splines, is used to acquire intracardiac electrocardiogram (ECG) signals. Such signals may be used, for example, to construct an electroanatomical map of the heart.

[0003] US Patent Application Publication 2011/0118590, whose disclosure is incorporated herein by reference, describes an interventional system for internal anatomical examination that includes a catheterization device for internal anatomical insertion. The catheterization device includes at least one magnetic field sensor for generating an electrical signal in response to rotational movement of the at least one sensor about an axis through the catheterization device within a magnetic field applied externally to patient anatomy, and a signal interface for buffering the electrical signal for further processing. A signal processor processes the buffered electrical signal to derive a signal indicative of angle of rotation of the catheterization device relative to a reference. The angle of rotation is about an axis through the catheterization device. A reproduction device presents a user with data indicating the angle of rotation of the catheterization device.

[0004] US Patent Application Publication 2003/0093067, whose disclosure is incorporated herein by reference, describes systems and methods for imaging a body cavity and for guiding a treatment element within a body cavity. A system may include an imaging subsystem having an imaging device and an image processor that gather image data for the body cavity. A mapping subsystem may be provided, including a mapping device and a map processor, to identify target sites within the body cavity, and provide location data for the sites. The system may also include a location processor coupled to a location element on a treatment device to track the location of the location element. The location of a treatment element is determined by reference to the location element. A treatment subsystem including a treatment device having a treatment element and a treatment delivery source may also be provided. A registration subsystem receives and registers data from the other subsystems, and displays the data.

[0005] US Patent 6,272,371, whose disclosure is incorporated herein by reference, describes an invasive probe apparatus including a flexible elongate probe having a distal portion adjacent to a distal end thereof for

insertion into the body of a subject, which portion assumes a predetermined curve form when a force is applied thereto. First and second sensors are fixed to the distal portion of the probe in known positions relative to the distal end, which sensors generate signals responsive to bending of the probe. Signal processing circuitry receives the bend responsive signals and processes them to find position and orientation coordinates of at least the first sensor, and to determine the locations of a plurality of points along the length of the distal portion of the probe.

[0006] US Patent Application Publication 2006/0025677, whose disclosure is incorporated herein by reference, describes a surgical navigation system for navigating a region of a patient that may include a non-invasive dynamic reference frame and/or fiducial marker, sensor tipped instruments, and isolator circuits. The dynamic reference frame may be placed on the patient in a precise location for guiding the instruments. The dynamic reference frames may be fixedly placed on the patient. Also the dynamic reference frames may be placed to allow generally natural movements of soft tissue relative to the dynamic reference frames. Also methods are provided to determine positions of the dynamic reference frames. Anatomical landmarks may be determined intra-operatively and without access to the anatomical structure.

[0007] US Patent 6,892,091, whose disclosure is incorporated herein by reference, describes an apparatus and method for rapidly generating an electrical map of a chamber of a heart that utilizes a catheter including a body having a proximal end and a distal end. The distal end has a distal tip and an array of non-contact electrodes having a proximal end and a distal end and at least one location sensor. Preferably, two location sensors are utilized. The first location sensor is preferably proximate to the catheter distal tip and the second location sensor is preferably proximate to the proximal end of the non-contact electrode array. The catheter distal end further preferably includes a contact electrode at its distal tip. Preferably, at least one and preferably both of the location sensors provide six degrees of location information. The location sensor is preferably an electromagnetic location sensor. The catheter is used for rapidly generating an electrical map of the heart within at least one cardiac cycle and preferably includes cardiac ablation and post-ablation validation.

SUMMARY OF THE INVENTION

[0008] There is provided, in accordance with some embodiments of the present invention, a catheter, which includes a plurality of splines at a distal end of the catheter, and a plurality of helical conducting elements disposed on the splines.

[0009] In some embodiments, the plurality of splines are arranged to define a basket.

[0010] In some embodiments, the helical conducting

elements are printed onto the splines.

[0011] In some embodiments, each of the helical conducting elements includes electrically-conductive paint that is helically painted onto the splines.

[0012] In some embodiments, the catheter further includes an electrically-insulative layer covering at least a majority of each of the helical conducting elements.

[0013] In some embodiments, the electrically-insulative layer does not cover a portion of exactly one respective turn of each of the helical conducting elements.

[0014] There is further provided, in accordance with some embodiments of the present invention, apparatus that includes circuitry and a processor. The circuitry is configured to generate a first output, based on an intracardiac electrocardiogram (ECG) voltage received from a helical conducting element, and to generate a second output, based on a voltage difference that was induced across the conducting element by a magnetic field. The processor is configured to build an electroanatomical map, based on the first output and the second output.

[0015] In some embodiments,

the circuitry is further configured:

to cause a proximity-indicating voltage to be received from the conducting element, by passing a current between the conducting element and a reference electrode, and
to generate a third output, based on the proximity-indicating voltage, and

the processor is configured to build the electroanatomical map based on the third output.

[0016] In some embodiments, the processor is configured to derive, from the third output, a proximity of the conducting element to tissue.

[0017] In some embodiments, the circuitry includes:

a first differential amplifier, configured:
to generate the first output by amplifying a difference between the ECG voltage and a reference voltage, and
to generate the third output by amplifying a difference between the proximity-indicating voltage and the reference voltage; and

a second differential amplifier, configured to generate the second output by amplifying the induced voltage difference.

[0018] In some embodiments, the circuitry includes exactly two connections to the conducting element.

[0019] In some embodiments, the processor is configured:

to derive electrical-activity information from the first output,
to derive anatomical information from the second

output, and

to build the electroanatomical map by combining the electrical-activity information with the anatomical information.

[0020] There is further provided, in accordance with some embodiments of the present invention, a method that includes receiving an intracardiac electrocardiogram (ECG) voltage from a conducting element, receiving a voltage difference induced across the conducting element by a magnetic field, and building an electroanatomical map, using the ECG voltage and the voltage difference.

[0021] In some embodiments, receiving the voltage difference includes receiving the voltage difference while receiving the ECG voltage.

[0022] In some embodiments, the conducting elements are disposed on a plurality of splines at a distal end of a catheter.

[0023] The present invention will be more fully understood from the following detailed description of embodiments thereof, taken together with the drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0024]

Fig. 1 is a schematic illustration of a basket catheter, in accordance with some embodiments of the present invention; and

Figs. 2-3 are schematic illustrations of circuitry for processing signals received from conducting elements, in accordance with some embodiments of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

OVERVIEW

[0025] Embodiments described herein include a basket catheter that may be used, for example, to build an electroanatomical map. The basket catheter comprises a plurality of splines at its distal end, and further comprises a plurality of helical conducting elements, which are disposed on the splines. During the electroanatomical mapping procedure, the helical conducting elements function as inductors, in that a generated magnetic field induces respective voltage differences across the conducting elements. Based on the induced voltage differences, the respective locations and orientations of the conducting elements - and hence, the location and orientation of the basket catheter - may be precisely determined.

[0026] Typically, embodiments described herein are rendered even more advantageous, in that the helical conducting elements may additionally function as electrodes for acquiring ECG signals, such that it may not be

necessary to equip the basket catheter with separate ECG-acquiring electrodes. For example, an electrically-insulative layer may cover the majority of each of the helical conducting elements, but leave a small portion of each of the helical conducting elements exposed. This exposed portion, when brought into contact with the intracardiac tissue, acquires ECG signals from the tissue.

[0027] The helical conducting elements described herein may thus function in two capacities - e.g., simultaneously - during a single procedure. First, they may function as ECG electrodes, by sensing the intracardiac ECG signals. Second, they may function as magnetic-field sensors, by generating location signals (in the form of the above-described induced voltages) in response to the generated magnetic field. The conducting elements may thus be described as ECG electrodes that additionally function as magnetic-field sensors, or as magnetic-field sensors that additionally function as ECG electrodes. (Notwithstanding the above, in some embodiments, the conducting elements are used only as magnetic-field sensors, and separate electrodes coupled to the splines are used to acquire the ECG signals.)

[0028] Embodiments described herein further include circuitry for processing signals received from the helical conducting elements. In particular, the circuitry described herein generates, based on the received signals, a plurality of outputs, which are used by a processor to construct an electroanatomical map. These outputs include a plurality of first outputs, which indicate the electrical activity of the tissue, a plurality of second outputs, which indicate the respective induced voltage differences across the conducting elements, and a plurality of third outputs, which indicate the proximity to the tissue of each of the conducting elements.

APPARATUS DESCRIPTION

[0029] Reference is initially made to Fig. 1, which is a schematic illustration of a basket catheter 22, in accordance with some embodiments of the present invention. Fig. 1 depicts a physician 34 using basket catheter 22 to perform an electroanatomical mapping of a heart 25 of a subject 26. During the mapping procedure, the distal end of the catheter, which comprises a basket 20 of splines 28, is inserted into heart 25. The splines are then brought into contact with the intracardiac tissue, and conducting elements 24 on the splines acquire intracardiac ECG signals. A console 36, which is connected to the basket catheter and comprises a computer processor 32, receives these ECG signals.

[0030] While the intracardiac ECG signals are being acquired, a magnetic field is generated by a plurality of magnetic-field generators 30 located underneath subject 26 or otherwise in the vicinity of the subject. (As shown in Fig. 1, a signal generator ("SIG GEN") 40 in console 36 may cause generators 30 to generate the magnetic field by supplying an alternating current to the generators.) The magnetic field induces voltage differences

across conducting elements 24. The induced voltage differences are received by the console, and, based on the induced voltages, processor 32 ascertains the position of each of the conducting elements. Processor 32 then constructs an electroanatomical map of the heart, based on the ECG signals (which indicate the electrical activity of the intracardiac tissue) and the voltages received from the helical conducting elements (which indicate the respective locations of the sources of the ECG signals). Such a map may be displayed on a monitor 38 for viewing by physician 34, and/or stored for later analysis.

[0031] Splines 28 may be arranged to define any suitably-shaped basket, such as the spheroidal basket shown in Fig. 1. Fig. 1 shows an embodiment in which a plurality of helical conducting elements 24 are disposed on the surface of each of the splines. The top-left portion of the figure shows an enlarged view of a single such helical conducting element. In this enlarged view, the solid portion of the conducting element corresponds to the portion of the conducting element that is on the near side of the spline, facing the viewer. The dotted portion corresponds to the portion of the conducting element that is on the far side of the spline, facing away from the viewer. Each of the two terminals of each of the conducting elements is typically connected to the console via a wire 42 which passes through the interior of the spline.

[0032] In some embodiments, the conducting elements are printed onto the splines. For example, each of the conducting elements may comprise electrically-conductive paint that is helically painted onto the splines. In other embodiments, the conducting elements comprise wires that are wound (i.e., coiled) around, and glued or otherwise attached to, the splines. In any case, for embodiments in which the helical conducting elements are on the surface of the splines, an electrically-insulative layer 44 typically covers at least a majority of each of the helical conducting elements. Electrically-insulative layer 44 prevents the turns of any given conducting element from being shorted with each other.

[0033] Typically, the electrically-insulative layer does not cover a portion of exactly one respective turn of each of the helical conducting elements. Thus, the electrically-insulative layer prevents shorting of the turns (in that no more than one turn of each conducting element is exposed), but also allows the conducting elements to acquire ECG signals. For example, the enlarged portion of Fig. 1 shows an embodiment in which the electrically-insulative layer exposes a portion 46 of the conducting element. Exposed portion 46 may be brought into contact with tissue, in order to acquire an ECG signal.

[0034] As noted above, the exposed portion of the conducting element is confined to one turn of the conducting element. This means that the distance between the distalmost exposed portion of the conducting element and the proximalmost exposed portion of the conducting element is less than the distance D that separates between successive turns of the conducting element.

[0035] In some embodiments, the electrically-insula-

tive layer is contiguous across a plurality of conducting elements. In other embodiments, as depicted in Fig. 1, the electrically-insulative layer is discontinuous, such that no portion of the electrically-insulative layer covers more than one of the conducting elements. Similarly, for any given conducting element, the cover provided by the electrically-insulative layer may be contiguous or discontinuous. As an example of the latter, in Fig. 1, the conducting element is covered by two separate, disjoint portions of the electrically-insulative layer, these portions being on respective opposite sides of exposed portion 46 of the conducting element.

[0036] In some embodiments, alternatively to being disposed on the splines as in Fig. 1, the conducting elements are contained within the splines. In such embodiments, the splines, being made of an electrically-insulative material (such as plastic), provide the "cover" that prevents the conducting elements from being shorted. For embodiments in which the conducting elements are additionally used to acquire ECG signals, the splines are shaped to define a plurality of openings that expose a portion of exactly one respective turn of each of the helical conducting elements. In other words, such embodiments are analogous to the embodiments described above, with the surface of the spline functioning analogously to electrically-insulative layer 44 in preventing shorting of the conducting elements, but also, optionally, providing for ECG-signal acquisition.

[0037] Reference is now made to Fig. 2, which is a schematic illustration of circuitry 48 for processing signals received from conducting elements 24, in accordance with some embodiments of the present invention. Circuitry 48 is typically located within console 36, between the catheter-console interface and the processor. As shown in Fig. 2, circuitry 48 is connected to each helical conducting element 24, typically via exactly two connections (or "leads") connected to the conducting element: a first connection 50a to one terminal of the conducting element, and a second connection 50b to the other terminal of the conducting element. As further described below, circuitry 48 generates outputs based on signals received, via connections 50a and 50b, from each helical conducting element. Based on these outputs, processor 32 constructs an electroanatomical map of the subject's heart.

[0038] Typically, circuitry 48 comprises a first differential amplifier 52a and a second differential amplifier 52b. Connections 50a and 50b are connected to second differential amplifier 52b, while one of the connections - e.g., first connection 50a - is also connected to first differential amplifier 52a. Connections 50a and 50b thus carry inputs to the differential amplifiers, as further described below.

[0039] As described above, the exposed portion of each conducting element 24 is brought into contact with intracardiac tissue 56, such that an ECG voltage (referred to above as an "ECG signal") is transferred to the conducting element from the tissue. (The ECG voltage is

generally constant across the conducting element, i.e., the ECG voltage at the terminal of the conducting element is not significantly different from the ECG voltage at the exposed portion of the conducting element.) First connection 50a carries the ECG voltage to first differential amplifier 52a, which generates a first output 54a based on the ECG voltage, by amplifying a difference between the received ECG voltage and a reference voltage. The processor derives electrical-activity information from first output 54a, and uses this information to build the electroanatomical map. Typically, the reference voltage is the voltage at a reference electrode 58 disposed on the basket catheter, e.g., on a central spline of the catheter shaft (not shown in Fig. 1). (In Fig. 2, reference electrode 58 is connected to ground, such that the reference voltage is ground.)

[0040] Connection 50a also carries, to second differential amplifier 52b, the voltage induced by the magnetic field at one terminal of the conducting element, while connection 50b carries the voltage induced at the other terminal. In other words, connections 50a and 50b collectively carry, to the second differential amplifier, the voltage difference that is induced across the conducting element. Based on this voltage difference, second differential amplifier 52b generates a second output 54b, by amplifying the voltage difference. Second output 54b includes anatomical information, in that the second output indicates the position of the conducting element, and hence, the location of the source of the ECG signal. The processor derives this anatomical information from the second output, and then, in building the electroanatomical map, combines this anatomical information with the electrical-activity information derived from the first output.

[0041] Typically, circuitry 48 further comprises a current source, or, as in Fig. 2, a voltage source 60 in series with a resistor 62, which together function as a current source. The current source passes a current "I" over connection 50a and between the conducting element and reference electrode 58 (or a different reference electrode that is not used for the ECG reference voltage). During the passing of the current, the voltage on the conducting element indicates the impedance that is seen by the conducting element; the higher the voltage, the higher the impedance. The impedance, in turn, indicates the proximity of the conducting element to the tissue; the higher the impedance, the greater the proximity. Thus, the voltage on the conducting element indicates the proximity of the conducting element to the tissue. The first differential amplifier generates a third output 54c based on this proximity-indicating voltage, by amplifying the difference between the proximity-indicating voltage and the reference voltage. The processor then uses the third output to build the electroanatomical map. In particular, the processor first derives, from the third output, the proximity of the conducting element to the tissue. The processor then decides whether to accept the first (electrical-activity-related) output, based on the proximity. For example, the

processor may compare the proximity to a threshold, and accept the first output only if the proximity is greater than the threshold (i.e., the distance between the conducting element and the tissue is sufficiently small).

[0042] It is noted that the ECG voltage, the induced voltage, and the proximity-indicating voltage are of sufficiently different frequencies, such that the three voltages may be simultaneously carried on connection 50a (and hence, simultaneously received by the circuitry). Thus, first output 54a, second output 54b, and third output 54c may be generated at the same time. In some embodiments, an adder 61 adds the first output, the second output, and the third output, yielding a combined output 64 having a plurality of components at various frequencies. Combined output 64 is then passed to an analog-to-digital converter (ADC) 66, which converts the combined output to a digital signal that is passed to the processor.

[0043] Although, for simplicity, only a single helical conducting element 24 is shown in Fig. 2, basket catheter 22 typically comprises a large number of helical conducting elements. On this note, reference is now made to Fig. 3, which is a schematic illustration of circuitry 48, in accordance with some embodiments of the present invention.

[0044] Fig. 3 shows a way in which the configuration of circuitry 48 shown in Fig. 2 may be extended to handle a large number of inputs from a large number of helical conducting elements. In particular, in Fig. 3, a block 68 of circuitry that is shown in Fig. 2 is replicated for each of the conducting elements. Thus, in Fig. 3, a conducting element 24a connects to a block 68a of circuitry, a conducting element 24b connects to a block 68b, and a conducting element 24c connects to a block 68c. Similarly, resistor 62 is replicated for each of the conducting elements, such that voltage source 60 may be connected to block 68a via a resistor 62a, to block 68b via a resistor 62b, or to block 68c via a resistor 62c. (Typically, switches 70 ensure that the voltage source is connected to no more than one block at a time.) Thus, for example, to pass a current between conducting element 24a and the reference electrode, the voltage source is connected to block 68a.

[0045] As indicated by the three-dot sequences in the figure, the configuration shown in Fig. 3 may be extended to handle any number of conducting elements.

[0046] It is emphasized that the principles described herein may be applied in many ways. For example, the scope of the present disclosure includes using each of one or more coils, and/or other conducting elements, for both (i) magnetic tracking, and (ii) exchanging signals with tissue, in any relevant application. (Circuitry described with reference to Figs. 2-3 may be modified as appropriate to suit the application.) Exchanging signals with tissue includes, for example, acquiring ECG signals as described above, and/or passing ablating signals into tissue. (In the latter case, the same leads that carry the induced voltage from the conducting element may be

used to deliver the ablating signal to the conducting element.) Moreover, the dual-function sensors described herein may be disposed on any suitable apparatus, including, for example, a lasso catheter, balloon catheter, or other type of catheter.

[0047] It will be appreciated by persons skilled in the art that the present invention is not limited to what has been particularly shown and described hereinabove. Rather, the scope of embodiments of the present invention includes both combinations and subcombinations of the various features described hereinabove, as well as variations and modifications thereof that are not in the prior art, which would occur to persons skilled in the art upon reading the foregoing description. Documents incorporated by reference in the present patent application are to be considered an integral part of the application except that to the extent any terms are defined in these incorporated documents in a manner that conflicts with the definitions made explicitly or implicitly in the present specification, only the definitions in the present specification should be considered.

Aspects of the invention:

[0048]

1. A method, comprising:

receiving an intracardiac electrocardiogram (ECG) voltage from a conducting element;
receiving a voltage difference induced across the conducting element by a magnetic field; and
building an electroanatomical map, using the ECG voltage and the voltage difference.

2. The method according to aspect 1, wherein receiving the voltage difference comprises receiving the voltage difference while receiving the ECG voltage.

3. The method according to aspect 1, wherein building the electroanatomical map comprises:

generating a first output, based on the ECG voltage,
generating a second output, based on the voltage difference, and
building the electroanatomical map, based on the first output and the second output.

4. The method according to aspect 3, wherein building the electroanatomical map comprises:

deriving electrical-activity information from the first output,
deriving anatomical information from the second output, and
building the electroanatomical map by combin-

ing the electrical-activity information with the anatomical information.

5. The method according to aspect 3, wherein generating the first output comprises generating the first output by amplifying a difference between the ECG voltage and a reference voltage, and wherein generating the second output comprises generating the second output by amplifying the induced voltage difference.

6. The method according to aspect 1, further comprising causing a proximity-indicating voltage to be received from the conducting element by passing a current between the conducting element and a reference electrode, wherein building the electroanatomical map comprises using the proximity-indicating voltage.

7. The method according to aspect 6, wherein using the proximity-indicating voltage comprises using the proximity-indicating voltage by deriving, from the proximity-indicating voltage, a proximity of the conducting element to tissue.

8. The method according to aspect 1, wherein the conducting elements are disposed on a plurality of splines at a distal end of a catheter.

9. A catheter, comprising:
a plurality of splines at a distal end of the catheter; and
a plurality of helical conducting elements disposed on the splines.

10. The catheter according to aspect 9, wherein the plurality of splines are arranged to define a basket.

11. The catheter according to aspect 9, wherein the helical conducting elements are printed onto the splines.

12. The catheter according to aspect 11, wherein each of the helical conducting elements comprises electrically-conductive paint that is helically painted onto the splines.

13. The catheter according to aspect 9, further comprising an electrically-insulative layer covering at least a majority of each of the helical conducting elements.

14. The catheter according to aspect 13, wherein the electrically-insulative layer does not cover a portion of exactly one respective turn of each of the helical conducting elements.

15. Apparatus, comprising: circuitry, configured:

to generate a first output, based on an intracardiac electrocardiogram (ECG) voltage received from a helical conducting element, and
to generate a second output, based on a voltage difference that was induced across the conducting element by a magnetic field; and

a processor, configured to build an electroanatomical map, based on the first output and the second output.

16. The apparatus according to aspect 15, wherein the circuitry is further configured:

to cause a proximity-indicating voltage to be received from the conducting element, by passing a current between the conducting element and a reference electrode, and
to generate a third output, based on the proximity-indicating voltage, and

wherein the processor is configured to build the electroanatomical map based on the third output.

17. The apparatus according to aspect 16, wherein the processor is configured to derive, from the third output, a proximity of the conducting element to tissue.

18. The apparatus according to aspect 16, wherein the circuitry comprises:

a first differential amplifier, configured:

to generate the first output by amplifying a difference between the ECG voltage and a reference voltage, and
to generate the third output by amplifying a difference between the proximity-indicating voltage and the reference voltage; and

a second differential amplifier, configured to generate the second output by amplifying the induced voltage difference.

19. The apparatus according to aspect 15, wherein the circuitry comprises exactly two connections to the conducting element.

20. The apparatus according to aspect 15, wherein the processor is configured:

to derive electrical-activity information from the first output,
to derive anatomical information from the second output, and

to build the electroanatomical map by combining the electrical-activity information with the anatomical information.

Claims

1. Apparatus, comprising:

circuitry, configured:

to generate a first output, based on an intracardiac electrocardiogram (ECG) voltage received from a helical conducting element, and
to generate a second output, based on a voltage difference that was induced across the conducting element by a magnetic field; and

a processor, configured to build an electroanatomical map, based on the first output and the second output.

2. The apparatus according to claim 1, wherein the circuitry is further configured:

to cause a proximity-indicating voltage to be received from the conducting element, by passing a current between the conducting element and a reference electrode, and
to generate a third output, based on the proximity-indicating voltage, and

wherein the processor is configured to build the electroanatomical map based on the third output.

3. The apparatus according to claim 2, wherein the processor is configured to derive, from the third output, a proximity of the conducting element to tissue.

4. The apparatus according to claim 2, wherein the circuitry comprises:

a first differential amplifier, configured:

to generate the first output by amplifying a difference between the ECG voltage and a reference voltage, and
to generate the third output by amplifying a difference between the proximity-indicating voltage and the reference voltage; and

a second differential amplifier, configured to generate the second output by amplifying the induced voltage difference.

5. The apparatus according to claim 1, wherein the cir-

cuitry comprises exactly two connections to the conducting element.

6. The apparatus according to claim 1, wherein the processor is configured:

to derive electrical-activity information from the first output,
to derive anatomical information from the second output, and
to build the electroanatomical map by combining the electrical-activity information with the anatomical information.

7. The apparatus according to any one of claims 1 to 6, wherein the apparatus further comprises a catheter, the catheter comprising:

a plurality of splines at a distal end of the catheter; and
a plurality of helical conducting elements disposed on the splines;

wherein the circuitry is configured to generate the first output based on an intracardiac electrocardiogram (ECG) voltage received from a first one of the plurality of helical conducting elements, and the circuitry is configured to generate the second output based on a voltage difference that was induced across the first one of the plurality of helical conducting elements by a magnetic field.

8. The apparatus according to claim 7, wherein the first output is one of a plurality of first outputs and the second output is one of a plurality of second outputs, wherein the circuitry is configured to generate the plurality of first outputs, each of the plurality of first outputs based on an intracardiac electrocardiogram (ECG) voltage received from a respective one of the plurality of helical conducting elements, wherein the circuitry is configured to generate the plurality of second outputs, each of the plurality of second outputs based on a voltage difference that was induced across a respective one of the plurality of helical conducting elements by a magnetic field, and wherein the processor is configured to build the electroanatomical map based on the plurality of first outputs and the plurality of second outputs.

9. The apparatus according to claim 7 or 8, wherein the plurality of splines are arranged to define a basket.

10. The apparatus according to claim 7 or 8, wherein the helical conducting elements are printed onto the splines.

11. The apparatus according to claim 10, wherein each of the helical conducting elements comprises elec-

trically-conductive paint that is helically painted onto the splines.

12. The apparatus according to claim 7 or 8, further comprising an electrically-insulative layer covering at least a majority of each of the helical conducting elements. 5
13. The apparatus according to claim 12, wherein the electrically-insulative layer does not cover a portion of exactly one respective turn of each of the helical conducting elements. 10

15

20

25

30

35

40

45

50

55



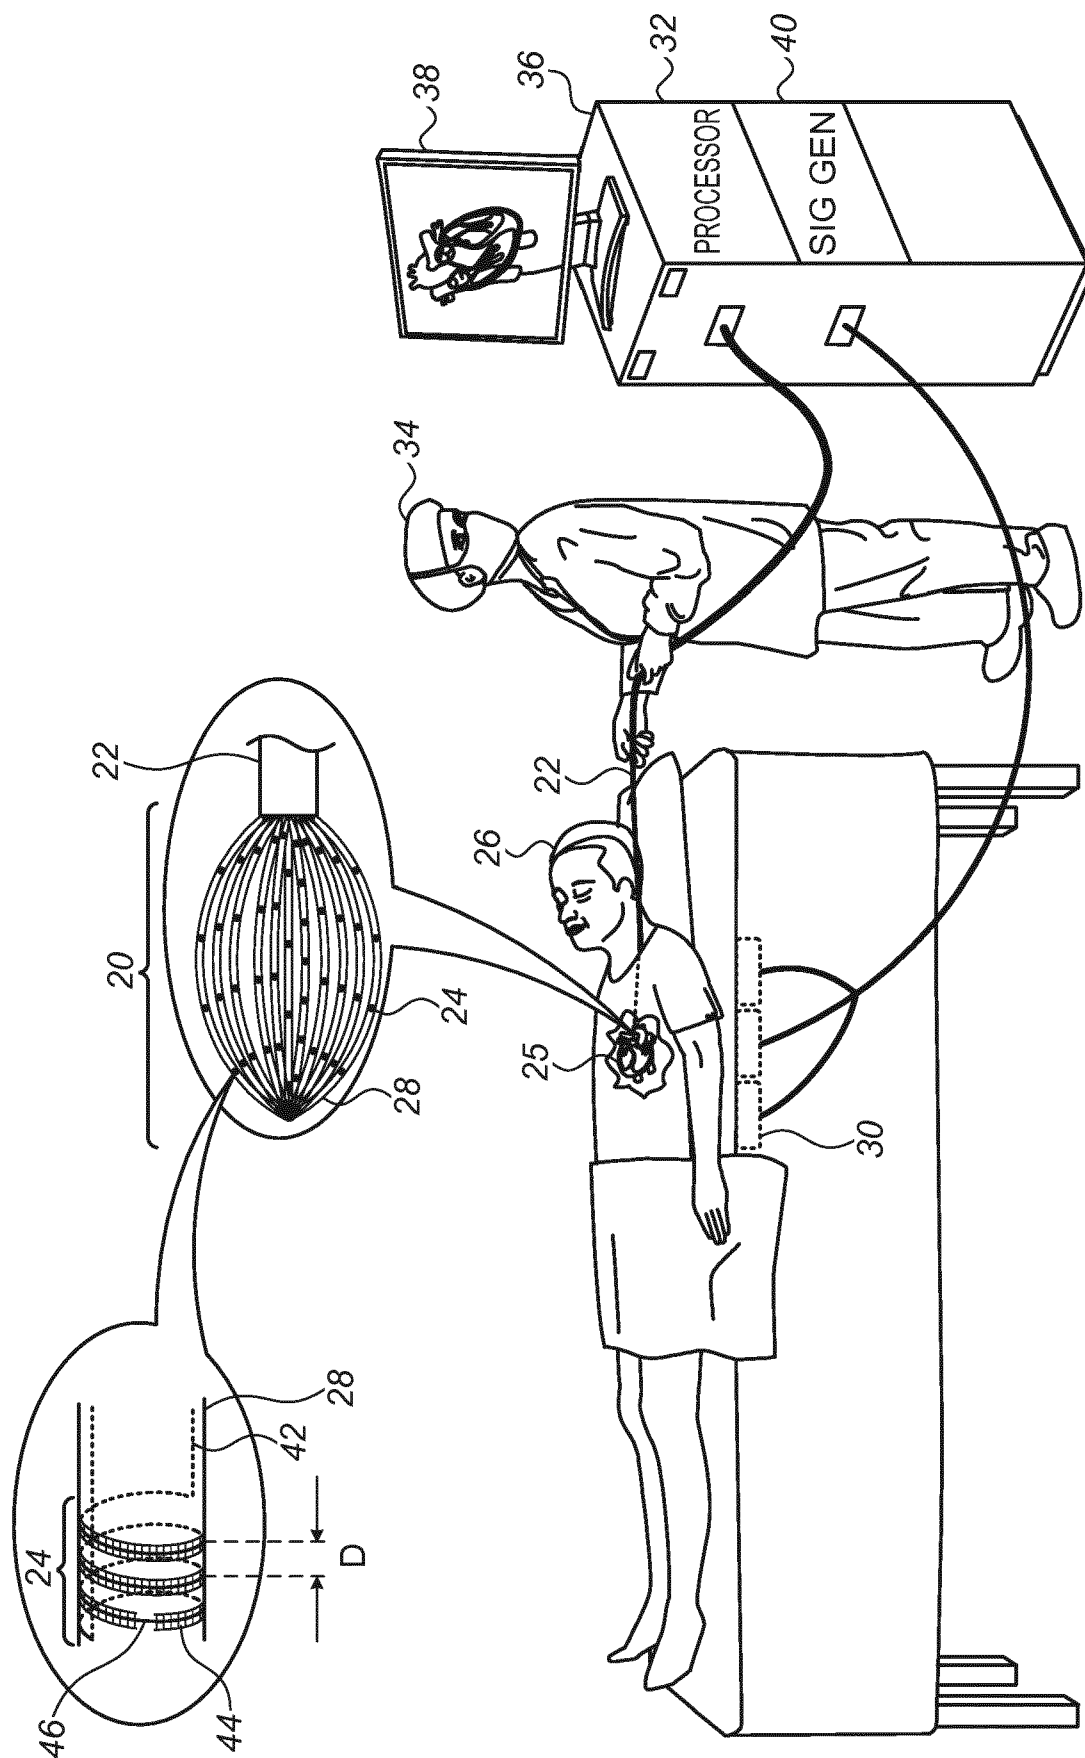


FIG. 1

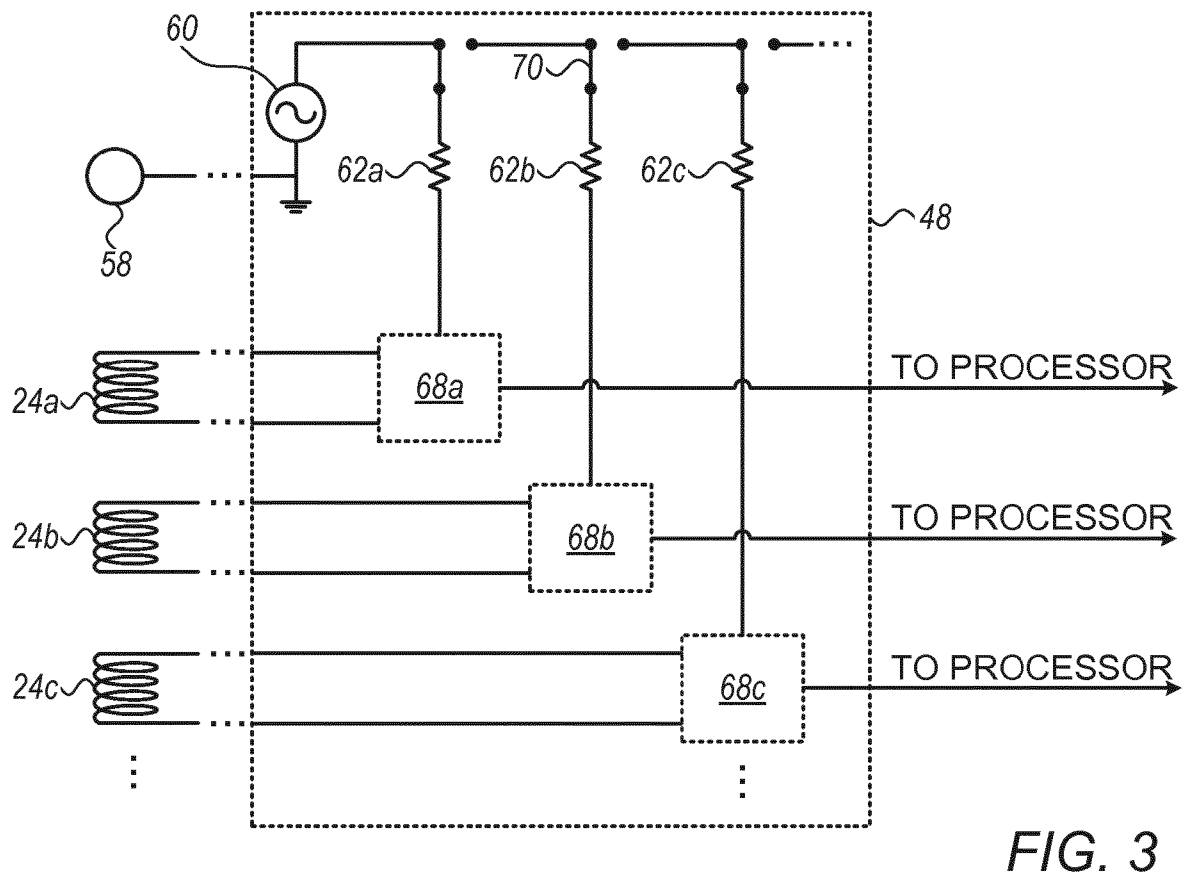

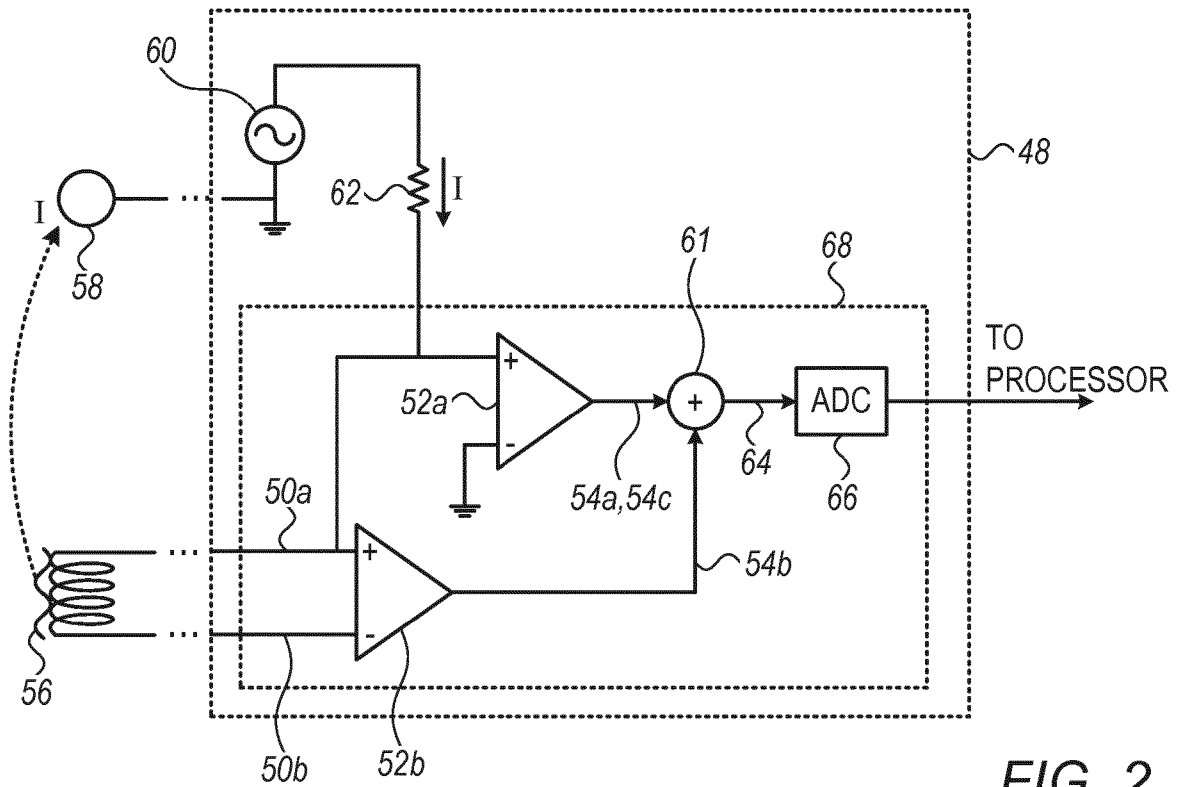

EUROPEAN SEARCH REPORT

Application Number
EP 18 19 2797

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2012/092016 A1 (ST JUDE MEDICAL ATRIAL FIBRILL [US]; AFONSO VALTINO X [US]; SHI JIAZHE) 5 July 2012 (2012-07-05)	1-9	INV. A61B5/00 A61B5/042 A61B5/06
Y	* paragraphs [0002], [0005], [0009] - [0012], [0015], [0038] - [0041], [0045] - [0048], [0061], [0066], [0072], [0080], [0081], [0086]; figures 1-4b, 6-11, 17 *	2-5, 10-13	
X	US 2011/264000 A1 (PAUL SAURAV [US] ET AL) 27 October 2011 (2011-10-27)	1,6-9	
Y	* paragraphs [0007], [0009], [0028], [0041], [0042]; figures 1,2c,5 *	2-5, 10-13	
Y	US 2015/250424 A1 (GOVARI ASSAF [IL] ET AL) 10 September 2015 (2015-09-10)	12,13	TECHNICAL FIELDS SEARCHED (IPC) A61B
A	US 5 411 025 A (WEBSTER JR WILTON W [US]) 2 May 1995 (1995-05-02)	1-13	
Y	EP 2 682 157 A1 (PETER OSYPKA STIFTUNG [DE]) 8 January 2014 (2014-01-08)	12,13	
A	US 2015/119670 A1 (MADJAROV JEKO METODIEV [US] ET AL) 30 April 2015 (2015-04-30)	1-13	
Y	US 2015/057519 A1 (BEN-DAVID MATAN [IL] ET AL) 26 February 2015 (2015-02-26)	10,11	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 4 December 2018	Examiner Lommel, André
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 19 2797

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-12-2018

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012092016 A1	05-07-2012	CN 103354730 A	16-10-2013
		EP 2627243 A1	21-08-2013
		JP 5956463 B2	27-07-2016
		JP 6301398 B2	28-03-2018
		JP 2014506171 A	13-03-2014
		JP 2016187576 A	04-11-2016
		US 2013274582 A1	17-10-2013
		US 2016100770 A1	14-04-2016
		US 2017311833 A1	02-11-2017
		WO 2012092016 A1	05-07-2012

US 2011264000 A1	27-10-2011	NONE	

US 2015250424 A1	10-09-2015	AU 2015200935 A1	24-09-2015
		CA 2883160 A1	05-09-2015
		CN 104887294 A	09-09-2015
		EP 2915498 A1	09-09-2015
		JP 2015167864 A	28-09-2015
		US 2015250424 A1	10-09-2015

US 5411025 A	02-05-1995	JP 3636734 B2	06-04-2005
		JP H06205837 A	26-07-1994
		US 5411025 A	02-05-1995
		US 5628313 A	13-05-1997

EP 2682157 A1	08-01-2014	NONE	

US 2015119670 A1	30-04-2015	NONE	

US 2015057519 A1	26-02-2015	US 2015057519 A1	26-02-2015
		WO 2013136337 A1	19-09-2013

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20110118590 A [0003]
- US 20030093067 A [0004]
- US 6272371 B [0005]
- US 20060025677 A [0006]
- US 6892091 B [0007]

专利名称(译)	用于篮式导管的双功能传感器		
公开(公告)号	EP3434180A1	公开(公告)日	2019-01-30
申请号	EP2018192797	申请日	2017-06-08
[标]申请(专利权)人(译)	韦伯斯特生物官能(以色列)有限公司		
申请(专利权)人(译)	生物传感韦伯斯特 (以色列) LTD.		
当前申请(专利权)人(译)	生物传感韦伯斯特 (以色列) LTD.		
[标]发明人	LEVIN MICHAEL REUVENI AVI BAR TAL MEIR HIGHSMITH DEBBY ESTHER GARCIA ARIEL OSADCHY DANIEL AUERBACH SHMUEL		
发明人	LEVIN, MICHAEL REUVENI, AVI BAR-TAL, MEIR HIGHSMITH, DEBBY ESTHER GARCIA, ARIEL OSADCHY, DANIEL AUERBACH, SHMUEL		
IPC分类号	A61B5/00 A61B5/042 A61B5/06		
CPC分类号	A61B5/0402 A61B5/042 A61B5/6858 A61B5/6869 A61B2562/0209 A61B5/0422 A61B5/062 A61B5/6853 A61B5/7445		
优先权	15/177775 2016-06-09 US		
其他公开文献	EP3434180B1		
外部链接	Espacenet		

摘要(译)

所描述的实施例包括导管，其包括在导管的远端处的多个花键，以及设置在花键上的多个螺旋导电元件。还描述了其他实施例。

