

(19)



(11)

EP 2 173 238 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

08.06.2016 Bulletin 2016/23

(51) Int Cl.:

A61B 5/00 (2006.01) **A61B 5/06** (2006.01)
A61B 5/0488 (2006.01) **A61B 5/0402** (2006.01)
A61B 5/11 (2006.01)

(21) Application number: **08789402.8**

(86) International application number:

PCT/IB2008/052940

(22) Date of filing: **22.07.2008**

(87) International publication number:

WO 2009/013708 (29.01.2009 Gazette 2009/05)

(54) SYSTEM AND METHOD FOR AUTOMATIC SENSOR POSITION RECOGNITION

SYSTEM UND VERFAHREN ZUR AUTOMATISCHEN ERKENNUNG EINER SENSORPOSITION

SYSTÈME ET PROCÉDÉ POUR UNE RECONNAISSANCE DE POSITION DE CAPTEUR AUTOMATIQUE

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR

(72) Inventors:

- **WINTER, Stefan**
5656 AE Eindhoven (NL)
- **TE VRUGT, Juergen**
5656 AE Eindhoven (NL)
- **WILLMANN, Richard, D.**
5656 AE Eindhoven (NL)
- **LANFERMANN, Gerd**
5656 AE Eindhoven (NL)
- **BONGERS, Edwin, G., J., M.**
5656 AE Eindhoven (NL)

(30) Priority: **26.07.2007 EP 07113175**

(43) Date of publication of application:

14.04.2010 Bulletin 2010/15

(74) Representative: **Kroeze, Johannes Antonius**

Philips Intellectual Property & Standards
High Tech Campus 5
5656 AE Eindhoven (NL)

(73) Proprietors:

- **Koninklijke Philips N.V.**
5656 AE Eindhoven (NL)
Designated Contracting States:
AT BE BG CH CY CZ DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
- **Philips Intellectual Property & Standards GmbH**
20099 Hamburg (DE)
Designated Contracting States:
DE

(56) References cited:

WO-A-2004/017831 **WO-A-2007/070997**
US-A1- 2004 262 377 **US-A1- 2005 137 464**
US-B1- 6 496 705

EP 2 173 238 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

[0001] The present invention concerns an automatic sensor position recognition system. The present invention also concerns a method for automatically recognizing the position of a sensor on a person's body and the use of such a system.

[0002] Upper and lower limb impairments are among the most common forms of neurological deficits after a stroke. Patients suffer from insufficient coordination capabilities and weak muscles. Other conditions that may be treated are cognitive defects, vision impairments and speech problems. Some of the relevant therapeutic procedures can be executed at home, under remote supervision.

[0003] In order to evaluate the motor performance of the patient and provide appropriate feedback, data about the patient's movements are required. To this end, sensors or markers are attached to the patient's body at different locations. While the absolute orientation of the sensors or markers that are used can be determined, their absolute position in space cannot be determined. For transforming the orientation measurements into body movements and postures it is therefore necessary to know the body segment which a sensor is attached to.

[0004] Currently, this information is provided manually to a data processing unit by associating the body segment with the unique sensor identification. This procedure is always required when the sensors are attached to the body. Since it requires human interaction it is not only error-prone but is also an obstacle particularly for impaired patients when using such a system.

[0005] WO 2004/053444 discloses a system and method for monitoring the body temperature of a person. The system comprises one or more sensor devices, where each sensor device is capable of measuring a temperature at a known location of a body of a human or other animal. Each sensor transmits a temperature measurement value and sensor identification to a monitor device. The monitor device receives the temperature measurement value and sensor identification, and computes an adjusted temperature value based upon the position of the measuring sensor, body age, and time of age. As the sensors report a different temperature depending on their location on the body, the importance of assigning a measured temperature to an individual sensor is stated. This is undertaken using a sensor registration table comprising a sensor identification number, a unique sensor registration number assigned during sensor manufacture, a sensor position indicator, body age, and upper and lower alarm limits. Thus, the information has to be entered manually with the associated drawbacks.

[0006] From the above it is apparent that a need still exists in the art for an automatic sensor position system and a method for automatically recognizing the position

of a sensor on a person's body.

SUMMARY OF THE INVENTION

[0007] The present invention addresses this and other needs by providing an automatic sensor position recognition system as claimed in claim 1 and a method as claimed in claim 8.

[0008] The position recognition unit is to be understood as a device or a marking that is located at a pre-determined position on a person's body. It bears a unique identification that can be read by other devices. This identification can be in the form of a binary, decimal, hexadecimal or otherwise expressed number, alphanumeric characters, graphical symbols and the like. The uniqueness relates to the fact that no other unit within the system bears the same identification. The identification can also be selected in such a way that the identification is unique for all units ever manufactured, for example by expressing the identification in a 32 bit or 64 bit binary number. The pre-determined position of the unit can be a location such as the person's head, upper arm, lower arm, shoulder, finger, hand, torso, thigh, lower leg or foot.

[0009] The sensor whose position is to be recognized automatically also bears a unique identification. This identification can be in the form of a binary, decimal, hexadecimal or otherwise expressed number, alphanumeric characters, graphical symbols and the like. The uniqueness relates to the fact that no other sensor within the system bears the same identification. The identification can also be selected in such a way that the identification is unique for all such sensors ever manufactured, for example by expressing the identification in a 32 bit or 64 bit binary number.

[0010] The communication unit is assigned to the sensor in a logical and/or in a physical way. When it is assigned in a logical way then the communication unit is identifiable as belonging to a certain sensor. It can also be assigned to the sensor physically, for example by being integrated into the sensor. Firstly, the communication unit can transmit the unique sensor identification and the sensor signals to a data processing unit so the sensor signals can be further processed and evaluated. Secondly, the communication unit can read the unique identification of the position recognition unit. In combination, the communication can thus transmit both unique identifications associated with each other. The transmission can be undertaken via a wired connection, by wireless techniques such as infrared, bluetooth, IEEE 802.11 and the like or by using the conductivity of the human body. An example of the latter would be transmitting electrical signals via the skin of a person. This body-coupled communication has the advantage of allowing a great freedom of movement for the person. For the case that the sensor, the communication unit and the data processing unit are all placed on the person's body it is also possible to incorporate them into a body area network. The individual components of the body area network may com-

municate by the techniques as mentioned above.

[0011] The data processing unit receives signals from the communication unit. Additionally, it may directly receive signals from the sensor. It is in communication with a database. This database has information stored about which position recognition units are meant to be at which pre-determined positions. This is undertaken by way of correlating the unique identification of the position recognition unit and its pre-determined position.

[0012] Thus, when placing the communication unit with the sensor on the position recognition unit, the unique identifiers of the sensor and the position recognition unit are paired and transmitted to the data processing unit.

[0013] The database may be a separate physical entity or a logical entity. As a separate physical entity the database may reside on its own mass storage device and be connected to the data processing unit via an interface. As a logical entity it may be split up and have its individual components integrated into the position recognition unit and/or sensor. In this form the unique identifier of the position recognition unit also comprises information about where the position recognition unit is located. The communication of the logical database with the data processing unit is also effected via the communication unit.

[0014] Accessing the database then provides all information needed to assign a position on the person's body to the sensor in question. The data processing unit can then, for example, calculate a correct representation of the person in form of an avatar.

[0015] It is also possible to sense when a sensor has been removed from the position recognition unit. This task can be performed by the communication unit. In order to keep the data pair correlation up to date the system can then register that the specific sensor is not present anymore. The same applies to the situation when the sensor is switched off or stops transmitting measurements, which allows for error correction.

[0016] In summary, the system according to the invention provides an automatic association between sensors and body segments as well as means to obtain these associations. As a result, no human interaction is required any more to assign a body segment to a sensor. Thus, assignment errors can be prevented and the patient is not burdened any more with attaching a particular sensor to a specific body segment and can concentrate more on the exercises he is supposed to undertake or, in the case of body temperature measurement, can be more assured that the temperature readings from different sensors are interpreted correctly. This is especially the case for when new sensors are introduced, either as a replacement for old sensors or as an addition to the system.

DETAILED DESCRIPTION OF THE INVENTION

[0017] Before the invention is described in detail, it is to be understood that this invention is not limited to the

particular component parts of the devices described or process steps of the methods described as such devices and methods may vary. It is also to be understood that the terminology used herein is for purposes of describing particular embodiments only, and is not intended to be limiting. It must be noted that, as used in the specification and the appended claims, the singular forms "a," "an" and "the" include singular and/or plural referents unless the context clearly dictates otherwise. Thus, for example, reference to "a sensor" includes two or more sensors, reference to "a position recognition unit" includes more than one such devices, and the like.

[0018] In one embodiment of the present invention the unique identification information of the position recognition unit is stored in a form that is readable by optical means. Examples for such a storage form include bar codes and two-dimensional pixel array. Preferably, these markings are scanned via a laser beam. Advantages of optical reading of the identification include the low cost of deploying the information as it can be simply achieved by using printed stickers. Thus, in its simplest form, the position recognition unit is a bar code label.

[0019] In another embodiment of the present invention the unique identification information of the position recognition unit is stored in a form that is readable by electrical or electronic means. Examples for this include wireless transmissions such as radio frequency identification (RFID) and wired means where the position recognition unit bears electrical contacts that have to be touched by the correct contacts of the communication unit in order to read out the identification. Advantages of electrical reading include the possibility of conveying a great amount of data and, in the case of RFID, that reading is not hampered when the position recognition unit is concealed beneath clothing.

[0020] In another embodiment of the present invention the position recognition unit is part of a garment worn by the person. Examples include jackets, pants and belts where the position recognition unit is placed. Furthermore, the garment may be tailored to only permit wearing it in one certain way. An example would be a glove, a sock or a garment worn over the shoulder and the upper arm. This specific tailoring serves to restrict the location of the position recognition unit. Optical markings, RFID chips and other means for storing information can be placed on or in the garment. In addition, the sensors can then be fastened to the garment by placing them into pockets. The position recognition units could also then be integrated into the pockets. Advantages of placing the position recognition units in a garment as mentioned above include that the person only needs to carry the units when needed.

[0021] In another embodiment of the present invention the position recognition unit is located directly on and/or in the person's body. For example, RFID chips maybe glued to the skin or implanted under the skin. Likewise, optical markings may be applied directly to the skin with permanent or non-permanent ink. This includes tattooing

the optical markings. In this context, non-permanent ink is an ink that is degraded or washes off after a time period of, for example, 4 weeks, 8 weeks, 12 weeks or one year. Reversible addition of the position recognition units provides for that they need not be worn any more when the person does not need to perform exercises any more. The advantage of attaching position recognition units directly to the person's body is that their position can be very well-defined and non-changing. Furthermore, this simplifies affixing a sensor to the person's body. For example, a sensor must only be strapped to the respective limb without being worn in a special suit.

[0022] In a further embodiment of the present invention the position recognition unit and the sensor are adapted to interact in such a way that the reading of the unique identification information of the position recognition unit is permitted in only one pre-defined spatial orientation of the sensor. This serves to confine the sensor if there are several possible ways of placing it on the person's body. For example, it can be excluded that a sensor is placed upside down on the person. Ways for achieving such a restriction include unsymmetrically placed electrical contacts on the position recognition unit that are matched on the side of the communication unit and unsymmetrically placed optical marks. Likewise, the position recognition unit may also comprise mechanical elements that restrict attaching the communication unit to one spatial orientation. By permitting the reading of the unique identification information only in one pre-defined spatial orientation it is also possible to determine the orientation and exact relative position of the sensor with respect to the person's body part in question. For example, in the case of a bar code optical marking it may be determined in which direction the lines of the bar code run. From this the orientation of the sensor may be determined. Likewise, failure to position the sensor correctly may be communicated to the user by means such as optical, electrical or tactile feedback.

[0023] In another embodiment of the present invention the sensor is selected from the group comprising motion sensors, inertial sensors, acceleration sensors, gravity sensors, magnetic field sensors, body temperature sensors, pulse sensors, blood oxygen sensors, electromyographical sensors, electrocardiographical sensors and/or optical markings for visual tracking. These types of sensors are advantageously used for monitoring the body stance, motion or condition of a person. Several sensors may be combined, for example acceleration sensors and gravity sensors. Body temperature sensors may be employed to monitor a fever of a person or the person's physical exertion. Electromyographical sensors can be used to assess the level of fatigue of a certain limb or body segment. For example, uneven distribution of fatigue between the two legs of a person may indicate that the person is overexerting one leg and thus not walking correctly. As electrocardiographical sensors need to be placed correctly on various locations of a patient's body, such as chest, arms and legs, they also benefit from being

incorporated into a system according to the present invention. Optical markings for visual tracking are also advantageously employed. They can be identified by a camera in order to represent the stance or motion of a person.

[0024] The present invention is further concerned with a method for automatically recognizing the position of a sensor on a person's body comprising the steps of:

- providing a position recognition unit at a pre-determined position on a person's body, the position recognition unit bearing a unique identification;
- placing a sensor onto the position recognition unit;
- reading the unique identification from the position recognition unit using a communication unit assigned to the sensor;
- reading the unique identification of the sensor;
- transmitting the data pair of the unique identifications of the position recognition unit and the sensor to a data processing unit;
- accessing a database comprising the correlation of the unique identification of the position recognition unit and the pre-determined position of the position recognition unit; and
- correlating the unique identifier of the sensor with the pre-determined position of the position recognizing unit.

[0025] In the initial step a uniquely identifiable position recognition unit is placed on the person's body in a pre-defined location. This can be either directly on the body or by means of a garment worn by the person. This position and the unique identification of the position recognition unit are correlated and stored in a database. Examples of such database entries could be:

position recognition unit # 1111 is located on the upper right arm
 position recognition unit # 2222 is located on the upper left arm
 position recognition unit # 3333 is located on the left foot
 position recognition unit # 4444 is located on the right foot

[0026] Of course, the description of the locations may be specified more by using anatomical terms to indicate the precise bone or limb the position recognition unit is placed upon.

[0027] The next step involves placing a sensor onto the position recognition unit. By this it is ensured that the sensor attached correctly. Preferably, the sensor and the communication unit are integrated into each other. The communication unit then reads the unique identification of the sensor and the position recognition unit. This reading can be done via optical or electrical means, the latter further distinguished by wireless or wired transfer. A result could be:

position recognition unit # 1111 is contacted by sensor # 5555
 position recognition unit # 2222 is contacted by sensor # 6666
 position recognition unit # 3333 is contacted by sensor # 7777
 position recognition unit # 4444 is contacted by sensor # 8888

[0028] The data pair of the unique identification of the position recognition unit and the sensor is then transmitted to the data processing unit by the communication unit. Again, this may be done via wired or wireless transfer. This data processing unit is in communication with a database where the data pairs of unique identification of the position recognition unit and its pre-determined position are stored. As the data processing unit now has all necessary information available, it can correlate the unique identifier of the sensor and with a pre-determined position. A result could be:

sensor # 5555 is located on the upper right arm
 sensor # 6666 is located on the upper left arm
 sensor # 7777 is located on the left foot
 sensor # 8888 is located on the right foot

[0029] From this it follows that the signals originating from the individual sensors can also be correlated with a pre-determined position.

[0030] In summary, the need to always place a certain sensor in a specified location is eliminated. Arbitrary sensors can be placed on the required positions. The method according to the present invention then takes care of assigning individual positions to the sensors so that their signals can be processed, displayed and interpreted correctly.

[0031] In an embodiment of the method according to the present invention the sensor is selected from the group comprising motion sensors, inertial sensors, acceleration sensors, gravity sensors, magnetic field sensors, body temperature sensors, pulse sensors, blood oxygen sensors, electromyographical sensors, electrocardiographical sensors and/or optical markings for visual tracking. The sensors and markings have already been discussed above.

[0032] The present invention is furthermore concerned with the use of a system according to the present invention for automatically recognizing the position of a sensor on a person's body.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] The present invention will become more readily understood with reference to the following drawing, wherein Fig. 1 shows a person with a system according to the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0034] Fig. 1 schematically shows a person with a system according to the present invention. On one arm, the person bears optical marks in form of a bar code which constitute a position recognition unit (1). Furthermore, the person wears a second position recognition unit (1') inside a pocket of a belt (6) worn around the chest. By way of example, the person also bears a third position recognition unit (1'') on his leg. This unit is shaped in such a way that it can be accessed in only one pre-determined orientation. The unique identification of each unit (1, 1', 1'') as well as their location is stored in database (5).

[0035] Returning to the bar code position recognition unit (1), this is contacted by communication unit (3). The bar code contains a unique identification number encoded by means of varying the thickness of the lines. The communication unit (3) reads this bar code and extracts the unique identification. Furthermore, the communication unit reads the unique identification of the sensor (2). Communication unit (3) and sensor (2) form a distinct entity, in particular they are mechanically connected. The communication unit (3) transmits the gathered information to data processing unit (4), as indicated by the dashed arrow. This data processing unit (4) is in communication with database (5). Using the correlated data of unique identification/location of position recognition unit (1) and unique identification of sensor (2) and position recognition unit (1) the data processing unit (4) can then assign a location to sensor (2).

[0036] To provide a comprehensive disclosure without unduly lengthening the specification, the applicant hereby incorporates by reference each of the patents and patent applications referenced above.

Claims

1. An automatic sensor position recognition system comprising:
 - a position recognition unit (1) to be located at a pre-determined position on a person's body and bearing a unique identification;
 - a sensor (2) bearing a unique identification and having a communication unit (3), wherein the communication unit is adapted to read the unique identification from the position recognition unit (1) when placed onto it, and to read the unique identification of the sensor;
 - a data processing unit (4) in communication with the communication unit, wherein the communication unit is adapted to transmit the data pair of the unique identifications of the position recognition unit (1) and the sensor (2) to the data processing unit (4); and
 - a database (5) in communication with the data processing unit (4) which stores data pairs of

the unique identification of the position recognition unit (1) and its pre-determined position,

wherein the data processing unit is adapted to correlate the unique identification of the sensor (2) with the pre-determined position of the position recognition unit (1).

2. System according to claim 1, wherein the unique identification information of the position recognition unit (1) is stored in a form that is readable by optical means.
3. System according to claim 1, wherein the unique identification information of the position recognition unit (1) is stored in a form that is readable by electrical or electronic means.
4. System according to claims 1 to 3, wherein the position recognition unit (1) is part of a garment worn by the person.
5. System according to claims 1 to 3, wherein the position recognition unit (1) is to be located directly on and/or in the person's body.
6. System according to claims 1 to 5, wherein the position recognition unit (1) and the sensor (2) are adapted to interact in such a way that the reading of the unique identification information of the position recognition unit (1) is permitted in only one pre-defined spatial orientation of the sensor (2).
7. System according to claims 1 to 6, wherein the sensor (2) is selected from the group comprising motion sensors, inertial sensors, acceleration sensors, gravity sensors, magnetic field sensors, body temperature sensors, pulse sensors, blood oxygen sensors, electromyographical sensors, electrocardiographical sensors and/or optical markings for visual tracking.
8. A method for automatically recognizing the position of a sensor on a person's body comprising the steps of:
 - providing a position recognition unit (1) at a pre-determined position on a person's body, the position recognition unit (1) bearing a unique identification;
 - placing a sensor (2) bearing a unique identification and a communication unit onto the position recognition unit (1);
 - reading the unique identification from the position recognition unit (1) and the unique identification of the sensor using the communication unit (3) of the sensor (2);
 - using the communication unit to transmit the

data pair of the unique identifications of the position recognition unit (1) and the sensor (2) to a data processing unit (4);

- accessing a database (5) comprising the correlation of the unique identification of the position recognition unit (1) and the pre-determined position of the position recognition unit; and
 - correlating the unique identification of the sensor (2) with the pre-determined position of the position recognition unit (1).

9. Method according to claim 8, wherein the sensor (2) is selected from the group comprising motion sensors, inertial sensors, acceleration sensors, gravity sensors, magnetic field sensors, body temperature sensors, pulse sensors, blood oxygen sensors, electromyographical sensors, electrocardiographical sensors and/or optical markings for visual tracking.
10. Use of a system according to claims 1 to 8 for automatically recognizing the position of a sensor on a person's body.

25 Patentansprüche

1. System zur automatischen Erkennung einer Sensorposition, folgendes umfassend:
 - eine Positionserkennungseinheit (1), die in einer vorbestimmten Position auf einem Körper einer Person anzubringen ist, und die eine eindeutige Identifizierung trägt;
 - einen Sensor (2), der eine eindeutige Identifizierung trägt und eine Kommunikationseinheit (3) aufweist, wobei die Kommunikationseinheit ausgeführt ist, die eindeutige Identifizierung aus der Positionserkennungseinheit (1) zu lesen, wenn sie darauf positioniert ist, und die eindeutige Identifizierung des Sensors zu lesen;
 - eine Datenverarbeitungseinheit (4) in Verbindung mit der Kommunikationseinheit, wobei die Kommunikationseinheit ausgeführt ist, das Datenpaar der eindeutigen Identifizierungen der Positionserkennungseinheit (1) und des Sensors (2) zur Datenverarbeitungseinheit (4) zu übertragen; und
 - eine Datenbank (5) in Verbindung mit der Datenverarbeitungseinheit (4), die Datenpaare der eindeutigen Identifizierung der Positionserkennungseinheit (1) und deren vorbestimmte Position speichert.

wobei die Datenverarbeitungseinheit ausgeführt ist, um die eindeutige Identifizierung des Sensors (2) mit der vorbestimmten Position der Positionserkennungseinheit (1) zu korrelieren.

2. System nach Anspruch 1, wobei die eindeutige Identifizierungsinformation der Positionserkennungseinheit (1) in einer Form gespeichert wird, die durch optische Mittel gelesen werden kann. 5
3. System nach Anspruch 1, wobei die eindeutige Identifizierungsinformation der Positionserkennungseinheit (1) in einer Form gespeichert wird, die durch elektrische oder elektronische Mittel gelesen werden kann. 10
4. System nach den Ansprüchen 1 bis 3, wobei die Positionserkennungseinheit (1) ein Teil einer Bekleidung ist, die von der Person getragen wird. 15
5. System nach den Ansprüchen 1 bis 3, wobei die Positionserkennungseinheit (1) direkt auf dem und/oder im Körper der Person zu finden ist. 20
6. System nach den Ansprüchen 1 bis 5, wobei die Positionserkennungseinheit (1) und der Sensor (2) ausgeführt sind, um in einer solchen Art und Weise zusammenzuwirken, dass das Lesen der eindeutigen Identifizierungsinformation der Positionserkennungseinheit (1) in nur einer vordefinierten räumlichen Ausrichtung des Sensors (2) erlaubt ist. 25
7. System nach den Ansprüchen 1 bis 6, wobei der Sensor (2) aus einer Gruppe ausgewählt wird, die Bewegungssensoren, Trägheitssensoren, Beschleunigungssensoren, Schwerkraftsensoren, Magnetfeldsensoren, Körpertemperatursensoren, Pulssensoren, Blutsauerstoffsensoren, Elektromyografie-Sensoren, elektrokardiografische Sensoren und/oder optische Marker zur visuellen Erfassung umfasst. 30
8. Verfahren zur automatischen Erkennung der Position eines Sensors auf dem Körper einer Person, die folgenden Schritte umfassend: 35
- Bereitstellen einer Positionserkennungseinheit (1) in einer vorbestimmten Position auf dem Körper einer Person, wobei die Positionserkennungseinheit (1) eine eindeutige Identifizierung trägt; 40
 - Platzieren eines Sensors (2), der eine eindeutige Identifizierung trägt, und einer Kommunikationseinheit auf der Positionserkennungseinheit (1); 45
 - Lesen der eindeutigen Identifizierung aus der Positionserkennungseinheit (1) und der eindeutigen Identifizierung des Sensors unter Verwendung der Kommunikationseinheit (3) des Sensors (2); 50
 - Verwenden der Kommunikationseinheit zum Übertragen des Datenpaares der eindeutigen Identifizierungen der Positionserkennungseinheit (1) und des Sensors (2) zur Datenverarbeitungseinheit (4); 55
 - Zugriff auf eine Datenbank (5), die Korrelation der eindeutigen Identifizierung der Positionserkennungseinheit (1) und der vorbestimmten Position der Positionserkennungseinheit umfassend; und
 - Korrelieren der eindeutigen Identifizierung des Sensors (2) mit der vorbestimmten Position der Positionserkennungseinheit (1).
9. Verfahren nach Anspruch 8, wobei der Sensor (2) aus einer Gruppe ausgewählt wird, die Bewegungssensoren, Trägheitssensoren, Beschleunigungssensoren, Schwerkraftsensoren, Magnetfeldsensoren, Körpertemperatursensoren, Pulssensoren, Blutsauerstoffsensoren, Elektromyografie-Sensoren, elektrokardiografische Sensoren und/oder optische Marker zur visuellen Erfassung umfasst.
10. Verwendung eines Systems nach den Ansprüchen 1 bis 8, zur automatischen Erkennung der Position eines Sensors auf dem Körper einer Person.

Revendications

1. Système de reconnaissance de position de capteur automatique comprenant :
- une unité de reconnaissance de position (1) devant être située dans une position prédéterminée sur le corps d'une personne et portant une identification unique ;
 - un capteur (2) portant une identification unique et ayant une unité de communication (3), dans lequel l'unité de communication est adaptée pour lire l'identification unique à partir de l'unité de reconnaissance de position (1) quand elle est placée sur elle, et pour lire l'identification unique du capteur ;
 - une unité de traitement de données (4) en communication avec l'unité de communication, dans lequel l'unité de communication est adaptée pour transmettre la paire de données des identifications uniques de l'unité de reconnaissance de position (1) et du capteur (2) à l'unité de traitement de données (4) ; et
 - une base de données (5) en communication avec l'unité de traitement de données (4) qui stocke des paires de données de l'identification unique de l'unité de reconnaissance de position (1) et de sa position prédéterminée,
- dans lequel l'unité de traitement de données est adaptée pour corréliser l'identification unique du capteur (2) avec la position prédéterminée de l'unité de reconnaissance de position (1).

2. Système selon la revendication 1, dans lequel les informations d'identification unique de l'unité de reconnaissance de position (1) sont stockées sous une forme qui peut être lue par un moyen optique. 5
3. Système selon la revendication 1, dans lequel les informations d'identification unique de l'unité de reconnaissance de position (1) sont stockées sous une forme qui peut être lue par un moyen électrique ou électronique. 10
4. Système selon les revendications 1 à 3, dans lequel l'unité de reconnaissance de position (1) est une partie d'un vêtement porté par la personne. 15
5. Système selon les revendications 1 à 3, dans lequel l'unité de reconnaissance de position (1) doit se situer directement sur et/ou dans le corps de la personne. 20
6. Système selon les revendications 1 à 5, dans lequel l'unité de reconnaissance de position (1) et le capteur (2) sont adaptés pour interagir d'une manière telle que la lecture des informations d'identification unique de l'unité de reconnaissance de position (1) est autorisée dans seulement une orientation spatiale prédéfinie du capteur (2). 25
7. Système selon les revendications 1 à 6, dans lequel le capteur (2) est sélectionné dans le groupe comprenant des capteurs de mouvement, des capteurs d'inertie, des capteurs d'accélération, des capteurs de gravité, des capteurs de champ magnétique, des capteurs de température corporelle, des capteurs de pouls, des capteurs d'oxygène dans le sang, des capteurs électromyographiques, des capteurs électrocardiographiques et/ou des repères optiques pour suivi visuel. 30
35
8. Procédé pour la reconnaissance automatique de la position d'un capteur sur le corps d'une personne comprenant les étapes consistant à : 40
- fournir une unité de reconnaissance de position (1) dans une position prédéterminée sur le corps d'une personne, l'unité de reconnaissance de position (1) portant une identification unique ; 45
 - placer un capteur (2) portant une identification unique et une unité de communication sur l'unité de reconnaissance de position (1) ; 50
 - lire l'identification unique à partir de l'unité de reconnaissance de position (1) et l'identification unique du capteur utilisateur l'unité de communication (3) du capteur (2) ; 55
 - utiliser l'unité de communication pour transmettre la paire de données des identifications uniques de l'unité de reconnaissance de position (1) et du capteur (2) à une unité de traitement de données (4) ; et
 - accéder à une base de données (5) comprenant la corrélation de l'identification unique de l'unité de reconnaissance de position (1) et de la position prédéterminée de l'unité de reconnaissance de position ; et
 - corréler l'identification unique du capteur (2) avec la position prédéterminée de l'unité de reconnaissance de position (1).
9. Procédé selon la revendication 8, dans lequel le capteur (2) est sélectionné dans le groupe comprenant des capteurs de mouvement, des capteurs d'inertie, des capteurs d'accélération, des capteurs de gravité, des capteurs de champ magnétique, des capteurs de température corporelle, des capteurs de pouls, des capteurs d'oxygène dans le sang, des capteurs électromyographiques, des capteurs électrocardiographiques et/ou des repères optiques pour suivi visuel.
10. Utilisation d'un système selon les revendications 1 à 8 pour reconnaître automatiquement la position d'un capteur sur le corps d'une personne.

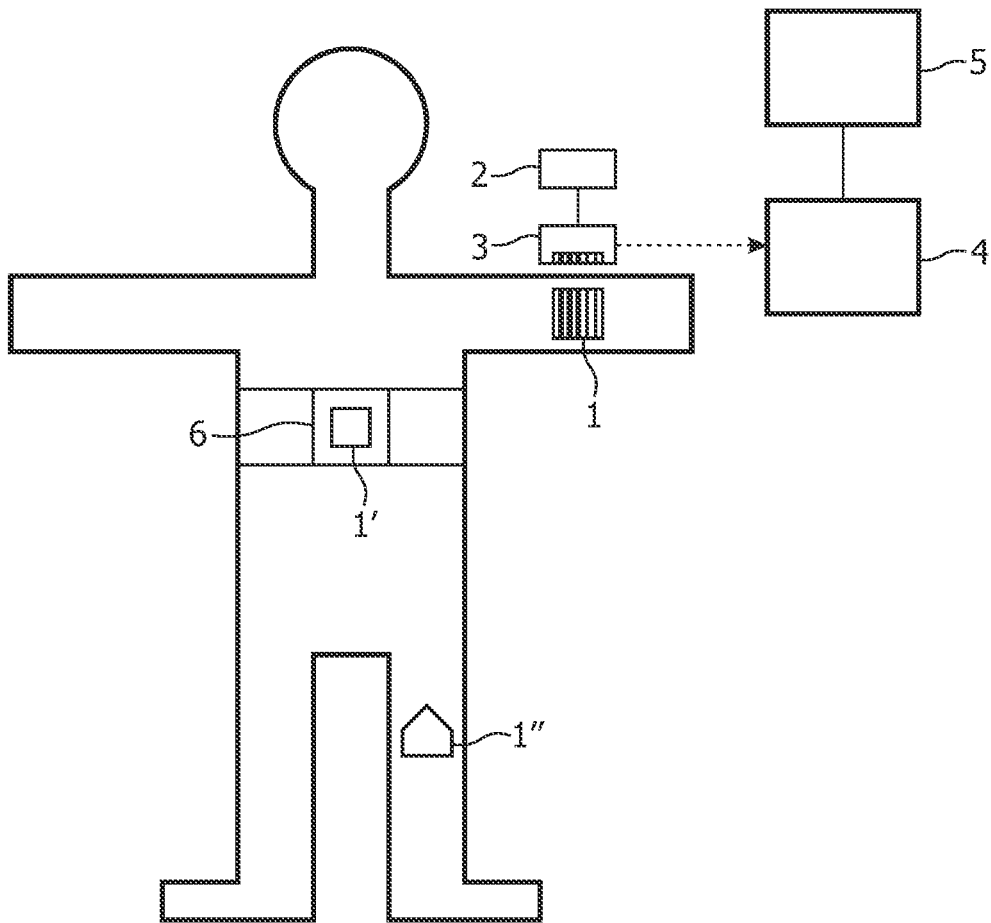


FIG. 1

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2004053444 A [0005]

专利名称(译)	用于自动传感器位置识别的系统和方法		
公开(公告)号	EP2173238B1	公开(公告)日	2016-06-08
申请号	EP2008789402	申请日	2008-07-22
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦电子N.V. 飞利浦知识产权及标准部GMBH		
当前申请(专利权)人(译)	飞利浦知识产权及标准部GMBH 皇家飞利浦N.V.		
[标]发明人	WINTER STEFAN TE VRUGT JUERGEN WILLMANN RICHARD D LANFERMANN GERD BONGERS EDWIN G J M		
发明人	WINTER, STEFAN TE VRUGT, JUERGEN WILLMANN, RICHARD, D. LANFERMANN, GERD BONGERS, EDWIN, G., J., M.		
IPC分类号	A61B5/00 A61B5/06 A61B5/0488 A61B5/0402 A61B5/11		
CPC分类号	A61B5/00 A61B5/0402 A61B5/0488 A61B5/061 A61B5/11 A61B90/90 A61B90/96 A61B90/98 A61B2090/395		
代理机构(译)	kroeze antonius , 约翰		
优先权	2007113175 2007-07-26 EP		
其他公开文献	EP2173238A2		
外部链接	Espacenet		

摘要(译)

自动传感器位置识别系统技术领域本发明涉及一种自动传感器位置识别系统，包括：位置识别单元（1），其位于人体上的预定位置并且具有唯一标识；- 带有唯一标识的传感器（2）；通信单元（3），分配给传感器并与位置识别单元（1）和传感器（2）通信；数据处理单元（4），与通信单元通信；数据库（5）与数据处理系统（4）通信，并包括位置识别单元（1）的唯一标识与位置识别单元（1）的预定位置的相关性。根据本发明的系统提供传感器和身体部分之间的自动关联以及获得这些关联的手段。因此，不再需要人工交互来将身体部分分配给传感器。因此，可以防止分配错误并且通过将特定传感器附接到特定身体部分而不再负担患者并且可以更多地集中于他应该进行的锻炼。

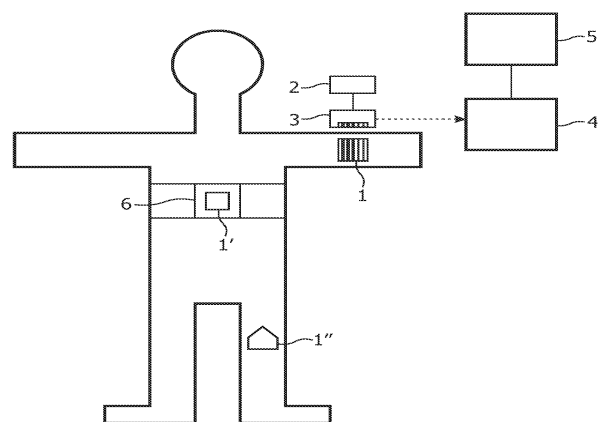


FIG. 1