

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 July 2001 (05.07.2001)

PCT

(10) International Publication Number
WO 01/47600 A1

(51) International Patent Classification⁷: A61N 1/372,
G06F 19/00

(21) International Application Number: PCT/US00/34519

(22) International Filing Date:
19 December 2000 (19.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/173,062 24 December 1999 (24.12.1999) US

(71) Applicant: MEDTRONIC, INC. [US/US]; 7000 Central
Avenue NE, Minneapolis, MN 55432 (US).

(72) Inventors: RIFF, Kenneth, M.; 900 Old Crystal Bay
Road, Wayzata, MN 55391 (US). MAHONEY, Patrick,
M.; 15292 62nd Avenue North, Maple Grove, MN 55311
(US). OWENS, Clifton, W.; 12706 Happy Cake Court,
Minnetonka, MN 55305 (US). MEHRA, Rahul; 4980
Neal Avenue North, Stillwater, MN 55082-1071 (US).

HESS, Michael, F.; 3836 Pillsbury Avenue South, Min-
neapolis, MN 55409 (US). SHETH, Nirav, V.; 3347
132nd Circle NW, Coon Rapids, MN 55448 (US). POOL,
Nancy, Perry; 11500 Park Ridge Drive West, Minnetonka,
MN 55305 (US). UJHELYI, Michael, R.; 9317 Tewsberg
Gate North, Maple Grove, MN 55311 (US).

(74) Agents: WOLDE-MICHAEL, Girma et al.; Medtronic,
Inc. MS301, 7000 Central Avenue NE, Minneapolis, MN
55432 (US).

(81) Designated States (national): CA, JP.


(84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

Published:

- With international search report.
- With amended claims and statement.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND A SYSTEM FOR USING IMPLANTED MEDICAL DEVICE DATA FOR ACCESSING THERA-
PIES

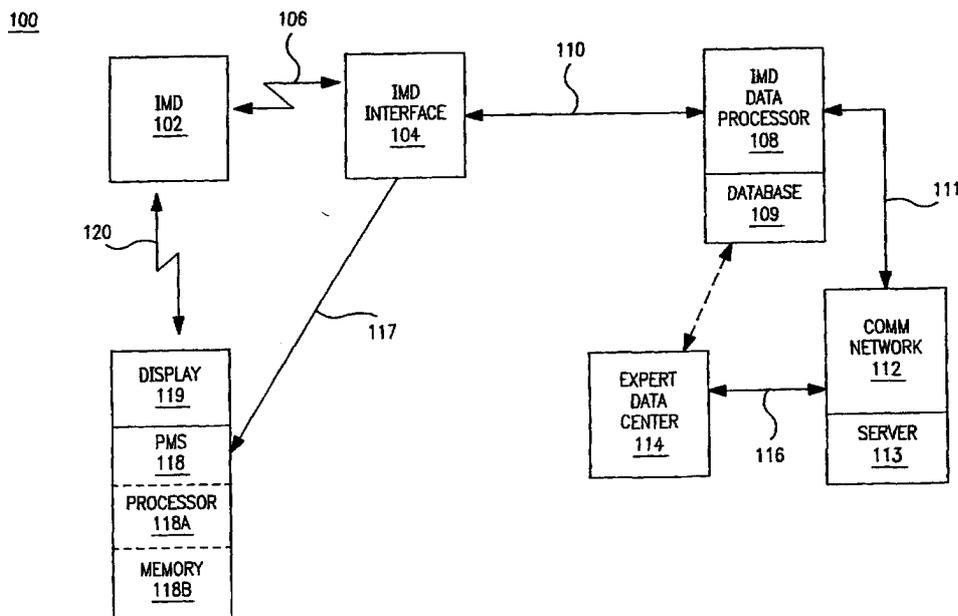

(57) Abstract: A method and system facilitates the access by a patient of implanted medical device related data for patient partic-
ipation in their own clinical care and therapy. In an example embodiment, the method includes establishing a communications link
between an implanted medical device and a data processor via an implanted medical device interface. Access to a secured database
is obtained via the implanted device data processor using a set of patient identification data. A query is then submitted via the data
processor to the secured database in response to input patient diagnostic data. Data received from the secured database is then
displayed for use in a patient evaluation.



WO 01/47600 A1

A METHOD AND A SYSTEM FOR USING IMPLANTED MEDICAL DEVICE DATA FOR ACCESSING THERAPIES

FIELD OF THE INVENTION

The present invention generally relates to a method and a system for using
5 implanted medical device data to access medical data processing systems.
Specifically, the invention relates to a method and a system for remotely accessing
medical data processing systems adapted to provide implanted device therapies in
response to patient diagnostic data received from an implanted medical device.

BACKGROUND OF THE INVENTION

In recent years, implantable medical device technology has rapidly advanced.
10 Sizes and weights have decreased, while functionality has increased. These advances
have created a corresponding demand for two-way communication between the
implantable medical device and an external device, for example, a programmer
device. In a pacemaker system, for example, a programmer device downloads to an
implanted pacemaker data such as operating parameters. Likewise, data may flow
15 from the implanted device to the programmer device. Modern pacemakers are
capable of storing significant amounts of data about the patient, for example,
physiological data such as electrocardiogram (ECG), and information pertaining to
the pacemaker itself, for example, battery voltage level. This data may need to be
transmitted to the programmer device for evaluation by a physician.

20 Currently implanted medical device programmers typically include an
extendible head portion that includes an antenna. The antenna is connected to other
circuitry in the programmer device via a stretchable coil cable. Thus, the head portion
can be positioned over the patient's implanted device site for programming or
telemetry interrogation of the implanted device. Command instructions or data that
25 are downloaded to the implanted device are referred to as downlink transmissions,
and data transmitted from the implanted device to the programmer device are referred
to as uplink transmissions.

A technology-based health care system that fully integrates the technical and social aspects of patient care and therapy should be able to flawlessly connect the patient with care providers irrespective of separation distance or location of the participants. While clinicians will continue to treat patients in accordance with accepted modern medical practice, developments in communications technology are making it ever more possible to provide medical services in a time and place independent manner.

Prior art methods of clinical services are generally limited to in-hospital operations. For example, if a physician needs to review the performance parameters of an implanted device, the patient will likely visit the clinic. If the medical condition of the patient with the implanted device warrants a continuous monitoring or adjustment of the device, the patient will have to stay in the hospital for an extended period of time. Such continuous treatment plans pose both economic and social hardship on patients. Depending on the frequency of data collection this procedure may seriously inconvenience patients that live in rural areas or have limited physical mobility. The need for upgrading the software of an implanted medical device also requires another trip to the hospital to have the upgrade installed. Further, as the segment of the population with implanted medical devices increases many more hospitals, clinics and service personnel will be needed to provide in-hospital care to patients, thus escalating the cost of healthcare.

Emergency trips to the hospital or clinic also increase the cost of healthcare due to lack of early detection of heart conditions, such as arrhythmias, that are treatable with less invasive practices such as medicinally, if the condition is detected on a timely basis. As the heart condition worsens, the need for physician intervention and long term hospitalization and medication increases. Current detectors of heart conditions, such as arrhythmia detectors, are available but these devices suffer from the shortcomings of external monitoring devices. The difficulties of patients to educate and inform themselves about medical devices prospectively or devices implanted in them, outside of the confines of the hospital, and to participate in their own clinical care and therapy by learning of the latest developments in this area are additional factors that contribute to the increasing costs of healthcare.

SUMMARY OF THE INVENTION

Various embodiments of the present invention are directed to addressing various needs in connection with reducing healthcare costs by facilitating the access of general and specific information on a patient's implanted medical device (IMD), thereby allowing the patient to participate in their own clinical care and therapy.

5 Accordingly, the present invention provides a method and system for facilitating a patient's access to current IMD diagnostic data for timely administration of medical therapies with the assistance of an data processor.

In various embodiments the present invention supports a communications system for providing web-based data resources to capture, analyze, format and display 10 patient-specific information on demand and in real-time. In addition, the invention provides an Internet-based secure site to enable a patient to uplink their IMD to transfer data into a data management center where the data is analyzed and relevant therapy/clinical care is dispensed accordingly. Another aspect of the invention pertains to arrhythmia management via a programmable patient arrhythmia 15 notification device in coordination with the patient's IMD. The notification device can also communicate with a web-based remote data management center. In another aspect of the invention, IMD patients have access to a web-based data management system for IMDs for accessing various clinical and therapy alternatives and related information/services.

20 According to one embodiment of the invention, a method and system facilitates the access by a patient of implanted medical device related data for patient participation in clinical care and therapy. The method includes establishing a communications link between an implanted medical device and a data processor via an implanted medical device interface. Access to a secured database is obtained via 25 the implanted device data processor using a set of patient identification data. A query is then submitted via the data processor to the secured database in response to input of patient diagnostic data. Data received from the secured database is then displayed for use in a patient evaluation.

30 According to another embodiment of the invention, a method and system facilitates access by an IMD patient to their own IMD diagnostic data for patient

education and evaluation. The method includes establishing a communications link between an implanted medical device and a data processor via an implanted medical device interface. Access to a secured database is obtained via the data processor by using a set of patient identification data. Further, a set of patient diagnostic data from the implanted medical device is then transmitted to the data processor for processing. A set of formatted data is then generated, as a function of a data request from the patient, via the data processor using the patient diagnostic data. The set of formatted data received from the secured database via the data processor is then displayed for use in a patient evaluation regimen as required by the doctor or established medical care.

The above summary of the present invention is not intended to describe each illustrated embodiment or every implementation of the present invention. The figures in the detailed description that follow more particularly exemplify these embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention may be more completely understood in consideration of the following detailed description of various embodiments of the invention in connection with the accompanying drawings, in which:

FIG. 1A illustrates a block diagram of a system for facilitating the access by an IMD patient to a data processor capable of processing IMD related data in accordance with an example embodiment of the invention;

FIG. 1B is a flow diagram illustrating an example manner of implementing therapies in connection with detected heart conditions in accordance with an example embodiment of the invention;

FIG. 2 is a flow diagram illustrating another manner of accessing IMD diagnostic data and implementing therapies in connection with detected heart conditions in accordance with another example embodiment of the invention; and

FIG. 3 is a diagram of a system for accessing and processing IMD information as a function of an IMD patient's request in accordance with an example embodiment of the invention.

While the invention is amenable to various modifications and alternative forms, specifics thereof have been shown by way of example in the drawings and will be described in detail. It should be understood, however, that the intention is not to limit the invention to the particular embodiments described. On the contrary, the
5 intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION

The present invention is generally directed to a method and system for generating an IMD related data response as a function of a detected condition in connection with a patient's IMD. While the present invention is not necessarily
10 limited to such an application, the invention will be better appreciated using a discussion of example embodiments in such a specific context.

Early patient notification of various heart conditions can empower a patient to take direct action regarding management of the identified heart condition. In the case
15 of arrhythmias, a device guided antiarrhythmic therapy would allow patients to use drug therapy based upon implanted device notification rather than having to seek medical attention for recurring arrhythmic events. One of the capabilities provided by the present invention is that of arrhythmic detection with programmable notification tailored to specific drug therapies. Accurate detection of atrial fibrillation is a
20 component of a properly operating patient notification device and IMD therapy implementation system.

In an example embodiment, an external messaging system is provided and adapted to communicate with an IMD and use an alpha-numeric messaging program to instruct the patient when to schedule drug therapy. A configurable treatment
25 process is incorporated into an arrhythmia monitoring and notification system for guiding medication therapy for arrhythmia termination, fast ventricular response, or anticoagulation therapy. The configurable features cooperate with the external messaging circuit to assist in scheduling or rescheduling therapy based on patient action and drug delivery timing. The process also provides closed loop
30 communications between an implantable drug delivery system and an implanted

electrical therapy device. The system of the present invention greatly simplifies the patient's role in the decision loop for self-administration of IMD therapies.

Referring now to the figures, FIG. 1A illustrates a block diagram of a system 100 for facilitating the access by a patient to an implanted medical device data processor that is capable of detecting various conditions in accordance with an example embodiment of the invention. System 100 facilitates the access by a patient to implanted medical device related data for the patient's participation in clinical care and therapy. System 100, in this example, includes an IMD port interface 104 that is coupled to an IMD 102 via a communications link 106. Communications link 106 is established, in this example, via telemetry when port interface 104 is in close proximity to the IMD. The link can also be established, for example, with radio frequency signal based telemetry. IMD interface 104 includes features of a programming head or wand that is incorporated into a programming unit for detecting and transmitting IMD diagnostic data. In another embodiment, IMD interface 104 includes an IRM (Interactive Remote Monitor) that is used to uplink data from the implanted device to IMD data processor 108 or to a related website. IMD port interface 104 is coupled via communications link 110 to an IMD data processor 108, which includes a database 109. Communications link 110 can be established via a telephone, a video conference call, a cellular telephone, via a separate Internet connection or other related communications formats for the transmission of data and voice to IMD data processor 108. IMD data processor 108 is coupled via a communications link 111 to a communications network 112, which includes a server 113. Network 112 is in turn coupled to a data processing center 114 via a communications link 116. The data processing center includes medical personnel that analyze and evaluate diagnostic data received from an IMD. The data processing center may be co-located with the patient or may be located remote from the patient and accessed through communications network 112.

In this example embodiment, a patient messaging system (PMS) 118, co-located with IMD 102 is coupled to IMD data processor 108 via IMD interface 104. PMS 118 includes a display 119 and a circuit adapted to assess and detect heart conditions in conjunction with the IMD. The circuit includes a processor 118A and a memory arrangement 118B as well as an audio signal arrangement (not shown) for

emitting sounds that are audible by a patient having IMD 102. A similar circuit is also within data processor 108 for remote detection of heart conditions. In one example embodiment, PMS 118 is coupled to IMD 102 via a telemetry link 120 and is adapted to access IMD status information and independently alert the patient of a heart condition that requires some form of therapy or treatment. The patient is then advised of the therapy options available for treating the detected condition. In another embodiment, the patient initiates a patient query to determine IMD status. In both embodiments, PMS 118 generates at least one suggested therapy (medicinal and/or electrical pulse) that is displayed on display 119 and that is be exercised or administered primarily by the patient. In yet another embodiment, PMS 118 is also capable of programming or reconfiguring certain program features within IMD 102.

System 100 of the present invention provides the capabilities of notifying a patient of an arrhythmia onset and guiding the patient and/or physician to administer the appropriate drug or electrical therapy. By using PMS 118, which in this example is an alphanumeric messaging and programmable patient notification device, the patient is guided through various pharmacological and electrical therapies as required. The patient can now critically time the taking of medications to terminate an arrhythmic event or slow down the ventricular rate or use the medication in combination with electrical therapies. The longer the arrhythmia duration, the less successful medications will be in terminating the arrhythmia. In addition, anticoagulation drug therapy may have to be extended for an additional 3-4 weeks to reduce the risk of a stroke to the patient. Notification via PMS 118, which is proximate to IMD 102 (via a wrist worn device or a personal digital assistant type device), is useful in guiding the patient through anticoagulation therapy when events are long lasting and unresponsive to medical and/or electrical therapies. System 100, via PMS 118, provides the feature of advising the patient in real time of the success or progress of the elected treatment or therapy. Furthermore, since some medications can increase the likelihood that antitachycardia pacing or defibrillation therapies will terminate an arrhythmia, PMS 118 will guide the patient as to the appropriate time to take certain medication in order for electrical therapies to be more successful.

Referring again to FIG. 1A, a communications link is first established between IMD 102 and IMD data processor 108 via IMD port interface 104. In a related

embodiment, the communications link is established directly between the IMD and data processor 118A in order to establish two way communications between the patient and PMS 118 for the patient implemented therapies scenario. Implanted medical device database 108, which is a secured database or website provided via
5 IMD data processor 108, is then accessed by using a set of patient identification data. In this example embodiment, the patient identification data is the serial number of the IMD but can be a special code that is assigned to the IMD patient for obtaining access to the secured database. System 100 facilitates access by the patient having IMD 102 of the secured database using the IMD serial number as the password, after which the
10 patient requests information and/or data from the database. Information available to the patient includes, but is not limited to, information about the particular IMD in use, latest technological developments, clinical trials, patient/lifestyle guidelines, support group information, special HOT LINE numbers for emergencies, dietary and exercise programs and additional links to other websites. System 100 detects the condition at
15 the IMD patient location that the patient is seeking information or data and proceeds to provide the data as a function of the inquiry made. The data response is then generated by IMD data processor 108 and displayed (*e.g.*, on a CRT or LCD screen or LED display) for use by the patient in educating himself on current IMD health concerns or issues.

20 In another example embodiment, processor 118A communications with the patient is initiated by either the patient or by PMS 118 where a heart condition is detected. In this example, the patient of IMD 102 actively seeks a status evaluation of (or a treatment strategy for) his IMD with respect to his heart and either activates PMS 118 or obtains access to IMD data processor 108 for an evaluation or detection
25 of at least one of a plurality of current heart conditions. Once the link with the IMD data processor 108 (or PMS 118) is established, patient diagnostic data is uplinked to the IMD data processor (or PMS 118) for evaluation and detection of the patient's heart condition. Detectable heart conditions include, but are not limited to, arrhythmia, tachycardia, bradycardia and eventual heart failure and are detected over
30 IMD port interface 104 for processor 108 (or directly by 118A from the IMD). A data response as a function of the detected heart condition is then generated by IMD data processor 108 (or PMS 118) and is displayed for use in patient evaluation. In an

example embodiment, the data response is displayed on display 119 of PMS 118 and includes a list of recommended medicinal and/or electrical impulse therapies that are administered by the patient (or a medical assistant).

Referring now to FIG. 1B, a flow diagram 140 illustrates an example manner of processing IMD diagnostic data and implementing therapies in connection with detected heart conditions, in accordance with an example embodiment of the invention. In general, the system guided drug therapy process is illustrated is programmable and is intended to interact and communicate with external messaging systems. In a related embodiment, a patient activator (not shown) communicates with PMS 118 to properly time electrical therapies with medication therapies. In this example embodiment, at step 142 atrial fibrillation (AF) is initiated or commences and lasts for a certain duration of time, with the time value exceeding a predefined time value before the patient notification process starts or before the patient notices that a problem may be occurring. At step 143 PMS 118 initiates communication with the patient, and depending on the time duration or other defined criteria, will follow either steps 144, 150, 154 or 158. At step 144, PMS 118 advises patient that AF has exceeded a time value of T1 and/or that the Burden has exceeded a certain Burden limit value (B limit) and that it is time to initiate therapy. In this example, the patient is alerted by an alarm signal coming from PMS 118 and is instructed at step 146, via an alphanumeric message on display 119, as to his treatment options. In this example, his treatment options include either drugs or pacing options or a combination of both. Two way communications already having been established as discussed earlier, the patient exercises one of the treatment options and advises PMS 118 of the treatment option exercised. At step 148, PMS 118 notifies the patient whether AF has terminated. If AF has not terminated, the process can loop back to step 144 or move to another step in process 140.

At step 150, the patient is notified by PMS 118 that the time duration has exceed a time value of T2, or a burden limit (or any other criteria that is a function of AF duration). At step 152, the patient is advised on patient management treatment options, which in this example includes taking anticoagulant medication. The patient again proceeds to exercise one of the treatment options and advises PMS 118 of the

option exercised. As in the example described above, the process moves to step 148 where the patient waits to be notified that AF has terminated.

At step 154, PMS 118 notifies the patient that the ventricular rate metric has exceeded a time value of T3. At step 156, the patient is advised on patient management treatment options, which in this example includes taking rate-controlling medication. The patient again proceeds to exercise one of the treatment options and advises PMS 118 of the option exercised. As in the example described above, the process moves to step 148 where the patient waits to be notified that AF has terminated.

At step 158, PMS 118 notifies the patient that heart failure is beginning due to a prolonged AF condition. In one example, a sensor input that detects heart failure communicates the condition to PMS 118 in order that the patient is alerted of this condition. At step 160, the patient is advised on patient management treatment options, which in this example includes taking medication to control on the onset of heart failure and/or to call his physician immediately. The patient again proceeds to exercise one of the treatment options and advises PMS 118 of the option exercised. As in the example described above, the process moves to step 148 where the patient waits to be notified that AF has terminated. In all of the embodiments described, the patient has the choice of taking control of his own therapy with the guidance and regular feedback (via two-way communication) of PMS 118.

Referring now to FIG. 2, a flow diagram 200 illustrates another manner of accessing and processing IMD diagnostic data, and implementing therapies in connection with detected heart conditions, in accordance with an example embodiment of the invention. At step 202, IMD data processor 108 (or processor 118A of PMS 118) detects an atrial fibrillation and the patient is notified by an audible sound emitted by PMS 118. In another example embodiment, the audible sound is prompted by a notification signal 117 sent by IMD data processor 108 via interface 104 to PMS 118. In this example embodiment, the patient of IMD 102 is advised of the detection of one of three conditions: patient alert for Atrial fibrillation (AF; step 204); patient alert for anticoagulation (step 230); and patient alert for rapid and prolonged ventricular rate (step 240). Depending on the detected condition, a different path is followed by the IMD patient in administering therapy with the

assistance of PMS 118 and system 100. In one example, the patient is notified via PMS 118 to take a medication 206 and to advise PMS 118 when the medication has been taken. At step 208, a determination is made whether the AF is still present. If not, at step 210 the patient is notified that AF is terminated. If so, at step 212 the patient is advised accordingly and another set of therapy options is communicated to the patient. Depending on the programming of PMS 118, antitachycardia pacing will be automatically delivered at an optimal drug rate, which is set by either a fixed time interval or by a change in sensed atrial cycle length (a surrogate of drug effect). At step 214, another determination is made whether the AF is still present; if not, at step 216 the patient is advised accordingly. If so, at step 218 either automatic pacing continues with a return path to 212, or the patient, at step 220, activates the defibrillation mode of IMD 102 and applies a shock to terminate the arrhythmia.

In another embodiment, programmable PMS 118 instructs the patient to perform electrical therapies in order to terminate the arrhythmia. If this approach is not successful PMS 118 advises the patient to follow another course of action by taking the medication and activating PMS 118 to repeat the pacing therapies after a fixed time interval or when atrial cycle length changes. Shock therapy may be in order at this point with notification being programmed for a fixed time interval to allow the medication ample time to terminate the heart condition before having to provide the shock treatment. In most of the embodiments, the patient has the option of receiving continuous feedback via PMS 118 (or other display methods) regarding medication efficacy.

Referring to step 230 of FIG. 2, system 100 along with PMS 118 is helpful in assisting in the management of anticoagulation therapy. At step 232, the programmable features of PMS 118 have a burden threshold. For example, if atrial arrhythmia is present for greater than a certain portion of a 24-hour interval, the patient is notified to start anticoagulation therapy and/or see a physician.

Referring to step 240, system 100 assists in the management of ventricular rate control for patients with paroxysmal AF. PMS 118 and system 100 provide guidance in the use of medication only when needed, since rate controlling medications are poorly tolerated. This treatment strategy greatly improves a patient's quality of life by using the programmable feature of PMS 118; at step 242, to intermittently use rate

control medications. At step 244, a determination is made whether the ventricular response is in the alert criteria zone, such as a fast zone. If so, at step 246 the patient is notified via the alert feature of PMS 118 that an AF is occurring (ventricular response is in the fast zone) and to start taking the rate control medication. If the
5 ventricular response is not in the criteria zone, at step 248 the patient is notified that the ventricular response is normal. At step 250, another determination is made whether AF is present. If so, at step 252 patient continues the rate control medication. If AF is not present, at step 254 the patient is notified that AF has terminated and rate controlling medication therapy is to be terminated. In this example embodiment, for
10 patients with chronic AF with accelerated (or breakthrough) fast ventricular response, PMS 118 alerts the patient to take an extra dose of rate control medication. If that dose is ineffective, or more than two extra doses are needed within a 24 hour to prevent a fast ventricular response, then the patient is notified to visit a physician.

In another embodiment, the antiarrhythmic, anticoagulation and ventricular rate control medication therapies guided by system 100 are simultaneously
15 implemented. A patient that has an episode of AF is notified to take an antiarrhythmic medication in an attempt to terminate the arrhythmia. PMS 118 also notifies the patient that the ventricular response is in the fast zone and should also take a rate control medication. If no such therapies are successful and AF burden falls
20 into the anticoagulation zone, the patient is notified to start anticoagulation therapy.

PMS 118 provides instructions to the patient on when medications and electrical therapies should be delivered based upon programmable features. The programmable features complement any device in the system that monitors, detects and notifies patient when an arrhythmia is occurring. Treatment options generated by
25 PMS 118 include: 1) medications only and not implementing any electrical therapies, such as in the equipment sold under the brand Reveal™; 2) implementing pacing backup for drug-induced bradycardia; 3) implementing pacing backup with antitachycardia (AT500™); or 4) implementing pacing backup, antitachycardia pacing and defibrillation (Jewel AF™). PMS 118, in one embodiment, is a handheld
30 device using standard telemetry communications protocols or a wristwatch device using radio frequency signals to establish the telemetry link with the IMD. The patient uses the handheld device upon receiving an audible notification tone (from

PMS 118) to place the handheld device in close proximity to the IMD or an IPG (implanted pulse generator). The alphanumeric messaging circuit then instructs the patient regarding rhythm status and the type of medication or electrical therapies need to be administered. The patient also uses the handheld device to instruct the IPG as to when a medication was taken in order that electrical therapies are timed to occur at a maximal medication effect. Thus, any synergies between medication and electrical therapies are exploited.

Some of the advantages provided by the various embodiments of the present invention include: early recognition of the need for therapy; proper diagnosis and therapy early in the detection process; and reduced risk of toxicity from medications that would normally be taken chronically due to an inability to properly diagnose the heart condition. With the present invention, antiarrhythmic medications are administered when an atrial fibrillation occurs and the patient is not be burdened with the expense, toxicity and inconvenience of daily medication consumption. In addition, quantifying the daily AF burden and ventricular response can guide usage of anticoagulation and rate control drug. Moreover such diagnosis and patient awareness will document drug therapy efficacy on a real time basis. By diagnosing on a timely basis a patient's heart condition, such as an arrhythmia, undesirable consequences such as chronic AF, congestive heart failure or thromboembolic events can be avoided. Continuous monitoring of heart rhythm with patient notification of arrhythmia onset and termination will allow the patient to be in control of their AF management. With improved arrhythmia management provided by the present invention the patient is alerted to take medication, to deliver electrical therapy (pacing or defibrillation) or seek medical attention before onset of conditions requiring anticoagulation therapy.

FIG. 3 illustrates a system 300 for accessing and processing IMD patient diagnostic data, as well as formatting such data as a function of the IMD patient's request, in accordance with an example embodiment of the invention. The method and system facilitate the access by an IMD patient of diagnostic data for patient education and evaluation. IMD information is retrievable from and is displayable at a home environment 302, for example. Additional information is retrievable through a database located at a data processing center or hospital via the Internet 304. Patient

information that is retrieved in a healthcare facility 306, and stored in a secured database, is accessible by the patient via the Internet 304 or by telephone or other communication systems.

5 In this example embodiment, the patient first establishes a communications link between the IMD and the IMD data processor 108 via the IMD device interface as in FIG. 1. A secured IMD database provided by the IMD data processor is then accessed using a set of patient identification data (*e.g.*, IMD serial number or an alpha-numeric password assigned by database manager). A set of patient diagnostic data from IMD 102 is then transmitted via an uplink transmission to IMD data
10 processor 108 for processing. A set of formatted data is generated, as a function of a request from the patient, by IMD data processor 108 using the patient's diagnostic data. In one example, current diagnostic data is compared with the patient's historical information stored in database 109. In another example, the data is also formatted to draw comparisons with information from other IMD users to illustrate a trend or for
15 recognition of a pattern in the patient's IMD operation. The formatted data generated by IMD data processor 108 is then displayed for use in the patient's own evaluation or as an interactive tool to be used with the physician or with a data processing center having staff knowledgeable in implanted medical devices. In another embodiment, the interactive component is available for discussing the patient formatted data with a
20 remotely located expert data center or physician. This can include a voice connection via a home PC or using the telephone to have a discussion concerning the displayed data.

As illustrated in FIG. 3, the patient diagnostic data is retrievable from the IMD and certain heart conditions are detectable by IMD data processor 108 (or PMS 118)
25 that include, but are not limited to, Atrial Fibrillation, Ischemia, MI (Myocardial Infarction) and SCD (Sudden Cardiac Death) detection and prediction. Other equipment that can be incorporated into system 100 for improved diagnostic capability of a patient's IMD condition include: implanted event recorders, implanted diagnostic monitors and pacing/defibrillation systems. Other non-invasive
30 physiological information can also be gathered by system 100 that would assist the patient in conducting a minimal level of self-health evaluation. For example, ECG information is retrievable for analysis by the patient well before a health condition

occurs that requires hospitalization. This information is recorded in the database 109 for later use in patient diagnostic data analysis and is accessible through server 113 of communications network 112 or through the Internet 304.

5 Some of the advantages provided by the various embodiments of the present invention include enhanced patient availability for regular IMD and ECG evaluations and a comfortable interrogation session in a patient's home or familiar environment that eliminates the necessity of traveling to the hospital.

10 The present invention is compatible with a number of techniques for interrogating implanted medical devices, such as drug pumps, neurological implants, nerve stimulators, various cardiac implants and equivalent medical devices. In addition, the embodiments described are compatible with remote patient management systems that interact with remote data and expert data centers and compatible with a data communication system that enables the transfer of clinical data from the patient to a remote location for evaluation, analysis, data reposition, and clinical evaluation.

15 Various modifications, equivalent processes, as well as numerous structures to which the present invention may be applicable will be readily apparent to those of skill in the art to which the present invention is directed upon review of the present specification. The claims are intended to cover such modifications and devices.

WE CLAIM:

1. A method for accessing implanted medical device for patient alert and therapy dispensation data comprising:
 - 5 establishing a communications link between an implanted medical device and a data processor via an implanted medical device interface;
 - obtaining access to a secured database via the data processor using a set of patient identification data;
 - submitting via the data processor a query to the secured database in response
 - 10 to input patient diagnostic data; and
 - displaying the data received from the secured database for use in a patient evaluation.

2. The method of claim 1, wherein the step of submitting the query includes the
15 step of:
 - detecting via the data processor at least one of a plurality of predefined conditions of the patient's implanted medical device; and
 - generating a data response as a function of the detected conditions.

3. The method of claim 2, wherein the step of detecting a condition includes the
20 steps of:
 - performing an uplink transmission of a set of patient diagnostic data from the implanted medical device to the data processor; and
 - processing the patient diagnostic data to detect at least one of the plurality of
 - 25 conditions.

4. The method of claim 2, further comprising the steps of:
 - notifying the patient via the data processor of the detected condition;
 - monitoring the implanted medical device; and
 - 30 displaying a first implanted medical device status.

5. The method of claim 4, further comprising:

displaying a first set of treatment options as a function of the first implanted medical device status and of the patient notification; and
exercising at least one of the treatment options.

- 5 6. The method of claim 5, wherein displaying treatment options includes displaying at least one medical option along with a time interval for exercising the displayed option.
- 10 7. The method of claim 5, wherein the treatment options are selected from the group consisting of: medication, electrical impulse from the implanted medical device, and a request for medical assistance.
- 15 8. The method of claim 5, further comprising the step of notifying the data processor of the exercised treatment option.
- 20 9. The method of claim 8, further comprising the steps of:
 monitoring the implanted device continuously after notification of exercise of the displayed option; and
 notifying the patient of a second medical device status and of a second set of treatment options, the second set of treatment options being a function of the exercised option and the second medical device status.
- 25 10. The method of claim 4, further comprising the step of reconfiguring patient notification of the detected condition such that the patient notification is responsive to a second plurality of conditions.
- 30 11. The method of claim 1, wherein obtaining access to the secured database includes obtaining access to a remotely located secured database via a communications network.
12. The method of claim 1, wherein input patient diagnostic data includes an IMD patient request for information from the secured database.

13. The method of claim 1, wherein the step of establishing a communications link includes automatically retrieving the set of patient identification data from the IMD.

5

14. The method of claim 8, further comprising the step of reconfiguring the treatment options as a function of the exercised option and the IMD status.

15. A system for accessing implanted medical device data comprising:

10

means for establishing a communications link between an implanted medical device and a data processor via an implanted medical device interface;

means for obtaining access to a secured database via the data processor using a set of patient identification data;

15

means for submitting via the data processor a query to the secured database in response to input patient diagnostic data; and

means for displaying the data received from the secured database for use in a patient evaluation.

20

16. The system of claim 15, wherein said display means includes an LCD, CRT and an LED screen adapted to display the data received.

17. The system of claim 15, wherein the set of patient identification data includes an implanted medical device serial number.

25

18. The system of claim 15, wherein the data received from the secured database includes a set of implanted medical device treatment options.

30

19. The system of claim 18, further comprising means for notifying a patient of the detection of a heart condition at the implanted medical device coupled to the data processor and display means, the data processor configured and arranged to receive notification of an exercise of a treatment option.

20. A system of claim 19, wherein the data processor is adapted to reconfigure the treatment options as a function of the exercised option and the IMD status.

21. A method for accessing implanted medical device data comprising:
5 establishing a communications link between an implanted medical device and
a data processor via an implanted medical device interface;
 obtaining access to a secured database via the data processor using a set of
patient identification data;
 transmitting a set of patient diagnostic data from the implanted medical device
10 to the data processor;
 submitting via the data processor a query to the secured database in response
to detecting a condition at the implanted medical device from the patient diagnostic
data; and
 displaying the data received from the secured database for use in a patient
15 evaluation.

22. The method of claim 21, wherein the step of submitting the query includes the
step of:
 detecting via the data processor at least one of a plurality of predefined
20 conditions of the patient's implanted medical device; and
 generating a data response as a function of the detected conditions.

23. The method of claim 22, further comprising the steps of:
 notifying the patient via the data processor of the detected condition;
25 monitoring the implanted medical device; and
 displaying a first implanted medical device status.

24. The method of claim 23, further comprising the steps of:
 displaying a first set of treatment options as a function of the first implanted
30 medical device status;
 exercising at least one of the treatment options;
 notifying the data processor of the exercised treatment option;

monitoring continuously the implanted device; and
notifying the patient of a second medical device status and of a second set of
treatment options, the second set of treatment options being a function of the
exercised option and the second medical device status.

5

25. A method for accessing implanted medical device data comprising:
establishing a communications link between an implanted medical device and
a data processor via an implanted medical device interface;
obtaining access to a secured database provided via the data processor using a
10 set of patient identification data;
transmitting a set of patient diagnostic data from the implanted medical device
to the data processor;
generating a set of formatted data via the data processor using the patient
diagnostic data as a function of a data request from the patient; and
15 displaying the set of formatted data received from the secured database via the
data processor for use in a patient evaluation.

15

26. A method of claim 25, wherein generating the formatted data includes
extracting a set of historical patient diagnostic data from the secured database.

20

27. The method of claim 26, further comprising the step of using the
communications link between the implanted medical device and the data processor to
address a patient query on the formatted data after the formatted data has been
displayed.

25

28. The method of claim 26, further comprising the step of establishing a
communications link with a patient having the implanted medical device to provide an
interactive exchange of information with a data processing center located remote from
the patient.

30

29. The method of claim 25, wherein the step of generating the formatted data
includes the step of formatting the patient diagnostic data to illustrate a trend.

30. A system for accessing implanted medical device data comprising:
means for establishing a communications link between an implanted medical
device and a data processor via an implanted medical device interface;
5 means for obtaining access to a secured database via the data processor using a
set of patient identification data;
means for transmitting a set of patient diagnostic data from the implanted
medical device to the data processor;
means for generating a set of formatted data via the data processor using the
10 patient diagnostic data as a function of a data request from the patient; and
means for displaying the set of formatted data from the implanted medical data
processor for use in a patient evaluation.

31. A system for accessing implanted medical device data comprising:
15 means for establishing a communications link between an implanted medical
device and a data processor via an implanted medical device interface;
means for obtaining access to a secured database via the data processor using a
set of patient identification data;
20 means for transmitting a set of patient diagnostic data from the implanted
medical device to the data processor;
means for submitting via the data processor a query to the secured database in
response to detecting a condition at the implanted medical device from the patient
diagnostic data; and
25 means for displaying the data received from the secured database for use in a
patient evaluation.

AMENDED CLAIMS

[received by the International Bureau on 1 June 2001 (01.06.01);
original claims 1-31 replaced by new claims 1-15 (3 pages)]

5

1. A system for patient-guided delivery of therapy for a medical condition having an implantable medical device (IMD) (102) accessible by an external interface unit (104) that communicates over a communications link (106) with a data processing facility having a secure data base (109) accessed using patient identification data, characterized in that a patient messaging system (118) is coupled to the IMD and to the data processing facility to provide data for detecting and assessing a medical condition of the patient and to obtain therapy data that is a function of the medical condition for use in guiding the patient in delivering a therapy.

10

15

2. The system of claim 1 wherein the communication link (106) is Internet-based and the data processing facility is accessed by a page of an Internet website.

20

3. The system of claim 1 wherein the external interface unit (104) is a programmer.

25

4. The system of claim 1 wherein the patient messaging system is a personal digital assistant.

5. The system of claim 1 wherein the implantable medical device (IMD) is a device selected from a group consisting of a cardiac pacemaker or a cardiac defibrillator.

30

6. The system of claim 5 wherein the communications link provides for up-linking diagnostic data from the IMD for evaluation of the patient's heart condition.

7. The system of claim 6 wherein the data processing facility includes a data processor (108) generating a data response as a function of a detected heart condition for display on the patient messaging system.

35

5 8. The system of claim 6 wherein the external interface unit is a programmer and the data processing facility includes a data processor (108) generating a data response as a function of a detected heart condition for routing to the programmer to provide programming data for the IMD.

10 9. The system of claim 1 wherein the patient messaging system displays treatment options.

15 10. The system of claim 9 wherein the patient messaging system communicates a selected treatment option to the data processing facility.

15 11. The system of claim 1 wherein the patient messaging system operates in a mode providing an interactive exchange of information with the data processing facility.

20 12. A method for patient-guided delivery of therapy for a medical condition of a patient having an implantable medical device (IMD) comprises:

 accessing the IMD using an external interface unit;

 establishing a communication link between the external interface unit and a data processing facility having a secure data base;

25 accessing the data processing facility using patient identification data;

 providing data to the data processing facility for detecting and assessing a medical condition of the patient;

 generating therapy data that is a function of the medical condition for use in guiding a patient in delivering a therapy; and

30 displaying the therapy data to the patient.

- 5 13. The method of claim 12 wherein the implantable medical device (IMD) is a device selected from a group consisting of a cardiac pacemaker or a cardiac defibrillator.
- 10 14. The method of claim 13 wherein the therapy data is generated as a function of a detected heart condition.
15. The method of claim 14 wherein the therapy data includes treatment options.

STATEMENT UNDER ARTICLE 19(1)

The amendments provided by new claims 1-15 do neither alter the disclosure in the drawings nor introduce new matter.

The difference between the new claims 1-15 being presented and the original claims is that the subject matter of the invention is set forth in a more concise fashion and emphasizes the patient messaging system feature of the claimed system.

The new claims 1-15 are distinguished from the subject matter disclosed in the references cited in the International Search Report in that none of the citations discloses a system wherein a patient messaging system is coupled to an IMD and to a data processing facility to provide data for detecting and assessing a medical condition of the patient and to obtain therapy data that is a function of the medical condition for use in guiding the patient in delivering a therapy.

The closest one of the cited reference is EP 1 057 448. This reference merely provides for the uplink over the Internet of diagnostic data from an IMD to a data processing center having a database for diagnostic data collection purposes and feedback of a patient status indicator.

Accordingly, the cited reference either alone or in combination with the other references does not anticipate or render obvious the claimed elements of the present invention.

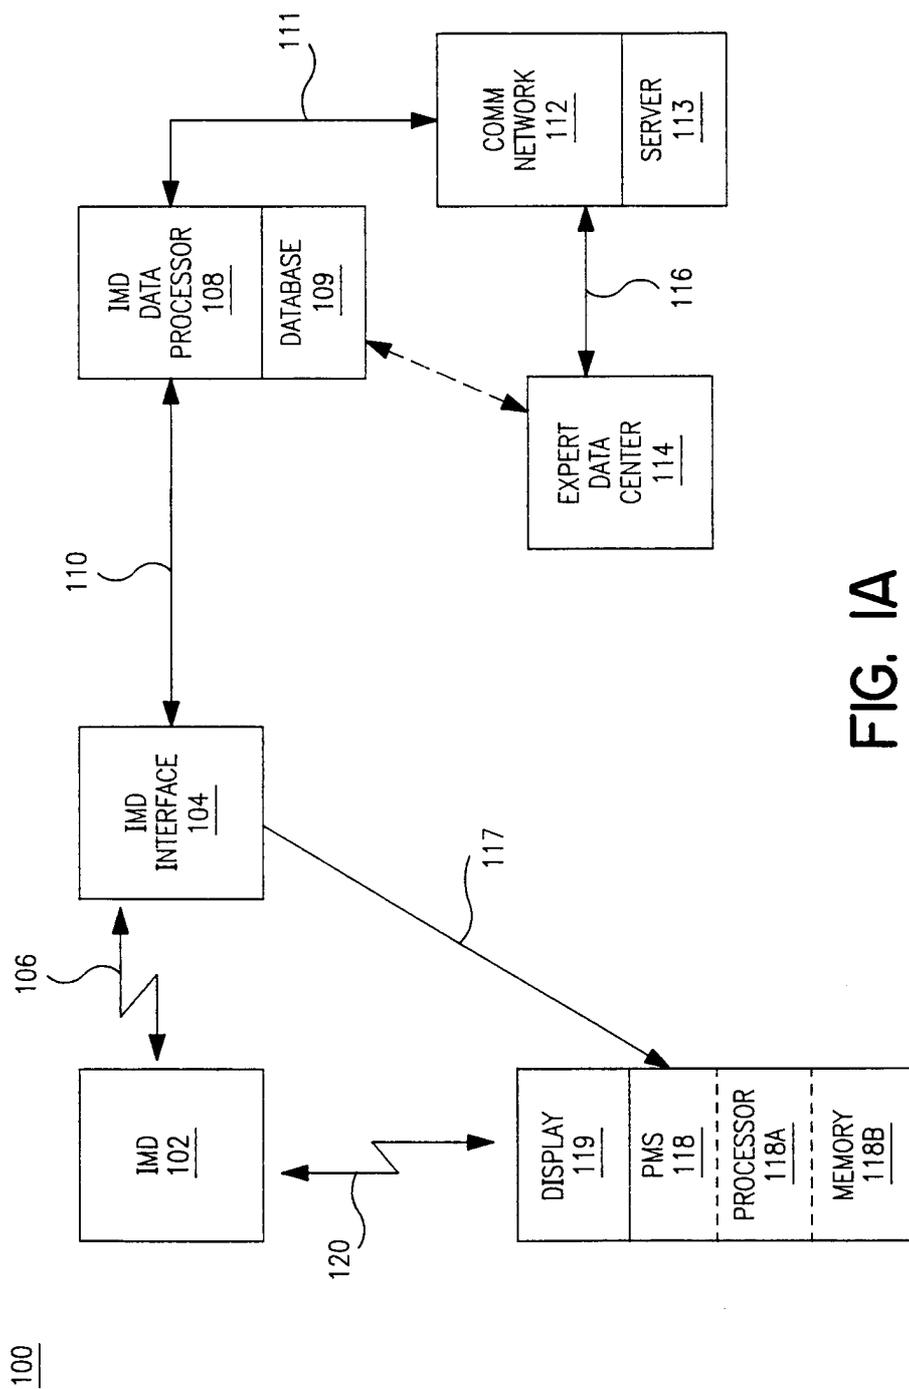


FIG. 1A

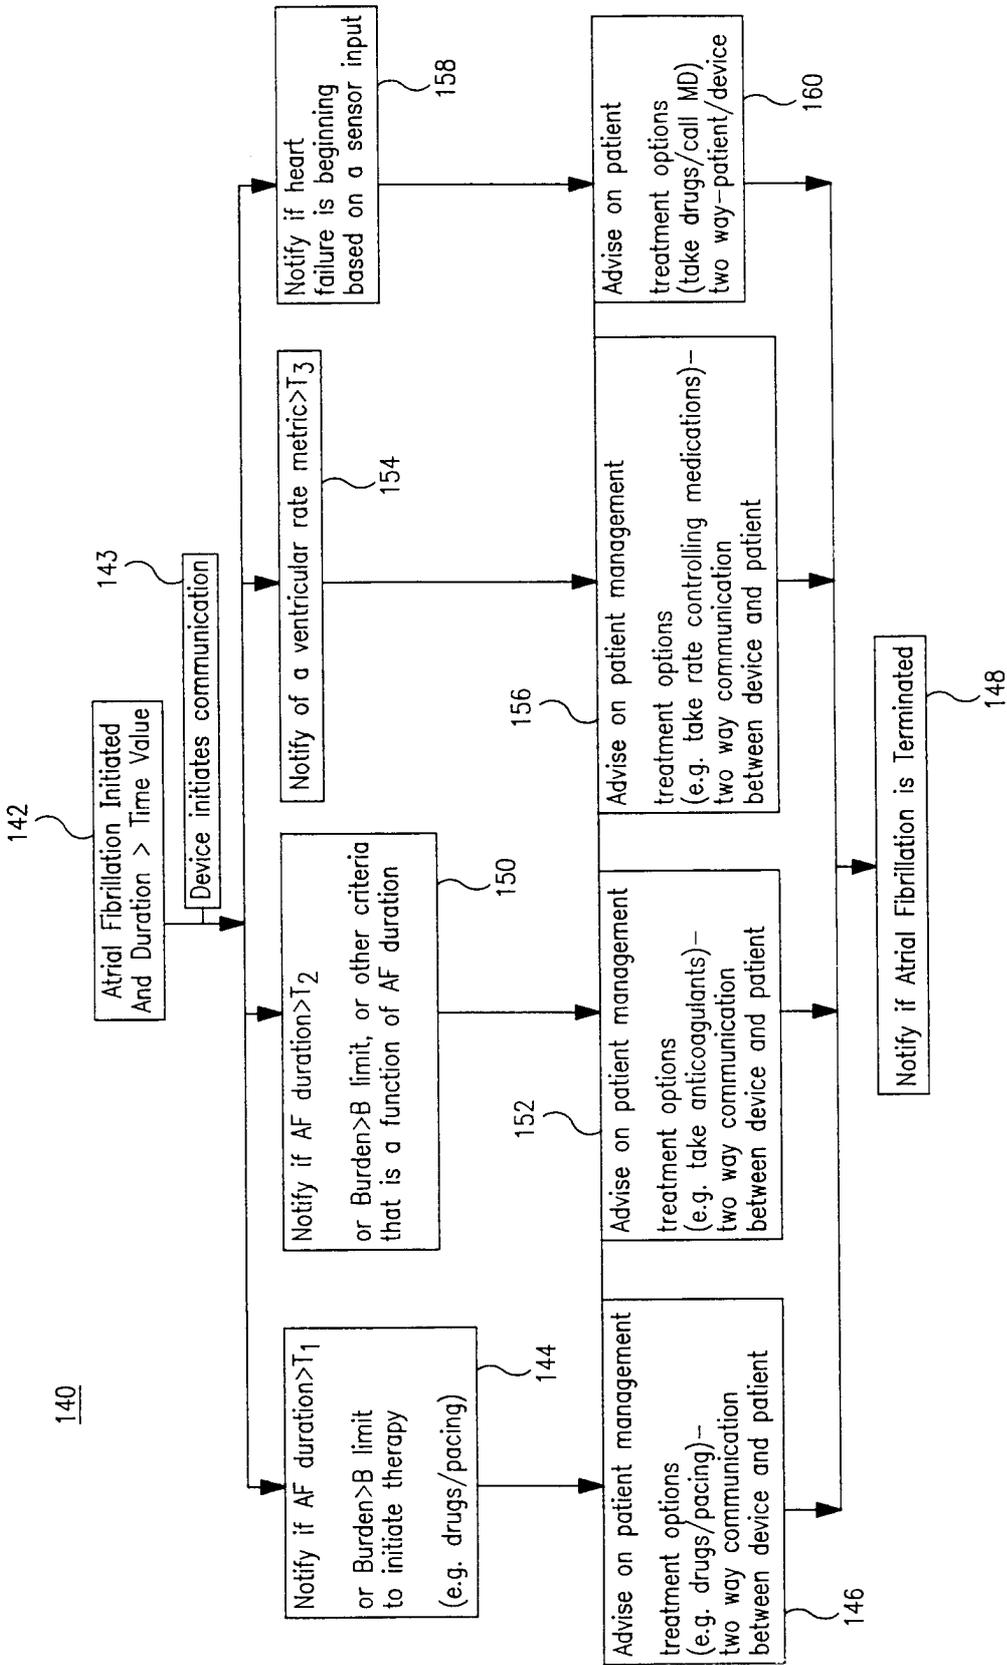


FIG. 1B

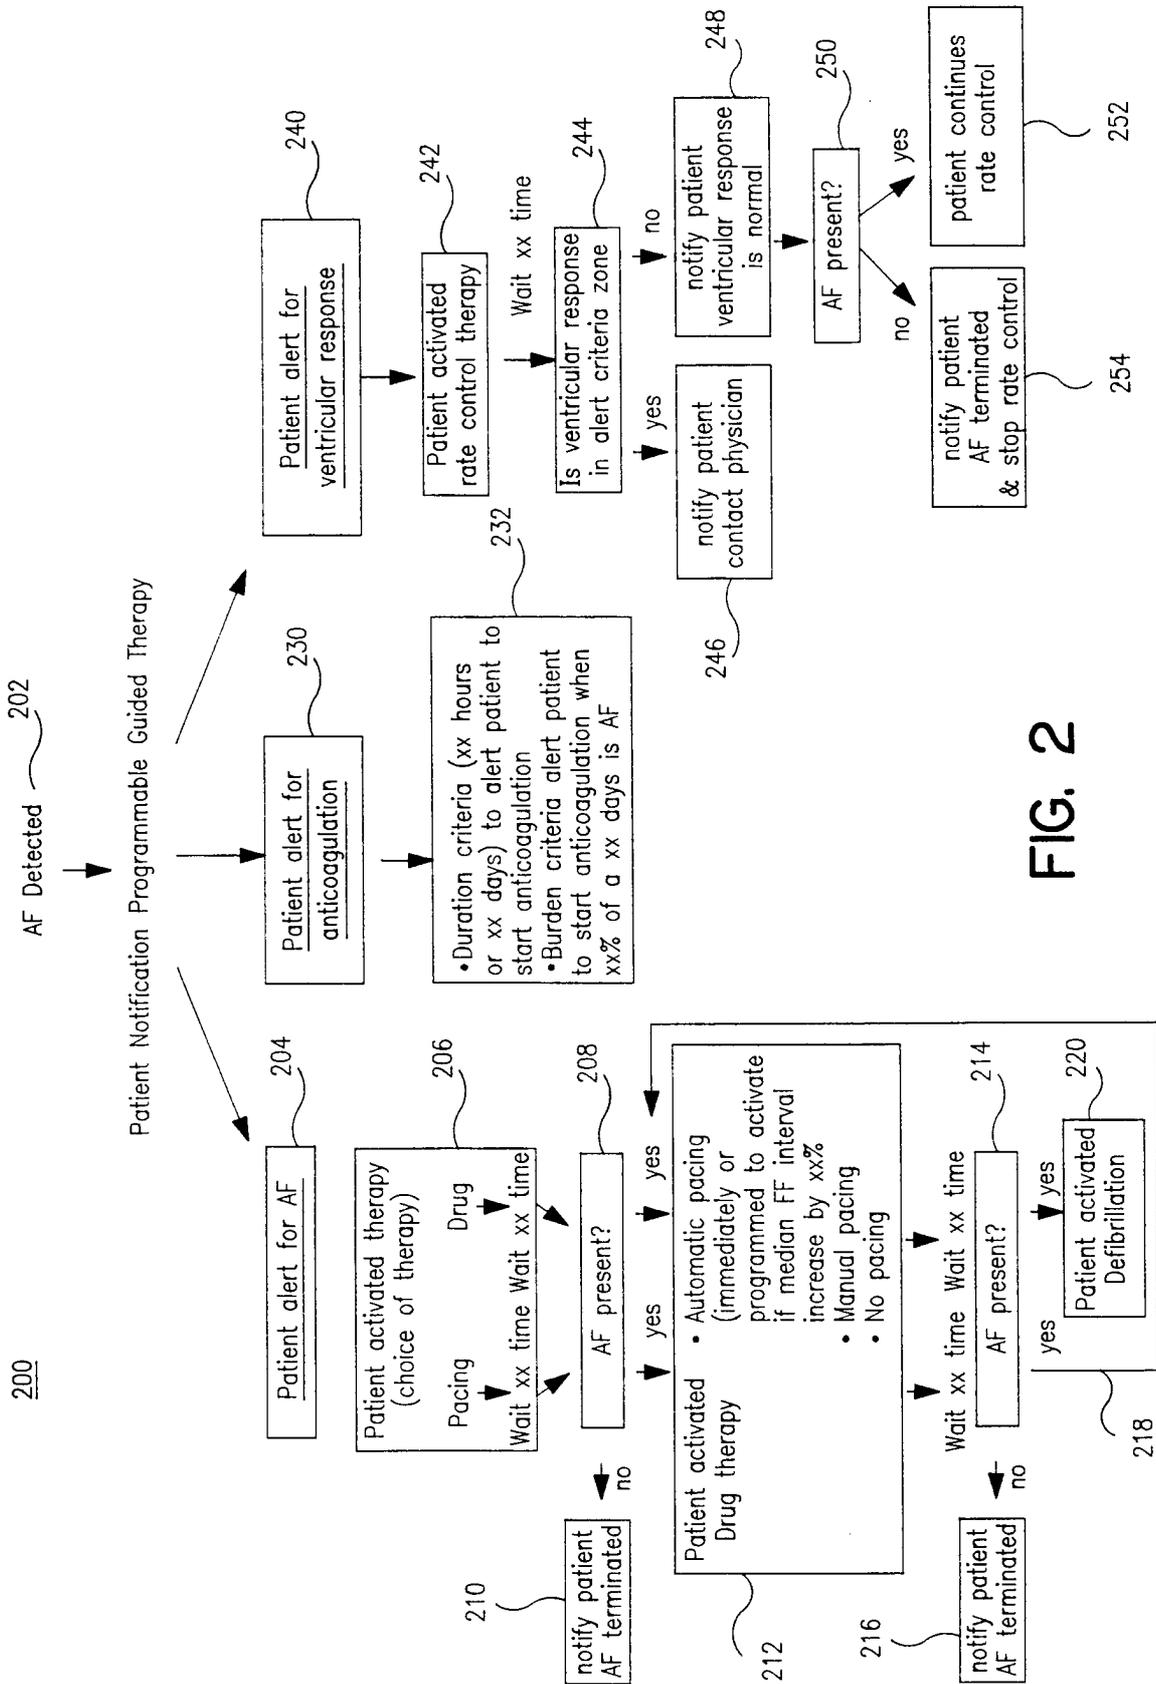


FIG. 2

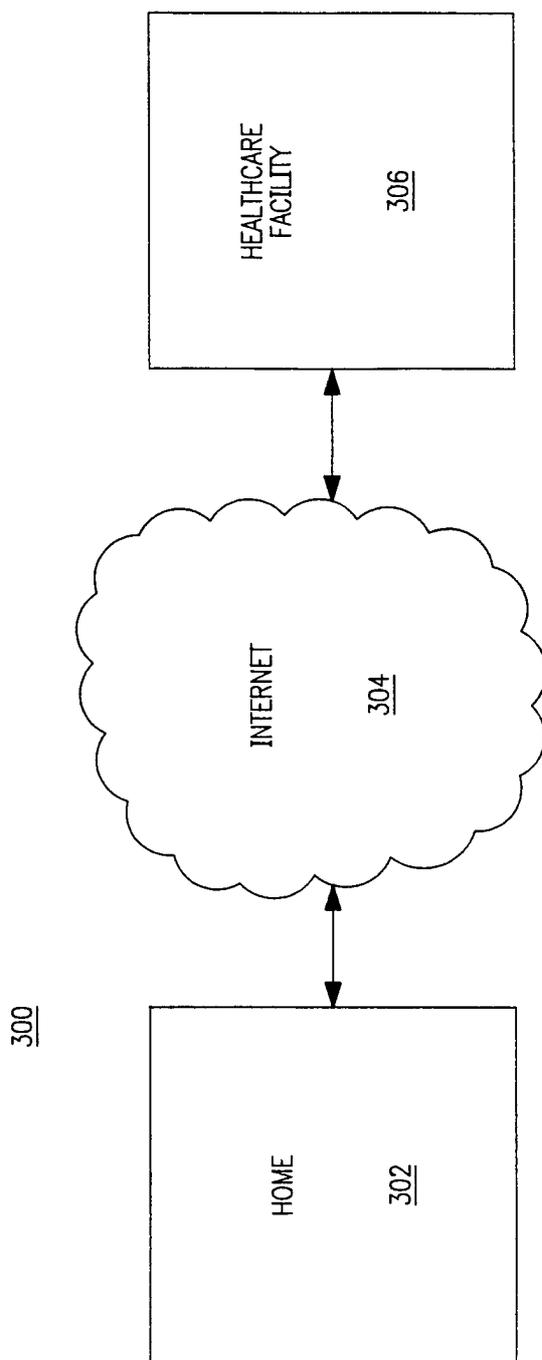


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/34519

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 A61N1/372 G06F19/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 A61N G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 752 976 A (DUFFIN EDWIN G ET AL) 19 May 1998 (1998-05-19) the whole document	1-4, 11-13, 15-23, 25-31
X	US 5 113 869 A (STEINHAUS BRUCE M ET AL) 19 May 1992 (1992-05-19) column 15, line 29 -column 17, line 55 column 19, line 54 -column 22, line 26; figures 10-12,14	1-4, 11-13, 15-23, 25-28, 30,31
A	--- -/--	29

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

30 March 2001

Date of mailing of the international search report

06/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Allen, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/34519

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 11722 A (AEL IND INC) 25 April 1996 (1996-04-25) page 4-5 page 10, line 26 -page 12, line 20; figures ---	1-4, 11-13, 15-23, 25,31,32
X	US 5 720 770 A (CROSBY PETER ET AL) 24 February 1998 (1998-02-24) column 2, line 35 -column 10, line 40 column 14, line 14-50; figures 1-4A,5-7 ---	1-4, 11-13, 15-23, 25-31
P,X	EP 1 057 448 A (BARDY GUST H) 6 December 2000 (2000-12-06) paragraphs '0012!-'0015! paragraphs '0021!-'0047! paragraphs '0057!-'0062!; figures ---	1-4, 11-13, 15-23, 25-31
P,X	WO 00 30529 A (MEDTRONIC INC) 2 June 2000 (2000-06-02) page 11-13 page 16-27; figures 1-6 -----	1-4, 11-13, 15-23, 25-31

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No PCT/US 00/34519

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5752976 A	19-05-1998	AU 709767 B AU 6176996 A CA 2224520 A EP 0939662 A JP 11508165 T WO 9700708 A US 6083248 A	09-09-1999 22-01-1997 09-01-1997 08-09-1999 21-07-1999 09-01-1997 04-07-2000
US 5113869 A	19-05-1992	EP 0472411 A	26-02-1992
WO 9611722 A	25-04-1996	AU 4131696 A	06-05-1996
US 5720770 A	24-02-1998	NONE	
EP 1057448 A	06-12-2000	AU 3638500 A AU 4874700 A EP 1072994 A	14-12-2000 15-02-2001 31-01-2001
WO 0030529 A	02-06-2000	US 6083248 A	04-07-2000

专利名称(译)	一种使用植入的医疗设备数据来访问治疗的方法和系统		
公开(公告)号	EP1242146A1	公开(公告)日	2002-09-25
申请号	EP2000986583	申请日	2000-12-19
[标]申请(专利权)人(译)	美敦力公司		
申请(专利权)人(译)	美敦力公司, INC.		
当前申请(专利权)人(译)	美敦力公司, INC.		
[标]发明人	RIFF KENNETH M MAHONEY PATRICK M OWENS CLIFTON W MEHRA RAHUL HESS MICHAEL F SHETH NIRAV V POOL NANCY PERRY UJHELYI MICHAEL R		
发明人	RIFF, KENNETH, M. MAHONEY, PATRICK, M. OWENS, CLIFTON, W. MEHRA, RAHUL HESS, MICHAEL, F. SHETH, NIRAV, V. POOL, NANCY, PERRY UJHELYI, MICHAEL, R.		
IPC分类号	A61B5/00 A61N1/372 G06F19/00		
CPC分类号	A61B5/0031 A61N1/37252 A61N1/37254 A61N1/37258 G16H10/60 G16H15/00 G16H40/63 G16H40/67 G06F19/3418 G06F19/3456		
优先权	60/173062 1999-12-24 US		
外部链接	Espacenet		

摘要(译)

一种方法和系统便于患者访问植入的医疗设备相关数据,以使患者参与他们自己的临床护理和治疗。在示例实施例中,该方法包括经由植入的医疗设备接口在植入的医疗设备和数据处理器之间建立通信链路。使用一组患者识别数据经由植入的设备数据处理器获得对安全数据库的访问。然后,响应于输入的患者诊断数据,经由数据处理器将查询提交到安全数据库。然后显示从安全数据库接收的数据以用于患者评估。