

(19)



(11)

EP 2 162 062 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

09.12.2015 Bulletin 2015/50

(51) Int Cl.:

A61B 5/00 (2006.01)

(86) International application number:

PCT/US2008/004471

(21) Application number: **08742598.9**

(22) Date of filing: **07.04.2008**

(87) International publication number:

WO 2008/143741 (27.11.2008 Gazette 2008/48)

(54) SYSTEMS AND METHODS FOR LOCATING A BLOOD VESSEL

SYSTEME UND VERFAHREN ZUR LOKALISIERUNG EINES BLUTGEFÄSSES

SYSTÈMES ET PROCÉDÉS POUR LOCALISER UN VAISSEAU SANGUIN

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**

Designated Extension States:

AL BA MK RS

• **TUMEY, David, M.**

San Jose, CA95134 (US)

(74) Representative: **Hammeler, Martin Franz et al**

Phillips & Leigh

5 Pemberton Row

London EC4A 3BA (GB)

(30) Priority: **17.05.2007 US 749825**

(43) Date of publication of application:

17.03.2010 Bulletin 2010/11

(56) References cited:

WO-A-99/48420

WO-A-2007/006134

DE-A1- 19 907 888

DE-A1-102004 001 931

US-A- 5 247 940

US-A- 5 820 263

US-A1- 2003 069 509

US-A1- 2004 152 991

US-A1- 2006 020 212

US-A1- 2006 173 379

(73) Proprietor: **Immersion Corporation**

San Jose, CA 95134 (US)

(72) Inventors:

• **COHEN, Robert, F.**

Kensington, Maryland 20895 (US)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 162 062 B1

Description

FIELD OF THE INVENTION

[0001] The present invention generally relates to medical care. More particularly, the present invention relates to systems and methods for locating a blood vessel.

BACKGROUND

[0002] Determining the location of a blood vessel is a common medical procedure. Historically however, the systems and methods that medical practitioners use for locating blood vessels have been imprecise, cumbersome, and/or expensive.

[0003] For example, one common conventional method for locating a blood vessel involves restricting blood flow to a patient's arm and visually identifying a blood vessel. While this conventional method is widely used and inexpensive, it suffers from several problems. For instance, even in ideal conditions, determining the precise location of a blood vessel using this method may be difficult. Also, the conventional method is invasive, causing a patient discomfort as their arm is being restricted. The procedure may be further complicated with patients who are experiencing trauma, or with patients who have darker or thicker skin.

[0004] Rather than using a conventional manual method, a medical practitioner may use a device for locating a blood vessel. However, conventional devices that attempt to locate blood vessels may suffer from inaccuracy, invasiveness, high cost, and relative impracticality. And some devices may only work on certain patients.

[0005] WO99/48420 discloses a portable instrument in which optical components are moved by a scan motor so as to obtain a temperature profile in a scanning direction by detecting variations in infrared radiation emitted by the skin. First and second derivatives of the temperature profile with respect to scan time may be used to locate veins beneath the skin. In alternative embodiments, the entire instrument may be moved to perform the scan, or an infrared sensor array may be used to obtain the temperature profile without scanning.

[0006] US 5 247 940 discloses a device and a method for detecting phlebitis. It comprises four temperature sensors, suitable for measuring the skin temperature, and a processing unit which calculates a temperature difference between any pair of sensors. If the difference between any two pair of sensors exceeds a threshold, an alert is generated.

[0007] Thus a need exists for an accurate, convenient, and inexpensive device for locating blood vessels.

SUMMARY

[0008] The present invention provides a system for locating a blood vessel, as defined in claim 1. Correspondingly, the present invention provides a method for locat-

ing a blood vessel, as defined in claim 13. Embodiments of the present invention disclosed herein provide systems and methods for locating a blood vessel.

[0009] One embodiment of the invention is a system comprising a temperature sensor operable to take at least two temperature measures of at least two points on a surface of a skin. The embodiment further comprises a processor in communication with the temperature sensor and configured to receive a first temperature measure from the temperature sensor, receive a second, subsequent, temperature measure from the temperature sensor, determine a differential between the first temperature measure and the second, subsequent, temperature measure, and generate an output signal indicating the presence of a blood vessel if the differential exceeds a threshold. The embodiment may further comprise an indicator configured to receive the output signal and, in response, indicate the presence of the blood vessel.

[0010] Another embodiment of the invention implements a method comprising receiving a first temperature measure associated with a first point on a surface of a skin, receiving a second, subsequent, temperature measure associated with a second point on the surface of the skin, and determining a differential between the first temperature measure and the second, subsequent, temperature measure. The method further comprises generating an output signal indicating the presence of a blood vessel if the differential exceeds a threshold. In another embodiment, a computer-readable medium (such as, for example random access memory or a computer disk) comprises code for carrying out such a method.

[0011] Further details and advantages of embodiments of the invention are set forth below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] These and other features, aspects, and advantages of the invention are better understood when the following Detailed Description is read with reference to the accompanying drawings, wherein:

Figure 1 is an illustration of a blood vessel locator in one embodiment of the present invention;

Figure 2 is a block diagram illustrating a blood vessel locator in one embodiment of the present invention; Figure 3 is a block diagram illustrating a second blood vessel locator in one embodiment of the present invention;

Figure 4 is a flow diagram illustrating a first method for locating a blood vessel in one embodiment of the present invention; and

Figure 5 is a flow diagram illustrating a second method for locating a blood vessel in one embodiment of the present invention.

DETAILED DESCRIPTION

[0013] Embodiments of the present invention provide systems and methods for locating a blood vessel. In one illustrative embodiment, a blood vessel locator is embodied in a handheld device that includes a temperature sensor. A medical practitioner holds the blood vessel locator on or near the patient's skin, for example, on the skin of the patient's arm. As the medical practitioner moves the locator across the patient's arm, the temperature sensor takes temperature readings at points on the surface of the skin and outputs these temperature readings to a processor housed in the device. Since the temperature of the skin above a blood vessel may be different from the temperature of skin below which no blood vessel is present, a blood vessel may be located by locating a temperature differential between two points on the surface of a skin. The processor continually calculates the differences in skin temperature between the current reading and the previous reading or readings.

[0014] When the processor determines that a difference in temperature exists, the processor compares the observed difference between two temperature readings to a pre-determined threshold stored in memory. If the difference exceeds the pre-determined threshold, a blood vessel may be present, and the device provides an indication that a blood vessel has been located. For instance, the device may light a light emitting diode (LED), vibrate the housing, beep, or provide some other indication. The device may also mark the skin with a small ink dot at the location of a blood vessel so the medical practitioner can easily find the spot after the locator has been moved away in preparation for inserting a needle into the blood vessel or performing some other procedure.

[0015] This example is given to introduce the reader to the general subject matter discussed. The invention is not limited to this example. Below, an illustrative blood vessel locator is introduced. Then, example blood vessel locators and methods to locate a blood vessel are described.

Illustrative Blood Vessel Locator

[0016] Referring now to the drawings in which like numerals indicate like elements throughout the several figures, Figure 1 is an illustration of a blood vessel locator in one embodiment of the present invention.

[0017] In one embodiment, the blood vessel locator 102 shown in Figure 1 is a self-contained, battery-powered handheld device. In other embodiments, the device may be tethered, for instance, to a power supply, visual display, or other device. The locator 102 shown in Figure 1 is placed above or on the skin of a patient's arm 106. A medical practitioner then guides the locator 102 across the surface of the patient's skin 106. For example, the blood vessel locator 102 may be moved laterally in the direction of arrow 1-1 across the surface of the skin 106.

[0018] In other embodiments, the blood vessel locator 102 may be moved in other directions. For instance, the locator 102 may be moved in a circular pattern or laterally and then longitudinally. In other embodiments, the surface of the skin 106 may be moved under the blood vessel locator 102, while the locator 102 remains in a stationary position. For instance, the locator 102 may be fixed in a stand (not shown).

[0019] The blood vessel locator 102 also includes one or more temperature sensor(s) (not shown), which are at least partially contained within the housing. As the blood vessel locator 102 moves across the surface of the skin 106, the temperature sensor(s) detect the temperature of the surface of the skin 106. The temperature sensor(s) may be sensitive to a limited range of temperatures. The temperature sensor(s) may provide continuous temperature data when sensing temperatures within this range. The temperature sensor(s) may be located so that the actual sensor passes through an opening on the bottom surface of the housing of the locator 102, and may detect the temperature of the surface of the skin through direct contact. Alternatively, the sensor(s) may be attached to the outside of the housing. Some embodiments utilize one or more temperature sensor(s) that are configured to sense the temperature of the skin without direct contact.

[0020] The blood vessel locator 102 shown in Figure 1 also comprises a processor (not shown). In a handheld device, such as the one illustrated, the processor is contained within the housing of the locator 102. In other embodiments the processor may be positioned externally, for instance, in a host device to which the locator 102 is attached. When the temperature sensor detects a temperature, it outputs the temperature measure to the processor, which stores the temperature measure in some type of computer-readable medium, such as random access memory (RAM).

[0021] In one embodiment, once the processor receives at least two temperature measures, it calculates a differential between the two measures. The processor may be programmed to ignore temperature measures within a range of the first temperature measure but may calculate a differential of measures. If the processor determines that the temperature differential indicates the presence of a blood vessel, the blood vessel locator 102 provides some indication that a blood vessel is present. For instance, the blood vessel locator 102 shown in Figure 1 comprises a light emitting diode (LED) 104 that can be seen by a user of the locator 102. If the processor determines that a blood vessel is present, the processor sends an output signal that causes the LED 104 to light. In some embodiments, the blood vessel locator 102 includes multiple visual indicators, such as several LEDs. In one such embodiment, the LEDs are lit in a pattern simulating a stud-finder, such that a medical practitioner may accurately determine the location of a blood vessel by moving the locator 102 back and forth over the location of a blood vessel while watching the LEDs alternately

turn on and off.

[0022] In other embodiments, the blood vessel locator 102 may activate other types of indicators or a combination of types of indicators to indicate the presence of a blood vessel. For example, in one embodiment, the blood vessel locator 102 comprises an actuator, such as an eccentric rotating mass (ERM) motor, for outputting haptic effects to a user of the locator 102. Such a device may vibrate when a blood vessel is located or vibrate at an increasing frequency as a blood vessel is approached and a decreasing frequency as the locator 102 moves away from the blood vessel.

[0023] Another embodiment comprises a speaker contained within the blood vessel locator 102. The speaker provides an audio cue as to the presence of a blood vessel. In one alternate embodiment of the present invention, the blood vessel locator 102 comprises a liquid crystal display (LCD), configured to provide a thermal picture of the surface of the skin 106 and thereby indicate the location or locations of blood vessels.

Locator Having One Temperature Sensor and One Indicator

[0024] Figure 2 is a block diagram illustrating a blood vessel locator in one embodiment of the present invention. In the embodiment shown, the blood vessel locator 202 comprises one temperature sensor 204. In other embodiments, the locator may comprise two, three, or more temperature sensors. The temperature sensor 204 is operable to measure the temperature of a point on the surface of the skin and output the temperature measure. While much of the description contained herein references a human's skin, embodiments of the present invention are not limited to use on a human's skin and may be used, for instance, to locate blood vessels in various other animals, such as other primates, dogs, and cats. In some instances, for animals, the fur may have to be shaved prior to measuring skin temperatures.

[0025] The temperature sensor 204 may utilize any of a number of different temperature measuring technologies. For example, the temperature sensor 204 may comprise a thermocouple contact sensor. In such embodiments, the temperature sensor 204 may detect the temperature of the surface of the skin through direct contact with the skin. In other embodiments of the invention, the temperature sensor 204 may be a different type of temperature sensor. For example, the temperature sensor 204 may be an infrared thermometer, capable of detecting the temperature of the skin without direct skin contact.

[0026] In embodiments of the invention requiring direct contact with the skin for temperature measurement, the blood vessel locator 202 may comprise an additional disposable component. For example, the disposable component may comprise a sterile plastic sleeve, capable of covering the temperature sensor 204. The additional disposable component may help to ensure good hygiene and may also help to shield the device from contamination.

tion.

[0027] While detection of blood vessels using embodiments of the present invention may be possible without any preparation, temperature differentials may in some circumstances be more easily detected by the temperature sensor 204 if the surface of the skin is warmed or cooled before the temperature measure is taken. For example, a practitioner may warm a patient's arm by soaking it with warm water before using the blood vessel locator 202.

[0028] Referring still to Figure 2, the blood vessel locator 202 shown also comprises a processor 206. The processor 206 is in communication with the temperature sensor 204 to receive temperature measures.

[0029] The processor 206 may comprise a computer-readable medium, such as a random access memory (RAM) (not shown) coupled to the processor. The processor 206 may execute computer-executable program instructions stored in memory. Such processors can include one or more microprocessors, ASICs, and state machines. Such processors may further comprise programmable electronic devices such as PLCs, programmable interrupt controllers (PICs), programmable logic devices (PLDs), programmable read-only memories (PROMs), electronically programmable read-only memories (EPROMs or EEPROMs), or other similar devices.

[0030] Such processors include, or can be in communication with, media, for example, which stores instructions that, when executed by the processor, cause the processor to perform the steps described herein. Embodiments of computer-readable media include, but are not limited to, an electronic, optical, magnetic, or other storage or transmission device capable of providing a processor with computer-readable instructions. Other examples of suitable media include, but are not limited to, a floppy disk, CD-ROM, DVD, magnetic disk, memory chip, ROM, RAM, an ASIC, a configured processor, all optical media, all magnetic tape or other magnetic media, or any other medium from which a computer processor can read instructions. Also, various other forms of computer-readable media can transmit or carry instructions to a computer, including a router, private or public network, or other transmission device or channel, both wired and wireless. The instructions can comprise code from any suitable computer-programming language, including, for example, C, C+, C++, Visual Basic, Java, Python, and JavaScript.

[0031] The processor 206 may be configured to receive multiple temperature measures from a temperature sensor 204. In other embodiments, the processor 206 may be configured to receive one or more temperature measures from multiple temperature sensors. In the embodiment shown in Figure 2, the temperature sensor 204 and the processor 206 are in communication via a direct wired digital connection. In other embodiments, communication between a temperature sensor 204 and the processor 206 may be through analog signals and may be wireless. For instance, the temperature sensor 204 may

be able to use Bluetooth or Wi-Fi to communicate with the processor 206.

[0032] When the processor 206 receives the temperature measure from the temperature sensor 204, the processor 206 compares the measure to a previously-received temperature measure. The processor 206 is configured to determine a differential between a first temperature measure and a second temperature measure. The processor 206 may be further configured to determine a differential between a second temperature measure and a third temperature measure.

[0033] Once the processor has determined the differential, the processor 206 may compare the differential to a threshold. If the differential meets or exceeds the threshold, then the processor 206 may be configured to generate an output signal indicating the presence of a blood vessel.

[0034] If the processor 206 determines that a differential between two temperature measures exceeds a threshold, the processor 206 generates an output signal. The threshold, for example, may be any differential amount that is indicative of the presence of a blood vessel. For instance, in one embodiment, the threshold is set at 0.5 degrees Fahrenheit (0.28°C). The differential may be predetermined as in the example described, or a medical practitioner may configure the differential threshold during operation of the blood vessel locator 202 to account for variations in patients or environments.

[0035] Also, in some embodiments, if the processor 206 determines that a differential between two temperature measures does not exceed a threshold, the processor 206 does not generate an output signal. In other embodiments, if the processor 206 determines a differential between two temperature measures does not exceed a threshold, the processor 206 generates a signal indicating the absence of a blood vessel.

[0036] In some embodiments, the processor 206 may determine a direction or axis of a blood vessel. Two or more differentials exceeding the threshold may indicate the direction of the blood vessel. For example, a sequence or succession of differentials in excess of a threshold may indicate the direction of a blood vessel. When a direction of a blood vessel is determined, the processor 206 may generate an output signal indicating the direction.

[0037] The blood vessel locating device 202 shown in Figure 2 also comprises an indicator 208. The indicator 208 is configured to receive the output signal from the processor 206. In other embodiments of the blood vessel locating device 202, the device may comprise other types of indicators and may comprise various combinations of multiple indicators.

[0038] In some embodiments, the indicator 208 may comprise a visual indicator. Visual indicators may include one or more lights, or a LCD display. For example, the indicator 208 may comprise a single red LED. When the indicator 208 receives a signal from the processor 206 indicating the presence of a blood vessel, the red LED

will be activated.

[0039] The indicator 208 may also comprise an audio indicator, for example, a speaker. In such embodiments, the indicator 208 may emit a tone when it receives a signal from the processor 206 indicating the presence of a blood vessel.

[0040] In some embodiments of the present invention, the blood vessel locator 202 may comprise a marker (not shown). In one such embodiment, the marker is configured to generate a mark on the surface of the skin over the located blood vessel by, for instance, spraying one or more drops of ink on the skin. Multiple drops may indicate the direction or axis of the blood vessel. Then, when the medical practitioner moves the blood vessel locator 202 away from the skin in order to perform a medical procedure, the mark or marks are visible on the skin.

[0041] In another embodiment, the marker comprises a light. In one example, the marker may be configured to illuminate the location of the blood vessel on the surface of the skin with a small beam of light. In another example, the light may indicate the direction or axis of the blood vessel. In yet another embodiment, the marker is configured to leave one or more small, temporary indentations on the surface of the skin where the blood vessel is located.

[0042] The blood vessel locator 202 may include additional features to enhance its convenience for practitioners. For example, in some embodiments of the blood vessel locator 202, the marker may be used as a flashlight.

[0043] In other embodiments, the blood vessel locating device 202 may include a guide for directing medical devices to the located blood vessel. For example, the blood vessel locating device 202 may comprise a slot (not shown) in which or through which an intravenous needle can be directed. The slot is configured so that it directs the needle to the location of the blood vessel as indicated by the blood vessel locator 202. These additional features are illustrative and not exhaustive; other features may also be incorporated into various embodiments of the present invention.

Locator Having Multiple Temperature Sensors and Multiple Indicators

[0044] Figure 3 is a block diagram illustrating a second blood vessel locator in one embodiment of the present invention. The blood vessel locator 302 shown in Figure 3 comprises two temperature sensors, 304a and 304b. Other embodiments of the blood vessel locator 302 may comprise one, three, or more than three temperature sensors.

[0045] The two or more temperature sensors 304 of the blood vessel locator 302 may be configured to detect and output temperature measures substantially simultaneously. For example, each temperature sensor 304a and 304b may be activated at the same time. In all embodiments, the temperature sensors 304 output temper-

ature measures at different times.

[0046] In embodiments of the invention with multiple temperature sensors 304, the sensors may be substantially aligned. For example, in an embodiment comprising three or more temperature sensors, some or all of the temperature sensors may be placed in a linear arrangement. In such embodiments, the temperature sensors 304 may be configured to output temperature measures from adjacent surfaces of the skin. As such, the three temperature measures may originate from three points in a linear alignment on the surface of the skin. Such embodiments may provide faster detection of a blood vessel than an embodiment using fewer sensors.

[0047] In other embodiments of the invention with multiple temperature sensors, the temperature sensors may be arranged in an array. The array of temperature sensors may then be capable of capturing a thermal picture of an area of a patient's skin. In areas where the temperature differential exceeds a threshold, the thermal picture may then be used to locate the presence of a blood vessel within the boundary of the picture.

[0048] The location of the temperature sensors 304 may be impacted by the type of patient on which the blood vessel locator 302 is to be used. For instance, in order to locate the blood vessels of a child, the temperature sensors 304a and 304b may be aligned more closely together than they would be to locate the blood vessels of an adult. For example, the temperature sensors may be aligned closely together such that each sensor may simultaneously contact the surface of a smaller arm.

[0049] The location of the temperature sensors 304 may be fixed in the device. In other embodiments of the invention with multiple temperature sensors, a medical practitioner may manipulate the configuration of the temperature sensors to accommodate individual patients.

[0050] In some embodiments of the present invention, the blood vessel locator 302 comprises two or more indicators, such as indicators 308a and 308b shown in Figure 3. The indicators 308 may be of the same type or of different types. For instance, in one embodiment, indicator 308a may be an LED, while indicator 308b may be a speaker. In such embodiments, the blood vessel locating device 302 may indicate the presence of a blood vessel by simultaneously flashing the LED and emitting a sound through the speaker. In other embodiments, the blood vessel locating device may have different combinations of one or more indicators. In some embodiments, the blood vessel locating device 302 also comprises an actuator 310. The actuator 310 is configured to provide a haptic effect, such as a vibrotactile effect to a user of the blood vessel locator 302. Further embodiments of the blood vessel locator 302 may comprise a plurality of actuators.

[0051] The actuator 310 may be configured to receive the output signal from the processor 306 and provide a haptic effect in response to the output signal. In some embodiments the haptic effect comprises a vibrotactile effect. For example, the actuator 310 may vibrate the

housing of the blood vessel locator 302 in response to an output signal indicating the presence of a blood vessel. The actuator 310 may comprise any number of commercially available actuators, such as eccentric rotating mass (ERM) motors, voice coils, linear actuators, moving magnet actuators, piezoelectric actuators, pneumatic actuators, etc.

First Example of a Method to Locate a Blood Vessel

[0052] Figure 4 is a flow diagram illustrating a first method 400 for locating a blood vessel in one embodiment of the present invention. In step 402, a first temperature measure is received by a processor from a temperature sensor. The temperature measure may comprise a temperature measure on any suitable scale, such as a Fahrenheit or a Celsius temperature measure. In some embodiments of the invention, the temperature measure may be any unit which is proportional to the temperature of the skin, such as, for example, millivolts. The temperature measure may correspond with the temperature of a point on the surface or above the surface of an area of skin. Temperature measures may originate from a human or other animal.

[0053] In step 404, a second temperature measure is received by the processor from a temperature sensor. In some embodiments of the invention, a processor can receive the first temperature measure 402 and the second temperature measure 404 as a digital signal. In one embodiment, the first temperature measure and the second temperature measure are received from the same temperature sensor. In other embodiments, the first temperature measure and the second temperature measure may be received from different temperature sensors.

[0054] In step 406, the processor determines a differential between the first temperature measure and the second temperature measure. For example, if the first temperature measure is 97.0 degrees Fahrenheit (36.1°C), and the second temperature measure is 97.7 degrees Fahrenheit (36.5°C), the temperature differential is 0.7 degrees Fahrenheit (0.4°C). In other embodiments, a processor may determine the differential between the second temperature measure and the third temperature measure.

[0055] In step 408, the processor determines whether a blood vessel is present by comparing the differential with a threshold. In some embodiments, the threshold value may be predefined. In other embodiments, the threshold may be specified by a medical practitioner or determined during a calibration process.

[0056] If the differential exceeds the threshold, the processor generates an output signal 410. For example, the threshold may be 0.3 degrees Fahrenheit (0.17°C). If the temperature differential between the first temperature measure and the second temperature measure is 0.4 degrees Fahrenheit (0.22°C), then the processor determines that a blood vessel is present and generates an output signal 410. The processor may send the output

signal to one or more indicators, including, for example, visual, auditory, and haptic indicators.

[0057] In the embodiment of Figure 4, the processor does not generate an output signal if the presence of a blood vessel is not detected. For example, if the threshold is 3 degrees Fahrenheit (1.7°C), but the differential is 2 degrees Fahrenheit (1.1°C), no output signal is generated. In the process shown in Figure 4, if the temperature differential does not exceed the threshold, the processor waits for a new temperature measure 412.

Second Example of a Method to Locate a Blood Vessel

[0058] Figure 5 is a flow diagram illustrating a second method 500 for locating a blood vessel in one embodiment of the present invention. In step 502, a first calibration temperature measure is received by a processor from a temperature sensor. In some embodiments, the calibration temperature measure is stored by the processor, and compared against successive temperature measures received by the processor. The calibration temperature measure may comprise a temperature measure on any suitable scale, such as a Fahrenheit or a Celsius temperature measure. The calibration temperature measure may correspond with the temperature of a point on the surface or above the surface of an area of skin. Calibration temperature measures may originate from a human or other animal.

[0059] In step 504, a subsequent temperature measure is received by a processor from a temperature sensor. In one embodiment, the subsequent temperature measure is from a point on the surface of the skin adjacent to the first calibration temperature measure. In other embodiments, the subsequent temperature measure may be from a point located nonadjacent to the first calibration point.

[0060] In step 506, the processor determines a differential between the first calibration temperature measure and the subsequent temperature measure.

[0061] In step 508, the processor determines whether a blood vessel is present by comparing the differential between the temperature measures with a threshold. In some embodiments, the threshold value may be predefined. In other embodiments, the threshold may be specified by a medical practitioner or determined during a calibration process.

[0062] If the differential exceeds the threshold, the processor generates an output signal 510. The processor may output this signal to one or more indicators, including, for example, visual, auditory, and haptic indicators.

[0063] If the differential does not exceed a threshold, the process shown continues by receiving a new subsequent temperature measure 504. The new subsequent temperature measure may originate from a third point on the surface of the skin. The processor then determines a new differential between the calibration temperature measure and the new subsequent temperature measure

506. If the processor determines the new differential exceeds a threshold 508, the processor will generate an output signal indicating the presence of a blood vessel 510.

5 [0064] Embodiments of the present invention provide various advantages over conventional systems and methods for locating blood vessels. For instance some
10 embodiments allow medical practitioners to identify blood vessels in patients having varying skin tones and skin thickness, a task that may be difficult with conventional systems and methods. Further, some embodiments of the present invention are substantially less expensive than conventional devices for locating blood vessels. And embodiments of the present invention may be
15 easier to use and less invasive, facilitating a higher level of care from the medical practitioner and less trauma for the patient.

General

20 [0065] The foregoing description of embodiments of the invention has been presented only for the purpose of illustration and description and is not intended to be exhaustive or to limit the invention to the precise forms
25 disclosed. Numerous modifications and adaptations thereof will be apparent to those skilled in the art without departing from the scope of the present invention as defined by the claims.

Claims

1. A system for locating a blood vessel in a patient, the system comprising:

35 a temperature sensor (204, 304a, 304b) operable to output a measure of temperature of a point on a surface of a skin (106); and
40 a processor (206, 306) in communication with the temperature sensor and configured to:

45 receive a first temperature measure from the temperature sensor,
receive a second, subsequent, temperature measure, and
generate an output signal indicating the presence of a blood vessel,

50 in which the system comprises a handheld locator (102, 202, 302) comprising the temperature sensor and movable across the skin of the patient and the processor is configured to determine a value of a difference between the first temperature measure and the second, subsequent, temperature measure and to generate the output signal if the value of the difference exceeds a threshold;
55 wherein the processor receives the second tem-

perature measure from the same temperature sensor thereby to provide the first temperature measure and the second temperature measure at different locations on the patient's skin as the handheld locator is moved.

2. The system of claim 1, further comprising an indicator (104) configured to receive the output signal and indicate the presence of the blood vessel.

3. The system of claim 2, wherein from two or more said differences in excess of said threshold, the processor (206, 306) is further configured to determine a direction of the blood vessel and the indicator (104) is configured to indicate the direction of the blood vessel.

4. The system of claim 2 or 3, wherein the indicator (104) comprises a visual indicator.

5. The system of any of claims 2-4, wherein the indicator (104) comprises an audible indicator.

6. The system of any of claims 2-5, wherein the indicator (104) comprises a marker configured to generate a mark on the surface of the skin over the blood vessel.

7. The system of any of claims 2-6, wherein the indicator comprises an actuator configured to provide a haptic effect in response to the output signal.

8. The system of claim 7, wherein the haptic effect comprises a vibrotactile haptic effect.

9. The system of claim 1 comprising a second such temperature sensor.

10. The system of claim 9, further comprising a third such temperature sensor.

11. The system of claim 10 wherein the temperature sensors (204, 304a, 304b) are substantially aligned.

12. The system of claim 10, wherein the temperature sensors (204, 304a, 304b) are arranged as an array.

13. A method for locating a blood vessel, the method comprising:

receiving from a temperature sensor (204, 304a, 304b) a first temperature measure associated with a first point on a surface of a skin (106), the temperature sensor being provided in a handheld locator (102, 202, 302) movable across the skin;

receiving a second, subsequent, temperature measure associated with a second point on the

surface of the skin, and

generating an output signal indicating the presence of a blood vessel by calculating a value of a difference between the first temperature measure and the second, subsequent, temperature measure and generating said output signal if the value of the difference exceeds a threshold;

wherein the first and second temperature measures are determined by the same temperature sensor (204, 304a, 304b) at different locations on the skin as the handheld locator (102, 202, 302) is moved.

Patentansprüche

1. Ein System zur Lokalisierung eines Blutgefäßes in einem Patienten, wobei das System umfasst:

einen Temperatursensor (204, 304a, 304b) betriebsbereit zur Ausgabe einer Temperaturmessung eines Punktes auf einer Oberfläche einer Haut (106); und

einen Prozessor (206, 306) in Kommunikation mit dem Temperatursensor und so konfiguriert, um

eine erste Temperaturmessung von dem Temperatursensor zu empfangen, eine zweite anschließende Temperaturmessung zu empfangen, und

ein Ausgangssignal zu erzeugen, das das Vorhandensein eines Blutgefäßes anzeigt,

wobei das System ein Handsuchgerät (102, 202, 302) enthaltend den Temperatursensor umfasst und über die Haut des Patienten bewegbar ist und der Prozessor so konfiguriert ist, um einen Differenzwert zwischen der ersten Temperaturmessung und der zweiten anschließenden Temperaturmessung zu bestimmen und das Ausgabesignal zu erzeugen, wenn der Differenzwert einen Grenzwert überschreitet;

wobei der Prozessor die zweite Temperaturmessung von dem selben Temperatursensor empfängt, um so die erste Temperaturmessung und die zweite Temperaturmessung an verschiedenen Stellen auf der Haut des Patienten bereitzustellen so wie das Handsuchgerät bewegt wird.

2. Das System gemäß Anspruch 1, weiterhin umfassend einen Indikator (104) so konfiguriert, um das Ausgangssignal zu empfangen und das Vorhandensein des Blutgefäßes anzuzeigen.

3. Das System gemäß Anspruch 2, wobei von zwei oder mehreren dieser Differenzwerte über den Schwellenwert hinaus, der Prozessor (206, 306)

weiterhin so konfiguriert ist, um eine Richtung des Blutgefäßes zu bestimmen und der Indikator (104) so konfiguriert ist, um die Richtung des Blutgefäßes anzuzeigen.

4. Das System gemäß Anspruch 2 oder 3, wobei der Indikator (104) einen visuellen Indikator aufweist. 5
5. Das System gemäß irgendeinem der Ansprüche 2 bis 4, wobei der Indikator (104) einen akustischen Indikator umfasst. 10
6. Das System gemäß irgendeinem der Ansprüche 2 bis 5, wobei der Indikator (104) einen Markierer umfasst so konfiguriert, um eine Markierung auf der Oberfläche der Haut über dem Blutgefäß zu erzeugen. 15
7. Das System gemäß irgendeinem der Ansprüche 2 bis 6, wobei der Indikator einen Aktuator umfasst so konfiguriert, um einen haptischen Effekt in Reaktion auf das Ausgangssignal bereitzustellen. 20
8. Das System gemäß Anspruch 7, wobei der haptische Effekt einen vibrotaktilen haptischen Effekt umfasst. 25
9. Das System gemäß Anspruch 1, enthaltend einen entsprechenden zweiten Temperatursensor. 30
10. Das System gemäß Anspruch 9, weiterhin enthaltend einen entsprechenden dritten Temperatursensor. 35
11. Das System gemäß Anspruch 10, wobei die Temperatursensoren (204, 304a, 304b) im Wesentlichen linear angeordnet sind. 40
12. Das System gemäß Anspruch 10, wobei die Temperatursensoren (204, 304a, 304b) in einem Feld angeordnet sind. 45
13. Ein Verfahren zur Lokalisierung eines Blutgefäßes, wobei das Verfahren umfasst: 50

Empfangen einer ersten Temperaturmessung, die mit einem ersten Punkt auf einer Oberfläche einer Haut (106) verbunden ist, von einem Temperatursensor (204, 304a, 304b), wobei der Temperatursensor in einem Handsuchgerät (102, 202, 302) bereitgestellt wird, der über die Haut bewegbar ist;

Empfangen einer zweiten anschließenden Temperaturmessung, die mit einem zweiten Punkt auf der Oberfläche der Haut verbunden ist, und

Erzeugen eines Ausgabesignals, welches die Anwesenheit eines Blutgefäßes anzeigt, indem

ein Differenzwert zwischen der ersten Temperaturmessung und der zweiten anschließenden Temperaturmessung berechnet wird und das Ausgabesignal erzeugt wird, wenn der Differenzwert einen Grenzwert überschreitet; wobei die erste und die zweite Temperaturmessung mit dem selben Temperatursensor (204, 304a, 304b) an unterschiedlichen Stellen auf der Haut bestimmt werden so wie das Handsuchgerät (102, 202, 302) bewegt wird.

Revendications

1. Système pour localiser un vaisseau sanguin dans un patient, le système comprenant :

un capteur de température (204, 304a, 304b) pouvant fonctionner pour produire une mesure de température d'un point sur une surface d'une peau (106) ; et

un processeur (206, 306) en communication avec le capteur de température et configuré pour :

recevoir une première mesure de température du capteur de température,
recevoir une deuxième mesure de température consécutive, et
générer un signal de sortie indiquant la présence d'un vaisseau sanguin,
dans lequel le système comprend un dispositif de localisation portatif (102, 202, 302) comprenant le capteur de température et étant mobile sur la peau du patient et le processeur est configuré pour déterminer une valeur d'une différence entre la première mesure de température et la deuxième mesure de température consécutive et pour générer le signal de sortie si la valeur de la différence dépasse un seuil ;
dans lequel le processeur reçoit la deuxième mesure de température du même capteur de température pour fournir ainsi la première mesure de température et la deuxième mesure de température à des emplacements différents sur la peau du patient lorsque le dispositif de localisation portatif est déplacé.

2. Système selon la revendication 1, comprenant en outre un indicateur (104) configuré pour recevoir le signal de sortie et indiquer la présence du vaisseau sanguin.
3. Système selon la revendication 2, dans lequel, à partir de deux ou plusieurs desdites différences dépassant ledit seuil, le processeur (206, 306) est en outre

configuré pour déterminer une direction du vaisseau sanguin et l'indicateur (104) est configuré pour indiquer la direction du vaisseau sanguin.

4. Système selon la revendication 2 ou 3, dans lequel l'indicateur (104) comprend un indicateur visuel. 5
5. Système selon l'une quelconque des revendications 2 à 4, dans lequel l'indicateur (104) comprend un indicateur audible. 10
6. Système selon l'une quelconque des revendications 2 à 5, dans lequel l'indicateur (104) comprend un marqueur configuré pour générer une marque sur la surface de la peau au-dessus du vaisseau sanguin. 15
7. Système selon l'une quelconque des revendications 2 à 6, dans lequel l'indicateur comprend un actionneur configuré pour fournir un effet haptique en réponse au signal de sortie. 20
8. Système selon la revendication 7, dans lequel l'effet haptique comprend un effet haptique vibrotactile.
9. Système selon la revendication 1, comprenant un deuxième d'un tel capteur de température. 25
10. Système selon la revendication 9, comprenant en outre un troisième d'un tel capteur de température. 30
11. Système selon la revendication 10, dans lequel les capteurs de température (204, 304a, 304b) sont sensiblement alignés.
12. Système selon la revendication 10, dans lequel les capteurs de température (204, 304a, 304b) sont agencés sous la forme d'un réseau. 35
13. Procédé pour localiser un vaisseau sanguin, le procédé comprenant les étapes consistant à : 40
 - recevoir d'un capteur de température (204, 304a, 304b) une première mesure de température associée à un premier point sur une surface d'une peau (106), le capteur de température étant prévu dans un dispositif de localisation portable (102, 202, 302) mobile sur la peau ; 45
 - recevoir une deuxième mesure de température consécutive associée à un deuxième point sur la surface de la peau, et 50
 - générer un signal de sortie indiquant la présence d'un vaisseau sanguin en calculant une valeur d'une différence entre la première mesure de température et la deuxième mesure de température consécutive et générer ledit signal de sortie si la valeur de la différence dépasse un seuil ; 55
 - dans lequel les première et deuxième mesures de température sont déterminées par le même

capteur de température (204, 304a, 304b) à différents emplacements sur la peau lorsque le dispositif de localisation portable (102, 202, 302) est déplacé.

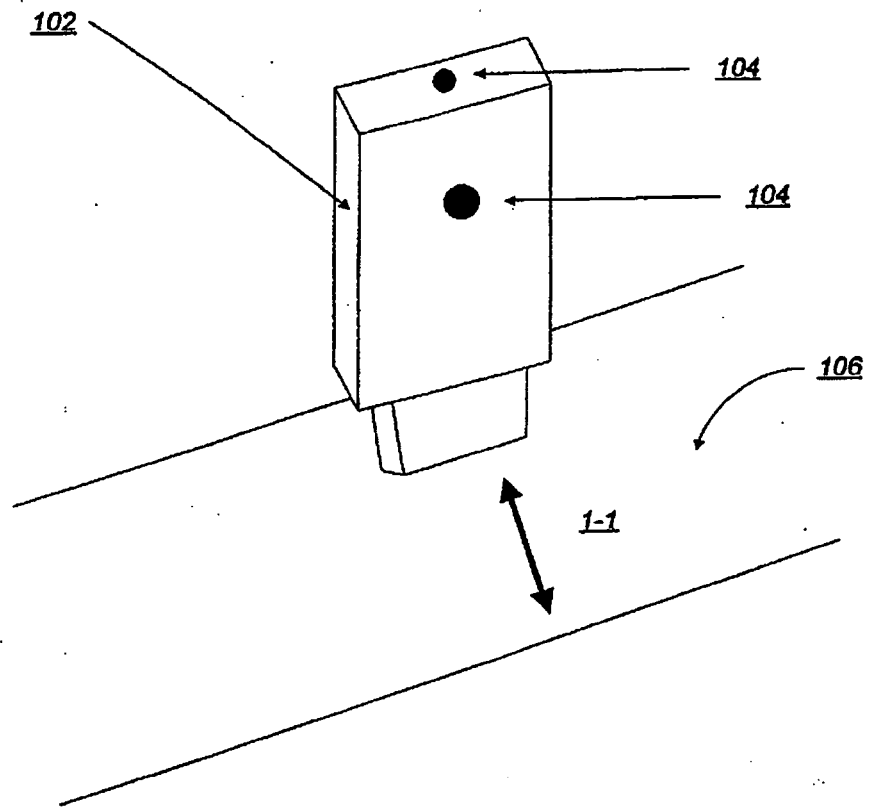


Figure 1

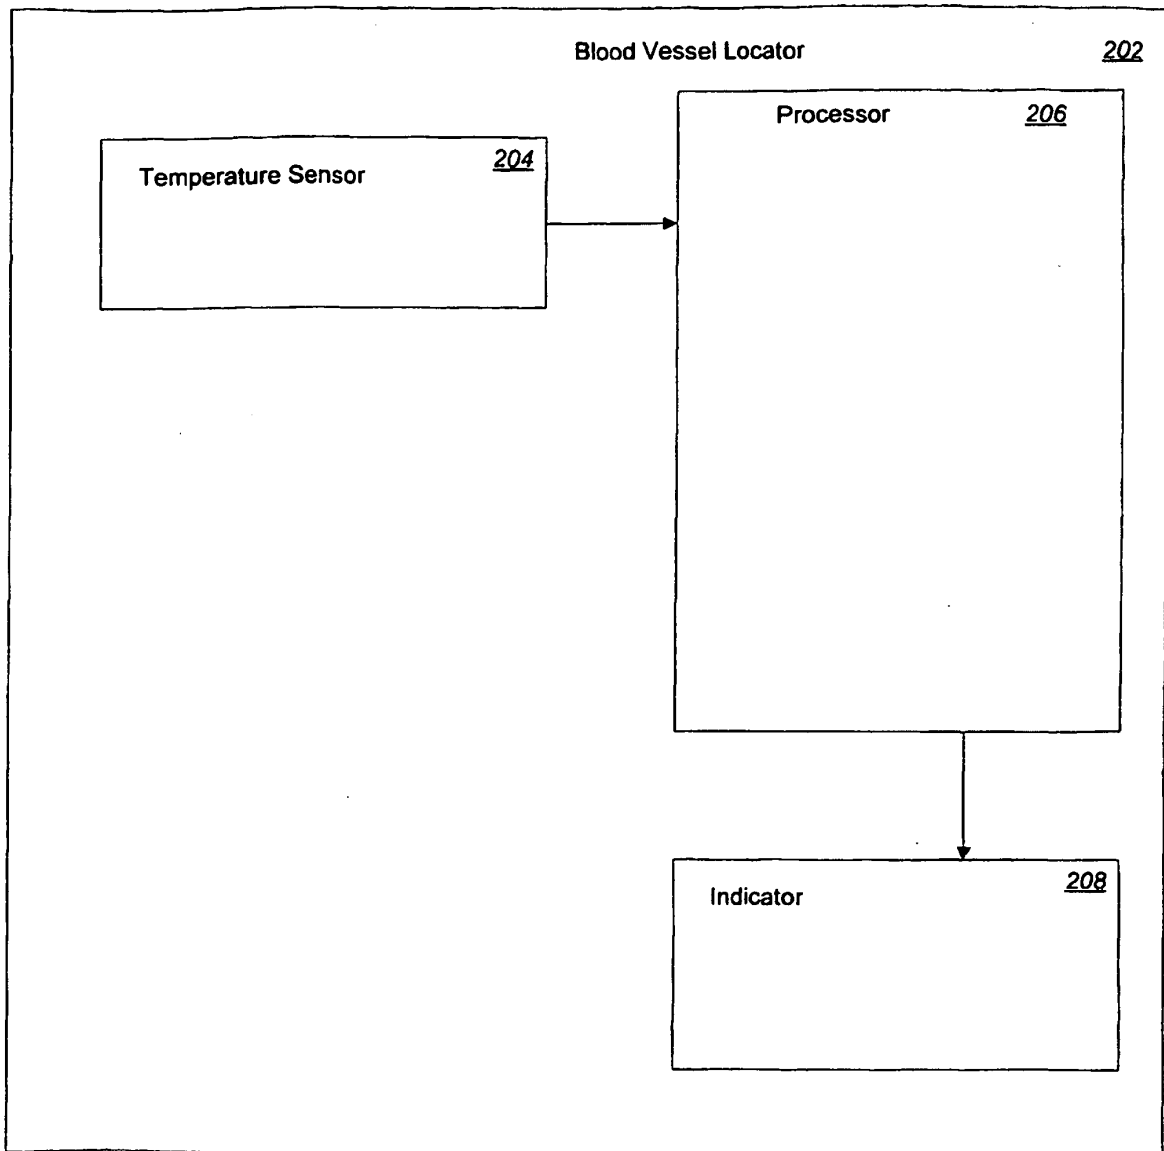


Figure 2

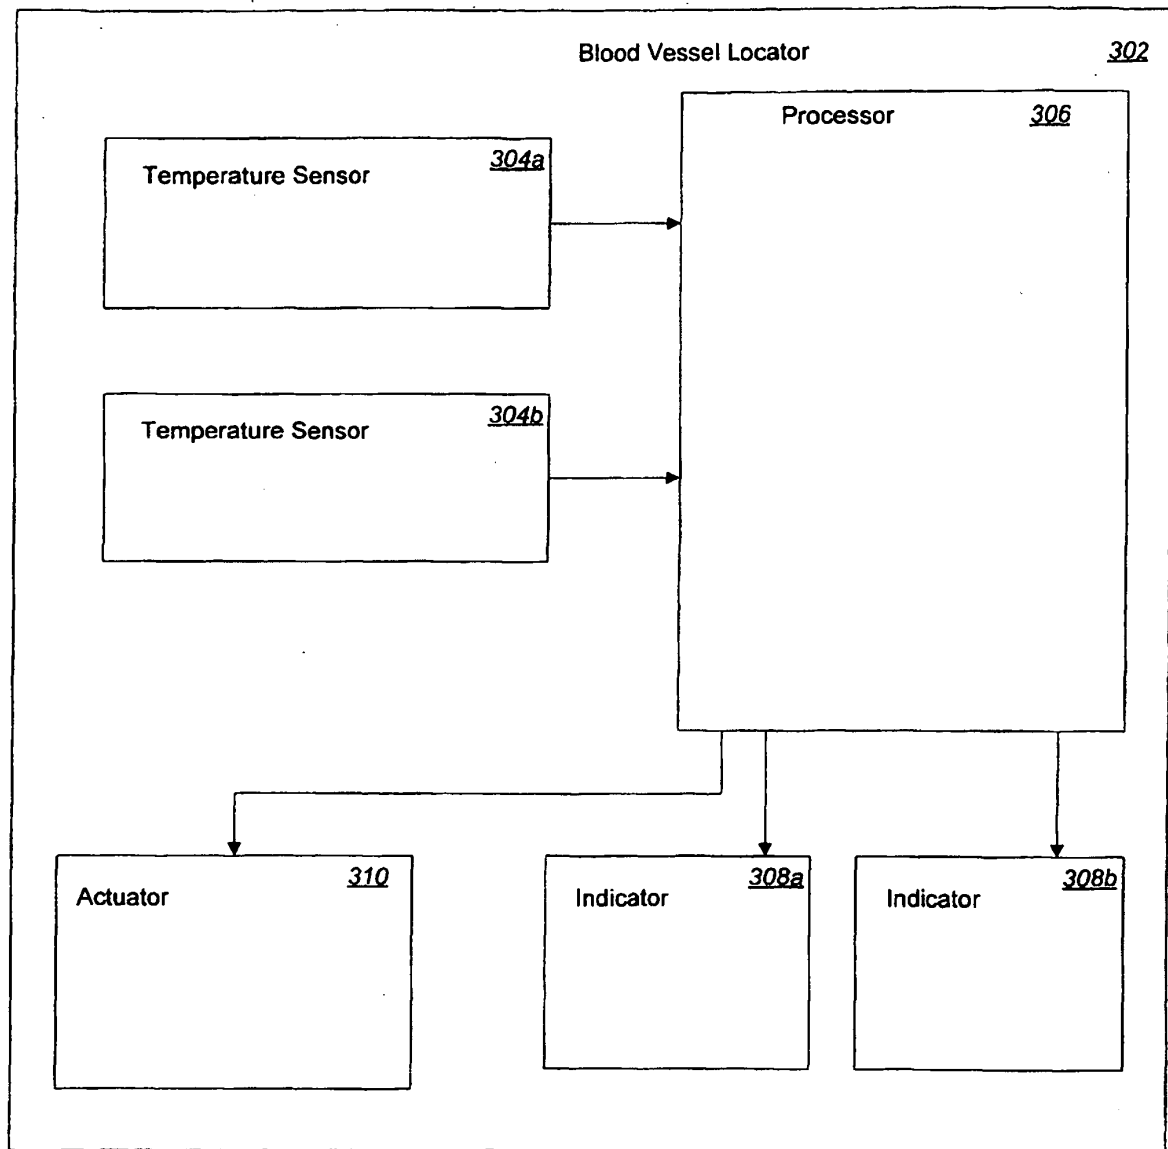


Figure 3

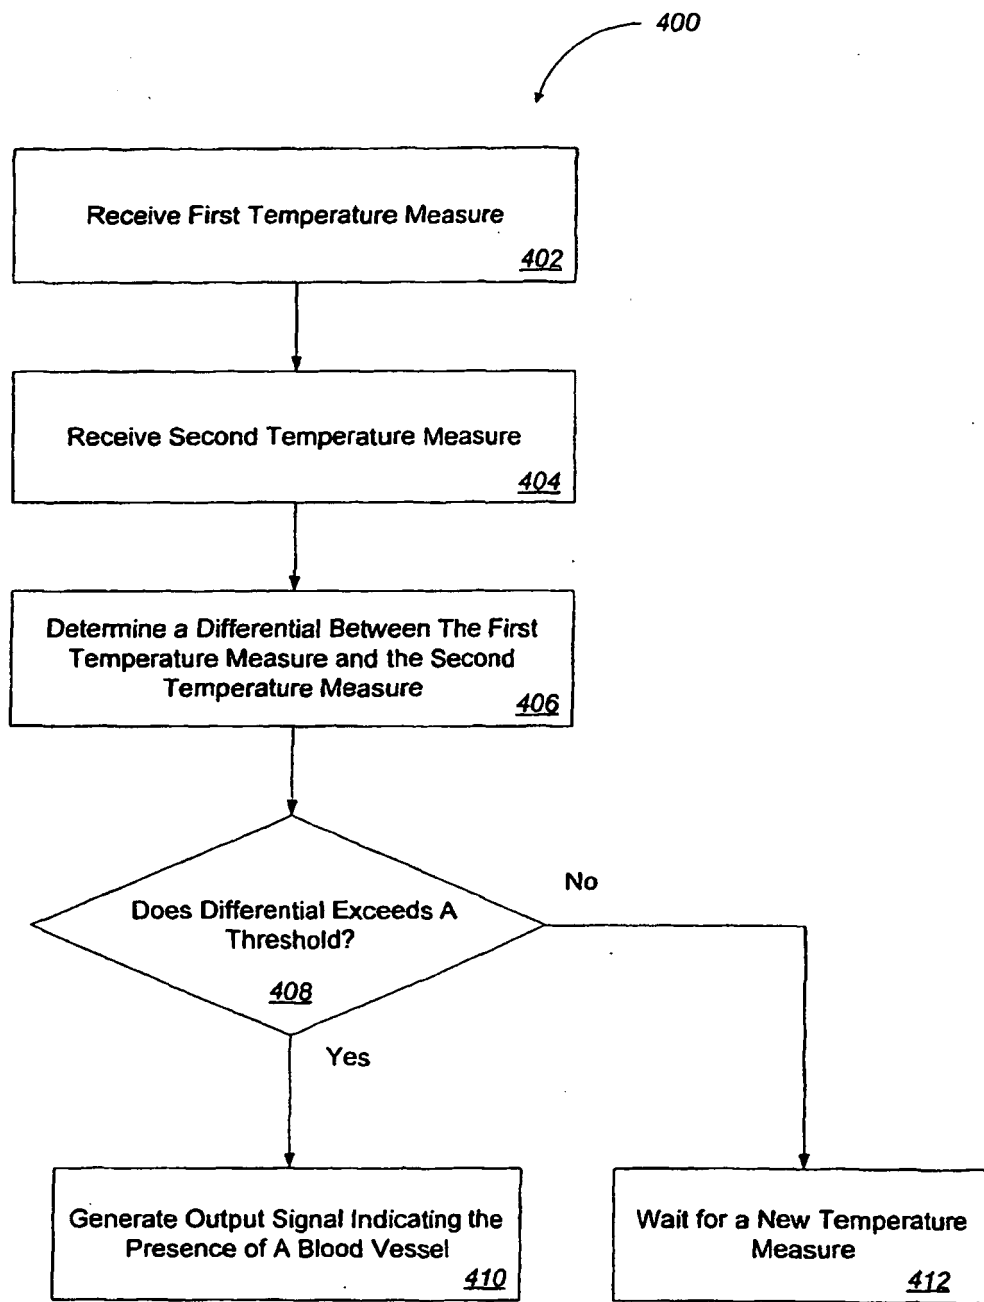


Figure 4

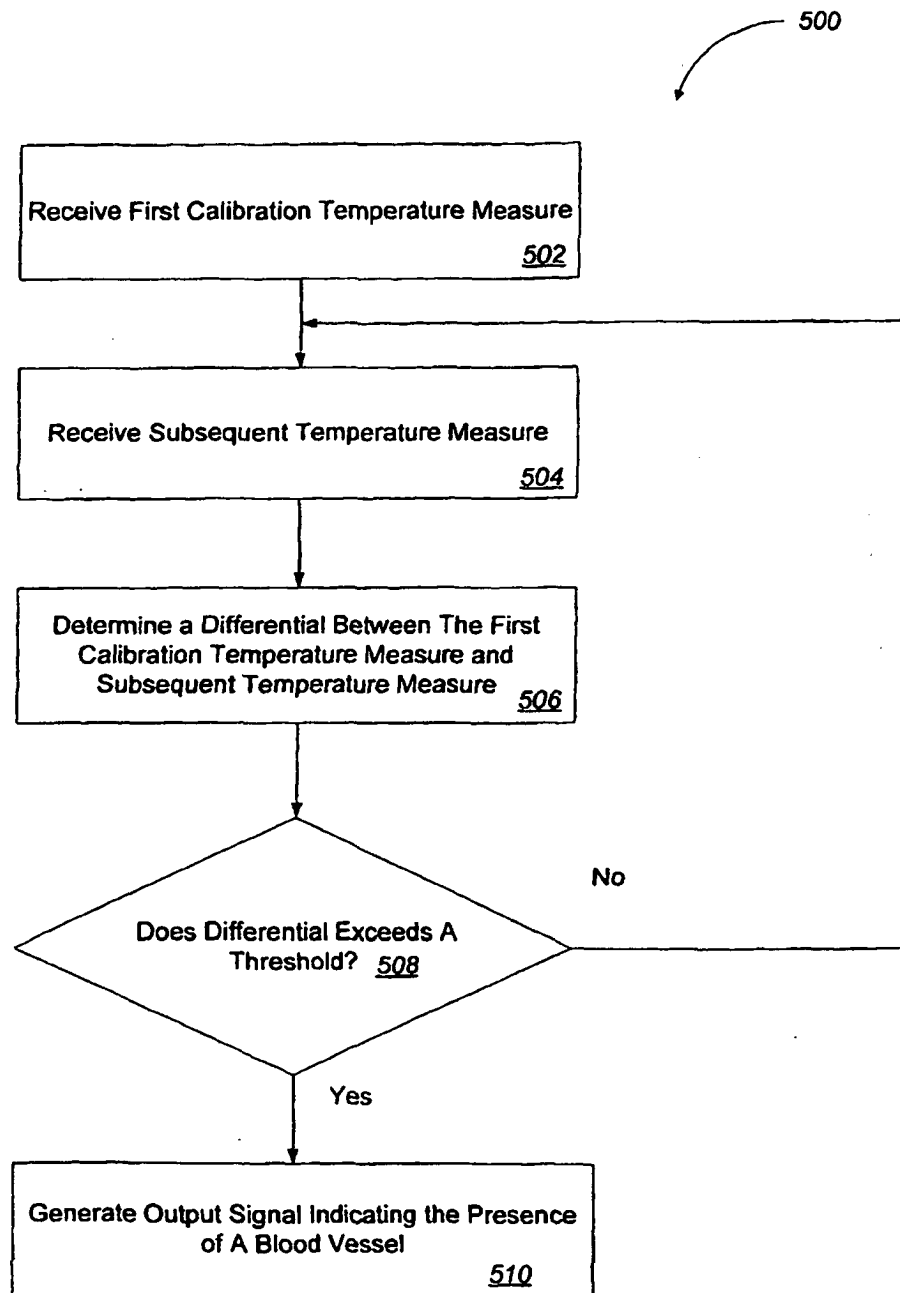


Figure 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9948420 A [0005]
- US 5247940 A [0006]

专利名称(译)	用于定位血管的系统和方法		
公开(公告)号	EP2162062B1	公开(公告)日	2015-12-09
申请号	EP2008742598	申请日	2008-04-07
[标]申请(专利权)人(译)	伊梅森公司		
申请(专利权)人(译)	Immersion公司		
当前申请(专利权)人(译)	Immersion公司		
[标]发明人	COHEN ROBERT F TUMEY DAVID M		
发明人	COHEN, ROBERT, F. TUMEY, DAVID, M.		
IPC分类号	A61B5/00		
CPC分类号	A61B5/489 A61B5/015		
优先权	11/749825 2007-05-17 US		
其他公开文献	EP2162062A1		
外部链接	Espacenet		

摘要(译)

描述了用于定位血管的系统和方法。一种所述方法包括接收与皮肤表面上的第一点相关的第一温度测量值;接收与皮肤表面上的第二点相关联的第二温度测量值,并确定第一温度测量值和第二温度测量值之间的差值。该方法还包括:如果差异超过阈值,则产生指示血管存在的输出信号。

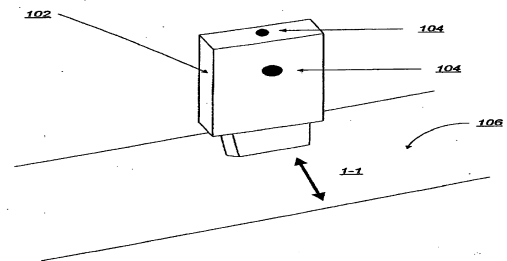


Figure 1