



- (51) **International Patent Classification:**
A61B 5/03 (2006.01) *A61B 5/103* (2006.01)
- (21) **International Application Number:**
PCT/FI2011/050068
- (22) **International Filing Date:**
28 January 2011 (28.01.2011)
- (25) **Filing Language:** Finnish
- (26) **Publication Language:** English
- (30) **Priority Data:**
20105077 29 January 2010 (29.01.2010) FI
- (71) **Applicant (for all designated States except US):** **HLD HEALTHY LIFE DEVICES OY** [FI/FI]; Ahventie 4, FI-02170 Espoo (FI).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **TASKINEN, Tapani** [FI/FI]; Koukkunimentie 6 U, FI-02230 Espoo (FI). **BACKMAN, Aki** [FI/DE]; Wuermstrasse 10, 71155 Altdorf (DE).
- (74) **Agent:** **BORENIUS & CO OY AB**; Tallberginkatu 2 A, FI-00180 Helsinki (FI).

(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** METHOD AND DEVICE FOR MEASURING TISSUE PRESSURE

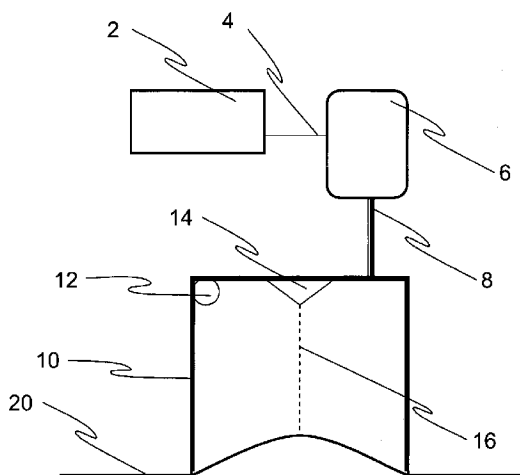


Fig. 1

(57) **Abstract:** The method of the invention facilitates measuring of tissue pressure utilizing negative pressure non-invasively. The device according to the invention is characterized in that the device comprises a pressure chamber (10), means (12) for measuring the pressure in the pressure chamber (10) and means (14) for measuring the skin tissue rising caused by the negative pressure.

WO 2011/092379 A1

METHOD AND DEVICE FOR MEASURING TISSUE PRESSURE

5 FIELD OF THE INVENTION

The invention generally relates to measuring tissue pressure. Particularly the invention relates to measuring the pressure in tissue with edema using a measuring device based upon negative pressure.

10

STATE OF THE ART

Edema in a tissue, for instance lymphoedema, vein-related edema or also edemas born in muscle injuries are a problem that usually is treated by using compression products such as compression stockings or compression gloves. In dimensioning the compression products, determining a suitable compression pressure is a problem.

20 One method to measure an edema is based upon palpating by hand or fingers and measuring with a tape measure. In some measuring devices based upon state of the art, pressure is applied upon the tissue with a mechanical presser, whereupon the mechanically produced force is measured and the change in the edema or the edema pressure is calculated based upon this. In some, the solutions based upon state of the art are bio-impedance-based devices for measuring the tissue fluid status as well as invasive pressure probes to be inserted into the tissue.

30 In the US patent 5,484,399 there is presented a method and device for reducing tissue pressure. The device also comprises a tissue pressure meter. The device has needle-like, long tubes, in the sharp end of which there is at least one hole.

The device is pushed into the tissue and air is sucked from the tubes, whereupon the fluid pressure in the tissue exceeds the pressure in the pipe. Thus fluid is transferred from the tissue into the tube and the pressure in the tissue decreases. The tissue pressure meter is situated in one of the tubes.

5

In the FI patent 109651 there is presented a method for measuring tissue pressure. In the method an electromagnetic sensor is attached upon the surface of the skin, whereupon the capacitance of the sensor is proportionate to the dielectric constant of the skin and the subcutaneous tissue, which in its turn is proportionate to the water content of the skin. The edema is determined by measuring the capacitance of the electromagnetic sensor at a high frequency, such as 20-500 MHz.

In the US patent 6,186,962 there are presented methods and devices for measuring tissue pressure. In one device according to the invention there is a platy component, which is attached to the tissue. In the disc there is an aperture for a rod, which is pushed towards the tissue, whereupon the tissue pressure is deducted from the forces directed to the rod.

The above presented measuring methods of the devices according to the state of the art include uncertainty factors, such as the interface between the skin and the electromagnetic sensor and the natural fluctuation in tissue water content. In addition, measurements may be extremely uncomfortable for the patient, as for instance the mentioned invasive methods.

25

AIM OF THE INVENTION

The aim of the present invention is to offer a method and a device for defining tissue pressure in a non-invasive way, utilizing the tissue's own pressure and elasticity.

30

SHORT DESCRIPTION OF THE INVENTION

Characteristic for the tissue measuring device according to the invention is that
5 the device comprises a pressure chamber, means for measuring the pressure in
the pressure chamber and means for measuring the rising of the skin tissue
caused by the negative pressure.

A device according to an embodiment comprises in addition a CPU, which
10 comprises the means for processing and saving data.

A device according to a second embodiment comprises in addition a
pressurization unit, which has been arranged in order to achieve negative
pressure in the pressure chamber.

15 A device according to a third embodiment comprises in addition means for
determining tissue pressure by means of the measured skin tissue rising and the
measured pressure in the pressure chamber. The measured skin tissue rising
and/or the pressure chamber pressure can also be measured as a function of
20 time in order to determine tissue pressure.

In a device according to a fourth embodiment, the means for measuring the rising
in skin tissue comprises at least one range sensor. The range sensor may for
instance be an infrared sensor, a laser sensor or a tonometer. The device may in
25 addition have means for measuring blood pressure and/or imaging subcutaneous
tissues.

The tissue pressure measuring method according to the invention is
characterized in that the method comprises the stages in order to create a
30 negative pressure on the tissue surface, to measure the said negative pressure,
to measure the tissue rising caused by the negative pressure, and to determine

the tissue pressure on the basis of the measured negative pressure and the measured tissue rising.

In an embodiment of the method the negative pressure and/or the tissue rising is
5 measured as a function of time in order to determine tissue pressure.

An advantage with the method lies in that it is non-invasive and that no electrical current or magnetic field is introduced into the tissue. There is created a negative pressure on the skin or tissue surface, whereby the own internal pressure in the
10 tissue and the elastic properties of the tissue are utilized. It is also possible to utilize positive pressure or a combination of positive pressure and negative pressure in the measurement.

15 DETAILED DESCRIPTION OF THE INVENTION

In the following the invention is described in more detail with reference to the advantageous embodiments presented as examples and the attached figures, where

20

Figure 1 shows a measuring device according to a simple embodiment,
Figure 2 shows a measuring device according to a more versatile embodiment,
Figure 3 shows the geometry of a measuring device according to an
embodiment, and

25 Figure 4 visualizes the relationship between skin rising and the negative pressure in use.

In Figure 1 there is presented a measuring device for measuring tissue pressure according to a simple embodiment. The measuring device according to the
30 embodiment comprises a CPU 2, a pressurizing unit 6 and a pressure chamber 10. In connection with the pressure chamber 10 there is, in addition, a pressure

sensor 12 and a range sensor 14. The range sensor 14 may for instance be a transceiver operating on infrared, visible light, laser or radio frequencies or a tonometer, having a mechanically protruding part, the movement of which is measured in order to measure the range 16. There may be several pressure
5 sensors and/or range sensors.

The CPU 2 comprises means to process and save data and run software. The CPU 2 is connected to the pressurizing unit 6, which in its turn is connected to the pressure chamber 10. The pressurizing unit 6 is arranged to create a
10 negative pressure in the pressure chamber 10 by removing media, for instance air or water, from the pressure chamber in order to achieve a rising in the tissue
20.

Because of the negative pressure formed in the pressurizing unit 10, the internal
15 pressure in the inter-tissue/intercellular space, in the blood vessels and the lymphatic vessels expands tissue volume and stretches and/or raises the skin, which is elastic. At first, the tissue pressure in the expanded point is lower than in the surrounding tissue space. The inter-tissue fluid/interstitial fluid, the blood and the lymph are transferred from the higher pressure towards the lower pressure
20 and fill up the expanded volume. Thus the skin rises until equilibrium finally is reached because of the elastic force of the tissue. In the state of equilibrium, the forces caused by the elasticity of the tissue and the air pressure in the pressure chamber are of the same magnitude as the force of the tissue pressure.

25 In the above mentioned event, the pressure and the pressure change can, based upon the signal given by the pressure sensor 12, be measured as a function of time and likewise, based upon the measurements of the range sensor 14, the rising of the tissue and/or skin is known as a function of time. The results of the measurements are transferred to the CPU 2, where the data is saved and
30 processed. Based upon these measurements, the CPU calculates the elastic

force of the skin and/or the tissue and further the pressure or edema pressure of the skin and/or the tissue.

In Figure 2 there is shown a measuring device for measuring tissue pressure according to a more versatile embodiment. The measuring device of this
5 embodiment comprises more sensors and/or measuring devices than the aforementioned measuring device of a simple embodiment. The range sensor 14 may for instance be a transceiver operating on infrared, visible light, laser or radio frequencies or a tonometer, having a mechanically protruding part, the
10 movement of which is measured in order to measure the range 16. There may be several pressure sensors and/or range sensors. In addition, the pressure sensor or other sensor 13 may be used for measuring the force, wherewith the pressure chamber or other component of the measuring device is pressed against the skin. Thus the friction between the skin and the part of the measuring device
15 facing the skin may be controlled.

The device according to the embodiment may in addition comprise devices 15 for measuring and/or imaging properties of the skin or the subcutaneous tissue. The imaging may take place for instance by ultrasonic, infrared, X-ray and/or any
20 other medically used imaging method. The properties to be measured may for instance be blood pressure, skin temperature, the temperature of the subcutaneous tissues. By subcutaneous tissues is meant one or several of all the tissues under the skin, such as fatty tissue, muscles, bones, tendons etc. The mentioned devices 15 may be situated in- or outside of the pressure chamber 10
25 and, in addition, in the case of several devices 15 both in- and outside. The obtained measuring results may used as aids in calculating edema pressure.

In an exemplary embodiment for calculating edema pressure, there are used equations, which are based upon a simplified 2D model under the standard
30 pressure acting in the normal direction of the skin. This is a classic "velaria" problem, where elastic material is used. In Figure 3 there is shown a visualizing

image of the situation and the variables used in the equation. In the equation it is assumed that the total rising h of the raised skin is smaller than the radius of the pressure chamber ($h < L$). It is assumed that the edge of the pressure chamber that is placed towards the skin is circular, in which case the skin rising determined by the edge can be assumed to be shaped as the calotte of a ball with a radius R , as can be seen from the cross section shown in Figure 3.

The following values are determined:

$$\begin{aligned} \Delta P_0 &= P_{int} - P_{atm} \quad , \quad \Delta P_t = P_{atm} - P_t \\ \Delta P &= P_{int} - P_t = \Delta P_0 + \Delta P_t \end{aligned} \quad (1),$$

where P_t is the pressure chamber pressure,

P_{int} is the internal tissue pressure, edema pressure

P_{atm} is the ambient air pressure

15

In this embodiment it is assumed that the length of half of the skin under the pressure chamber is L , which is the radius of the pressure chamber aperture towards the skin. In Figure 4 there is presented the qualitative behaviour of the skin under negative pressure. There are two areas visible in Figure 4. In the first area there occurs a fast growth of the skin rising, as negative pressure is applied. This goes on until the turning point (30), where the change in question retards and the response starts to saturate. The first area also seems to correspond to a situation, where the "loose" skin around the pressure chamber slides under the negative pressure without the occurrence of any significant elastic elongation. If the friction between the surface of the pressure chamber towards the skin and the skin is big, the skin sliding in question does not necessarily occur at all.

20

The second area corresponds to skin behaviour, when all possible peripheral loose skin already has been brought under the pressure chamber and the growth of the rising is due to elastic deformation of the skin.

30

In order to explain the looseness in question, we determine the parameter α , which is the relation between the half-part s of the length of the skin that has been deformed under the pressure chamber and the half-part L of the length of the skin under normal conditions. The value α in question is dependent upon the original subcutaneous pressure and is determined:

$$\alpha(\Delta P_0) = \begin{cases} \alpha_{\max} \left(1 - \frac{\Delta P_0}{\Delta P_\alpha} \right) + \frac{\Delta P_0}{\Delta P_\alpha} & \Delta P_0 \geq \Delta P_\alpha \\ \alpha_{\max} & \Delta P_0 \leq \Delta P_\alpha \end{cases} \quad (2),$$

where:

$$\alpha_{\max} = \frac{1}{2} \left(\frac{h_\alpha}{L} + \frac{L}{h_\alpha} \right) a \cos \left(\frac{L^2}{h_\alpha^2 + L^2} \right) \quad (3),$$

and the parameters h_α ja P_α are determined in Figure 4.

Thus, the half-part of the length of the skin under the pressure chamber as the measuring pressure is applied is:

$$s = L \cdot \alpha \cdot \left(1 + \frac{(\Delta P_0 + \Delta P_t) \cdot R}{k} \right) \quad (4),$$

where k is an elasticity coefficient, obtained by presuming that:

$$F = k\Delta s \quad (5)$$

Because the solution obtained for the skin deformation is based upon the length of the circle circumference, the following equations may be obtained based upon the trigonometry of Figure 2:

$$R = \frac{h^2 + L^2}{2h} \quad (6)$$

$$s = Ra \cos\left(\frac{R-h}{R}\right) \quad (7)$$

5 By combining the equations (6) and (7) one obtains:

$$s = \frac{h^2 + L^2}{2h} a \cos\left(\frac{L^2}{h^2 + L^2}\right) \quad (8)$$

By using the equations (4) and (8), we may thus compile the following equation:

10

$$\Delta P_0 = k \cdot \left(\frac{1}{L \cdot \alpha} a \cos\left(\frac{L^2}{h^2 + L^2}\right) + \frac{2h}{h^2 + L^2} \right) - \Delta P_i \quad (9)$$

The afore presented solution is valid only when $\Delta P_0 \leq \Delta P_\alpha$. The equation (9) is dependent upon α , which also is a function of ΔP_0 . Because of this, one may

15 have to solve the equation iteratively by using initial guesses as ΔP_0 values in the equation (2).

In order to calculate edema pressure one may also use other methods than those presented in the aforementioned example.

20

For professionals in the field it stands clear that the previously presented example embodiments of demonstrational reasons are relatively simple in terms of construction and function. By following the model presented in this patent application it is possible to construct different and even very complex solutions
25 utilizing the patent idea presented in this patent application.

CLAIMS

1. A device for measuring tissue pressure, **characterized in that** the device comprises:
 - 5 – a pressure chamber (10),
 - means (12) for measuring the pressure in the pressure chamber (10), and
 - means (14) for measuring the skin tissue rising caused by negative pressure.
- 10 2. The device of claim 1, **characterized in that** the said device in addition comprises a CPU (2), which comprises means for processing and saving data.
- 15 3. The device of claim 1 or 2, **characterized in that** the said device in addition comprises a pressurizing unit (4), which is arranged to obtain negative pressure in the pressure chamber (10).
- 20 4. The device of any of the claims 1-3, **characterized in that** the said device in addition comprises means for determining tissue pressure by using the measured skin tissue rising and the measured pressure in the pressure chamber.
- 25 5. The device of claim 4, **characterized in that** the said devices measure the rising of the skin tissue and/or the pressure in the pressure chamber as a function of time in order to determine tissue pressure.
- 30 6. The device of any one of the claims 1-5, **characterized in that** the said means (14) for measuring skin tissue rising comprise at least one range sensor.

7. The device of claim 6, **characterized in that** the said at least one range sensor is an infrared sensor.
8. The device of claim 6, **characterized in that** the said at least one range sensor is a laser sensor.
9. The device of claim 6, **characterized in that** the said at least one range sensor is a tonometer.
10. The device of claim 1, **characterized in that** the said device in addition comprises means for measuring the force, whereby the pressure chamber (10) is pressed towards the skin.
11. The device of claim 1, **characterized in that** the said device in addition comprises means (15) for measuring blood pressure.
12. The device of claim 1, **characterized in that** the said device in addition comprises means (15) for imaging subcutaneous tissues.
13. A method for measuring tissue pressure, **characterized in that** the method comprises the steps for:
- creating negative pressure on the tissue surface,
 - measuring said negative pressure,
 - measuring the tissue rising caused by said negative pressure, and
 - determining tissue pressure on the basis of the measured negative pressure and the measured tissue rising.
14. The method according to claim 13, **characterized in that** the negative pressure and/or the tissue rising is measured as a function of time in order to determine the tissue pressure.

1/3

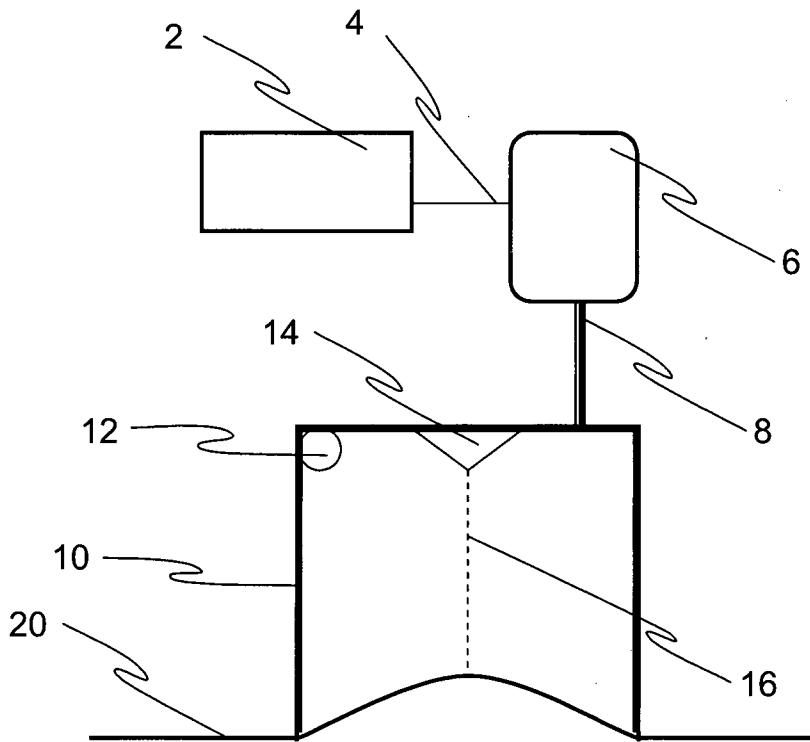


Fig. 1

2/3

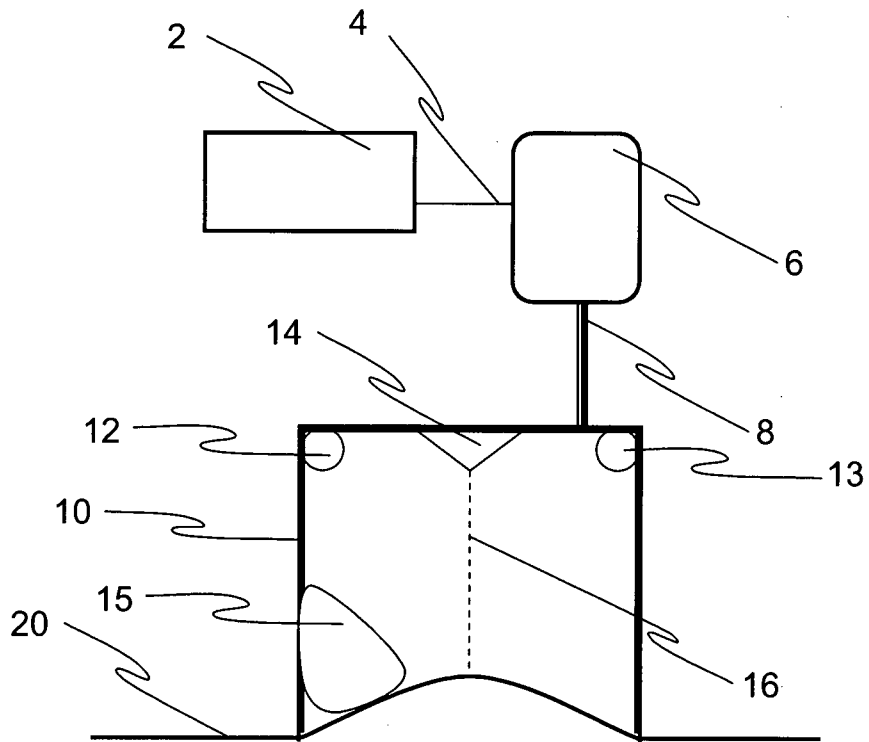


Fig. 2

3/3

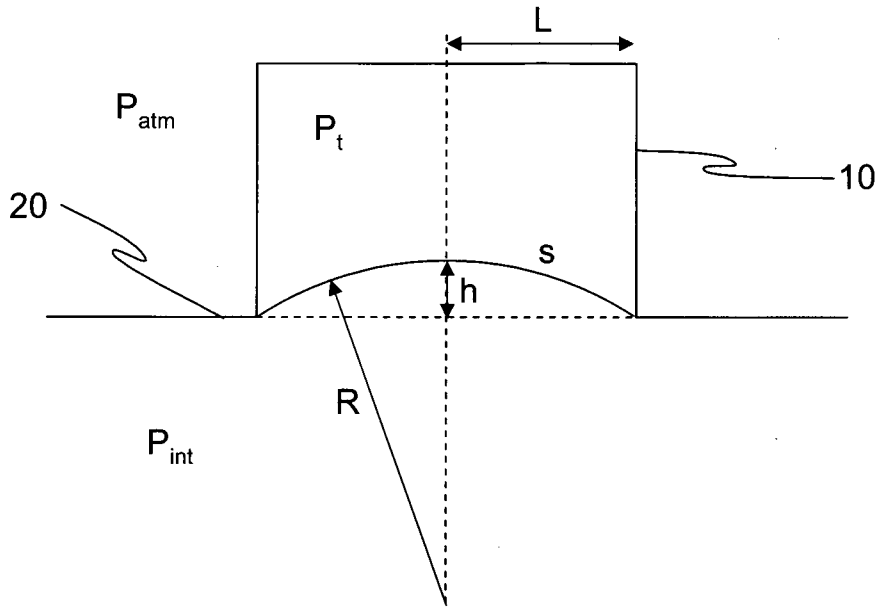


Fig. 3

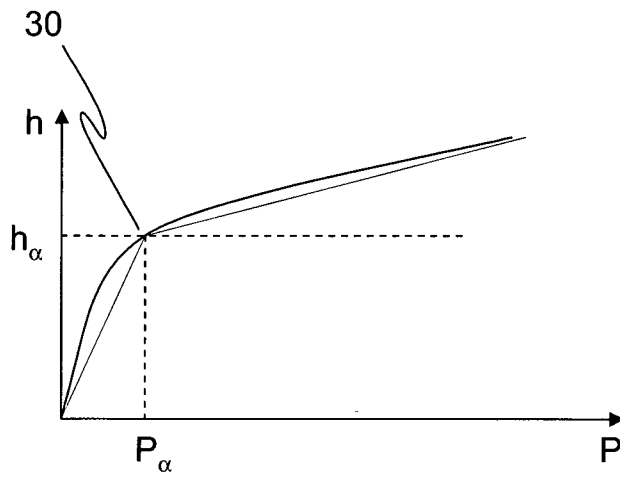


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2011/050068

A. CLASSIFICATION OF SUBJECT MATTER See extra sheet According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC: A61B Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched FI, SE, NO, DK Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008234607 A1 (HUNTER-JONES NICHOLAS et al.) 25 September 2008 (25.09.2008) paragraphs [0024]-[0026], [0034]-[0035], figure 1	1-14
X	WO 2009027898 A1 (KONINKL PHILIPS ELECTRONICS NV et al.) 05 March 2009 (05.03.2009) page 4 line 27-page 5 line 21, figure 2	1
X	WO 2007113755 A2 (KONINKL PHILIPS ELECTRONICS NV et al.) 11 October 2007 (11.10.2007) page 6 lines 18-33, page 7 lines 14-25, figure 1	1
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 29 April 2011 (29.04.2011)		Date of mailing of the international search report 05 May 2011 (05.05.2011)
Name and mailing address of the ISA/FI National Board of Patents and Registration of Finland P.O. Box 1160, FI-00101 HELSINKI, Finland Facsimile No. +358 9 6939 5328		Authorized officer Kimmo Kärkkäinen Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/FI2011/050068

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
US 2008234607 A1	25/09/2008	None	
.....			
WO 2009027898 A1	05/03/2009	None	
.....			
WO 2007113755 A2	11/10/2007	US 2010261985 A1	14/10/2010
		EP 2004050 A2	24/12/2008
		CN 101410056 A	15/04/2009
		AT 486522T T	15/11/2010
.....			

CLASSIFICATION OF SUBJECT MATTER

Int.Cl.

A61B 5/03 (2006.01)

A61B 5/103 (2006.01)

专利名称(译)	用于测量组织压力的方法和装置		
公开(公告)号	EP2528500A4	公开(公告)日	2015-09-09
申请号	EP2011736670	申请日	2011-01-28
[标]申请(专利权)人(译)	HLD健康生活设备公司		
申请(专利权)人(译)	HLD健康生活DEVICES OY		
当前申请(专利权)人(译)	HLD健康生活DEVICES OY		
[标]发明人	TASKINEN TAPANI BACKMAN AKI		
发明人	TASKINEN, TAPANI BACKMAN, AKI		
IPC分类号	A61B5/03 A61B5/103 A61B5/00		
CPC分类号	A61B5/03 A61B5/0055 A61B5/441 A61B5/4878		
优先权	2010005077 2010-01-29 FI		
其他公开文献	EP2528500A1		
外部链接	Espacenet		

摘要(译)

该方法有利于利用负压非侵入地测量组织压力。该装置具有压力室，用于测量压力室中的压力的压力传感器和用于测量由负压引起的皮肤组织上升的范围传感器。