



(11) **EP 2 044 880 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**16.07.2014 Bulletin 2014/29**

(51) Int Cl.:  
**A61B 5/00 (2006.01) A61G 13/12 (2006.01)**

(21) Application number: **08164905.5**

(22) Date of filing: **23.09.2008**

(54) **Video Observation of a Patient's Face During a Medical Procedure while the Patient is in a Prone Position**

Videoüberwachung eines Patientengesichts bei der medizinischen Behandlung in Bauchlage

Observation vidéo du visage d'un patient pendant une procédure médicale alors que le patient se trouve en position ventrale

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR**

(30) Priority: **04.10.2007 US 867242**

(43) Date of publication of application:  
**08.04.2009 Bulletin 2009/15**

(60) Divisional application:  
**13150498.7 / 2 581 036**

(73) Proprietor: **Dupaco, Inc.**  
**Oceanside, CA 92056 (US)**

(72) Inventors:  
• **Vu, An Binh**  
**Fallbrook, CA 92028 (US)**

• **Jordan, Gregory Philip**  
**Carlsbad, CA CA 92008 (US)**

(74) Representative: **Gray, James**  
**Withers & Rogers LLP**  
**4 More London Riverside**  
**London**  
**SE1 2AU (GB)**

(56) References cited:  
**WO-A-03/101537 WO-A-2006/110671**  
**US-A- 4 752 064 US-A- 5 220 699**  
**US-A- 5 443 058 US-A1- 2005 066 444**  
**US-A1- 2006 058 590 US-A1- 2007 017 534**  
**US-A1- 2007 132 597 US-B1- 7 165 860**

**EP 2 044 880 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention generally pertains to medical apparatus and is particularly directed to apparatus that allows various features of a patient's face, such as the eyes, nose and/or mouth, to be observed while the patient is in a prone position.

**[0002]** Such an apparatus is described in United States Patent No. 6,490,737 to William Mazzei, Gregory Jordan and An Vu. The apparatus includes a facial cushion for providing cranial support for a patient during surgery. The facial cushion is dimensioned for achieving optimum fit and pressure diffusion upon the face of the patient. The facial cushion has a frontal aperture and viewing passages in the cushion sidewalls. The aperture and the viewing passages are so dimensioned and relatively disposed that the eyes, nose and mouth of a patient in the prone position and wearing the facial cushion may be seen through the viewing passages from positions adjacent to the sidewall viewing passages. In one embodiment, the apparatus further includes a mirrored surface, which is disposed beneath the cushion to enable upright individuals standing adjacent to the facial cushion to view images of the features of the patient's face that are visible through the aperture and reflected off of the mirrored surface.

**[0003]** United States Patent No. 4,752,064 to Gene Voss describes an apparatus that includes a facial cushion for providing cranial support for a patient in a prone position during a medical procedure, a mirror, a video camera and a TV monitor. The cushion has a frontal aperture that is dimensioned so that at least one facial feature of a patient wearing the facial cushion and in a prone position is visible through the frontal aperture from beneath the patient. The mirror is placed beneath a plate that supports the facial cushion to enable upright individuals standing adjacent to the facial cushion to view images of the features of the patient's face that are reflected by the mirror. The video camera may be placed below the patient. The TV monitor may be coupled to the video camera.

**[0004]** The invention is defined in the independent claim 1. Preferred embodiments are defined in the dependent claims.

**[0005]** The present invention enhances the ability of medical personnel, such as anesthesiologists and anesthesiologists, to meet a requirement of periodically recording in a surgical procedure file that they checked the patient's eyes every specified interval, typically every fifteen minutes, to ensure that no pressure from the facial cushion or any other material is impacting the patient's eyes. It becomes more difficult and inconvenient to periodically view the patient's facial features at the required times as the medical procedure becomes longer and longer. Some medical procedures in which the patient is in a prone position take at least ten hours. The present invention allows medical personnel to view the patient's facial features by looking at a video monitor, instead of

stooping, looking in a mirror or having to get out of a chair to look around the patient's head to see that the patient's eyes are safely within the frontal aperture of the facial cushion with nothing touching them. The present invention also obviates the necessity of the medical personnel having to engage in a dangerous practice of poking around the patient's eyes with their fingers in order to make the periodically required observations.

**[0006]** Additional features of the present invention are described with reference to the detailed description of the preferred embodiments.

FIG. 1 is a perspective view of one embodiment of an apparatus according to the invention.

FIG. 1A is an exploded perspective view of the combination of the facial cushion and the cushion support in the embodiment shown in FIG. 1.

FIG. 1B is an exploded perspective view of the combination of the camera, a lens holder and a protective dome included in the embodiment shown in FIG. 1. FIG. 2 is a block diagram of an embodiment of the invention in which a video monitor, a computer and a video recorder are coupled to the video camera. FIG. 3 is a block diagram of an embodiment of signal processing by the computer included in the embodiment shown in FIG. 2.

FIG. 4 is a perspective view of another embodiment of an apparatus according to the invention.

FIG. 5 is a perspective view of still another embodiment of an apparatus according to the invention.

FIG. 6 is a perspective view of yet another embodiment of an apparatus according to the invention.

FIG. 7 is a view of a further embodiment of an apparatus according to the invention.

FIG. 7A is a perspective view of the facial cushion included in the embodiment shown in FIG. 7.

**[0007]** Referring to FIGS. 1, 1A and 1B, one embodiment of an apparatus includes a facial cushion 10, a video camera 11 and a video monitor 12. The video camera 11 includes a lens 14 and a video circuit box 15, which are interconnected by a first cable 16. The video circuit box 15 is connected to the video monitor 12 by a second cable 17 and a connector 18. The video camera 11 may be powered by a rechargeable battery (not shown) or otherwise, such as via a line from a wall socket.

**[0008]** In the preferred embodiments, the video camera 11 is an audio video camera that includes a microphone (not shown), and provides color images. In alternative embodiments, a microphone is not included in the video camera 11 and/or the video camera 11 provides monochromatic images.

**[0009]** The facial cushion 10 provides cranial support for a patient in a prone position during a medical procedure. The facial cushion 10 is dimensioned for achieving optimum fit and pressure diffusion upon the face of the patient.

**[0010]** The facial cushion 10 has a frontal aperture 20,

which includes viewing passages 22 in the cushion side-walls. The frontal aperture 20 is dimensioned so that the eyes, nose and mouth of a patient wearing the facial cushion 10 and in a prone position are visible through the frontal aperture 20 from beneath the patient. The viewing passages 22 of the frontal aperture 20 are so dimensioned and disposed that the eyes, nose and mouth of a patient in the prone position and wearing the facial cushion may be seen through the viewing passages 22 from positions adjacent to the sidewall viewing passages 22. The facial cushion 10 may be made of one component or a plurality of components.

**[0011]** The facial cushion 10 is supported by a rigid casing 24. The support casing 24 has four legs 25, which are mounted in four hollow posts 26 that extend from a platform 28; whereby the casing 24 supports the facial cushion 10 in a stationary position above the platform 28. The support casing 24 includes an aperture 29 that is compatible with the frontal aperture 20 of the facial cushion 10.

**[0012]** Various alternative embodiments of facial cushions and support casings are described in the aforementioned US Patent No. 4,635,625. In said patent the term "helmet" is used to refer to the support casing.

**[0013]** The platform 28 may be a table, such as an operating table. In some embodiments, the platform 28 can be attached off the end of any operating table or off the sides or on the rails of an operating table.

**[0014]** The video camera lens 14 is disposed beneath the facial cushion 10 for providing a sequence of video signals representing sequential images of the facial features that are visible through the frontal aperture 20. The sequence of video signals represent relatively continuous images or time-lapsed images, such as images at five-minute intervals, as determined by a timer in the video camera circuit box 15.

**[0015]** When the setting has relatively low ambient lighting, a camera having a low lux rating may be used, and/or a light source (not shown) can be provided to enhance the clarity of the images. Such a light source, such as an LED or an infrared source, may be attached to the video camera 11 adjacent to the camera lens 14.

**[0016]** A receptacle 30 is disposed on the platform 28 for locating the camera lens 14 in a stationary position beneath the facial cushion 10. The camera lens 14 is held in the stationary position by a lens holder 32. The lens holder 32 is slid into the receptacle 30 so that the lens 14 and the facial cushion 10 are held in a stationary relationship to one another.

**[0017]** The lens 14 is covered by a transparent dome 33 for shielding the lens 14 from fluids secreted by a patient wearing the facial cushion 10 and in the prone position above the lens 14.

**[0018]** In the preferred embodiments, the camera lens 14 is a wide angle lens for providing a relatively undistorted image of at least the portion of the patient's face that extends laterally to fully include both eyes. A preferred wide angle lens is a 1.9 mm super wide angle lens

having a focal length of at least one inch.

**[0019]** In some preferred embodiments, the first cable 16 passes through the side of a casing 34 for the lens 14; and the lens casing 34 has a flat bottom so that the camera lens 14 can be readily disposed in a stable position on a flat surface.

**[0020]** The video monitor 12 is coupled to the video camera 11 for enabling the images of the visible facial features represented by the video signals provided by the video camera 11 to be monitored in real time. Preferably, the video monitor 12 is located so that it can be viewed by medical personnel having the responsibility of observing the various features of the patient's face during the medical procedure in order to detect any change in such features that could be detrimental to the patient, such as a movement of the patient's face relative to the facial cushion 10 that causes any part of the eyes to be impacted by the facial cushion 10 or some other device in the proximity. A person, typically an anesthetist or an anesthesiologist, views the video monitor 12 at least periodically during the course of the medical procedure and makes a periodic record of the status of the facial features observed on the video monitor 12.

**[0021]** In addition to monitoring a patient's eyes, the patient's mouth and/or nose are also monitored by use of the video monitor 12 to make sure that the patient's air passages are not obstructed and/or that tubing inserted into the patient's air passages have not been removed therefrom and/or that such tubing has not become disconnected from a breathing circuit.

**[0022]** Referring to FIG. 2, in various alternative embodiments, video signals 36 representing sequential images of the facial features observed from beneath the facial cushion 10 are provided by a video camera 11 disposed beneath the facial cushion 10 to a video monitor 12, a computer 37 and/or a video recorder 38. The video monitor 12, the computer 37 and the video recorder 38 are respectively coupled to the video camera 11 by a wireless interface or by a hardwired connection.

**[0023]** The computer 37 is programmed for processing the video signals to detect a change in at least one aspect of the sequential images that exceeds a predetermined threshold and, when the predetermined threshold is exceeded, to provide a signal 39 to a device 40 that alerts the medical personnel to such a detected change.

**[0024]** Referring also to FIG. 3, the video signals 36 are processed by the computer 37 to provide facial-feature-image data 42. The initial facial-feature-image data 42 is stored as an image data template in a memory 44 of the computer 37. The computer 37 performs a routine 46 of comparing the stored image data template in the memory 44 to facial-feature-image data 42' provided by processing the subsequent sequential video signals 36 from the video camera 11 in order to detect a change in at least one aspect of the sequential images that exceeds the predetermined threshold. Facial recognition software may be used to implement this feature.

**[0025]** Whenever the predetermined threshold is ex-

ceeded, as shown at 48, the computer 37 provides the signal 39 to the device 40 that alerts a person to such a detected change. The alert is of an audible, visual and/or vibratory nature. The alert is provided to the person having the responsibility of observing the various features of the patient's face during the medical procedure. After an alert has been provided and the patient's face is once again placed in a desired position relative to the facial cushion 10, the image data template that is stored in the memory 44 is once again initialized.

**[0026]** The video recorder 38 records the video signals provided by the video camera 11 to provide a record of the sequential images of the visible facial features over the duration of the medical procedure in which the patient is wearing the facial cushion and in a prone position. The recorded images may be time-lapsed images to limit the amount of memory required to preserve the record of the sequential images. The recorded images may be used to corroborate the records made by a person viewing the video monitor 12 during the course of the medical procedure. The recorded images may be downloaded from the video recorder 38 to a portable data storage device, such as disc or a memory stick, that can be put into the patient's file.

**[0027]** In some embodiments, the platform 28 has a mirrored upper surface 50. The mirrored surface 50 is disposed beneath the facial cushion 10 to enable upright individuals standing adjacent to the facial cushion 10 to view images of the features of the patient's face that are reflected off of the mirrored surface 50. The receptacle 30 holds the video camera lens 14 in a stationary position on the mirrored surface 50. This mirrored surface feature provides an additional way to observe the facial features of the patient in the event that for some reason the display of the facial features on the video monitor 12 is interrupted.

**[0028]** Referring to FIG. 4, in another embodiment of the apparatus of the present invention, a cushion support casing 54 is mounted on a platform 55 of a Jackson operating table. The support casing 54 has four hollow legs 56, which are mounted on four posts 57 that extend from the platform 55. In other aspects, the embodiment of FIG. 4 has the same alternative features as described above with reference to FIGS. 1, 1A, 1B, 2 and 3.

**[0029]** Referring to FIG. 5, in still another embodiment of the apparatus of the present invention, the support casing 24 is mounted on a platform 60 that has a mirrored surface 62 and a chamber (not shown) beneath the mirrored surface 62 in which the video camera is contained so that the camera lens 64 is disposed amidst the mirrored surface 62 in a position beneath the frontal aperture 20 of the facial cushion 10. In other aspects, the embodiment of FIG. 5 has the same alternative features as described above with reference to FIGS. 1, 1A, 1B, 2 and 3.

**[0030]** Referring to FIG. 6, in yet another embodiment of the apparatus of the present invention, a cushion support casing 68 is mounted on a platform 55 of a Jackson operating table, as described above with reference to

FIG. 4; and a video camera lens 70 is disposed at the end of a flexible arm 72 that is attached to the cushion support casing 68. In other aspects, the embodiment of FIG. 6 has the same alternative features as described above with reference to FIGS. 1, 1A, 1B, 2 and 3.

**[0031]** Referring to FIGS. 7 and 7A, a further embodiment of the apparatus of the present invention does not include a cushion support casing; and the facial cushion 76 is self-supporting and configured for mounting on a platform (not shown). The platform may be as described with reference to the embodiments shown in FIGS. 1, 4, 5 or 6. The facial cushion 76 has a frontal aperture 77, which includes viewing passages 78 in the cushion side-walls. The facial cushion 76 is made of one component. The self-supporting facial cushion may have a different configuration than the facial cushion 76 shown in FIGS. 7 and 7A. An example of a self-supported facial cushion having a different configuration that may be used in this further embodiment of the apparatus of the present invention is the GentleTouch brand pillow, which presently is a product of Mizuho OSI. In other aspects, the embodiment of FIGS. 7 and 7A has the same alternative features as described above with reference to FIGS. 1, 1A, 1B, 2 and 3.

**[0032]** Referring again to FIG. 2, the apparatus of the present invention may be used in combination with an audio system for allowing the breathing of a patient to be monitored while the patient is wearing the facial cushion and in the prone position. The audio system includes a microphone 80, an audio signal processor 82 and a speaker 83. The audio signal processor 82 is coupled to the microphone 80 by a wireless or hardwired interface.

**[0033]** The microphone 80 is disposed for detecting the breathing of the patient while the patient is wearing the facial cushion and in the prone position. In one embodiment, the microphone 80 is disposed in the video camera 11. In an alternative embodiment, the microphone 80 is disposed adjacent the platform 28, which is shown in FIG. 1. The audio signal processor 82 processes the signals received from the microphone 80. The speaker 83 is coupled to the audio signal processor 82 to reproduce the sounds of the patient's breathing.

**[0034]** The speaker 83 is located so that the sounds of the patient's breathing can be heard by medical personnel having the responsibility of monitoring the patient's breathing during the medical procedure. The speaker 83 may be included in a headset or contained in a casing that is disposed on a table or the like; or the speaker casing is configured for being attached to a person or some object, such as a wall or some apparatus, such as an operating table. The speaker 83 is coupled to the audio signal processor 82 by a wireless or hardwired interface.

**[0035]** An alternative embodiment of the audio system also includes an audio recorder 84, which is coupled to the audio signal processor 82 for making an audio record of the patient's breathing during a medical procedure while the patient is wearing the facial cushion and in the

prone position. The audio record may be used to corroborate the video recording made by the video recorder 38.

**[0036]** In an embodiment in which the microphone 80 is included in the video camera 11, the audio signal processor 82 is included in the circuit box 15 of the video camera, the speaker 83 is included with the video monitor 12 in a television monitor and/or the audio recorder 84 is included in the video recorder 38.

**[0037]** The speaker 83 and the alerting device 40 can be integrated to provide an audible alert when the computer 37 detects that the predetermined threshold is exceeded, as shown at 48 in FIG. 3.

**[0038]** In further alternative embodiments (not shown), (a) the video camera lens is disposed for viewing images that are reflected off of a mirror or off of two mirrors; (b) the video camera lens is mounted inside the cushion support casing or inside the facial cushion; and/or (c) the video camera lens is mounted on adjustment screws to travel with an extension to provide an optimum focal point.

**[0039]** In still other embodiments the various aspects of the different embodiments described herein are combined with one another to the extent that they are not incompatible with each other.

**[0040]** The benefits specifically stated herein do not necessarily apply to every conceivable embodiment of the present invention. Further, such stated benefits of the present invention are only examples and should not be construed as the only benefits of the present invention.

## Claims

1. Apparatus that allows at least one feature of a patient's face to be observed while the patient is in a prone position, comprising:

a facial cushion (10) for providing cranial support for a patient in a prone position during a medical procedure, wherein the cushion has at least one frontal aperture (20) that is dimensioned so that at least one facial feature of a patient wearing the facial cushion and in a prone position is visible through the at least one aperture from beneath the patient;

a video camera (11) having a lens (14) disposed for providing a sequence of video signals representing sequential images of the at least one facial feature of the patient wearing facial cushion that is visible through the at least one frontal aperture; and

monitoring means (12) coupled to the video camera for enabling the images of the at least one facial feature to be monitored;

**characterised by** the monitoring means (12) including a computer (37) that is programmed for processing the video signals to detect a change in at least one aspect of the sequential images

that exceeds a predetermined threshold by processing the video signals to provide facial-feature-image data (42') and comparing the facial-feature data (42') for the patient wearing facial cushion with stored initial facial-feature-image data (42), for the patient wearing facial cushion and when the detected change exceeds the predetermined threshold, for providing a signal (39) to a device for alerting a person to said detected change.

2. Apparatus according to Claim 1, **characterised by** further comprising:

a video recorder (38) coupled to the camera (11) for recording the video signals provided by the camera.

3. Apparatus according to Claim 1, **characterised by** the monitoring means (12) being coupled to the video camera (11) by a wireless interface.

4. Apparatus according to Claim 1, **characterised by** the at least one frontal aperture (20) being dimensioned so that at least the eyes of a patient wearing the cushion (10) can be observed through the at least one frontal aperture; and

the lens (14) being a wide angle lens for providing a relatively undistorted image of a portion of the patient's face that extends laterally to fully include both eyes.

5. Apparatus according to Claim 1, **characterised by** a mirrored surface (50) disposed beneath the facial cushion to enable upright individuals standing adjacent to the facial cushion to view images of the features of the patient's face that are reflected off of the mirrored surface; and the lens being disposed on a platform (28) that includes the mirrored surface (50).

6. Apparatus according to Claim 5, **characterised by** a receptacle (32) disposed for locating the lens (14) in a stable position beneath the frontal aperture (20) of the facial cushion.

7. Apparatus according to Claim 5, **characterised by** the lens (14) being disposed amidst the mirrored surface (50) in a position beneath the frontal aperture (20) of the facial cushion.

8. Apparatus according to Claim 1, **characterised by** the lens (14) being disposed at the end of a flexible arm (72) that is attached to means (68) that are stationary in relation to the facial cushion.

9. Apparatus according to Claim 1, **characterised by** a transparent dome (33) disposed over the lens (14) for shielding the lens from fluids secreted by a said

patient wearing the facial cushion (10) and in the prone position above the lens.

**10.** Apparatus according to Claim 1 in combination with:

an audio system (80, 82, 83, 84) for allowing the breathing of a patient to be monitored while the patient is wearing the facial cushion and in a prone position.

**Patentansprüche**

**1.** Vorrichtung, die es ermöglicht, dass mindestens ein Gesichtszug eines Patienten beobachtet wird, während der Patient in Bauchlage ist, aufweisend:

ein Gesichtskissen (10) zum Bereitstellen einer Stütze für den Schädel eines Patienten in Bauchlage während einer medizinischen Prozedur, wobei das Kissen mindestens eine frontale Öffnung (20) hat, die so dimensioniert ist, dass mindestens ein Gesichtszug eines Patienten, der das Gesichtskissen trägt und sich in Bauchlage befindet, durch die mindestens eine Öffnung von unter dem Patienten sichtbar ist; eine Videokamera (11) mit einer Linse (14), die eingerichtet ist zum Bereitstellen einer Folge von Videosignalen, die aufeinanderfolgende Bilder des mindestens einen Gesichtszugs des Patienten, der das Gesichtskissen trägt, der durch die mindestens eine frontale Öffnung sichtbar ist, repräsentieren; und Überwachungsmittel (12), die mit der Videokamera gekoppelt sind, zum Ermöglichen, dass die Bilder des mindestens einen Gesichtszugs überwacht werden; dadurch charakterisiert, dass die Überwachungsmittel (12) einen Computer (37) aufweisen, der programmiert ist zum Verarbeiten der Videosignale zum Detektieren einer Änderung in mindestens einem Aspekt der aufeinanderfolgenden Bilder, die einen vorbestimmten Schwellwert überschreitet, durch Verarbeiten der Videosignale zum Bereitstellen von Gesichtszugbilddaten (42') und Vergleichen der Gesichtszugdaten (42') für den Patienten, der das Gesichtskissen trägt, mit gespeicherten Ausgangsgesichtszugbilddaten (42) für den Patienten, der das Gesichtskissen trägt, und, wenn die detektierte Änderung den vorbestimmten Schwellwert überschreitet, zum Zuführen eines Signals (39) an eine Vorrichtung, um eine Person auf die Änderung aufmerksam zu machen.

**2.** Vorrichtung gemäß Anspruch 1, dadurch charakterisiert, dass sie ferner aufweist:

einen Videorecorder (38), der mit der Kamera (11) gekoppelt ist, zum Aufnehmen der von der Kamera bereitgestellten Videosignale.

**3.** Vorrichtung gemäß Anspruch 1, dadurch charakterisiert, dass die Überwachungsmittel (12) mit der Videokamera (11) durch eine drahtlose Schnittstelle gekoppelt sind.

**4.** Vorrichtung gemäß Anspruch 1, dadurch charakterisiert, dass die mindestens eine frontale Öffnung (20) so dimensioniert ist, dass mindestens die Augen des Patienten, der das Kissen (10) trägt, durch die mindestens eine frontale Öffnung beobachtet werden können; und dadurch, dass die Linse (14) eine Weitwinkellinse zum Bereitstellen eines verhältnismäßig unverzerrten Bildes eines Teils des Gesichts des Patienten, das sich lateral erstreckt, so dass es beide Augen voll enthält, ist.

**5.** Vorrichtung gemäß Anspruch 1, charakterisiert durch eine verspiegelte Oberfläche (50), die unter dem Gesichtskissen angeordnet ist, um es aufgerichteten Individuen, die neben dem Gesichtskissen stehen, zu ermöglichen, Bilder der Gesichtszüge des Patienten, die von der verspiegelten Oberfläche reflektiert werden, zu sehen; und dadurch, dass die Linse auf einer Plattform (28) angeordnet ist, die die verspiegelte Oberfläche (50) enthält.

**6.** Vorrichtung gemäß Anspruch 5, charakterisiert durch eine Aufnahmevorrichtung (32) angeordnet zum Halten der Linse (14) in einer stabilen Position unter der frontalen Öffnung (20) des Gesichtskissens.

**7.** Vorrichtung gemäß Anspruch 5, dadurch charakterisiert, dass die Linse (14) inmitten der verspiegelten Oberfläche (50) in einer Position unter der frontalen Öffnung (20) des Gesichtskissens angeordnet ist.

**8.** Vorrichtung gemäß Anspruch 1, dadurch charakterisiert, dass die Linse (14) an dem Ende eines flexiblen Arms (72) angeordnet ist, das an Mitteln (68) befestigt ist, die in Bezug auf das Gesichtskissen stationär sind.

**9.** Vorrichtung gemäß Anspruch 1, charakterisiert durch eine transparente Haube (33), die über der Linse (14) angeordnet ist, zum Abschirmen der Linse von Flüssigkeiten, die von dem Patienten, der das Gesichtskissen (10) trägt und über der Linse in Bauchlage ist, abgesondert werden.

**10.** Vorrichtung gemäß Anspruch 1 in Kombination mit:

einem Audiosystem (80, 82, 83, 84), das es er-

möglich, dass die Atmung eines Patienten überwacht wird, während der Patient das Gesichtskissen trägt und in Bauchlage ist.

## Revendications

1. Appareil qui permet à au moins une caractéristique du visage d'un patient d'être observée alors que le patient est dans une position ventrale, comprenant :

un coussin facial (10) pour offrir un support crânien à un patient qui se trouve dans une position ventrale pendant un acte médical, étant précisé que le coussin a au moins une ouverture frontale (20) qui est dimensionnée de telle sorte qu'au moins une caractéristique faciale d'un patient qui porte le coussin facial et qui se trouve dans une position ventrale soit visible à travers la ou les ouvertures, de dessous par rapport au patient ;

une caméra vidéo (11) qui comporte un objectif (14) disposé pour fournir une suite de signaux vidéo représentant des images consécutives de la ou des caractéristiques faciales du patient portant le coussin facial qui sont visibles à travers la ou les ouvertures frontales ; et des moyens de surveillance (12) qui sont couplés à la caméra vidéo pour permettre de surveiller les images de la ou des caractéristiques faciales ;

**caractérisé en ce que** les moyens de surveillance (12) comprennent un ordinateur (37) qui est programmé pour traiter les signaux vidéo afin de détecter un changement, dans au moins un aspect des images consécutives, qui dépasse un seuil prédéterminé, en traitant les signaux vidéo pour fournir des données d'image de caractéristiques faciales (42') et en comparant les données d'image de caractéristiques faciales (42') pour le patient qui porte le coussin facial à des données d'image de caractéristiques faciales initiales (42) mémorisées, et, quand le changement détecté dépasse le seuil prédéterminé, pour fournir un signal (39) à un dispositif pour alerter une personne au sujet du changement détecté.

2. Appareil selon la revendication 1, **caractérisé en ce qu'il** comprend par ailleurs :

un enregistreur vidéo (38) qui est couplé à la caméra (11) pour enregistrer les signaux vidéo fournis par la caméra.

3. Appareil selon la revendication 1, **caractérisé en ce que** les moyens de surveillance (12) sont couplés à la caméra vidéo (11) par une interface sans fil.

4. Appareil selon la revendication 1, **caractérisé en ce que** la ou les ouvertures frontales (20) sont dimensionnées de telle sorte que les yeux, au moins, d'un patient qui porte le coussin (10) puissent être observés à travers la ou les ouvertures frontales ; et **en ce que** l'objectif (14) est un objectif grand-angle pour fournir une image relativement non déformée d'une partie du visage du patient qui s'étend latéralement pour inclure les deux yeux.

5. Appareil selon la revendication 1, **caractérisé par** une surface réfléchissante (50) qui est disposée au-dessous du coussin facial, pour permettre à des personnes qui sont debout près du coussin facial de voir les images des caractéristiques du visage du patient qui sont réfléchies par ladite surface réfléchissante ; et en ce que l'objectif est disposé sur une plate-forme (20) qui comprend la surface réfléchissante (50).

6. Appareil selon la revendication 5, **caractérisé par** un réceptacle (32) qui est disposé pour placer l'objectif (14) dans une position stable au-dessous de l'ouverture frontale (20) du coussin facial.

7. Appareil selon la revendication 5, **caractérisé en ce que** l'objectif (14) est disposé au milieu de la surface réfléchissante (50), à un endroit situé au-dessous de l'ouverture frontale (20) du coussin facial.

8. Appareil selon la revendication 1, **caractérisé en ce que** l'objectif (14) est disposé à l'extrémité d'un bras flexible (72) qui est fixé à des moyens (68) stationnaires par rapport au coussin facial.

9. Appareil selon la revendication 1, **caractérisé par** une calotte transparente (33) qui est disposée au-dessus de l'objectif (14) pour protéger celui-ci de fluides sécrétés par un patient qui porte le coussin facial (10) et qui se trouve en position ventrale au-dessus dudit objectif.

10. Appareil selon la revendication 1, combiné avec :  
un système audio (80, 82, 83, 84) pour permettre de surveiller la respiration d'un patient alors que celui-ci porte le coussin facial et se trouve dans une position ventrale.

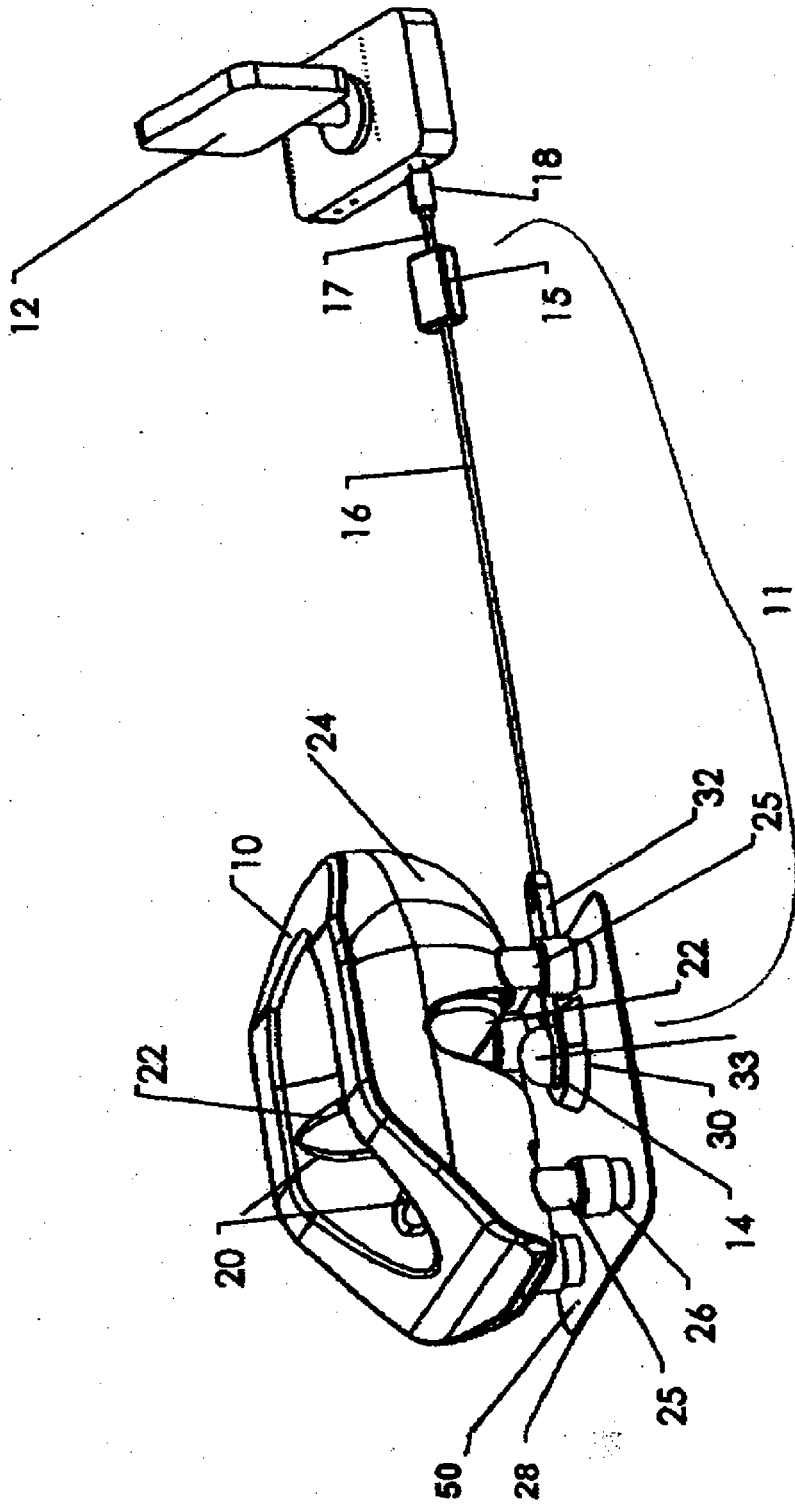
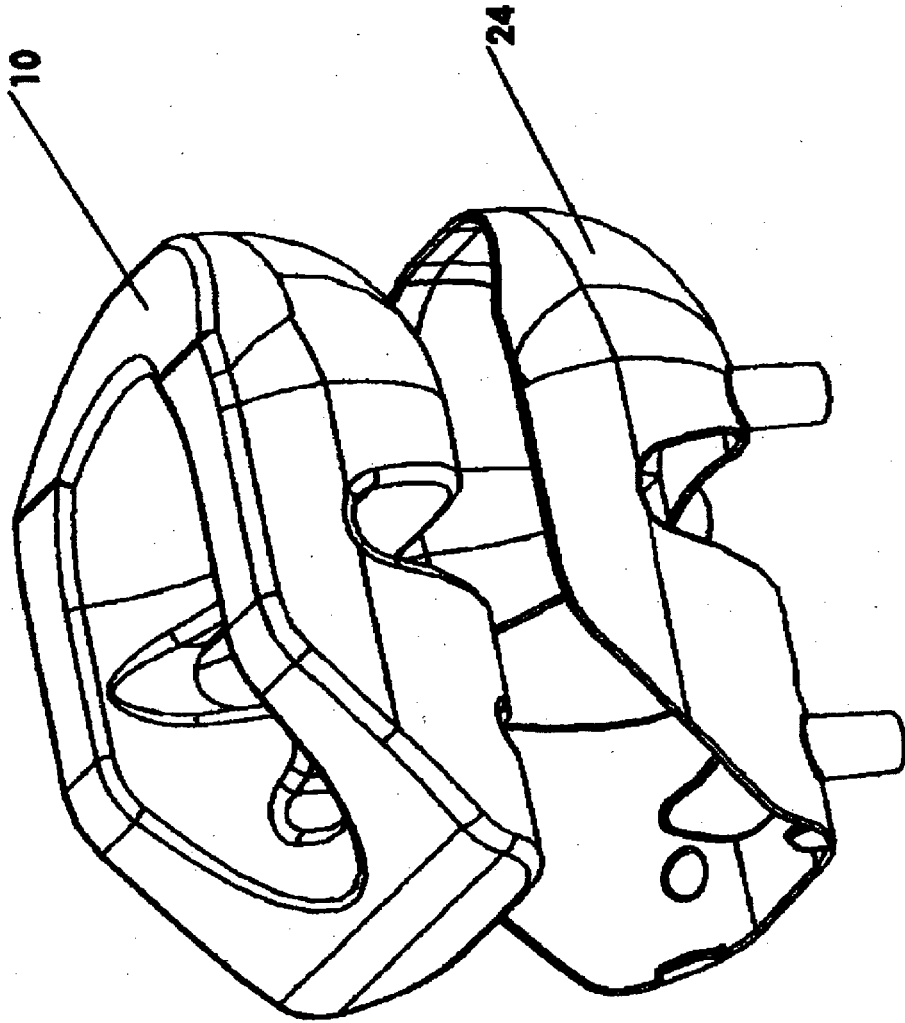
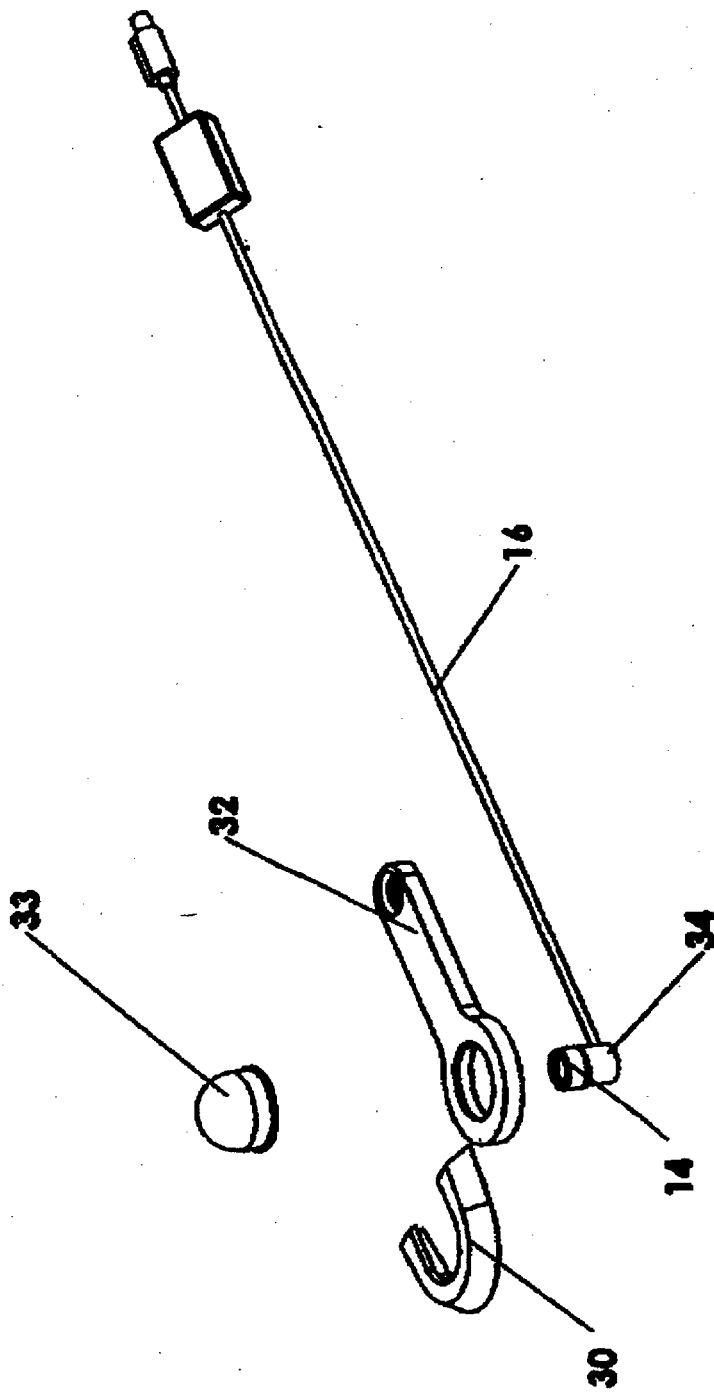


FIG. 1



**FIG. 1A**



**FIG. 1B**

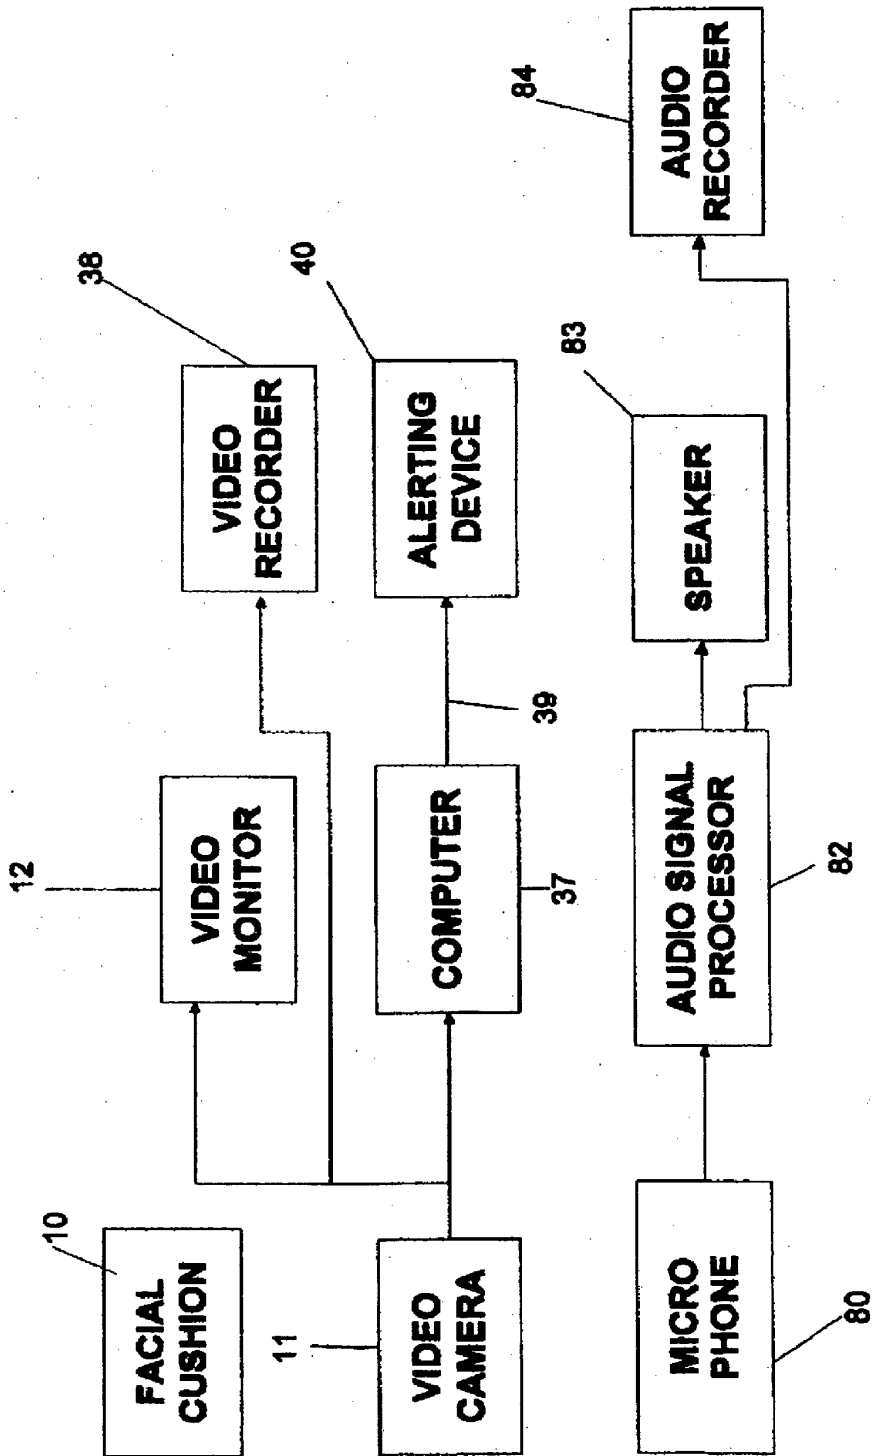


FIG. 2

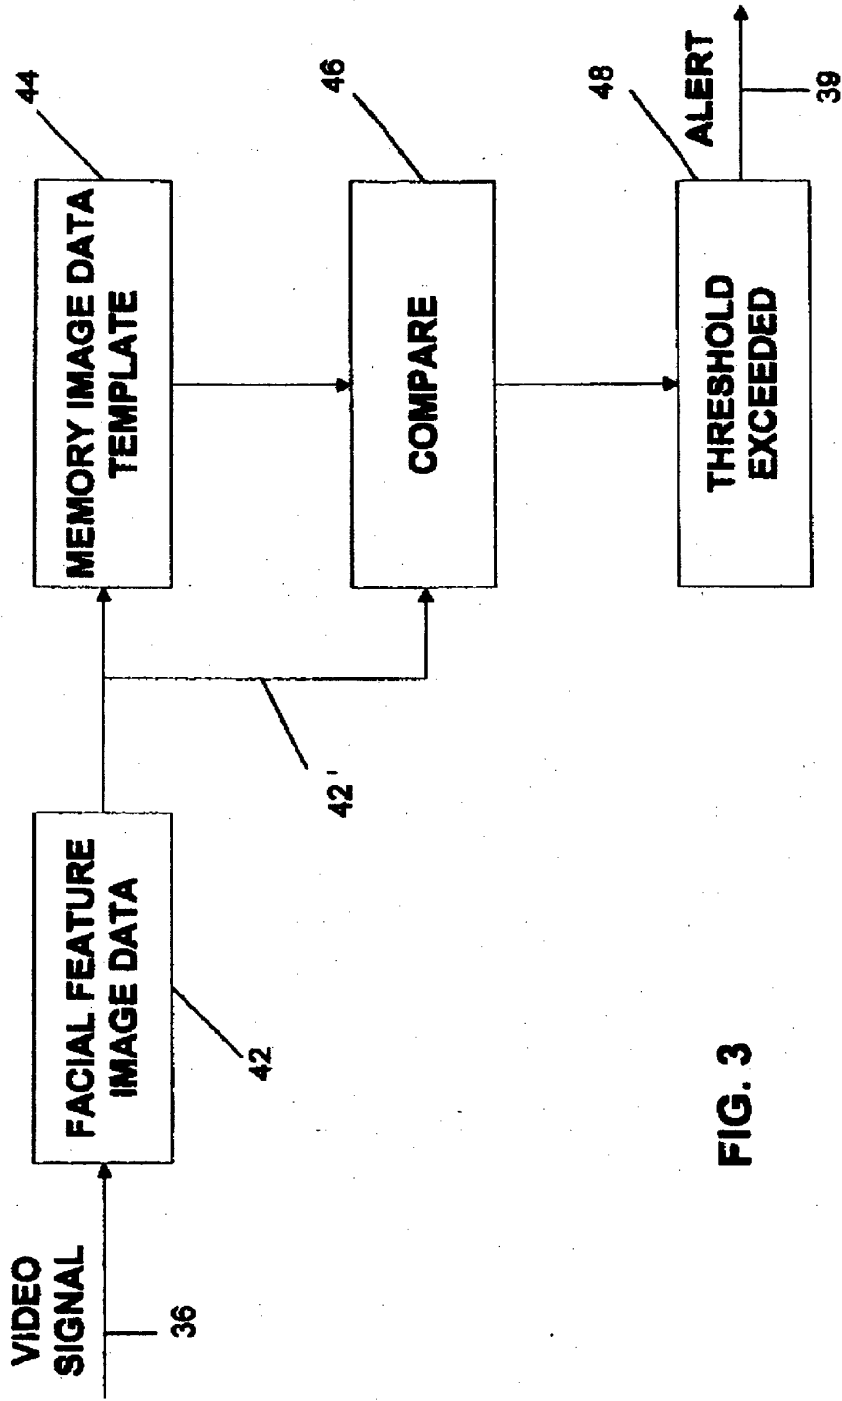


FIG. 3

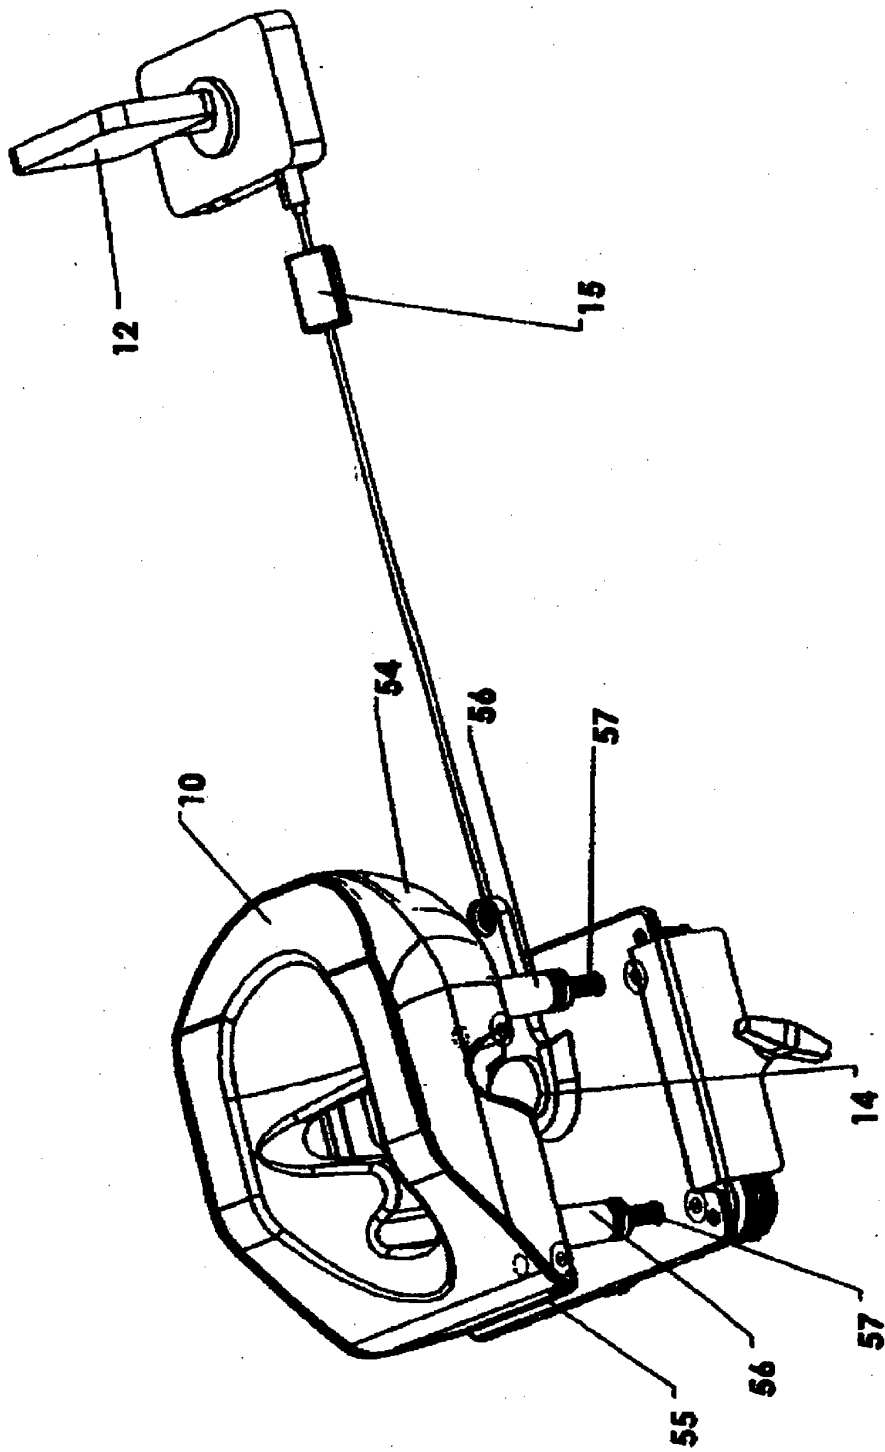


FIG. 4

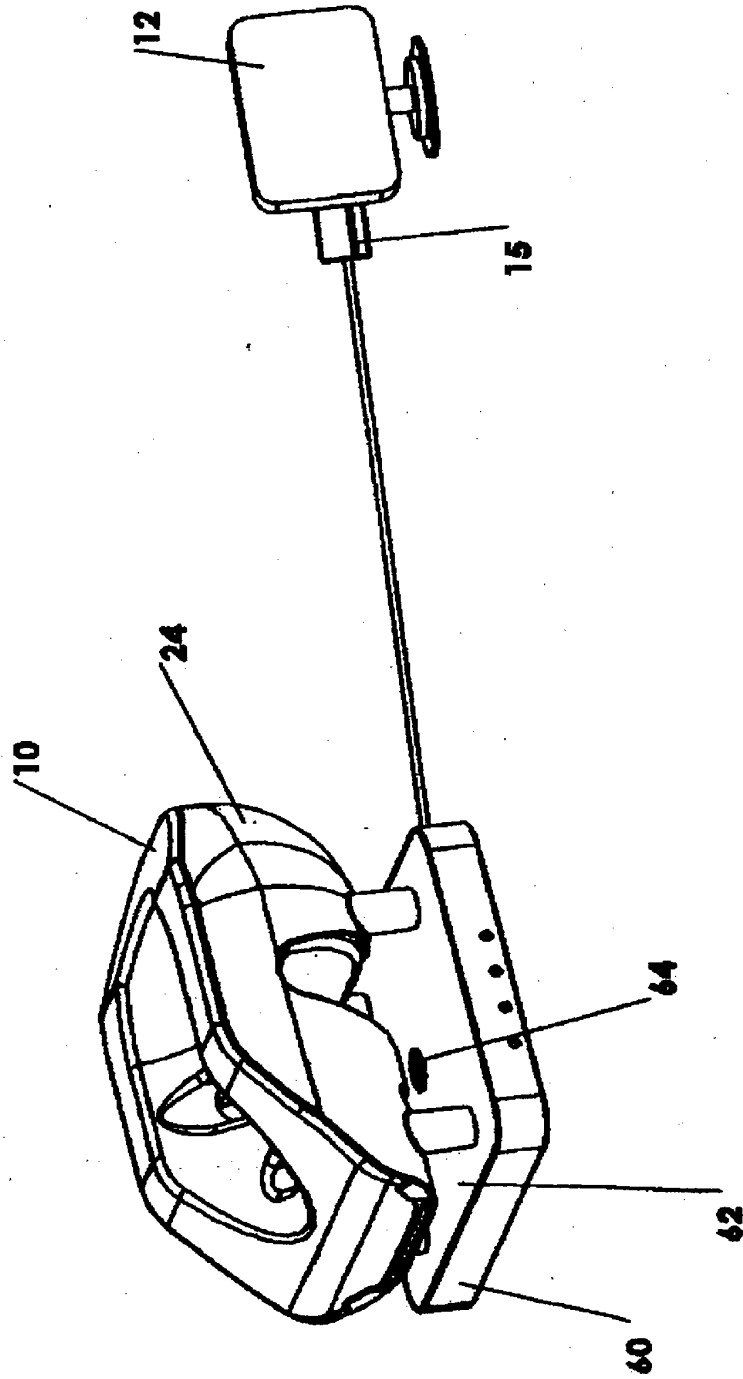


FIG. 5

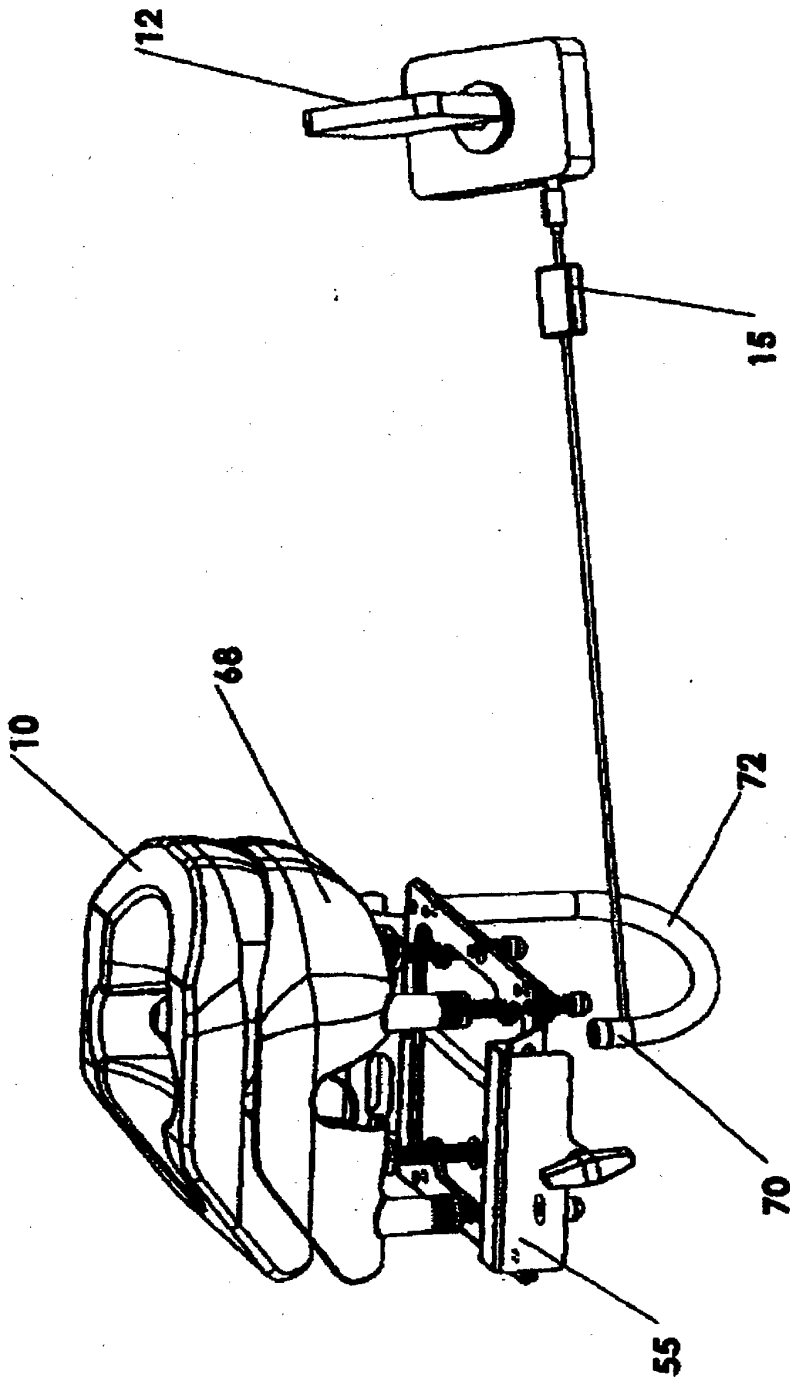


FIG. 6

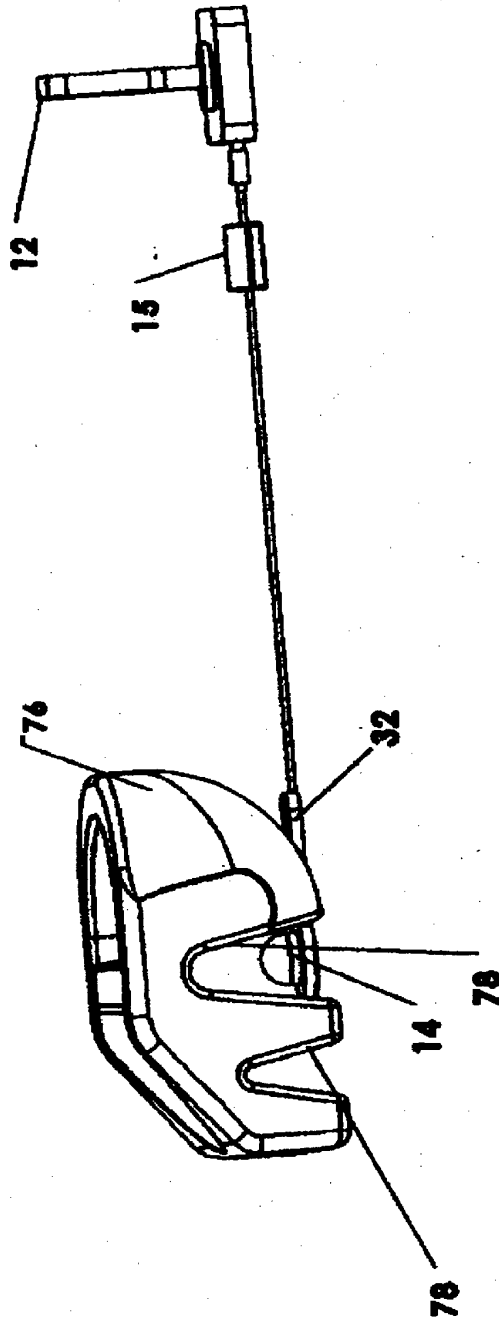
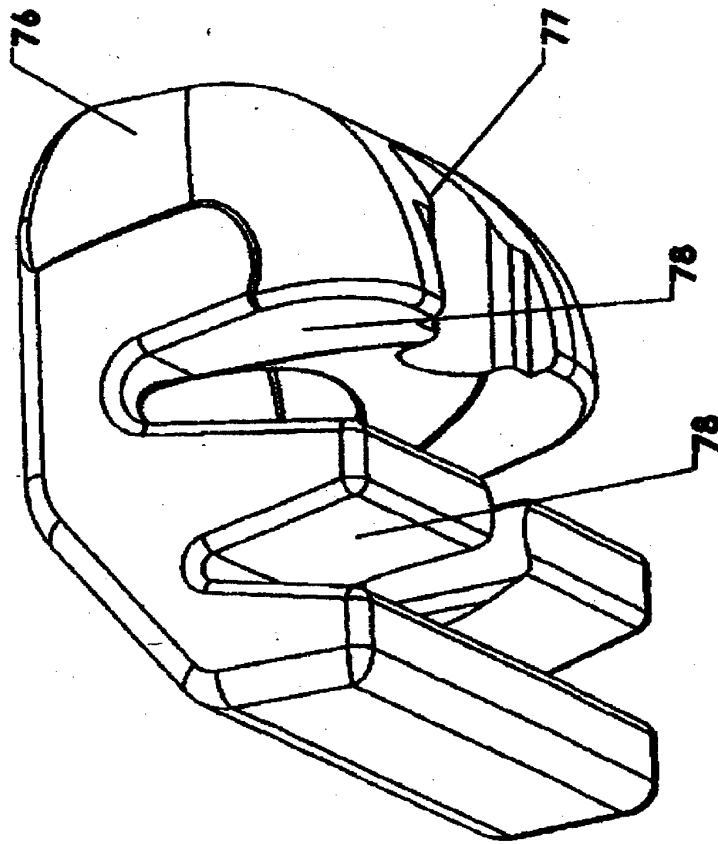


FIG. 7



**FIG. 7A**

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 6490737 B, William Mazzei, Gregory Jordan and An Vu [0002]
- US 4752064 A, Gene Voss [0003]
- US 4635625 A [0012]

专利名称(译)	在患者处于俯卧位时的医疗过程中对患者面部进行视频观察		
公开(公告)号	<a href="#">EP2044880B1</a>	公开(公告)日	2014-07-16
申请号	EP2008164905	申请日	2008-09-23
[标]申请(专利权)人(译)	DUPACO		
申请(专利权)人(译)	DUPACO INC.		
当前申请(专利权)人(译)	DUPACO INC.		
[标]发明人	VU AN BINH JORDAN GREGORY PHILIP		
发明人	VU, AN BINH JORDAN, GREGORY PHILIP		
IPC分类号	A61B5/00 A61G13/12		
CPC分类号	A61G13/12 A61B5/1106 A61B5/4821 A61B5/70 A61F9/007 A61F9/04 A61G13/121 A61G2200/325		
代理机构(译)	灰色, JAMES		
优先权	11/867242 2007-10-04 US		
其他公开文献	EP2044880A1		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

在患者处于俯卧位置时允许观察患者面部的至少一个特征的装置包括面部垫 (10), 摄像机 (11) 和监视器 (12)。面部护理垫在医疗过程中为俯卧位的患者提供颅骨支撑。所述衬垫具有前孔 (20), 所述前孔的尺寸被设计成使得佩戴所述面部衬垫并且处于俯卧位置的患者的面部特征通过所述至少一个孔可见。摄像机具有透镜 (14), 该透镜设置用于提供一系列视频信号, 这些视频信号表示通过前孔可见的面部特征的连续图像。监视器耦合到摄像机, 以使得能够监视至少一个面部特征的图像。图像由视频监视器和/或计算机监视 (37)。

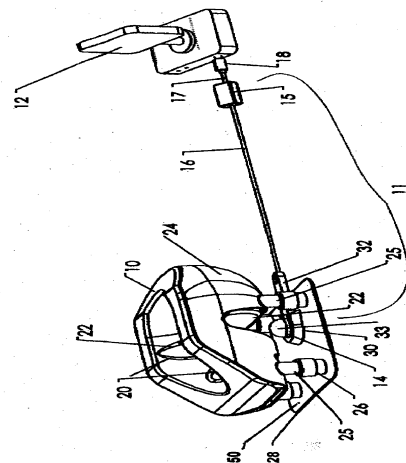


FIG. 1