

(19)



(11)

EP 2 925 227 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

28.03.2018 Bulletin 2018/13

(51) Int Cl.:

A61B 5/00 (2006.01)

G01B 11/16 (2006.01)

G06T 7/20 (2017.01)

A61B 5/113 (2006.01)

G06T 7/00 (2017.01)

(21) Application number: **13799643.5**

(86) International application number:

PCT/GB2013/053140

(22) Date of filing: **27.11.2013**

(87) International publication number:

WO 2014/083337 (05.06.2014 Gazette 2014/23)

(54) ANALYSIS OF BREATHING DATA

ANALYSE VON BEATMUNGSDATEN

ANALYSE DE DONNÉES DE RESPIRATION

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO RS SE SI SK SM TR**

(72) Inventors:

- **LASENBY, Joan**
Cambridgeshire CB7 4EX (GB)
- **DE BOER, Willem Hessel**
Cambridgeshire CB7 4EX (GB)

(30) Priority: **27.11.2012 GB 201221336**

04.09.2013 GB 201315762

(74) Representative: **Stratagem IPM Limited**

Meridian Court
Comberton Road
Toft, Cambridge CB23 2RY (GB)

(43) Date of publication of application:

07.10.2015 Bulletin 2015/41

(60) Divisional application:

17203253.4

(56) References cited:

EP-A1- 2 380 493

WO-A2-03/067216

US-A1- 2004 068 197

WO-A1-2012/080896

WO-A2-2010/066824

(73) Proprietor: **Pneumacare Ltd**

Cambridge CB23 6HJ (GB)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 925 227 B1

Description

Field

[0001] The invention relates to a method of measuring and/or analysing breathing data and to a device for carrying out the method.

Background

[0002] Monitoring the breathing and/or lung functions of a subject provides data that is often useful for detecting and/or diagnosing the presence of lung disease and/or pulmonary obstructions and/or other conditions. Accurate measurement and analysis of breathing and/or lung functions generally requires the use of devices such as masks or mouthpieces coupled to the mouth of a subject to be monitored. These devices tend to be uncomfortable and/or invasive and do not lend themselves to monitoring difficult and/or frail subjects, for example neonatal subjects.

[0003] Respiratory Inductance Plethysmography is another method of monitoring the breathing and/or lung functions of a subject, which is carried out by measuring the movement of the chest and abdominal wall. This approach is based on the theory that the sum of the changes in the anteroposterior diameter of the abdomen and the rib cage correspond to changes in lung volume. Two elastic bands that incorporate sinusoid wire coils are used to measure this diameter. One of the bands is placed around the rib cage under the armpits and the other around the abdomen at the level of the umbilicus.

[0004] Expansion of the bands changes the self-inductance of the coils, allowing the change in the anteroposterior diameter to be measured. The bands are connected to an oscillator and demodulation electronics, which convert the readings into digital waveforms. These waveforms are then used to analyse and/or describe various measures of complex respiratory patterns, for example respiratory rate, tidal volume, minute ventilation, peak inspiratory flow, fractional inspiratory time, peak and/or mean inspiratory and/or expiratory flow measures and the percent contribution of the chest and/or abdomen to the tidal volume.

[0005] The fitting of the bands on the subject to be monitored requires manoeuvring of the subject, which can in some cases be problematic in difficult and/or frail subjects.

[0006] Another known method and associated apparatus for monitoring the breathing and/or lung functions of a subject is disclosed in WO2010066824 together with an apparatus for carrying out the method, the contents of which are incorporated herein. This method involves an optical measurement of the three-dimensional shape of the body of the subject over time and derives breathing volume data from the changes in shape. Breathing data of the subject may be compared with breathing data associated with healthy and disease states in a statistical

database to diagnose the subject's lung function.

[0007] It is desirable to provide a method of processing the measurement data that allows a more accurate diagnosis to be made.

Summary

[0008] In accordance with a first aspect of the disclosure, there is provided a method of analysing a data array of at least three dimensions representing a shape of at least part of a body of a subject as a function of time, the data array relating to a 2-dimensional grid having grid points, a position in space of the shape at each grid point and points of time, the method including the steps of:

mapping the data array onto a 2-dimensional array, decomposing the 2-dimensional array, forming a signature of the subject from the decomposed 2-dimensional array representing a motion pattern of the shape.

[0009] The decomposed 2-dimensional array allows one to derive easily the principal modes of the movement of the body, in particular of the chest or rib cage and / or abdomen or of the left and / or right side or sides of the trunk or chest or rib cage and/or abdomen. The principal modes may relate to chest surface movement patterns. The signature may be derived from the principal modes. In breathing analysis, the signature represents the unique breathing pattern of a subject.

[0010] Since a principal mode provides specific information about the motion of a subject, it can distinguish more accurately between disease states than a global parameter such as the volume derived in spirometry. In breathing analysis, the principal modes capture often subtle and localised regional changes of the chest wall, whereas volume, being a global derivative of movement of the chest wall as a whole, does not capture these changes. Therefore, principal modes allow a more accurate diagnosis to be made.

[0011] Each row of the 2-dimensional array may correspond to a grid point and/or includes a plurality of positions at the points of time. The decomposition may use singular value decomposition. The decomposed 2-dimensional array may be USVT, U, S and VT being two-dimensional arrays, and/or the signature may be derived from the columns of U that give the largest contribution to the measured motion and/or the signature may include one or more frequencies derived from the first columns.

[0012] Another feature of the disclosure provides a method of populating a database with signatures of different disease states, the signatures being measured using the method described above.

[0013] The method may include the step of comparing the signature of the subject with signatures associated with disease states and/or determining a distance between the signature of the subject and the signatures associated with disease states. The signature of a dis-

ease state may be derived from the signatures averaged over a group of subjects having the same disease state.

[0014] In accordance with the invention, there is provided a method of identifying breaths in parameter values representing a breathing pattern over time, including the steps of:

forming a time average of the parameter values;
dividing the parameter in segments, each segment lying between subsequent intersections of the parameter and the average;
determining an extreme value of the parameter within each segment, the extreme value being a start of an exhalation or an end of an exhalation.

[0015] The parameter may be a breathing volume. A segment determined by the method includes either the start or the end of an exhalation. If one segment includes the start of an exhalation, the next segment will include the end of that exhalation, the start and end defining an individual breath. The parameter should provide a reasonably accurate representation of the breathing pattern, but it need not be accurate in terms of actual volume or displacement. The method is robust in the presence of errors in the average and to the method of averaging.

[0016] The time average may comprise a moving average, such as an exponential moving average and/or may be formed using a low-pass filter, such as a Gaussian filter. A breath may extend from one of the extremes to the second subsequent extreme.

[0017] The method of identifying breaths may be used in the above method of analysing a data array by forming a signature over an integer number of breaths, thereby reducing noise in the signature.

[0018] In accordance with a further aspect of the disclosure there is provided a method of monitoring and/or analysing the breathing and/or lung functions of a subject, e.g. to produce a data array for use in a method according to the first aspect of the invention and/or to produce parameter values representing a breath pattern over time for use in a method according to the second aspect of the invention, the method comprising the steps of:

projecting a pattern of radiation onto at least part of a body of a subject;
recording at each of a plurality of instances in time image data representing a three dimensional configuration of at least a portion of the projected pattern at that instance in time; and
processing the image data to produce a data array, e.g. of at least three dimensions and/or representing a shape of at least part of the body of the subject as a function of time, and/or to produce parameter values representing a breath pattern over time.

[0019] The method according to the disclosure may further comprise dividing the data array into two or more

sub-arrays each representing a three dimensional configuration of a respective part of the projected pattern or of the subject. The method may also comprise processing the sub-arrays to approximate a volume of each of the parts of the projected pattern or of the subject over time. Additionally, the method may include calculating a comparative parameter representing the change over time in the relative volume contribution of each of the parts of the projected pattern or of the subject.

[0020] In some embodiments, the comparative parameter comprises a phase angle, which may comprise an overall phase angle calculated from image data across all of the plurality of instances in time or a windowed phase angle calculated from image data across only some of the plurality of instances in time. The comparative parameter may comprise a breath phase angle calculated from image data across the instances in time that correspond to one breath. In some embodiments, the windowed phase angle comprises a predetermined number of breaths. The method may further comprise categorising the breathing or lung function as synchronous or asynchronous or paradoxical.

[0021] The comparative parameter may comprise a principal angle and/or spread, which may be calculated using principal component analysis, for example by calculating a covariance matrix, e.g. and diagonalising the covariance matrix.

[0022] The method may further comprise calculating one or more of respiratory rate, for example the number of breaths per minute, and/or tidal volume, e.g. the volume inspired and expired with each breath, and/or minute ventilation, e.g. tidal volume multiplied by respiratory rate, and/or peak inspiratory flow, e.g. reflecting respiratory drive, and/or fractional inspiratory time, and/or an index of rapid shallow breathing and/or peak and/or mean inspiratory and/or expiratory flow measures and/or the percent contribution of the chest and/or abdomen to the tidal volume.

[0023] The method may further comprise analysing or determining or quantifying the regularity and/or unpredictability and/or randomness of the measured data or one or more of the calculated parameters. The method may comprise calculating a value indicative of disorder (or, in other words, complexity or randomness), preferably an entropy value, e.g. approximate entropy or sample entropy, for one or more values or parameters, for example any of the values or parameters described or listed above, e.g. one or more values of the image data or data arrays or the volume of one or each of the parts or an aggregate volume of the two parts or the comparative parameter.

[0024] It has been observed by the applicants that approximate entropy and/or sample entropy, or an equivalent measure of disorder, can provide insight into the state of the subject, for example wherein a predetermined entropy value is indicative of a healthy and/or diseased and/or athletic state of a subject. One specific example of this observation is that entropy of windowed and/or

per-breath phase angle appears to decrease in patients with Chronic Obstructive Pulmonary Disease (COPD). For ease of reference, the entropy value or equivalent value may be referred to, for example, as an irregularity value or a coefficient of variation. The disclosure also provides an apparatus for carrying out the method, computer software to perform the method and a data carrier storing the software, which software and/or data carrier may be comprised in the apparatus. The apparatus may correspond to the device described in WO2010066824 or any other suitable apparatus. The skilled person would also appreciate that some of the steps or aspects of the methods described above may be carried out using data acquired using Respiratory Inductance Plethysmography.

Brief Description of the Drawings

[0025] Certain embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a block diagram of a measuring system;
 Figure 2 shows a flow diagram of the method;
 Figure 3 shows six breathing modes of a healthy subject;
 Figure 4 shows six breathing modes of a subject suffering from COPD;
 Figure 5 shows the time evolution of the modes of Figure 3;
 Figure 6 shows the time evolution of the modes of Figure 4;
 Figure 7 shows a flow diagram of the breath detection method;
 Figure 8 shows a measurement of breathing volume;
 Figure 9 shows an exemplary embodiment of the measurement unit of Figure 1;
 Figure 10 shows five measures of synchronicity between chest and abdomen volumetric contributions to tidal breathing volume;
 Figure 11 shows a first example of principal angle and spread between chest and abdomen volumetric contributions to tidal breathing volume; and
 Figure 12 shows a second example of principal angle and spread between chest and abdomen volumetric contributions to tidal breathing volume.

Detailed Description of the Certain Embodiments

[0026] Figure 1 shows a block diagram of an embodiment of a measuring system for measuring a 4-dimensional data array of the shape of the body of a subject and analysing the data. The measurement system includes a measurement unit 1 for measuring the shape of a body as a function of time. The system may measure movement of a subject using a method as disclosed in patent application WO 2010/066824 or any other method

providing similar measurement data. The measurement data of the measurement unit may be stored in a measurement storage 2 for later use or use at a different location.

[0027] The measurement system further includes an apparatus 3 for analysing the measurement data. The analysis is carried out by a processing unit 4 of the apparatus; the analysis may be carried out independently from the measurement. The processing unit may receive the measurement data from the measurement storage 2, for example when the measurement unit and the apparatus are at different locations or measurement data is analysed at a time after the measurements were taken. It may also receive the measurement data directly from the measurement unit 1, for example when the measurement unit is located near the apparatus or the measurement unit and apparatus are integrated in a single device. The processing unit can store data in and retrieve data from a data storage 5, such as disc drives or Solid State Drives (SSDs). The data storage may include a signature database 6, which can be used for classifying measured subjects. Results of the analysis can be output to and shown on a display unit 7.

[0028] The processing unit 4 and the data storage 5 may form part of a computing device. Its components may be interconnected using a systems bus. Other components may be a volatile memory such as a random access memory; an input/output interface; input devices such as a keyboard; one or more interfaces for communicating with e.g. the measurement unit 1 and the measurement storage 2.

[0029] The measurement unit 1 measures movement of a part of the body, in particular of the chest wall and / or the abdomen. Normally, the anterior part of the body is measured; alternatively or in addition a posterior or more or less lateral part may also be measured. When measuring the breathing of a subject, such as a human or an animal, the movement of the chest wall is usually measured. Instead or in addition the movement of the abdomen may be measured. The method produces reliable results both for tidal breathing and for forced manoeuvres; the classification of the subject is consistent between measurements on tidal breathing and forced manoeuvres, where the latter might contain movement artefacts. The present method allows classification of a subject on respiratory diseases using tidal-only breathing data. Prior art methods, using for example flow-volume loops, require the subject to perform a forced breathing manoeuvre. The method is therefore suitable for determining the breathing pattern of healthy and sick subjects, even of unconscious subjects.

[0030] The shape of the body is measured using a measuring grid having a 2-dimensional pattern of grid points. Such a grid can be realized by illuminating the body with a chessboard pattern as disclosed in the above mentioned patent application WO 2010/066824. The 3-dimensional position of the body is measured at each grid point as a function of time. The grid has n_1 by n_2 grid

points; $n_1 \times n_2$ may be 10×15 , resulting in $n_g=150$ grid points. When images of the body are captured with a video camera operating at 30 frames per second with a measurement time of 4 seconds, the position of the body for each grid point will be measured at $n_t = 30 \times 4 = 120$ points in time. The present analysis method, providing a decomposition of the body surface movement into modes, requires only a relatively short period of measurements, usually only a few seconds in duration, without the need for the subject to perform a forced manoeuvre. An analysis of breathing modes can be made on just a small section, e.g. 6-10 seconds, of tidal breathing. As a consequence, the method can be applied even to subjects that are not capable of forced manoeuvres and allows a quicker measurement of patients.

[0031] The data of a measurement of a subject output by the measurement unit 1 includes n_t frames of $n_1 \times n_2$ 3-dimensional positions. If a position is represented by three spatial dimensions (x,y,z), the data output is $n_t \times n_1 \times n_2 \times 3$ numbers. The data can be organized in a 4-dimensional array A, two dimensions being for the grid, one dimension for the position and one dimension for the time. Alternatively, the data can be organized in a 3-dimensional array, one dimension being for the grid, one dimension for the position and one dimension for the time. The grid can be represented by a 1-dimensional array having elements 1 to n_g , where each element relates to one grid point of the grid. The data may be input to the measurement storage 2 or to the processing unit 4.

[0032] It should be noted that the word 'dimension' is used in two different contexts. When used in the context of an array, it refers to the array dimension. When used in the context of position, it refers to the spatial dimension.

[0033] The processing unit 4 analyses the data array A by carrying out the three steps of mapping, decomposition and signature formation, shown as steps 10, 11 and 12, respectively in the flow diagram of Figure 2.

[0034] The first step is mapping the data array A onto a 2-dimensional array $M(i,j)$. The mapping may be carried out such that each row of M corresponds to a grid point. When the different rows of the 2-dimensional array correspond to different grid points, the principal modes that can be derived from the decomposition of M correspond to properties of the chest wall movement as a function of the grid point. Such spatially separated information is useful in diagnosis. If the grid includes $n_g = n_1 \times n_2$ grid points, the 2-dimensional array will have n_g rows relating to the grid points. The index i of the array $M(i,j)$ relates to the grid points and numbers from 1 to n_g .

[0035] The data array may be mapped onto M such that each row includes a plurality of positions at the points of time where the measurements were taken. In this embodiment, the data array includes positions for each grid point at n_t moments in time and each position represents a point (x,y,z) in 3-dimensional space. These n_t positions are mapped onto the rows of the 2-dimensional array M such that M will have $3n_t$ columns. The index j of $M(i,j)$ runs from 1 to $3n_t$. If $n_1=10$, $n_2=15$ and $n_t=120$, the matrix

M is 150×360 . When the rows correspond to the grid points and the columns to the position of these grid points on the body as a function of time, the principal modes will be surface modes of the measured subject, representing breathing patterns. Many lung diseases have characteristic surface modes, making the modes particularly useful in diagnosis.

[0036] The data array may be mapped onto M in other ways. For example, it may be mapped onto an array M of $n_t \times (3 \times n_1 \times n_2)$. Each of the n_t rows corresponds to a particular point of time and gives the $n_1 \times n_2$ positions of the grid at that moment in time. The resulting modes will represent time signatures.

[0037] The second step in the analysis is the decomposition of the array M into principal modes by the processing unit 4, shown as step 11 in Figure 2. Several methods for decomposition may be used, of which Singular Value Decomposition (SVD) is a fast method that works efficiently on very large matrices; see e.g. 'A multilinear singular value decomposition' by Lathauwer et al. in Siam J. Matrix Anal. Appl., Vol. 21, No 4, pp. 1253-1278. Matrix M of n_g rows by $3n_t$ columns is decomposed so that $M = USV^T$. U is a unitary matrix of $n_g \times n_g$, S is a diagonal matrix of $n_g \times 3n_t$, and V^T a unitary matrix of $3n_t \times 3n_t$. V^T is the conjugate transpose of V. The columns of U are the eigenvectors of MM^T ; they are orthogonal and normalised. The diagonal values of S are the square roots of the non-negative eigenvalues of both $M^T M$ as well as MM^T . The columns of V are eigenvectors of $M^T M$. The elements of U and S are independent of time. The time dependence of the measured motion is included in the matrix V^T .

[0038] The third step of the analysis carried out by the processing unit 4 is the formation of a signature of the subject, shown as step 12 in Figure 2. The signature may be stored in the data storage 5 of the apparatus 3. The columns of the matrix U represent the principal modes of the breathing pattern of the measured body. When the motion of the chest wall of a subject is measured, the principal modes are the breathing patterns of the subject. The measured motion is best characterized by low-numbered columns of U, i.e. by the modes that give the largest contribution to the measured variation of the surface during breathing.

[0039] The first columns of U may represent a static orientation of the body, which may not be relevant for classification of a subject. For example, the first two or three columns represent the main planar orientation of the subject. The columns representing static orientation may be omitted from the signature. The number of columns of U selected for the signature can be determined by choosing those columns of U that correspond to diagonal elements of S which are above a predetermined value, possibly excluding columns relating to static orientation. In the analysis of breathing patterns 2, 3, 4, 5 or 6 modes are normally sufficient for classification. Higher order modes can usually be ignored, because they provide a very small contribution to the breathing pattern

and may represent only noise.

[0040] In addition to using columns of U for the signature, parts of the matrix S and / or V may be used. For example, the weight in the matrix S may be included in the signature, which could be done by weighting the columns of U with the corresponding eigenvalues of S . The method of combining the information in U , S and / or V may be dependent on the type of classification used.

[0041] Since U is time independent, it is useful for forming the signature. Moreover, measurement data taken at different times or taken from different subjects do not have to be normalised to a specific, predetermined breathing rate before deriving the eigen modes, as is necessary in some prior art analysis methods. The important surface movement patterns of the chest are contained in the first few principal modes of U . Therefore, more information is obtained about the subject than from a volume measurement using a prior art method, as the latter does not distinguish between modes. In determining the volume, all localised surface movement information is discarded. It is this information that is used in a classification. The modes are the most important parts of the breathing pattern and are therefore included in the signature.

[0042] Figure 3 shows a graphical presentation of the first six breathing modes of a healthy subject during tidal breathing and the first part of a forced expiration. The order of the modes in the Figure is from left to right and top to bottom. Grid rows go from abdomen to chest with ascending row number. Grid columns go from the left side of the chest wall to the right side, with ascending column number. The presentation can be displayed on the display unit 7. The visualisation is obtained by taking a column of U and unwrapping it by distributing its n_g elements over an $n_1 \times n_2$ array. The result is shown in the Figure as a surface on an $n_1 \times n_2$ grid. The example shown in Figure 3 has a grid of 15×10 grid points. The vertical axis shows the dimensionless, normalised position of the mode. Figure 4 shows the first six breathing modes from the matrix U of a Chronic Obstructive Pulmonary Disease (COPD) patient during tidal breathing and the first part of a forced expiration. The first two modes of both Figures 3 and 4 represent static orientation of the body.

[0043] The importance of each breathing mode is represented by the corresponding eigenvalue of the matrix S . The six eigenvalues corresponding to the six modes of the healthy subject in Figure 3 are: 134.78; 93.36; 16.57; 5.30; 0.73; 0.29. The small eigenvalues for the last two modes indicate that these modes are less important because they contribute only a very small amount to the measured chest motion; these modes may be at least partly noise. The six eigenvalues for the six modes of the COPD patient in Figure 4 are: 160.19; 109.11; 18.56; 4.71; 1.42; 0.57.

[0044] The columns of V give a normalised time series of how the modes move in the x , y and z direction. Figures 5 and 6 show plots of the first six columns of V corre-

sponding to the six breathing modes shown in Figures 3 and 4, respectively. The horizontal axis of each of the six plots represents the frame number from 1 to 1500, subdivided into three parts for the coordinates x , y and z .

5 The vertical axis of the plots represents the number by which the coordinate must be multiplied to obtain the time evolution of the mode. The first 500 frames represent the value with which the x coordinates of all grid points of a corresponding mode must be multiplied. The next 500 frames represent the values for the y coordinate and the last 500 frames for the z coordinate.

[0045] The time evolution of each of the modes or a combination of modes can be visualised on the display unit 7 by combining the one or more mode shapes of U , the one or more corresponding magnitudes of S and the one or more corresponding time dependences of V . The combination can be made by calculating $M = USV^T$ for the relevant modes.

[0046] Instead of or in addition to using the modes of U in the signature, features extracted from U may be used in the signature. One such feature is the 2-dimensional frequencies of each mode, which may be formed via a 2D Fourier transformation of a mode. The 2-dimensional frequencies of certain modes are characteristic for specific disease states, such as disorders of the lungs, and are therefore suitable for classification.

[0047] The features extracted from the decomposed matrix A and combined in a signature of a measured subject may be used to classify the subject. The classification is shown as a step 13 in Figure 2, which can be included or can be omitted from the method. In the classification step the signature of the subject is compared to previously generated signatures stored in the database 6. Each of these previously acquired signatures is representative of a particular disease state, including, but not limited to, COPD, asthma, pneumonia, or a healthy state. The result of the classification is an association of the breathing signature of the subject with a particular disease state or the healthy state or the closeness to such a state.

[0048] The database 6 stores the signatures of a large number of subjects, each labelled with its disease or healthy state. The disease state may include the disease progression. The measurement data arrays of the subjects are analysed, usually offline, and the signatures formed.

[0049] A clustering algorithm forms clusters of signatures for each of the disease labels and stores them in the database. A simple form of classification consists of reducing each of the cluster members to an average value and an approximate radius, for example a standard deviation. The result is a representative signature for each disease class and an expected spread of the members of this class from the representative signature. In another form of classification the labelled cluster members or their extracted feature vectors are kept in the database for use in a subsequent classification via a k-nearest neighbours method. The database can be up-

dated and refined when additional labelled signatures become available. The larger the number of labelled signatures, the more accurate is the classification. Good results are obtained when each cluster has at least 40 signatures. The classification is improved if the signatures in the database have been obtained under similar conditions, such as lighting environment, breathing manoeuvre, grid coverage, grid size and patient position. On the other hand, the population of signatures should capture as wide a range of conditions in which the system is to be expected to perform.

[0050] The actual classification of a subject is carried out in the processing unit 4. The distance of the signature to the representative signature of each cluster is determined, known as classification or k-mean search. Alternatively, the label of the signature can be assigned as the most common label among its k nearest neighbours, where 'nearest' implies 'smallest distance'. The output of the classification step can be that the subject is in the disease state corresponding to that of the representative signature his signature is nearest to, or, for each disease label, a probability that subject is in that particular disease state.

[0051] The method as shown in Figure 2 includes mapping, decomposition and signature formation, together forming the analysis of the data array. The results of the analysis may be stored and used later for classification by a physician or for other purposes. The analysis may also be followed by a classification using a signature database, forming a four-step method shown by elements 10-13. In a special embodiment the analysis is preceded directly by a step in which a subject is measured and the data array is filled; the analysis may again be followed by a classification.

[0052] Rows and column of a matrix can be interchanged in the composition of the matrices U, S and V. Although the above described embodiments refer to a rectangular coordinate system (x,y,z), any other coordinate system may be used, e.g. a cylindrical coordinate system having its axis along the longitudinal axis of the body.

[0053] The signature formed from the measured data becomes more accurate if the data on which the signature is based relates to a whole number of breaths. It could be regarded as 'normalising' the data input to the signature decomposition. This can be achieved by analysing the data and manually selecting the desired integer number of breaths. The following method allows to automate the selection of breaths, making the analysis less time consuming.

[0054] Figure 7 shows a flow diagram of a breath detection method for identifying individual breaths or a series of breaths. Measured parameter values representing a breathing pattern over time are input to the method. The parameter can e.g. be a measured breathing volume or a chest wall motion over time. The breathing volume may be obtained from a spirometer. If the method of Figure 7 is used together with the method of Figure 2, the

breathing volume or chest wall movement over time may be derived from the above matrix M or from USV^T . In the latter case, noise in the method can be reduced by using only the most significant modes of U in the calculation of the motion. The parameter can also be an average of the z-position over the measurement grid.

[0055] Figure 8 shows a measurement 30 of breathing volume V over time t of a subject; the measurement includes tidal breathing and one forced manoeuvre. The vertical axis shows the volume in litres, the horizontal axis shows time in frame numbers, taken at 30 frames per second. A measurement of chest wall motion would have resulted in a similar plot. The measured parameter values are used as input for the method of Figure 7.

[0056] In the first step 20 in the method of Figure 7 an average value of the parameter values is formed. The average may be an exponential moving average. When the parameter values V are given at discrete points of time i, the average A can be determined as $A(i) = (1 - \alpha)A(i-1) + \alpha V(i)$. Alpha can have any value in the range [0,1]. Good results for a wide range of input are obtained using a value of alpha equal to 0.008. The moving average is shown in Figure 8 as line 31.

[0057] The average may be determined by other algorithms, e.g. using a low-pass filter having a Gaussian response function. In a specific embodiment the filter can have a size of three times the sample rate and a sigma equal to the sample rate, where the sample rate is the number of frames per second of the measurement unit.

[0058] In the second step 21 of the method the parameter is divided in time segments. Each segment lies between subsequent intersections of the parameter and the average. Figure 8 shows three consecutive intersections 32-34, defining two successive segments 35 and 36. The method is not sensitive to the way in which the intersections are determined. An intersection may be defined as the point in time where $(V(i) - A(i))$ changes sign.

[0059] In the third step 22 of the method an extreme value of the parameter within each segment is determined. An extreme value may be determined by comparing a value of the parameter with its two neighbouring values. The method will find the maximum 37 as extreme values for segment 35 and the minimum 38 for segment 36 as shown in Figure 8. If the extreme value of a segment is a maximum, it corresponds to the end of an inhalation and the start of an exhalation. If the extreme value is a minimum, it corresponds to the end of an exhalation and the start of an inhalation. The method can be made more robust by checking whether the extreme value V(i) is larger than the average A(i) for a maximum and whether the extreme value is smaller than the average for a minimum. Alternatively, the signed area of $(V(i) - A(i))$ over the segment can be determined; an extreme value in a segment having a positive area is a maximum, corresponding to the start of an exhalation and an extreme value in a segment having a negative area is a minimum, corresponding to the start of an inhalation.

[0060] Since each segment has only one extreme val-

ue of the parameter, it must include either the start of an exhalation (being the end of an inhalation) or the end of an exhalation (being the start of an inhalation). Hence, if a segment includes the start of an exhalation, the next segment will include the end of the exhalation. An individual breath, including an inhalation and an exhalation, corresponds to the period between two successive maximum values or between two successive minimum values. A selection of measurement data extending over a certain number p of whole breaths can be made by starting the selection at the point of time of an extreme value of the parameter and stopping the selection at the $2p^{\text{th}}$ extreme value of the parameter following the starting point.

[0061] The method can be carried out in an apparatus similar to apparatus 3 in Figure 1 including a processing unit 4 and a data storage 5, forming a computer device. In a real-time implementation the apparatus is connected to the output of a measurement unit and measured values are fed into the apparatus. The data may be input in frames at regular intervals, e.g. 30 frames per second. The measured values are pre-processed if necessary to obtain the parameter values required for the method, e.g. a breathing volume or a chest wall motion. In an embodiment in which the above moving average method is used, the moving average is updated at each frame being input into the apparatus, the check for start of a new segment is carried out, and the moving extreme value is updated.

[0062] The method of Figure 7 can be used to determine the start of a signature decomposition by monitoring the breathing of a subject under test. The breath detection method performs an on-line scan of the breaths until it has detected a sufficient number of good quality contiguous breaths, upon which the apparatus 4 is signalled to commence signature decomposition without additional operator intervention.

[0063] In on off-line implementation of the method the apparatus is connected to a measurement storage, from which the measured values are retrieved. The processing can be carried out similar to the on-line implementation.

[0064] The method of identifying breaths can be used for ventilator settings in respiratory treatment, e.g. for determining volume drift over time in patients with an obstructive disease. It can also be used in the context of ventilator triggering, where the detection of an inhalation (i.e. the end of an exhalation) triggers the administration of oxygen.

[0065] The method can also be used for analysing the shape of individual breaths, as is common in the veterinary field. The method is used to segment the measurements in whole breaths.

[0066] The method is suitable as a step in forming a signature in the method of Figure 2. The method may be applied to the data array output by the measurement unit 1 in Figure 1, e.g. by using the average z -position over the measurement grid as parameter. The steps of mapping, decomposition and signature formation can then

be applied to a part of the data array corresponding to an integer number of breaths.

[0067] Each of the methods of Figure 2 and 7 can be carried out by a computing device in which software is stored in a memory and is coded to execute the method when running in the processing unit. The software may be stored on a data carrier.

[0068] Referring now to Figure 9, there is shown an exemplary embodiment of the measurement unit 1 of Figure 1. The measurement unit 1 includes first and second cameras 100, 101 and a projector 102 attached to a mounting frame 103. The projector 102 projects a pattern of radiation onto the chest and abdominal area of a subject 104 laying prone on a surface 105. The cameras 100, 101 are mounted either side of the projector and are angled toward the subject 104 at an angle of between about 10 degrees to about 40 degrees, depending on the spacing between the frame 103 and the subject 104.

[0069] In use, the measurement unit 1 acquires across a predetermined time period from the cameras 100, 101 at each of a plurality of instances in time image data representing a three dimensional configuration of the projected pattern at that instance in time. The image data is then processed to produce an array of breathing data representative of the shape of the subject 104 as a function of time. This data may then be used in accordance with the methods described above.

[0070] The data array may also be divided into two or more sub-arrays each representing a three dimensional configuration of a respective part of the subject 104, for example the subject's chest and abdomen or the left and right sides of the subject's trunk region. The sub-arrays may be processed to approximate a volume of each of the parts of the subject over time and may be displayed through the display unit 7, for example to assist a clinician with diagnosing a condition in the subject 104.

[0071] The sub-arrays or volumes may also be processed to calculate one or more comparative parameters representing the change over time in the relative volume contribution of each of the parts of the subject 104.

[0072] Figure 10 illustrates one such comparative parameter, namely the phase angle ϕ between chest or rib cage measurements RC and abdomen measurements AB, where:

$$\phi = \frac{180}{\pi} \times \text{asin}\left(\frac{m}{s}\right)$$

[0073] It will be appreciated by those skilled in the art that the phase angle ϕ may be calculated across the entire time period (i.e. an overall phase) or across a subset of the entire time period (i.e. a windowed phase). The subset may correspond to a single breath (i.e. a per-breath phase) or a predetermined number of breaths.

[0074] Figures 11 and 12 illustrate examples of two further comparative parameters, namely the principal angle θ_1 , θ_2 and spread S_1 , S_2 between chest or rib cage

measurements RC and abdomen measurements AB.

[0075] These parameters are calculated using principal component analysis by calculating a 2x2 covariance matrix, where $M = \text{Cov}(AB - \text{mean}(AB), RC - \text{mean}(RC))$ and diagonalising the covariance matrix, where:

$$M = [p_1, p_2] \begin{bmatrix} \sigma_1^2 & 0 \\ 0 & \sigma_2^2 \end{bmatrix} [p_1, p_2]^T.$$

[0076] The principal angle θ_1, θ_2 is the angle (in degrees) between the x=y line and p_1 , while the spread is the ratio:

$$\text{spread} = \begin{cases} \frac{\sigma_2}{\sigma_1}, p_{1,x}p_{1,y} \geq 0 \\ \frac{\sigma_2}{\sigma_1}, p_{1,x}p_{1,y} < 0 \end{cases}$$

[0077] The angle change is also useful to track, which is done by taking three successive points p_0, p_1, p_2 , treating these two-dimensional vectors as three-dimensional by making the z-coordinate 0 and performing the three-dimensional cross product:

$$a = (p_2 - p_1) \times (p_1 - p_0)$$

and making the product of its sign and magnitude the angle change.

[0078] Further parameters that may be useful to calculate and display on the display unit 7 include respiratory rate, tidal volume, minute ventilation, peak inspiratory flow, fractional inspiratory time, peak and/or mean inspiratory and/or expiratory flow measures and/or the percent contribution of the chest and/or abdomen to the tidal volume.

[0079] One particularly useful analysis to carry out is to determine or quantify the entropy of one or more of the measured values or parameters described above. Specifically, the approximate entropy or sample entropy, or an equivalent measure of disorder, of some of the aforementioned parameters have been found to be useful in determining a comparative state of wellness or illness.

[0080] In particular, it has been found that the entropy associated with breathing data derived from a healthy subject is higher, in many cases considerably higher, than breathing data derived from an ill patient.

[0081] Entropy in the form of sample entropy (SampEn), approximate entropy (ApEn) or fuzzy entropy (FuzzyEn) can be calculated as described, for example, in section 2 of CHEN, W et al. Measuring complexity using FuzzyEn, ApEn, and SampEn, Medical Engineering & Physics, 31(1), 61-68, 2009.

[0082] The above embodiments are to be understood

as illustrative examples. Further embodiments are envisaged. It is to be understood that any feature described in relation to any one embodiment may be used alone, or in combination with other features described, and may also be used in combination with one or more features of any other of the embodiments, or any combination of any other of the embodiments. Furthermore, equivalents and modifications not described above may also be employed without departing from the scope of the accompanying claims.

Claims

1. A method of identifying breaths in parameter values (30) representing a breathing pattern over time, including the steps of:

forming (20) a time average (31) of the parameter values;
dividing (21) the parameter into segments (35, 36), each segment lying between subsequent intersections (32, 33, 34) of the parameter and the average;
determining (22) an extreme value (37, 38) of the parameter within each segment, the extreme value being a start of an exhalation or an end of an exhalation.

2. A method of monitoring and/or analysing the breathing and/or lung functions of a subject (104), the method comprising the steps of:

projecting a pattern of radiation onto at least part of a body of a subject;
recording at each of a plurality of instances in time image data representing a three dimensional configuration of at least a portion of the projected pattern at that instance in time;
processing the image data to produce a data array representing a shape of at least part of the body of the subject as a function of time and/or to produce parameter values representing a breath pattern over time; and
using a method according to claim 1 to identify breaths in the parameter values.

3. A method according to claim 1 or 2, in which the time average is a moving average, such as an exponential moving average.
4. A method according to claim 1 or 2, in which the time average is formed using a low-pass filter, such as a Gaussian filter.
5. A method according to any preceding claim, in which a breath extends from one of the extremes to the second subsequent extreme.

6. A method of analysing a data array of at least three dimensions representing a shape of at least part of a body of a subject (104) as a function of time, the data array relating to a 2-dimensional grid having grid points, a position in space of the shape at each grid point and points of time, the method including the steps of:

mapping (10) the data array onto a 2-dimensional array,
decomposing (11) the 2-dimensional array,
forming (12) a signature of the subject from the decomposed 2-dimensional array representing a motion pattern of the shape,

wherein the signature is formed based on a part of the data array corresponding to an integer number of breaths, the part of the data array being determined using a method according to claim 1.

7. A method according to claim 6, including the step of comparing the signature of the subject (104) with signatures associated with disease states.

8. A method according to claim 2, further comprising:

dividing the data array into two or more sub-arrays each representing a three dimensional configuration of a respective part of the projected pattern or of the subject (104); and
processing the sub-arrays to approximate a volume (RC, AB) of each of the parts of the projected pattern or of the subject over time.

9. A method according to claim 8 further comprising calculating a comparative parameter (ϕ) representing the change over time in the relative volume contribution of each of the parts of the projected pattern or of the subject (104).

10. A method according to claim 9, wherein the comparative parameter comprises a phase angle (ϕ) or a principal angle (θ) and/or spread (S).

11. A method according to any one of claims 2 and 8 to 10 further comprising:

calculating a value indicative of disorder for one or more values or parameters of or calculated from the data array.

12. A method according to claim 11, where the value indicative of disorder is an entropy value.

13. A measurement system comprising:

a measurement unit (1) for measuring a shape of at least part of a body of a subject (104) as a

function of time; and
a processing unit (4) for analysing measurement data of the measurement unit;

wherein the measurement system is configured to perform a method according to any preceding claim

14. A measurement system according to claim 13 when dependent upon claim 2, wherein the measurement unit (1) comprises first and second cameras (100, 101) and a projector (102) attached to a mounting frame (103), wherein the projector is configured to project the pattern of radiation and the first and second cameras are configured to obtain the image data.

Patentansprüche

1. Verfahren zum Identifizieren von Atemzügen in Parameterwerten (30), die ein Atmungsmuster über die Zeit darstellen, einschließlich der folgenden Schritte:

Bilden (20) einer Durchschnittszeit (31) der Parameterwerte; Unterteilen (21) des Parameters in Segmente (35, 36), wobei jedes Segment zwischen nachfolgenden Schnittpunkten (32, 33, 34) des Parameters und des Durchschnitts liegt; Bestimmen (22) eines Extremwerts (37, 38) des Parameters in jedem Segment, wobei der Extremwert ein Beginn einer Ausatmung oder ein Ende einer Ausatmung ist.

2. Verfahren zum Überwachen und/oder Analysieren der Atmung und/oder der Lungenfunktionen eines Subjekts (104), wobei das Verfahren die folgenden Schritte umfasst:

Projizieren eines Strahlungsmusters auf mindestens einen Teil eines Körpers eines Subjekts; Aufzeichnen von Bilddaten an jedem einer Vielzahl von Zeitpunkten, die eine dreidimensionale Konfiguration von mindestens einem Abschnitt des projizierten Musters an diesem Zeitpunkt darstellt; Verarbeiten der Bilddaten, um ein Datenfeld zu erzeugen, das eine Form von mindestens einem Teil des Körpers des Subjekts abhängig von der Zeit darstellt, und/oder um Parameterwerte zu erzeugen, die ein Atmungsmuster über die Zeit darstellen; und unter Verwendung eines Verfahrens gemäß Anspruch 1, um Atemzüge in den Parameterwerten zu identifizieren.

3. Verfahren nach Anspruch 1 oder 2, wobei die Durchschnittszeit ein gleitender Durchschnitt ist, wie z. B. ein exponentiell gleitender Durchschnitt.

4. Verfahren nach Anspruch 1 oder 2, wobei die Durchschnitszeit unter Verwendung eines Tiefpassfilters gebildet wird, wie z. B. ein Gaußscher Filter.
5. Verfahren nach einem vorherigen Anspruch, wobei sich ein Atemzug von einem der Extreme zu dem zweiten anschließenden Extrem erstreckt.
6. Verfahren zum Analysieren eines Datenfelds mit mindestens drei Dimensionen, das eine Form von mindestens einem Teil eines Körpers von einem Subjekt (104) abhängig von der Zeit darstellt, wobei sich das Datenfeld auf ein zweidimensionales Raster mit Rasterpunkten, eine Position im Raum der Form an jedem Rasterpunkt und an den Zeitpunkten bezieht, wobei das Verfahren die folgenden Schritte enthält:
 - Zuordnen (10) des Datenfelds auf ein zweidimensionales Feld, Zerlegen (11) des zweidimensionalen Felds,
 - Bilden (12) einer Signatur des Subjekts aus dem zerlegten zweidimensionalen Feld, die ein Bewegungsmuster der Form darstellt, wobei die Signatur beruhend auf einem Teil des Datenfelds entsprechend einer ganzzahligen Anzahl von Atemzügen gebildet wird, wobei der Teil des Datenfelds unter Verwendung eines Verfahrens gemäß Anspruch 1 bestimmt wird.
7. Verfahren nach Anspruch 6, enthaltend den Schritt eines Vergleichens der Signatur des Subjekts (104) mit Signaturen, die mit Krankheitszuständen assoziiert sind.
8. Verfahren nach Anspruch 2, ferner umfassend:
 - Unterteilen des Datenfelds in zwei oder mehr Unterfelder, das jeweils eine dreidimensionale Konfiguration eines jeweiligen Teils des projizierten Musters oder des Subjekts (104) darstellt; und
 - Verarbeiten der Unterfelder auf ungefähr ein Volumen (RC, AB) von jedem der Teile des projizierten Musters oder des Subjekts über die Zeit.
9. Verfahren nach Anspruch 8, ferner umfassend ein Berechnen eines Vergleichsparameters (Φ), der die Änderung über die Zeit im relativen Volumenbeitrag von jedem der Teile des projizierten Musters oder des Subjekts (104) darstellt.
10. Verfahren nach Anspruch 9, wobei der Vergleichsparameter einen Phasenwinkel (Φ) oder einen Hauptwinkel (θ) und/oder eine Streuung (S) umfasst.
11. Verfahren nach einem der Ansprüche 2 und 8 bis

10, ferner umfassend:

Berechnen eines Werts zur Angabe einer Störung für einen oder mehrere Werte oder Parameter des Datenfelds oder berechnet aus dem Datenfeld.

12. Verfahren nach Anspruch 11, wo der Wert zur Angabe einer Störung ein Entropie-Wert ist.

13. Messsystem, umfassend:

eine Messeinheit (1) zum Messen einer Form von mindestens einem Teil eines Körpers eines Subjekts (104) abhängig von der Zeit; und eine Verarbeitungseinheit (4) zum Analysieren von Messdaten der Messeinheit; wobei das Messsystem konfiguriert ist, ein Verfahren gemäß einem vorherigen Anspruch auszuführen.

14. Messsystem nach Anspruch 13, wenn abhängig von Anspruch 2, wobei die Messeinheit (1) eine erste und zweite Kamera (100, 101) und einen Projektor (102) umfasst, der an einem Montagerahmen (103) befestigt ist, wobei der Projektor konfiguriert ist, das Strahlungsmuster zu projizieren, und die erste und zweite Kamera konfiguriert sind, um die Bilddaten zu erlangen.

Revendications

1. Méthode d'identification de respirations dans des valeurs de paramètre (30) représentant un modèle de respiration en fonction du temps, y compris les étapes de :

formation (20) d'une moyenne temporelle (31) des valeurs paramétriques ;
division (21) du paramètre en segments (35, 36), chaque segment se plaçant entre des intersections subséquentes (32, 33, 34) du paramètre et de la moyenne ;
détermination (22) d'une valeur extrême (37, 38) du paramètre au sein de chaque segment, la valeur extrême étant le début d'une expiration ou la fin d'une expiration.

2. Méthode de contrôle et/ou d'analyse de la respiration et/ou des fonctions pulmonaires d'un sujet (104), la méthode comprenant les étapes suivantes :

projection d'un modèle de rayonnement sur au moins une partie du corps d'un sujet ;
enregistrement à chacune de la pluralité de cas en données d'images en temps représentant une configuration tridimensionnelle d'au moins

- une partie du modèle projeté à cette instance temporelle ;
traitement des données d'image pour la production d'un ensemble de données représentant une forme d'au moins une partie du corps du sujet en fonction du temps et/ou pour la production de valeurs paramétriques représentant un modèle de respiration en fonction du temps ; et utilisation d'une méthode selon la revendication 1 pour identifier des respirations dans les valeurs paramétriques.
3. Méthode selon la revendication 1 ou 2, dans laquelle la moyenne temporelle est une moyenne mobile, par exemple une moyenne mobile exponentielle.
4. Méthode selon la revendication 1 ou 2, dans laquelle la moyenne temporelle est réalisée à l'aide d'un filtre passe-bas, par exemple un filtre gaussien.
5. Méthode selon une quelconque des revendications précédentes, dans laquelle une respiration s'étend d'un des extrêmes au deuxième extrême suivant.
6. Méthode d'analyse d'un ensemble de données d'au moins trois dimensions représentant une forme d'au moins une partie du corps d'un sujet (104) en fonction du temps, l'ensemble de données se rapportant à une matrice bidimensionnelle présentant des points de grille, une position dans l'espace de la forme à chaque point de grille, et des points dans le temps, la méthode comprenant les étapes suivantes :
- mappage (10) de l'ensemble de données sur un ensemble bidimensionnel,
décomposition (11) de l'ensemble bidimensionnel,
formation (12) d'une signature du sujet à partir de l'ensemble bidimensionnel décomposé représentant un modèle de mouvement de la forme,
la signature étant formée en fonction d'une partie de l'ensemble de données correspondant à un nombre entier de respirations, la partie de l'ensemble de données étant déterminée en appliquant une méthode selon la revendication 1.
7. Méthode selon la revendication 6, comprenant l'étape de comparaison de la signature du sujet (104) avec des signatures associées avec des états pathologiques.
8. Méthode selon la revendication 2, comprenant en outre :
- la division de l'ensemble de données en deux ou plusieurs sous-ensembles, chacun repré-
- sentant une configuration tridimensionnelle d'une partie respective du diagramme projeté ou du sujet (104) ; et
le traitement des sous-ensembles pour approcher un volume (RC, AB) de chacune des parties du diagramme projeté ou du sujet en fonction du temps.
9. Méthode selon la revendication 8, comprenant en outre le calcul d'une grandeur de référence (Φ) représentant le changement en fonction du temps dans la contribution relative du volume de chacune des parties du diagramme projeté ou du sujet (104).
10. Méthode selon la revendication 9, la grandeur de référence comprenant un angle de phase (Φ) ou un angle principal (θ) et/ou une extension (S).
11. Méthode selon une quelconque des revendications 2 et 8 à 10, comprenant en outre :
- le calcul d'une valeur indicatrice d'un désordre pour une ou plusieurs valeurs ou paramètres de l'ensemble de données, ou calculé d'après ce dernier.
12. Méthode selon la revendication 11, la valeur indicatrice d'un désordre est une valeur d'entropie.
13. Système de mesure comprenant :
- une unité de mesure (1) pour mesurer une forme d'au moins une partie d'un corps d'un sujet (104) en fonction du temps ; et
une unité de traitement (4) pour analyser des données de mesure de l'unité de mesure ;
le système de mesure étant configuré pour exécuter une méthode selon une quelconque des revendications précédentes.
14. Système de mesure selon la revendication 13, lorsqu'il est tributaire de la revendication 2, l'unité de mesure (1) comprenant des première et deuxième caméras (100, 101) et un projecteur (102) fixé sur un bâti (103), le projecteur étant configuré pour projeter le modèle de rayonnement, et les première et deuxième caméras étant configurées pour obtenir les données de l'image.

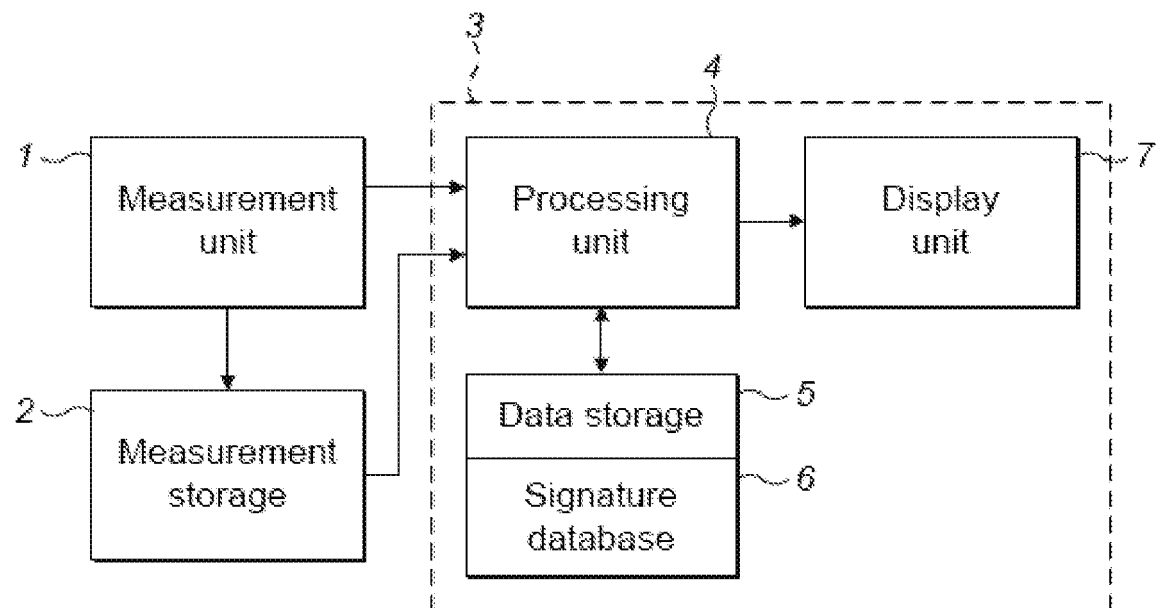


FIG. 1

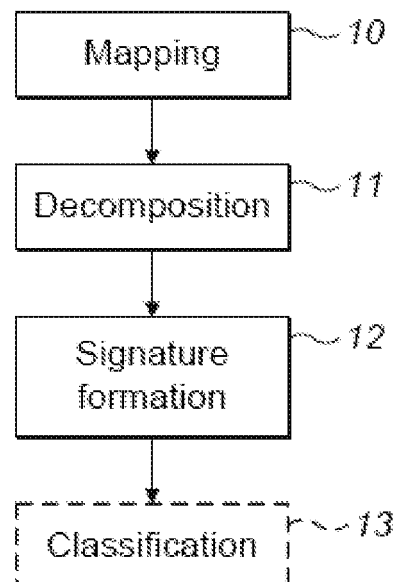


FIG. 2

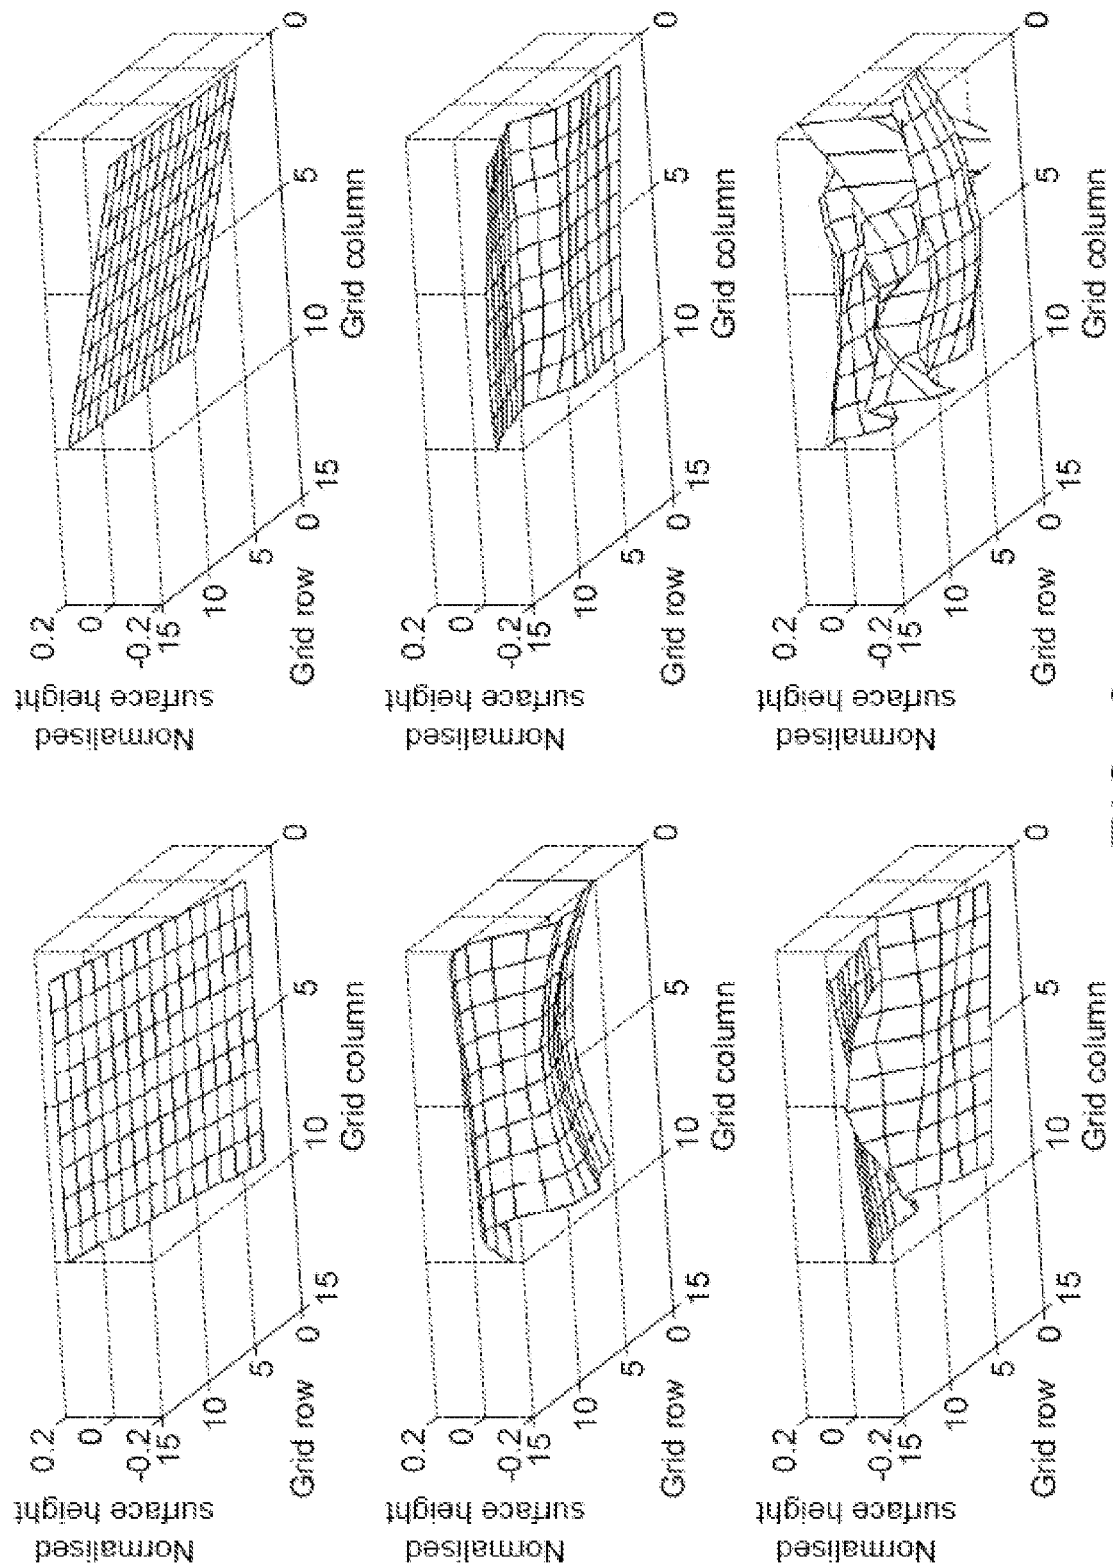


FIG. 3

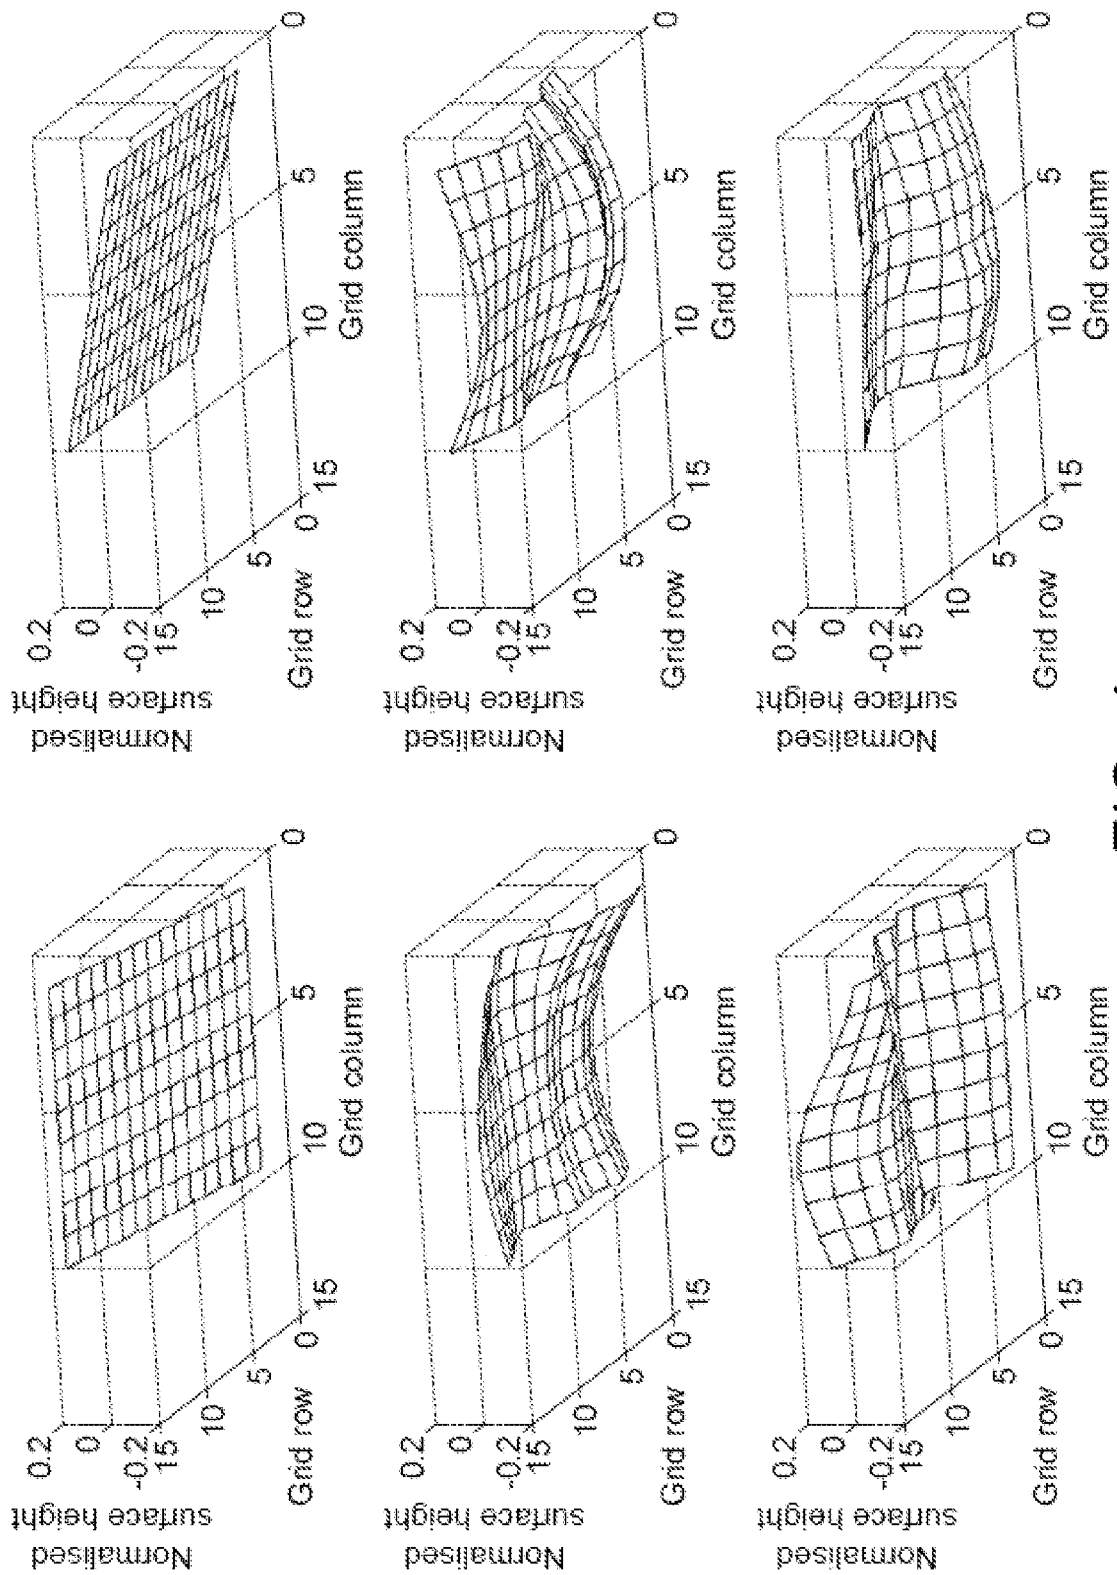


FIG. 4

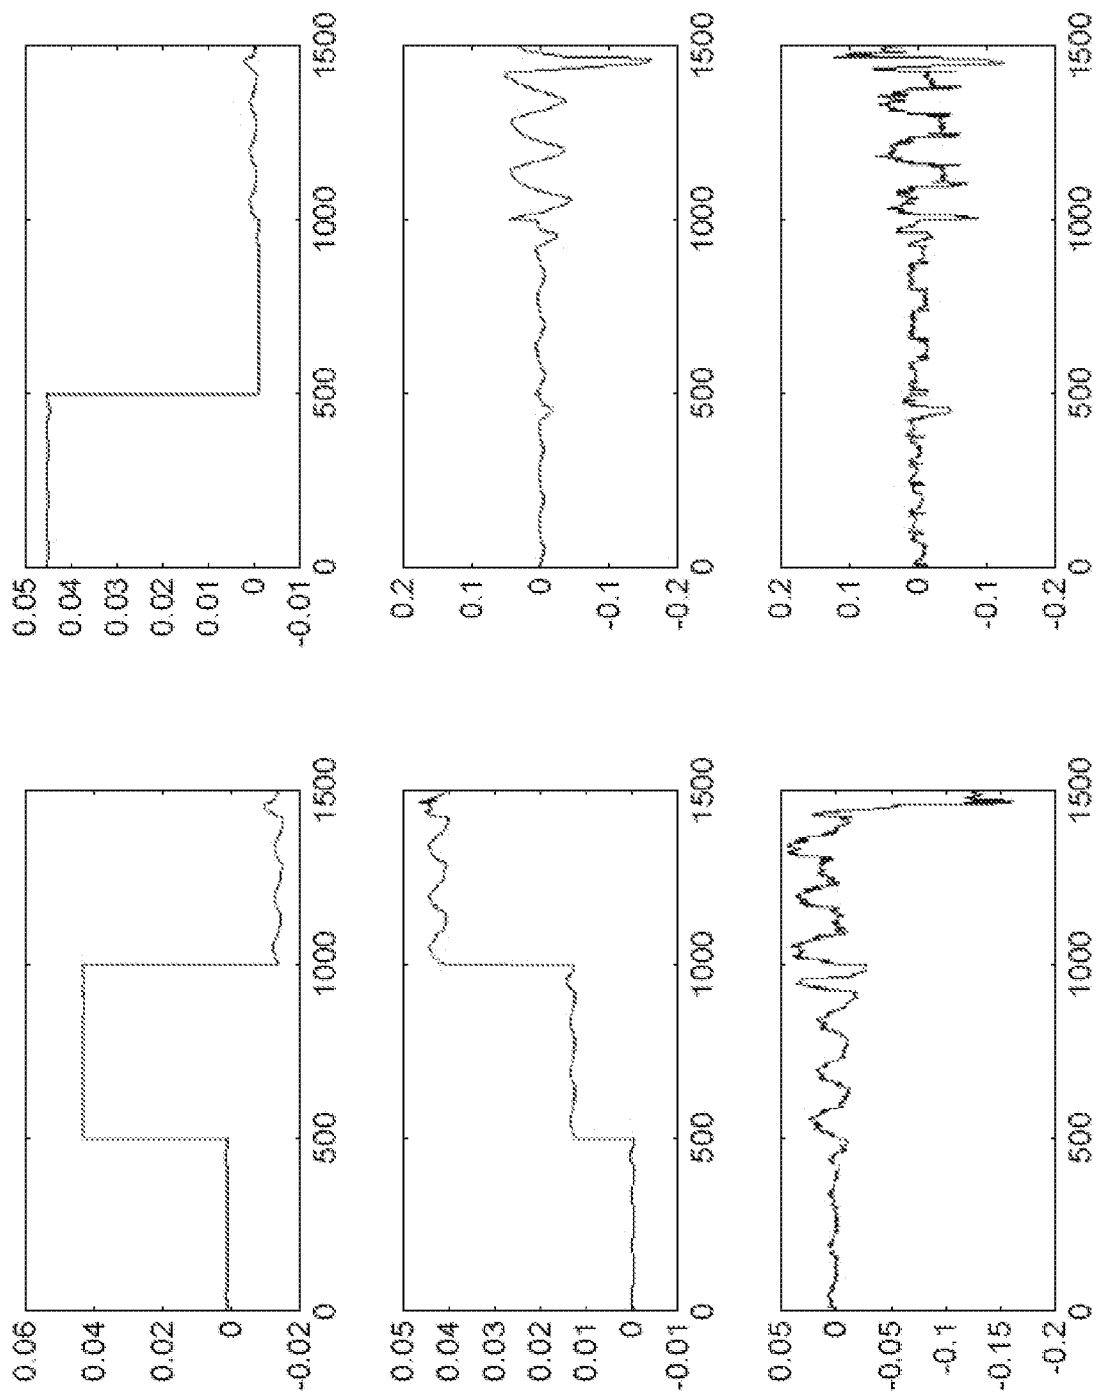


FIG. 5

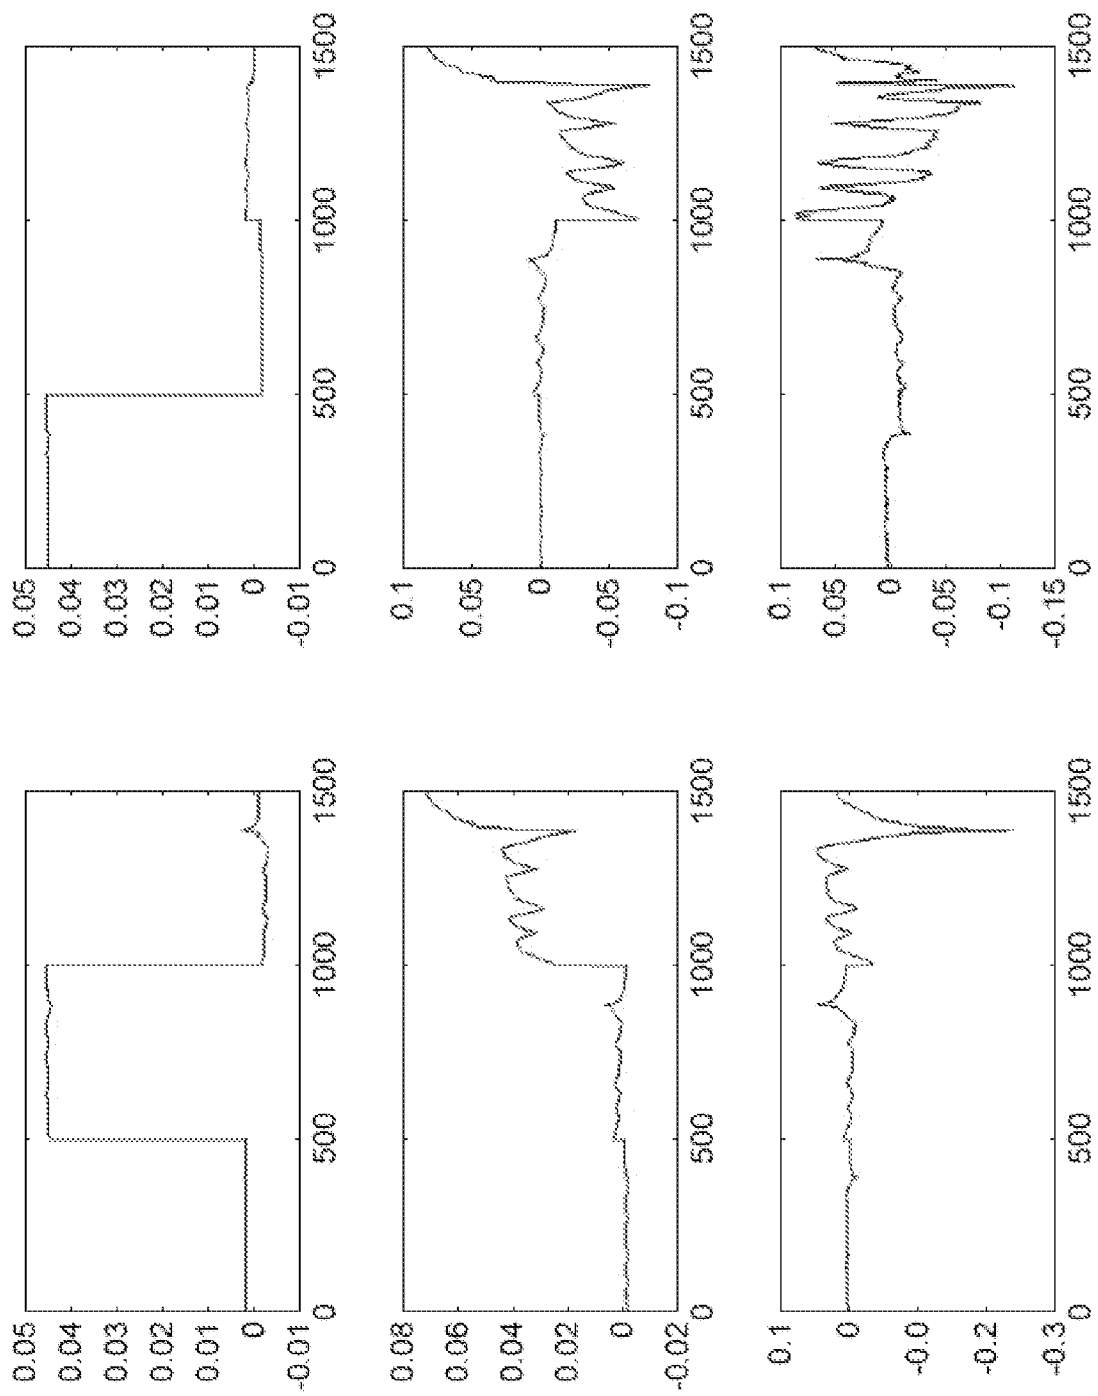


FIG. 6

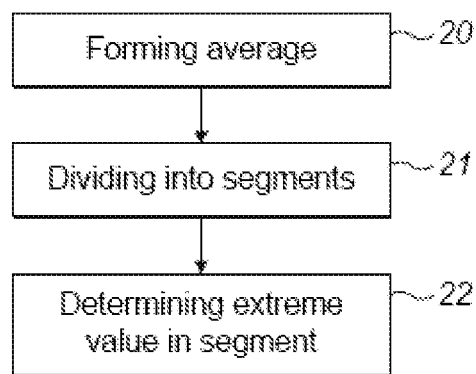


FIG. 7

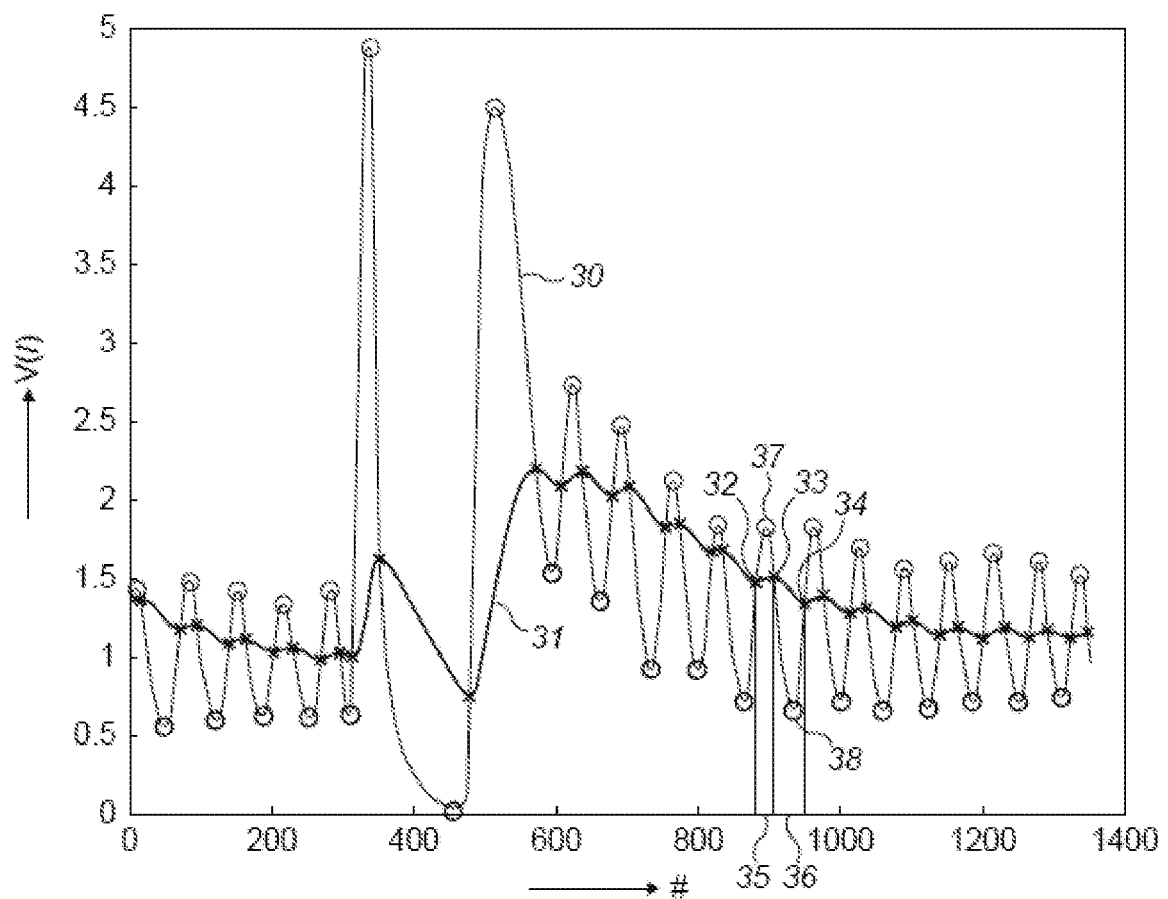


FIG. 8

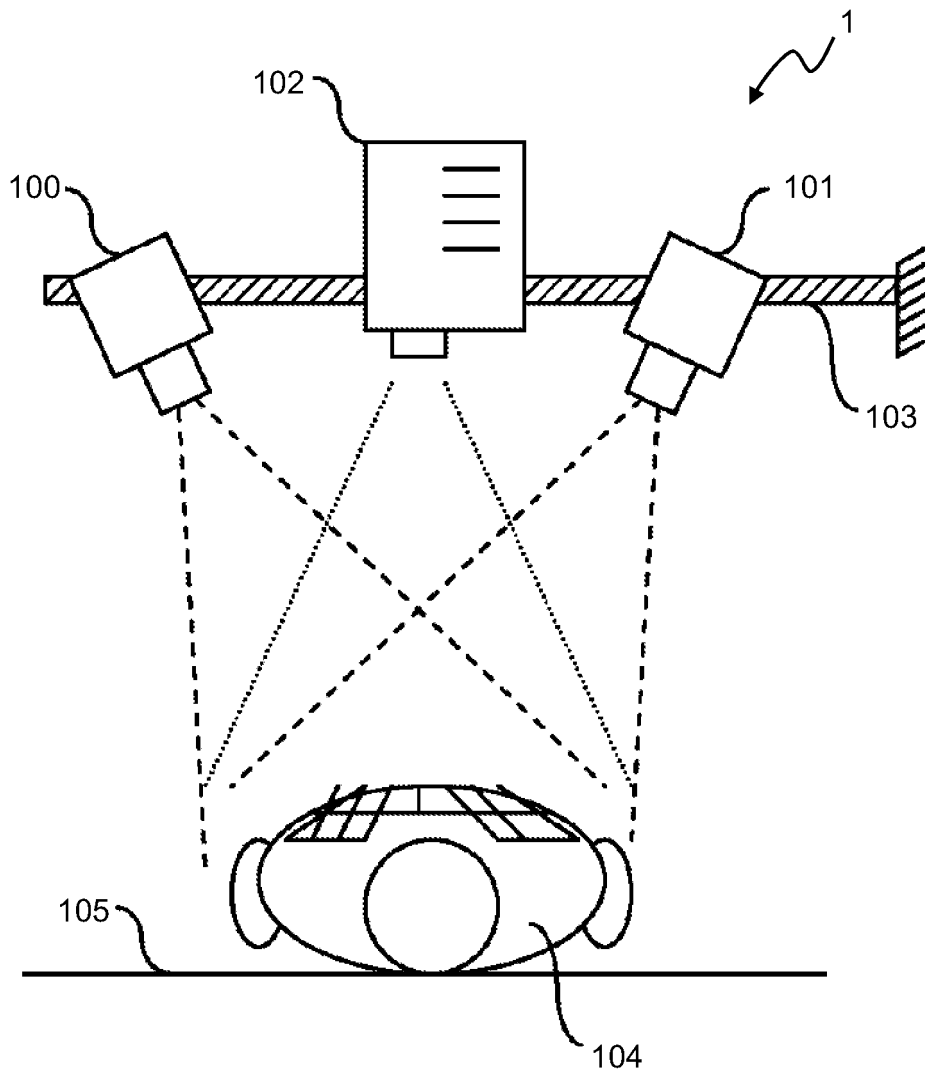


FIG. 9

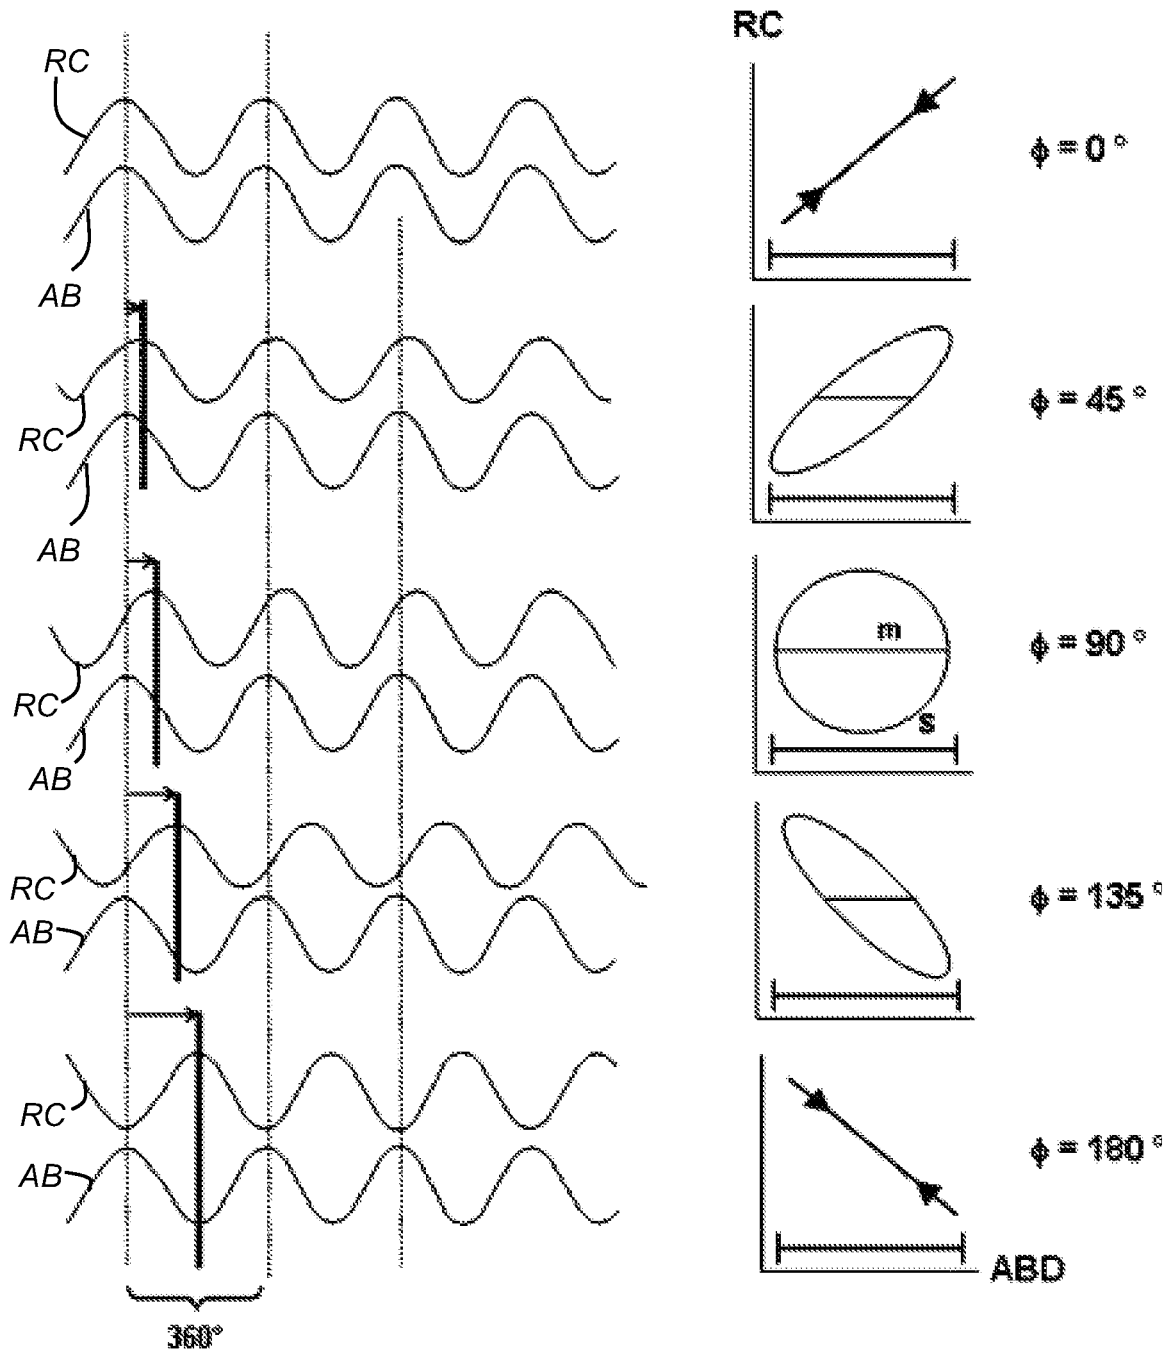


FIG. 10

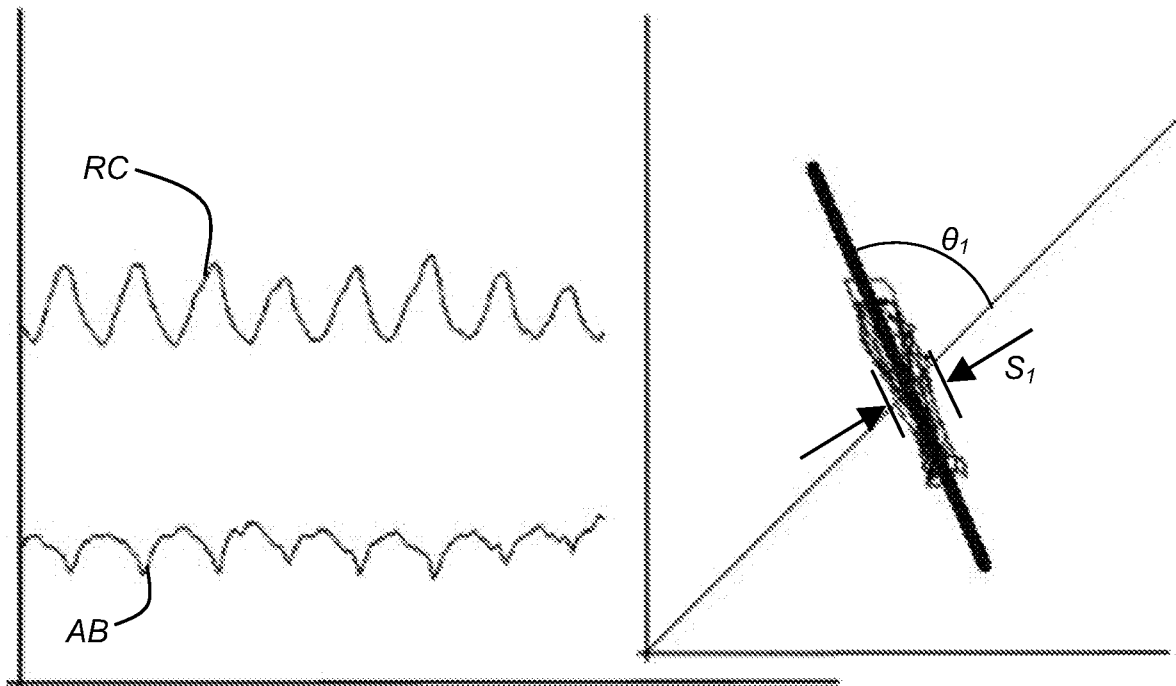


FIG. 11

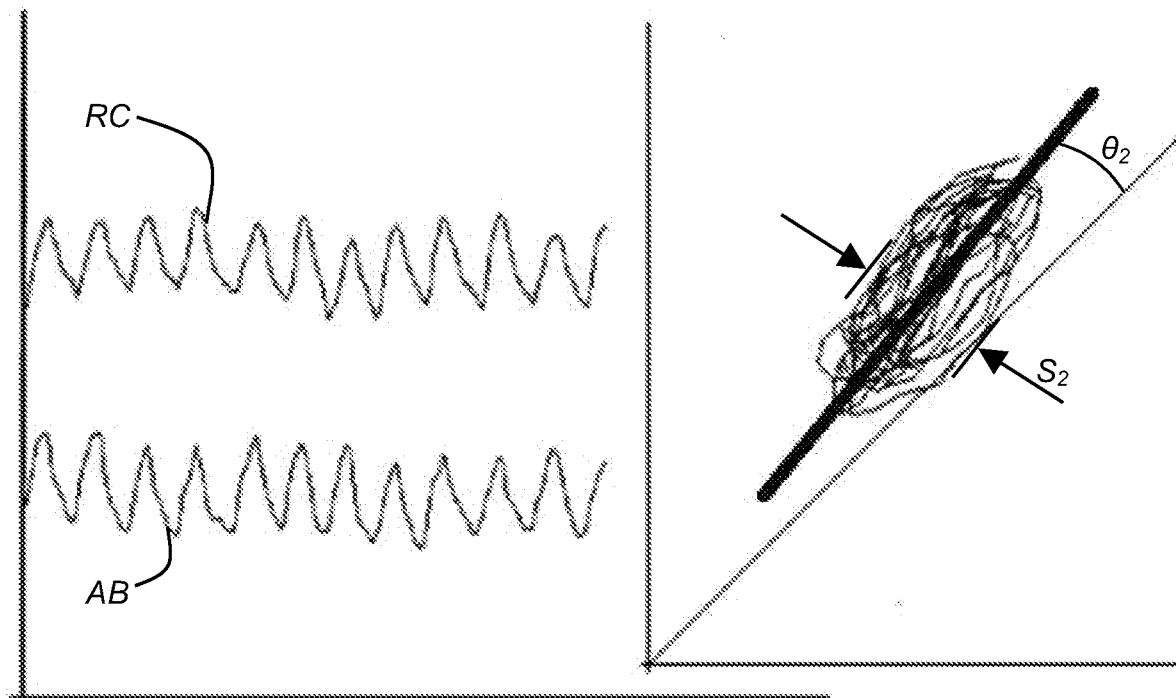


FIG. 12

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2010066824 A [0006] [0024] [0026] [0030]

Non-patent literature cited in the description

- **LATHAUWER et al.** *Siam J. Matrix Anal. Appl.*, vol. 21 (4), 1253-1278 [0037]
- **CHEN, W et al.** Measuring complexity using Fuzzy-En, ApEn, and SampEn. *Medical Engineering & Physics*, 2009, vol. 31 (1), 61-68 [0081]

专利名称(译)	分析呼吸数据		
公开(公告)号	EP2925227B1	公开(公告)日	2018-03-28
申请号	EP2013799643	申请日	2013-11-27
[标]申请(专利权)人(译)	纽玛凯尔有限公司		
申请(专利权)人(译)	PNEUMACARE LTD		
当前申请(专利权)人(译)	PNEUMACARE LTD		
[标]发明人	LASENBY JOAN DE BOER WILLEM HESSEL		
发明人	LASENBY, JOAN DE BOER, WILLEM HESSEL		
IPC分类号	A61B5/00 A61B5/113 G01B11/16 G06T7/00 G06T7/20		
CPC分类号	A61B5/1135 G01B11/167 G06T7/0016 G06T7/246 G06T2207/10016 G06T2207/30061 A61B5/0064 A61B5/08 A61B5/082 A61B5/103 A61B5/1079 A61B5/113 A61B5/72 G06F19/34 G06T7/0012 G06T7/20 A61B5/0077 A61B5/1128 A61B5/725 A61B5/7278 A61B5/7282		
优先权	2012021336 2012-11-27 GB 2013015762 2013-09-04 GB		
其他公开文献	EP2925227A1		
外部链接	Espacenet		

摘要(译)

一种分析表示受试者104的躯干形状的呼吸数据作为时间的函数的方法，以监测和/或分析受试者的呼吸模式。测量数据并将其处理成与具有网格点的二维网格相关的数据阵列，每个网格点处的形状的空间位置和时间点。该方法包括以下步骤：将数据阵列映射到二维阵列上，分解二维阵列并从表示运动模式的分解的二维阵列形成对象104的签名。

$$\phi = \frac{180}{\pi} \times \arcsin\left(\frac{m}{s}\right)$$