



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61F 2/00, A61M 31/00	A1	(11) International Publication Number: WO 00/54702 (43) International Publication Date: 21 September 2000 (21.09.00)
(21) International Application Number: PCT/IL00/00161 (22) International Filing Date: 15 March 2000 (15.03.00) (30) Priority Data: 09/268,109 15 March 1999 (15.03.99) US 09/363,287 28 July 1999 (28.07.99) US (71) Applicant (for all designated States except US): INNOVENTIONS INC. [US/US]; C.T. Corporation Systems, P.O. Box 4349, Carol Stream, IL 60197-4349 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): YACHIA, Daniel [IL/IL]; 17-B Yehuda Maccabi Street, 46762 Herzliya (IL). HIRSZOWICZ, Eran [IL/IL]; 171 Aluf David Street, 52236 Ramat-Chen (IL). (74) Agent: REINHOLD COHN AND PARTNERS; P.O. Box 4060, 61040 Tel Aviv (IL).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: INTRAVESICULAR DEVICE (57) Abstract <p>A system for treating a urinary bladder of an individual. The system comprises a resiliently flexible, solid body for insertion into the urinary bladder. The system also comprises an applicator for inserting the body into the urinary bladder or for removing the body from the urinary bladder. The system is useful in treating the urinary bladder, in monitoring the urinary bladder and in the treatment of urinary incontinence.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTRAVESICULAR DEVICE

FIELD OF THE INVENTION

The invention is in the field of medical devices. More specifically, the invention relates to devices for the treatment of urinary incontinence.

BACKGROUND OF THE INVENTION

5 Several disorders of the urinary tract are known. Among these are urinary incontinence, chronic urinary tract infections, urinary bladder tumors.

Urinary Incontinence

10 Urinary incontinence mostly affects women (approximately 10 million in the U.S.A. alone) primarily after childbirth or due to old age. In men, urinary incontinence often occurs as a complication of surgery or old age (approximately 3 million in the U.S.A.).

15 Incontinence has serious economic, health, social and psychological consequences. Its estimated cost to the health system in the United States in 1993 was US \$16 billion. It leads to chronic and severe skin irritation in the genital area, an increase in urinary infections and urosepsis. Fear of incontinence and odors in public cause incontinent people to severely restrict their social activities. The impact on the mental health of the affected people may be even more devastating than the social and health consequences. They suffer severe
20 embarrassment, loss of self-esteem, depression and anxiety.

Urinary incontinence can be divided into four groups:

Stress Incontinence - is the involuntary release of urine due to a sudden increase in the intra-abdominal pressure caused by laughing,, sneezing, coughing, running, etc. This is the most common type of incontinence and in women may be the result of anatomical changes in the pelvic organs after childbirth, estrogen deficiency, unsuccessful surgical repairs for incontinence or pelvic irradiation. In men, it often happens after surgery for benign enlargement of the prostate gland or after radical removal of the prostate.

Total Incontinence - is the continuous leak of urine entering the bladder due to failure of the sphincteric muscles.

Urge Incontinence - is involuntary loss of urine due to involuntary bladder contractions. This type of incontinence mostly affects the elderly who leak until they reach a toilet.

Mixed Incontinence - is a combination of stress and urge incontinence. This condition is more common in elderly women than men.

Ideally, treatment of incontinence should provide permanent dryness and is easy to perform.

Pharmacological treatments of bladder dysfunctions are based either on estrogen replacement for treating post-menopausal vaginal and urethral atrophy or on agents affecting the tonus of the bladder muscle. Since affected elderly women suffer from both hormonal deficiency and urinary incontinence, both types of agents are usually prescribed simultaneously.

Surgical treatments are based on restoring the anatomical changes causing the incontinence. Although in the short-term most surgical procedures restore continence, the long-term prognosis is usually unsatisfactory. Moreover, surgery entails morbidity and high expenses.

Conservative/behavioral treatments are based on pelvic floor muscle exercises, bladder training, biofeedback, vaginal cones, low-frequency electrostimulation of pelvic floor muscles, intravaginal bladder neck support pessaries, urethral meatus suction cups and intraurethral devices. Conservative
5 treatments are time consuming and require the patients' understanding, cooperation and persistence.

Devices, which have been used to obtain almost immediate dryness in incontinent people can be divided into two groups:

10 (1) Urethral Plugs/Inserts

These comprise a flexible rod having, a 14 Ch. (approximately 4.5 mm) diameter and a length adjusted to fit the length of the patient's urethra. The rod has an inflatable device on its bladder end and a flange at other end. After insertion of the device, the device is inflated in the bladder. The device and the
15 flange, maintain the device in its proper position within the urethra. The device and rod form a mechanical barrier to retain the urine within the bladder. The device must be deflated and the device removed and discarded prior to voiding,. Such inserts are known in the art, for example, the device known as RELIANCE produced by UroMed Corp., U.S.A. Since inserts are discarded after each
20 voiding and replaced with a new one by the patient, manual dexterity of the patient is required. Insertion of an insert into a female has the risk of pushing vaginal and perineal bacteria into the bladder and insertion of an insert a few times a day increases this risk. The inconvenience of removing and inserting a new device and its costs, in addition to the infection risk, are the major
25 disadvantages of these devices.

(2) Valve Catheters

These comprise a tube with a valve at one end. The bladder end of the device typically has a device or flanges for retaining the device in place and a
30 flange at the other end to prevent migration into the bladder. The valve is opened

for voiding through the lumen of the catheter with the help of an external magnet. The tube typically has a 18 Ch. (6 mm.) to 20 Ch..(approximately 7 mm) diameter and a length adjusted to fit the patient's urethra. For male incontinence, an active intraurethral Foley-type catheter is used. This device has a retaining, device at its
5 bladder end and another smaller device under the prostate for fixing the device in place. The magnet activated valve is situated at the end of the device near the distal end of the urethra. Active inserts are typically left indwelling up to 4 weeks and are then replaced.

Examples of such catheters are disclosed in U.S. Patent Nos. 5,030,199
10 and 5,234,409. Valve catheters are more convenient for the patient than the inserts; however, in females they cause ascending infection because they connect the bladder with the vulva which is rich in pathogenic bacteria, especially *Escherichia Coli*. Even with continuous use of antibiotics, infection is inevitable in the majority of cases. During prolonged use of catheters or inserts in female
15 patients, a relaxation of the urethra occurs and the patients may start to leak around the device. Unfortunately valve catheters and inserts are unavailable in increasing diameters.

A significant disadvantage of both the inserts and the valve catheters is the discomfort felt by the patient especially when sitting and during sexual
20 intercourse (felt by the patient and the partner).

The present invention therefore provides a device for the treatment of urinary incontinence in which the disadvantages of the prior art devices are substantially reduced or eliminated.

(3) Urinary Bladder Plugs

25 U.S. Patent No. 4,850,963 to Sparks *et al.* discloses a bolus for insertion in to a urinary bladder for the treatment of urinary incontinence. The bolus contains a ferromagnetic material and has a specific gravity greater than that of urine. The bolus is maintained at the urinary bladder outlet to the urethra under the influence of gravity so as to prevent the flow of urine into the urethra. For voiding, the bolus
30 is displaced from the opening using an external magnet.

Urinary Tract Infections

Nearly half of all women experience urinary tract infection (UTI) at some point in their lifetime and most of these infections are confined to the bladder. Isolated UTIs can be treated by short and effective antibiotic treatment. However, recurrent UTIs often occur in women due to antibiotic resistant bacteria . In this case complicated infections often exhibit multidrug resistance and necessitate longer antimicrobial drug administrations.

Treatment of UTI often requires urinary levels of antimicrobial drugs that are several hundred times greater than those allowable in the blood. Many antibacterials cannot be used in UTI because, when taken orally or intravenously, they do not attain the required concentration in the urine, without exceeding the allowable limit in the blood. It would therefore be desirable to be able to continuously introduce antimicrobial drugs continuously and directly into the bladder.

15

Bladder tumors

Even after resection, bladder tumors may not only recur but may also invade deeper in the bladder wall. Due to the heterogeneity of these tumors (from low-grade tumors showing a benign course to highly malignant high-grade tumors), there does not exist a single approach to the surveillance and treatment of these tumors. Intravesical drug therapies are often used for reducing tumor recurrence. In this approach, an immunotherapeutic or chemotherapeutic agent is inserted into the bladder through a catheter. This treatment is typically repeated once a week for 6 weeks and then once a month for a period of 6-12 months. However, periodic treatment has not been established as being effective in altering the progression of the tumor. Continuous local treatment with chemotherapeutic or radioactive materials may treat or prevent not only superficial tumors but also deep tumors as well. It would therefore be desirable to be able to introduce antitumoral drugs continuously and directly into the bladder.

30

Bladder dysfunction

During filling, the bladder muscle relaxes for keeping the intravesical pressure low while it contracts for voiding. Certain diseases such as spinal cord injuries, diabetes, multiple sclerosis, or hormonal changes after menopause or old age in both sexes may cause a hypo contractility or, paradoxically, hyper contractility of the muscle. In atonic bladder, pharmacological treatment is not very effective. In hyperreflexic bladder, drugs for relaxing the bladder cause constipation and mouth dryness and are therefore not tolerated well by the patients.

Diagnosis of bladder dysfunction requires continuously monitoring various bladder parameters during filling and/or voiding. These measurements usually are made by inserting a catheter connected to a measuring device into the bladder. This is done, for example, in uroflowmetry (measurement of urinary flow rate) which is non-invasive, simple and inexpensive. However, its sensitivity and specificity are low. Cystometry is an invasive technique for measuring bladder capacity, compliance and muscle tonus. Pressure-flow study is an invasive and costly test for distinguishing patients with low urinary flow due to obstruction or bladder antonia, from those with high intravesical pressure and high urinary flow. It is therefore a need in the art for a simple and inexpensive technique for intravesicular monitoring.

In the diagnostic procedure known as "urodynamics", the bladder is filled through a catheter, and the response of the bladder is monitored. Available 24 hour urodynamic monitors have catheters or wires passing through the urethra, connecting sensors inserted into the bladder to a recorder. The connecting wires and catheters inadvertently introduce pathogenic bacteria from the genital areas into the bladder. It is therefore desirable to be able to monitor bladder function over several cycles of filling and voiding without the need for such wires or catheters.

Diagnosis of some intravesical pathological conditions often involves inserting an endoscope into the bladder and optically scanning the bladder walls. In cases of bleeding in the ureters or the kidneys, the observation of blood coming through the ureteral orifices allows determination of the origin of the bleeding.

However, if the bleeding has temporarily stopped at the time of the examination, or if the blood concentration in the urine is insufficient to make the urine red or pink, endoscopy is of little value in reaching a diagnosis. In such cases more invasive procedures are performed in order to enter the upper urinary tract. It is therefore
5 desirable to be able to monitor the bladder over long periods of time.

Bladder shape during filling and its contraction during voiding is important for the diagnosis of certain bladder pathologies. These functions can be followed in fluoroscopy and by sonography. These techniques however are not accurate and cannot be used for monitoring changes in bladder shape over long periods of time.
10 It would therefore be desirable to be able to continuously image the bladder interior over long periods of time.

The present invention therefore provides a device for continuous monitoring of the bladder interior and for the treatment of bladder disorders in which the disadvantages of the prior art devices are substantially reduced or eliminated.
15

SUMMARY OF THE INVENTION

The present invention provides system comprising a solid body formed from a flexibly resilient material for insertion into the urinary bladder, and an applicator for inserting the body into the bladder. The body is compressed prior to
20 insertion and then allowed to expand after insertion in the bladder.

The invention may be used for the intermittent sealing of the urinary bladder outlet and the prevention of involuntary urine leakage. Sealing the urinary bladder outlet involves positioning the device in the urinary bladder outlet so as to seal it. Unsealing the outlet to allow voiding of the bladder involves positioning the device
25 away from the outlet. The body is preferably coated with a hydrophilic coating to reduce frictional forces between the body and the wall of the bladder. This facilitates release of the body from the outlet.

The invention may also be used for such purposes as for example, delivery of drugs, imaging the urinary bladder, and measuring intravesicular parameters
30 such as pressure in the urinary bladder. When used for such purposes, the body

may be, for example, positioned in the urinary bladder outlet or immobilized in some other desired location in the bladder.

The invention is entirely confined to the urinary bladder and has no urethral parts. As will become apparent in the description below, the body is easily inserted and removed. It may be left in the bladder for prolonged periods of time without encrusting or causing infections and is displaced within the bladder at will using a hand held magnet. The invention is comfortable for the patient and does not interfere with the daily activities of the patient including sitting, jogging, riding, or sexual intercourse.

Thus, in its first aspect, the invention provides a urological medicinal system for use in medical procedures within a urinary bladder of an individual comprising:

(a) a resiliently flexible, solid body for insertion into the urinary bladder; and

(b) an applicator for inserting the body into the urinary bladder or for removing the body from the urinary bladder, the applicator fitted at an end thereof with a gripping device for releasably gripping the body.

In its second aspect, the invention provides a method for treating urinary incontinence in an individual comprising the steps of:

(a) compressing a resiliently flexible, solid body, formed with a magnetizable portion;

(b) inserting the body into a urinary bladder of the individual;

(c) decompressing the body in the urinary bladder;

(d) displacing the body into a sealing position for sealing the urinary bladder; and

(e) displacing the body within the urinary bladder into an unsealing position for voiding the urinary bladder.

In its third aspect, the invention provides a method for releasing one or more substances into a urinary bladder comprising the steps of:

(a) loading the one or more substances into a solid, flexibly resilient body;

- (b) compressing the body;
- (c) inserting the body into the individual's urinary bladder; and
- (d) decompressing the body in the urinary bladder.

In its fourth aspect, the invention provides a method for monitoring the
5 interior of a urinary bladder comprising the steps of:

- (a) compressing a solid flexibly resilient body comprising one or more
devices for monitoring the urinary bladder;
- (b) inserting the body into the individual's urinary bladder;
- (c) decompressing the body in the urinary bladder; and
- 10 (d) transmitting signals from at least one of the monitoring devices to a
receiver.

In its fifth aspect, the invention provides a method for imaging the interior
of a urinary bladder comprising the steps of:

- (a) compressing a flexibly resilient body comprising a device for
15 imaging the urinary bladder;
- (b) inserting the body into the urinary bladder;
- (c) decompressing the body in the urinary bladder; and
- (d) transmitting signals from the imaging device to a receiver.

In its sixth aspect, the invention provides a method for releasing one or more
20 substances into a urinary bladder comprising steps of

- (a) providing a body comprising a pump fed by a reservoir;
- (b) loading the reservoir with the one or more substances;
- (c) inserting the body into the urinary bladder; and
- (d) activating the pump so as to release the one or more substances into
25 the bladder.

In its seventh aspect, the invention provides a resiliently flexible, solid body for
insertion into a urinary bladder.

BRIEF DESCRIPTION OF THE DRAWINGS:

In order to understand the invention and to see how it may be carried out in practice, a preferred embodiment will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

5 **Fig. 1** shows an embodiment of the body for use in the system of the invention having the appearance of an umbrella;

Fig. 2 shows longitudinal sections of umbrellas having a chamber for storing substances;

10 **Fig. 3** shows an applicator for inserting an umbrella according to the invention into the urinary bladder of an individual;

Fig. 4 shows an expanded umbrella being inserted into the urinary bladder with an applicator;

Fig. 5 shows a retrieval device for retrieving the umbrella;

15 **Fig. 6** shows use of a displacing member to displace the umbrella into a sealing position within the urinary bladder;

Fig. 7 shows use of a displacing member to displace the umbrella from a sealing position in the urinary bladder; and

Fig. 8 shows use of an immobilizing member.

20 **Fig. 9** shows three other embodiments of the body for use in the system of the invention.

Fig. 10 shows an umbrella comprising an imaging device;

Fig. 11 shows an umbrella comprising devices for measuring urinary bladder parameters;

25 **DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS**

Reference is first made to Fig. 1 which shows an embodiment of the body for use in the system of the invention. The body, gennerally designated as **1**, has in this embodiment a generally hemispherically shaped wall **2** and a stem **4** extending from the inner surface of wall **2**. The body **1** is made of a resiliently flexible elastic biocompatible material. The body may be coated on its outer

30

surface with a hydrophilic coating 10. The body 1 may optionally comprise a magnetizable portion. In the embodiment of the body 1 shown in Fig. 1, referred to herein as an “umbrella” the magnetizable may consist for example, of one or more metal particles associated with stem 4 or wall 2 of the umbrella.

5 Fig. 2 shows three embodiments of an umbrella in cross section having one or more chambers 5 for storing one or more substances. Such substances could be, for example, drugs, antibiotics or radioactive substances, etc. The chamber 5 may be situated at the tip of the stem, as shown in Fig. 2a. In the embodiment of Fig. 2b, the chamber 5 is located within a hollow magnetable portion 3 and side ports 6 connect the interior of the chamber to the outer surface of magnetable portion 3. In Fig. 5c, chamber 5 is located around the magnetable portion 3. After insertion of the umbrella into the lumen of the urinary bladder, the substances diffuse from the umbrella 1 into the bladder in order to achieve a desired effect.

15 Fig. 3 shows an applicator 31 for inserting an umbrella into the lumen of the urinary bladder of an individual. When umbrella 1 is initially loaded into applicator it is maintained in a deformed state at the end of the applicator. As shown in Fig. 4, the distal end 32 of the applicator-umbrella combination is inserted into the urethra until it reaches the lumen of the bladder. The umbrella 1 is then released from the applicator by pushing the umbrella from applicator 31 with pushing piston 33. The applicator is then removed from the body, leaving the umbrella 1 in the bladder lumen 39. Following its release from the applicator into the bladder, the umbrella regains its initial shape.

25 Fig. 5a shows a retrieval device generally designated 51 for removing the umbrella from the bladder 39. A catheter 52 has a probe 53 in its lumen which has at its distal end a magnetable portion 54 so as to engage an umbrella 1 at the distal tip by means of the magnetable portion 3 associated with the umbrella. As shown in Fig. 5b, when probe 53 is then retracted, umbrella 1 is deformed and brought into catheter 52. The retrieval device is then withdrawn from the patient together with the umbrella.

30

Figs. 6 and 7 show use of a displacing member **61** to position an umbrella **1** having a magnetable portion **3** at a desired location within the lumen **62** of an individual's urinary bladder. Displacing member **61** is located outside the individual's body and comprises a magnetable portion **63**. The displacing member is placed at a location on the surface of the individual's body so as to draw the umbrella from its initial location to the desired location.

Fig. 6 shows use of an umbrella for sealing the urinary bladder outlet in a female subject. Displacing member **61** is placed over the urethral meatus **64** such that, due to the magnetable portion **63** associated with displacing member **61** and the magnetable portion **3** associated with umbrella, the umbrella is drawn into the bladder outlet **65**. The umbrella thus becomes lodged in the outlet and seals it. As the amount of urine in the bladder increases, a hydrostatic pressure is exerted on the umbrella further lodging it in the outlet and reinforcing the seal. The invention is used similarly for sealing the urinary bladder outlet in male subjects.

As seen in Fig. 7, in order to open the urinary bladder for voiding, magnetic displacing member **61** is placed over the upper edge of pubic bone **71**. Due to the magnetable portion **3** of the umbrella, the umbrella is raised and dislodged from the bladder outlet so as to allow voiding of urine as indicated by arrow **73**. After voiding, the umbrella is redrawn into the bladder outlet by the displacing member so as to seal the outlet again as shown in Fig. 6.

Fig. 8 shows use of an immobilizing member **81** comprising a magnetable portion **82** affixed to the surface of the individual's body so as to maintain umbrella **1** at a desired location in the lumen of the urinary bladder. Magnetable portion **82** of immobilizing member **81** may be enclosed in a coating **83** so as to form, for example, a hygienic pad. The immobilizing member may be affixed to the surface by means of tape, or by pressure applied to it by the individual's underwear.

Reference is now made to Fig. 9 which shows three other embodiments of the body for use in the system of the invention. In the embodiment shown in Fig. 9a, the body, generally indicated by **91**, has a spherical shape. In the

embodiment of Fig. 9b, the body, generally designated as **92**, has two hemispherically shaped walls **92a** and **92b** joined together by a centrally located stem **94**. In Fig. 9c, the body, generally indicated by **93**, has two hemispherically shaped walls **93a** and **93b** joined together by a plurality of circumferentially located rods **94**. The bodies **91**, **92**, and **93** may be coated on at least of portion of their outer surface with a hydrophilic coating **99** and may optionally comprise a magnetizable portion **3**.

Fig. 10 shows an umbrella **101** constructed so as to comprise an imaging device such as a microvideo camera **119** for imaging the interior of the bladder. The video camera **119** may have associated with it a transmitter **110** for transmitting images to a remote receiver **111**. Such microvideo cameras and transmitters are known in the art, for example, as disclosed in U.S. Patents 5,604,531, 5,579,781 and 5,188,109. The receiver **111** may be connected to a processing unit **112** for processing the images, or a display **113** for displaying images.

Fig. 11 shows an umbrella **1** constructed so as to comprise one or more devices **214** for measuring one or more parameters associated with the urinary bladder, for example, bladder pressure, urine temperature, urine density, urine conductivity or urine composition. The devices **214** may be affixed to the outer surface of the wall **2** or the stem **4** of the umbrella **214a**, embedded within the wall **2** or the stem **4** of the umbrella **214b**, or affixed to the inner surface of the wall **214c**. The measuring devices **214** may have associated with it a transmitter **215** for transmitting measurements to a remote receiver **216**. The receiver may be connected to a processing unit **217** for processing the measurements or to a display **218** for displaying results. Such measuring devices are known in the art, for example as disclosed in U.S. Patents 5,579,781 and 5,188,109.

Fig. 12 shows an umbrella **1** comprising a pump **120** for the controlled release of one or more substances into the bladder. The pump **120** has a reservoir **121** for storing the substances. The pump **120** may have a receiver **122** for

receiving signals from a remote control **123**. The rate of release of the substance may thus be varied at will using the remote control.

The invention has been described with a certain degree of particularity only for the sake of clarity. However, several variations and modifications in the
5 invention are possible without exceeding the scope and spirit of the invention as defined in the following set of claims.

CLAIMS:

1. A urological medicinal system for use in medical procedures within a urinary bladder of an individual comprising:
5 (a) a resiliently flexible, solid body for insertion into the urinary bladder; and
(b) an applicator for inserting the body into the urinary bladder or for removing the body from the urinary bladder, the applicator fitted at an end thereof with a gripping device for releasably
10 gripping the body.
2. The system according to Claim 1 wherein the body has a spherical shape.
3. The system according to Claim 1 wherein the body comprises a domed-shaped wall and a stem extending from a concave surface of the wall.
- 15 4. The system according to Claim 1 wherein the body comprises two dome-shaped walls and a centrally located stem having two ends, each end being attached to a concave surface of a different wall.
5. The system according to Claim 1 wherein the body comprises two dome-shaped walls and one or more circumferentially located rods, each rod
20 having two ends, each of the two ends of a rod being attached to a concave surface of a different wall.
6. The system according to Claim 1, wherein the body is formed with a magnetizable portion.
7. The system according to Claim 3, wherein the body is formed with a
25 magnetizable portion consisting of one or more magnetizable particles associated with the stem of the body.
8. The system according to Claim 3 wherein the body is formed with a magnetizable portion consisting of one or more magnetizable particles attached to the wall of the body.

9. The system according to Claim 3, wherein the body is formed with a magnetizable portion consisting of one or more magnetizable particles embedded in the wall of the body.
10. The system according to Claim 4, wherein the body is formed with a magnetizable portion consisting of one or more magnetizable particles associated with the stem of the body.
11. The system according to Claim 4 wherein the body is formed with a magnetizable portion consisting of one or more magnetizable particles attached to one or both walls of the body.
12. The system according to Claim 4, wherein the body is formed with a magnetizable portion consisting of one or more magnetizable particles embedded in one or both walls of the body.
13. The system according to Claim 1 wherein the body is coated on at least a portion of an outer surface with a hydrophilic coating.
14. The system according to Claim 1 wherein the body is capable of storing one or more compounds and releasing them into the urinary bladder.
15. The system according to Claim 3, wherein the body is capable of storing one or more substances in the wall or the stem and releasing the substances into the urinary bladder.
16. The system according to Claim 4, wherein the body is capable of storing one or more compounds in a wall or in the stem and releasing the compounds into the urinary bladder.
17. The system according to Claim 9 wherein at least one substance is stored in the wall of the body.
18. The system according to Claim 9, wherein at least one substance is selected from the group consisting of antibiotics, anti-microbial agents, drugs, radioactive substances, contrast agents, and substances having a local or systemic effect on cells or tissues of the individual.

19. The system according to Claim 1 wherein the body comprises a device which can emit or absorb a signal detectable by an apparatus for imaging the urinary bladder.
20. The system according to Claim 19, wherein said device further comprises a transmitter transmitting signals to a receiver.
21. The system according to Claim 20 further comprising a receiver receiving signals from the transmitter.
22. The system according to Claim 21 further comprising one or more components selected from the list comprising:
- (a) a processing unit processing signals received by the receiver;
 - (b) a display for displaying signals received by the receiver;
 - (c) a display for displaying an output produced by the processing unit.
23. The system according to Claim 1, wherein the body comprises one or more monitoring devices for sampling a morphological or physiological parameter of the urinary bladder and for emitting a signal indicative of a quality or quantity of a sampled parameter.
24. The system according to Claim 23, wherein at least one of the devices monitors a parameter of the urinary bladder selected from the group consisting of bladder pressure, urine temperature, urine density, urine conductivity, and urine composition.
25. The system according to Claim 23, further comprising a transmitter transmitting signals from a monitoring device to a receiver.
26. The system according to Claim 25 further comprising a receiver receiving signals from the transmitter.
27. The system according to Claim 26, further comprising one or more components selected from the list comprising:
- (a) a processing unit processing signals received by the receiver;
 - (b) a display for displaying signals received by the receiver;
 - (c) a display for displaying an output produced by the processing unit.

28. The system according to Claim 6 further comprising an immobilizing member comprising a magnetizable portion, the immobilizing member being fitted for securing onto the individual's body for immobilizing the body at a desired location in the individual's urinary bladder.
- 5 29. The system according to Claim 28 wherein the immobilizing member is in the form of a hygienic pad adapted to be placed in the individual's underwear.
30. The system according to Claim 1 for use in the treatment of a disorder selected from the group consisting of urinary incontinence, urinary bladder infections, urinary bladder tumors, and bladder dysfunction.
- 10 31. The system according to Claim 6 further comprising a magnetizable displacing member for displacing the body within the urinary bladder.
32. The system of Claim 6 wherein the gripping device comprises a magnetizable portion for securing the balloon thereto during application by means of a magnetic interaction.
- 15 33. The system according to Claim 20 for use in imaging a urinary bladder.
34. The system according to Claim 14 for releasing one or more substances in a urinary bladder.
35. The system according to Claim 23 for monitoring a urinary bladder.
36. A method for treating urinary incontinence in an individual comprising the steps of:
- 20 (a) compressing a resiliently flexible, solid body, formed with a magnetizable portion;
- (b) inserting the body into a urinary bladder of the individual;
- (c) decompressing the body in the urinary bladder;
- 25 (d) displacing the body into a sealing position for sealing the urinary bladder; and
- (e) displacing the body within the urinary bladder into an unsealing position for voiding the urinary bladder.
37. The method according to Claim 39 wherein the body is coated on its outer surface with a hydrophilic coating.
- 30

38. A method for releasing one or more substances into a urinary bladder comprising the steps of:

- (a) loading the one or more substances into a solid, flexibly resilient body;
- (b) compressing the body;
- 5 (c) inserting the body into the individual's urinary bladder; and
- (d) decompressing the body in the urinary bladder.

39. The method of Claim 41 further comprising displacing the body within the urinary bladder to a desired location.

40. The method of Claim 41 wherein one or more of the one or more substances
10 are selected from the list consisting of antibiotics, anti-microbial agents, drugs, radioactive substances, contrast agents, and substances having a local or systemic effect on cells or tissues of the individual.

41. A method for monitoring the interior of a urinary bladder comprising the steps of:

- 15 (a) compressing a solid flexibly resilient body comprising one or more devices for monitoring the urinary bladder;
- (b) inserting the body into the individual's urinary bladder; and
- (c) decompressing the body in the urinary bladder; and
- (d) transmitting signals from at least one of the monitoring devices to a
20 receiver.

42. The method of claim 44 further comprising displacing the body within the urinary bladder to a desired location within the urinary bladder.

43. The method of Claim 44, further comprising one or more steps selected from the list comprising:

- 25 (a) storing the signals in a computer memory;
- (b) displaying the signals on a display;
- (c) processing the signals in a computer processing unit;
- (d) storing results of the processing in a computer memory; and
- (e) displaying results of the processing on a display.

44. A method for imaging the interior of a urinary bladder comprising the steps of:
- (a) compressing a flexibly resilient body comprising a device for imaging the urinary bladder;
 - 5 (b) inserting the body into the urinary bladder;
 - (c) decompressing the body in the urinary bladder; and
 - (d) transmitting signals from the imaging device to a receiver.
45. The method of Claim 47 further comprising displacing the body within the urinary bladder to a desired location within the urinary bladder.
- 10 46. The method of Claim 47, further comprising one or more steps selected from the list comprising:
- (a) storing the signals in a computer memory;
 - (b) displaying the signals on a display;
 - (c) processing the signals in a computer processing unit;
 - 15 (d) storing results of the processing in a computer memory; and
 - (e) displaying results of the processing on a display.
47. A method for releasing one or more substances into a urinary bladder comprising steps of
- (a) providing a body comprising a pump fed by a reservoir;
 - 20 (b) loading the reservoir with the one or more substances;
 - (c) inserting the body into the urinary bladder; and
 - (d) activating the pump so as to release the one or more substances into the bladder.
48. The method according to Claim 44 wherein the pump is activated by a remote control.
- 25 49. A resiliently flexible, solid body for insertion into a urinary bladder.
50. The body according to Claim 49 comprising one or more magnetizable portions.
51. The body according to Claim 49 coated on its outer surface with a hydrophilic coating.
- 30

52. The body according to Claim 49 capable of storing one or more substances and releasing them into the urinary bladder.
53. The body according to Claim 49 comprising a device which can emit or absorb a signal detectable by an apparatus for imaging the urinary bladder.
- 5 54. The body according to Claim 49 comprising one or more monitoring devices for sampling a morphological or physiological parameter of the urinary bladder and for emitting a signal indicative of a quality or quantity of a sampled parameter.

1/13

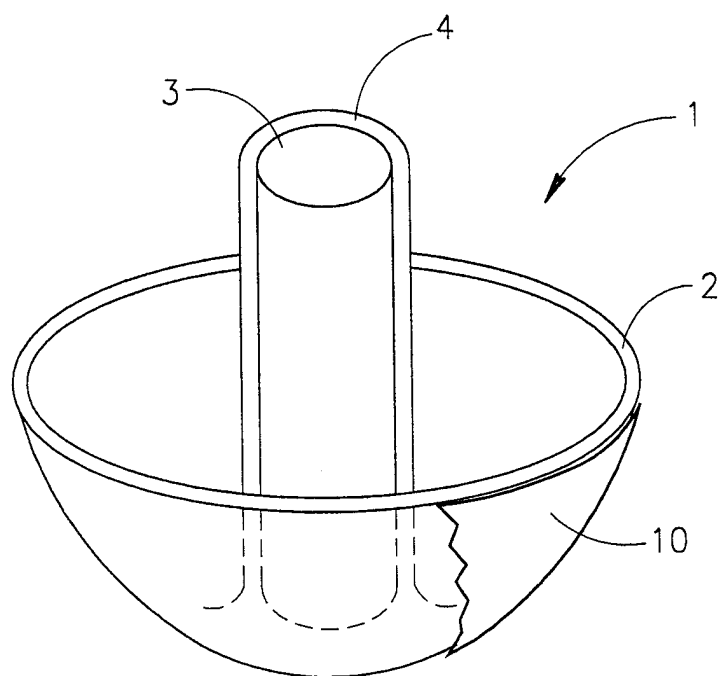


FIG.1

2/13

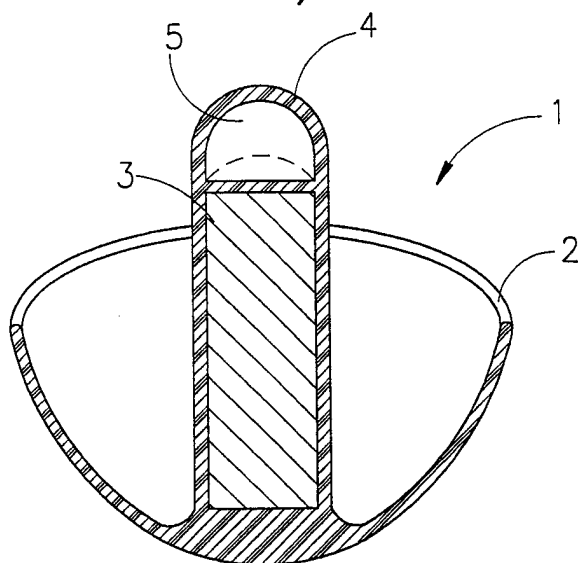


FIG. 2A

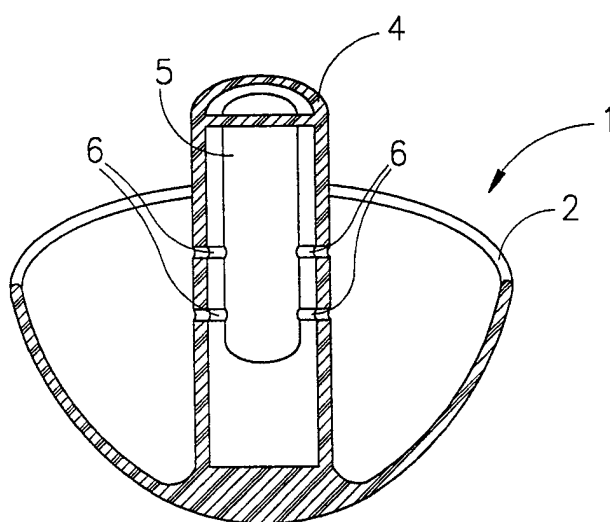


FIG. 2B

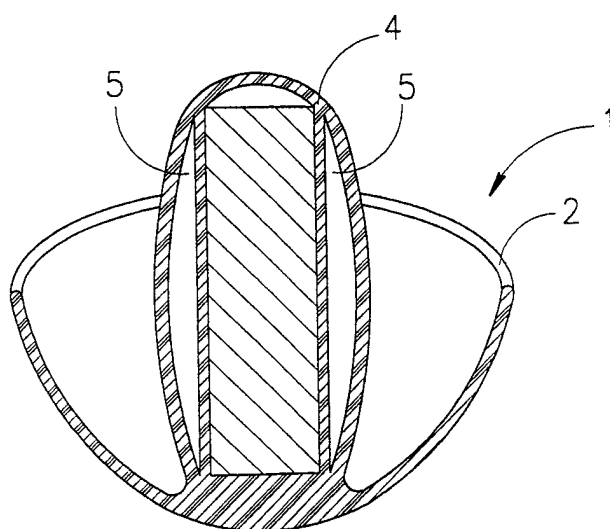


FIG. 2C

3/13

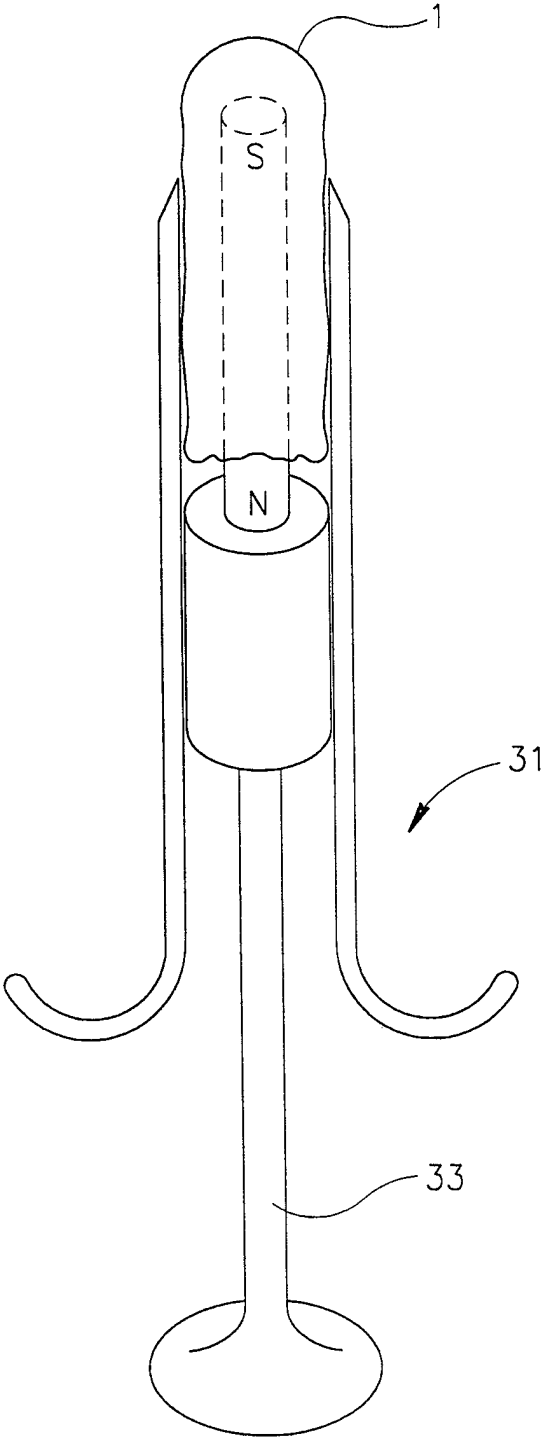


FIG.3

4/13

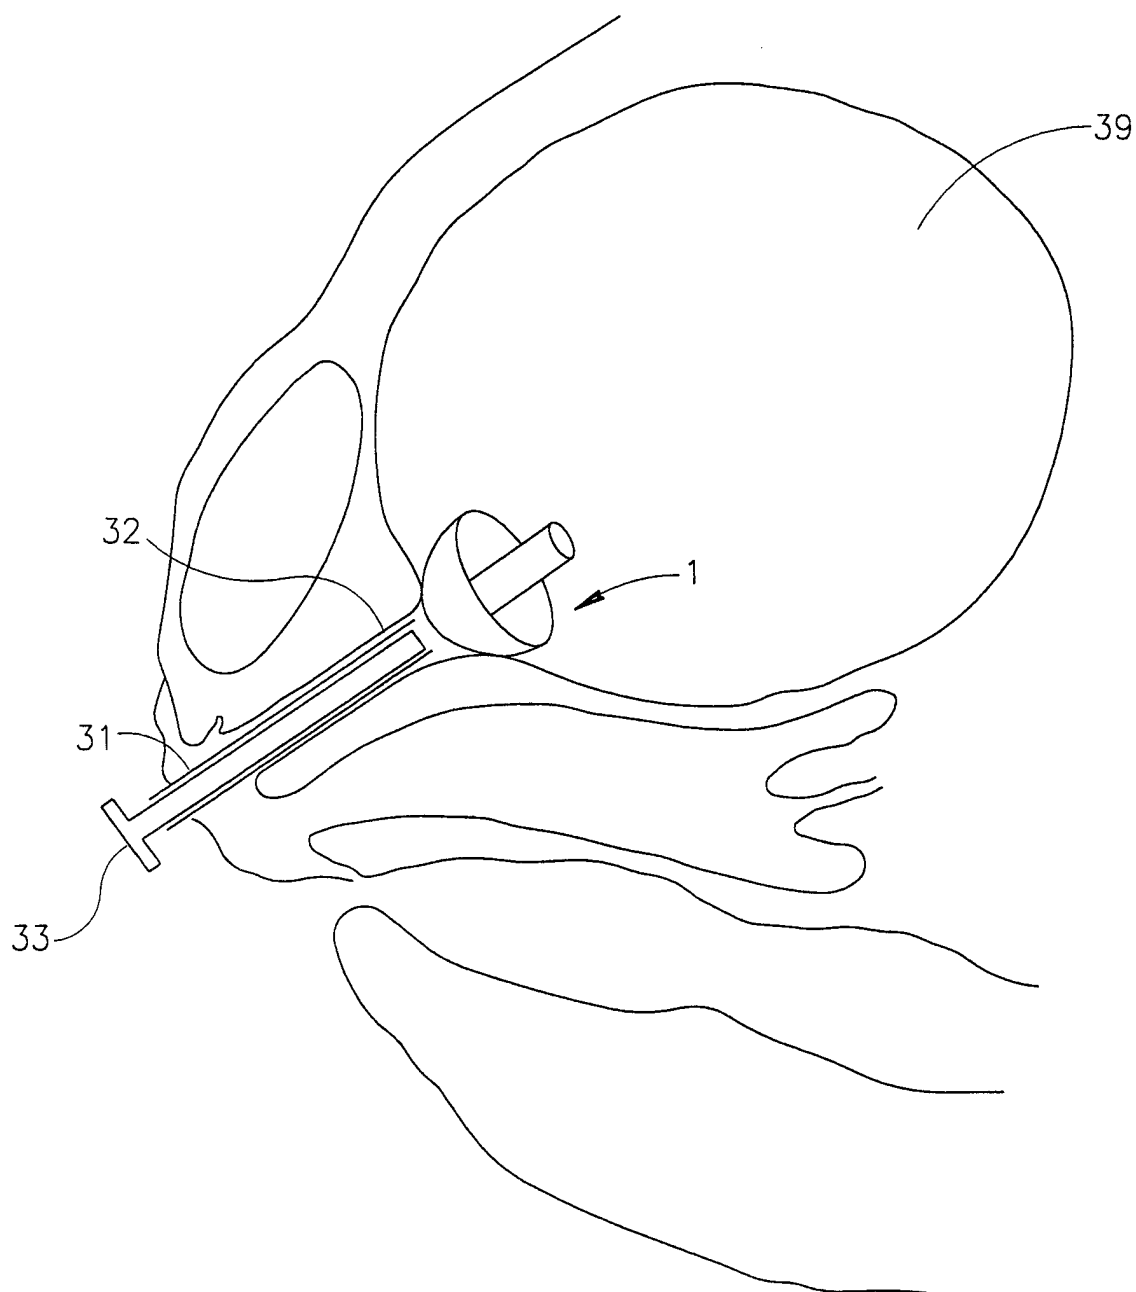


FIG. 4

5/13

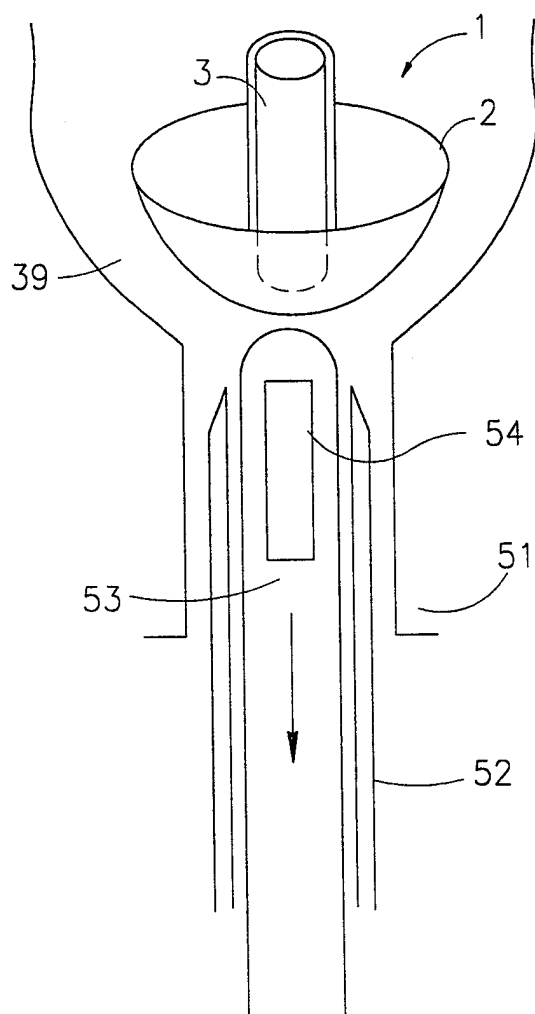


FIG. 5A

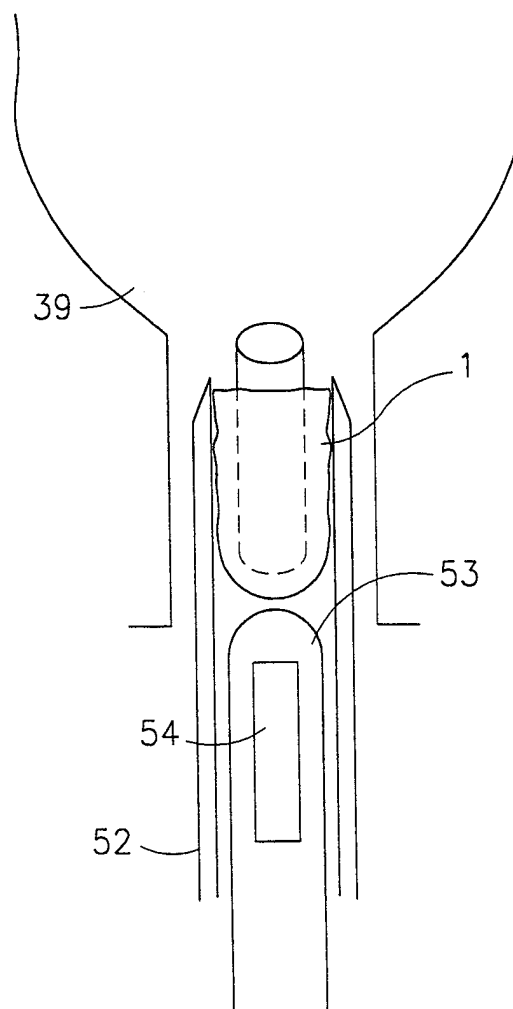


FIG. 5B

6/13

I

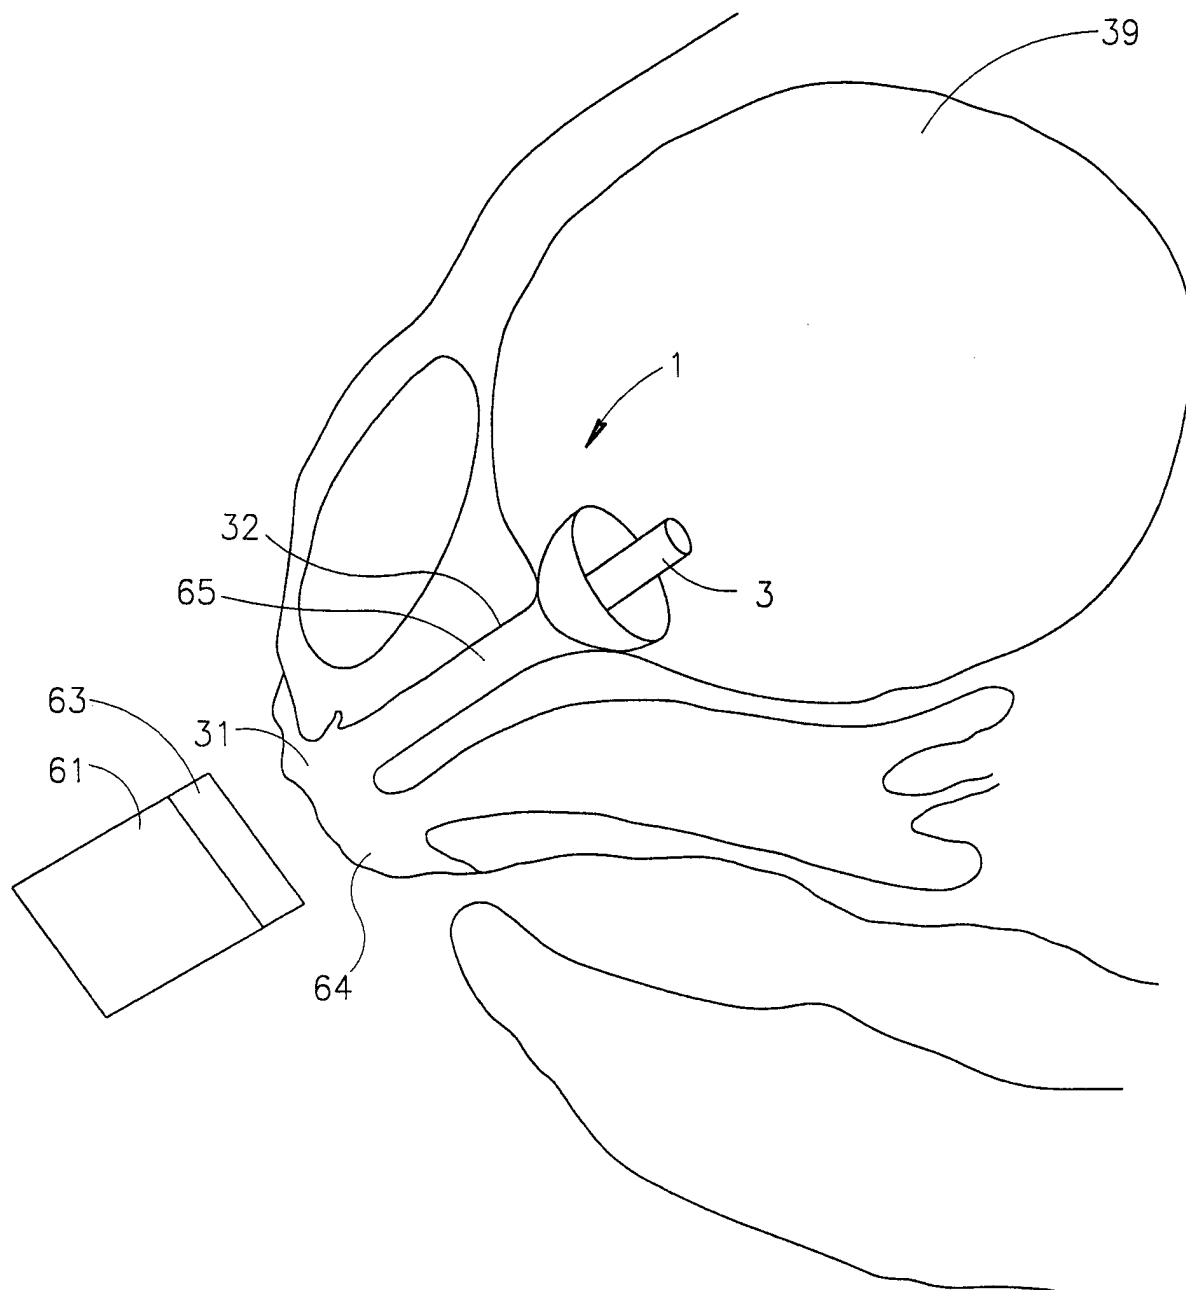


FIG. 6

7/13

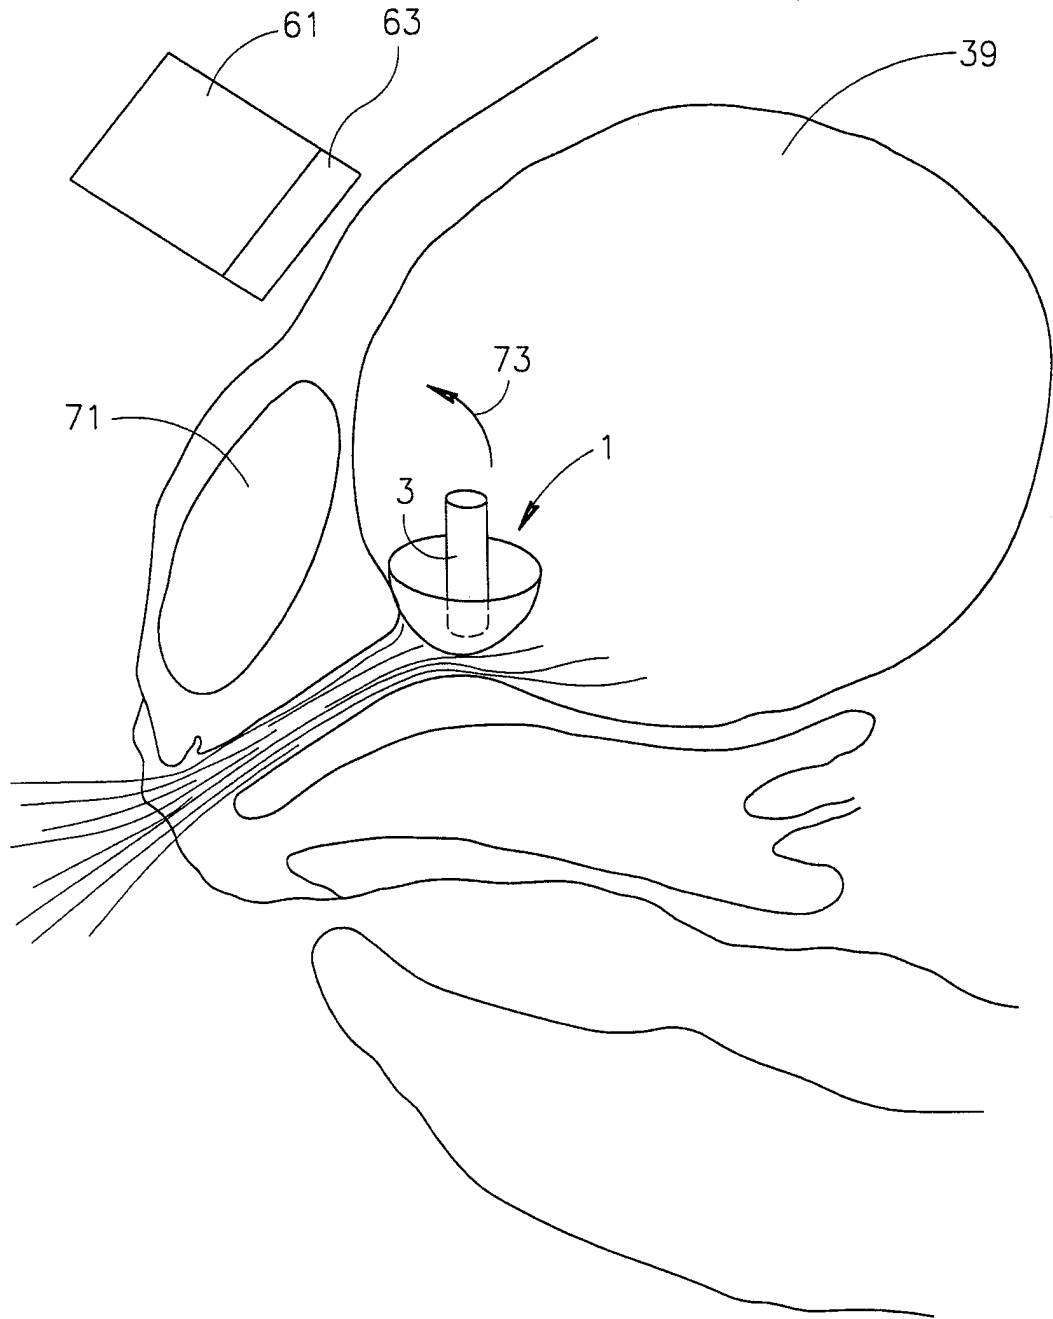


FIG. 7

8/13

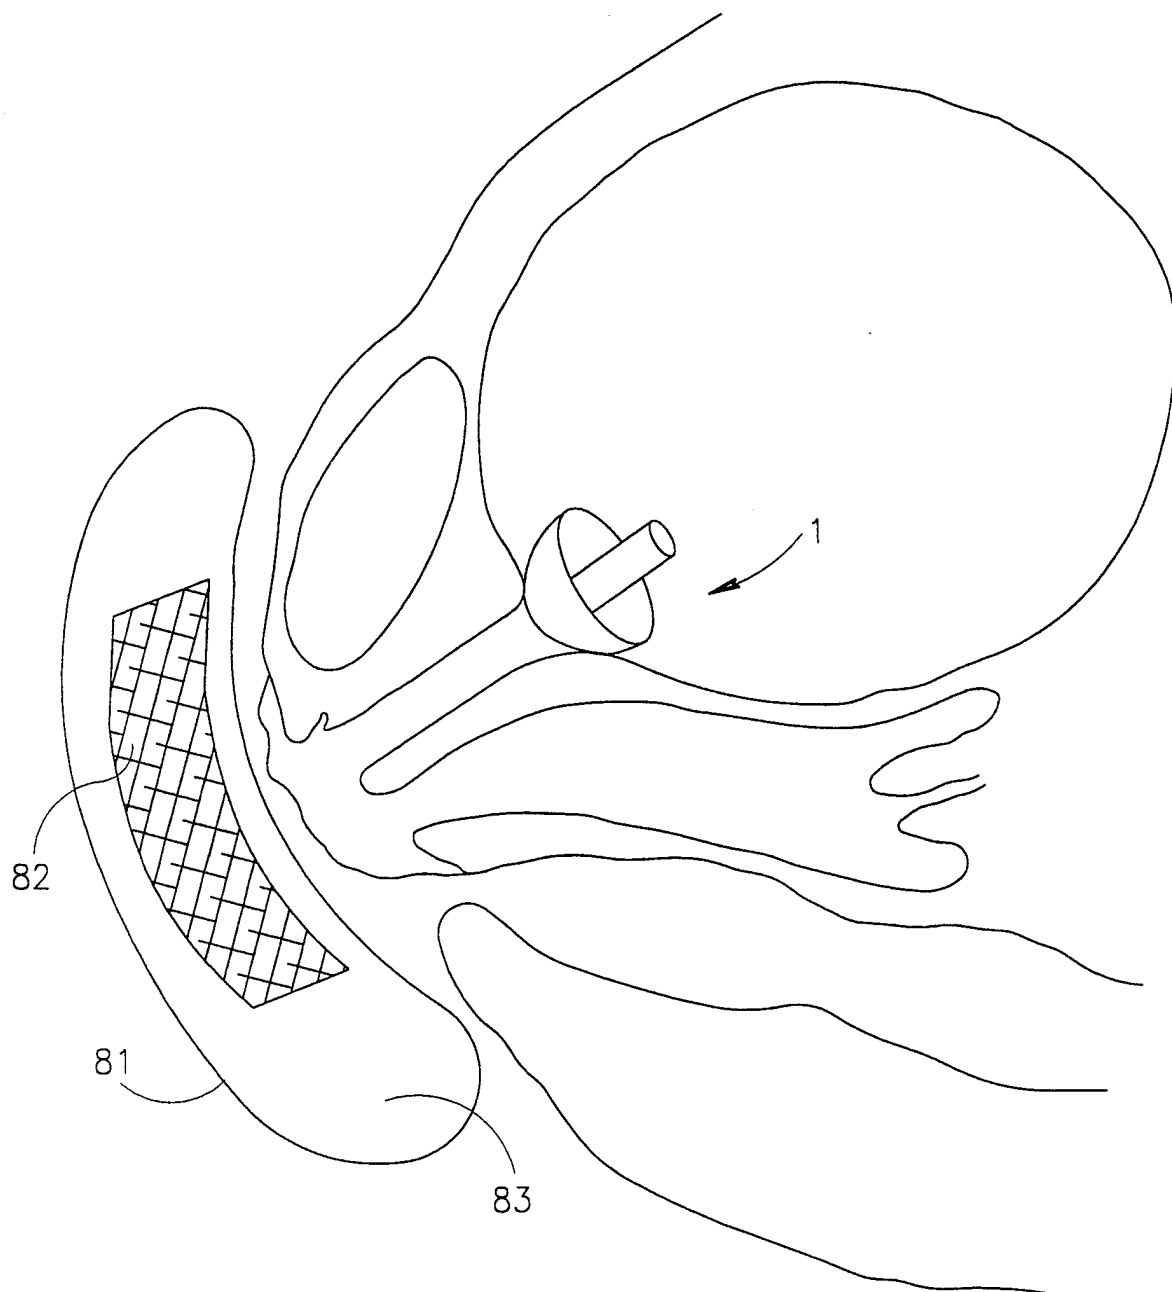


FIG. 8

9/13

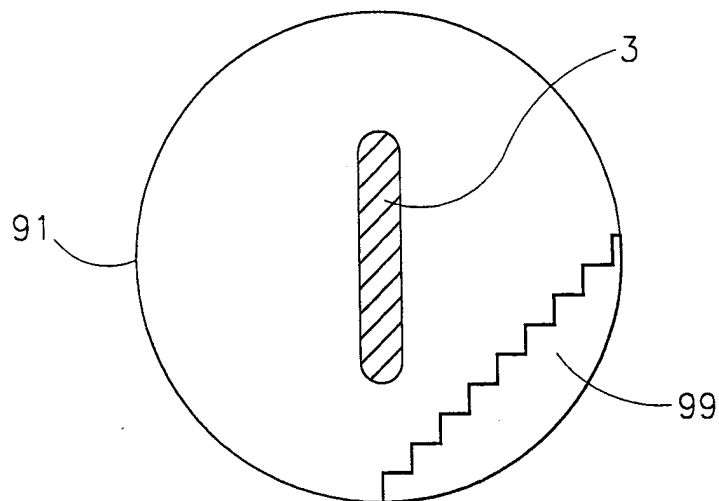


FIG. 9A

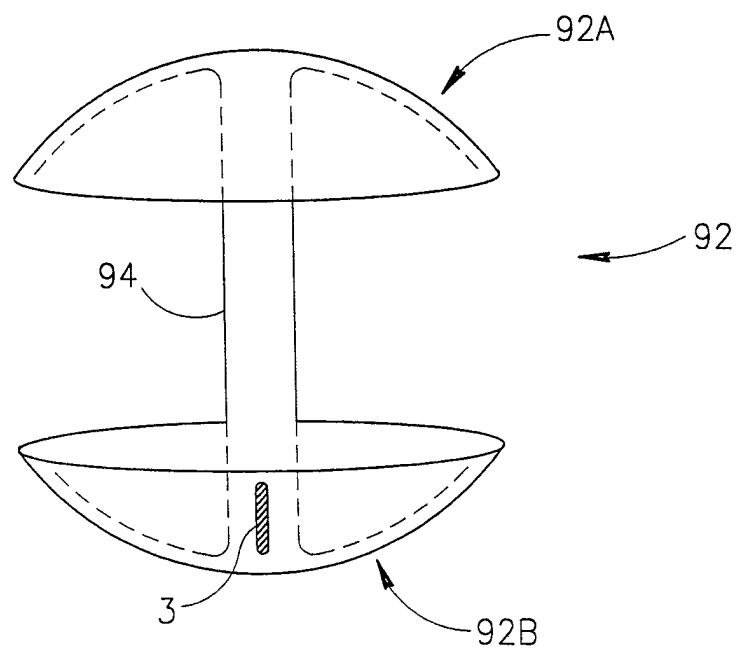


FIG. 9B

10/13

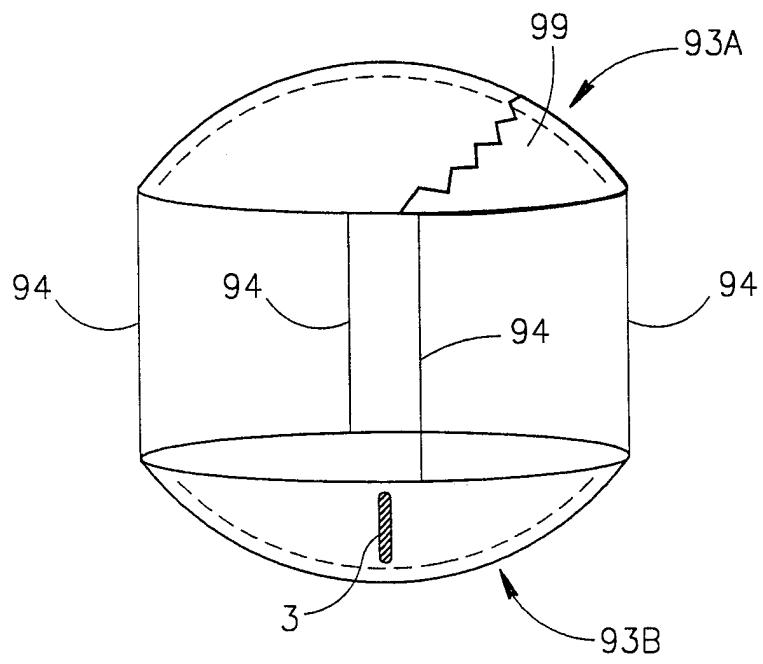


FIG. 9C

11/13

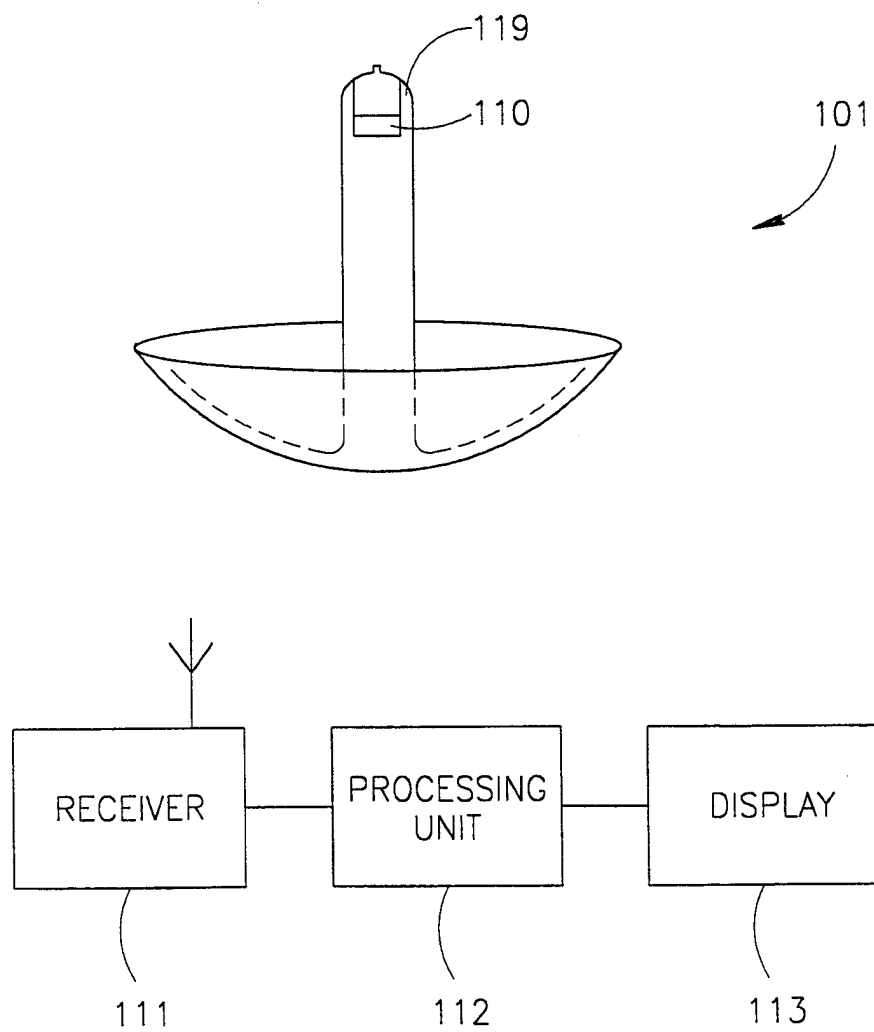


FIG.10

12/13

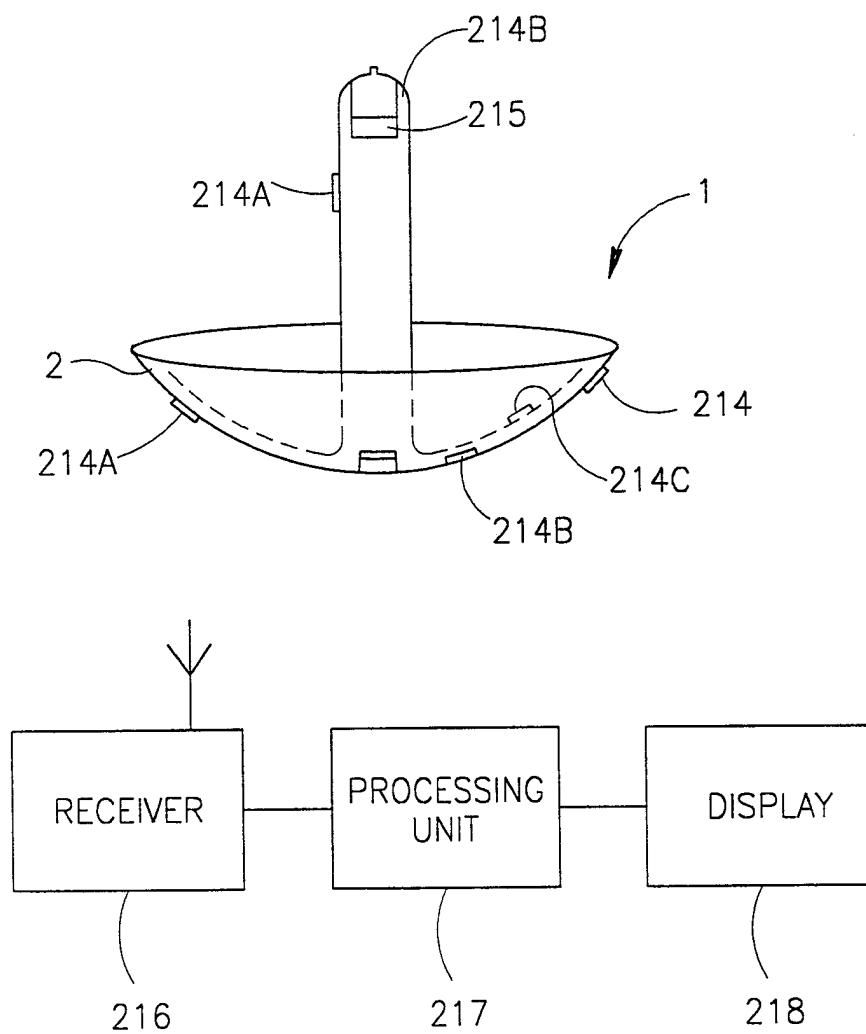


FIG.11

13/13

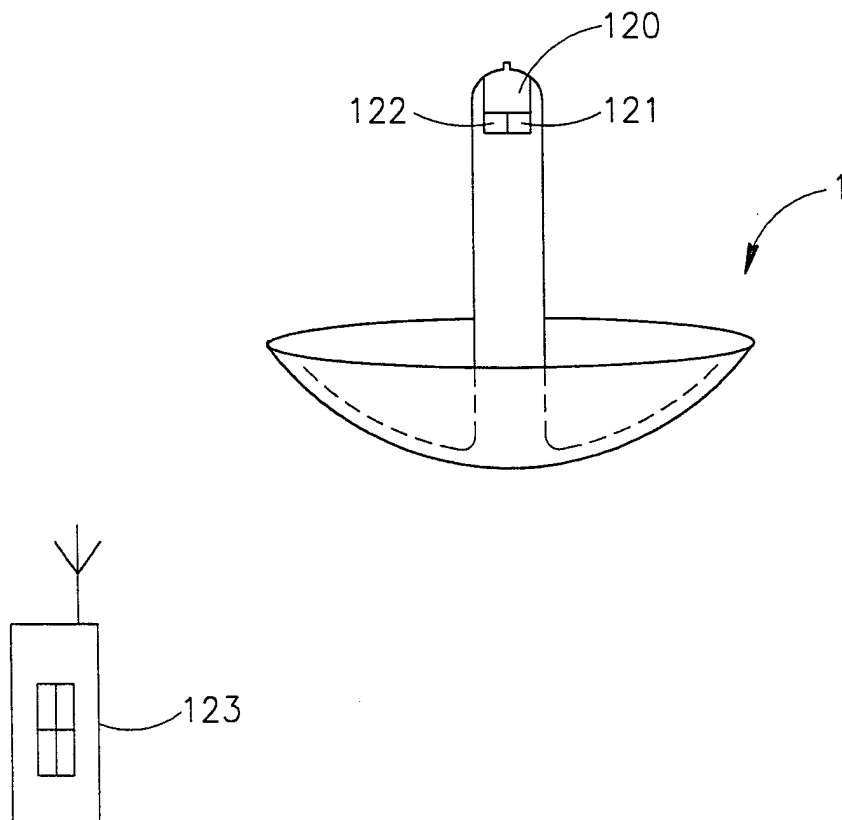


FIG.12

PCT/IL 00/00161

IPC 7 A61F2/00 A61M31/00

B. FIELDS SEARCHED

IPC 7 A61F A61M A61B

WPI Data, EPO-Internal

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
------------	--	-----------------------

X	US 4 850 963 A (SPARKS ET AL) 25 July 1989 (1989-07-25) cited in the application	1,2,6, 28,30, 31,49,50
Y	the whole document	13,14, 19-26, 33,34, 51-54
Y	US 5 704 353 A (KALB ET AL) 6 January 1998 (1998-01-06) the whole document	13, 23-26, 51,53,54
Y	US 4 871 542 A (VILHARDT) 3 October 1989 (1989-10-03) the whole document	14,34,52

— / —

☒☒

Patent family members are listed in annex.

^o Special categories of cited documents :

"P" document published prior to the international filing date but later than the priority date claimed

& document member of the same patent family

3 July 2000

10/07/2000

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Smith, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IL 00/00161

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>EP 0 667 115 A (STATE OF ISRAEL - MINISTRY OF DEFENCE) 16 August 1995 (1995-08-16) cited in the application the whole document -----</p>	19-22, 33

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IL 00/00161

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4850963	A	25-07-1989	AU 612692 B	18-07-1991
			AU 2177388 A	09-11-1989
			JP 1285263 A	16-11-1989
			EP 0357846 A	14-03-1990
US 5704353	A	06-01-1998	US 5476434 A	19-12-1995
			US 5352182 A	04-10-1994
			AU 3320695 A	04-03-1996
			CA 2195949 A	15-02-1996
			CN 1159155 A	10-09-1997
			EP 0793465 A	10-09-1997
			JP 10507652 T	28-07-1998
			WO 9603942 A	15-02-1996
			US 5509889 A	23-04-1996
			AU 679185 B	26-06-1997
			AU 4522893 A	30-12-1993
			CA 2136318 A	09-12-1993
			DE 69316615 D	26-02-1998
			DE 69316615 T	20-08-1998
			EP 0642325 A	15-03-1995
			JP 8500982 T	06-02-1996
			WO 9324075 A	09-12-1993
US 4871542	A	03-10-1989	AU 622877 B	30-04-1992
			AU 2685088 A	02-08-1990
			EP 0372137 A	13-06-1990
			IN 168149 A	09-02-1991
EP 667115	A	16-08-1995	US 5604531 A	18-02-1997

专利名称(译)	囊泡内装置		
公开(公告)号	EP1161200A1	公开(公告)日	2001-12-12
申请号	EP2000911217	申请日	2000-03-15
[标]申请(专利权)人(译)	英诺威讯有限公司		
申请(专利权)人(译)	INNOVENTIONS INC.		
当前申请(专利权)人(译)	INNOVENTIONS INC.		
[标]发明人	YACHIA DANIEL HIRSZOWICZ ERAN		
发明人	YACHIA, DANIEL HIRSZOWICZ, ERAN		
IPC分类号	A61B5/00 A61B1/04 A61B1/303 A61B1/307 A61B1/31 A61F2/00 A61F5/37 A61L2/16 A61M25/00 A61M37/00 A61M31/00		
CPC分类号	A61M25/0082 A61F2/0022 A61F2/0027 A61M2209/04 A61M2210/1085		
优先权	09/363287 1999-07-28 US 09/268109 1999-03-15 US		
外部链接	Espacenet		

摘要(译)

一种治疗个体膀胱的系统。该系统包括弹性柔韧的固体，用于插入膀胱。该系统还包括用于将身体插入膀胱或用于从膀胱移除身体的敷抹器。该系统可用于治疗膀胱，监测膀胱和治疗尿失禁。