

(19)



(11)

EP 1 911 395 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

09.11.2011 Bulletin 2011/45

(21) Application number: **06781904.5**

(22) Date of filing: **28.07.2006**

(51) Int Cl.:

A61B 5/00 (2006.01)

(86) International application number:

PCT/JP2006/314994

(87) International publication number:

WO 2007/013594 (01.02.2007 Gazette 2007/05)

(54) **NEEDLE INSERTION DEVICE**

NADELEINFÜHRUNGSVORRICHTUNG

DISPOSITIF D'INSERTION D'AIGUILLE

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(30) Priority: **29.07.2005 JP 2005221924**

(43) Date of publication of application:

16.04.2008 Bulletin 2008/16

(73) Proprietor: **ARKRAY, Inc.**

Kyoto-shi, Kyoto 601-8045 (JP)

(72) Inventor: **FUKUZAWA, Masahiro,**

c/o ARKRAY, Inc.

Kyoto-shi,

Kyoto 601-8045 (JP)

(74) Representative: **Vocke, Henrik**

Hoffmann - Eitle

Patent- und Rechtsanwälte

Arabellastraße 4

81925 München (DE)

(56) References cited:

EP-A1- 1 815 792

WO-A-2004/043258

WO-A1-2006/046570

JP-A- 2000 516 496

JP-A- 2004 113 580

JP-A- 2004 329 248

US-A- 5 628 764

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 911 395 B1

Description

TECHNICAL FIELD

[0001] The present invention relates to a lancet device used for producing a punctured wound on the skin when fluid or the like is obtained through the skin.

BACKGROUND ART

[0002] With the growing number of diabetic patients, such cases are increasing that the diabetic patients measure the blood glucose level for themselves and perform self-monitoring its variation at their residences or the like. In view of the situation, a lancet device with a puncture needle has been produced, which is capable of obtaining blood necessary for measuring the blood glucose level by easily producing a punctured wound on the tip of a finger or the like when the blood is obtained for measuring the blood glucose level.

[0003] The lancet device includes a puncture needle on the tip thereof. The puncture needle is shot by means of the spring force while the tip of the lancet device is put on the tip of a finger or the like, and is protruded from the tip of the lancet device so that the protruded length corresponds to a few millimeters to 2.0 millimeters. With the above operation, the tip of a finger or the like is cut by the puncture needle and blood bleeding from the punctured wound is obtained. Then, the obtained blood is dropped on a sensor portion or the like of a glucose meter. Thus, it is possible to measure the glucose level.

[0004] As described above, this type of lancet device includes a puncture needle for producing a punctured wound on the tip of a finger or the like of a patient. Because of this, there has been a risk that especially the older people with poor eyesight or the like get hurt by mishandling the puncture needle.

[0005] In view of this, a so-called safety lancet device has been produced. The safety lancet device employs a configuration that a puncture needle is not exposed out of the main body if it is not needed (See Patent Document 1).

[0006] For example, the Patent Document 1 discloses a lancet device including a puncture needle cartridge and a lancet device body that the puncture needle cartridge is detachably/reattachably mounted to the tip thereof. The lancet device body includes an elongated housing, a plunger, a regulator, a puncture controller, a set controller, a first coil spring for urging the plunger in a front end direction, and a second coil spring for urging the plunger in a base end direction. The housing is composed of a housing body and a cap-shaped member that is provided in the base end portion of the housing body. According to the configuration, the puncture needle cartridge is detachably/reattachably mounted to the tip of the housing. Therefore, it is possible to replace the puncture needle safely, easily and promptly.

<Patent Document 1 >

[0007] Japanese Patent Application Publication No. 2000-245717 (disclosed on September 12, 2000).

[0008] Document JP 2004 329248 A discloses a lancet device with a lancet that is held within a sleeve. There is provided a cap which is removed before use.

[0009] WO 2004/043258 A shows a further lancet device with a lancet that is held within a front plunger. This front plunger can be moved by a piston which is driven by a pressure spring. Such lancet device also has the feature of the pre-characterizing part of claim 1.

[0010] Document JP 2004 113580 A shows a further lancet device with a lancet being movable inserted into a sleeve. The lancet itself can be moved by a piston which is mounted to a base end of the lancet. The surrounding sleeve can be inserted into a holding element.

[0011] US 6,090,124 A describes a skin pricker with a spring-loaded lancet holder wherein the final turn of the coil spring squeezes the socket which receives the lancet.

DISCLOSURE OF THE INVENTION

(PROBLEMS THE INVENTION IS TO SOLVE)

[0012] However, the above conventional lancet devices have a following problem. Specifically, in the lancet device disclosed on the above described publication, the base end portion of the lancet is inserted into a cylindrical mounting portion of the plunger that is included in the puncture needle body when the puncture needle cartridge is mounted to the lancet device body from the front end portion side of the lancet device body. Here, the outer diameter of the base end portion of the lancet and the inner diameter of the mounting portion of the plunger are formed in approximately the same dimension. Therefore, when the base end portion of the lancet is inserted into the mounting portion of the plunger, friction is generated between them. The lancet is thus retained in the lancet device body and is prevented from dropping out of the puncture by means of the frictional force. However, the retaining force for the lancet may not be able to be maintained only by depending on the frictional force generated when the base end portion of the lancet is inserted into the opening with approximately the same dimension as the base end portion.

[0013] An object of the present invention is to provide a lancet device with a simple configuration that makes it possible to further strengthen the retaining force for the lancet during use than ever before.

(MEANS TO SOLVE THE PROBLEMS)

[0014] The lancet device in accordance with the present invention is defined in claims 1 and 3.

[0015] With this configuration, when the lancet holder retaining the lancet to be attached to the mounting portion

of the lancet holder is moved forward or backward in the puncture direction, the fastening member makes contact with the outer peripheral surface of the lancet holder, and the lancet holder is elastically deformed inwardly. Thus generated pressure increases the frictional force between the lancet and the lancet holder, and accordingly the lancet is retained.

[0016] Here, when the outer diameter of the base end portion of the lancet and the inner diameter of the mounting portion of the lancet holder are formed in approximately the same dimension, for instance, the frictional force is generated between the mounting portion of the lancet holder and the base end portion of the lancet.

[0017] In the conventional lancet devices, the lancet is retained in the main body side including the lancet holder only by means of the frictional force generated by regulating the dimensions of the above both members. However, when the lancet and the lancet holder are made of a resin or the like, for instance, the sufficient retaining force may not be achieved only by means of the retaining force that depends only on the frictional force, because the dimensions may be varied by dilation and contraction, wearing, or the like with temperature change. In this case, there is a risk that the lancet is dropped out of the lancet holder when a puncture is performed.

[0018] In the lancet device of the present invention, when the lancet is retained in the lancet holder, the frictional force generated between the lancet and the lancet holder is increased by the fastening pressure generated when the lancet holder and the fastening member make contact with each other.

[0019] Because of this, it is possible to ensure the sufficient retaining force, for example, when a puncture is performed, compared to the conventional lancet devices that retains a lancet only by means of the frictional force. In addition, it is possible to achieve a safer lancet device with a simple configuration in which a fastening portion for making contact with the outer peripheral side of the lancet holder is provided.

[0020] Optionally the outer diameter of the base end portion of the lancet and inner diameter of the mounting portion of the lancet holder are formed in approximately the same dimension.

[0021] Here, the lancet and the lancet holder are formed such that the outer diameter of the base end portion of the lancet and the inner diameter of the mounting portion of the lancet holder have approximately the same dimension.

[0022] With this configuration, the base end portion of the lancet that is inserted into the mounting portion of the lancet holder makes contact with the inner peripheral surface of the mounting portion of the lancet holder. Because of this, it is possible to generate the frictional force by the pressure generated between the lancet and the lancet holder. As a result, it is possible to ensure the first-phased retaining force with respect to the lancet in the lancet device of the present invention.

[0023] In the lancet device in accordance with the

present invention, the outer peripheral surface of the mounting portion of the lancet holder and the fastening member are configured to make contact with each other by moving the lancet holder to the rear side in the puncture direction relative to the fastening member when the lancet holder is fastened.

[0024] Here, for example, the lancet is inserted into mounting portion of the lancet holder when the lancet is mounted, and the lancet holder is further moved to the rear side in the puncture direction after the lancet is mounted to the mounting portion. Accordingly, the fastening member is made contact with the outer peripheral surface of the mounting portion of the lancet holder.

[0025] With this configuration, it is possible to fasten the lancet holder as a following step of a series of operation performed when the lancet is mounted to the mounting portion. Therefore, it is possible to enhance operability when the lancet is mounted and it is also possible to ensure the sufficient retaining force for retaining the lancet when used. In addition, it is necessary to only move the lancet backward in the puncture direction in a process from a step of mounting the lancet to the lancet holder to a step of fastening the lancet to the lancet holder. Accordingly, it is possible to achieve a lancet device in which the sufficient retaining force is easily ensured.

[0026] Optionally, the fastened state of the lancet holder is configured to be released by moving the lancet holder to the front side in the puncture direction with respect to the fastening member when the lancet is removed from the lancet holder.

[0027] Here, in a lancet device that a lancet is mounted to a lancet holder by moving the lancet to the rear side in the puncture direction and is then fastened, when the lancet is disposed after a puncture is performed, the fastened state is released by moving the lancet holder to the front side in the puncture direction with respect to the fastening member.

[0028] With this configuration, the fastened state in the lancet holder is easily released only by moving the lancet in an opposite direction from the direction in which the lancet is mounted (i.e., front side in the puncture direction), and accordingly it is possible to retain the lancet only by means of the frictional force. Here, it is possible to easily remove the lancet from the lancet holder by further moving the lancet to the front side in the puncture direction. As a result, while the large retaining force is ensured only when the lancet is used, it is possible to pull the lancet out of the lancet holder after the retaining force is weakened when the lancet is disposed. Accordingly, it is also possible to enhance operability when the lancet is disposed.

[0029] In the lancet device in accordance with the present invention, a taper portion is formed in a tip of the mounting portion of the lancet holder on the front side in the puncture direction so that the outer diameter of the mounting portion becomes larger toward the front side in the puncture direction.

[0030] Here, the taper portion that the outer diameter

thereof is formed to be larger toward the front side in the puncture direction is formed in the end portion of the mounting portion of the lancet holder on the front side in the puncture direction.

[0031] With this configuration, when the lancet holder is moved to the rear side in the puncture direction relative to the fastening member, the taper portion formed in the mounting portion of the lancet holder is moved while it makes contact with the inner side of the fastening member. Thus, it is possible to inwardly fasten the mounting portion of the lancet holder. As a result, it is possible to achieve a fastening effect in the lancet holder with a simple configuration in which only the shape of the portion that the fastening member makes contact with the lancet holder is devised.

[0032] In the alternative lancet device in accordance with the present invention, the outer peripheral surface of the mounting portion of the lancet holder and the fastening member are configured to make contact with each other by relatively moving the fastening member to the rear side in the puncture direction relative to the lancet holder when the lancet holder is fastened.

[0033] Here, for example, the lancet is inserted into the mounting portion of the lancet holder when the lancet is mounted, and the fastening member is then moved to the rear side of the lancet holder in the puncture direction after the lancet is mounted to the mounting portion. Accordingly, the fastening member is made contact with the outer peripheral surface of the mounting portion of the lancet holder.

[0034] With this configuration, it is possible to fasten the lancet holder by a simple operation that the fastening member is only moved after the lancet is mounted. Therefore, it is possible to enhance operability when the lancet is mounted, and it is also possible to ensure the sufficient retaining force for retaining the lancet.

[0035] Optionally, the fastened state of the lancet holder is configured to be released by moving the fastening member to the front side in the puncture direction relative to the lancet holder when the lancet is removed from the lancet holder.

[0036] Here, in a lancet device that the lancet is mounted to the lancet holder by moving the lancet to the rear side in the puncture direction and the lancet holder is then fastened by moving the fastening member to the rear side in the puncture direction with respect to the lancet holder, when the lancet is disposed after a puncture is performed, the fastened state is released by moving the fastening member to the front side in the puncture direction with respect to the lancet holder.

[0037] With this configuration, it is possible to easily release the fastened state in the lancet holder and to produce the state that the lancet is retained only by means of the frictional force, only by moving the lancet to an opposite direction (i.e., front side in the puncture direction) from the direction when the fastened state is produced after the lancet is mounted. Here, it is possible to easily remove the lancet from the lancet holder by fur-

ther moving the lancet to the front side in the puncture direction. As a result, while the large retaining force is ensured only when the lancet is used, it is possible to pull the lancet out of the lancet holder after the retaining force is weakened when the lancet is disposed. Accordingly, it is also possible to enhance operability when the lancet is disposed.

[0038] In the alternative lancet device in accordance with the present invention, a taper portion is formed in a tip of the fastening member on the front side in the puncture direction so that the inner diameter of the fastening member becomes smaller toward the front side in the puncture direction.

[0039] Here, the taper portion whose inner diameter becomes smaller toward the front side in the puncture direction is formed in the end portion of the fastening member on the front side in the puncture direction.

[0040] With this configuration, when the lancet holder is moved to the front side in the puncture direction relative to the fastening member, the mounting portion of the lancet holder moves such that it mounts on the inner side of the above described taper portion. Accordingly, it is possible to inwardly fasten the mounting portion of the lancet holder. As a result, it is possible to achieve a fastening effect in the lancet holder with a simple configuration in which only the shape of the portion that the fastening member makes contact with the lancet holder is devised.

[0041] Optionally, the fastening member is configured to elastically deform the mounting portion of the lancet holder making contact with the fastening member in a direction intersectional to the puncture direction when the lancet holder is fastened.

[0042] Here, the lancet holder is fastened by elastically deforming the mounting portion of the lancet holder that makes contact with the fastening member.

[0043] With this configuration, for example, when the fastened state of the lancet holder is released at the same time as the removal of the lancet after a puncture is performed, the shape of a elastically deformed portion of the mounting portion of the lancet holder is restored to the original shape. Accordingly, it is possible to easily restore to the state that the lancet is retained in the lancet holder only by means of the frictional force. As a result, it is possible to achieve a structure that the fastening force is generated in the lancet holder only when necessary.

[0044] Optionally, a portion of the base end portion of the lancet to be inserted into the mounting portion of the lancet holder is formed to have the uniform outer diameter in the puncture direction.

[0045] Here, the diameter of the base end portion of the lancet is uniformly formed in the puncture direction. Therefore, for the purpose of retaining the base end portion of the lancet, which is inserted into the mounting portion of the lancet holder, it is necessary to retain the base end portion of the lancet in the lancet holder by means of the frictional resistance generated between the both by increasing the area of the mounting portion of

the lancet holder that makes contact with the base end portion of the lancet.

[0046] In the lancet device of the present invention, the retained state is produced by the frictional force generated between the lancet and the lancet holder, and the pressure is further applied by the fastened state produced by the fastening member. Thus, the frictional force is increased.

[0047] With the configuration, even when the diameter of a portion of the base end portion of the lancet, which is retained in the lancet holder, is uniformly formed, it is possible to ensure the sufficient retaining force when the lancet device is used by increasing the frictional force with the fastening pressure applied by the fastening member.

[0048] Optionally, the lancet includes a puncture body, a casing portion and an engaging portion. The casing portion has a tubular portion and an opening, and the tubular portion is configured to accommodate the puncture body so that the puncture body is allowed to move back and forth in the puncture direction, and the opening is formed in an end portion of the casing portion on a protruding side of the puncture needle. The engagement portion is configured to retain the puncture body in the interior of the casing portion so that the puncture body is not allowed to move back and forth in the puncture direction when the puncture body is removed from the lancet holder. In addition, the retaining force for retaining the lancet in the lancet holder after the lancet holder is fastened by the fastening member is smaller than the retaining force by the engaging portion.

[0049] With this configuration, an engagement state is produced in the engagement portion when the lancet is removed from the lancet holder after a puncture is performed, and then the fastened state produced by the fastening member is released. Thus, it is possible to prevent the puncture needle from being exposed when the lancet is removed from the main body side after a puncture is performed. Accordingly, it is possible to provide a safer lancet.

[0050] Optionally, the retaining force for retaining the lancet in the lancet holder after the lancet holder is fastened by the fastening member is larger than the force necessary for engaging the engaging portion.

[0051] With this configuration, in such a situation that the lancet is disposed, it is possible to prevent the fastened and retained state produced by the fastening member from being released until the engaged state is produced in the engaging portion. As a result, it is possible to release the fastened state while the puncture body is retained in the casing portion by completing the engaged state in the engaging portion by the time when the lancet is removed from the lancet holder.

[0052] Optionally, the lancet device further includes an urging member that is provided between the fastening member and the lancet holder and is configured to apply the urging force toward the fastening side of the lancet holder in the puncture direction.

[0053] Here, the urging member that applies the urging force for keeping the fastening force is provided between the puncture body holder and the fastening member, both of which make contact with each other and produce the fastened state.

[0054] With this configuration, it is possible to prevent the urging member from releasing the fastened state even after the outer peripheral portion of the puncture body holder is inwardly fastened. Therefore, it is possible to stably keep the fastened state.

[0055] Optionally, the lancet holder retains the base end portion of the lancet by means of the frictional force.

[0056] With this configuration, the lancet device functions as a mechanism for retaining lancet in the lancet holder, and combines the first-phased retaining force, which is defined as the frictional force generated when the lancet is inserted into the lancet holder, and the second-phased retaining force, which is defined as the strengthened frictional force that is generated by applying the fastening pressure by the fastening member to the first-phased retaining force. As a result, it is possible to further increase the retaining force in the lancet holder.

[0057] Optionally, a groove portion is formed on the surface of the base end portion to be along the puncture direction.

[0058] With this configuration, when the cap formed on the opposite side from the base end portion in the lancet is torsionally-sheared, the groove portion formed in the base end portion functions as resistance to rotation of the lancet while the lancet is retained in the lancet holder. Thus, it is possible to prevent the retained state of the lancet in the lancet holder from being loosened. In addition, it is possible to further effectively prevent rotation of the lancet in the lancet holder by forming a convex portion and/or a slit on the mounting portion side of the lancet holder for retaining the base end portion of the lancet so that the convex portion and/or the slit corresponds to the above described groove portion.

[0059] Optionally, a plurality of concave-convex portions are formed on the surface of the base end portion.

[0060] With this configuration, the frictional force to be generated between the mounting portion of the lancet holder and the lancet is increased by forming the concave-convex portions such as the satin finished surface on the surface of the base end portion of the lancet. Accordingly, it is possible to more tightly fasten the lancet in the lancet holder in the rotational direction and the puncture direction.

[0061] Optionally, the base end portion includes a concave portion (or a convex portion) in a portion thereof fastened by the fastening member, and the fastening member includes a convex portion (or a concave portion) engaging with a concave portion (or a convex portion).

[0062] With this configuration, the lancet is retained in the lancet holder by means of engagement between the concave portion and the convex portion, and the engaging portion is further fastened by the fastening member. Thus, it is possible to further tightly retain the lancet in

the lancet holder.

BRIEF DESCRIPTION OF THE DRAWINGS

[0063]

Fig. 1 is a perspective view illustrating appearance of a lancet device in accordance with an embodiment of the present invention.

Fig. 2 is a perspective view illustrating a lancet and a main body, both of which make up the lancet device illustrated in Fig. 1.

Fig. 3 is a partial cross-sectional view illustrating an interior configuration of a casing of the lancet included in the lancet device illustrated in Fig. 1.

Fig. 4 is a perspective view illustrating a condition that a puncture body and a cap, both of which are included in the lancet illustrated in Fig. 2, are detached from each other.

Fig. 5 is a cross-sectional view illustrating an interior configuration of a casing included in the lancet illustrated in Fig. 2.

Fig. 6 is a perspective view illustrating a configuration of a main body included in the lancet device illustrated in Fig. 1.

Figs. 7(a) and 7(b) are sectional side views illustrating a condition that the lancet in Fig. 2 is attached to a puncture body holder on the main body side.

Figs. 8(a) and 8(b) are sectional side views illustrating a condition that the lancet in Fig. 2 is detached from the main body side after use.

Fig. 9 is a sectional side view illustrating a condition that the puncture body and the casing in Fig. 8 are engaged with each other.

Figs. 10(a) and 10(b) are sectional side views illustrating conditions of a puncture body holder of a puncture body included in a lancet in accordance with other embodiment of the present invention before and after fastened, respectively.

Figs. 11(a) and 11(b) are sectional side views illustrating conditions of a puncture body holder of a puncture body included in a lancet in accordance with other embodiment of the present invention before and after fastened, respectively.

Figs. 12(a) and 12(b) are sectional side views illustrating conditions of a puncture body holder of a puncture body included in a lancet in accordance with other embodiment of the present invention before and after fastened, respectively.

Fig. 13 is a sectional side view illustrating a condition that a lancet body holder of a lancet body of a lancet in accordance with other embodiment of the present invention is fastened by means of a spring.

Fig. 14 is a sectional side view illustrating a configuration of a lancet in accordance with other embodiment of the present invention.

Fig. 15 is a sectional side view illustrating a configuration of a lancet in accordance with other embod-

iment of the present invention.

Fig. 16 is a sectional side view illustrating a configuration of a lancet device in accordance with other embodiment of the present invention.

Fig. 17 is a perspective view illustrating a configuration of a lancet body holder included in a lancet device in accordance with other embodiment of the present invention.

5

10

DESCRIPTION OF THE REFERENCE NUMERALS

[0064]

10

lancet device

15

lancet

puncture needle

20

casing (casing member)

22a inner peripheral surface

22b convex portion (engaging portion)

25

22c groove

23 puncture body

30

23a taper portion

23b flange portion

23c groove (engaging portion)

35

23d insertion portion (base end portion)

23e vertical groove (groove portion)

40

23f concave-convex

23g concave portion

24 cap

45

24a protruding portion

24b lid member

50

24c hole

30 main body

31 coil spring

55

32 puncture body holder (lancet holder)

32a mounting portion

32b taper portion
 32c convex portion
 32d slit
 33 rotator
 34 urging member
 35 housing
 35a puncture hole
 35b opening
 36 removing portion
 37 setting-release button
 38 fastening member
 38a abutment
 38b convex portion
 39 retaining abutment
 40 elastic member
 52 puncture body holder (lancet holder)
 52a convex portion
 58 fastening member
 62 puncture body holder (lancet holder)
 68 fastening member
 72 puncture body holder (lancet holder)
 78 fastening member
 80 coil spring (urging member)
 110 lancet
 120 lancet
 130 lancet
 140 lancet device

BEST MODE OF CARRYING OUT THE INVENTION

[0065] A lancet device (puncture device) 10 in accordance with an embodiment of the present invention will be

hereinafter explained with reference to Figs. 1 to 9.

ENTIRE CONFIGURATION OF LANCET DEVICE 10

[0066] The lancet device 10 in accordance with an embodiment of the present invention is a device used for taking fluid from a diabetic patient when measurement of the blood glucose level or the like is performed for the patient. When the lancet device 10 is used, a puncture wound is formed on the skin by protruding a puncture needle 21 (see Fig. 4) from an opening formed on a tip of the lancet device 10 while the tip is press-contacted with the skin.

[0067] Specifically, as illustrated in Figs. 1 and 2, the lancet device 10 includes a lancet 20 and a main body 30.

[0068] The lancet 20 includes the stainless puncture needle 21 (see Fig. 4) for forming a puncture wound in the interior thereof, and as illustrated in Fig. 2, it is attached to the main body 30 from the front end side of the main body 30.

[0069] The main body 30 includes a coil spring 31 (see Fig. 6) for applying the urging force toward the puncture needle 21, and a return spring (not illustrated in the figures). The coil spring 31 applies the urging force for protruding the puncture needle 21 toward the front end side in a puncture direction. The return spring applies the opposite urging force from the urging force applied by the coil spring 31 in order to bring the puncture needle 21 shot by means of the coil spring 31 back into a housing 35.

[0070] Note that the term front end side used in the following explanation means a side from which the tip of the puncture needle 21 of the lancet 20 to be described protrudes, and on the other hand, the term rear end side means the opposite side from the front end side.

CONFIGURATION OF LANCET 20

[0071] As illustrated in Fig. 3, the lancet 20 includes an approximately cylindrical-shaped casing (casing member) 22, and a puncture body 23 that is accommodated in the casing 22 so that it is allowed to move in the front and rear end sides of the puncture direction when the lancet device 10 is used. Note that Fig. 3 illustrates a cross-sectional view of the casing 22 in order to conveniently explain the interior configuration of the approximately cylindrical-shaped casing 22.

[0072] The puncture body 23 is made of a resin such as PE (polyethylene) and is integrally formed with the puncture needle 21 for forming a puncture wound on the skin (see Fig. 4). As illustrated in Fig. 3, a taper portion 23a, a flange portion 23b, a groove (engaging portion) 23c, and an insertion portion 23d are formed in a portion of the puncture body 23 that is made of the resin. The taper portion 23a, the flange portion 23b, and the groove 23c are formed in the front end side from which the puncture needle 21 is exposed. The taper portion 23a is a member that is formed to taper toward the rear end side, and its cross-section perpendicular to the puncture di-

rection is formed in an oval shape. The flange portion 23b is a disc-shaped member that is formed in the outmost of the front end side of the puncture body 23, and the puncture needle 21 protrudes from the center portion of the disc. The groove 23c is a concave formed to be interposed between the taper portion 23a and the flange portion 23b. After the puncture body 23 is used, it is moved to the rear end side relative to the casing 22, and a convex portion (engaging portion) 22b of the casing 22 to be described is engaged with the groove 23c. With this configuration, it is possible to prevent the puncture needle 21 from protruding from the casing 22 because the puncture body 23 is prevented from moving in the interior of the casing 22, and it is also possible to retain the puncture body 23 in the interior of the casing 22 (see Fig. 9). As illustrated in Figs. 3 and 4, the insertion portion 23d is a member whose diameter in the puncture direction is uniformly formed, and is inserted into a mounting portion 32a of a puncture body holder (lancet holder) 32 of the main body 30 to be described. Here, the inner diameter of the cylindrical-shaped mounting portion 32a that is formed on the front end side (attachment side) of the puncture body holder 32 is approximately the same as the outer diameter of the insertion portion 23d to be inserted therein. Therefore, the puncture body 23 is retained in the mounting portion 32a of the puncture body holder 32 by the frictional force. Furthermore, when a fastening member 38 to be described fastens the outer peripheral portion of the mounting portion 32a of the puncture body holder 32 inwardly (in a direction intersectional to the puncture direction), the puncture body 23 is further tightly retained in the puncture body holder 32. With this configuration, it is possible to move the puncture body 23 back and forth in the puncture direction together with the puncture body holder 32 by means of the elastic force of the coil spring 31 disposed on the rear end side of the puncture body holder 32 in the main body 30.

[0073] In addition, as illustrated in Figs. 3 and 4, a cap 24 is attached to the puncture needle 21 so as to cover the tip thereof, and thus it functions as a protection for preventing the tip of the puncture needle 21 from being exposed outside before the lancet 20 is used. The cap 24 is integrally formed with the puncture needle 21 as is the case with the puncture body 23, and a portion of the cap 24 is connected to the flange portion 23b of the puncture body 23. With this configuration, as illustrated in Fig. 4, when the lancet 20 is used, the cap 24 is twisted and pulled out, and accordingly the connected portion between the cap 24 and the flange portion 23b is disconnected. Thus, it is possible to expose the puncture needle 21 in the interior of the casing 22. In addition, the cap 24 includes a protruding portion 24a, a lid member 24b, and a hole 24c. The protruding portion 24a is a portion formed to protrude in a direction intersectional to the puncture direction, and as illustrated in Fig. 3, it is engaged with a groove 22c that is to be described and is formed in the end portion of the casing 22 on the front end side, while the cap 24 is being mounted to the casing 22. With this

configuration, it is possible to retain the puncture body 23 in the interior of the casing 22 before the lancet 20 is used. The lid member 24b functions as a lid for covering the outmost front end portion of the casing 22 before the lancet 20 is used. The hole 24c is a hole that is formed on the tip side of the puncture needle 21 so as to closely make contact with the puncture needle 21 when the puncture needle 21, the puncture body 23, and the cap 24 are integrally formed, and the puncture needle 21 is being inserted in the hole 24c until the cap 24 is disconnected from the puncture body 23.

[0074] The casing 22 is an approximately cylindrical-shaped member, and accommodates the puncture body 23 in the interior thereof before use of the lancet 20 and continues to accommodate it in the interior thereof by the time when the lancet 20 is removed from the main body 30 side and is disposed after it is used. In addition, as illustrated in Fig. 5, the casing 22 includes an inner peripheral surface 22a, the convex portion 22b, and the groove 22c. The inner peripheral surface 22a is formed to have radius that is slightly larger than that of the taper portion 23a and the flange portion 23b of the puncture body 23. When the lancet 20 is used, the puncture body 23 moves in the front and rear end sides of the puncture direction. The convex portion 22b is a member that protrudes inwardly from the inner peripheral surface 22a of the casing 22, and is formed in the vicinity of the center portion of the casing 22 in the longitudinal direction. When the lancet 20 is disposed after it is used, the puncture body 23 is retracted to the rear end side, and as illustrated in Figs. 8(a) and 8(b), the groove 23c of the puncture body 23 is engaged with the convex portion 22b. With this configuration, it is possible to prevent the puncture needle 21 from protruding from the front end of the casing 22 after the lancet 20 is used, and thus it is possible to ensure safety after the lancet 20 is used. The groove 22c is a concave that is formed on the inner peripheral surface 22a of the casing 22 on the front end side. The protruding portion 24a of the cap 24 is engaged with the groove 22c before the lancet 20 is used. Therefore, it is possible to retain the puncture body 23 in the interior of the casing 22 so that the puncture body 23 is not allowed to move in the front and rear end sides in the puncture direction.

45 CONFIGURATION OF MAIN BODY 30

[0075] As illustrated in Fig. 6, the main body 30 includes the coil spring 31, the puncture body holder 32, a rotator 33, an urging member 34, the housing 35, a removing portion 36, a setting-release button 37, and the fastening member 38 (see e.g., Fig. 7(a)), and the above described lancet 20 is attached to the main body 30 from the front end side thereof (see Fig. 2).

[0076] The coil spring 31 is a member that applies the urging force for moving the puncture body 23 of the lancet 20 in the puncture direction, and is disposed on the rear end side of the puncture body holder 32 so as to abut to the puncture body holder 32. With this configuration,

when a cocked state is produced by pulling the urging member 34 back to the rear end side, the coil spring 31 is compressed, and thus stores the energy for shooting the puncture needle 21.

[0077] The return spring is a member that applies the urging force for bringing the puncture body 23 of the lancet 20 back to the interior of the casing 22 after the puncture body 23 of the lancet 20 is protruded from the front end of the casing 22 by means of the coil spring 31, and is disposed in the inner side of the coil spring 31. Specifically, when the puncture needle 21 is shot toward the front end side by means of the above described coil spring 31, the puncture body holder 32 is moved to the front end side. Thus, the return spring's state is changed from a stationary state in which the return spring is not loaded to a state in which the return spring is compressed while a contact position that the return spring makes contact with the urging member 34 functions as a support position. Therefore, the urging force (spring force) for changing the return spring's state from the compressed state to the original stationary state is generated in the return spring, and thus the puncture needle 21 is brought back to the rear end side together with the puncture body holder 32 by the force. In addition, a spring whose elastic force is smaller than that of the coil spring 31 is used as the return spring. With this configuration, even when the coil spring 31 and the return spring apply the opposite urging forces (spring forces) from each other, it is possible to smoothly perform a puncture without weakening the force and the speed of the puncture body 23 when it is shot by means of the coil spring 31.

[0078] The puncture body holder 32 is molded with a resin such as PE as is the case with the puncture body 23, and retains a rear end side portion of the lancet 20 (an insertion portion 23d); which is inserted from a puncture hole 35a formed in the front end of the housing 35, in the mounting portion 32a (see Figs. 7(a) and 7(b)). In addition, the mounting portion 32a of the puncture body holder 32 has the inner diameter that is approximately the same as the outer diameter of the insertion portion 23d of the puncture body 23. Therefore, when the insertion portion 23d with the uniform diameter is inserted in the mounting portion 32a, the frictional force is generated between the inner peripheral portion of the mounting portion 32a of the puncture body holder 32 and the outer peripheral portion of the insertion portion 23d. Then, the puncture body 23 is retained in the puncture body holder 32 by means of the frictional force. In addition, not only the above described frictional force, but also the force for retaining the insertion portion 23d by fastening the insertion portion 23d from the outer peripheral surface side when the fastening member 38 to be described makes contact with the outer peripheral surface of the mounting portion 32a of the puncture body holder 32, is added as the force for retaining the insertion portion 23d of the puncture body 23 in the mounting portion 32a of the puncture body holder 32. Here, when the cap 24 is removed while the lancet 20 is being attached to the main

body 30, the engaged state between the cap 24 and the casing 22 is released first. This is because the engaging force between the cap 24 and the casing 22 is smaller than that between the casing 22 and the housing 35, and the coupling force between the cap 24 and the puncture needle 21 and that between the cap 24 and the puncture body 23 are smaller than the retaining force for retaining the puncture body 23 in the puncture body holder 32. As a result, even when the cap 24 is pulled out of the casing 22, cap 24 is allowed to be removed without releasing the engaged state between the puncture body 23 and the puncture body holder 32. In addition, a taper portion 32b is formed in the tip of the mounting portion 32a of the puncture body holder 32, and the inner and outer diameters thereof are formed to be larger toward the front end side. Furthermore, a portion of the taper portion 32b with the smallest inner diameter is formed to be approximately the same as the outer diameter of the insertion portion 23d of the puncture body 23. Therefore, when the puncture body 23 is attached to the puncture body holder 32, it is possible to guide the insertion portion 23d into the mounting portion 32a by the taper portion 32b. Furthermore, the outer diameter of the taper portion 32b is formed to be larger toward the front end portion side.

[0079] Note that the two-phased retaining force for retaining the puncture body 23 in the mounting portion 32a of the puncture body holder 32 will be hereinafter described in detail.

[0080] The rotator 33 rotates around the axial direction in the circumferential direction when the externally exposed dial portion thereof is rotated. The rotator 33 includes a spiral-shaped rib that is formed on the inner surface of the cylindrical portion of the dial portion on the front end side. A convex portion (not illustrated in the figures) that is formed on the end portion of the puncture body holder 32 on the rear end side makes contact with the rib when the puncture body holder 32 is urged toward the front end side by the elastic force of the coil spring 31, and thus the amount that the puncture body holder 32 moves is regulated. Therefore, when the position that the convex portion and the rib make contact with each other is changed by rotating the rotator 33, it is possible to regulate the amount that the puncture body holder 32 moves. As a result, it is possible to regulate the position of the puncture body 23 back and force in the puncture direction, and accordingly, it is possible to control the depth of a puncture by regulating the amount of protrusion of the puncture needle 21 by rotating the rotator 33 before a puncture wound is formed on the skin.

[0081] The urging member 34 is a member for storing the energy of shooting the puncture needle 21 by compressing the coil spring 31 when the puncture body 23 is shot again after the lancet 20 is attached and the puncture needle 21 is shot in the puncture direction, and is exposed to the lateral surface of the housing 35. It is possible to set the puncture needle 21 to be ready to be shot when a cocked state is produced by pulling the urging member 34 back to the rear end side and moving the

puncture body holder 32 to the rear end side.

[0082] The housing 35 accommodates the above described members such as the coil spring 31, the return spring, and the puncture body holder 32, and forms a framework of the lancet device 10. In addition, as illustrated in Fig. 6, the housing 35 includes the puncture hole 35a in an end portion thereof on the front end side, and also includes an opening 35b in which the rotator 33 is accommodated in an end portion thereof on the rear end side. The lancet 20 is inserted into the puncture hole 35a, and the tip of the puncture needle 21 is shot out of the opening of the casing 22 of the lancet 20 when a puncture is performed. The opening 35b is formed in a circular shape so as to be matched with the shape of the rotator 33.

[0083] The removing portion 36 is exposed to a side of the approximately rectangular solid housing 35, and this side is opposed to the side to which the urging member 34 is exposed. In addition, the removing portion 36 is disposed in the interior of the housing 35 so as to make contact with the end portion of the casing 22 on the rear end side. When the removing portion 36 is moved to the front end side after a puncture is performed, the position of the puncture body holder 32 in the puncture direction is kept by means of the elastic force of an elastic member 40 (see Fig. 8(a)). Next, when only the casing 22 is moved to the front end side, the convex portion 22b of the casing 22 and the groove 23c of the puncture body 23 are allowed to be engaged with each other. Here, when the removing portion 36 is further moved forward, the puncture body 23 moves to the front end side together with the puncture body holder 32 including the fastening member 38 while the puncture body 23 acts against the elastic force of the above described elastic member 40. This is because the puncture body 23 is tightly retained in the puncture body holder 32. Here, a convex portion 38b that is formed on an end portion of the fastening member 38 on the rear end side makes contact with a portion of a retaining abutment 39. Thus, the fastening member 38 moves to the rear end side relative to the puncture body holder 32. With this configuration, the engaged state between the inner peripheral surface of the fastening member 38 and the outer peripheral surface of the puncture body holder 32 is released, and accordingly the fastened state is also released. As a result, it is possible to relatively easily release a retained state of the puncture body 23 (insertion portion 23d) in the mounting portion 32a of the puncture body holder 32, and accordingly it is possible to remove the lancet 20 from the main body 30.

[0084] The setting-release button 37 is a member for releasing a standby state that the puncture needle 21, which is cocked when the lancet 20 is attached, or which is cocked again by the urging member 34 after the lancet 20 is attached and is then shot, is allowed to be shot. The setting-release button 37 is also exposed to the outside of the housing 35. Therefore, when a puncture is performed, the puncture needle 21 is shot in the puncture direction by releasing the cocked state between a notch

portion of the puncture body holder 32 and that of the housing 35 when the setting-release button 37 is pressed after the puncture needle 21 is set to be ready to be shot as described above.

[0085] The fastening member 38 is made of a resin such as POM, and is provided along the outer periphery of the puncture body holder 32 in the interior of the main body 30. Then, the fastening member 38 includes an abutment 38a on the front end side in the puncture direction, and also includes the convex portion 38b on the rear end side in the puncture direction. The inner diameter of the abutment 38a is formed to be larger toward the front end side so as to match the shape of the above described taper portion 32b of the puncture body holder 32. When the abutment 38a of the puncture body holder 32 makes contact with and moves along the taper portion 32b, the puncture body 23 is fastened in the puncture body holder 32. The convex portion 38b makes contact with the retaining abutment 39 that is provided lateral to the fastening member 38 when the puncture body 23 is fastened or unfastened.

EXPLANATION OF OPERATION OF LANCET DEVICE 10

[0086] As illustrated in Fig. 2, when the lancet device 10 of the present embodiment is started to be used, an unused new lancet 20 is firstly inserted into the puncture hole 35a (see Fig. 6) of the main body 30. As illustrated in Fig. 7(a), when the lancet 20 is inserted into the rearward of the puncture hole 35a, the insertion portion 23d illustrated in Fig. 3, which is formed in the end portion of the puncture body 23 on the rear end side, is inserted into the cylindrical-shaped mounting portion 32a of the puncture body holder 32. Here, the puncture body 23 is retained in the mounting portion 32a by means of the frictional force, because the outer diameter of the insertion portion 23d of the puncture body 23 and the inner diameter of the mounting portion 32a of the puncture body holder 32 are formed in approximately the same size. Note that the frictional force is generated between the insertion portion 23d of the puncture body 23 and the mounting portion 32a of the puncture body holder 32. However, the puncture body holder 32 does not move back because the puncture body holder 32 is urged to the front end side in the puncture direction by means of the coil spring 31. Then, as illustrated in Fig. 7(b), when the puncture body 23 is further pressed into the rear end side from the position where the insertion portion 23d is being inserted into the rearward of the mounting portion 32a, the outer peripheral portion of the taper portion 32b of the puncture body holder 32 makes contact with the inner peripheral portion of the fastening member 38. Here, as illustrated in Fig. 7(b), the convex portion 38b that is formed in the end portion of the fastening member 38 on the rear end side makes contact with a portion of the retaining abutment 39, and thus the convex portion 38b is regulated not to move further. Accordingly, the

puncture body holder 32 moves to the rear end side relative to the fastening member 38. With this configuration, it is possible to make the taper portion 32b formed in the front end side of the mounting portion 32a of the puncture body holder 32 reliably contact with the abutment 38a formed in the inner peripheral portion of the fastening member 38. Note that the state that the fastening member 38 makes contact with the puncture body holder 32 is kept even when the state that the retaining abutment 39 makes contact with the fastening member 38 is released by means of the frictional force generated when the puncture body holder 32 is fastened by the fastening member 38. Furthermore, the outer diameter of the taper portion 32b is formed to be larger toward the front end side from the rear end side. Therefore, it is possible to tightly retain the puncture body 23 in the mounting portion 32a of the puncture body holder 32 by inwardly fastening the mounting portion 32a as a result of moving the puncture body holder 32 to the rear end side relative to the fastening member 38. Then, when the lancet 20 is further inserted into the rearward, the lancet 20 is completely mounted to the main body 30. At the same time as this, the lancet 20 is cocked and is set to be in a standby state that the puncture needle 21 is ready to be shot.

[0087] Next, the cap 24 that is integrally formed with the puncture body 23 is removed to expose the puncture needle 21 (see Fig. 4). A portion of the cap 24 is connected to a surface of the flange portion 23b of the puncture body 23 on the front end side. Therefore, the cap 24 is removed when the connected portion is torsionally-sheared by rotating the cap 24. Here, the pulling force to the front end side is applied for the cap 24 to be removed. Therefore, the pulling force to the front end side is also applied to the puncture body 23, a portion of which is connected to the cap 24. However, as illustrated in Fig. 7(b), when the cap 24 is removed, the end portion (insertion portion 23d) of the puncture body 23 on the rear end side is tightly retained in the mounting portion 32a of the puncture body holder 32. In addition, the retaining force for retaining the puncture body 23 in the puncture body holder 32 is larger than the force necessary to detach the cap 24 from the puncture body 23. As a result, even when the cap 24 is removed from the casing 22, the puncture body 23 is not detached from the puncture body holder 32 together with the cap 24. Note that when the puncture body 23 with which a puncture has been once performed is shot again, the puncture body 23 may be cocked with the urging member 34 and the urging force may be applied by compressing the coil spring 31, and then the cocked state may be released by the setting-release button 37 while this state is kept.

[0088] Next, when the standby state is released by pressing the setting-release button 37 while the puncture hole 35a makes contact with an affected part (e.g., the skin of a finger) for which a puncture is performed, the tip of the puncture needle 21, which has a predetermined length, protrudes from the puncture hole 35a formed in the main body 30 on the outermost front end side. Then,

the puncture needle 21 is brought back to the casing 22 again by means of the spring force of the return spring (not illustrated in the figures) immediately after a puncture is performed. Note that the movable range of the puncture needle 21 immediately after the puncture is performed corresponds to a range between the standby position illustrated in Fig. 4 of the puncture body 23 before it is shot and the puncture position in which the tip of the puncture needle 21 protrudes by a few millimeters.

[0089] After the puncture is completed, the lancet 20 is removed from the main body 30 by means of the removing portion 36, and is then disposed. Removal of the lancet 20 from the main body 30 is performed by means of the removing portion 36 illustrated in Fig. 6. Specifically, when the removing portion 36 is moved to the front end side, only the casing 22 is firstly moved to the front end side. Accordingly, the puncture body 23 that is being retained in the puncture body holder 32 is moved to the rear end side relative to the casing 22. Here, the taper portion 23a that is formed in the vicinity of the center portion of the puncture body 23 is moved while it presses and enlarges a part around the convex portion 22b formed on the inner peripheral surface 22a of the casing 22, and thus the convex portion 22b of the casing 22 is engaged with the groove 23c of the puncture body 23 (see Fig. 9). This engaged state is tightly formed, and therefore this makes it possible to prevent the tip of the puncture needle 21 from protruding from the front end side of the casing 22 after the lancet 20 is removed from the main body 30. With this configuration, the puncture needle 21 is prevented from protruding with the cap 24 before the lancet 20 is used, and the puncture body 23 is retained in the casing 22 by means of the engaged state with large engagement force after the lancet 20 is used. Therefore, it is possible to avoid danger that may be generated before and after the lancet 20 is used.

[0090] Next, as illustrated in Fig. 8(b), when the removing portion 36 is further pressed after the convex portion 22b of the casing 22 is engaged with the groove 23c of the puncture body 23, a state that the puncture body 23 is retained in the puncture body holder 32 is released. Specifically, the above described engaging force between the convex portion 22b of the casing 22 and the groove 23c of the puncture body 23 is larger than the retaining force for retaining the puncture body 23 in the puncture body holder 32. Therefore, when the removing portion 36 is further pressed to the front end side in this engaged state, the puncture body holder 32 is moved to the front end side together with the fastening member 38 when the puncture body 23 is moved to the front end side. This is because the puncture body 23 is tightly retained in the puncture body holder 32. Here, the convex portion 38b that is formed in the end portion of the fastening member 38 on the rear end side makes contact with a portion of the retaining abutment 39. Because of this, when the removing portion 36 is further pressed to the front end side from the position where the convex portion 38b makes contact with a portion of the retaining

abutment 39 (see Fig. 8(a)), the puncture body holder 32 is moved to the front end side relative to the fastening member 38. With this configuration, as illustrated in Fig. 8(b), a state that the inner peripheral surface of the fastening member 38 and the outer peripheral surface of the taper portion 32b of the puncture body holder 32 make contact with each other is released, and accordingly, it is possible to release the fastened state in the mounting portion 32a. Also, in a state illustrated in Fig. 8(b), the frictional force generated between the mounting portion 32a and the insertion portion 23d is only left as the retaining force for retaining the insertion portion 23d in the mounting portion 32a of the puncture body holder 32. Because of this, it is possible to relatively easily release a state that the puncture body 23 is retained in the puncture body holder 32 and remove the lancet 20 from the main body 30 side by further pressing the removing portion 36 to the front end side in the state illustrated in Fig. 8(b).

[0091] With the above described procedure, the used lancet 20 is removed from the main body 30 and is disposed. Here, as illustrated in Fig. 9, the puncture body 23 is tightly retained in the casing 22 by means of the engagement force in the removed lancet 20. Therefore, it is possible to reliably prevent such cases that a user is injured by the tip of the puncture needle 21 protruded from the casing 22 and that a user is infected by a disease through a fluid or the like attaching to the puncture needle 21. Furthermore, in the lancet 20 that has once been removed from the main body 30, the casing 22 and the puncture body 23 are engaged with each other such that the puncture body 23 is retained in the casing 22. Therefore, this makes it difficult to reuse the lancet 20, compared to the conventional lancets.

FEATURES OF LANCET DEVICE 10 OF PRESENT EMBODIMENT

(1)

[0092] The lancet device 10 in accordance with the present embodiment is a lancet device configured to perform a puncture by applying the urging force to the puncture body holder 32 in the forward of the puncture direction while the lancet 20 including the puncture needle 21 is attached to the tip (mounting portion 32a) of the puncture body holder 32. In addition, as illustrated in Figs. 7(a) and 7(b), in the lancet device 10, the insertion portion 23d of the puncture body 23 that is inserted into the mounting portion 32a of the puncture body holder 32 is retained by means of the frictional force. Furthermore, when the fastening member 38 provided in the main body 30 side is moved in the puncture direction relative to the puncture body holder 32, it makes contact with the outer peripheral portion of the mounting portion 32a of the puncture body holder 32 and inwardly fastens the mounting portion 32a.

[0093] With this configuration, the puncture body 23 is

retained in the puncture body holder 32 side by adding the retaining force, which is generated when a part around the mounting portion 32a of the puncture body holder 32 is fastened by the fastening member 38, to the retaining force by means of friction generated between the inner peripheral surface of the puncture body holder 32 and the outer peripheral surface of the puncture body 23. Accordingly, it is possible to achieve the lancet device 10 that has the strengthened retaining force for retaining the puncture body 23, compared to the conventional lancet devices. In addition, the lancet device 10 has a simple configuration that only the fastening member 38, which is relatively moved with the puncture body holder 32 and makes contact with the taper portion 32b formed in the tip side of the puncture body holder 32, is additionally provided for the lancet device 10. Accordingly, it is possible to provide the safer lancet device 10 without increasing the manufacturing cost.

(2)

[0094] As illustrated in the figures such as Fig. 7(b), in the lancet device 10 in accordance with the present embodiment, the insertion portion 23d of the puncture body 23 that is mounted to the tip of the puncture body holder 32, and the mounting portion 32a of the puncture body holder 32 are formed so that the outer diameter of the insertion portion 23d and the inner diameter of the mounting portion 32a are formed in approximately the same dimension.

[0095] With this configuration, it is possible to ensure the retaining force for simply retaining the puncture body 23 in the puncture body holder 32 by means of the frictional force generated between the mounting portion 32a of the puncture body holder 32 and the insertion portion 23d of the puncture body 23 only by inserting the insertion portion 23d into the mounting portion 32a before a fastened state is produced by the fastening member 38.

(3)

[0096] As illustrated in the Fig. 7(a) and 7(b), when the lancet 20 is mounted to the main body 30 side in the lancet device 10 in accordance with the present embodiment, the insertion portion 23d of the puncture body 23 of the lancet 20 is inserted into the mounting portion 32a of the puncture body holder 32, and then the puncture body 23 is further pressed. Accordingly, the puncture body holder 32 is moved to the rear side in the puncture direction relative to the fastening member 38, and the fastening member 38 and the outer peripheral surface of the mounting portion 32a of the puncture body holder 32 are made contact with each other.

[0097] With this configuration, it is possible to produce a fastened state while the fastening member 38 and the puncture body holder 32 are made contact with each other in a series of operation performed when the lancet 20 is mounted to the main body 30 side.

[0098] As a result, it is possible to enhance operability of the lancet 20 when it is mounted to the main body 30, and it is also possible to achieve the lancet device 10 that makes it possible to easily ensure sufficient retaining force.

(4)

[0099] In the lancet device 10 in accordance with the present embodiment, when the lancet 20 is removed from the main body 30 side after it is used, a fastened state for the puncture body holder 32 is released by moving the puncture body holder 32 to the front side in the puncture direction relative to the fastening member 38.

[0100] With this configuration, it is possible to smoothly move the puncture body holder 32 to the front side in the puncture direction relative to the fastening member 38 in a step of moving the puncture body holder 32 in an opposite direction from the direction in which the lancet 20 is mounted. As a result, it is possible to enhance operability of removing the lancet 20 from the main body 30 side, and it is also possible to easily pull the puncture body 23 retained only by the frictional force from the puncture body holder 32 after the fastened state of the puncture body holder 32 is released.

(5)

[0101] As illustrated in figures such as Fig. 7(a), in the lancet device 10 in accordance with the present embodiment, the taper portion 32b whose outer diameter is formed to be larger toward the front side from the rear side in the puncture direction is formed in the end portion of the mounting portion 32a of the puncture body holder 32 on the front end side in the puncture direction.

[0102] With this configuration, when the puncture body holder 32 is moved back relative to the fastening member 38, the outer peripheral surface of the taper portion 32b that is formed in the tip of the mounting portion 32a of the puncture body holder 32 makes contact with the inner peripheral surface of the fastening member 38. Here, the taper portion 32b is formed to have the outer diameter that becomes larger toward the front end side. Therefore, when the puncture body holder 32 is moved back relative to the fastening member 38, it is possible to inwardly fasten the mounting portion 32a from the outer peripheral surface side. As a result, it is possible to achieve the lancet device 10 that is capable of ensuring the sufficient retaining force with a simple configuration in which only the shape of the portion that the puncture body holder 32 and the fastening member 38 make contact with each other is devised.

(6)

[0103] As illustrated in the figures such as Fig. 7(b), in the lancet device 10 in accordance with the present embodiment, the mounting portion 32a is elastically de-

formed inwardly when the fastening member 38 makes contact with the outer peripheral surface of the mounting portion 32a of the puncture body holder 32.

[0104] With this configuration, it is possible to retain the puncture body 23 in the puncture body holder 32 side by means of the sufficient fastening force when the puncture body holder 32 is fastened. In addition, it is also possible to easily pull the puncture body 23 from the puncture body holder 32 by restoring the shape of the portion of the mounting portion 32a that has elastically been deformed when the fastened state of the puncture body holder 32 is released. As a result, it is possible to ensure the strong retaining force in the puncture body holder 32 only when necessary.

(7)

[0105] As illustrated in the figures such as Fig. 7(a), in the lancet device 10 in accordance with the present embodiment, the insertion portion 23d of the puncture body 23 that is inserted into the mounting portion 32a of the puncture body holder 32 is formed to have a uniform diameter in the puncture direction.

[0106] In general, when this type of insertion portion with the uniform diameter is inserted into the mounting portion of the puncture body holder, the puncture body 23 is retained in the puncture body holder 32 only by means of the frictional force. Therefore, it is impossible to retain the puncture body 23 in the puncture body holder 32 with sufficient retaining force.

[0107] According to the lancet device 10 of the present embodiment, it is possible to ensure the strong retaining force by the fastening force applied by the fastening member 38 in addition to the frictional force generated between the puncture body 23 and the puncture body holder 32. Accordingly, even when the diameter of the insertion portion 23d of the puncture body 23 is uniformly formed in the puncture direction, it is possible to ensure the sufficient retaining force.

ALTERNATIVE EMBODIMENTS

[0108] An embodiment of the present invention has been explained above. However, the present invention is not limited to the above described embodiment, and a variety of changes may be made without departing from the scope of the invention.

(A)

[0109] In the above described embodiment, an example is explained that the outer diameter of the insertion portion 23d of the puncture body 23 and the inner diameter of the mounting portion 32a of the puncture body holder 32 are formed in approximately the same size and the puncture body 23 is retained in the puncture body holder 32 by means of the frictional force generated between the puncture body 23 and the puncture body holder

32. However, the present invention is not limited to this configuration.

[0110] For example, a configuration may be provided that the inner diameter of the mounting portion of the puncture body holder is formed to be larger than the outer diameter of the insertion portion of the puncture body and the frictional force is not generated between the puncture body and the mounting portion only by inserting the puncture body into the mounting portion. With this configuration, the same effect as the above described effect is achieved that it is possible to tightly retain the puncture body by inwardly fastening the mounting portion of the puncture body holder by means of the fastening member.

(B)

[0111] In the above described embodiment, an example is explained that the puncture body holder 32 and the fastening member 38 are separately formed. However, the present invention is not limited to this configuration.

[0112] For example, members 52 and 58 illustrated in Figs. 10(a) and 10(b) may be used as members forming a part of the puncture body holder. In other words, the puncture body holder may be divided into a holder portion and a fastening portion.

(C)

[0113] In the above described embodiment, an example is explained that the puncture body holder 32 is fastened by moving the puncture body holder 32 in the puncture direction with respect to the fastening member 38. However, the present invention is not limited to this configuration.

[0114] For example, the puncture body holder may be fastened by interlocking the convex portion formed on the outer peripheral surface of the puncture body holder with the concave portion formed on the inner peripheral surface of the fastening member, and then by rotating the puncture body holder with respect to the fastening member or by rotating the fastening member with respect to the puncture body holder.

[0115] Also, the puncture body holder may be fastened by forming the cross-section of the puncture body holder in an oval shape and forming the cross-section of the fastening member on the inner diameter side in a circular shape or an oval shape whose diameter is shorter than the longer diameter of the oval-shaped cross-section of the puncture body holder, and then by rotating the puncture body holder with respect to the fastening member or by rotating the fastening member with respect to the puncture body holder.

[0116] Furthermore, the puncture body holder may be fastened by interlocking a plurality of convex portions formed on the outer peripheral surface of the puncture body holder at a small pitch with a plurality of concave portions formed on the inner peripheral surface of the fastening member at the same pitch as that of the convex

portions, and then by rotating the puncture body holder with respect to the fastening member or by rotating the fastening member with respect to the puncture body holder.

[0117] Also, the puncture body holder may be fastened by forming the cross-section of the puncture body holder in a polygon (e.g., equilateral octagon) and by rotating any of the members so as to make contact with the shape of the fastening member on the inner diameter side.

(D)

[0118] As illustrated in Figs. 7(a) and 7(b), in the above described embodiment, an example is explained that the puncture body holder 32 is fastened by moving the puncture body holder 32 to the rear side in the puncture direction relative to the fastening member 38. However, the present invention is not limited to this configuration.

[0119] For example, as illustrated in Figs. 10(a) and 10(b), a configuration may be provided that the puncture body holder 52 is fastened by moving the fastening member 58 to the rear side in the puncture direction relative to the puncture body holder 52.

[0120] Also, as illustrated in Figs. 11(a) and 11(b), a configuration may be provided that the puncture body holder 62 is fastened by moving the puncture body holder 62 to the rear side in the puncture direction relative to a fastening member 68.

[0121] Also, as illustrated in Fig. 13, it is possible to retain the puncture body while the stable fastening force is kept by urging the puncture body holder 52 or the fastening member 58 to the fastened side of the puncture body holder 52 in the puncture direction with the spring force applied by a coil spring 80 that is provided between a puncture body holder 72 and a fastening member 78.

(E)

[0122] As illustrated in Figs. 8(a) and 8(b), in the above described embodiment, an example is explained that the fastened state of the puncture body holder 32 is released by moving the puncture body holder 32 to the front side in the puncture direction relative to the fastening member 38. However, the present invention is not limited to this configuration.

[0123] For example, as illustrated in Figs. 10(a) and 10(b), a configuration may be provided that the fastened state of the puncture body holder 52 is released by moving the fastening member 58 to the front side in the puncture direction relative to the puncture body holder 52.

[0124] Furthermore, as illustrated in Figs. 11(a) and 11(b), a configuration may be provided that the fastened state of the puncture body holder 62 is released by moving the puncture body holder 62 to the rear side in the puncture direction relative to the fastening member 68.

(F)

[0125] In the above described embodiment, an example is explained that the fastening member 38 fastens the puncture body holder 32 by inserting the puncture body 23 into the puncture body holder 32 and then further pressing the puncture body 23 rearward when the lancet 20 is mounted to the main body 30 side. However, the present invention is not limited to this configuration.

[0126] For example, as illustrated in Figs. 12(a) and 12(b), the puncture body holder 72 may be fastened not with the force for pressing the puncture body 23 rearward but with a portion of the puncture body holder 72, specifically, by moving the puncture body holder 72 forward in the puncture direction with respect to the fastening member 78.

(G)

[0127] In the above described embodiment, an example is explained that the abutment 38a is formed in the end portion of the fastening member 38 on the front end side so that the shape of the abutment 38a matches that of the taper portion 32b formed in the puncture body holder 32 on the tip side. However, the present invention is not limited to this configuration.

[0128] For example, only the taper portion on the puncture body holder side may be formed, and a portion of the fastening member that makes contact with the taper portion may be a surface parallel to the puncture direction. With this configuration, it is also possible to increase the fastening force in accordance with the movement of the fastening member in the puncture direction. This is because the taper portion is formed to have the outer diameter varying in the puncture direction.

(H)

[0129] In the above described embodiment, an example is explained that the POM resin is used as a material for molding the fastening member 38. However, the present invention is not limited to this configuration.

[0130] For example, the fastening member may be molded with resin such as nylon or metal such as gun-metal, except for the POM resin.

[0131] In addition, in the above described embodiment, an example is explained that the puncture body holder 32 and the puncture body 23 are also molded with PE (polyethylene). However, the present invention is not limited to this configuration.

[0132] For example, they may be molded with POM resin that is also used for forming the fastening member or other resin such as PC (polycarbonate) and ABS, except for PE.

(I)

[0133] In the above described embodiment, the lancet

device 10 including the lancet 20 is explained as an example of the lancet device of the present invention. However, the present invention is not limited to this configuration.

5 **[0134]** For example, it is possible to apply the lancet device of the present invention to a lancet device that is comprised of the main body side only and does not include the lancet. With this configuration, it is also possible to ensure the sufficient retaining force by fastening the puncture body holder because the fastening member is provided for the main body side.

(J)

15 **[0135]** In the above described embodiment, an example is explained that the surface of the insertion portion 23d of the lancet 20 retained in the puncture body holder 32 is formed in a flat and smooth shape. However, the present invention is not limited to this configuration.

20 **[0136]** For example, as illustrated in Fig. 14, a vertical groove 23e may be formed on the surface of the insertion portion 23d of a lancet 110. With this configuration, the above described vertical groove 23e functions as resistance for blocking rotation of the lancet 110 in the puncture body holder. Accordingly, it is possible to tightly retain the lancet 110 in the puncture body holder, even when the cap 24 is torsionally-sheared, for instance.

25 **[0137]** Furthermore, as illustrated in Fig. 15, a fine-grained concave-convex 23f may be formed on the surface of the insertion portion 23d of a lancet 120. With this configuration, the above described concave-convex 23f functions as resistance for blocking movement of the lancet 110 in the puncture body holder both in the rotational direction and in the puncture direction. Accordingly, it is possible to tightly retain the lancet 120 in the puncture body holder.

(K)

40 **[0138]** In the above described embodiment, an example is explained that the surface of the insertion portion 23d of the lancet 20 to be retained in the puncture body holder 32 is formed in a flat and smooth shape and the inner peripheral surface of the puncture body holder 32 is also formed in a flat and smooth shape. However, the present invention is not limited to this configuration.

45 **[0139]** For example, as illustrated in Fig. 16, a lancet device 140 may be provided with a configuration that a concave portion 23g is formed on the surface of the insertion portion 23d of a lancet 130 and a convex portion 32c is formed on the tip of the taper portion 32b of the puncture body holder 132, and the concave portion 23g and the convex portion 32c are engaged with each other. With this configuration, it is possible to tightly retain the lancet 130 in the puncture body holder 132 by means of the above described engaging force generated between the concave portion 23g and the convex portion 32c and the fastening force for fastening the lancet holder 132 by

the fastening member 38.

[0140] Furthermore, as illustrated in Fig. 17, a configuration may be provided that a slit 32d is formed in a portion of the puncture body holder 32 in which the insertion portion 20d of the lancet 20 is retained and the insertion portion 20d of the lancet 20 is fastened and retained when a portion around the slit 32d is elastically deformed.

INDUSTRIAL APPLICABILITY

[0141] According to the lancet device of the present invention, the following effects are achieved. That is, compared to the conventional lancet device configured to retain the lancet only by means of the frictional force, it is possible to ensure the sufficient retaining force in performing a puncture or the like, and it is also possible to configure a safer lancet device with a simple configuration. Therefore, it is generally applicable to a lancet device used in a variety of fields.

Claims

1. A lancet device (10) having a lancet (20) including a puncture needle (21) mounted to a tip thereof, the lancet device (10) being configured to perform a puncture by moving the puncture needle (21) forward in a puncture direction, the lancet device (10) comprising:

the lancet (20);
 a lancet holder (32) including a mounting portion (32a) that a base end portion of the lancet is inserted thereinto, the mounting portion (32a) retaining the lancet; and
 a fastening member (38) being configured to make contact with an outer peripheral surface of the mounting portion (32a) of the lancet holder (32) and fasten the lancet holder (32) in a direction intersectional to the puncture direction when the fastening member (38) is moved relatively to the lancet holder (32) in the puncture direction; **characterized in that**
 the outer peripheral surface of the mounting portion (32a) of the lancet holder (32) and the fastening member (38) are configured to make contact with each other by moving the lancet holder (32) to the rear side in the puncture direction relative to the fastening member (38) when the lancet holder (32) is fastened; and
 a taper portion (32b) is formed in a tip of the mounting portion (32a) of the lancet holder (32) on the front side in the puncture direction so that the outer diameter of the taper portion (32b) becomes larger toward the front side in the puncture direction.

2. The lancet device (10) according to claim 1, **characterized in that**

the fastened state of the lancet holder (32) is configured to be released by moving the lancet holder (32) to the front side in the puncture direction with respect to the fastening member (38) when the lancet (20) is removed from the lancet holder (32).

3. A lancet device (10) having a lancet (20) including a puncture needle (21) mounted to a tip thereof, the lancet device (10) being configured to perform a puncture by moving the puncture needle (21) forward in a puncture direction, the lancet device (10) comprising:

the lancet (20);
 a lancet holder (32) including a mounting portion (32a) that a base end portion of the lancet is inserted thereinto, the mounting portion (32a) retaining the lancet; and
 a fastening member (38) being configured to make contact with an outer peripheral surface of the mounting portion (32a) of the lancet holder (32) and fasten the lancet holder (32) in a direction intersectional to the puncture direction when the fastening member (38) is moved relatively to the lancet holder (32) in the puncture direction; **characterized in that**
 the outer peripheral surface of the mounting portion of the lancet holder (52) and the fastening member (58) are configured to make contact with each other by moving the fastening member (58) to the rear side in the puncture direction relative to the lancet holder (52) when the lancet holder (52) is fastened, and
 a taper portion is formed in a tip of the fastening member (58) on the front side in the puncture direction so that the inner diameter of the fastening member (58) becomes smaller toward the front side in the puncture direction.

4. The lancet device (10) according to claim 3, **characterized in that**

the fastened state of the lancet holder (52) is configured to be released by moving the fastening member (58) to the front side in the puncture direction relative to the lancet holder when the lancet (20) is removed from the lancet holder (52).

5. The lancet device (10) according to one of claims 1 to 4, **characterized in that**

the fastening member (38, 58) is configured to elastically deform the mounting portion of the lancet holder (32, 52) making contact with the fastening member in a direction intersectional to the puncture direction when the lancet holder (32, 52) is fastened.

6. The lancet device (10) according to one of claims 1

to 5, **characterized in that**

a portion of the base end portion of the lancet (20) to be inserted into the mounting portion of the lancet holder (32, 52) is formed to have the uniform outer diameter in the puncture direction.

7. The lancet device (10) according to one of claims 1 to 6, **characterized in that** the lancet (20) comprises:

a puncture body (23);
a casing portion (22) including a tubular portion and an opening, the tubular portion being configured to accommodate the puncture body (23) so that the puncture body (23) is allowed to move back and forth in the puncture direction, the opening being formed in an end portion of the casing portion on a protruding side of the puncture needle (21); and
an engaging portion (22b) being configured to retain the puncture body (23) in the interior of the casing portion so that the puncture body (23) is not allowed to move back and forth in the puncture direction when the puncture body (23) is removed from the lancet holder, and
wherein the retaining force for retaining the lancet in the lancet holder after the lancet holder is fastened by the fastening member (38) is smaller than the retaining force by the engaging portion.

8. The lancet device according to claim 7, **characterized in that**

the retaining force for retaining the lancet (20) in the lancet holder after the lancet holder is fastened by the fastening member is larger than the force necessary for engaging the engaging portion (22b).

9. The lancet device (10) according to one of claims 1 to 8, **characterized by** further comprising an urging member (80), the urging member being provided between the fastening member and the lancet holder (32), the urging member (80) being configured to apply the urging force toward the fastened side of the lancet holder (32) in the puncture direction.

10. The lancet device (10) according to one of claims 1 to 9, **characterized in that** the lancet holder (32) retains the base end portion of the lancet by means of the frictional force.

11. The lancet device (10) according to one of claims 1 to 10, **characterized in that** a groove portion (23e) is formed on the surface of the base end portion, the groove portion being formed along the puncture direction.

12. The lancet device (10) according to one of claims 1

to 11, **characterized in that** a plurality of concave-convex portions (23f) are formed on the surface of the base end portion.

13. The lancet device (10) according to one of claims 1 to 12, **characterized in that** the base end portion includes a concave portion (23g), the concave portion being formed in a portion of the base end portion to be fastened by the fastening member, and the lancet holder (32) includes a convex portion (32c), the convex portion being configured to engage with the concave portion.

15 Patentansprüche

1. Lanzettenvorrichtung (10) mit einer Lanzette (20), die an ihrer Spitze montiert eine Punktionsnadel (21) aufweist und eingerichtet ist, um durch Vorwärtsbewegen der Punktionsnadel (21) in einer Punktionsrichtung eine Punktion auszuführen, wobei die Lanzettenvorrichtung (10) aufweist:

die Lanzette (20);

einen Lanzettenhalter (32), der einen Montageabschnitt (32a) aufweist, in den ein Basisendabschnitt der Lanzette eingeführt ist, wobei der Montageabschnitt (32a) die Lanzette hält; und ein Befestigungselement (38), das eingerichtet ist, um mit einer äußeren Umfangsfläche des Montageabschnitts (32a) des Lanzettenhalters (32) in Kontakt zu treten und den Lanzettenhalter (32) in einer zu der Punktionsrichtung kreuzenden Richtung zu befestigen, wenn das Befestigungselement (38) relativ zu dem Lanzettenhalter (32) in der Punktionsrichtung bewegt wird; **dadurch gekennzeichnet, dass**

die äußeren Umfangsfläche des Montageabschnitts (32a) des Lanzettenhalters (32) und das Befestigungselement (38) eingerichtet sind, um durch Bewegen des Lanzettenhalters (32) in der Punktionsrichtung zur Rückseite relativ zu dem Befestigungselement (38) miteinander in Kontakt zu treten, wenn der Lanzettenhalter (32) befestigt wird; und

ein Verjüngungsabschnitt (32b) in einer Spitze des Montageabschnitts (32a) des Lanzettenhalters (32) an der Vorderseite in der Punktionsrichtung so ausgebildet ist, dass der Außendurchmesser des Verjüngungsabschnitts (32b) zur Vorderseite in der Punktionsrichtung größer wird.

2. Lanzettenvorrichtung (10) gemäß Anspruch 1, **dadurch gekennzeichnet, dass** der befestigte Zustand des Lanzettenhalters (32) eingerichtet ist, um durch Bewegen des Lanzettenhalters (32) in Punktionsrichtung im Verhältnis zu

dem Befestigungselement (38) zur Vorderseite gelöst zu werden, wenn die Lanzette (20) von dem Lanzettenhalter (32) entfernt wird.

3. Lanzettenvorrichtung (10) mit einer Lanzette (20), die an ihrer Spitze montiert eine Punktionsnadel (21) aufweist und eingerichtet ist, um durch Vorwärtsbewegen der Punktionsnadel (21) in einer Punktionsrichtung eine Punktion auszuführen, wobei die Lanzettenvorrichtung (10) aufweist:

die Lanzette (20);

einen Lanzettenhalter (32) mit einem Montageabschnitt (32a), in den ein Basisendabschnitt der Lanzette eingeführt wird, wobei der Montageabschnitt (32a) die Lanzette hält; und ein Befestigungselement (38), das eingerichtet ist, um mit einer äußeren Umfangsfläche des Montageabschnitts (32a) des Lanzettenhalters (32) in Kontakt zu treten und den Lanzettenhalter (32) in einer zu der Punktionsrichtung kreuzenden Richtung zu befestigen, wenn das Befestigungselement (38) in der Punktionsrichtung relativ zu dem Lanzettenhalter (32) bewegt wird;

dadurch gekennzeichnet, dass

die äußere Umfangsfläche des Montageabschnitts des Lanzettenhalters (52) und das Befestigungselement (58) eingerichtet sind, um durch Bewegen des Befestigungselement (58) relativ zu dem Lanzettenhalter (52) in der Punktionsrichtung zur Rückseite miteinander in Kontakt zu treten, wenn der Lanzettenhalter (52) befestigt wird; und

ein Verjüngungsabschnitt in einer Spitze des Befestigungselements (58) an der Vorderseite in der Punktionsrichtung ausgebildet ist, so dass der Innendurchmesser des Befestigungselements (58) zur Vorderseite in der Punktionsrichtung kleiner wird.

4. Lanzettenvorrichtung (10) gemäß Anspruch 3, **dadurch gekennzeichnet, dass**

der befestigte Zustand des Lanzettenhalters (52) eingerichtet ist, um durch Bewegen des Befestigungselements (58) relativ zu dem Lanzettenhalter in der Punktionsrichtung zur Vorderseite gelöst zu werden, wenn die Lanzette (20) von dem Lanzettenhalter (52) entfernt wird.

5. Lanzettenvorrichtung (10) gemäß einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** das Befestigungselement (38, 58) eingerichtet ist, um den Montageabschnitt des Lanzettenhalters (32, 52) elastisch zu verformen, der mit dem Befestigungselement in einer zu der Punktionsrichtung kreuzenden Richtung in Kontakt tritt, wenn der Lanzettenhalter (32, 52) befestigt wird.

6. Lanzettenvorrichtung (10) gemäß einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** ein Abschnitt des Basisendabschnitts der Lanzette (20), um in den Montageabschnitt des Lanzettenhalters (32, 52) eingeführt zu werden, ausgebildet ist, um den konstanten Außendurchmesser in der Punktionsrichtung aufzuweisen.

7. Lanzettenvorrichtung (10) gemäß einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** die Lanzette (20) aufweist:

einen Punktionskörper (23);

einen Gehäuseabschnitt (22), der einen röhrenförmigen Abschnitt und eine Öffnung aufweist, wobei der röhrenförmige Abschnitt eingerichtet ist, um den Punktionskörper (23) aufzunehmen, so dass es dem Punktionskörper (23) ermöglicht wird, sich in der Punktionsrichtung zurück und vor zu bewegen, wobei die Öffnung in einem Endabschnitt des Gehäuseabschnitts an einer vorstehenden Seite der Punktionsnadel (21) ausgebildet ist; und

einen Eingriffsabschnitt (22b), der eingerichtet ist, um den Punktionskörper (23) im Inneren des Gehäuseabschnitts so zu halten, dass es dem Punktionskörper (23) nicht möglich ist, sich in der Punktionsrichtung zurück und vor zu bewegen, wenn der Punktionskörper (23) von dem Lanzettenhalter entfernt wird, und

wobei die Haltekraft zum Halten der Lanzette in dem Lanzettenhalter kleiner als die Haltekraft durch den Eingriffsabschnitt ist, nachdem der Lanzettenhalter durch das Befestigungselement (38) befestigt ist.

8. Lanzettenvorrichtung gemäß Anspruch 7, **dadurch gekennzeichnet, dass**

die Haltekraft zum Halten der Lanzette (20) in dem Lanzettenhalter größer als die zum Eingriff des Eingriffsabschnitts (22b) notwendige Kraft ist, nachdem der Lanzettenhalter durch das Befestigungselement befestigt ist.

9. Lanzettenvorrichtung (10) gemäß einem der Ansprüche 1 bis 8, **dadurch gekennzeichnet, dass** sie des Weiteren ein Antriebselement (80) aufweist, wobei das Antriebselement zwischen dem Befestigungselement und dem Lanzettenhalter (32) bereitgestellt ist und eingerichtet ist, um die Antriebskraft in Richtung der befestigten Seite des Lanzettenhalters (32) in der Punktionsrichtung auszuüben.

10. Lanzettenvorrichtung (10) gemäß einem der Ansprüche 1 bis 9, **dadurch gekennzeichnet, dass** der Lanzettenhalter (32) den Basisendabschnitt der Lanzette mittels Reibkraft hält.

11. Lanzettenvorrichtung (10) gemäß einem der Ansprüche 1 bis 10, **dadurch gekennzeichnet, dass** ein Nutabschnitt (23e) auf der Oberfläche des Basisendabschnitts ausgebildet ist, wobei der Endabschnitt entlang der Punktionsrichtung ausgebildet ist. 5
12. Lanzettenvorrichtung (10) gemäß einem der Ansprüche 1 bis 11, **dadurch gekennzeichnet, dass** eine Vielzahl von konkaven-konvexen Abschnitten (23f) auf der Oberfläche des Basisendabschnitts ausgebildet ist. 10
13. Lanzettenvorrichtung (10) gemäß einem der Ansprüche 1 bis 12, **dadurch gekennzeichnet, dass** der Basisendabschnitt einen konkaven Abschnitt (23g) aufweist, wobei der konkave Abschnitt in einem Abschnitt des Basisendabschnitts ausgebildet ist, um durch das Befestigungselement befestigt zu werden, und 15
der Lanzettenhalter (32) einen konvexen Abschnitt (32c) aufweist, wobei der konvexe Abschnitt eingerichtet ist, um in den konkaven Abschnitt einzugreifen. 20
25

Revendications

1. Dispositif à lancette (10) ayant une lancette (20) qui comporte une aiguille à ponction (21) montée sur sa pointe, le dispositif à lancette (10) étant configuré pour réaliser une ponction en déplaçant l'aiguille à ponction (21) vers l'avant dans une direction de ponction, le dispositif à lancette (10) comprenant : 30
35
la lancette (20) ;
un porte-lancette (32) comportant une partie de montage (32a) de façon à ce qu'une partie d'extrémité de base de la lancette y soit insérée, la partie de montage (32a) retenant la lancette ; et 40
un élément de fixation (38) étant configuré pour établir un contact avec une surface périphérique externe de la partie de montage (32a) du porte-lancette (32) et fixer le porte-lancette (32) dans une direction inter-sectionnelle à la direction de ponction lorsque l'élément de fixation (38) est relativement déplacé vers le porte-lancette (32) dans la direction de ponction ; **caractérisé en ce que** 45
la surface périphérique externe de la partie de montage (32a) du porte-lancette (32) et l'élément de fixation (38) sont configurés pour entrer en contact l'un(e) avec l'autre en déplaçant le porte-lancette (32) vers le côté arrière dans la direction de ponction par rapport à l'élément de fixation (38) lorsque le porte-lancette (32) est fixé ; et **en ce que** 50
une partie conique (32b) est formée dans une 55

pointe de la partie de montage (32a) du porte-lancette (32) sur le côté avant dans la direction de ponction de sorte que le diamètre extérieur de la partie de montage (32a) devienne plus grand vers le côté avant dans la direction de ponction.

2. Dispositif à lancette (10) selon la revendication 1, **caractérisé en ce que** 10
l'état fixé du porte-lancette (32) est configuré de façon à être dégagé en déplaçant le porte-lancette (32) vers le côté avant dans la direction de ponction par rapport à l'élément de fixation (38) lorsque la lancette (20) est retirée du porte-lancette (32).
3. Dispositif à lancette (10) ayant une lancette (20) qui comporte une aiguille à ponction (21) montée sur sa pointe, le dispositif à lancette (10) étant configuré pour réaliser une ponction en déplaçant l'aiguille à ponction (21) vers l'avant dans une direction de ponction, le dispositif à lancette (10) comprenant : 20

la lancette (20) ;
un porte-lancette (32) comportant une partie de montage (32a) de façon à ce qu'une partie d'extrémité de base de la lancette y soit insérée, la partie de montage (32a) retenant la lancette ; et un élément de fixation (38) étant configuré pour établir un contact avec une surface périphérique externe de la partie de montage (32a) du porte-lancette (32) et fixer le porte-lancette (32) dans une direction inter-sectionnelle à la direction de ponction lorsque l'élément de fixation (38) est relativement déplacé vers le porte-lancette (32) dans la direction de ponction ; **caractérisé en ce que** 35

la surface périphérique externe de la partie de montage du porte-lancette (52) et l'élément de fixation (58) sont configurés pour entrer en contact l'un(e) avec l'autre en déplaçant l'élément de fixation (58) vers le côté arrière dans la direction de ponction par rapport au porte-lancette (52) lorsque le porte-lancette (52) est fixé ; et **en ce que** 40
une partie conique est formée dans une pointe de l'élément de fixation (58) sur le côté avant dans la direction de ponction de sorte que le diamètre intérieur de l'élément de fixation (58) devienne plus petit vers le côté avant dans la direction de ponction. 45

4. Dispositif à lancette (10) selon la revendication 3, **caractérisé en ce que** 50
l'état fixé du porte-lancette (52) est configuré de façon à être dégagé en déplaçant l'élément de fixation (58) vers le côté avant dans la direction de ponction par rapport au porte-lancette lorsque la lancette (20) est retirée du porte-lancette (52). 55

5. Dispositif à lancette (10) selon l'une des revendications 1 à 4, **caractérisé en ce que** l'élément de fixation (38, 58) est configuré pour déformer élastiquement la partie de montage du porte-lancette (32, 52) en établissant un contact avec l'élément de fixation dans une direction inter-sectionnelle à la direction de ponction lorsque le porte-lancette (32, 52) est fixé.

6. Dispositif à lancette (10) selon l'une des revendications 1 à 5, **caractérisé en ce que** une partie de la partie d'extrémité de base de la lancette (20) à insérer dans la partie de montage du porte-lancette (32, 52) est formée pour avoir le diamètre externe uniforme dans la direction de ponction.

7. Dispositif à lancette (10) selon l'une des revendications 1 à 6, **caractérisé en ce que** la lancette (20) comprend :

un corps de ponction (23) ;

une partie de boîtier (22) comportant une partie tubulaire et une ouverture, la partie tubulaire étant configurée pour loger le corps de ponction (23) de sorte que le corps de ponction (23) soit habilité à avancer et reculer dans la direction de ponction, l'ouverture étant formée dans une partie d'extrémité de la partie de boîtier sur un côté saillant de l'aiguille à ponction (21) ; et une partie d'engagement (22b) étant configurée pour retenir le corps de ponction (23) à l'intérieur de la partie de boîtier de sorte que le corps de ponction (23) ne soit pas habilité à avancer et reculer dans la direction de ponction lorsque le corps de ponction (23) est retiré du porte-lancette, et

où la force de retenue destinée à retenir la lancette dans le porte-lancette après la fixation du porte-lancette par l'élément de fixation (38) est inférieure à la force de retenue par la partie d'engagement.

8. Dispositif à lancette selon la revendication 7, **caractérisé en ce que**

la force de retenue destinée à retenir la lancette (20) dans le porte-lancette après la fixation du porte-lancette par l'élément de fixation est supérieure à la force nécessaire pour engager la partie d'engagement (22b).

9. Dispositif à lancette (10) selon l'une des revendications 1 à 8, **caractérisé par** le fait de comprendre en outre un élément de poussée (80), l'élément de poussée étant prévu entre l'élément de fixation et le porte-lancette (32), l'élément de poussée (80) étant configuré pour appliquer la force de poussée vers le côté fixé du porte-lancette (32) dans la direction de

ponction.

10. Dispositif à lancette (10) selon l'une des revendications 1 à 9, **caractérisé en ce que** le porte-lancette (32) retient la partie d'extrémité de base de la lancette au moyen de la force de friction.

11. Dispositif à lancette (10) selon l'une des revendications 1 à 10, **caractérisé en ce qu'une** partie de rainure (23e) est formée sur la surface de la partie d'extrémité de base, la partie de rainure étant formée le long de la direction de ponction.

12. Dispositif à lancette (10) selon l'une des revendications 1 à 11, **caractérisé en ce qu'une** pluralité de parties concave-convexes (23f) sont formées sur la surface de la partie d'extrémité de base.

13. Dispositif à lancette (10) selon l'une des revendications 1 à 12, **caractérisé en ce que** la partie d'extrémité de base comporte une partie concave (23g), la partie concave étant formée dans une partie de la partie d'extrémité de base à fixer par l'élément de fixation, et

le porte-lancette (32) comporte une partie convexe (32c), la partie convexe étant configurée pour s'engager avec la partie concave.

Fig. 1

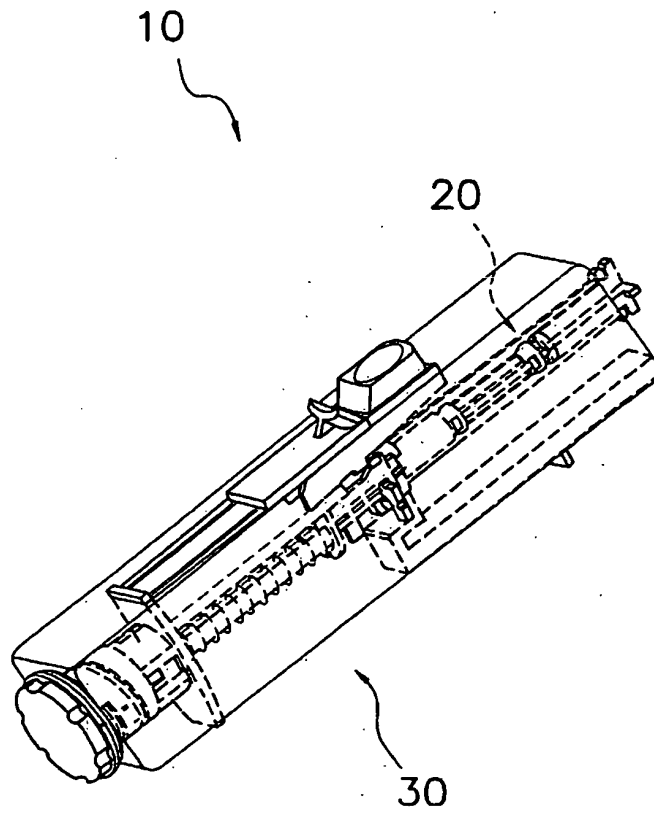
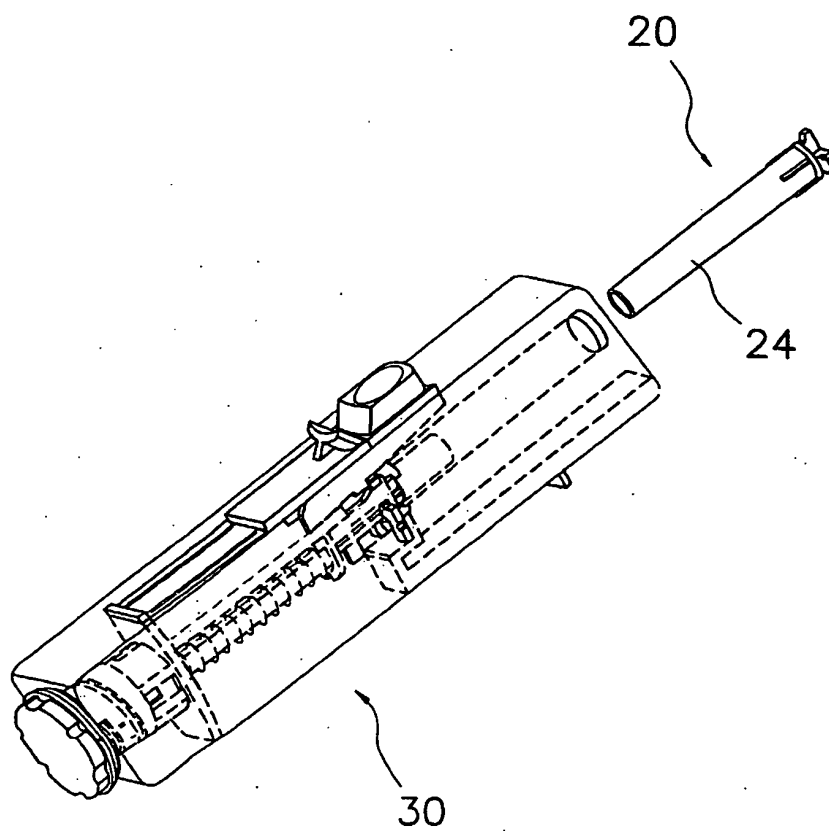


Fig. 2



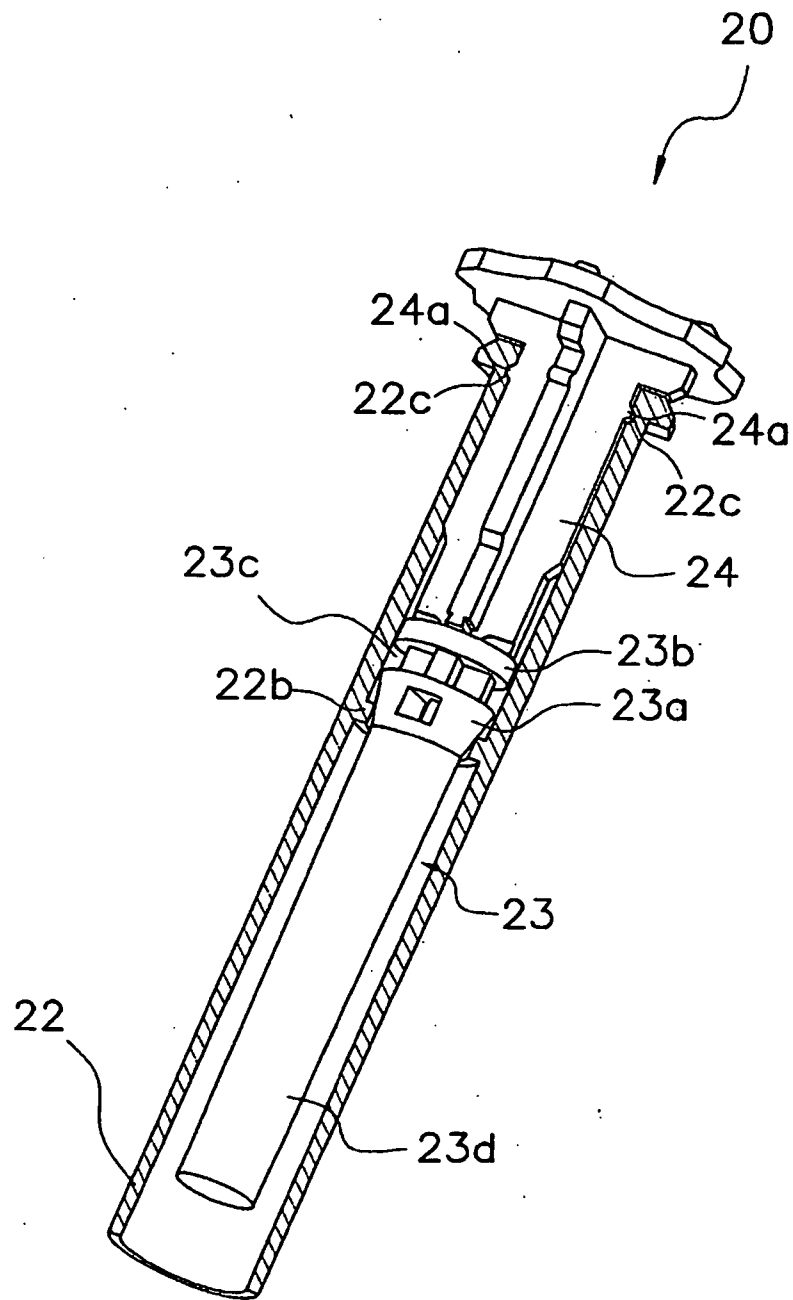


Fig. 3

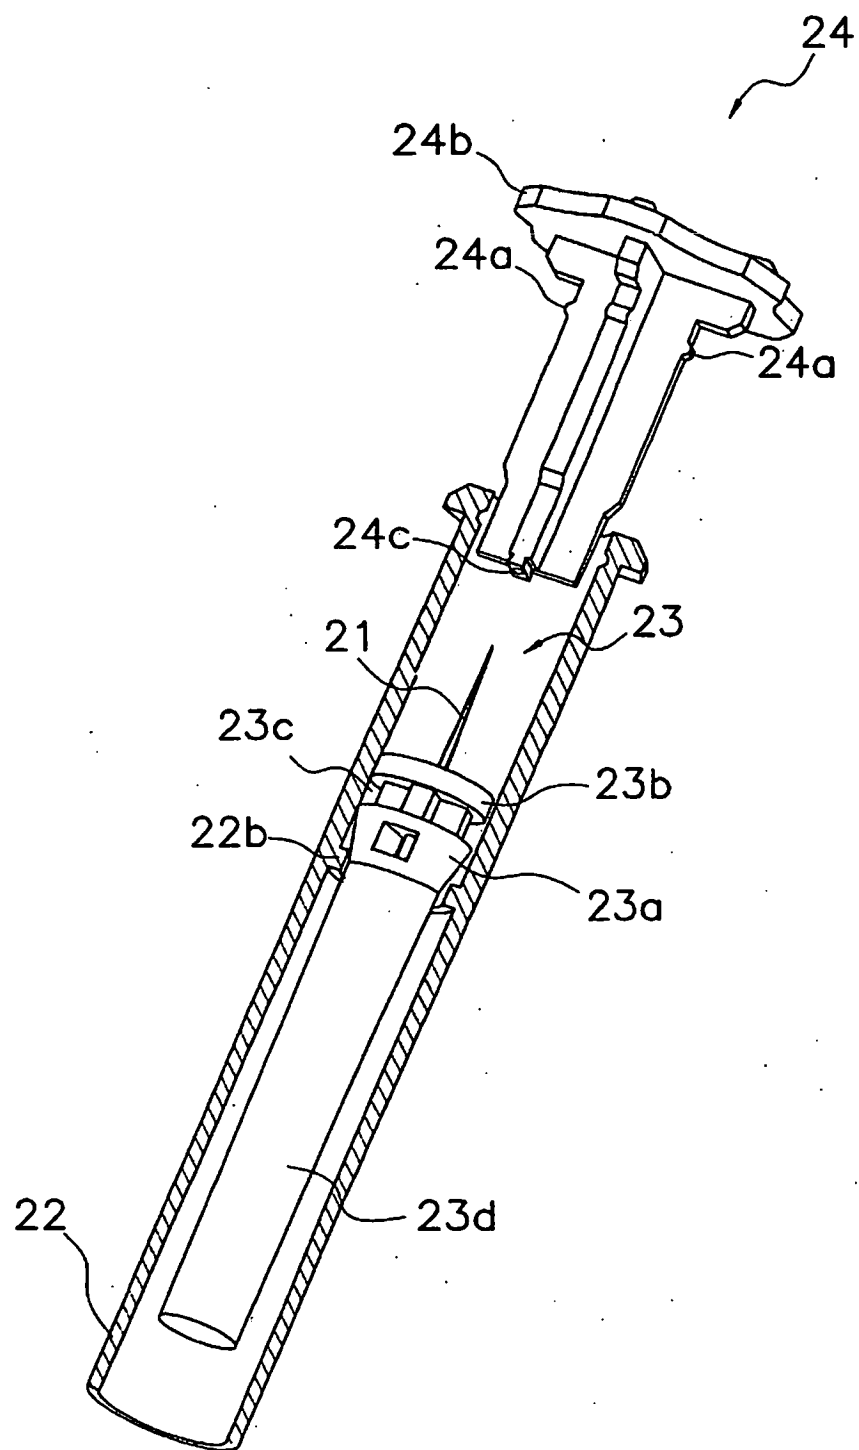


Fig. 4

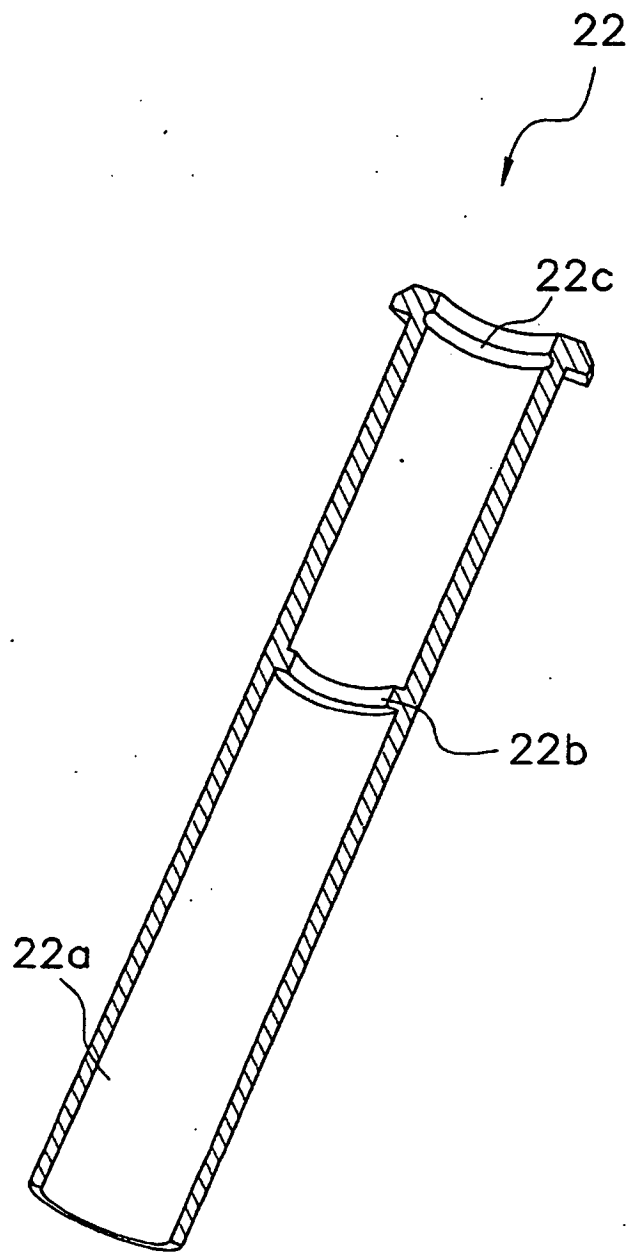


Fig. 5

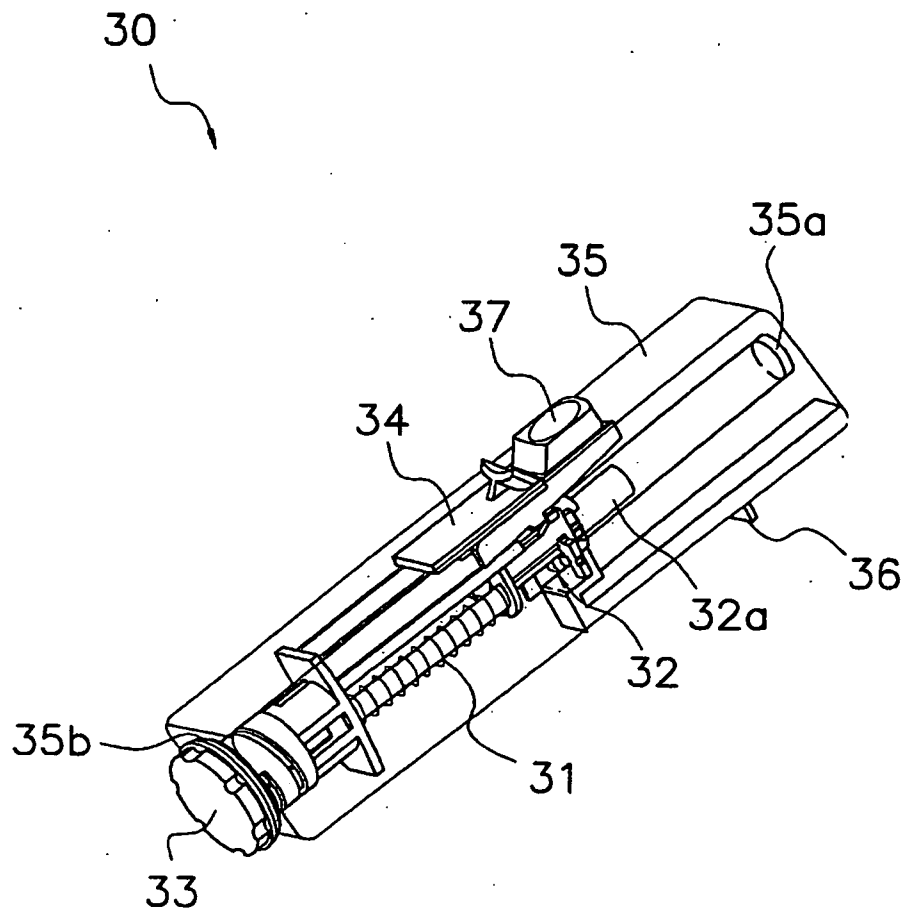


Fig. 6

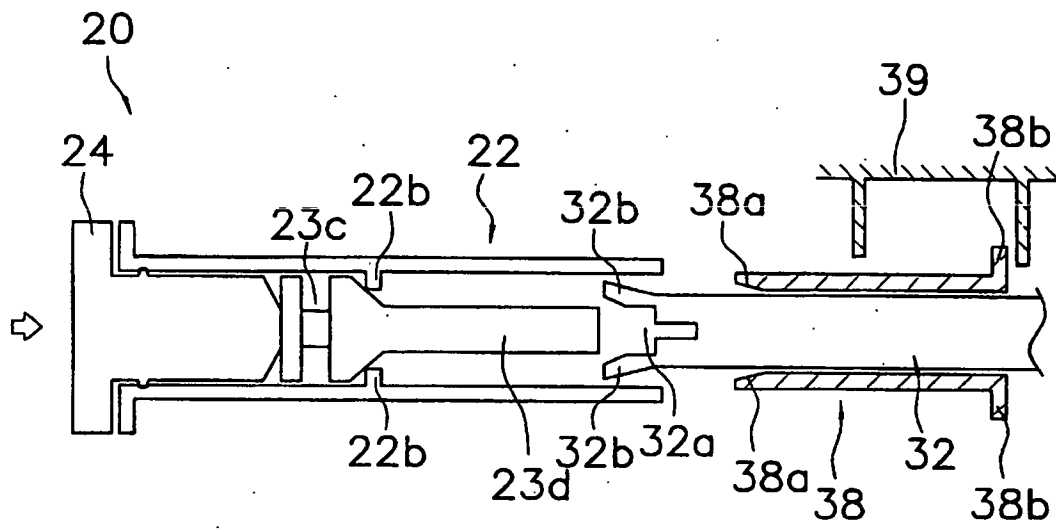


Fig. 7A

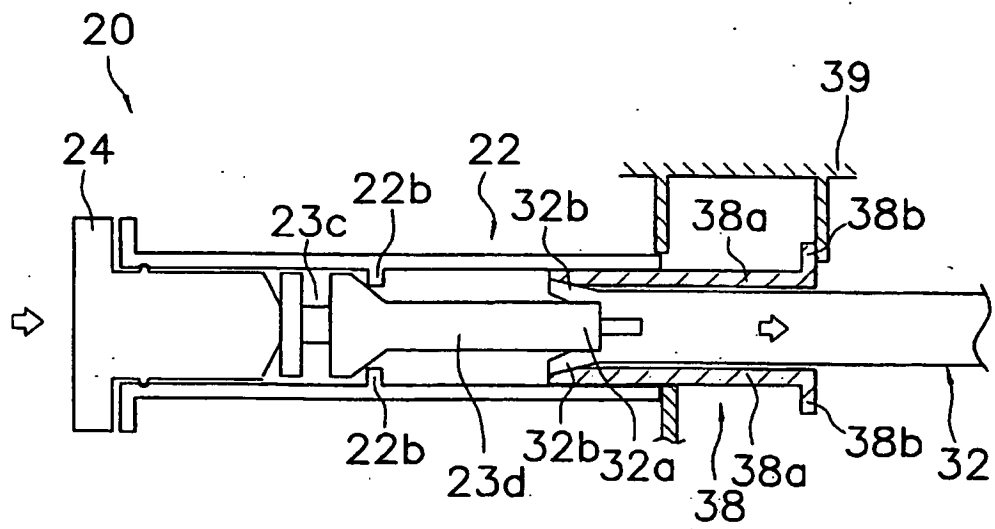


Fig. 7B

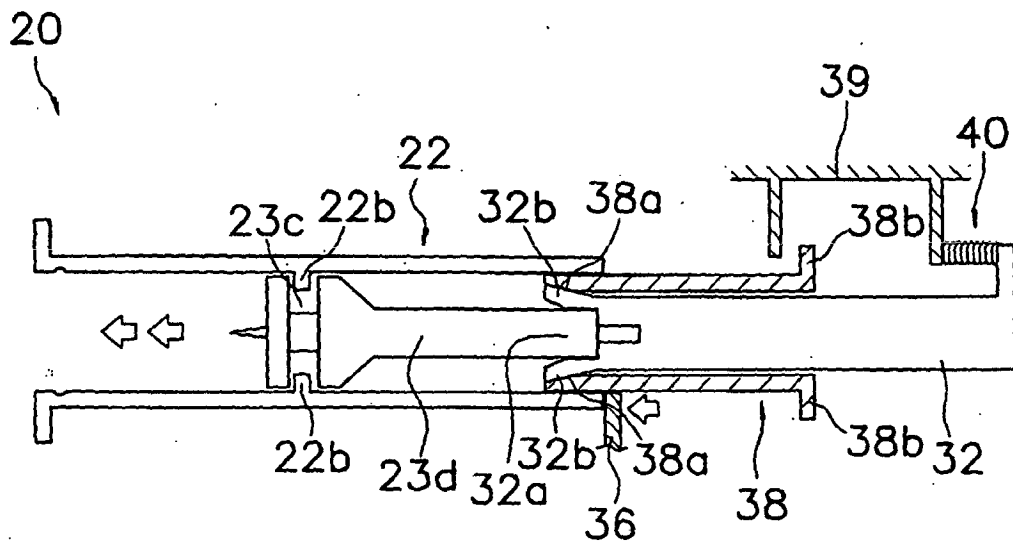


Fig. 8A

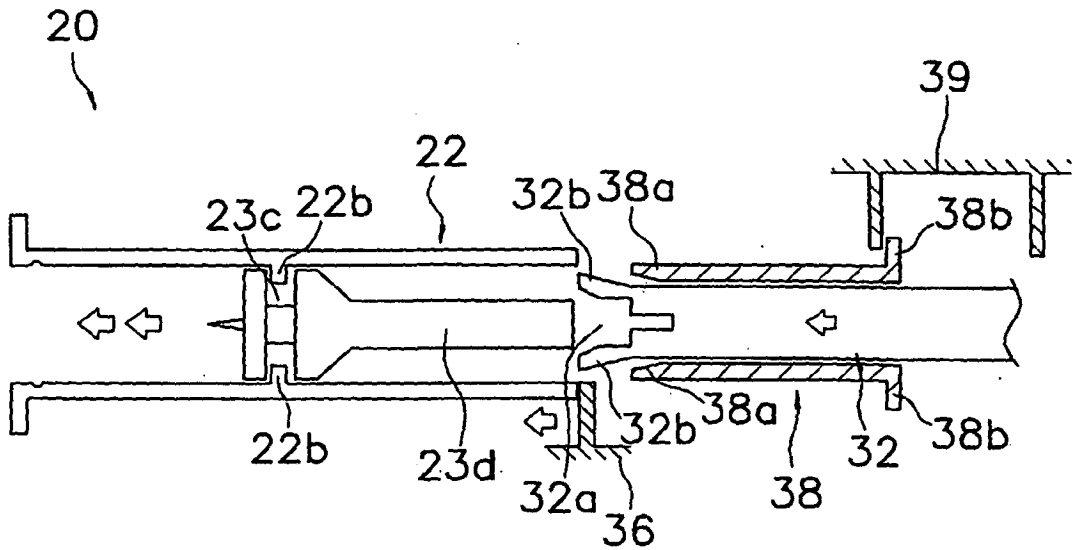


Fig. 8B

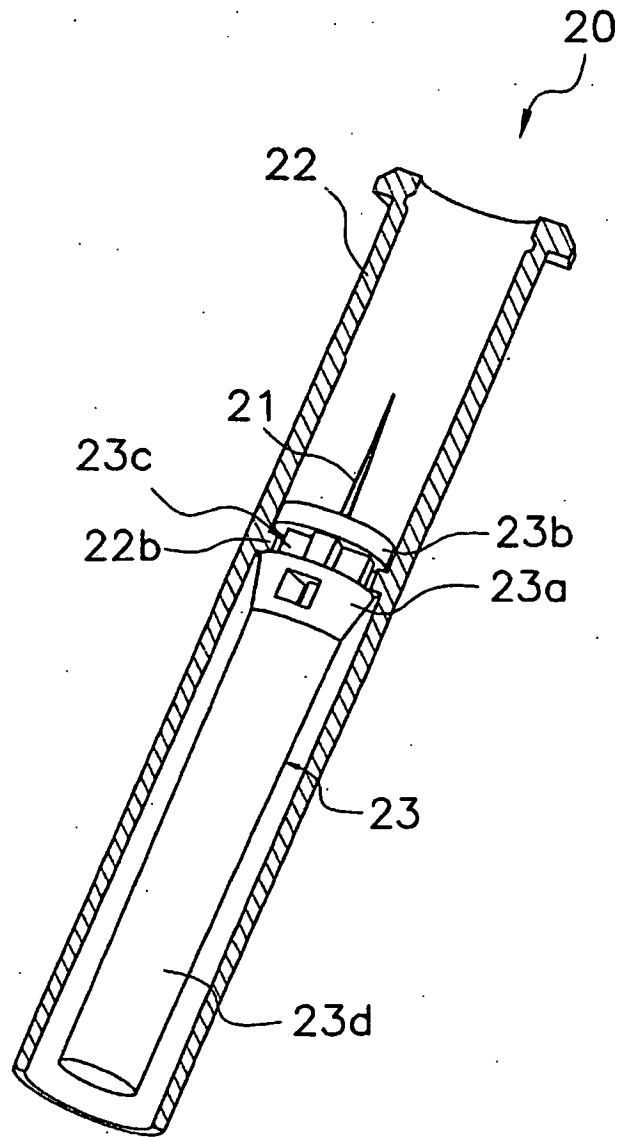


Fig. 9

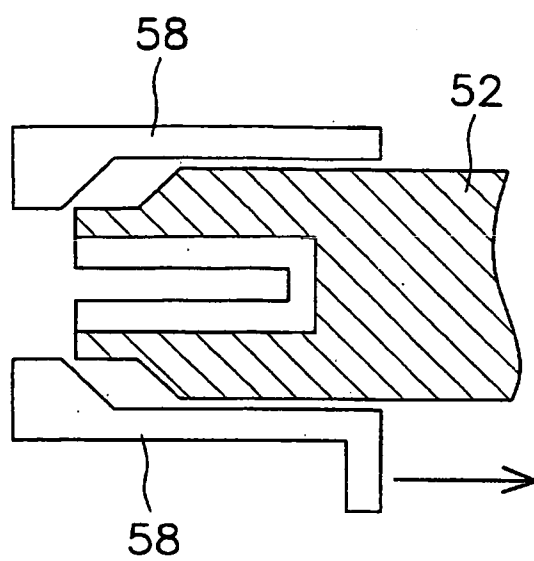


Fig. 10A

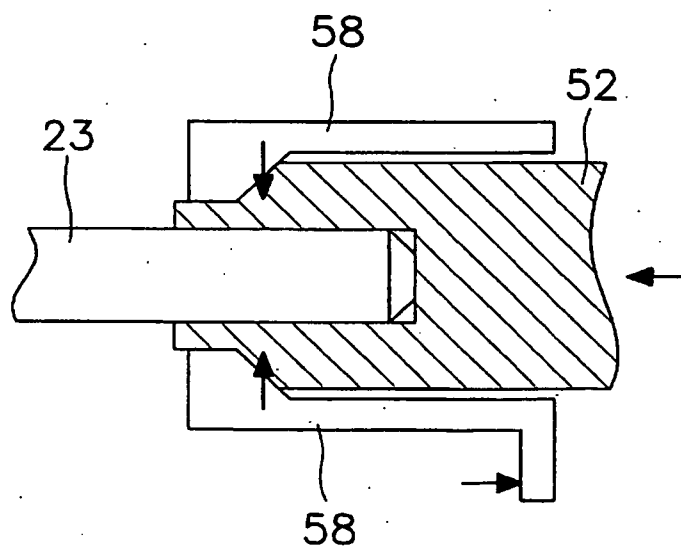


Fig. 10B

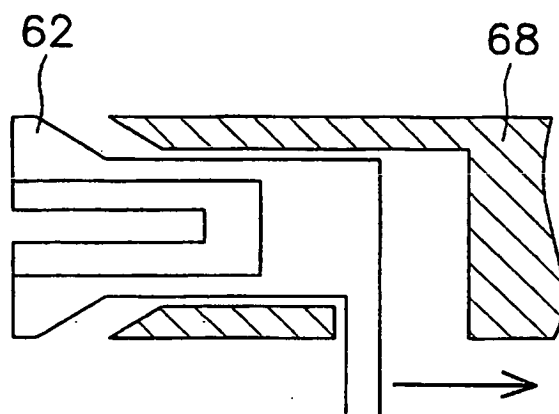


Fig. 11A

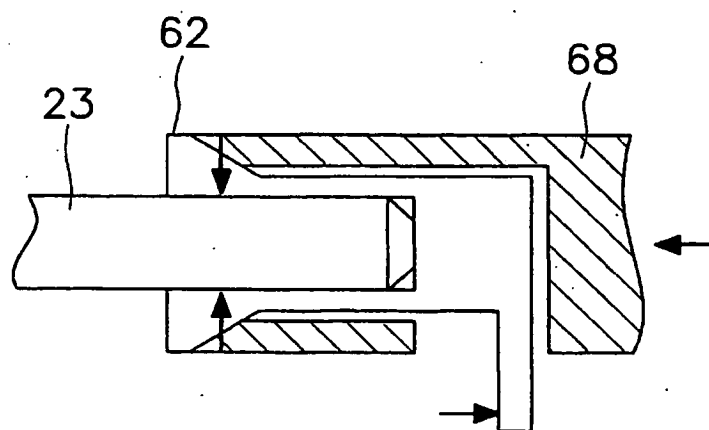


Fig. 11B

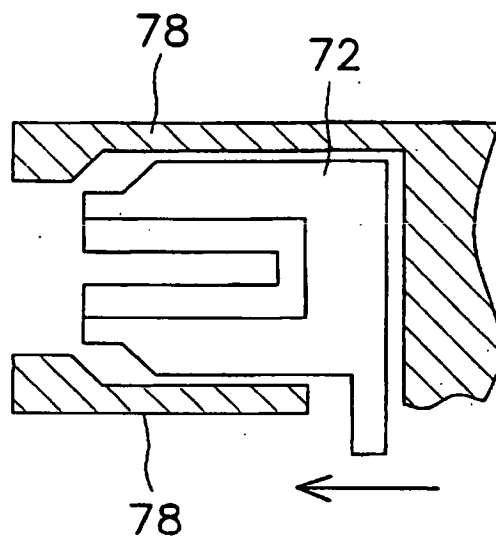


Fig. 12A

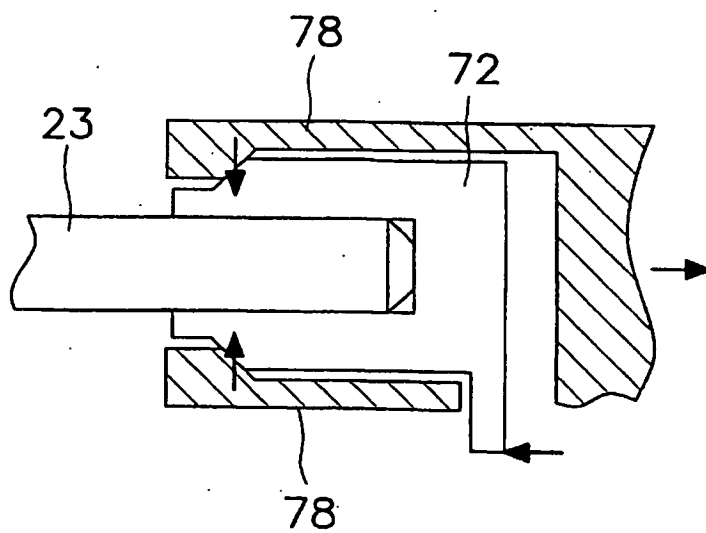


Fig. 12B

Fig. 13

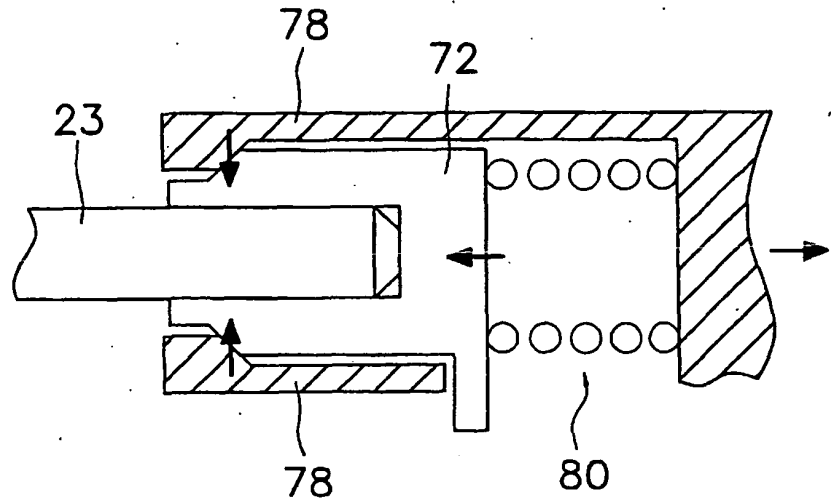


Fig. 14

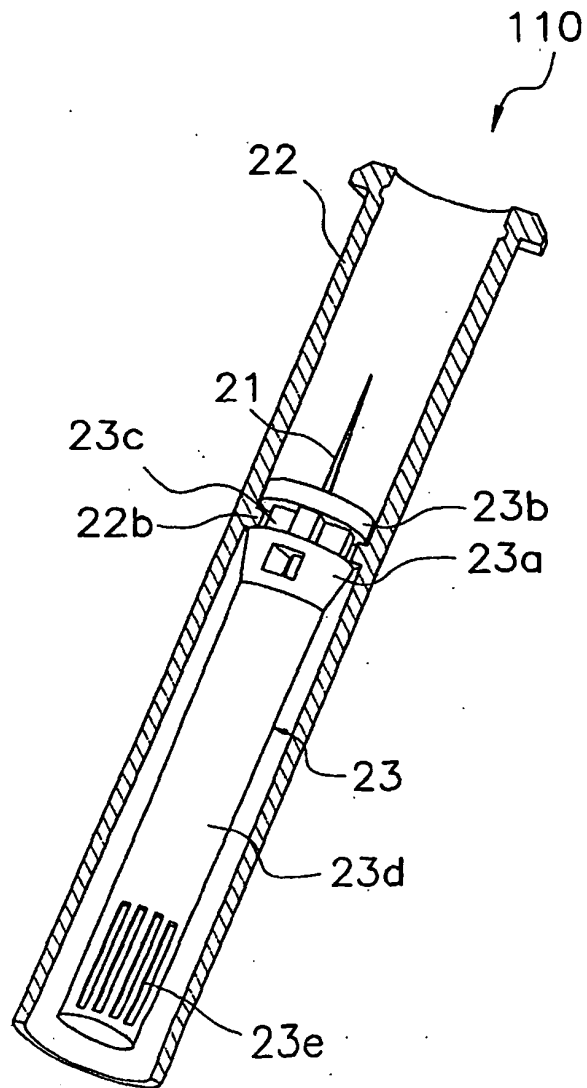


Fig. 15

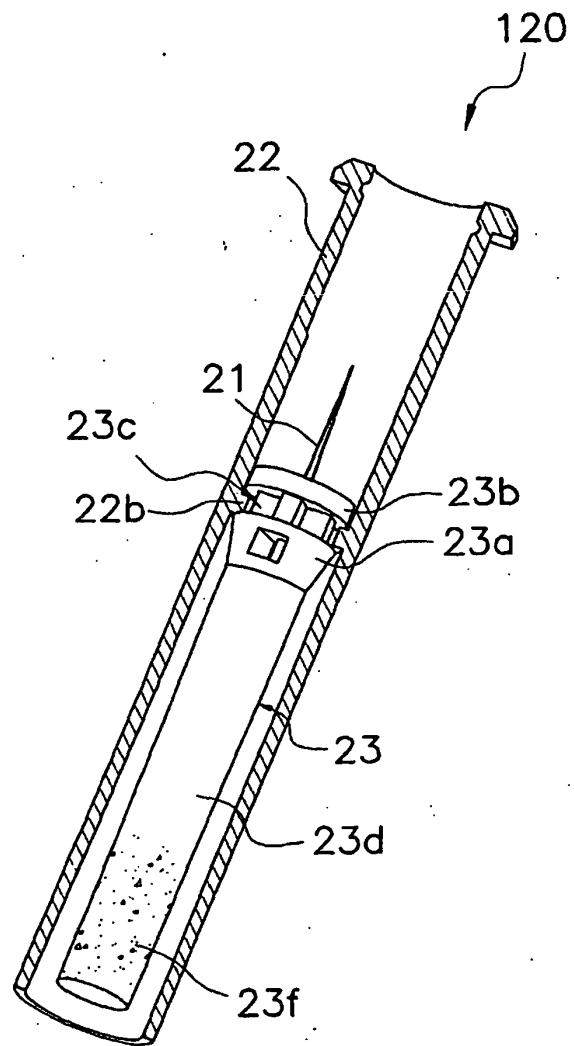
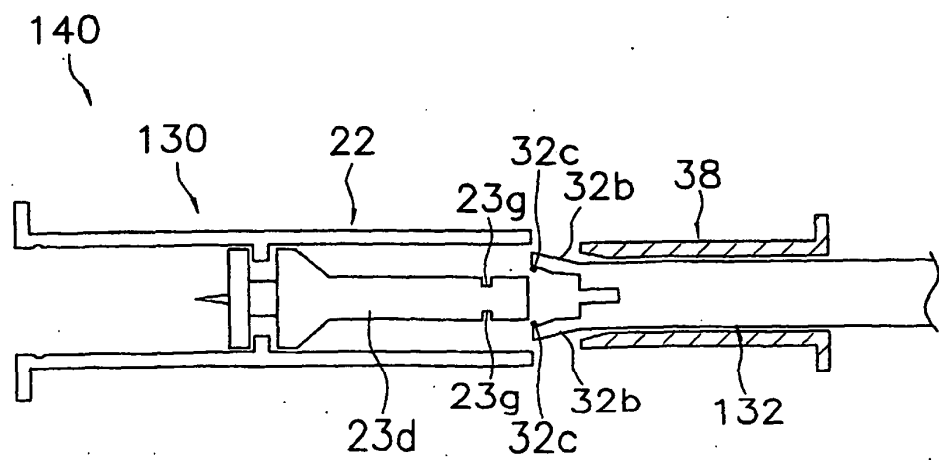


Fig. 16



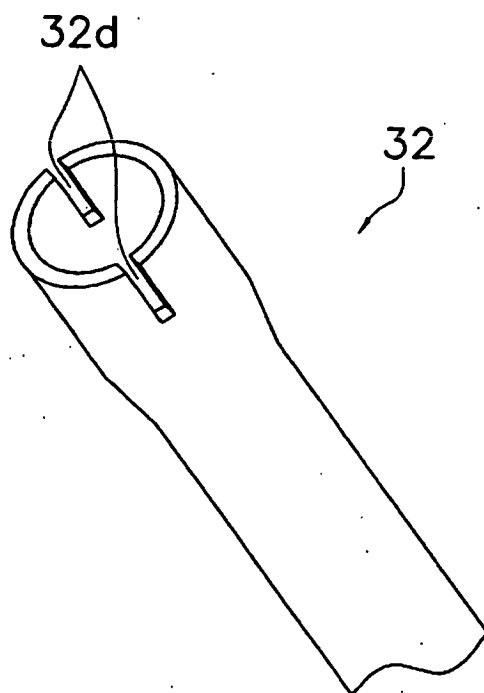


Fig. 17

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000245717 A [0007]
- JP 2004329248 A [0008]
- WO 2004043258 A [0009]
- JP 2004113580 A [0010]
- US 6090124 A [0011]

专利名称(译)	针插入装置		
公开(公告)号	EP1911395B1	公开(公告)日	2011-11-09
申请号	EP2006781904	申请日	2006-07-28
[标]申请(专利权)人(译)	爱科来株式会社		
申请(专利权)人(译)	ARKRAY , INC.		
当前申请(专利权)人(译)	ARKRAY , INC.		
[标]发明人	FUKUZAWA MASAHIRO C O ARKRAY INC		
发明人	FUKUZAWA, MASAHIRO, C/O ARKRAY, INC.		
IPC分类号	A61B5/00		
CPC分类号	A61B5/150198 A61B5/150022 A61B5/150412 A61B5/150519 A61B5/150549 A61B5/150564 A61B5/150618 A61B5/150717 A61B5/150916 A61B5/15113 A61B5/15117 A61B5/1519 A61B5/15194		
优先权	2005221924 2005-07-29 JP		
其他公开文献	EP1911395A4 EP1911395A1		
外部链接	Espacenet		

摘要(译)

刺血针装置 (10) 被构造为刺血针装置, 用于通过将包括穿刺针 (21) 的刺血针 (20) 安装到穿刺体保持器 (32) 的尖端, 然后通过施加推动力来执行穿刺。为了使刺血针装置具有简单的结构, 可以在刺血针使用时加强用于保持刺血针的保持力, 从而在穿刺方向上朝向前方刺穿身体保持器 (32)。在刺血针装置 (10) 中, 插入到穿刺体保持器 (32) 的安装部 (32a) 中的穿刺体 (23) 的插入部 (23d) 借助于摩擦力被保持。设置在主体 (30) 侧的紧固构件 (38) 与穿刺体保持器 (32) 的安装部分 (32a) 的外周部分接触, 并且当紧固构件时向内紧固安装部分 (32a) (38) 相对于穿刺体支架 (32) 沿穿刺方向移动。

Fig. 1

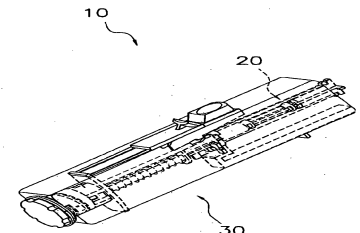


Fig. 2

