

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.05.2006 Bulletin 2006/18

(51) Int Cl.:
A61B 5/00^(2006.01) G01N 3/00^(2006.01)
A61B 5/103^(2006.01)

(21) Application number: **01901426.5**

(86) International application number:
PCT/JP2001/000304

(22) Date of filing: **18.01.2001**

(87) International publication number:
WO 2001/052724 (26.07.2001 Gazette 2001/30)

(54) **DEVICE FOR MEASURING PHYSICAL PROPERTIES OF ELASTIC BODIES**

GERÄT ZUR MESSUNG VON PHYSIKALISCHEN EIGENSCHAFTEN VON ELEKTRISCHEN
KÖRPERN

DISPOSITIF DE MESURE DES PROPRIETES PHYSIQUES DE CORPS ELASTIQUES

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

• **Nishimori, Yasutomo,**
C/o Pola Chemical Ind. Inc.
Yokohama-shi,
Kanagawa 244-0812 (JP)

(30) Priority: **19.01.2000 JP 2000009671**

(74) Representative: **Bannerman, David Gardner et al**
Withers & Rogers LLP
Goldings House,
2 Hays Lane
London SE1 2HW (GB)

(43) Date of publication of application:
16.10.2002 Bulletin 2002/42

(73) Proprietor: **POLA CHEMICAL INDUSTRIES INC.**
Shizuoka-shi,
Shizuoka 420-0914 (JP)

(56) References cited:
DE-A1- 19 719 336 DE-U1- 9 202 914
JP-A- 1 115 342 JP-A- 61 181 436

(72) Inventors:
• **Oba, Ai,**
C/o Pola Chemical Industries Inc.
Yokohama-shi,
Kanagawa 244-0812 (JP)

Description

Technical Field

5 **[0001]** The present invention relates to a device for appropriately measuring mechanical properties of elastic bodies such as mechanical properties of a skin.

Background Art

10 **[0002]** Conventionally, as a device for measuring mechanical properties of elastic bodies such as a skin, there are known devices, such as a so-called Cutometer for bringing an adherent probe into close contact with the skin and sucking and exhausting a gas therefrom to measure a degree of deformation of the surface of the skin caused thereby, and a Twistometer for rotating a contact on a surface of the skin to measure a stress generated from the skin side in response to the rotation. In such devices, there are difficulties in that measurement cannot be performed taking into account
15 directivity of the skin and quantitative measurement cannot be performed in the strict sense of the word. In addition, a force applied to the skin by these devices is not a force applied to the skin in a daily life.

[0003] As a device capable of measuring extending ability of the skin in an arbitrary direction, there is known an extensometer (Acta. Derm. Venereol. (Stockh), 1997, 77:416-419). However, the only mechanical property value that is measured by this device is extending ability.

20 **[0004]** Document DE 197 19 336 A1 discloses a device measuring the extending ability, with features according to the preamble of claim 1.

Disclosure of the Invention

25 **[0005]** The inventors have found that a collagen fiber structure exists in dermis of the skin and, therefore, there is a significant difference of mechanical properties according to directions. Therefore, meaningful mechanical property values cannot be measured in the skin unless directivity of measurement is controlled strictly. Moreover, the extensometer for pulling the skin to measure its extending ability is not regarded as an optimum machine for measuring mechanical properties in examining relationship between mechanical properties and wrinkle formation.

30 **[0006]** The present invention has been devised under such circumstances, and it is an object of the present invention to provide a device for measuring mechanical properties of elastic bodies that is capable of strictly controlling a direction of measurement and measuring mechanical properties or the like that are more related to wrinkle formation on a surface of an elastic body such as a skin.

35 **[0007]** In view of such actual circumstances, the inventors concentrated their efforts on researches and, as a result, found that such measurement is possible by using a device for measuring mechanical properties of elastic bodies that is capable of analyzing deformation of the skin due to an external force imitating a force that a facial skin of a human is actually subjected to in a daily life, that is, measuring and analyzing a stress of the skin when the skin is contracted. That is, the present invention relates to the following technology.

40 (1) A device for measuring mechanical properties of elastic bodies, comprising: at least two contacts adapted to contact a surface of an elastic body to be measured, at least one of the contacts being movable; a drive section for moving the movable contact; a control section for controlling an action of the drive section; a detecting section for detecting a stress generated by the movement of the contact as an electric signal; and a processing section for processing the electric signal for the stress detected by the detecting section and an amount of movement of the
45 movable contact, in which the action of the contacts making contact with the surface of the elastic body includes a closing action of the two of the contacts and a stationarily holding action after the closing action.

(2) A device for measuring mechanical properties of elastic bodies according to (1), which further comprises a display section for displaying data processed by the processing section.

50 (3) A device for measuring mechanical properties of elastic bodies according to (1) or (2), wherein the elastic body to be measured is a skin.

(4) A device for measuring mechanical properties of elastic bodies according to any one of (1) to (3), wherein a probe is comprised of the contacts, the drive section and the detecting section, and the device comprises an arm section for holding a position of the probe.

55 (5) A device for measuring mechanical properties of elastic bodies according to any one of (1) to (4), which comprises a holding section for holding the elastic body to be measured.

(6) A device for measuring mechanical properties of elastic bodies according to any one of (1) to (5), wherein the contacts are fixed on the surface of the elastic body.

Brief Description of the Drawings

[0008]

- 5 Fig. 1 is a schematic view showing a device of Embodiment 1.
 Fig. 2 is a view showing a protocol of Embodiment 2.
 Fig. 3 shows an example of a plot pattern obtained in Embodiment 2, in which measurement is performed in a central part on an outer side of a forearm (at approximately 10 cm from a wrist) and in a short axis direction.
 Fig. 4 shows characteristics and parameters of the plot pattern obtained in Embodiment 2, in which r5, r6, r7, r8, t6 and t8 of the fifth wave correspond to r1, r2, r3, r4, t2 and t4 of the first wave, respectively.
 10 Fig. 5 is a schematic view showing a device of Embodiment 3.
 Fig. 6 shows results of measurement of silicone rubber (a) and agarose gel (b) in Embodiment 3.
 Fig. 7 shows results of measurement of a skin of a human arm in Embodiment 3.
 Fig. 8 shows results of calculating average values of parameters Fmax and Fv for each site and direction of measurement.
 15 Fig. 9 shows results of measurement of silicone rubber (a) and agarose gel (b) in Embodiment 4.
 Fig. 10 shows results of measurement of a skin of a human arm in Embodiment 4.
 Fig. 11 shows results of calculating average values of parameters F1, F2, F3 and T for each direction of measurement.

20 Best Mode for carrying out the Invention

[0009] The present invention will be hereinafter described in detail centering on embodiments.

(1) Contacts of the device for measuring mechanical properties of elastic bodies of the present invention

25 **[0010]** The device for measuring mechanical properties of elastic bodies of the present invention is characterized by having at least two contacts, at least one of which is movable. This is because a distance between the contacts is changed, whereby an elastic body on which the contacts are placed is deformed and a change in a stress caused in accordance with the deformation shows characteristics of mechanical properties of the elastic body. In this case, when
 30 two contacts are provided, one of the contacts may be stationary and the other may be movable or both of the contacts may be movable. In the case in which both the contacts are movable, analysis of a change in a stress becomes more complicated than the former case. In addition, a device having three or more contacts to measure and analyze a change in a stress with respect to a more complicated deformation pattern also belongs to the technical scope of the device for measuring mechanical properties of elastic bodies of the present invention. Further, both the movable and unmovable
 35 contacts are preferably fixed on the elastic body by adhesive or a viscous material during measurement. However, the contacts can be used with their contacting parts made in a shape having a large coefficient of friction instead of being fixed if evaluation of sliding resistance on the elastic body is taken into account.

(2) A drive section of the device for measuring mechanical properties of elastic bodies of the present invention

40 **[0011]** The device for measuring mechanical properties of elastic bodies of the present invention has a drive section. The drive section functions as a power source for moving the above-described movable contact. As such a power source, a motor or the like can be preferably mentioned. For example, rotational motion generated by a motor is converted to linear motion by a cam, a pulley and the like to cause the movable contact to move linearly. An amount of movement of
 45 the movable contact driven by the drive section is monitored according to motion characteristics of a movable portion such as position coordinates and the number of rotations of the contact.

(3) A control section of the device for measuring mechanical properties of the present invention

50 **[0012]** Kinetic energy generated by the drive section causes the contact to move, for example, linearly. Such movement is controlled by a control section. This is because the surface of the elastic body may be destroyed if an excessive amount of movement is applied to the contact or reliability of a measurement value may be damaged if motion control is not performed properly. Such control is preferably performed based on results of the above-described monitoring of an amount of movement. In addition, such control is managed by a computer or the like and becomes means for specifying
 55 a motion pattern (action) of the movable contact. As such a computer, a commercially available personal computer can be used.

[0013] The motion pattern of the movable contact in the device for measuring mechanical properties of the present invention is set such that the action of the contact making contact with the surface of the elastic body includes a closing

action of the two of the contacts and a stationarily holding action after the closing action. Preferably, a motion pattern is used in which a basic cycle consisting of the closing action for reducing a distance between the contacts, the stationarily holding action for maintaining the distance between the contacts and a restoring action for restoring the distance between the contacts is repeated, and the motion pattern is analyzed based on a measurement value obtained in the last cycle.

5 An initial value of the distance between the contacts and its reducing value and reducing speed are properly selected according to a type of an elastic body. In the case of a skin, the initial value, the reducing value and the reducing speed are usually selected from the ranges of 3 to 10 mm, 0.5 to 5 mm and 0.5 to 2 mm/sec, respectively. The number of cycles is usually one to five.

10 **[0014]** Consequently, mechanical properties that are considered to more strongly affect wrinkle formation of elastic bodies such as a skin can be checked.

(4) A detecting section of the device for measuring mechanical properties of elastic bodies of the present invention

15 **[0015]** A detecting section of the device for measuring mechanical properties of elastic bodies of the present invention detects a stress derived from an elastic body which is caused by movement of the movable contact. The stress detected in this way is transmitted to a processing section discussed below as an electric signal. Thus, the stress generated by the movement of the movable contact indicates mechanical properties of the surface of the elastic body and is detected as a numerical value on which various mechanical properties of an elasticity value are reflected according to a motion pattern of the movable contact.

20 (5) Probe

25 **[0016]** The above-described contacts, drive section and detecting section preferably constitute a probe as one unit for convenience of use. Such a probe preferably has a structure in which its position is fixed during measurement. As for position fixing means, the probe is preferably attached to an end of a so-called arm which has a metal framework and a spring portion and whose position can be fixed and aligned. With such a structure, a position and a direction of the contact can be changed freely and mechanical properties of the elastic body can be measured in an arbitrary direction with respect to the surface of the elastic body. Such easiness of deformation of the arm should be lower than the movability of the contact. In addition, it is preferable to provide a guard ring surrounding the contact. Influence by parts outside the measurement area can be minimized by providing the guard ring. Examples of the guard ring include a guard ring of a square cylinder shape and a guard ring of a double cylindrical shape, wherein an inner cylinder can slide inside an outer cylinder and the inner cylinder is energized by a spring to protrude more than the outer cylinder. A part contacting the elastic body may be coated with silicone for slip prevention.

35 (6) A processing section of the device for measuring mechanical properties of elastic bodies of the present invention

40 **[0017]** A processing section of the device for measuring mechanical properties of elastic bodies of the present invention is a part for processing an amount of movement of the movable contact and a stress generated by the movement of the movable contact. A usual personal computer may be used as the processing section and a special-purpose program may be prepared for the processing. However, the amount of movement (or position coordinates of the movable contact) can be plotted on the X-axis and the stress can be plotted on the Y-axis utilizing, for example, a spreadsheet software such as Excel manufactured by Microsoft Corporation. When such plotting is performed on a graph, a characteristic pattern can be obtained for each elastic body.

45 **[0018]** The obtained pattern may be analyzed as a whole or a part of the pattern may be analyzed as parameters. For example, in a pattern obtained in a basic cycle consisting of a closing action for reducing a distance between the contacts (step 1), a stationarily holding action for maintaining the distance between the contacts (step 2) and a restoring action (step 3) for restoring the distance between the contacts, the parameters include a maximum stress at the time of reduction in step 1 (F_{max} in Fig. 6 or F_1 in Fig. 9), a maximum value of a stress attenuating at the time of maintenance in step 2 (F_v in Fig. 6 or F_2 in Fig. 9), a maximum value of a stress decreasing at the time of releasing reduction in step 3 (F_3 in Fig. 9) and time until the attenuation of the stress reaches F_2/e ($e=2.718$) at the time of maintenance in step 2 (T in Fig. 9).

50 **[0019]** Moreover, the device for measuring mechanical property of elastic bodies of the present invention preferably has a display section for displaying data processed by the processing section. The display section is, for example, a display.

55 **[0020]** According to the device for measuring mechanical properties of elastic bodies of the present invention, mechanical properties in a form of a combination of mechanical properties attributable to a surface itself of an elastic body and mechanical properties attributable to an inner structure of the elastic body can be measured. Examples of properties reflected on such mechanical properties include a loss of elasticity due to aging, a change in accordance with photoaging, properties relating to wrinkle formation and the like.

[0021] A specific example of the device for measuring mechanical properties of elastic bodies of the present invention will be described with reference to Fig. 5. Contacts are comprised of arms 2 having silicone members 1 for slip prevention at their ends. Strain gauges 3 are attached to probe sides of the arms 2 as detecting sections. One of the arms 2 is made movable by a stepper motor 4 functioning as a drive section. Electric signals from the strain gauges 3 are amplified by a strain amplifier 6 and inputted in a computer 8 functioning as a processing section through a stress signal regulator 7. In addition, the stepper motor 4 is controlled by a motor controller 5 functioning as a control section based on a control signal from the computer 8. An amount of movement of the contact is calculated by the computer 8 from the control signal to the motor controller 5. Then, data processed by the computer 8 are displayed on a display 9. In measuring mechanical properties of the skin, operations are applied to the skin such that the silicone members 1 at the ends of the contacts make contact with the skin and a distance between the arms 2 is reduced and restored by the stepper motor 4 controlled by the motor controller 5, whereby the skin is contracted and restored. An amount of movement of the arms 2 and a force from the skin applied to the arms 2 at this time are inputted in the computer 8 and mechanical properties are measured.

Embodiments

<Embodiment 1>

[0022] A device for measuring mechanical properties of elastic bodies shown in Fig. 1 is provided with a probe having one movable contact and one stationary contact and also having a motor (drive section) for driving the movable contact, a control section for controlling forward movement, backward movement and stop of the contact and a detecting section for detecting a stress applied to the contact and, moreover, is provided with a personal computer functioning as a processing section for transmitting a control signal of movement to the control section in accordance with a program, converting this control signal into a position coordinate (X coordinate) and capturing the detected stress as a Y coordinate. As a motion pattern of the movable contact, the two contacts are initially set in positions 4 mm apart from each other and the movable contact approaches the unmovable contact by 1 mm in one second. Thereafter, the movable contact keeps this position for five seconds and returns to the original position 4 mm apart from the unmovable contact in one second. The computer is programmed to repeat this work five times.

<Embodiment 2>

[0023] Positions of a probe and patterns of a stress were measured in a central part on an outer side of an upper arm (photoaging site) and a central part on an inner side of a forearm (physiological aging site) with respect to seven subjects in their twenties, five subjects in their thirtieth and five subjects in their fiftieth using the device of Embodiment 1 and in accordance with a protocol shown in Fig. 2. An example of a pattern of a graph in such measurement is shown in Fig. 3. Parameters shown in Fig. 4 were calculated from coordinates of each site of this pattern. When relationships among these parameters, measured sites and ages were checked, results shown in Table 1 were obtained. From these results, it can be seen that non-invasive measurement of aging of the skin, which cannot be measured conventionally, can be performed.

Table 1

Parameter	Minor axis measurement	Major axis measurement
F1(1)	No significant difference	No significant difference
F2(1)	No significant difference	↓*(p<0.05) Physiological aging site
F3(1)	No significant difference	No significant difference
T(1)	No significant difference	No significant difference
F1(5)	No significant difference	↓*(p<0.05) Physiological aging site
F2(5)	No significant difference	↓**(p<0.01) Physiological aging site
F3(5)	No significant difference	↑*(p<0.05) Photoaging site
T(5)	No significant difference	No significant difference

<Embodiment 3>

[0024] A measurement device of this embodiment will be described with reference to Fig. 5. Contacts are constituted by arms 2 having silicone members 1 for slip prevention at their ends. Strain gauges 3 are attached to probe sides of the arms 2 as detecting sections. One of the arms 2 is made movable by a stepper motor 4 functioning as a drive section. Electric signals from the strain gauges 3 are amplified by a strain amplifier 6 and inputted in a computer 8 functioning as a processing section through a stress signal regulator 7. In addition, the stepper motor 4 is controlled by a motor controller 5 functioning as a control section based on a control signal from the computer 8. An amount of movement of the contact is calculated by the computer 8 from the control signal to the motor controller 5. Then, data processed by the computer 8 are displayed on a display 9. A guard ring (which is made of metal and has a square shape with one side being 33 mm and a width of 10 mm) is provided around the contacts in order to minimize influence by portions outside the measurement area.

[0025] Motion pattern of the movable contact is the following:

- Step 1: The distance between the arms is reduced from 4 mm to 3 mm (1 mm/sec);
- Step 2: The distance between the arms is maintained at 3 mm for four seconds; and
- Step 3: The distance between the arms is returned to 4 mm (1 mm/sec).

[0026] Repeat of the cycle: Five times (the pattern is analyzed for the last cycle)

[0027] Silicone rubber was measured as a highly elastic sample and agarose gel was measured as a sample having viscoelasticity using the above-described device. An example of measurement results is shown in Fig. 6. When the pattern was analyzed using a maximum stress at the time of skin contraction ($F_{max}(V)$ in Fig. 6), and attenuation of a stress observed in step 2 ($F_v(V)$ in Fig. 6) as parameters, F_v observed in the agarose gel was hardly observed in the silicone rubber. Therefore, F_v is considered to be a parameter relating to viscoelasticity. In addition, it has been found that F_{max} increases dependently on hardness of the silicone rubber or concentration of the agarose gel. Therefore, F_{max} is considered to be a parameter relating to hardness.

[0028] Next, using the above-described device, measurement was performed with seventeen healthy white males and females (in ages of twenty to sixty-one) as subjects in two directions along minor axis and major axis of the arm with respect to two sites, a center of the inner side of the upper arm and a center of the outer side of the forearm. An example of measurement results is shown in Fig. 7. It can be seen that the result shows a pattern of the agarose gel type having viscoelasticity.

[0029] Results of calculating average values of F_{max} and F_v for each site and direction of measurement are shown in Fig. 8. On an inner side of an upper arm, both F_{max} and F_v had no significant difference in two directions. However, on an outer side of a forearm, both the parameters had significantly higher values in a long axis direction than in a short axis direction.

[0030] In addition, correlation between each parameter and ages is shown in Table. 2. In both the sites, correlation with ages was recognized in F_{max} on the inner side of the upper arm and in F_v on the outer side of the forearm, respectively, only in the major axis direction, not in the minor axis.

Table 2

Parameter	Upper arm		Forearm	
	Minor axis direction	Major axis direction	Minor axis direction	Major axis direction
F_{max}	-	↓*	-	-
F_v	-	-	-	↑*

↑: Positive correlation, ↓: Negative correlation
 *: $0.01 < p < 0.05$, -: $0.05 < p$ (Paired t test)

[0031] From the above results, it has been found that, by the measurement using the measurement device of the present invention, the mechanical properties of the skin on the outer side of the forearm that is an exposed site are different in the major axis direction and the minor axis direction, and that changes in mechanical properties of the skin corresponding to aging are recognized in the major axis direction on both the inner side of the upper arm and the outer side of the forearm. That is, a possibility of analyzing connection between changes in mechanical properties corresponding to photoaging and wrinkle formation was indicated by using the measurement device of the present invention.

<Embodiment 4>

[0032] The same device as in Embodiment 3 was used except that the motion pattern of the contacts was changed as described below and the guard ring was changed to the one that was formed in a double cylindrical shape, such that an inner cylinder could slide inside an outer cylinder and the inner cylinder was energized by a spring to protrude further than the outer cylinder. Motion pattern of the movable contact

Step 1: The distance between the arms is reduced from 4 mm to 3.5 mm (0.5 mm/sec).

Step 2: The distance between the arms is maintained at 3.5 mm for four seconds.

Step 3: The distance between the arms is returned to 4 mm (0.5 mm/sec).

Repeat of the cycle: Five times (the pattern is analyzed for the last cycle)

[0033] Silicone rubber was measured as a highly elastic sample and agarose gel was measured as a sample having viscoelasticity using the above-described device. An example of measurement results is shown in Fig. 9. When analyzing was performed using a maximum stress at the time of skin contraction (F1(V) in Fig. 9), a maximum value of a stress attenuating at the time of maintenance of the distance (F2(V) in Fig. 9), a maximum value of a stress decreasing at the time of releasing contraction (F3(V) in Fig. 9) and time until the attenuation of the stress at the time of maintenance reaches F2/e (e=2.718) (T (seconds) in Fig. 9) as parameters, F2 observed in the agarose gel was hardly observed in the silicone rubber. Therefore, F2 and T calculated based on F2 are considered to be parameters relating to viscoelasticity. In addition, it can be seen that F1 and F3 increase dependently on hardness of the silicone rubber or concentration of the agarose gel. Therefore, F1 and F3 are considered to be parameters relating to hardness.

[0034] Next, using the above-described device, measurement was performed with eighty healthy Japanese males (in ages of twenty-one to fifty-nine, an average age of 45.3) as subjects targeting outer canthus portions on the face in two directions, horizontal and vertical, with respect to a line connecting an inner canthus and an outer canthus. An example of measurement results is shown in Fig. 10. It can be seen that the result shows a pattern of the agarose gel type having viscoelasticity.

[0035] A result of calculating average values of F1, F2, F3 and T for each measurement direction is shown in Fig. 11. In the parameters F1 and F3 relating to hardness, values in the vertical direction was significantly lower than those in the horizontal direction. That is, it was found that a significant difference was recognized in mechanical properties relating to hardness in these two directions in the skin of the outer canthus on the face.

[0036] In order to examine relationship between the measurement values and degrees of wrinkles of the subjects at this time, light was irradiated diagonally from above at an angle of 20 degrees on a silicone replica of the target site collected at the time of measurement, a percentage of an area of generated wrinkle shadows to an evaluation target area (1 cm x 1 cm) is calculated as a wrinkle area ratio by image analysis, and correlation between this ratio serving as an index of evaluation of a degree of a wrinkle and each parameter obtained in the measurement by the measurement device of the present invention was checked.

[0037] Results are shown in Table 3. As a result, correlation was recognized only for T in the vertical direction. From this, a possibility of viscoelasticity in the vertical direction relating to wrinkle formation in the outer canthus portion on the face was indicated.

Table 3

Parameter	Correlation with a wrinkle area ratio	
	Horizontal measurement	Vertical measurement
F1	-	-
F2	-	-
F3	-	-
T	-	** (Negative)
**: $0 \leq p \leq 0.01$, -: $0.05 < p$		

(Test of alienation of single correlation coefficient)

[0038] From the above-described results, it was indicated by the measurement using the measurement device of the present invention that the values of the parameters F1 and F3 relating to hardness are significantly lower in the direction

perpendicular to the line connecting the inner canthus and the outer canthus on the skin surface than in the direction parallel to the line in the skin of the outer canthus on the face, and that the mechanical properties of the inner canthus skin are not equal in all the directions.

[0039] In addition, as a result of examining the relationship between the measurement values by the measurement device of the present invention and the degrees of a wrinkle in the outer canthus portion on the face, correlation with the degree of a wrinkle in the outer canthus was recognized in the parameter T relating to viscoelasticity in the direction that is perpendicular to the line connecting the inner canthus and the outer canthus on the skin surface, and possibility of this mechanical property affecting wrinkle formation on the outer canthus skin was suggested.

Industrial Applicability

[0040] The above-described device for measuring mechanical properties of elastic bodies of the present invention has the following effects.

(1) Since the device has the movable contact, the device can measure mechanical properties of an elastic body while strictly controlling a position and a direction of the contact on the surface of the elastic body. This is particularly preferable for grasping mechanical properties of an elastic body with directionality in mechanical properties such as a skin that has a structure in which fiber bundle structures of collagen being an origin of elasticity line up in one direction under the skin because measurement can be performed for each direction. That is, disturbance or the like of a collagen fiber bundle, which conventionally can only be measured invasively, can be measured non-invasively. In addition to this characteristic, an action pattern of the movable contact is set to include a closing action of the two of the contacts and a stationarily holding action after the closing action, whereby characteristic values suitable for examining connection with wrinkle formation or the like can be measured.

(2) According to the device for measuring mechanical properties of elastic bodies of the present invention, mechanical properties in a form of a combination of mechanical properties attributable to a surface itself of an elastic body and mechanical properties attributable to an inner structure of the elastic body can be measured. Moreover, in a pattern analysis of changes in numerical values of the mechanical properties, the mechanical properties are obtained as multidimensional data that can resolve a variety of factors rather than as a one-dimensional numerical values as in the Cutometer.

Claims

1. A device for measuring mechanical properties of an elastic body, comprising:

- at least two contacts (1,2) adapted to contact a surface of an elastic body to be measured, at least one of said contacts being a movable contact;
- a drive section (4) for moving said movable contact;
- a control section (5) for controlling an action of said drive section;
- a detecting section (6) for detecting a stress generated by the movement of said contact as an electric signal; and
- a processing section (7,8) for processing the electric signal for the stress detected by said detecting section and an amount of movement of said movable contact,

characterized in that the action of said contacts making contact with the surface of said elastic body includes a closing action of the two of the contacts and a stationarily holding action after the closing action.

2. A device for measuring mechanical properties of elastic bodies according to claim 1, which further comprises a display section (9) for displaying data processed by said processing section.

3. A device for measuring mechanical properties of elastic bodies according to claim 1 or 2, wherein said elastic body to be measured is a skin.

4. A device for measuring mechanical properties of elastic bodies according to any one of claims 1 to 3, wherein a probe is comprised of said contacts (1,2), said drive section (4) and said detecting section (3), and the device comprises an arm section for holding a position of said probe.

5. A device for measuring mechanical properties of elastic bodies according to any one of claims 1 to 4, which comprises a holding section for holding said elastic body to be measured.

6. A device for measuring mechanical properties of elastic bodies according to any one of claims 1 to 5, wherein said contacts (2) are fixed on the surface of said elastic body.

5 **Revendications**

1. Dispositif de mesure des propriétés mécaniques d'un corps élastique comprenant :

- 10 - au moins deux contacts (1,2) adaptés pour entrer en contact avec une surface de corps élastique à mesurer, dont au moins l'un des contacts est un contact amovible,
- une section d'entraînement (4) pour déplacer le contact amovible,
- une section de contrôle (5) pour commander une action de la section d'entraînement,
- une section de détection (6) pour détecter une contrainte générée par le mouvement du contact sous forme de signal électrique ; et
15 - une section de traitement (7, 8) pour interpréter le signal électrique pour la contrainte détectée par la section de détection ainsi qu'une amplitude de mouvement du contact amovible,

caractérisé en ce que

20 l'action des contacts établissant le contact avec la surface du corps élastique comprend une action de fermeture des deux contacts et une action de maintien stationnaire après l'action de fermeture.

2. Dispositif de mesure des propriétés mécaniques de corps élastiques selon la revendication 1, comprenant, en outre une section d'affichage (9) pour afficher les données traitées par la section de traitement.

- 25 3. Dispositif de mesure des propriétés mécaniques de corps élastiques selon la revendication 1 ou 2, dans lequel le corps élastique à mesurer est une peau.

- 30 4. Dispositif de mesure des propriétés mécaniques de corps élastiques selon l'une quelconque des revendications 1 à 3, dans lequel une sonde est composée des contacts (1,2), de la section d'entraînement (4) et de la section de détection (3) et le dispositif comprend une section en forme de bras pour conserver une position de la sonde.

- 35 5. Dispositif de mesure des propriétés mécaniques de corps élastiques selon l'une quelconque des revendications 1 à 4, comprenant une section de maintien pour maintenir le corps élastique à mesurer.

- 40 6. Dispositif de mesure des propriétés mécaniques de corps élastiques selon l'une quelconque des revendications 1 à 5, dans lequel les contacts (2) sont fixés à la surface du corps élastique.

Patentansprüche

- 45 1. Vorrichtung zum Messen von mechanischen Eigenschaften eines elastischen Körpers, umfassend:

mindestens zwei Kontakte (1, 2), die dazu geeignet sind, eine Oberfläche eines zu vermessenden elastischen Körpers zu kontaktieren, wobei mindestens einer der Kontakte ein beweglicher Kontakt ist,
eine Antriebseinheit (4) zum Bewegen des beweglichen Kontakts,
eine Steuereinheit (5) zum Steuern einer Tätigkeit der Antriebseinheit,
50 eine Detektionseinheit (6) zum Detektieren einer durch die Bewegung des Kontakts hervorgerufenen Spannung in Form eines elektrischen Signals und
eine Verarbeitungseinheit (7, 8) zum Verarbeiten des elektrischen Signals für die Spannung, die durch die Detektionseinheit detektiert wird, und zum Verarbeiten eines Ausmaßes der Bewegung des beweglichen Kontakts,
55

dadurch gekennzeichnet, dass die Bewegung der Kontakte, die die Oberfläche des elastischen Körpers kontaktieren, eine Schließbewegung der zwei Kontakte und eine auf die Schließbewegung folgende stationäre Haltetätigkeit umfasst.

EP 1 249 202 B1

2. Vorrichtung zum Messen von mechanischen Eigenschaften elastischer Körper nach Anspruch 1, wobei die Vorrichtung ferner eine Anzeigeeinheit (9) zum Anzeigen von durch die Verarbeitungseinheit verarbeiteten Daten aufweist.
- 5 3. Vorrichtung zum Messen von mechanischen Eigenschaften elastischer Körper nach Anspruch 1 oder 2, wobei der zu vermessende elastische Körper eine Haut ist.
4. Vorrichtung zum Messen von mechanischen Eigenschaften elastischer Körper nach einem der Ansprüche 1 bis 3, wobei ein Messfühler die Kontakte (1, 2), die Antriebseinheit (4) und die Detektionseinheit (3) aufweist, und wobei die Vorrichtung einen Auslegerabschnitt zum Halten des Messfühlers in einer Position aufweist.
- 10 5. Vorrichtung zum Messen von mechanischen Eigenschaften elastischer Körper nach einem der Ansprüche 1 bis 4, wobei die Vorrichtung eine Halteeinheit zum Halten des zu vermessenden elastischen Körpers aufweist.
- 15 6. Vorrichtung zum Messen von mechanischen Eigenschaften elastischer Körper nach einem der Ansprüche 1 bis 5, wobei die Kontakte (2) an der Oberfläche des elastischen Körpers festgelegt sind.

20

25

30

35

40

45

50

55

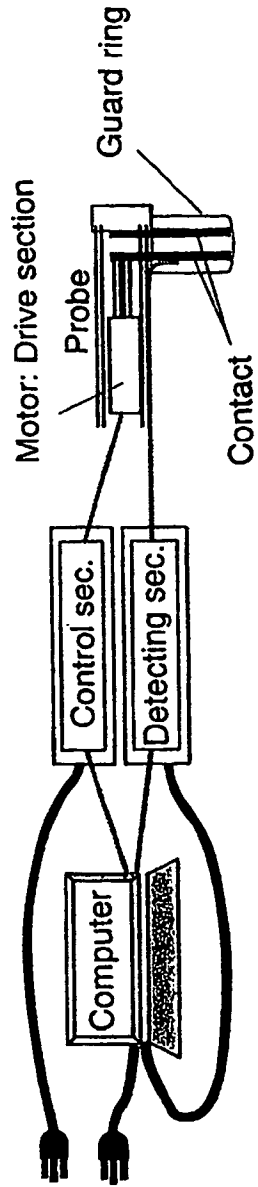


Fig. 1

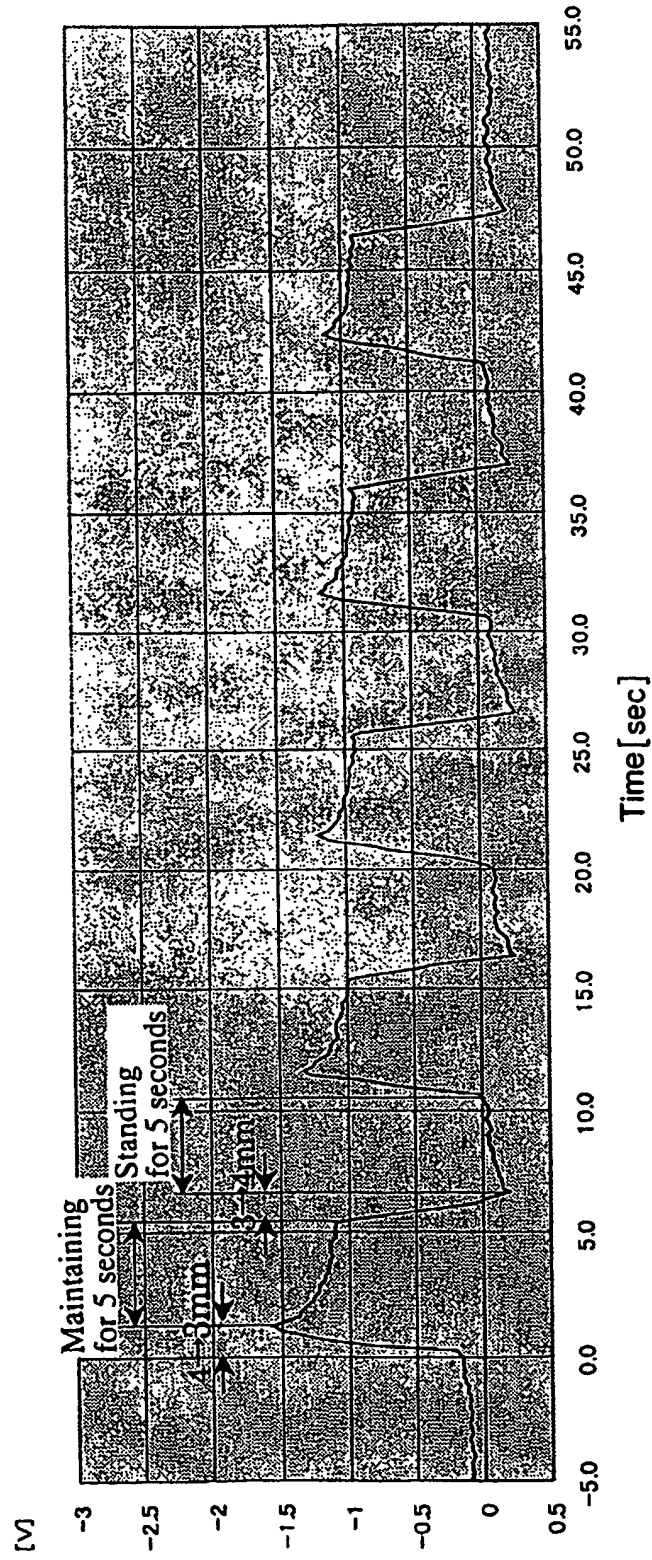


Fig. 3

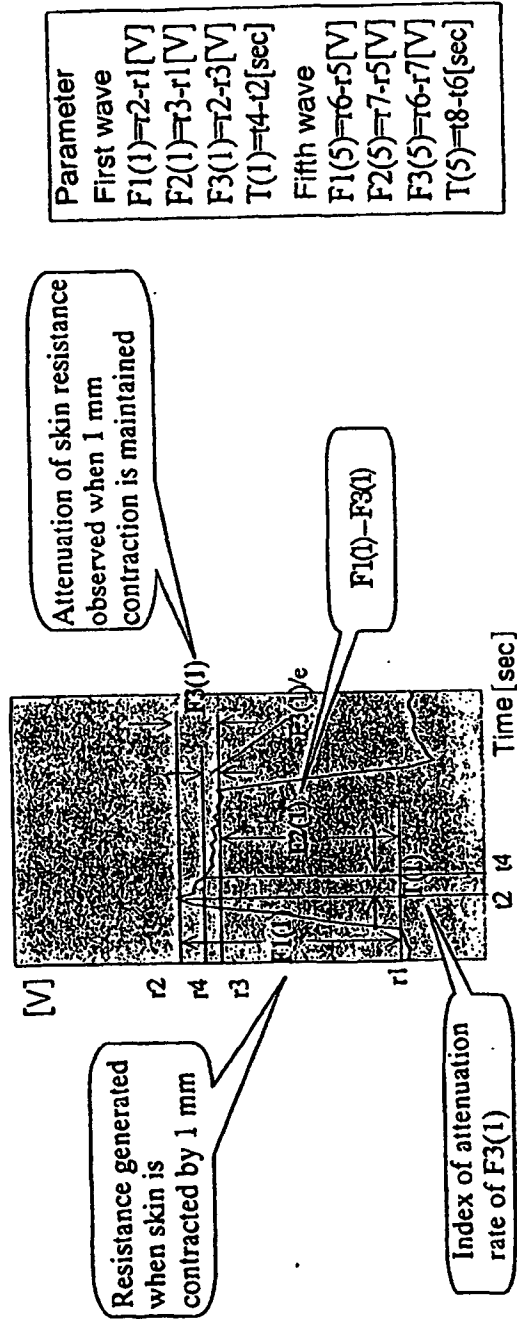


Fig. 4

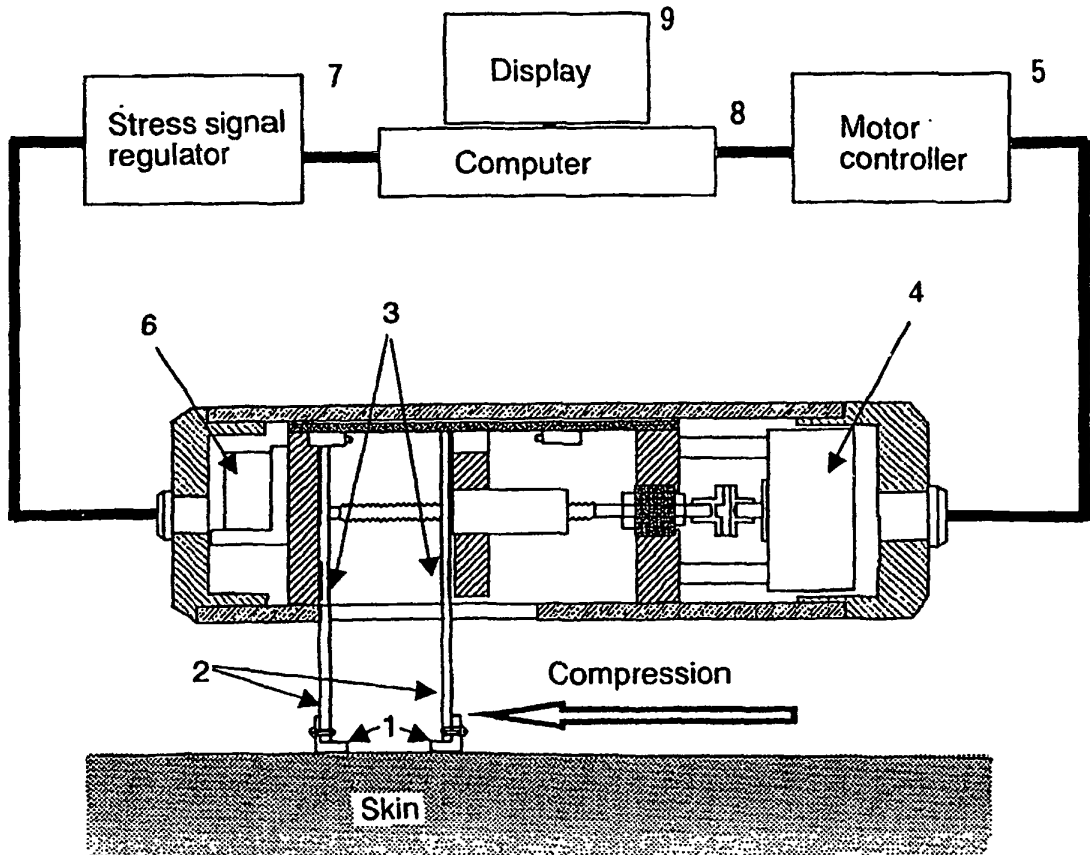


Fig. 5

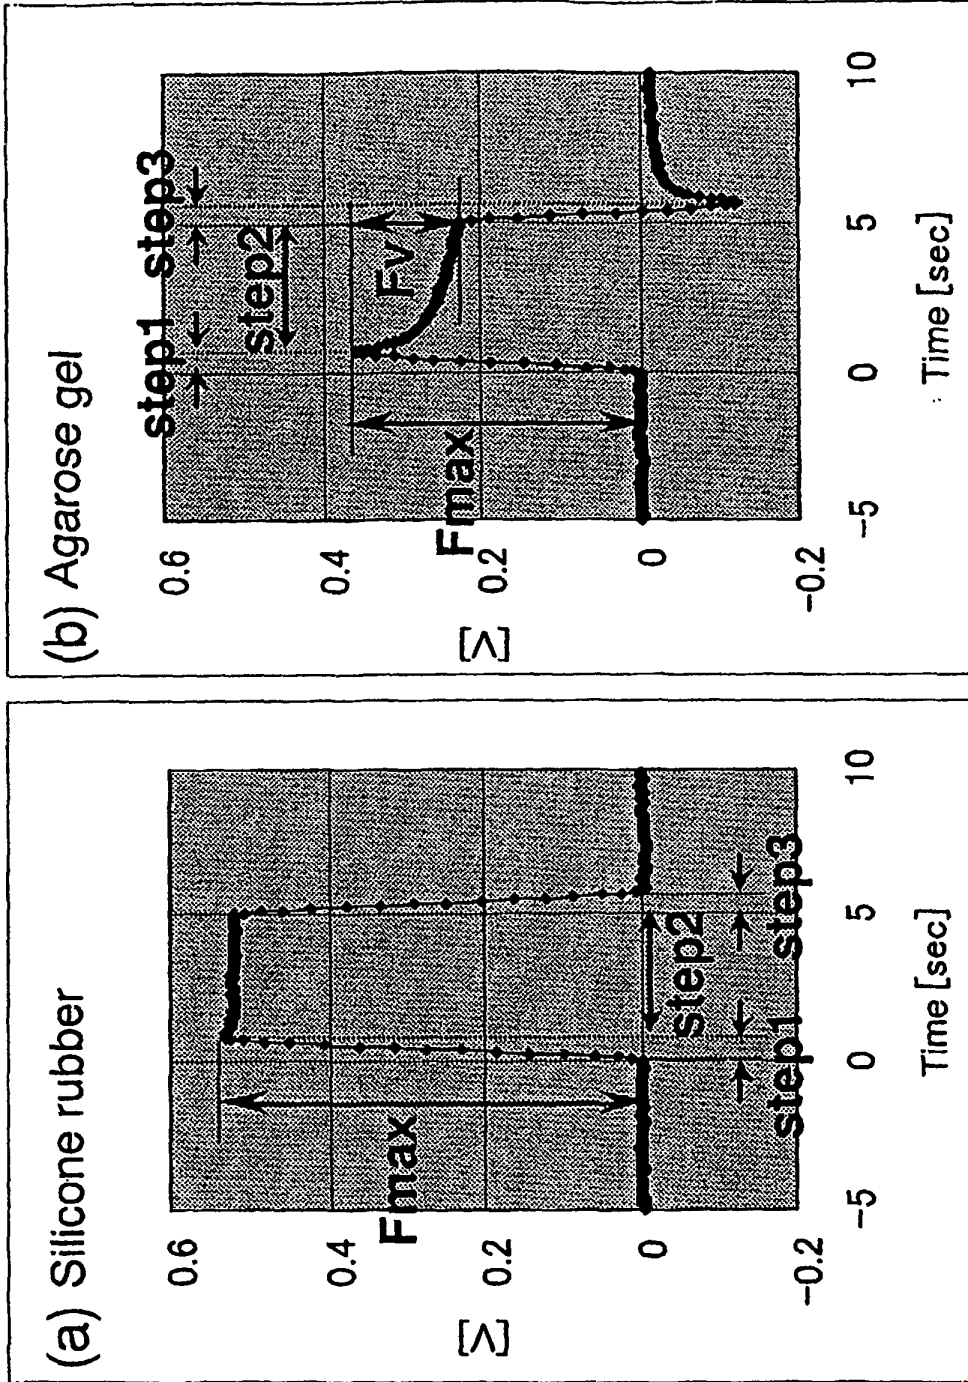


Fig. 6

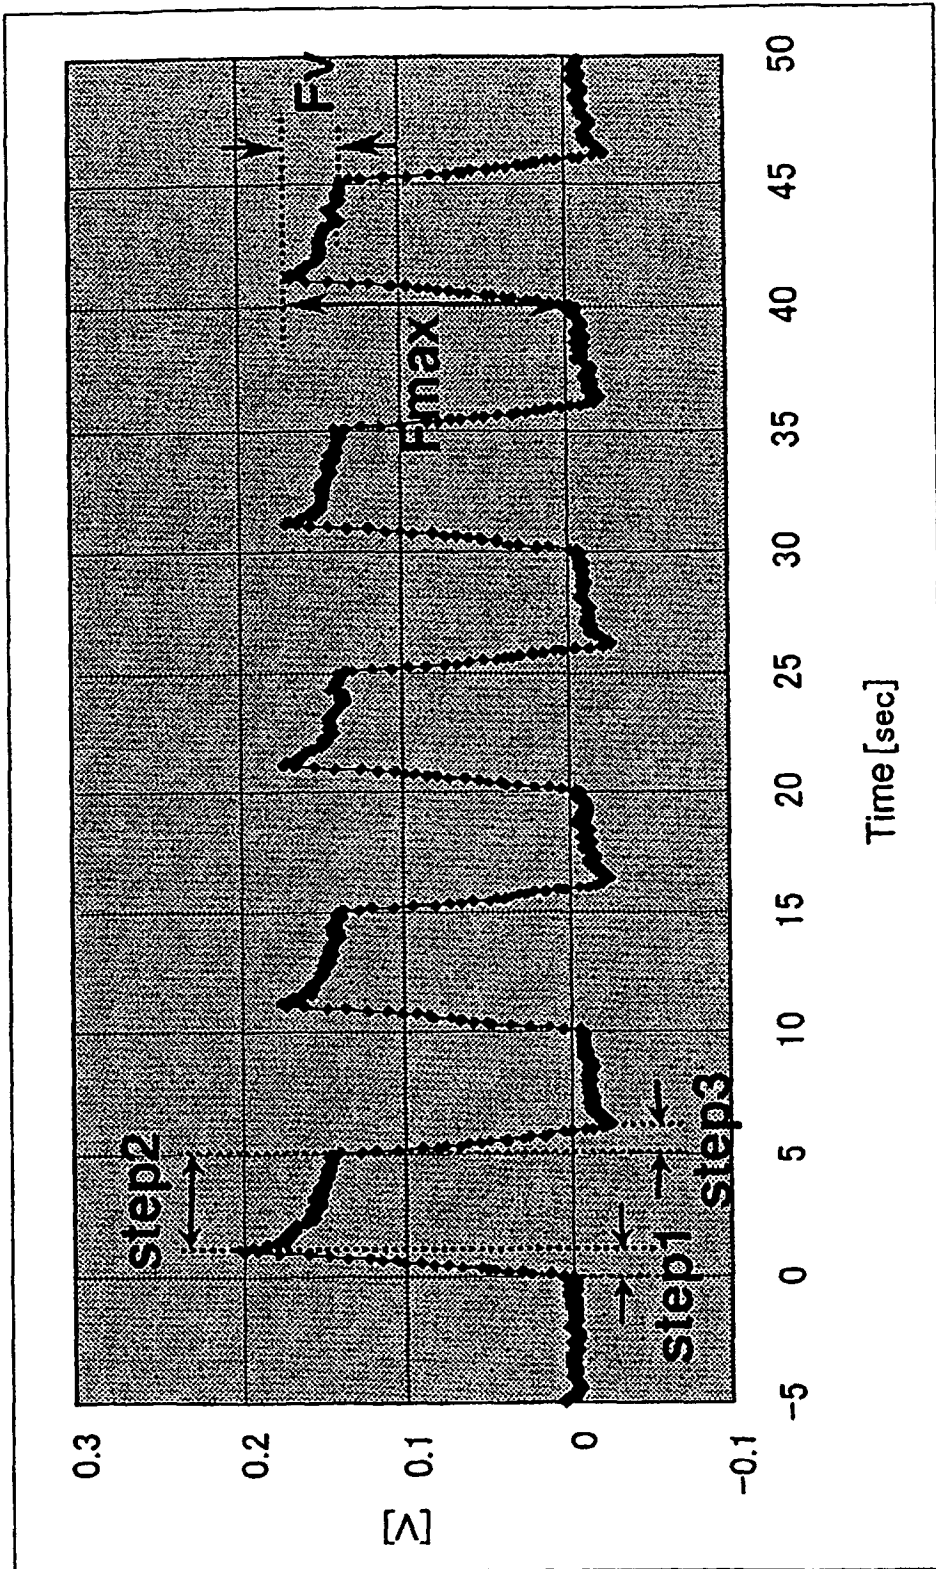


Fig. 7

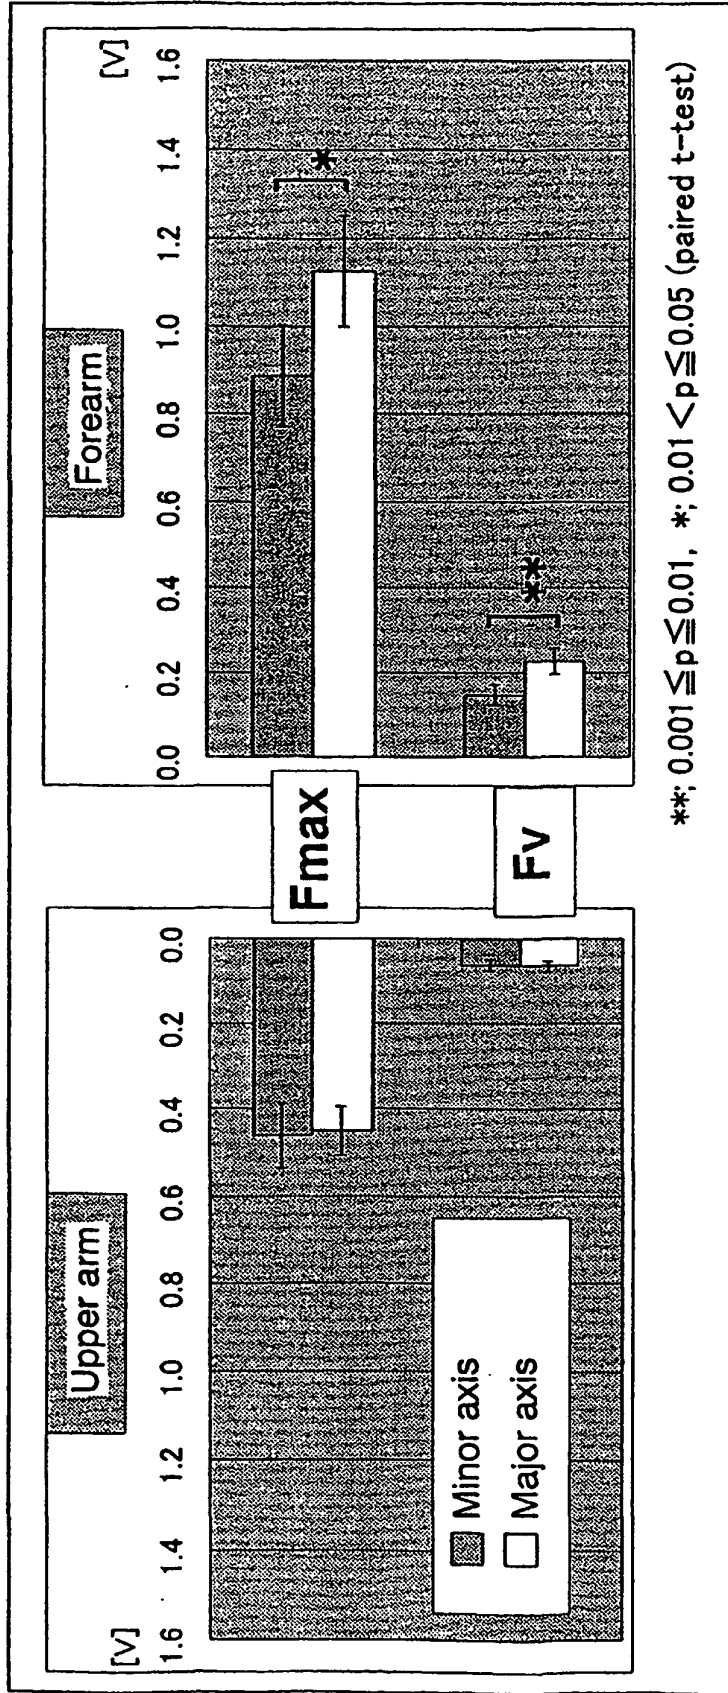


Fig. 8

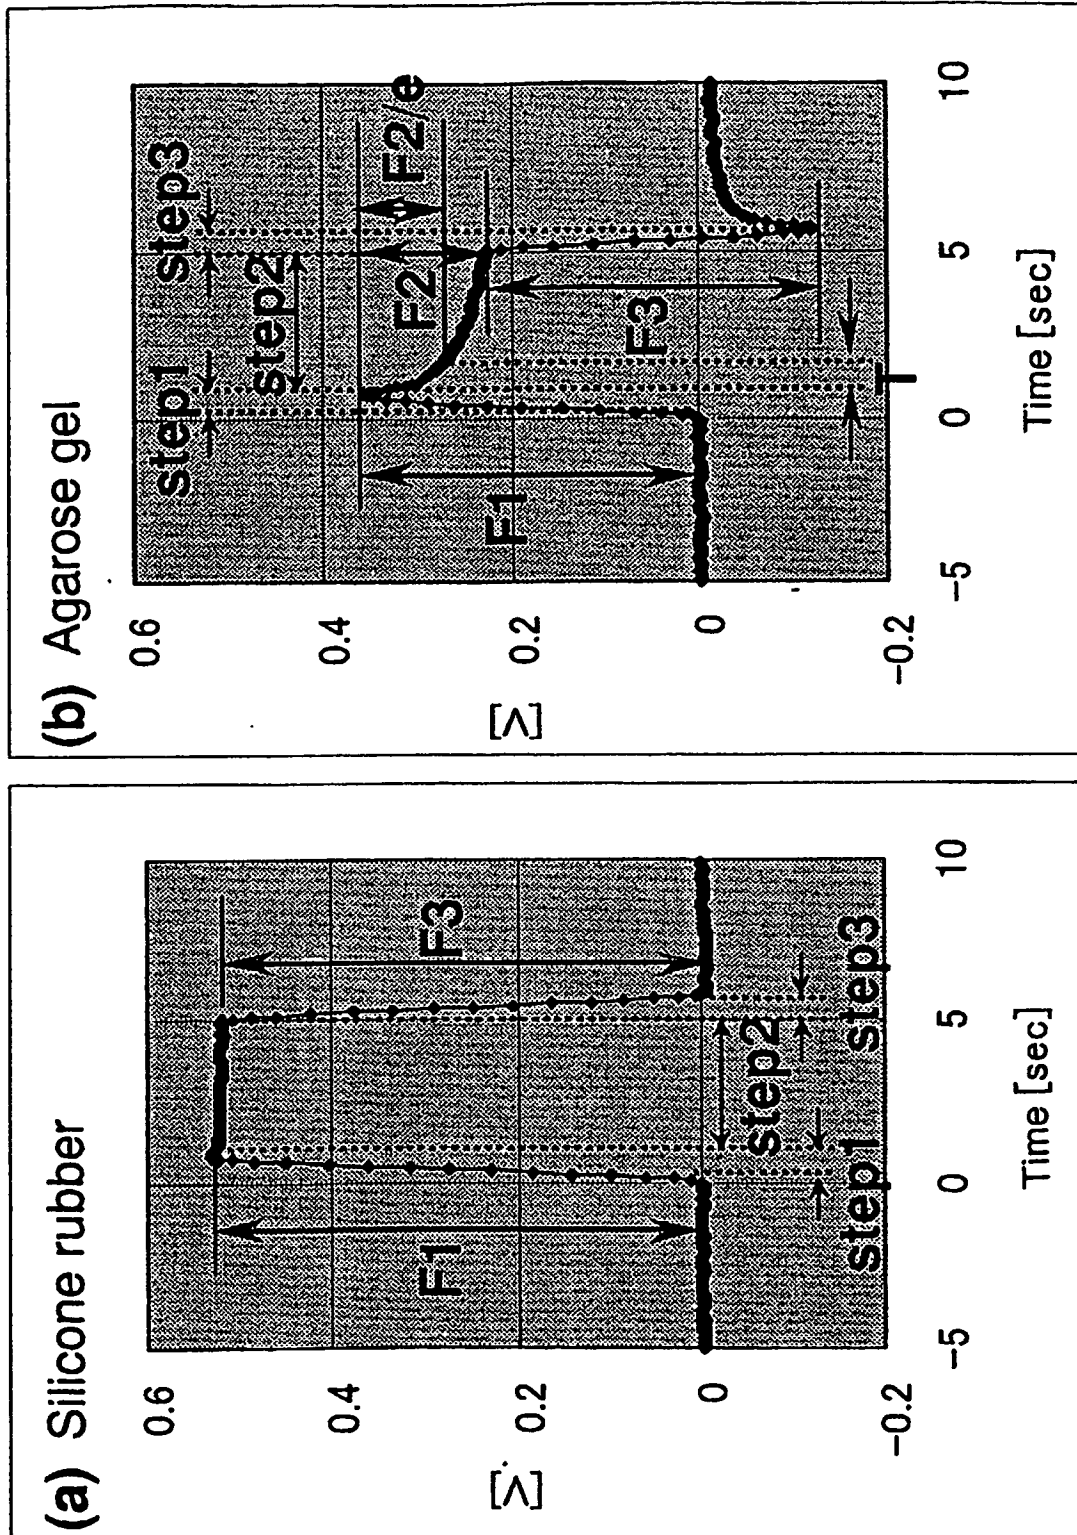


Fig. 9

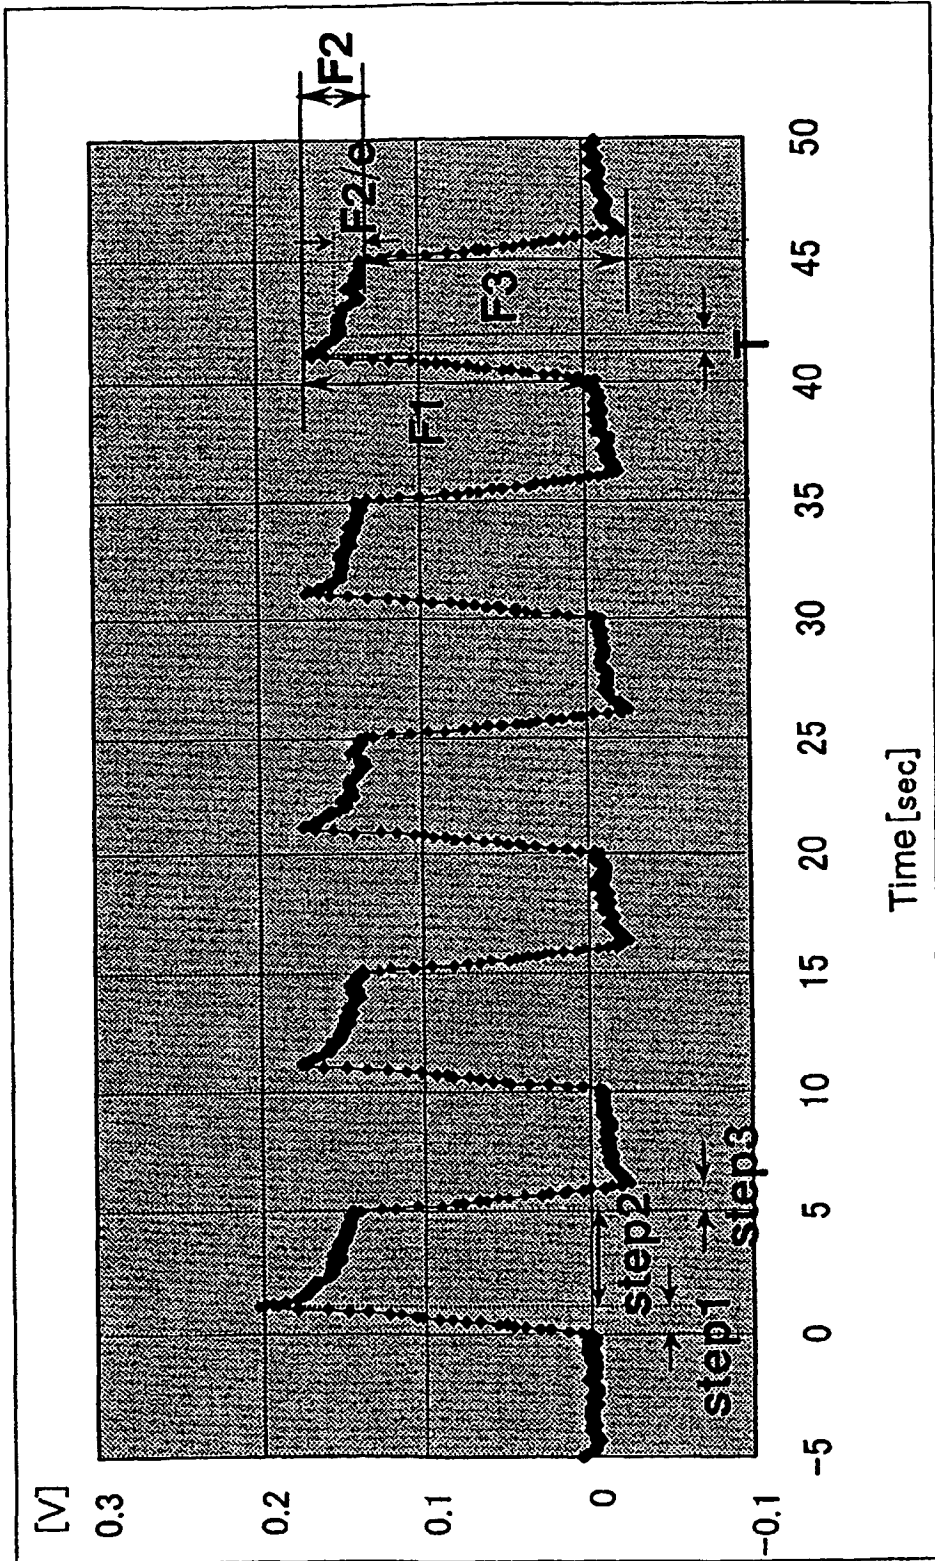


Fig. 10

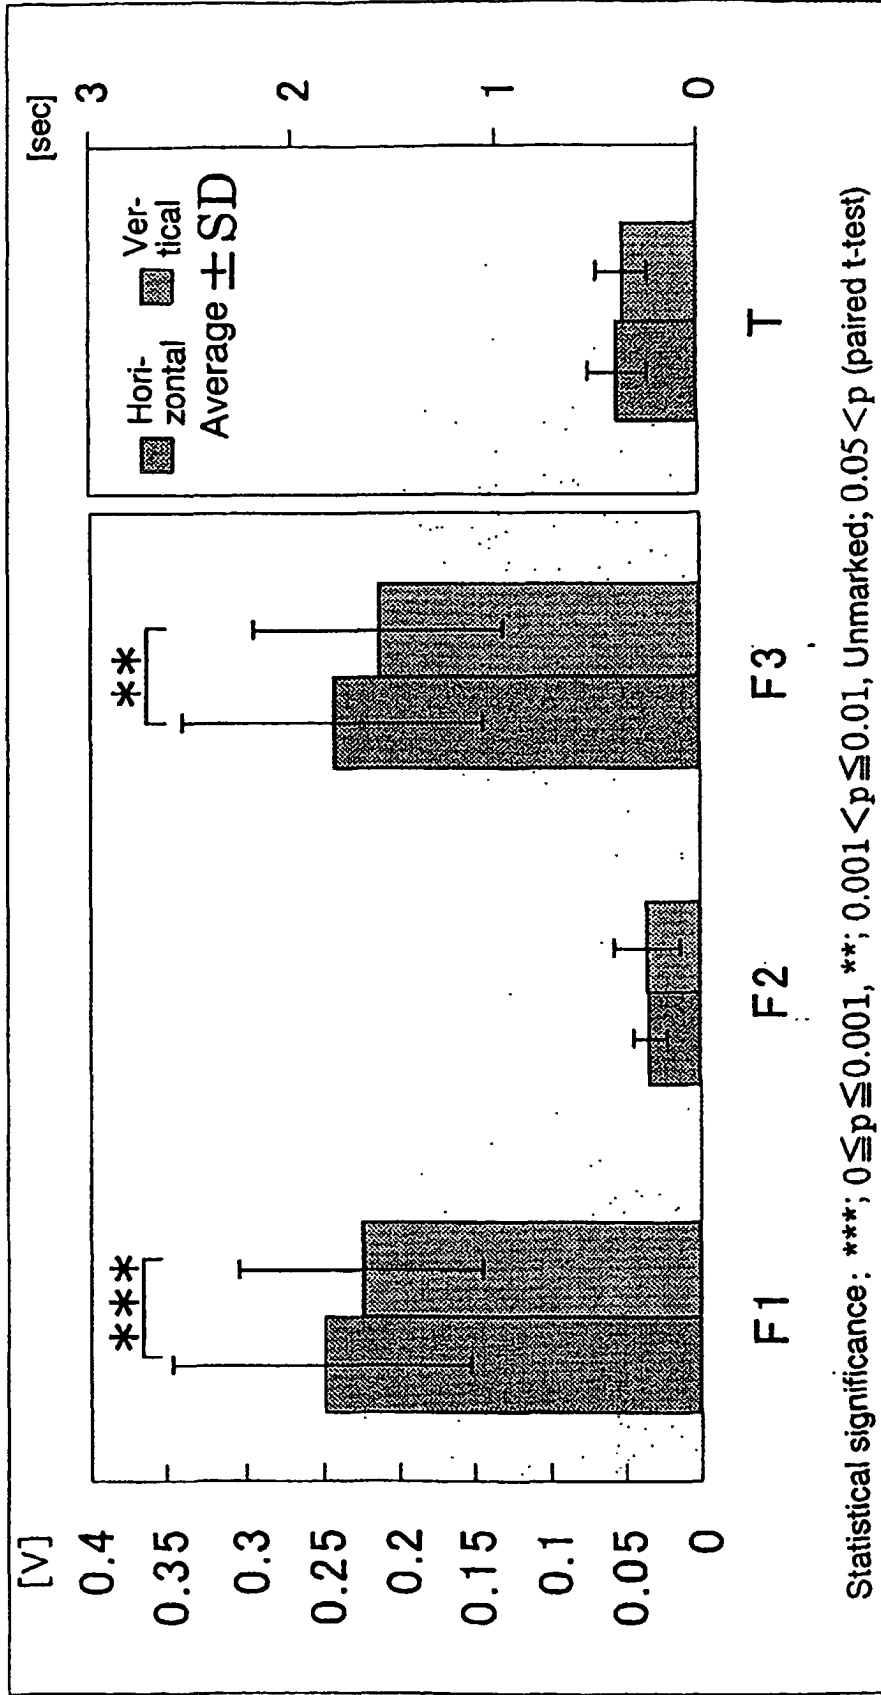


Fig. 11

专利名称(译)	用于测量弹性体物理性质的装置		
公开(公告)号	EP1249202B1	公开(公告)日	2006-05-03
申请号	EP2001901426	申请日	2001-01-18
[标]申请(专利权)人(译)	宝丽化学工业有限公司		
申请(专利权)人(译)	POLA CHEMICAL INDUSTRIES , INC.		
当前申请(专利权)人(译)	POLA化学INDUSTRIES INC.		
发明人	OBA, AI, C/O POLA CHEMICAL INDUSTRIES INC. NISHIMORI, YASUTOMO, C/O POLA CHEMICAL IND. INC.		
IPC分类号	A61B5/00 G01N3/00 A61B5/103		
CPC分类号	A61B5/0053 A61B5/442 G01N3/00		
优先权	2000009671 2000-01-19 JP		
其他公开文献	EP1249202A1 EP1249202A4		
外部链接	Espacenet		

摘要(译)

一种用于测量弹性体的机械性能的装置，包括：至少两个接触件，适于接触待测量的弹性体的表面，所述接触件中的至少一个是可动接触件；用于移动所述可动触头的驱动部分；控制部分，用于控制所述驱动部分的动作；检测部分，用于检测由所述接触的移动产生的应力作为电信号；以及处理部分，用于处理由所述检测部分检测到的应力的电信号和所述可动触头的移动量，200320032003其中所述触点与所述弹性体的表面接触的动作包括两者的闭合动作。关闭行动后的联系人和暂时保持行动。

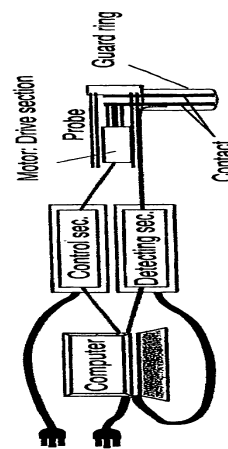


Fig. 1