

(19)



(11)

EP 2 504 812 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

07.08.2019 Bulletin 2019/32

(21) Application number: **09851555.4**

(22) Date of filing: **27.11.2009**

(51) Int Cl.:

G06T 5/10 (2006.01)	A61B 5/055 (2006.01)
A61B 6/03 (2006.01)	A61B 8/13 (2006.01)
G06Q 50/00 (2012.01)	A61B 6/00 (2006.01)
A61B 5/00 (2006.01)	G06T 5/00 (2006.01)
G06T 7/11 (2017.01)	G06T 7/143 (2017.01)

(86) International application number:

PCT/CA2009/001743

(87) International publication number:

WO 2011/063493 (03.06.2011 Gazette 2011/22)

(54) **METHOD AND SYSTEM FOR FILTERING IMAGE DATA AND USE THEREOF IN VIRTUAL ENDOSCOPY**

VERFAHREN UND SYSTEM ZUR FILTERUNG VON BILDDATEN UND IHRE VERWENDUNG IN DER VIRTUELLEN ENDOSKOPIE

PROCÉDÉ ET SYSTÈME DE FILTRAGE DE DONNÉES D'IMAGE ET UTILISATION DE CEUX-CI DANS UNE ENDOSCOPIE VIRTUELLE

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(43) Date of publication of application:

03.10.2012 Bulletin 2012/40

(73) Proprietor: **Cadens Medical Imaging Inc.
Montréal (Québec) H2W 2R2 (CA)**

(72) Inventors:

- **VINCENT, Thomas Bernard Pascal
Brossard
Québec J4Z 3G4 (CA)**
- **CHANDELIER, Florent André Robert
Montreal
Québec H3W 1W6 (CA)**

(74) Representative: **Delorme, Nicolas et al**

**Cabinet Germain & Maureau
BP 6153
69466 Lyon Cedex 06 (FR)**

(56) References cited:

WO-A1-2005/088520	WO-A1-2008/149358
WO-A2-2006/084150	WO-A2-2007/048091
US-A1- 2004 164 996	US-A1- 2008 317 375
US-B1- 6 445 182	

- **CRIMINISI ANTONIO ET AL.: 'Region Filling and Object Removal by Exemplar-Based Image Inpainting' TRANSITIONS ON IMAGE PROCESSING vol. 13, no. 9, September 2004, pages 1200 - 1212, XP011116342**
- **AUGUSTO SILVA ET AL. FAST PULMONARY CONTOUR EXTRACTION IN X-RAY CT IMAGES: A METHOD AND QUALITY ASSESSMENT SPIE vol. 4321, 2001, XP055111920**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 504 812 B1

Description

FIELD OF THE INVENTION

[0001] The invention generally relates to image processing and more particularly relates to a method and a system for filtering image data. It also relates to applications of the method for suppressing tagged material in virtual colonoscopy.

BACKGROUND OF THE INVENTION

[0002] Conventional endoscopic procedures typically rely on the use of a flexible fiber optic tube which is inserted in the patient's body to visually examine an inner anatomical structure. The operator can then manipulate the tube inside the anatomical structure to search for any anatomical abnormalities.

[0003] Conventional colonoscopies using this procedure, although reliable, are both costly in money and time. Moreover, it is an invasive, uncomfortable and sometimes painful procedure for the patient.

[0004] Non-invasive procedures have been used to reduce at least one of the above mentioned drawbacks of the invasive colonoscopic procedure.

[0005] These non-invasive procedures use imaging techniques such as a computed tomography (CT) scanning to obtain image data representative of the anatomical structure to analyze. These procedures nevertheless require a cathartic preparation of the patient for colon cleansing prior to the exam.

[0006] To even reduce the discomfort felt by the patient, minimum cathartic preparation procedures that tag liquid and solid fecal matter for subsequent virtual removal using digital subtraction algorithms have been proposed.

[0007] However, the imaging techniques used to obtain the image data typically present a spatial resolution which generates a blur at each anatomical interface.

[0008] Consequently, when removing the tagging material, these algorithms may artificially smooth the surface between the removed material and the colon's inner wall and polyps or other abnormalities present in the colon may be inadvertently removed or wrongly reduced to an acceptable level, which is a major concern.

[0009] These algorithms generally rely on image segmentation by using a threshold adapted for characterizing the interfaces of the structure under analysis.

[0010] However, since the different anatomical structures may be very different from each other, a simple threshold may not allow to conveniently segment a structure in a single pass. Indeed, soft tissues, bones and fat tissues have different densities.

[0011] In order to take into consideration this great variability of the structures, different techniques have been used. For example, PCT international applications published under publication numbers WO2008/089492, WO2007/064980 and WO02/029764 and US patent ap-

plications published under publication numbers 2008/0118133 and 2008/0008367 teach various methods for electronic cleansing of medical images. However, they still use a threshold for structure segmentation and the resulting segmentation may still remain approximated for a plurality of unitary image elements. The interfaces between the different structures may then still be smoothed. This may lead an operator to a wrong diagnosis, which is a major issue.

[0012] US patent number 6,366,800 describes a method for automatic analysis in virtual endoscopy. This method however also relies on segmentation techniques and the resulting segmentation may still remain approximated.

[0013] It would therefore be desirable to provide an improved method for electronic cleansing of medical images that will reduce at least one of the above-mentioned drawbacks.

BRIEF SUMMARY

[0014] The main embodiments of the invention are defined by the appended independent claims. The appended dependent claims define further embodiments.

[0015] The method for filtering image data is not limited to specific types of image data, which is of great advantage. Moreover, the method does not rely on predetermined rigorous values of the image data, which is also of great advantage. The method may thus be used with a wide variety of image data types and a wide variety of scanning devices.

[0016] Moreover, the method for filtering image data is well adapted for any anatomical structure comprising at least two phases, such as the colon structure which comprises an inner wall and a plurality of air regions and fecal matter regions extending therein, which is also of great advantage.

[0017] The skilled addressee will appreciate that for the particular application of colon electronic cleansing, the method enables to filter the tagged substance type regions from the image data without artificially smoothing the surface between the removed material and the colon's inner wall, which is of great advantage since it may enable a more accurate colorectal cancer screening.

[0018] Moreover, since the method does not artificially smooth any surfaces, the representation in 3D of any potential lesion may be enhanced, particularly for flat lesions or small lesions having a size of about 3 to 4 mm, which is also of great advantage for detecting potential lesion at an early stage.

[0019] The skilled addressee will also appreciate that the method does not rely on any a-priori or assumption on the morphology of the tubular structure, which is also of great advantage for providing an enhanced filtering.

[0020] The skilled addressee will also appreciate that the method is particularly advantageous for enhancing the 3D representation or the 2D representation of the information contained within the raw image data since

the images have not to be segmented. This is a great advantage since a given operator may choose the 2D representation and/or the 3D representation to review the images.

[0021] The skilled addressee will also appreciate that the method may require shorter computational time for providing the filtered images than typical segmenting methods, which is also of great advantage.

[0022] The expression "region" means a set of neighboring unitary image elements which are all contiguous to each others in a same pocket. The regions may be in 2D or 3D, depending on the image data used.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] In order that the invention may be readily understood, embodiments of the invention are illustrated by way of example in the accompanying drawings.

Figure 1 is a flow chart of a method for filtering image data, according to one embodiment of the invention.

Figure 2 is a block diagram of one embodiment of a system for filtering image data, according to the invention.

Figure 3A shows a portion of filtered image data.

Figure 3B shows a 3D representation of a portion of the image data of Figure 3A.

Figure 3C is a 3D representation of a colon of a patient.

Figure 4A is a schematic illustrating a sectional image of a clean colon.

Figure 4B is a schematic of the intensity distribution of the sectional image of Figure 4A.

Figure 5A is a schematic illustrating a sectional image of a colon having tagged substance type regions.

Figure 5B is a schematic of the intensity distribution of the sectional image of Figure 5A.

Figure 6A is a schematic illustrating a sectional image of a colon once filtered according to the method illustrated in Figure 1.

Figure 6B is a schematic of the intensity distribution of the sectional image of Figure 6A.

Figure 7 is a block diagram which shows an embodiment of a processing device in which the method for filtering image data may be implemented.

Figure 8A shows a selected portion of image data, according to an embodiment.

Figure 8B shows filtered image data of the selected portion shown in Figure 8A.

Figure 8C is an enlarged portion of Figure 8A.

Figure 8D is an enlarged portion of Figure 8B.

Figure 9 shows the intensity distribution of the selected portion of Figure 8A.

Figure 10A to 10C illustrate a transposition process according to one embodiment.

Figure 11 shows the resulting distribution of the selected portion of Figure 8A once the filtering has been performed, according to one embodiment.

Figure 12 shows a selected portion of image data, according to an embodiment.

Figure 13 illustrates the intensity distribution of the selected portion of image data of Figure 12.

Figure 14 shows filtered image data of the selected portion shown in Figure 12.

Figure 15 shows the resulting distribution of the selected portion of Figure 12 once the filtering has been performed, according to one embodiment.

[0024] Further details of the invention and its advantages will be apparent from the detailed description included below.

DETAILED DESCRIPTION

[0025] In the following description of the embodiments, references to the accompanying drawings are by way of illustration of examples by which the invention may be practiced. It will be understood that various other embodiments may be made and used without departing from the scope of the invention disclosed.

[0026] The invention concerns a method and a system for filtering image data that are particularly useful for filtering medical images. Throughout the present description, the method will be described for the particular application of electronic colon cleansing in virtual colonoscopy but the skilled addressee will appreciate that the method is not limited to this specific application and that many other applications may be considered, as it will become apparent upon reading of the present description.

[0027] The method for filtering image data of the invention may be generally useful for facilitating the subsequent segmentation of an anatomical structure but is

also well adapted for anatomical structure comprising at least two phases, such as the colon structure which comprises an inner wall and a plurality of air regions and fecal matter regions extending therein.

[0028] As it will become apparent below, in one embodiment, the method for filtering image data may be useful for examination of the colon, more specifically for colorectal cancer screening.

[0029] The method is particularly advantageous since it is not limited to specific types of image data. Rather, the method may be used on different types of image data sets, as it will become apparent upon reading of the present description.

[0030] Indeed, the skilled addressee will appreciate that the system and the method described above are particularly advantageous since they may be used with prepless CT colonoscopy, laxative free CT colonoscopy, mild preparation CT colonoscopy with tagging agent and cathartic preparation with tagging of remnant fluids/stools for CT colonoscopy as non limitative examples.

[0031] Prepless CT colonoscopy is described in Comparison of routine and unprepped CT colonography augmented by low fiber diet and stool tagging: a pilot study, Abraham H. Dachman and al., *Abdom Imaging* (2007) 32:96-104; in CT Colonography without Cathartic Preparation: Feasibility Study, Matthew R. Callstrom, *Radiology* 2001; 219:693-698 and also in CAD of Colon Cancer on CT Colonography Cases without Cathartic Bowel Preparation, Marius George Linguraru and al., 30th Annual International IEEE EMBS Conference Vancouver, British Columbia, Canada, August 20-24, 2008. Laxative free CT colonoscopy is described in Development of a Cathartic-Free Colorectal Cancer Screening Test Using Virtual Colonoscopy: A Feasibility Study, Kristina T. Johnson, *AJR*:188, January 2007, p2936; in Dietary Fecal Tagging as a Cleansing Method before CT Colonography: Initial Results-Polyp Detection and Patient Acceptance¹, Philippe A. Lefere, *Radiology* 2002; 224:393-403; and in Noncathartic CT Colonography with Stool Tagging: Performance With and Without Electronic Stool Subtraction, C. Daniel Johnson, *AJR*:190, February 2008, p361-366. Mild preparation CT colonoscopy with tagging agent is described in Image Quality and Patient Acceptance of Four Regimens with Different Amounts of Mild Laxatives for CT Colonography, Sebastian Jenssch and al., *AJR*:191, July 2008, p158-167. Cathartic preparation with tagging of remnant fluids/stools for CT colonoscopy is described in Efficacy of Barium-Based Fecal Tagging for CT Colonography: a Comparison between the Use of High and Low Density Barium Suspensions in a Korean Population - a Preliminary Study, Min Ju Kim and al., *Korean J Radiol* 10(1), February 2009, p25-33; in The Alternative: Faecal Tagging, Philippe Lefere and Stefaan Gryspeerdt, *Virtual Colonoscopy*, Springer Berlin Heidelberg, 2006, p35-49; and in Tagging-based, Electronically Cleansed CT Colonography: Evaluation of Patient Comfort and Image Readability, Michael E. Zalis, and al., *Radiology*: Volume 239:

Number 1-April 2006, p149-159.

[0032] The skilled addressee will appreciate that laxative-free preparations may involve the use of Iodine that may have a potential laxative side-effect but may provide better residual tagging than barium only tagging preparations.

[0033] Moreover, the skilled addressee will appreciate that the disclosed method may enable to filter image data in a relative fast manner, depending on processing resources used.

[0034] Indeed, typically, such filtering method may be performed within 5 minutes on a Intel dual-core CPU, in one embodiment.

[0035] Current state-of-the-art methods typically require over 15 minutes, as presented in "Structure-analysis method for electronic cleansing in cathartic and non-cathartic CT colonography", Wenli Cai and al., *Med.Phys.* 35(7), July 2008 p3259-3277, wherein electronic cleansing is described as requiring approximately 30 minutes for the CTC images from a scan of a patient on a standard PC. In other words, one hour will be typically required for a complete CTC exam that includes 2 scans, namely the prone and the supine scans.

[0036] Figure 5A illustrates the image data of an anatomical structure, more specifically a portion of a colon 500, having at least three types of distinct region, that is a biological tissues type region 502, an air type region 504 and two tagged substance type regions 506, 508 corresponding to tagged fecal matter, also generally referred to as the first substance type region, the second substance type region and the third substance type region.

[0037] Throughout the present description, the expression "region" means a set of neighboring unitary image elements which are all contiguous to each others in a same pocket. The regions may be in 2D or 3D, depending on the image data used, as it will become apparent below.

[0038] Moreover, by the expression "biological tissues type region", it is meant any portion of anatomical structures comprising soft tissues, fat, bones, connective tissues, nervous tissues, epithelial tissues and muscles as non-limitative examples. The skilled addressee will appreciate that in the specific case of colon examination, the biological tissues also comprise the mucosa of the colon.

[0039] Referring to Figure 1, there is shown a flow chart of a method for filtering image data according to one embodiment. The method enables to filter image data having at least three types of distinct regions from a selected type of region, each of the at least three types of distinct regions being characterized by a plurality of unitary image elements. In one embodiment, each of the unitary image element comprises a pixel while in another embodiment, each of the unitary image element comprise a voxel. The skilled addressee will appreciate that the expression "unitary image elements" should not be limited to pixels and voxels but should rather be understood as encompassing any homogenous element, point or dot

of an image or display surface or geometrical element to which an intensity, a color or another parameter may be associated individually to the others.

[0040] The skilled addressee will appreciate that for the particular application of electronic colon cleansing, the method enables to filter the tagged substance type regions from the image data, which is of great advantage, as it will be understood thereafter.

[0041] According to processing step **100**, the image data are provided. The image data may comprise, as non-limitative examples, a volumetric medical image, a volumetric tomographic image and/or a plurality of parallel successive image planes, as well known in the art and as detailed thereafter.

[0042] In one embodiment, the processing step **100** may comprises receiving the image data from a CT scanning device.

[0043] In one embodiment, the image data may be received from a magnetic resonance imaging (MRI) device. Alternatively, the processing step **100** may comprise receiving the image data from a positron emission tomography (PET) device. In another embodiment, the image data may be received from an X-Rays device. In still another embodiment, the image data may be received from an ultrasound device or any combination of the above mentioned devices.

[0044] In a further embodiment, the image data may be retrieved from a database or may even be retrieved from a readable medium such as a compact disk or a picture archiving and communication system (PACS) for instance.

[0045] Still referring to Figure 1, according to processing step **110**, a portion of the image data comprising at least a corresponding portion of each of the at least three types of regions is selected.

[0046] In one embodiment, the selected portion of the image data comprises a corresponding region of the selected type of region, that is an entire tagged substance type region, such as region **508** of Figure 5 for example. In a preferred embodiment, a typical region growing is used for selecting the entire region.

[0047] The skilled addressee will appreciate that, in prior art applications of region growing, the unitary image elements of a same region are grouped according to an iterative process based on their homogeneity, to thereby segment the selected portion of the image data into distinct zones of interest. In these prior art applications, the region growing is used to extract one particular region from the others.

[0048] For example, in US patent application published under number US 2002/0193687 and entitled Automatic analysis in virtual endoscopy, the region growing is explained as follows: the region of interest is segmented using a three-dimensional region growing technique and an initial static threshold value. The threshold value chosen should approach the maximum threshold value which can be selected without having the segmentation procedure fail by including surrounding structures as part

of the region of interest.

[0049] The skilled addressee will understand upon reading of the present description that in the present application, the region growings are not used for purpose of segmenting an image into distinct zones of interest in order to extract a particular region. Rather, the region growings are used to select a part of an image surrounding a corresponding portion thereof. As previously described, the resulting area obtained from the region growing should comprise portions of several types of region.

[0050] In a further embodiment, the processing step **110** may further comprise selecting one of the regions and selecting an immediate neighboring thereof until a resulting area comprises the at least three types of regions. In a preferred embodiment, the selected immediate neighboring comprises portions of neighboring regions which are not of the same type of the selected region.

[0051] Moreover, still in a preferred embodiment, the immediate neighboring is selected until the resulting area comprises a representative portion of each of the at least three types of regions.

[0052] In other words, in a preferred embodiment, a tagged substance type region is first selected, and then the immediate neighboring is selected until the entire selected tagged substance type region is included in the resulting area and until the resulting area also comprises a portion of an air type region and a portion of a biological tissues type region. In a preferred embodiment, each of the portions of the different regions comprised in the resulting area may be large enough so as to be representative of the corresponding regions, as it will be understood thereafter.

[0053] It should nevertheless be appreciated that, in one embodiment, the immediate neighboring selected may not comprise another region of the same type that the region of interest nor bones since these regions may affect the corresponding distributions.

[0054] The skilled addressee will appreciate that the selecting of an immediate neighboring may be performed on volumetric image data. Thus, it should be understood that the resulting area may be a three dimensional volume obtained on a plurality of consecutive two dimensional images, as it will be explained below.

[0055] Still referring to Figure 1, according to processing step **120**, at least one distribution for each of the at least three types of regions in the selected portion is determined.

[0056] In one embodiment, the determining of at least one distribution comprises determining an intensity distribution of a representative part of the unitary image elements corresponding to the selected portion. In a further embodiment, each of the unitary image elements corresponding to the selected portion may be considered. However, selecting a representative part only may be advantageous since it may help and/or speed up the subsequent processing, as it will become apparent thereafter. For example, the unitary image elements whose

intensity is above a given value may be selected.

[0057] Figure 5B schematically shows the intensity distribution of the image data shown in Figure 5A. As illustrated, the intensity distribution comprises a first peak **510** corresponding to the air type region **504**, a second peak **512** corresponding to the biological tissues type region **502** and a third peak **514** corresponding to the tagged substance type regions **506** and **508**.

[0058] In another embodiment, the determining of at least one distribution comprises determining a gradient distribution of a representative part of the unitary image elements corresponding to the selected portion. As previously mentioned, in one embodiment, each of the unitary image elements corresponding to the selected portion may be considered.

[0059] In another embodiment, the determining of at least one distribution comprises determining an intensity derivative distribution of a representative part of the unitary image elements corresponding to the selected portion. As previously mentioned, in one embodiment, each of the unitary image elements corresponding to the selected portion may be considered.

[0060] In a further embodiment, the determining of at least one distribution may comprise determining a plurality of distributions. In such a case and according to a specific application, the plurality of distributions may be selected from the group consisting of an intensity distribution of a representative part of the corresponding unitary image elements, a gradient distribution of a representative part of the corresponding unitary image elements and an intensity derivative distribution of a representative part of the corresponding unitary image elements. The skilled addressee will appreciate that using a plurality of distributions may be advantageous in particular cases, as described in "Multidimensional transfer functions for interactive volume rendering", Kniss, J. Kindlmann, G. Hansen, C. Sci. Comput. & Image Inst., Utah Univ., Salt Lake City, UT; Visualization and Computer Graphics, IEEE Transactions on Publication Date: Jul-Sep 2002 Volume: 8, Issue: 3p 270-285. Still referring to Figure 1, according to processing step 130, at least one function is determined for associating each unitary image element of the selected type of region in the selected portion to another type of region of the at least three types of regions such that the at least one distribution of the selected type of regions in the selected portion is transposed into a corresponding distribution of the another type of region.

[0061] For the example of tagged material removal for virtual colonoscopy, the function that is determined is a function that allows to transpose the intensity distribution of the tagged regions into the intensity distribution of the air substance type region, as it will become apparent below with reference to Figures 5A to 6B.

[0062] As previously mentioned, in processing step **110**, in a preferred embodiment, each of the portions of the different regions comprised in the resulting area may be large enough so as to be representative of the corre-

sponding regions. Indeed, the skilled addressee will appreciate that the anatomical structures may typically be represented by a corresponding distribution having a typical predetermined shape, such as a Gaussian shape for example. Thus, the resulting area may be enlarged until a predetermined function such as a Gaussian function for instance may be suitably fitted onto the corresponding distribution.

[0063] In a preferred embodiment, in processing step **110**, the determining of at least one function comprises determining an initial approximating function for approximating the corresponding distribution and determining a transposition function adapted for transposing the initial approximating function into the corresponding distribution of the another type of region.

[0064] In a preferred embodiment, the initial approximating may be determined such as described in Weisstein, Eric W. "Nonlinear Least Squares Fitting", from MathWorld--A Wolfram Web Resource, or Bates, D. M. and Watts, D. G., Nonlinear Regression and Its Applications. New York: Wiley, 198 or even An estimate of ϕ and ω yields from the 2000 run, Mihajlo Kornicer, Richard T. Jones, University of Connecticut, Storrs, CT, March 19, 2001.

[0065] In the embodiment shown in Figure 5B, the initial approximating function **516** is determined for approximating the peak **514**. An illustrative embodiment may be found in The QtiPlot Handbook, Chapter 6, Analysis of data and curves, Multi-Peaks fitting, 2009, Ion Vasilief.

[0066] Still in a preferred embodiment, in processing step **110**, an additional initial approximating function is determined for approximating the distribution of the another type of region.

[0067] In the embodiment shown in Figure 5B, the initial approximating function is determined for approximating the peak **510**.

[0068] Still in a preferred embodiment, the applying of the at least one function comprises applying the transposition function to thereby transpose the initial approximating function into the additional initial approximating function.

[0069] In one embodiment, each of the initial approximating function and the additional initial approximating function is selected from the group consisting of a laplacian function and a gaussian function.

[0070] The skilled addressee will appreciate that, in another embodiment, the determining of at least one function may comprise applying a Fourier transformation to the at least one distribution.

[0071] The skilled addressee will also appreciate that, in another embodiment, the determining of at least one function may comprise applying a parametric law to the at least one distribution. In one embodiment, the parametric law may be a quadratic law.

[0072] Details of such embodiments may be made obvious to someone skilled in the art by reading "Numerical Analysis for Chemical Engineers", Nikos Drakos, Computer Based Learning Unit, University of Leeds. & Ross

Moore, Mathematics Department, Macquarie University, Sydney.

[0073] Still referring to Figure 1, according to processing step **140**, the at least one function is applied to each unitary image element of the selected type of region of the selected portion to thereby provide filtered image data.

[0074] In other words, the determined at least one function is used to assign, in the filtered image data, another value to each of the unitary image elements of the selected type of region, as it will be more detailed below.

[0075] For the application of tagged material removal for virtual colonoscopy, once the at least one function is determined, the skilled addressee will appreciate that the distribution of the selected type of region, i.e. the tagged region, is transposed or fitted onto the distribution of the air type regions, to thereby remove the tagged region in the filtered image data.

[0076] As previously described, Figure 5A illustrates the image data of a portion of a colon **500**, the image data comprising a biological tissues type region **502**, an air type region **504** and two tagged substance type regions **506**, **508** while Figure 5B schematically shows the intensity distribution of the image data shown in Figure 5A. The intensity distribution comprises a first peak **510** corresponding to the air type region **504**, a second peak **512** corresponding to the biological tissues type region **502** and a third peak **514** corresponding to the tagged substance type regions **506**, **508**.

[0077] Figure 6B shows the intensity distribution of the selected portion of the image data in the filtered image data once the at least one function has been applied to each of the unitary image elements of the selected portion of the original image data. In the illustrated case, the skilled addressee will appreciate that the third peak **514** corresponding to the tagged substance regions **506**, **508** has been transposed onto the first peak **510** corresponding to the air type region **504**.

[0078] The skilled addressee will appreciate that the term "transpose" should be understood such as in the musical meaning, i.e. to reproduce in a different key, by raising or lowering in pitch or, in other words, to perform a piece of music in a key other than the one in which it is written.

[0079] Figure 6A shows the filtered image data once the processing step **140** has been performed. As illustrated, the two tagged substance type regions **506**, **508** appearing in the original image data have been removed from the filtered image data. The values of the unitary image elements of these regions have been transposed so as to correspond to the values of the air type region **504**.

[0080] The skilled addressee will thus appreciate that the above-described method allows to perform an electronic cleansing of the colon by suppressing tagged material. The filtered image data obtained with the method provide a representation of the colon without the tagged regions, similarly to a clean colon as the one shown in

Figure 4A.

[0081] The skilled addressee will also appreciate that the filtering of the tagged regions is obtained without segmenting any regions, which is of great advantage. Indeed, the method disclosed may be used as a pre-processing step prior to a subsequent processing such as a structure segmentation for example. In this case, the skilled addressee will appreciate that it is particularly advantageous to provide filtered image data that have not been segmented prior to the subsequent processing.

[0082] Figure 8A shows an exemplary selected portion **800** of the image data. The selected portion **800** is a 3D portion and comprises each of the at least three types of regions, that is a tagged type regions **802**, an air type region **804** and another region corresponding to a biological tissue type region **806**.

[0083] Figure 8B shows the filtered image **810** obtained with the above described method for filtering image data. The skilled addressee will appreciate that the tagged type region **802** has been filtered and replaced with an air type region.

[0084] Figure 8C shows an enlarged portion of Figure 8A comprising the tagged type region **802** while Figure 8D shows the same enlarged portion once the filtering has been done. The skilled addressee will appreciate that the interface between the tagged type region **802** and the biological tissue type region **806** has not been modified nor altered, which is of great advantage for detecting small lesions, as mentioned above.

[0085] Figure 9 shows the intensity distribution of the selected portion **800** of the image data shown in Figure 8A. As illustrated, the intensity distribution comprises a first peak **910** corresponding to the air type region **804**, a second peak **912** corresponding to the biological tissues type region **806** and a third peak **914** corresponding to the tagged substance type region **802**.

[0086] According to an embodiment of the method for filtering image data previously described, an intensity distribution is determined for each of the three types of regions in the selected portion. The skilled addressee will appreciate that in the case of virtual colonoscopy, the method may be implemented for a plurality of selected portions of the image data in order to filter each of the tagged type regions in the image data.

[0087] Therefore, an intensity distribution is determined for each tagged type region, each of these intensity distributions being specific to each tagged type region. Similarly, an intensity distribution is determined for each air type region, each of these intensity distributions being specific to each air type region.

[0088] In one embodiment, each distribution of each air type region may be cumulated in order to provide a representative general distribution of the air type regions specific to the image data of a given patient. At this point, in this embodiment, each distribution of each tagged type region of the image data may be transposed into the representative general distribution of the air type region.

[0089] In a further embodiment, each distribution of

each biological tissue type region may be cumulated in order to provide a representative general distribution of the biological tissue type regions specific to the image data of a given patient.

[0090] The skilled addressee will nevertheless appreciate that, in a preferred embodiment, the method for filtering image data relies on the specific distribution of each given region.

[0091] In one embodiment, each specific distribution of the air type regions and the tagged type regions may be compared to the respective corresponding representative general distributions. In the case a given specific distribution seems to be not representative, i.e. the specific distribution greatly differs from the corresponding general distribution, various techniques may be considered.

[0092] In one embodiment, the representative general distribution may be used in place of the specific distribution.

[0093] In another embodiment, the corresponding selected portion of the image data may be enlarged in order to increase the statistical information contained therein. This enlarging may be performed until the specific distribution seems to be representative, compared to the corresponding representative general distribution.

[0094] In the case the specific distribution still greatly differs from the representative general distribution and/or the selected portion of the image data may not be enlarged anymore, the representative general distribution may be used.

[0095] In one embodiment, predetermined general distributions may be used in the case the corresponding representative general distribution may not be obtained.

[0096] The skilled addressee will appreciate that, in a preferred embodiment, the representative general distributions of the air type regions and biological tissue type regions may be used.

[0097] Once the distributions have been determined in the selected portion of the image data, the distribution of the tagged type region is transposed into the distribution of the air type region.

[0098] Referring again to Figure 9, each unitary image element whose intensity is above M_{tag} is considered to extend in a tagged region. Each unitary image element whose intensity is comprised below S_{tag} and above S_{fat} is considered to extend proximate to an interface between a tagged type region and the mucosa of the colon.

[0099] Figures 10A to 10C show how the distribution corresponding to a tagged type region is transposed into the distribution corresponding to an air type region. The skilled addressee will appreciate that M_{fat} may be used as a pivot for performing the transposition although other arrangements may be considered.

[0100] Figure 11 shows the resulting distribution once the distribution of the tagged type region has been transposed into the distribution of the air type region. The skilled addressee will appreciate that in Figure 11, the properties of the air distribution and the biological tissue

distribution have been preserved during the transposition process. In other words, in the case of Gaussian functions, the standard deviations of each distribution are the same as the ones of Figure 9.

[0101] It is worth mentioning that in the above example, gaussian functions have been chosen but other types of functions may be considered. Moreover, even in the case of a Gaussian function, other properties than sigma (S_{tag} for example) and mu (M_{tag} for example) may be chosen to perform the transposition. The skilled addressee will also appreciate that others parameters allowing to characterize the distributions may be used.

[0102] The skilled addressee will also appreciate that in the above described example, the transposition may be considered as a process based on the relative connectivity of the elements. Indeed, a unitary image element representing a biological tissue type region which is not connected to a tagged type region will not be transposed.

[0103] Figures 12 to 15 more clearly illustrates how the transposition may be performed, in one embodiment.

[0104] Referring to Figures 12 and 13, there is shown a selected portion of the image data and the corresponding intensity distribution. In this illustrative example, the gray continuous arrows depict the contribution of elements connected to the region of interest to the overall local distribution and that should be transposed. These elements comprise the interfaces between an air type region and a tagged type region and the interfaces between the mucosa of the colon and a tagged type region. The black dashed arrows depict the contribution of elements that are not connected to the region of interest and that should not be transposed but nevertheless remain of great interest for describing the surrounding environment. These elements comprise the surrounding biological tissues.

[0105] Figures 14 and 15 show the filtered image data once the transposition has been performed and the corresponding intensity distribution. It is worth noting that the tagged type region has been transposed while the elements not connected to the region of interest to be transposed have not been transposed and thus remain unchanged. This is clearly illustrated in Figures 14 and 15. The skilled addressee will appreciate that the distribution of the overall transposed portion of the image substantially depicts the same characteristics, but one can realize that there is an attenuation due to the transposition of the relevant elements.

[0106] The skilled addressee will thus appreciate that the relations between the different elements, i.e. their relative connectivity, are taken into consideration during the transposition.

[0107] Moreover, the skilled addressee will also appreciate that in the above described example, the transposition is performed according to a linear model but various other model may be considered to perform the transposition.

[0108] In one embodiment, the method for filtering im-

age data may further comprises displaying the filtered image data. In the case the image data are representative of a portion of a colon, the method for filtering image data further comprises displaying a three dimensional rendering of the portion of the colon. Figures 3A and 3B respectively show a portion of the image data **300** as well as a three dimensional rendering **302** of the portion of the colon illustrated in Figure 3C.

[0109] In one embodiment, the method for filtering image data may further comprise providing the filtered image data to a volume rendering engine for 3D visualization.

[0110] In one embodiment, the method for filtering image data further comprises providing the filtered image data to a computer-aided detection unit for abnormalities detection, as detailed thereafter.

[0111] The skilled addressee will appreciate that the method for filtering image data as previously described may be particularly useful as a pre-processing step prior to perform a virtual colonoscopy but other types of endoscopies may also be considered. It should therefore be understood that the filtering method described above is not limited to the applications of colon image filtering but is rather directed to a general filtering method well adapted for anatomical structures comprising at least two phases. For non-limitative examples, the method may be useful for examination of abdominal aneurysms and neuro aneurysms.

[0112] The skilled addressee will also appreciate that the described filtering method is not limited to applications of examination of different human anatomical structures or animal anatomical structures. Indeed, it may also be applied to any type of image, including single 2D image, in order to perform an image filtering or image correction. For example, the method may be used for enclosed object examination for which a real visual inspection may not be performed. It may also be useful for filtering satellite images and radar images as non-limitative examples.

[0113] According to another aspect, there is also provided a system for filtering image data having at least three types of distinct regions from a selected type of region, each of the at least three types of distinct regions being characterized by a plurality of unitary image elements.

[0114] Referring to Figure 2, the system **200** comprises a data receiving unit **202** for receiving the image data **204** and a selecting unit **206** operatively coupled to the data receiving unit **202** for selecting a portion of the image data **204** comprising at least a corresponding portion of each of the at least three types of regions and providing a selected portion **208** of the image data **204**.

[0115] In one embodiment, the system **200** may comprise a user interface **210** operatively connected to the selecting unit **206** for providing selection parameters **212** to thereby select the portion **208** of the image data **204**. In a preferred embodiment, the portion **208** of the image data **204** is selected automatically, without user's inter-

vention.

[0116] An exemplary method for such automatic process has been described in "Automated seed placement for colon segmentation in computed tomography colonography", Academic Radiology, Volume 12, Issue 2, Pages 182-190 G.Iordanescu, P.Pickhardt, J.Choi, R.Summers February 2005, and in "Automatic segmentation of the colon for virtual colonoscopy", Computerized Medical Imaging and Graphics Volume 24, Issue 1, February 2000, Pages 1-9, C. L. Wyatt, Y. Ge and D. J. Vin-

ing.
[0117] Still referring to Figure 2, the system **200** comprises a distribution determining unit **214** operatively coupled to at least one of the selecting unit **206** and the data receiving unit **202** for determining at least one distribution for each of the at least three types of regions in the selected portion **208** and providing at least one determined distribution, i.e. the distribution data **216**, for each of the at least three types of regions in the selected portion **208**.

[0118] In one embodiment, the user interface **210** is operatively connected to the distribution determining unit **214** and is used for providing distribution parameters **218** thereto. The distribution parameters **218** may comprise, in one embodiment, a number and a type of distributions to determine, as described above. In a preferred embodiment, the distribution parameters **218** are predetermined and the at least one distribution is then determined automatically, without user's intervention.

[0119] The system **200** further comprises a function determining unit **220** operatively coupled to the distribution determining unit **214** for determining at least one function for associating each unitary image element of the selected type of region in the selected portion **208** to another type of region of the at least three types of regions such that the at least one determined distribution of the selected type of regions in the selected portion **208** is transposed into a corresponding distribution of the another type of region.

[0120] The function determining unit **220** receives the distribution data **216** from the distribution determining unit **214** and provides function data **222** in response thereto.

[0121] In one embodiment, the function determining unit **220** may be operatively connected to the user interface **210** for receiving function parameters **224** such as, in one embodiment, a number and a type of function to determine. In a preferred embodiment, the function parameters **224** are predetermined and the function is then determined automatically, without user's intervention.

[0122] In a preferred embodiment, the function determining unit **220** comprises a module (not shown) for determining an initial approximating function to approximate the corresponding distribution and a module (not shown) for determining a transposition function adapted to transpose the initial approximating function into the corresponding distribution of the another type of region.

[0123] Still in a preferred embodiment, the function determining unit **220** comprises a module (not shown) for

determining an additional initial approximating function to approximate the distribution of the another type of region.

[0124] The system **200** also comprises a filtering unit **226** operatively coupled to the function determining unit **220** for applying the at least one function to each unitary image element of the selected type of region of the selected portion **208** to thereby provide filtered image data **228**.

[0125] The filtering unit **226** receives the function data **222** from the function determining unit **220** and the image data **204** from the data receiving unit **202** and then provides the filtered image data **228** in response thereto.

[0126] In a preferred embodiment, the function data **222** comprises transposition function data and the filtering unit **226** applies the received transposition function to thereby transpose the initial approximating function into the additional initial approximating function, as previously explained.

[0127] In one embodiment, the filtering unit **226** may be operatively connected to the user interface **210** for receiving filtering parameters **230**. In a preferred embodiment, the filtering parameters **230** are predetermined and the determined function is applied automatically, without user's intervention.

[0128] The skilled addressee will appreciate that, in one embodiment, the system may be entirely automated. In this case, the predetermined parameters may comprise the number of types of distinct regions, three in an exemplary embodiment, and parameters concerning the distribution of each type of distinct regions, a Gaussian shape in an exemplary embodiment. Still in an exemplary embodiment and according to the type of image used, a predetermined mean value may be assigned for each Gaussian initial approximating function. For example, for images obtained by "CT scan Rx", the mean value may be -800Hu for an air type region, +300Hu for a tagged substance type region and +50Hu for the remaining regions, i.e. the biological tissues. The skilled addressee will appreciate that various other arrangements may be considered.

[0129] Still referring to Figure 2, in one embodiment, the system **200** may further comprises an optional display unit **240** operatively coupled to the filtering unit **226** for displaying the filtered image data **228** to the user. In a further embodiment, the display unit **240** may be connected to the user interface **210** for receiving display parameters **242**.

[0130] In another further embodiment, the system **200** further comprises a transmitting unit **250** coupled to the filtering unit **226** for transmitting the filtered image data **228** either to a computer-aided detection unit **260** for abnormalities detection or to a computer-aided diagnosis unit (not shown) for abnormalities diagnosis. The transmitting unit **250** may comprise a wireless module (not shown) for providing a wireless transmission of the filtered image data **228**. The skilled addressee will appreciate that the filtered image data may be transmitted using

the wireless module according to various protocols without departing from the scope of this application. The skilled addressee will also appreciate that a wired transmission as well as an internet transmission may be used.

[0131] The system for filtering image data as previously described is of great advantage since it may allow a remote processing of the image data. Indeed, the image data may be acquired at the clinic or the hospital equipped with imaging devices, sent via a public network to a remote processing center and processed at the processing center. The filtered image data may then be sent to the hospital for a visual analysis by a doctor.

[0132] Alternatively, the skilled addressee will appreciate that the system for filtering image data may be integrated to the imaging device or be operatively connected thereto.

[0133] As previously mentioned, the system for filtering image data may be particularly useful for suppressing tagged material in virtual colonoscopies.

[0134] The skilled addressee will also appreciate that, in one embodiment, the method for filtering image data may be embedded in a computer program running on a processing device. The computer program may comprise instructions recorded on a machine readable medium for performing the above-described method for filtering image data.

[0135] According to another aspect, there is also provided a method of doing business in filtering image data according to the method for filtering image data previously described, wherein the image data are filtered for a fee.

[0136] According to another aspect, there is also provided a method of doing business in filtering image data, the method comprising receiving the image data; performing the method for filtering image data as previously described; and providing the filtered image for a fee.

[0137] According to another aspect, there is also provided a method of doing business in filtering image data, the method comprising providing by a provider a system for filtering image data as previously described to a third party; operating the system, wherein the operating is done by a third party for a fee; and reconveying by the third party at least a portion of the fee to the provider.

[0138] According to another aspect, there is also provided a method of doing business in filtering image data, the method comprising providing a tagging agent; defining a tagging agent distribution associated to the tagging agent; providing a system for filtering image data wherein the system is customized according to the tagging agent distribution; performing the method for filtering image data as previously described wherein the image data are obtained with the tagging agent; and providing the filtered image for a fee.

[0139] According to another aspect, there is also provided a method of doing business in filtering image data, the method comprising providing a tagging agent; defining a tagging agent distribution associated to the tagging agent; providing by a provider a system for filtering image

data to a third party, the system being customized according to the tagging agent distribution; operating the system, wherein the operating is done by a third party for a fee; and reconveying by the third party at least a portion of the fee to the provider.

[0140] According to another aspect, there is also provided the use of the system for filtering image data for suppressing tagged material in a virtual colonoscopy involving Iodine-based tagging agents.

[0141] According to another aspect, there is also provided the use of the system for filtering image data for suppressing tagged material in a virtual colonoscopy involving Barium-based tagging agents.

[0142] It will be appreciated that the system for filtering image data described herein may be operated by the owner of the system. Alternatively, the system may be operated by a third party for a fee. In one embodiment, the fee may be a share of the revenues while in an alternative embodiment, the fee may comprise a fixed fees.

[0143] Now referring to Figure 7, there is shown an embodiment of a processing device 700 in which the method for filtering image data may be advantageously used.

[0144] The processing device 700 comprises a central processing unit 702, I/O devices 704, a network interface circuit 708, a data bus 706 and a memory 710. The central processing unit 702, the I/O devices 704, the network interface circuit 708 and the memory 710 are operatively coupled using the data bus 706.

[0145] More precisely, the central processing unit 702 is adapted for processing data instructions. The network interface circuit 708 is adapted for operatively connecting the processing device 700 to another processing device (not shown) via a data network (not shown). The skilled addressee will appreciate that various embodiments of the network interface circuit 708 may be provided. Moreover, the skilled addressee will also appreciate that the network interface circuit 708 may operate according to various communication protocols such as TCP/IP for instance.

[0146] The I/O devices 704 are used for enabling a user to interact with the processing device 700. The skilled addressee will appreciate that various embodiments of the I/O devices 704 may be used. For example, the I/O devices 704 may comprise at least one of a keyboard, a screen and a mouse.

[0147] The skilled addressee will appreciate that various embodiments of the data bus 706 may be provided.

[0148] It will also be appreciated that various embodiments of the memory 710 may be provided. Moreover, it will be appreciated that the memory 710 may be used to store in one embodiment an operating system 712, a module for filtering image data 714 and databases 716 used for operating the module for filtering image data 714.

[0149] The skilled addressee will appreciate that the operating system 712 is used for managing the interactions between the central processing unit 702, the I/O devices 704, the network interface circuit 708, the data

bus 706 and the memory 710.

[0150] Although the above description relates to specific preferred embodiments as presently contemplated by the inventor, it will be understood that the invention in its broad aspect includes mechanical and functional equivalents of the elements described herein. For example, the method may be applied to the examination of different human anatomical structures as well as animal structures. It may also be applied to enclosed object examination for which a real visual inspection may not be performed.

Claims

1. A method for filtering image data having at least three types of distinct regions from a selected type of region, each of the at least three types of distinct regions being representative of one of three different substances, and comprising a plurality of unitary image elements, each unitary image element of the plurality of unitary image elements being **characterized by** a value, the method comprising:

providing (100) said image data;
 selecting (110) a portion of said image data comprising at least a corresponding portion of at least two of said at least three types of regions, said at least two types of regions comprising the selected type of region;
 determining (120) at least one distribution for at least one of said at least two types of regions in said selected portion, wherein said determining at least one distribution comprises determining a distribution of the values characterizing a representative part of the unitary image elements corresponding to said selected portion;
 determining (130) at least one function for associating another value to each unitary image element of said selected type of region in said selected portion, the another value characterizing a unitary image element of another type of region of the at least two types of regions such that said at least one distribution of said selected type of regions in said selected portion is transposed into a corresponding distribution of said another type of region, wherein said determining at least one function comprises determining an initial approximating function for approximating the corresponding distribution of said selected type of region, and determining a transposition function adapted for transposing the initial approximating function into the corresponding distribution of said another type of region, and
 applying (140) said at least one function to each unitary image element of said selected type of region of said selected portion to thereby provide filtered image data.

2. The method for filtering image data according to claim 1, wherein said corresponding distribution of said another type of region is determined in said selected portion.
3. The method for filtering image data according to claim 1, wherein said corresponding distribution of said another type of region is determined in said image data.
4. The method for filtering image data according to claim 1, wherein said image data are representative of an anatomic structure.
5. The method for filtering image data according to claim 4, wherein said anatomic structure comprises a portion of a colon.
6. The method for filtering image data according to claim 1, wherein each of said at least three types of distinct regions respectively comprises one of a first substance type region, a second substance type region and a third substance type region.
7. The method for filtering image data according to claim 6, wherein each of said at least three types of distinct regions respectively comprises one of an air type region, a tagged substance type region and a biological tissues type region.
8. The method for filtering image data according to claim 7, wherein said filtered image data comprise at least an air type region and a biological tissues type region.
9. The method for filtering image data according to claim 1, wherein said selected portion of said image data comprises a corresponding region of said selected type of region.
10. The method for filtering image data according to claim 1, wherein said selecting a portion of said image comprises selecting one of said regions and selecting an immediate neighboring region until a resulting area comprises said at least two types of regions.
11. The method for filtering image data according to claim 8, wherein the immediate neighboring region is selected until said resulting area comprises a representative portion of each of said at least two types of regions.
12. The method for filtering image data according to claim 1, wherein said selecting a portion of said image comprises selecting one of said regions and selecting an immediate neighboring region until a resulting area comprises said at least three types of regions.
13. The method for filtering image data according to claim 8, wherein the immediate neighboring region is selected until said resulting area comprises a representative portion of each of said at least three types of regions.
14. The method for filtering image data according to claim 1, wherein the value is an intensity derivative of the unitary image elements corresponding to said selected portion.
15. The method for filtering image data according to claim 1, wherein said determining at least one distribution comprises determining a plurality of distributions of the values, the value being selected from a group consisting of an intensity, a gradient and an intensity derivative characterizing each unitary image elements of a representative part of the corresponding unitary image elements.
16. The method for filtering image data according to claim 1, further comprising determining an additional initial function for approximating the distribution of said another type of region, and wherein the applying of said at least one function comprises applying the transposition function to thereby transpose the initial function into the additional initial function.
17. The method for filtering image data according to claim 1, further comprising displaying said filtered image data.
18. The method for filtering image data according to claim 4, further comprising displaying a three dimensional rendering of said anatomic structure.
19. The method for filtering image data according to claim 1, further comprising providing said filtered image data to a computer-aided detection unit for abnormalities detection.
20. The method for filtering image data according to claim 1, further comprising providing said filtered image data to a volume rendering engine for 3D visualization.
21. A system for filtering image data having at least three types of distinct regions from a selected type of region, each of the at least three types of distinct regions being representative of one of three different substances, and comprising a plurality of unitary image elements, each unitary image element of the plurality of unitary image elements being **characterized by** a value, the system comprising:
 - a data receiving unit (202) for receiving said im-

age data;
 a selecting unit (206) coupled to the data receiving unit for selecting a portion of said image data comprising at least a corresponding portion of
 5 at least two of said at least three types of regions, said at least two types of region comprising the selected type of region, the selecting unit providing a selected portion of said image data;
 a distribution determining unit (214) coupled to
 10 at least one of the selecting unit and the data receiving unit for determining at least one distribution for at least one of said at least two types of regions in said selected portion, wherein said determining at least one distribution comprises determining a distribution of the values characterizing a representative part of the unitary image elements corresponding to said selected portion, and the distribution determining unit providing at least one determined distribution for the at least one of said at least two types of regions in said selected portion ;
 20 a function determining unit (220) coupled to the distribution determining unit for determining at least one function for associating another value to each unitary image element of said selected type of region in said selected portion, the another value characterizing a unitary image element of another type of region of the at least two types of regions such that said at least one determined distribution of said selected type of regions in said selected portion is transposed into a corresponding distribution of said another type of region, wherein said determining at least one function comprises determining an initial approximating function for approximating the corresponding distribution of said selected type of region and determining a transposition function adapted for transposing the initial approximating function into the corresponding distribution of said another type of region, and
 25 a filtering unit (226) coupled to the function determining unit and the data receiving unit for applying said at least one function to each unitary image element of said selected type of region of said selected portion to thereby provide filtered image data.

22. The system for filtering image data according to claim 21, further comprising a display unit (240) coupled to the filtering unit for displaying said filtered image data to an operator. 50
23. The system for filtering image data according claim 21, further comprising a transmitting unit (250) coupled to the filtering unit for transmitting said filtered image data to a computer-aided detection unit for abnormalities detection. 55

24. The system for filtering image data according to claim 21, wherein said function determining unit comprises a first module for determining an initial approximating function to approximate the corresponding distribution and a second module for determining a transposition function adapted to transpose the initial approximating function into the corresponding distribution of the another type of region.
25. Use of the system of claim 21 for performing a virtual endoscopy. 10
26. Use of the system of claim 21 for suppressing tagged material in a virtual colonoscopy selected from the group consisting of a prepless CT colonoscopy, a laxative free CT colonoscopy, a mild preparation CT colonoscopy with tagging agent and a cathartic preparation with tagging of remnant fluids/stools for CT colonoscopy. 15
27. Use of the method of claim 1 for suppressing tagged material in a virtual colonoscopy selected from the group consisting of a prepless CT colonoscopy, a laxative free CT colonoscopy, a mild preparation CT colonoscopy with tagging agent and a cathartic preparation with tagging of remnant fluids/stools for CT colonoscopy. 20

30 Patentansprüche

1. Verfahren zum Filtern von Bilddaten, die mindestens drei Typen von unterschiedlichen Regionen von einem ausgewählten Typ von Region aufweisen, wobei jeder der mindestens drei Typen von unterschiedlichen Regionen für eine von drei verschiedene Substanzen repräsentativ ist und eine Vielzahl von einheitlichen Bildelementen umfasst, wobei jedes einheitliche Bildelement der Vielzahl von einheitlichen Bildelementen durch einen Wert gekennzeichnet ist, wobei das Verfahren umfasst:

Bereitstellen (100) der Bilddaten;
 Auswählen (110) eines Abschnitts der Bilddaten, der mindestens einen entsprechenden Abschnitt von mindestens zwei der mindestens drei Typen von Regionen umfasst, wobei die mindestens zwei Typen von Regionen den ausgewählten Typ von Region umfassen;
 Bestimmen (120) von mindestens einer Verteilung für mindestens einen der mindestens zwei Typen von Regionen in dem ausgewählten Abschnitt, wobei das Bestimmen von mindestens einer Verteilung das Bestimmen einer Verteilung der Werte umfasst, die einen repräsentativen Teil der einheitlichen Bildelemente kennzeichnen, der dem ausgewählten Abschnitt entspricht;

- Bestimmen (130) von mindestens einer Funktion zum Zuordnen eines anderen Werts zu jedem einheitlichen Bildelement des ausgewählten Typs von Region in dem ausgewählten Abschnitt, wobei der andere Wert ein einheitliches Bildelement eines anderen Typs von Region der mindestens zwei Typen von Regionen so kennzeichnet, dass die mindestens eine Verteilung des ausgewählten Typs von Regionen in dem ausgewählten Abschnitt in eine entsprechende Verteilung des anderen Typs von Region transponiert wird, wobei das Bestimmen von mindestens einer Funktion das Bestimmen einer anfänglichen Annäherungsfunktion umfasst, zum Annähern der entsprechenden Verteilung des ausgewählten Typs von Region und das Bestimmen einer Transponierungsfunktion, die angepasst ist zum Transponieren der anfänglichen Annäherungsfunktion in die entsprechende Verteilung des anderen Typs von Region, und Anwenden (140) der mindestens einer Funktion auf jedes einheitliche Bildelement des ausgewählten Typs von Region des ausgewählten Abschnitts, um dadurch gefilterte Bilddaten bereitzustellen.
2. Verfahren zum Filtern von Bilddaten nach Anspruch 1, wobei die entsprechende Verteilung des anderen Typs von Region in dem ausgewählten Abschnitt bestimmt wird.
 3. Verfahren zum Filtern von Bilddaten nach Anspruch 1, wobei die entsprechende Verteilung des anderen Typs von Region in den Bilddaten bestimmt wird.
 4. Verfahren zum Filtern von Bilddaten nach Anspruch 1, wobei die Bilddaten für eine anatomische Struktur repräsentativ sind.
 5. Verfahren zum Filtern von Bilddaten nach Anspruch 4, wobei die anatomische Struktur einen Abschnitt eines Colons umfasst.
 6. Verfahren zum Filtern von Bilddaten nach Anspruch 1, wobei jeder der mindestens drei Typen von unterschiedlichen Regionen jeweils eine einer Region vom Typ einer ersten Substanz, einer Region vom Typ einer zweiten Substanz und einer Region vom Typ einer dritten Substanz umfasst.
 7. Verfahren zum Filtern von Bilddaten nach Anspruch 6, wobei jeder der mindestens drei Typen von unterschiedlichen Regionen jeweils eine einer Region vom Typ Luft, einer Region vom Typ markierte Substanz und einer Region vom Typ biologisches Gewebe umfasst.
 8. Verfahren zum Filtern von Bilddaten nach Anspruch
 9. Verfahren zum Filtern von Bilddaten nach Anspruch 1, wobei der ausgewählte Abschnitt der Bilddaten eine entsprechende Region des ausgewählten Typs von Region umfasst.
 10. Verfahren zum Filtern von Bilddaten nach Anspruch 1, wobei das Auswählen eines Abschnitts des Bilds das Auswählen einer der Regionen und das Auswählen einer unmittelbar benachbarten Region umfasst, bis ein resultierender Bereich die mindestens zwei Typen von Regionen umfasst.
 11. Verfahren zum Filtern von Bilddaten nach Anspruch 8, wobei die unmittelbar benachbarte Region ausgewählt wird, bis der resultierende Bereich einen repräsentativen Abschnitt von jedem der mindestens zwei Typen von Regionen umfasst.
 12. Verfahren zum Filtern von Bilddaten nach Anspruch 1, wobei das Auswählen eines Abschnitts des Bilds das Auswählen von einer der Regionen und das Auswählen einer unmittelbar benachbarten Region umfasst, bis ein resultierender Bereich die mindestens drei Typen von Regionen umfasst.
 13. Verfahren zum Filtern von Bilddaten nach Anspruch 8, wobei die unmittelbar benachbarte Region ausgewählt wird, bis der resultierende Bereich einen repräsentativen Abschnitt von jedem der mindestens drei Typen von Regionen umfasst.
 14. Verfahren zum Filtern von Bilddaten nach Anspruch 1, wobei der Wert eine Intensitätsableitung der einheitlichen Bildelemente ist, die dem ausgewählten Abschnitt entspricht.
 15. Verfahren zum Filtern von Bilddaten nach Anspruch 1, wobei das Bestimmen von mindestens einer Verteilung das Bestimmen einer Vielzahl von Verteilungen der Werte umfasst, wobei der Wert aus einer Gruppe ausgewählt wird, die aus einer Intensität, einem Gradienten und einer Intensitätsableitung besteht, die jedes der einheitlichen Bildelemente eines repräsentativen Teils der entsprechenden einheitlichen Bildelemente kennzeichnen.
 16. Verfahren zum Filtern von Bilddaten nach Anspruch 1, weiter umfassend Bestimmen einer zusätzlichen anfänglichen Funktion zum Annähern der Verteilung des anderen Typs von Region, und wobei das Anwenden der mindestens einer Funktion das Anwenden der Transponierungsfunktion umfasst, um dadurch die anfängliche Funktion in die zusätzliche anfängliche Funktion zu transponieren.

17. Verfahren zum Filtern von Bilddaten nach Anspruch 1, weiter umfassend Anzeigen der gefilterten Bilddaten.
18. Verfahren zum Filtern von Bilddaten nach Anspruch 4, weiter umfassend Anzeigen einer dreidimensionalen Bildberechnung der anatomischen Struktur. 5
19. Verfahren zum Filtern von Bilddaten nach Anspruch 1, weiter umfassend Bereitstellen der gefilterten Bilddaten an eine computerunterstützte Erkennungseinheit zur Erkennung von Anomalien. 10
20. Verfahren zum Filtern von Bilddaten nach Anspruch 1, weiter umfassend Bereitstellen der gefilterten Bilddaten an einen Volumen-Bildberechnungs-Engine zur 3D-Visualisierung. 15
21. System zum Filtern von Bilddaten, die mindestens drei Typen von unterschiedlichen Regionen von einem ausgewählten Typ von Region aufweisen, wobei jeder der mindestens drei Typen von unterschiedlichen Regionen für eine von drei verschiedenen Substanzen repräsentativ ist und eine Vielzahl von einheitlichen Bildelementen umfasst, wobei jedes einheitliche Bildelement von der Vielzahl von einheitlichen Bildelementen durch einen Wert gekennzeichnet ist, wobei das System umfasst:
- eine Datenempfangseinheit (202) zum Empfangen der Bilddaten; 30
- eine Auswähleinheit (206), die mit der Datenempfangseinheit gekoppelt ist, zum Auswählen eines Abschnitts der Bilddaten, der mindestens einen entsprechenden Abschnitt von mindestens zwei der mindestens drei Typen von Regionen umfasst, wobei die mindestens zwei Typen von Region den ausgewählten Typ von Region umfassen, wobei die Auswähleinheit einen ausgewählten Abschnitt der Bilddaten bereitstellt; 35
- eine Verteilungsbestimmungseinheit (214), die mit mindestens einem der Auswähleinheit und der Datenempfangseinheit gekoppelt ist, zum Bestimmen von mindestens einer Verteilung für mindestens einen der mindestens zwei Typen von Regionen in dem ausgewählten Abschnitt, wobei das Bestimmen von mindestens einer Verteilung das Bestimmen einer Verteilung der Werte umfasst, die einen repräsentativen Teil der einheitlichen Bildelemente kennzeichnen, die dem ausgewählten Abschnitt entsprechen, und die Verteilungsbestimmungseinheit mindestens eine bestimmte Verteilung für den mindestens einen der mindestens zwei Typen von Regionen in dem ausgewählten Abschnitt bereitstellt; 40
- eine Funktionsbestimmungseinheit (220), die 45
- 50
- 55

mit der Verteilungsbestimmungseinheit gekoppelt ist, zum Bestimmen von mindestens einer Funktion zum Zuordnen eines anderen Werts zu jedem der einheitlichen Bildelement des ausgewählten Typs von Region in dem ausgewählten Abschnitt, wobei der andere Wert ein einheitliches Bildelement eines anderen Typs von Region der mindestens zwei Typen von Regionen so kennzeichnet, dass die mindestens eine bestimmte Verteilung des ausgewählten Typs von Regionen in dem ausgewählten Abschnitt in eine entsprechende Verteilung des anderen Typs von Region transponiert wird, wobei das Bestimmen von mindestens einer Funktion das Bestimmen einer anfänglichen Annäherungsfunktion umfasst, zum Annähern der entsprechenden Verteilung des ausgewählten Typs von Region und das Bestimmen einer Transponierungsfunktion, die angepasst ist zum Transponieren der anfänglichen Annäherungsfunktion in die entsprechende Verteilung des anderen Typs von Region, und

eine Filtereinheit (226), die mit der Funktionsbestimmungseinheit und der Datenempfangseinheit gekoppelt ist, zum Anwenden der mindestens einer Funktion auf jedes der einheitlichen Bildelemente des ausgewählten Typs von Region des ausgewählten Abschnitts, um dadurch gefilterte Bilddaten bereitzustellen.

22. System zum Filtern von Bilddaten nach Anspruch 21, weiter umfassend eine Anzeigeeinheit (240), die mit der Filtereinheit gekoppelt ist, zum Anzeigen der gefilterten Bilddaten für eine Bedienperson.
23. System zum Filtern von Bilddaten nach Anspruch 21, weiter umfassend eine Übertragungseinheit (250), die mit der Filtereinheit gekoppelt ist, zum Übertragen der gefilterten Bilddaten an eine computergestützte Erkennungseinheit zur Erkennung von Anomalien.
24. System zum Filtern von Bilddaten nach Anspruch 21, wobei die Funktionsbestimmungseinheit ein erstes Modul zum Bestimmen einer anfänglichen Annäherungsfunktion umfasst, um die entsprechende Verteilung anzunähern, und ein zweites Modul zum Bestimmen einer Transponierungsfunktion, die angepasst ist, um die anfängliche Annäherungsfunktion in die entsprechende Verteilung des anderen Typs von Region zu transponieren.
25. Verwendung des Systems nach Anspruch 21 zum Durchführen einer virtuellen Endoskopie.
26. Verwendung des Systems nach Anspruch 21 zum Unterdrücken von markiertem Material in einer virtuellen Koloskopie, ausgewählt aus der Gruppe, be-

stehend aus einer vorbereitungslosen CT-Koloskopie, einer laxansfreien CT-Koloskopie, einer CT-Koloskopie mit sanfter Vorbereitung mit Markiermittel und einer abführenden Vorbereitung mit Markieren von Überresten von Fluiden/Stuhl für CT-Koloskopie.

27. Verwendung des Verfahren nach Anspruch 1 zum Unterdrücken von markiertem Material in einer virtuellen Koloskopie, ausgewählt aus der Gruppe, bestehend aus einer vorbereitungslosen CT-Koloskopie, einer laxansfreien CT-Koloskopie, einer CT-Koloskopie mit sanfter Vorbereitung mit Markiermittel und einer abführenden Vorbereitung mit Markieren von Überresten von Fluiden/Stuhl für CT-Koloskopie.

Revendications

1. Procédé de filtrage de données d'image ayant au moins trois types de régions distinctes à partir d'un type de région sélectionné, chacun des au moins trois types de régions distinctes représentant l'une des trois substances différentes, et comprenant une pluralité d'éléments d'image unitaires, chaque élément d'image unitaire de la pluralité d'éléments d'image unitaires étant **caractérisé par** une valeur, le procédé comprenant les étapes consistant :

à fournir (100) lesdites données d'image ;
à sélectionner (110) une partie desdites données d'image comprenant au moins une partie correspondante d'au moins deux desdits au moins trois types de régions, lesdits au moins deux types de régions comprenant le type de région sélectionné ;
à déterminer (120) au moins une distribution pour au moins l'un desdits au moins deux types de régions dans ladite partie sélectionnée, dans lequel ladite détermination d'au moins une distribution comprend la détermination d'une distribution des valeurs caractérisant une partie représentative des éléments d'image unitaires correspondant à ladite partie sélectionnée ;
à déterminer (130) au moins une fonction pour associer une autre valeur à chaque élément d'image unitaire dudit type de région sélectionné dans ladite partie sélectionnée, l'autre valeur caractérisant un élément d'image unitaire d'un autre type de région des au moins deux types de régions, de sorte que ladite au moins une distribution dudit type de régions sélectionné dans ladite partie sélectionnée est transposée en une distribution correspondante dudit autre type de région, où ladite détermination d'au moins une fonction comprend la détermination d'une fonction d'approximation initiale pour ef-

fectuer une approximation de la distribution correspondante dudit type de région sélectionné, et la détermination d'une fonction de transposition adaptée pour transposer la fonction d'approximation initiale en la distribution correspondante dudit autre type de région, et à appliquer (140) ladite au moins une fonction sur chaque élément d'image unitaire dudit type de région sélectionné de ladite partie sélectionnée pour fournir ainsi des données d'image filtrées.

2. Procédé de filtrage de données d'image selon la revendication 1, dans lequel ladite distribution correspondante dudit autre type de région est déterminée dans ladite partie sélectionnée.
3. Procédé de filtrage de données d'image selon la revendication 1, dans lequel ladite distribution correspondante dudit autre type de région est déterminée dans lesdites données d'image.
4. Procédé de filtrage de données d'image selon la revendication 1, dans lequel lesdites données d'image représentent une structure anatomique.
5. Procédé de filtrage de données d'image selon la revendication 4, dans lequel ladite structure anatomique comprend une partie d'un côlon.
6. Procédé de filtrage de données d'image selon la revendication 1, dans lequel chacun desdits au moins trois types de régions distinctes comprend respectivement l'une d'une région de premier type de substance, d'une région de deuxième type de substance et d'une région de troisième type de substance.
7. Procédé de filtrage de données d'image selon la revendication 6, dans lequel chacun desdits au moins trois types de régions distinctes comprend respectivement l'une d'une région de type air, d'une région de type substance marquée et d'une région de type tissus biologiques.
8. Procédé de filtrage de données d'image selon la revendication 7, dans lequel lesdites données d'image filtrées comprennent au moins une région de type air et une région de type tissu biologique.
9. Procédé de filtrage de données d'image selon la revendication 1, dans lequel ladite partie sélectionnée desdites données d'image comprend une région correspondante dudit type de région sélectionné.
10. Procédé de filtrage de données d'image selon la revendication 1, dans lequel ladite sélection d'une partie de ladite image comprend la sélection de l'une desdites régions et la sélection d'une région immé-

diatement voisine jusqu'à ce qu'une zone résultante comprenne lesdits au moins deux types de régions.


11. Procédé de filtrage de données d'image selon la revendication 8, dans lequel la région immédiatement voisine est sélectionnée jusqu'à ce que ladite zone résultante comprenne une partie représentative de chacun desdits au moins deux types de régions.
12. Procédé de filtrage de données d'image selon la revendication 1, dans lequel ladite sélection d'une partie de ladite image comprend la sélection d'une région desdites régions et la sélection d'une région immédiatement voisine jusqu'à ce qu'une zone résultante comprenne lesdits au moins trois types de régions.
13. Procédé de filtrage de données d'image selon la revendication 8, dans lequel la région immédiatement voisine est sélectionnée jusqu'à ce que ladite zone résultante comprenne une partie représentative de chacun desdits au moins trois types de régions.
14. Procédé de filtrage de données d'image selon la revendication 1, dans lequel la valeur est une dérivée d'intensité des éléments d'image unitaires correspondant à ladite partie sélectionnée.
15. Procédé de filtrage de données d'image selon la revendication 1, dans lequel ladite détermination d'au moins une distribution comprend la détermination d'une pluralité de distributions des valeurs, la valeur étant sélectionnée dans un groupe constitué d'une intensité, d'un gradient et d'une dérivée d'intensité caractérisant chaque élément d'image unitaire d'une partie représentative des éléments d'image unitaires correspondants.
16. Procédé de filtrage de données d'image selon la revendication 1, comprenant en outre la détermination d'une fonction initiale supplémentaire pour effectuer une approximation de la distribution dudit autre type de région, et dans lequel l'application de ladite au moins une fonction comprend l'application de la fonction de transposition pour transposer ainsi la fonction initiale en la fonction initiale supplémentaire.
17. Procédé de filtrage de données d'image selon la revendication 1, comprenant en outre l'affichage desdites données d'image filtrées.
18. Procédé de filtrage de données d'image selon la revendication 4, comprenant en outre l'affichage d'un rendu tridimensionnel de ladite structure anatomique.
19. Procédé de filtrage de données d'image selon la revendication 1, comprenant en outre la fourniture des-

des données d'image filtrées à une unité de détection assistée par ordinateur pour la détection d'anomalies.

20. Procédé de filtrage de données d'image selon la revendication 1, comprenant en outre la fourniture desdites données d'image filtrées à un moteur de rendu de volume pour une visualisation en 3D.
21. Système de filtrage de données d'image ayant au moins trois types de régions distinctes à partir d'un type de région sélectionné, chacun des au moins trois types de régions distinctes représentant l'une des trois substances différentes, et comprenant une pluralité d'éléments d'image unitaires, chaque élément d'image unitaire de la pluralité d'éléments d'image unitaires étant **caractérisé par** une valeur, le système comprenant :
 - une unité de réception de données (202) pour recevoir lesdites données d'image ;
 - une unité de sélection (206) couplée à l'unité de réception de données pour sélectionner une partie desdites données d'image comprenant au moins une partie correspondante d'au moins deux desdits au moins trois types de régions, lesdits au moins deux types de régions comprenant le type de région sélectionné, l'unité de sélection fournissant une partie sélectionnée desdites données d'image ;
 - une unité de détermination de distribution (214) couplée à au moins l'une de l'unité de sélection et de l'unité de réception de données pour déterminer au moins une distribution pour au moins l'un desdits au moins deux types de régions dans ladite partie sélectionnée, où ladite détermination d'au moins une distribution comprend la détermination d'une distribution des valeurs caractérisant une partie représentative des éléments d'image unitaires correspondant à ladite partie sélectionnée, et l'unité de détermination de distribution fournissant au moins une distribution déterminée pour au moins l'un desdits au moins deux types de régions dans ladite partie sélectionnée ;
 - une unité de détermination de fonction (220) couplée à l'unité de détermination de distribution pour déterminer au moins une fonction permettant d'associer une autre valeur à chaque élément d'image unitaire dudit type de région sélectionné dans ladite partie sélectionnée, l'autre valeur caractérisant un élément d'image unitaire d'un autre type de région des au moins deux types de régions de sorte que ladite au moins une distribution déterminée dudit type de régions sélectionné dans ladite partie sélectionnée soit transposée en une distribution correspondante dudit autre type de région, où ladite

- détermination d'au moins une fonction comprend la détermination d'une fonction d'approximation initiale pour effectuer une approximation de la distribution correspondante dudit type de région sélectionné et pour déterminer une fonction de transposition adaptée pour transposer la fonction d'approximation initiale en la distribution correspondante dudit autre type de région, et
- une unité de filtrage (226) couplée à l'unité de détermination de fonction et à l'unité de réception de données pour appliquer ladite au moins une fonction à chaque élément d'image unitaire dudit type de région sélectionné de ladite partie sélectionnée pour fournir ainsi des données d'image filtrées.
- 5
- 10
- 15
22. Système de filtrage de données d'image selon la revendication 21, 23, comprenant en outre une unité d'affichage (240) couplée à l'unité de filtrage pour afficher lesdites données d'image filtrées à un opérateur.
- 20
23. Système de filtrage de données d'image selon la revendication 21, comprenant en outre une unité de transmission (250) couplée à l'unité de filtrage pour transmettre lesdites données d'image filtrées à une unité de détection assistée par ordinateur pour la détection d'anomalies.
- 25
- 30
24. Système de filtrage de données d'image selon la revendication 21, 22, dans lequel ladite unité de détermination de fonction comprend un premier module pour déterminer une fonction d'approximation initiale afin d'effectuer une approximation de la distribution correspondante et un deuxième module pour déterminer une fonction de transposition adaptée pour transposer la fonction d'approximation initiale en la distribution correspondante de l'autre type de région.
- 35
- 40
25. Utilisation du système de la revendication 21, pour effectuer une endoscopie virtuelle.
26. Utilisation du système de la revendication 21, pour supprimer un matériau marqué dans une coloscopie virtuelle sélectionnée dans le groupe constitué d'une coloscopie par tomodensitométrie sans préparation, d'une coloscopie par tomodensitométrie sans laxatif, d'une coloscopie par tomodensitométrie avec préparation douce avec agent de marquage et d'une préparation cathartique avec marquage du reste de fluides/selles pour la coloscopie par tomodensitométrie.
- 45
- 50
- 55
27. Utilisation du procédé de la revendication 1 pour supprimer un matériau marqué dans une coloscopie virtuelle sélectionnée dans le groupe constitué d'une

coloscopie par tomodensitométrie sans préparation, d'une coloscopie par tomodensitométrie sans laxatif, d'une coloscopie par tomodensitométrie avec préparation douce avec agent de marquage et d'une préparation cathartique avec marquage du reste de fluides/selles pour la coloscopie par tomodensitométrie.

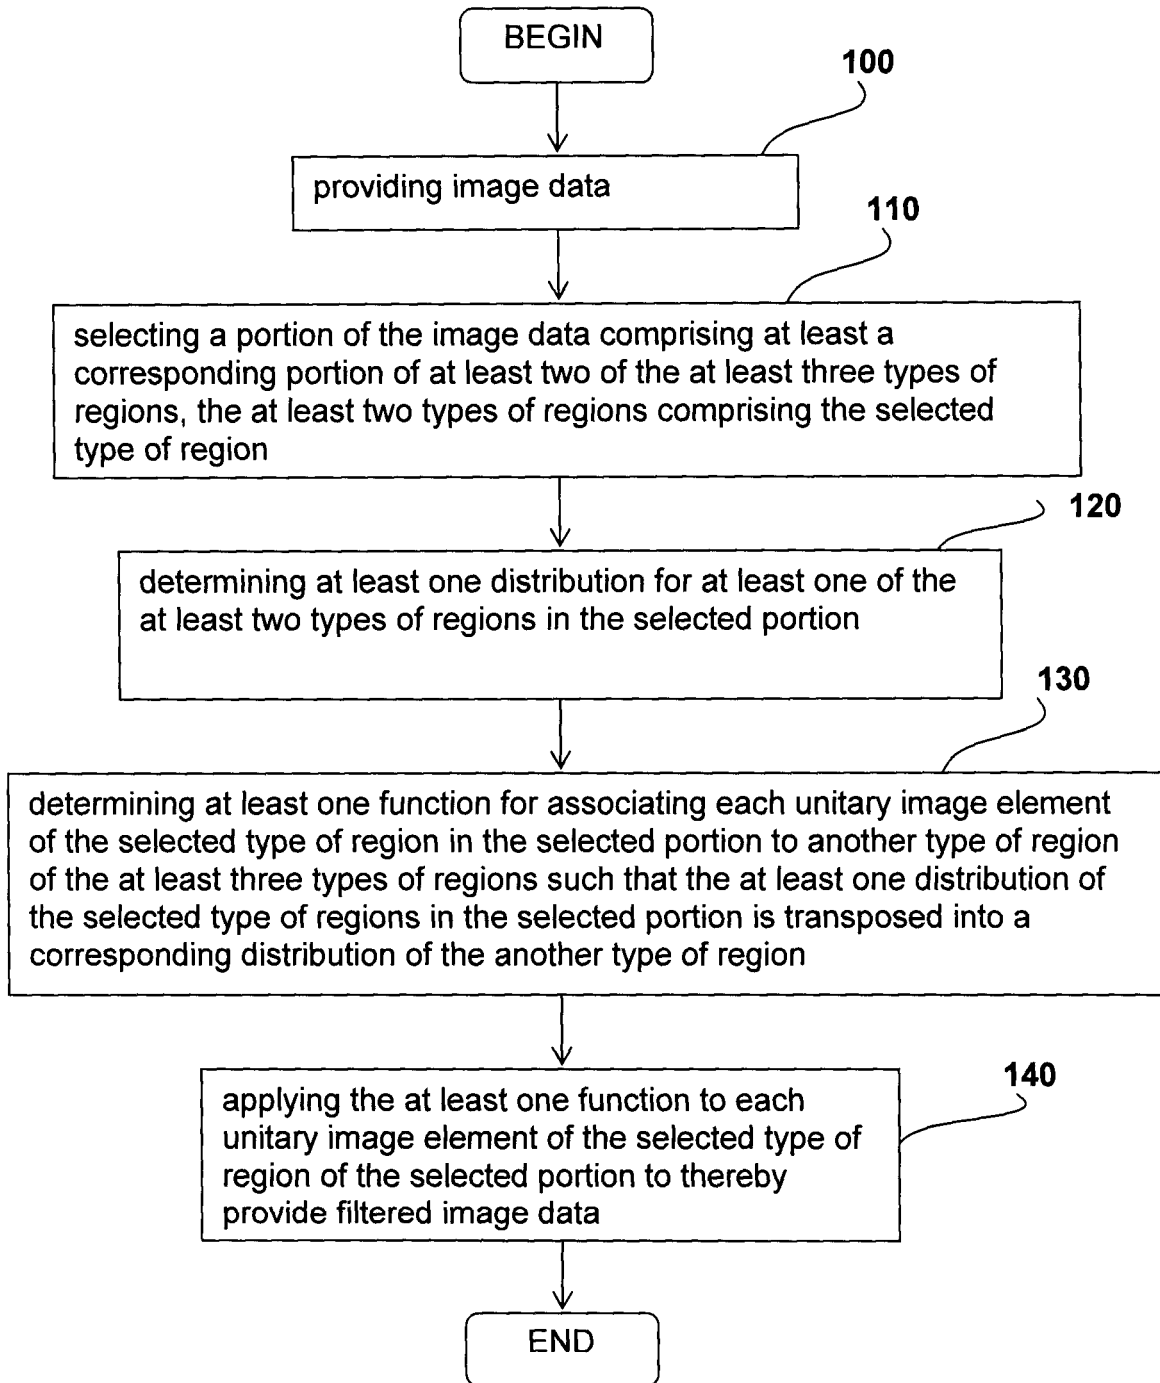**FIG. 1**

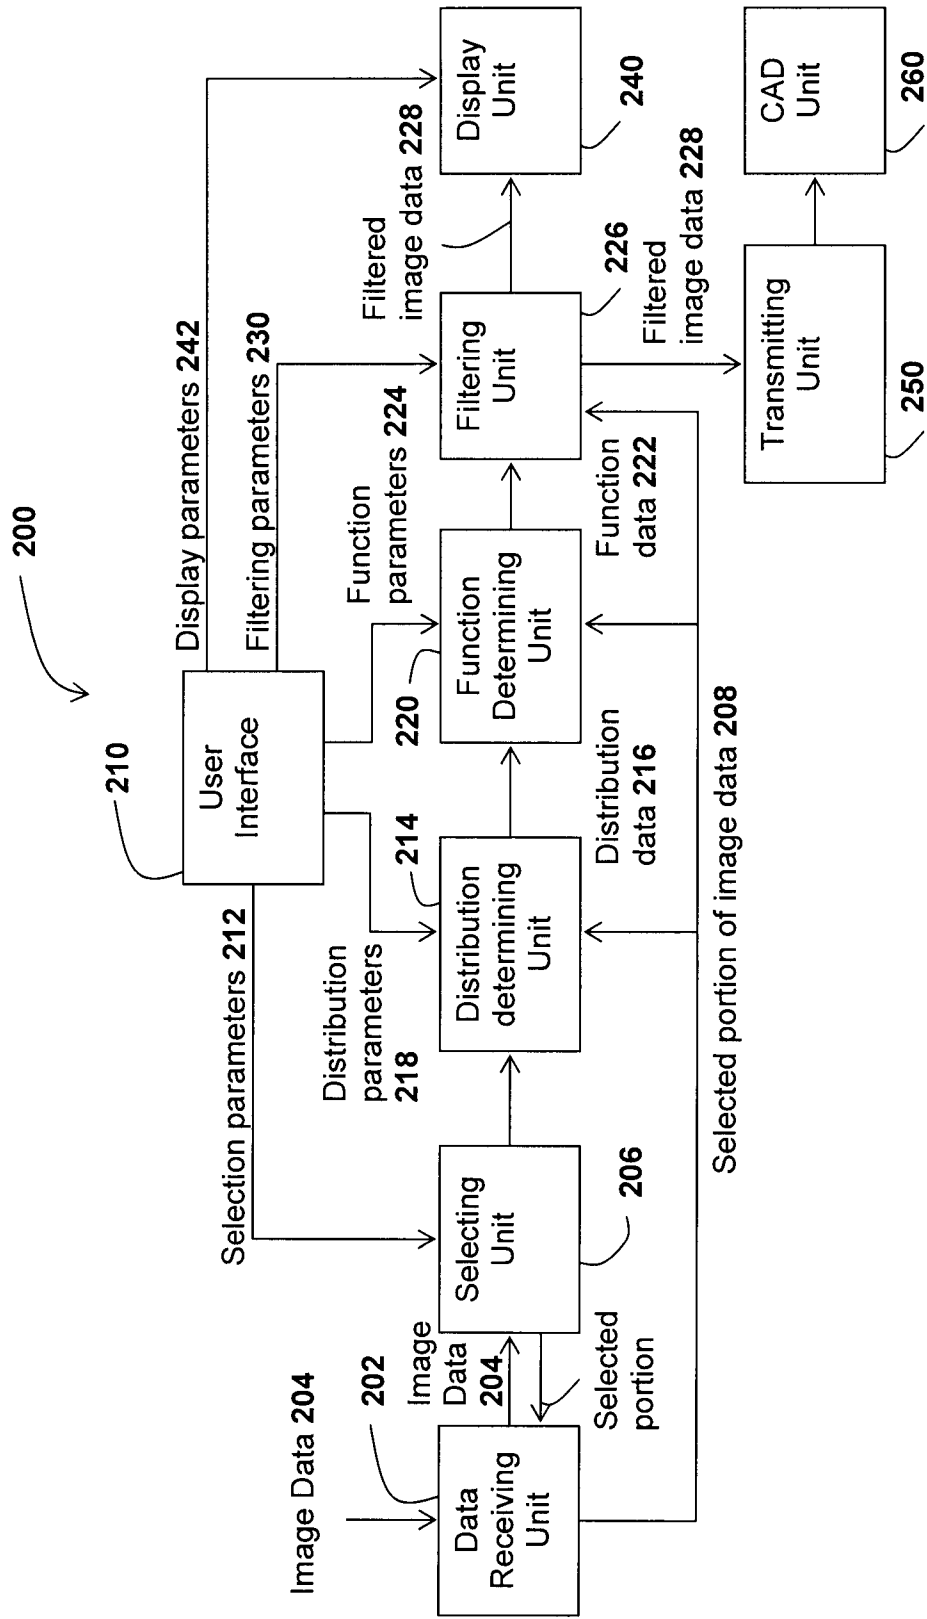


FIG. 2

300

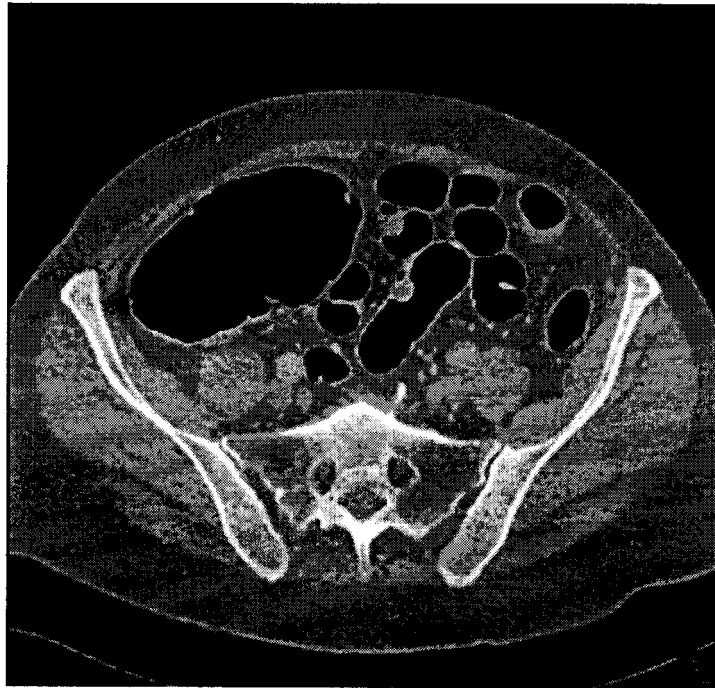


FIG. 3A

302



FIG. 3B



FIG. 3C

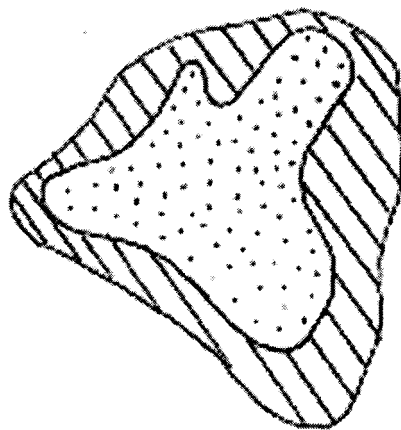


FIG. 4A

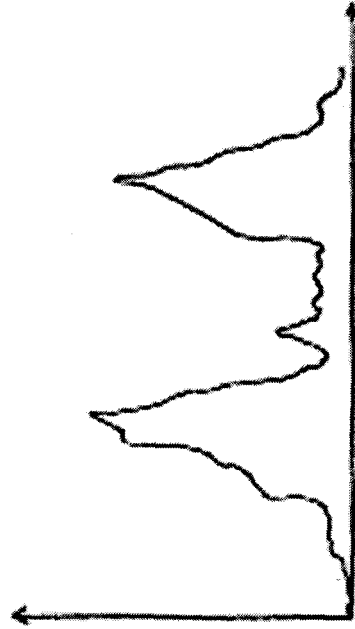
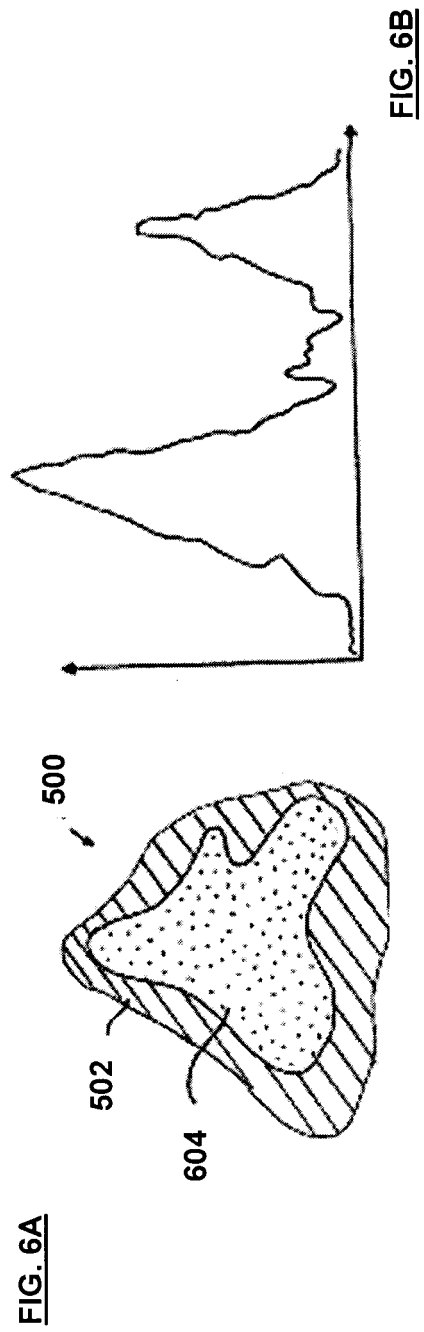
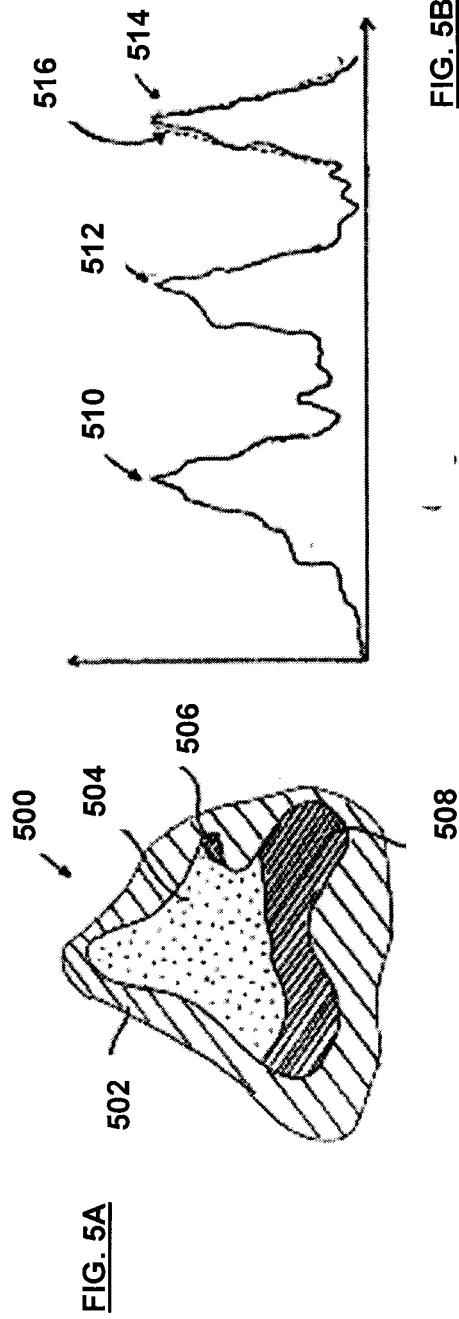


FIG. 4B



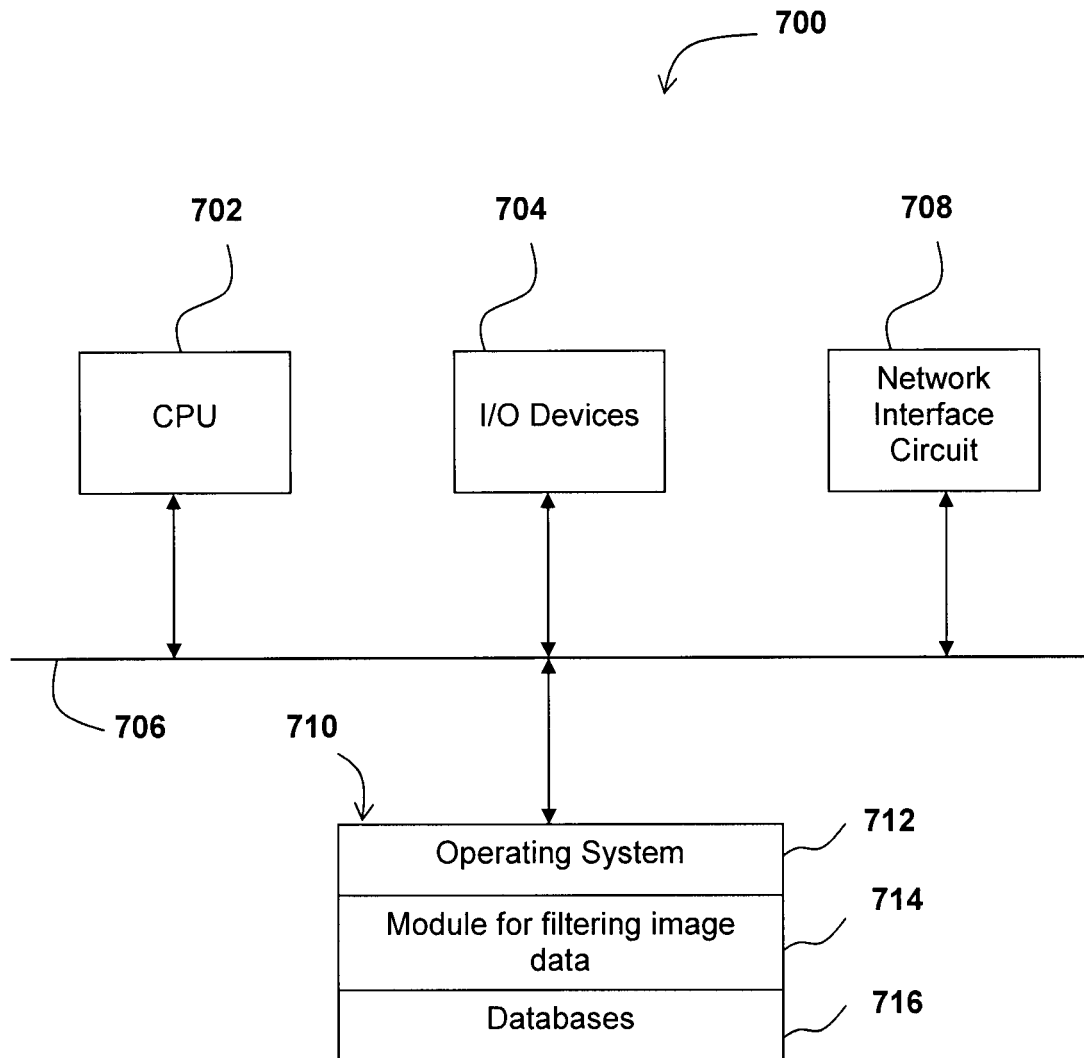
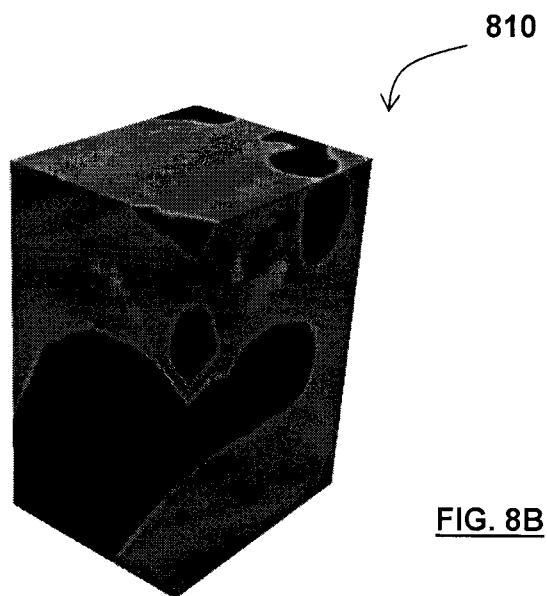
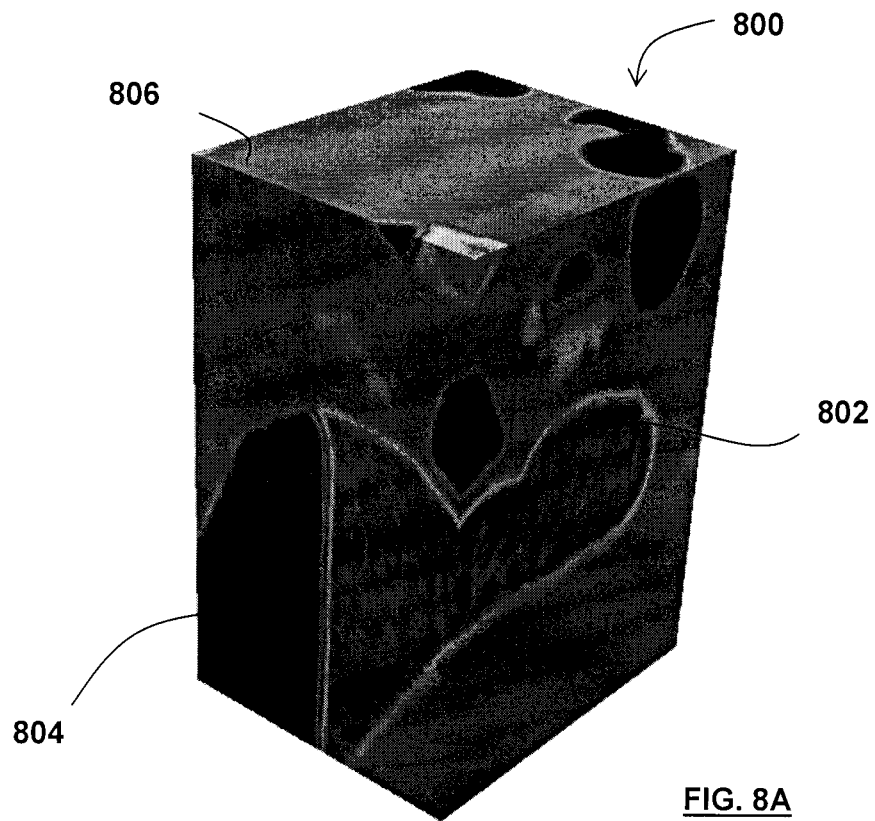


FIG. 7



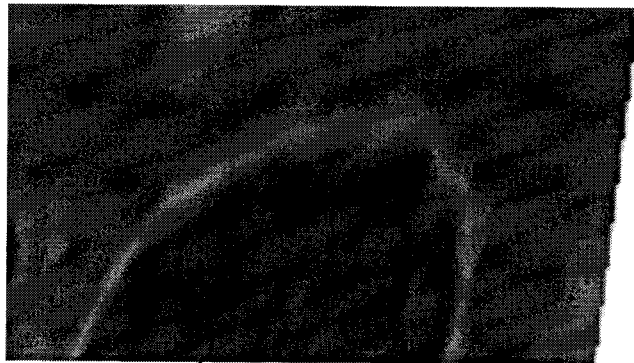


FIG. 8C

802

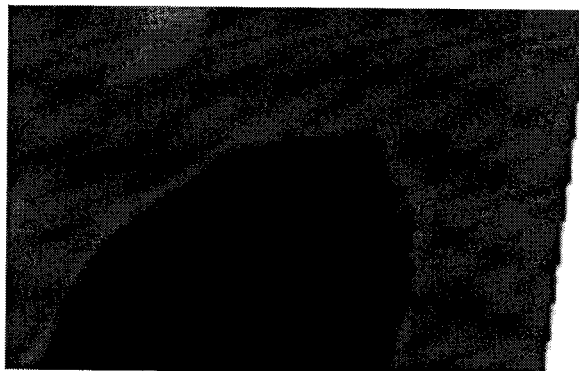


FIG. 8D

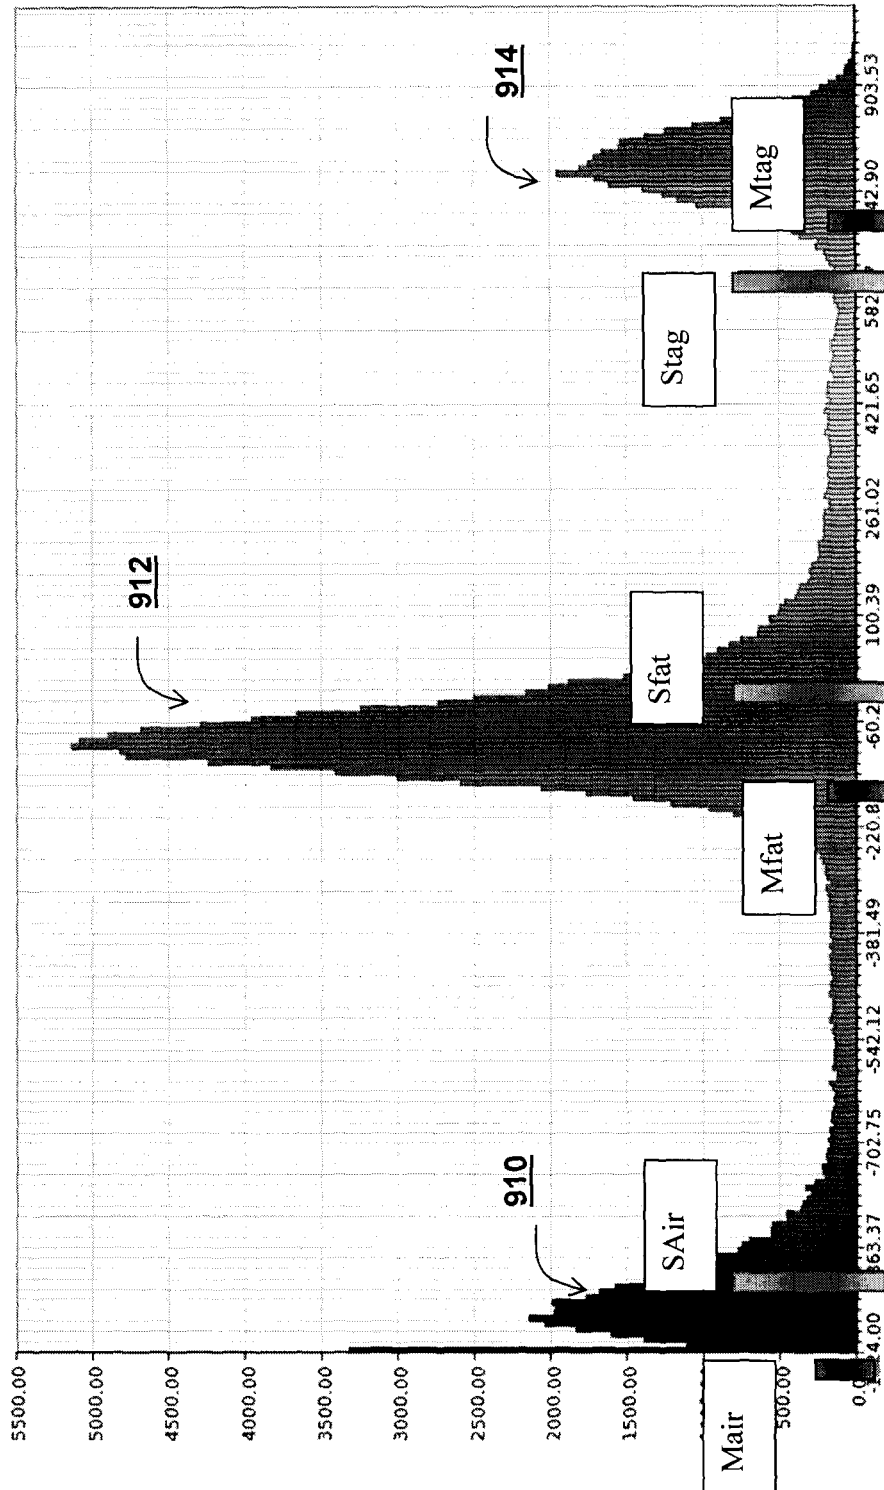
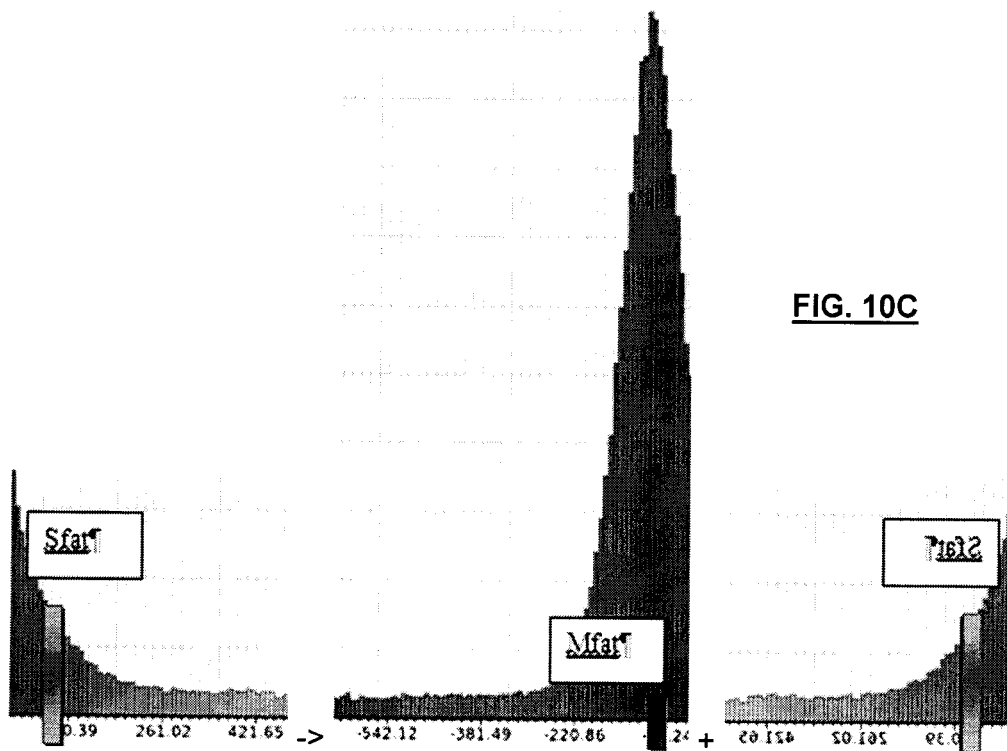
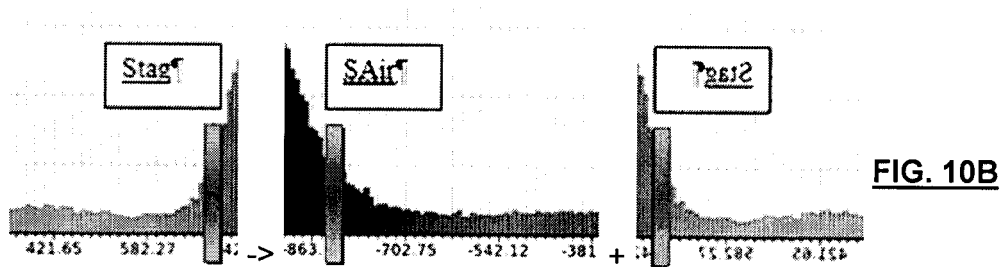
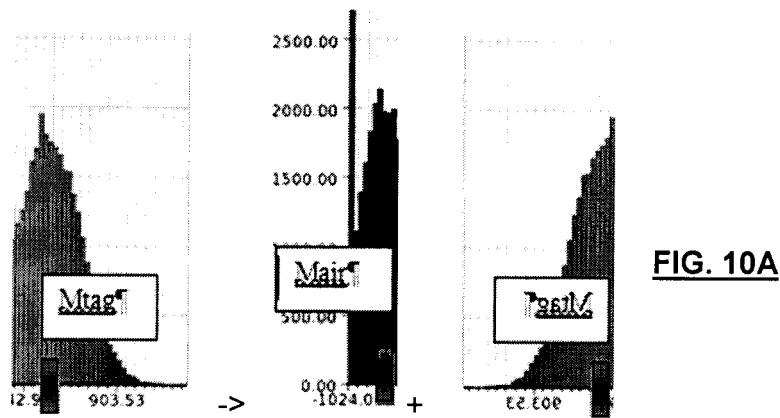


FIG. 9



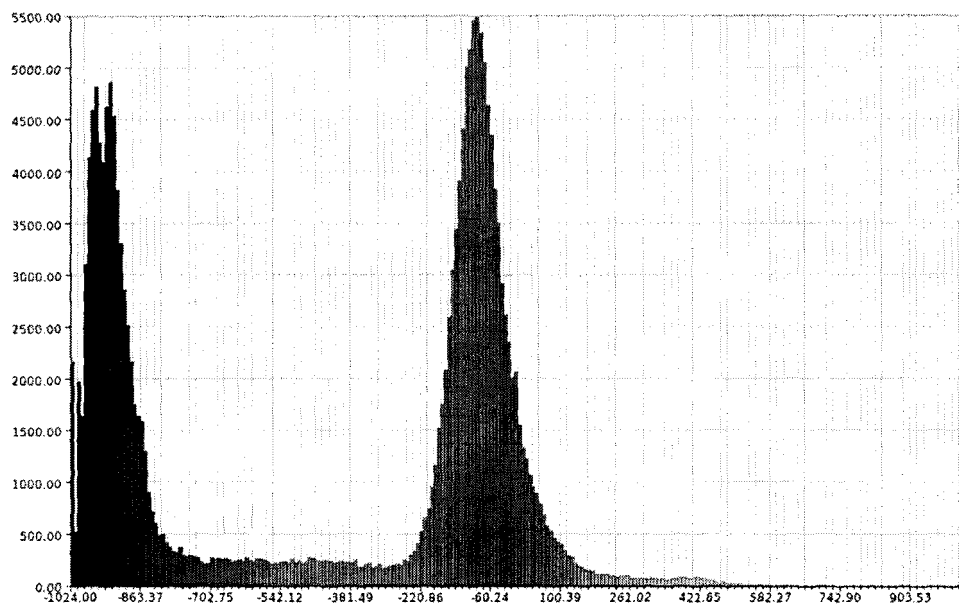


FIG. 11

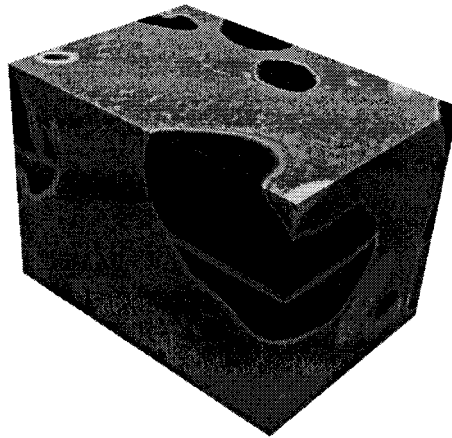


FIG. 12

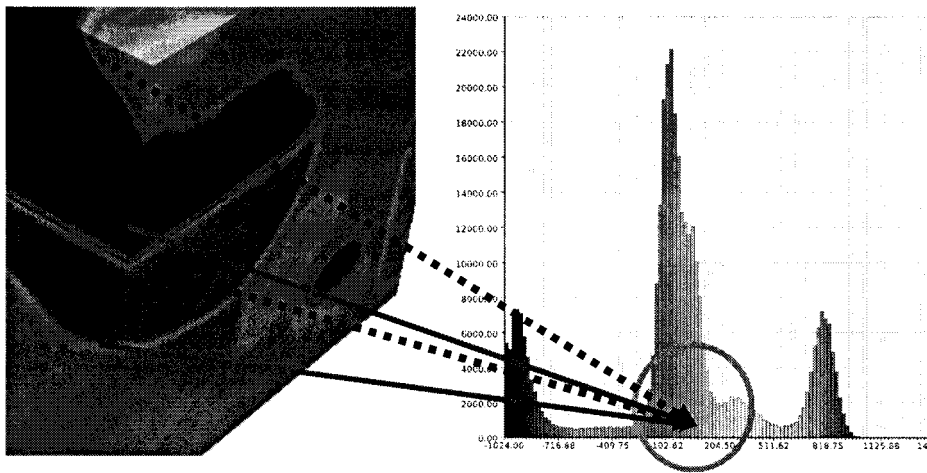


FIG. 13

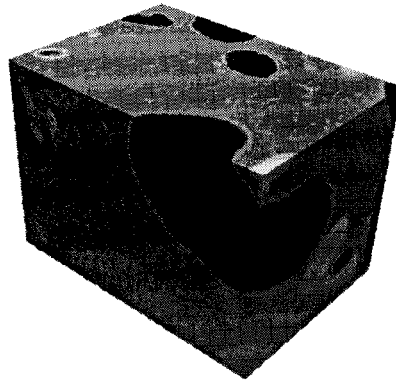


FIG. 14

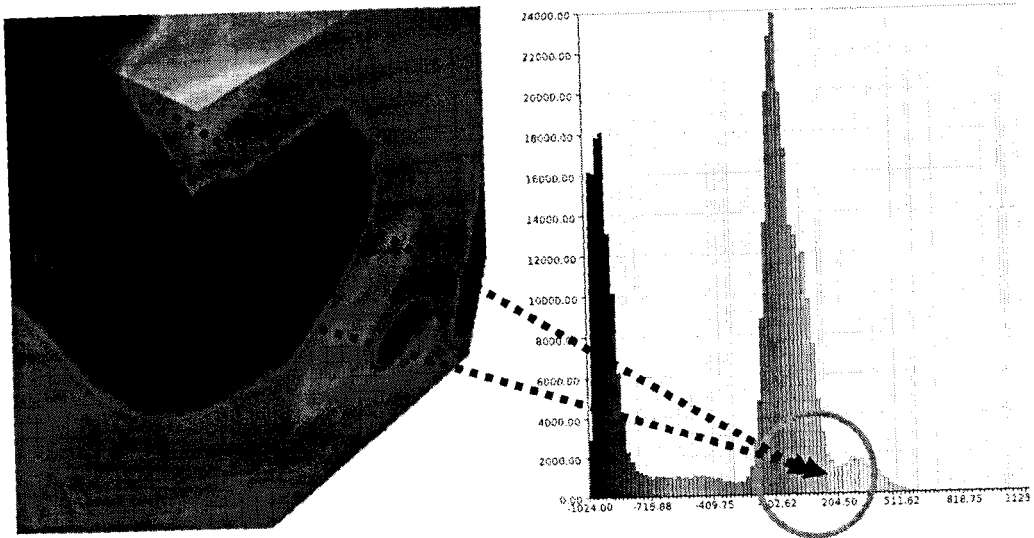


FIG. 15

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2008089492 PCT [0011]
- WO 2007064980 PCT [0011]
- WO 02029764 PCT [0011]
- US 20080118133 A [0011]
- US 20080008367 A [0011]
- US 6366800 B [0012]
- US 20020193687 A [0048]

Non-patent literature cited in the description

- **ABRAHAM H. DACHMAN.** Comparison of routine and unprepared CT colonography augmented by low fiber diet and stool tagging: a pilot study. *Abdom Imaging*, 2007, vol. 32, 96-104 [0031]
- **MATTHEW R. CALLSTROM.** CT Colonography without Cathartic Preparation: Feasibility Study. *Radiology*, 2001, vol. 219, 693-698 [0031]
- **MARIUS GEORGE LINGURARU.** CAD of Colon Cancer on CT Colonography Cases without Cathartic Bowel Preparation. *30th Annual International IEEE EMBS Conference Vancouver*, 20 August 2008 [0031]
- **KRISTINA T. JOHNSON.** Development of a Cathartic-Free Colorectal Cancer Screening Test Using Virtual Colonoscopy: A Feasibility Study. *AJR*, January 2007, vol. 188, 2936 [0031]
- **PHILIPPE A. LEFERE.** Dietary Fecal Tagging as a Cleansing Method before CT Colonography: Initial Results-Polyp Detection and Patient Acceptance1. *Radiology*, 2002, vol. 224, 393-403 [0031]
- **C. DANIEL JOHNSON.** Noncathartic CT Colonography with Stool Tagging: Performance With and Without Electronic Stool Subtraction. *AJR*, February 2008, vol. 190, 361-366 [0031]
- **SEBASTIAAN JENSCH.** Image Quality and Patient Acceptance of Four Regimens with Different Amounts of Mild Laxatives for CT Colonography. *AJR*, July 2008, vol. 191, 158-167 [0031]
- **MIN JU KIM.** Efficacy of Barium-Based Fecal Tagging for CT Colonography: a Comparison between the Use of High and Low Density Barium Suspensions in a Korean Population - a Preliminary Study. *Korean J Radiol*, February 2009, vol. 10 (1), 25-33 [0031]
- The Alternative: Faecal Tagging, Philippe Lefere and Stefaan Gryspeerdt. *Virtual Colonoscopy*. Springer Berlin Heidelberg, 2006, 35-49 [0031]
- **MICHAEL E. ZALIS.** Tagging-based, Electronically Cleansed CT Colonography: Evaluation of Patient Comfort and Image Readability. *Radiology*, April 2006, vol. 239 (1), 149-159 [0031]
- **WENLI CA.** Structure-analysis method for electronic cleansing in cathartic and noncathartic CT colonography. *Med.Phys.*, July 2008, vol. 35 (7), 3259-3277 [0035]
- Multidimensional transfer functions for interactive volume rendering. **KNISS, J. KINDLMANN ; G. HANSEN.** C. Sci. Comput. & Image Inst. Utah Univ, [0060]
- Visualization and Computer Graphics. *IEEE Transactions*, July 2002, vol. 8 (3), 270-285 [0060]
- **WEISSTEIN, ERIC W.** Nonlinear Least Squares Fitting. *MathWorld--A Wolfram Web Resource* [0064]
- **BATES, D. M. ; WATTS, D. G.** Nonlinear Regression and Its Applications. Wiley, 198 [0064]
- Analysis of data and curves, Multi-Peaks fitting. The QtiPlot Handbook. Ion Vasilief, 2009 [0065]
- Numerical Analysis for Chemical Engineers. **NIKOS DRAKOS.** Computer Based Learning Unit. University of Leeds. & Ross Moore, Mathematics Department, Macquarie University [0072]
- **G.LORDANESCU ; P.PICKHARDT ; J.CHOI ; R.SUMMERS.** Automated seed placement for colon segmentation in computed tomography colonography. *Academic Radiology*, February 2005, vol. 12 (2), 182-190 [0116]
- **C. L. WYATT ; Y. GE ; D. J. VINING.** Automatic segmentation of the colon for virtual colonoscopy. *Computerized Medical Imaging and Graphics*, February 2000, vol. 24 (1), 1-9 [0116]

专利名称(译)	用于过滤图像数据的方法和系统及其在虚拟内窥镜检查中的用途		
公开(公告)号	EP2504812B1	公开(公告)日	2019-08-07
申请号	EP2009851555	申请日	2009-11-27
申请(专利权)人(译)	DOG微系统公司.		
当前申请(专利权)人(译)	CADENS医学影像INC.		
[标]发明人	VINCENT THOMAS BERNARD PASCAL CHANDELIER FLORENT ANE ROBERT		
发明人	VINCENT, THOMAS BERNARD PASCAL CHANDELIER, FLORENT ANDRÉ ROBERT		
IPC分类号	G06T5/10 A61B5/055 A61B6/03 A61B8/13 G06Q50/00 A61B6/00 A61B5/00 G06T5/00 G06T7/11 G06T7/143		
CPC分类号	A61B5/055 A61B5/4255 A61B6/50 A61B6/505 A61B6/506 A61B8/13 G06T5/007 G06T7/11 G06T7/143 G06T2207/10081 G06T2207/30028		
代理机构(译)	DELORME , NICOLAS		
其他公开文献	EP2504812A1 EP2504812A4		
外部链接	Espacenet		

摘要(译)

一种用于从所选类型的区域过滤具有至少三种类型的不同区域的图像数据的方法，所述至少三种类型的不同区域中的每一个由多个单一图像元素表征，所述方法包括提供图像数据；选择包括至少三种类型区域中的每一种的至少相应部分的图像数据的一部分；确定所选部分中的至少三种类型区域中的每一种的至少一个分布；确定用于将所选择的部分中的所选类型的区域的每个单一图像元素与所述至少三种类型的区域中的另一种类型的区域相关联的至少一个功能，使得所选择的所述类型的区域中的所述至少一个分布在所选择的区域中部分被转换成另一种类型区域的相应分布；将所述至少一个函数应用于所选部分的所选类型区域的每个单元图像元素，从而提供滤波后的图像数据。还公开了用于在虚拟结肠镜检查中抑制标记材料的方法的应用。

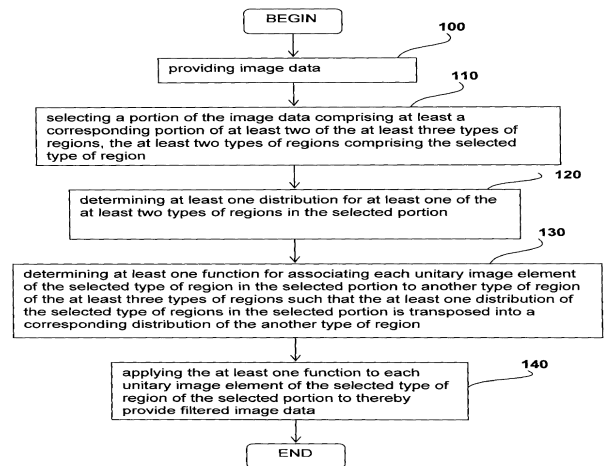


FIG. 1