

(19)



(11)

**EP 2 928 369 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**07.09.2016 Bulletin 2016/36**

(51) Int Cl.:  
**A61B 5/113** <sup>(2006.01)</sup> **A61B 5/00** <sup>(2006.01)</sup>  
**A61B 5/08** <sup>(2006.01)</sup>

(21) Application number: **13801802.3**

(86) International application number:  
**PCT/IB2013/059367**

(22) Date of filing: **15.10.2013**

(87) International publication number:  
**WO 2014/087266 (12.06.2014 Gazette 2014/24)**

(54) **MOTION MONITOR**

**BEWEGUNGSMONITOR**

**DISPOSITIF DE SURVEILLANCE DES MOUVEMENTS**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(30) Priority: **06.12.2012 GB 201221967**

(43) Date of publication of application:  
**14.10.2015 Bulletin 2015/42**

(73) Proprietor: **Gallagher, Gregory John  
8001 Cape Town (ZA)**

(72) Inventor: **Gallagher, Gregory John  
8001 Cape Town (ZA)**

(74) Representative: **Sajda, Wolf E.  
Meissner Bolte Patentanwälte  
Rechtsanwälte Partnerschaft mbB  
Postfach 86 06 24  
81633 München (DE)**

(56) References cited:  
**WO-A2-2009/050702 US-A1- 2011 060 215  
US-A1- 2011 112 793**

**EP 2 928 369 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### FIELD OF THE INVENTION

**[0001]** This invention relates to monitoring movements of the human body by way of apparatus worn on the person. The invention is useful in monitoring breathing and/or other movement of infants, but can also be used on adults, e.g. patients who are prone to respiratory disruptions while asleep.

### BACKGROUND TO THE INVENTION

**[0002]** Various breathing or apnoea monitors have been developed that are intended to be worn by infants and one of the monitors that is most reliable is described in WO 2008/096328 and is sold commercially under the name SNUZA®.

**[0003]** Further prior art document WO 2009/050702 discloses a device for monitoring regular movement of the body of a human subject which comprises electronic circuitry including at least one alarm; attachment means for releasably attaching the device to the subject's body in the groin area; at least one first and one second proximity sensors which are non-contact proximity sensors; said circuitry being configured to activate the alarm in the event that a pattern by which the distance measured by at least one of the first proximity sensor and the second proximity sensor varies, changes to a predetermined extent.

**[0004]** The present invention seeks to enhance the reliability, comfort and/or versatility of human motion monitors.

### SUMMARY OF THE INVENTION

**[0005]** According to one aspect of the present invention there is provided a device for monitoring regular movement of the body of a human subject such as an infant, said device is defined in independent claim 1. Further embodiments are defined in the dependent claims.

**[0006]** Referring to the presence in the device of a "first" proximity sensor and a "second" proximity sensor, does not imply that these are the only two sensors in the device. There may be any number of additional sensors in the device and some of them may duplicate the "first" and "second" sensor.

**[0007]** The first and second sensor zones may extend from the device towards the body of the subject, when the device is attached to an article of clothing of the subject and the first and second proximity sensors may be directed to detect the distances between the device and the stomach of the subject in the first and second sensor zones, respectively, when the device is attached to an article of clothing in the subject's groin area.

**[0008]** The term "groin" refers herein to the area that is typically covered by the waistband of a diaper and that is generally in the pelvic or pubic area. The term "stom-

ach" refers to the exterior of the lower abdominal region, corresponding generally to the position of the internal organ by the same name.

**[0009]** The attachment means may include a clip, preferably a protruding clip, that is attachable to the article of clothing and the first sensor zone and the second sensor zone may extend on the same side of the device, to which the clip protrudes.

**[0010]** The device may include a third proximity sensor that is a non-contact proximity sensor and that is configured to monitor the distance between the device and a near object in a third sensor zone, said third sensor zone extending in a direction from the device, generally opposite from the direction in which at least one of the first and second sensor zones extend.

**[0011]** An example not forming part of the claimed invention may include an accelerometer that is connected to the electronic circuitry of the device.

**[0012]** According to another aspect of the present invention there is provided a method of monitoring regular movement of the body of a human subject such as an infant, said method is defined in independent claim 6. Further embodiments are defined in the dependent claims.

**[0013]** The method may include attaching the device to an article of clothing worn by the subject, such as a diaper.

**[0014]** The method may include selecting one of the distance between the subject's body and the first proximity sensor or the distance between the subject's body and the second proximity sensor, whichever distance varies with the greatest amplitude, and activating said alarm if the pattern of said selected distance changes to a predetermined extent.

**[0015]** The change in the pattern of the monitored distance may be that the interval between successive increases or decreases in the distance, exceeds a predetermined maximum period or is shorter than a predetermined minimum period.

**[0016]** The method may include detecting the presence of objects in a third sensor zone, said third sensor zone extending away from said subject's body, and activating the alarm if an object is detected in the third sensor zone. The method may include monitoring the distance between the device and said object in the third sensor zone and activating the alarm only if said distance deviates to a predetermined extent from the pattern of the distance measured by at least one of the first proximity sensor and the second proximity sensor.

**[0017]** A method not forming part of the claimed subject-matter may include detecting movement of the device, e.g. by detecting acceleration or orientation of the device, and disregarding changes in the pattern of the monitored distance, caused by movement of the device.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0018]** For a better understanding of the present inven-

tion, and to show how the same may be carried into effect, reference will now be made, by way of non-limiting example, to the accompanying drawings, in which:

Figure 1 shows a diagrammatic side view of a monitoring device in accordance with the present invention, fitted on a waistband of an infant's diaper that is tight fitting; and.

Figure 2 shows a diagrammatic side view of the monitoring device and waistband of Figure 1, where the diaper is loose fitting

#### DETAILED DESCRIPTION OF THE DRAWINGS

**[0019]** Referring to the drawings, a monitoring device in accordance with the present invention is generally indicated by reference numeral 10.

**[0020]** The device 10 includes a casing 12 that houses electronic circuitry, a power source and alarms. The casing 12 includes an external clip 14 by which it is attachable to a garment such as a diaper 16 (e.g. at the upper edge or waistband of a diaper) in the groin area 18 of a wearer of the device. These features of the device 10 are generally similar to their counterparts described in WO 2008/096328.

**[0021]** Unlike the monitors described in WO 2008/096328, the device 10 of the present invention does not include a protuberance that extends from the casing 12. Instead, the device 10 includes two or more, preferably three, distance or proximity sensors that are housed in the casing 12.

**[0022]** The first proximity sensor 22 is directed generally towards the body of the wearer, i.e. it is directed to the same side of the device 10, as that on which the clip 14 is provided. The first sensor zone in which first sensor 22 can detect the proximity of objects, is identified by reference number 23 in Figure 2 and lies adjacent the device 10 in the stomach area 20.

**[0023]** The second proximity sensor 24 is also directed generally towards the body of the wearer to the same side of the device 10, as that on which the clip 14 is provided and the second sensor zone in which second sensor 24 can detect the proximity of objects, is identified by reference number 25 in the drawings. However, unlike the first sensor zone 23 that lies adjacent the device 10, the second sensor zone 25 lies further from the device 10 in the stomach area 20. In the illustrated embodiment, the first and second sensor zones 23 and 25 do not overlap, but this is not essential.

**[0024]** The third proximity sensor 26 is directed generally away from the body of the wearer, i.e. to a side of the device 10 that is opposite from that on which the clip 14 is provided. The third sensor zone in which the third sensor 26 can detect the proximity of objects, is identified by reference number 27 in the drawings. In the illustrated embodiment, the second and third sensor zones 25 and 27 do not overlap, but this is not essential.

**[0025]** The sensors 22,24,26 are non-contact type

sensors that measure the distance or proximity between the sensor and a nearby object in the sensor zone 23,25,27. Suitable sensors 22,24,26 include optical or infrared sensors and capacitive sensors.

**[0026]** The first and second sensors 22,24 and the internal electronic circuitry of the device 10 are configured to detect the distances between the first and second sensors 22,24, respectively, and the stomach 20 of the wearer continually (continuously or at short, regular intervals) and to signal these detected distances to a processor or CPU of the electronic circuitry. Likewise, the third sensor 26 and the internal electronic circuitry of the device 10 are configured to detect the distance between the third sensor and any object that may be present in the third sensor zone 27, continually, and to signal the presence of such an object and/or the detected distance to the processor or CPU.

**[0027]** In use, when the movement of a human subject such as the infant needs to be monitored in order to be alerted to apnoea, abnormal breathing, or the like, the device 10 is releasably attached to the body of the subject (wearer) by clipping it to the diaper waistband 16, or like article of clothing, with the clip 14 extending underneath the diaper and with the first and second sensors 22,24 directed to the wearer's stomach 20.

**[0028]** The positions of a diaper waistband 16, groin 18 and stomach 20 are not exactly defined or consistent between different wearers, but it has been found, particularly with infants, that the groin area 18 moves relatively little during breathing, compared to the stomach 20 (which expands and contracts markedly). Accordingly, as the wearer breathes, there is fairly regular relative movement between the more stable groin area 18 and the stomach 20.

**[0029]** The tightness with which the diaper waistband 16 (or analogous article of clothing) extends around the wearer's body can vary - especially in the case of small infants, because of the difficulty of fitting diapers on such small bodies, the softness of their bodies and often because of inexperience of their caregivers.

**[0030]** If the device 10 is fitted on a waistband 16 of a diaper that is tight fitting, the device - more particularly, the clip 14, will be pressed tightly against the groin area 18 and the wearer's body may bulge adjacent the top of the device in the stomach area 20, as shown somewhat exaggerated in Figure 1. In this case, the wearer's body may be immediately adjacent the device 10 in the region of the first sensor 22 and there will be no regular movement of the body in the first sensor zone 23 that can be detected by the first sensor. However, the wearer's stomach 20 will still protrude into the second sensor zone 25 and its regular movement can be detected by the second sensor 24.

**[0031]** If the device 10 is fitted on a waistband 16 of a diaper that is loose fitting, the device may be spaced away from the groin area 18 as shown somewhat exaggerated in Figure 2. In this case, the wearer's body may be spaced too far from the second sensor 24 and may

not fall within the second sensor zone 25, so that no regular movement of the body in the second sensor zone 25 that can be detected by the second sensor. However, the wearer's stomach will still protrude into the first sensor zone 23 without being pressed against the device 10, so that it can move more freely relative to the device 10 and its regular movement in the first sensor zone 23 can be detected by the first sensor 22.

**[0032]** If the device 10 is fitted on a waistband 16 of a diaper with a tightness of fit somewhere between the two extremes illustrated in Figures 1 and 2, the extent to which the wearer's stomach 20 extends into the first and second sensor zones 23 and 25, the extent to which the stomach is spaced from the device 10 in the first and second sensor zones, and the extent to which regular movement of the stomach can be detected in the first and second sensor zones, will vary. However, since the second sensor zone 25 is spaced farther from the device 10 than the first sensor zone 23, the regular stomach movement will always be detectable in at least one of the first and second sensor zones.

**[0033]** The circuitry inside the casing 12 is configured to monitor variations in the distances between the device 10 and the wearer's stomach 20 in the first and second sensor zones 23, 25, as detected by the first and second sensors 22, 24, as an indication of breathing movements. Preferably, the circuitry is configured to compare the amplitude variations between signals received from the first and second sensors 22, 24 and to select one of these signals temporarily for assessment of the wearer's breathing movements. The selection between signals received from the first and second sensors 22, 24 can be repeated from time to time and can be based on features of the signals instead of or in addition to a comparison between the signals' amplitudes, e.g. either of the signals may be temporarily selected for assessment of the wearer's breathing movement if it becomes difficult to detect regular variation in the signal of the other sensor.

**[0034]** The circuitry is configured to activate one or more of the alarms in the device 10, if the detected regular distance variation (as detected by the first or second sensor 22, 24 - whichever is temporarily selected) in either of the first and second sensor zones 23, 25, deviates from a pattern by a predetermined extent. The options of configurations of the circuitry to determine when an alarm needs to be activated are unlimited, but it can be configured to activate the alarm when the period between consecutive variations in the distance detected by the first or second sensor 22, 24 is longer than a predetermined time (possibly caused by apnoea) or is too short (possibly caused by hyperventilation or suffocation). Further, the circuitry can be configured with a degree of intelligence to anticipate the respiratory rhythm of a particular wearer, to filter out or ignore anomalies when the wearer sighs, yawns, or the like, without activating the alarm.

**[0035]** The third sensor 26 is not intended to detect regular breathing movements of the wearer's stomach, but is instead intended to detect the presence of and

distance to objects or bodies in the third sensor zone 27 that may pose a threat to the wearer, such as co-sleeping siblings, pets, toys, or the like. The third sensor 26 could also detect the presence of a bed, or the like, if the wearer changes from a desired sleeping position (e.g. rolls over from lying on his back) - particularly if a very young wearer rolls onto his stomach.

**[0036]** The circuitry is configured to activate one or more of the alarms in the device 10, if the third sensor 26 detects the presence of an object in the third sensor zone 27, but in order to avoid raising false alarms if the objects detected are part of the subject's anatomy (particularly the subject's arms or hands), the alarm is only activated in the event that the distance detected by the third sensor 26 (i.e. the distance between the device 10 and the detected object) deviates to a predetermined extent from the pattern of the regular distance variation detected by the first or second sensor 22, 24 - whichever is temporarily selected. Accordingly, if the distance measured by the third sensor 26 generally changes in phase and with the same frequency of the regular breathing movements of the subject's stomach 20, then it is assumed that the object detected in the third sensor zone 27 is part of the subject's anatomy and the alarm is not raised.

**[0037]** Any one or more of the first, second or third sensors 22, 24, 26 are preferably duplicated to improve performance of the device 10.

**[0038]** In a further example, the device 10 also includes an accelerometer 28 attached to or housed inside the casing 12. The accelerometer 28 can detect movement of the wearer, e.g. when the wearer rolls over or moves in any other way and this information is also sent by signal to the CPU of the device. In the CPU, the motion detected by the accelerometer 28 and the motion detected by the first and second sensors 22, 24 are compared to assess whether disturbances in the breathing patterns detected by the sensors 22, 24 may have been caused by other body movements (detected by the accelerometer 28) - in which case the alarm would not be activated.

**[0039]** The accelerometer 28 and electronic circuitry can also be configured to activate the alarm if the wearer changes physical orientation - e.g. if a very young wearer changes from a desired sleeping position (e.g. rolls over from lying on his back).

## Claims

1. A device (10) for monitoring regular movement of the body (20) of a human subject, said device (10) comprising:

electronic circuitry including at least one alarm; attachment means (14) for releasably attaching the device (10) to the subject's body (18) in the groin area (18); and at least one first proximity sensor (22) that is a

non-contact proximity sensor,

wherein

said first proximity sensor is configured and directed to monitor a distance between the device (10) and the stomach (20) of the subject in a first sensor zone (23), when the device (10) is attached to the subject's body in the groin area (18); wherein  
 said device (10) includes at least one second proximity sensor (24) that is a non-contact proximity sensor and that is configured and directed to monitor a distance between the device (10) and the stomach (20) of the subject in a second sensor zone (25), when the device (10) is attached to the subject's body in the groin area (18);  
 said attachment means (14) and said first and second proximity sensors (22,24) being configured such that the second sensor zone (25) is disposed farther from the attachment means (14) than the first sensor zone (23); and  
 said circuitry being configured to activate the alarm in the event that a pattern by which the distance measured by at least one of the first proximity sensor (22) and the second proximity sensor (24) varies, changes to a predetermined extent.

2. A device (10) according to claim 1, **characterised in that** the attachment means is configured to attach the device (10) to an article of clothing (16) of the subject.
3. A device (10) according to claim 2, **characterised in that** the attachment means includes a clip (14) that is attachable to the article of clothing (16).
4. A device (10) according to claim 3, **characterised in that** the first sensor zone (23) and the second sensor zone (25) extend on a side of the device (10), to which the clip (14) protrudes.
5. A device (10) according to any one of the preceding claims, **characterised in that** said device (10) includes a third proximity sensor (26) that is a non-contact proximity sensor and that is configured to monitor the distance between the device (10) and a near object in a third sensor zone (27), said third sensor zone (27) extending in a direction from the device (10), generally opposite from the direction in which at least one of the first and second sensor zones (23,25) extend.
6. A method of monitoring regular movement of the body of a human subject said method including:
 

releasably attaching a monitoring device (10) to the subject's body (18) in the groin area; and directing at least one first proximity sensor (22)

from the device (10) to the stomach (20) of the subject, to monitor movement of the subjects stomach (20) in a first sensor zone (23);  
**characterised by** directing at least one second proximity sensor (24) from the monitoring device (10) to the subject's stomach (20) to monitor movement of the subject's stomach (20) in a second sensor zone (25), said second sensor zone (25) being disposed farther from the attachment of the monitoring device (10) to the subject's body (18) in the groin area, than the first sensor zone (23);  
 detecting regular movement of the subject's stomach relative to the monitoring device (10) by monitoring the distance between said stomach (20) and the first and second proximity sensors (22,24) in the first and second sensor zones (23,25), respectively; and  
 activating an alarm if a pattern of said monitored distance changes to a predetermined extent in at least one of the first and second sensing zones (23,25).

7. A method according to claim 6, **characterised by** attaching the device (10) to an article of clothing (16) worn by the subject.
8. A method according to claim 6 or claim 7, **characterised by** selecting one of the distance between the subject's stomach (20) and the first proximity sensor (22) or the distance between the subject's stomach (20) and the second proximity sensor (24), whichever of said distances varies with the greatest amplitude, and activating the alarm if the pattern of said selected distance changes to a predetermined extent.
9. A method according to any one of claims 6 to 8, **characterised in that** said change in the pattern of the monitored distance, is that the period between successive increases or decreases in the distance, exceeds a predetermined maximum period.
10. A method according to any one of claims 6 to 8, **characterised in that** said change in the pattern of the monitored distance, is that the period between successive increases or decreases in the distance, is shorter than a predetermined minimum period.
11. A method as claimed in any one of claims 6 to 10, **characterised by** detecting the presence of objects in a third sensor zone (27), said third sensor zone (27) extending away from said subject's body (20), and activating the alarm if an object is detected in the third sensor zone (27).
12. A method as claimed in claim 11, **characterised by** monitoring the distance between the device and said

object in the third sensor zone (27) and activating the alarm only if said distance deviates to a predetermined extent from the pattern of the distance measured by at least one of the first proximity sensor and the second proximity sensor.

## Patentansprüche

1. Vorrichtung (10) zum Überwachen der regelmäßigen Bewegung des Körpers (20) eines Menschen, wobei die Vorrichtung (10) Folgendes aufweist:

- eine elektronische Schaltungseinrichtung, die mindestens einen Alarm beinhaltet;
- eine Befestigungseinrichtung (14) zum lösba-  
ren Befestigen der Vorrichtung (10) an dem Kör-  
per (18) der Person in der Leistengegend (18);  
und
- mindestens einen ersten Näherungssensor (22), bei dem es sich um einen berührungslosen  
Näherungssensor handelt,
- wobei der erste Näherungssensor dazu aus-  
gebildet und eingerichtet ist, eine Distanz zwi-  
schen der Vorrichtung (10) und dem Bauch (20)  
der Person in einer ersten Sensorzone (23) zu  
überwachen, wenn die Vorrichtung (10) in der  
Leistengegend (18) an dem Körper der Person  
angebracht ist;
- wobei die Vorrichtung (10) mindestens einen  
zweiten Näherungssensor (24) aufweist, bei  
dem es sich um einen berührungslosen Nähe-  
rungssensor handelt und der dazu ausgebildet  
und eingerichtet ist, eine Distanz zwischen der  
Vorrichtung (10) und dem Bauch (20) der Per-  
son in einer zweiten Sensorzone (25) zu über-  
wachen, wenn die Vorrichtung (10) in der Lei-  
stengegend (18) an dem Körper der Person an-  
gebracht ist;
- wobei die Befestigungseinrichtung (14) und  
der erste und zweite Näherungssensor (22, 24)  
derart ausgebildet sind, dass die zweite Sensor-  
zone (25) weiter von der Befestigungseinrich-  
tung (14) entfernt angeordnet ist als die erste  
Sensorzone (23); und
- wobei die Schaltungseinrichtung dazu ausge-  
bildet ist, den Alarm in dem Fall zu aktivieren,  
dass ein Muster, in dem sich die von mindestens  
einem von dem ersten Näherungssensor (22)  
und dem zweiten Näherungssensor (24) ge-  
messene Distanz ändert, sich in einem vorbe-  
stimmten Ausmaß verändert.

2. Vorrichtung (10) nach Anspruch 1,  
**dadurch gekennzeichnet,**  
**dass** die Befestigungseinrichtung dazu ausgebildet  
ist, die Vorrichtung (10) an einem Kleidungsstück  
(16) der Person zu befestigen.

3. Vorrichtung (10) nach Anspruch 2,  
**dadurch gekennzeichnet,**  
**dass** die Befestigungseinrichtung einen Clip (14)  
aufweist, der sich an dem Kleidungsstück (16) be-  
festigen lässt.

4. Vorrichtung (10) nach Anspruch 3,  
**dadurch gekennzeichnet,**  
**dass** sich die erste Sensorzone (23) und die zweite  
Sensorzone (25) auf einer Seite der Vorrichtung (10)  
erstrecken, zu der der Clip (14) vorsteht.

5. Vorrichtung (10) nach einem der vorhergehenden  
Ansprüche,  
**dadurch gekennzeichnet,**  
**dass** die Vorrichtung (10) einen dritten Näherungs-  
sensor (26) aufweist, bei dem es sich um einen be-  
rührungslosen Näherungssensor handelt und der  
dazu ausgebildet ist, die Distanz zwischen der Vor-  
richtung (10) und einem nahen Objekt in einer dritten  
Sensorzone (27) zu überwachen, wobei sich die drit-  
te Sensorzone (27) in einer Richtung von der Vor-  
richtung (10) weg erstreckt, die im Allgemeinen ent-  
gegengesetzt zu der Richtung ist, in der sich min-  
destens eine der ersten und zweiten Sensorzone  
(23,25) erstreckt.

6. Verfahren zum Überwachen der regelmäßigen Be-  
wegung des Körpers eines Menschen, wobei das  
Verfahren folgende Schritte beinhaltet:

- lösbares Befestigen einer Überwachungsvor-  
richtung (10) an dem Körper (18) der Person in  
der Leistengegend; und
- Richten von mindestens einem ersten Nähe-  
rungssensor (22) von der Vorrichtung (10) auf  
den Bauch (20) der Person, um eine Bewegung  
des Bauchs (20) der Person in einer ersten Sen-  
sorzone (23) zu überwachen;

### gekennzeichnet durch

- Richten von mindestens einem zweiten Nähe-  
rungssensor (24) von der Überwachungsvor-  
richtung (10) auf den Bauch (20) der Person,  
um Bewegung des Bauchs (20) der Person in  
einer zweiten Sensorzone (25) zu überwachen,  
wobei die zweite Sensorzone (25) weiter ent-  
fernt von der Befestigungsstelle der Überwa-  
chungsvorrichtung (10) an dem Körper (18) der  
Person in der Leistengegend als die erste Sen-  
sorzone (23) angeordnet ist;
- Erfassen von regelmäßigen Bewegungen des  
Bauchs der Person relativ zu der Überwa-  
chungsvorrichtung (10) **durch** Überwachen der  
Distanz zwischen dem Bauch (20) der Person  
sowie dem ersten und dem zweiten Näherungs-  
sensor (22, 24) in der ersten bzw. der zweiten

Sensorzone (23, 25); und

- Aktivieren eines Alarms, wenn sich ein Muster der überwachten Distanz in mindestens einer von der ersten und der zweiten Sensorzone (23, 25) in einem vorbestimmten Ausmaß ändert.

5

7. Verfahren nach Anspruch 6, **dadurch gekennzeichnet, dass** die Vorrichtung (10) an einem von der Person getragenen Kleidungsstück (16) befestigt wird.

10

8. Verfahren nach Anspruch 6 oder Anspruch 7, **gekennzeichnet durch**

- Auswählen von einem von der Distanz zwischen dem Bauch (20) der Person und dem ersten Näherungssensor (22) oder der Distanz zwischen dem Bauch (20) der Person und dem zweiten Näherungssensor (24), je nachdem, welche der Distanzen sich mit der größten Amplitude ändert, und  
- Aktivieren des Alarms, wenn sich das Muster der ausgewählten Distanz in einem vorbestimmten Ausmaß ändert.

15

20

25

9. Verfahren nach einem der Ansprüche 6 bis 8, **dadurch gekennzeichnet, dass** die Änderung in dem Muster der überwachten Distanz darin besteht, dass die Zeitdauer zwischen aufeinanderfolgenden Zunahmen oder Abnahmen der Distanz eine vorbestimmte maximale Zeitdauer überschreitet.

30

10. Verfahren nach einem der Ansprüche 6 bis 8, **dadurch gekennzeichnet, dass** die Änderung in dem Muster der überwachten Distanz darin besteht, dass die Zeitdauer zwischen aufeinanderfolgenden Zunahmen oder Abnahmen der Distanz kürzer ist als eine vorbestimmte Mindestzeitdauer.

35

40

11. Verfahren nach einem der Ansprüche 6 bis 10, **gekennzeichnet durch** Erfassen der Anwesenheit von Objekten in einer dritten Sensorzone (27), wobei sich die dritte Sensorzone (27) von dem Körper (20) der Person weg erstreckt, und Aktivieren des Alarms, wenn ein Objekt in der dritten Sensorzone (27) detektiert wird.

45

12. Verfahren nach Anspruch 11, **gekennzeichnet durch**

50

- Überwachen der Distanz zwischen der Vorrichtung und dem Objekt in der dritten Sensorzone (27) und  
- Aktivieren des Alarms nur dann, wenn die Distanz in einem vorbestimmten Ausmaß von dem Muster der Distanz abweicht, die von mindes-

55

tens einem von dem ersten Näherungssensor und dem zweiten Näherungssensor gemessen wird.

## Revendications

1. Dispositif (10) pour surveiller un mouvement régulier du corps (20) d'un sujet humain, ledit dispositif (10) comprenant :

- des circuits électroniques incluant au moins une alarme ;  
- un moyen d'attache (14) pour attacher le dispositif (10) de façon libérable sur le corps (18) du sujet dans la zone de l'aine (18) ; et  
- au moins un premier capteur de proximité (22) qui est un capteur de proximité sans contact, dans lequel ledit premier capteur de proximité est configuré et dirigé pour surveiller une distance entre le dispositif (10) et l'estomac (20) du sujet dans une première zone de détection (23) quand le dispositif (10) est attaché au corps du sujet dans la zone de l'aine (18) ;  
- dans lequel ledit dispositif (10) inclut au moins un second capteur de proximité (24) qui est un capteur de proximité sans contact et qui est configuré et dirigé pour surveiller une distance entre le dispositif (10) et l'estomac (20) du sujet dans une seconde zone de détection (25) quand le dispositif (10) est attaché au corps du sujet dans la zone de l'aine (18) ;  
- ledit moyen d'attache (14) et lesdits premier et second capteurs de proximité (22, 24) étant configurés de telle façon que la seconde zone de détection (25) est disposée plus loin du moyen d'attache (14) que la seconde zone de détection (23) ; et  
- lesdits circuits étant configurés pour activer l'alarme dans le cas où un motif, suivant lequel la distance mesurée par l'un au moins du premier capteur de proximité (22) est du second capteur de proximité (24) varie, change à un degré prédéterminé.

2. Dispositif selon la revendication 1, **caractérisé en ce que** le moyen d'attache est configuré pour attacher le dispositif (10) sur un article vestimentaire (16) du sujet.

3. Dispositif (10) selon la revendication 2, **caractérisé en ce que** le moyen d'attache inclut une pince (14) qui peut être attachée sur l'article vestimentaire (16).

4. Dispositif (10) selon la revendication 3, **caractérisé en ce que** la première zone de détection (23) et la seconde zone de détection (25) s'étendent

sur un côté du dispositif (10) vers lequel se projette la pince (14).

5. Dispositif (10) selon l'une quelconque des revendications précédentes,

**caractérisé en ce que** ledit dispositif (10) inclut un troisième capteur de proximité (26) qui est un capteur de proximité sans contact et qui est configuré pour surveiller la distance entre le dispositif (10) et un objet proche dans une troisième zone de détection (27), ladite troisième zone de détection (27) s'étendant dans une direction depuis le dispositif (10) généralement à l'opposé de la direction dans laquelle s'étend l'une au moins de la première et de la seconde zone de détection (23, 25).

6. Procédé pour surveiller un mouvement régulier du corps d'un sujet humain, ledit procédé incluant les étapes consistant à :

- attacher de façon libérable un dispositif de surveillance (10) sur le corps du sujet (18) dans la zone de l'aîne ; et
- diriger au moins un premier capteur de proximité (22) depuis le dispositif (10) vers l'estomac (20) du sujet, afin de surveiller un mouvement de l'estomac (20) du sujet dans une première zone de détection (23) ;

**caractérisé par les étapes** consistant à

- diriger au moins un second capteur de proximité (24) depuis le dispositif de surveillance (10) vers l'estomac (20) du sujet pour surveiller le mouvement de l'estomac du sujet (20) dans une seconde zone de détection (25), ladite seconde zone de détection (25) étant disposée plus loin du lieu d'attache du dispositif de surveillance (10) sur le corps (18) du sujet dans la zone de l'aîne, que la première zone de détection (23) ;
- détecter un mouvement régulier de l'estomac du sujet par rapport au dispositif de surveillance (10) en surveillant la distance entre ledit estomac (20) et le premier et le second capteur de proximité (22, 24) dans la première et la seconde zone de détection (23, 25) respectivement ; et
- activer une alarme si un motif de ladite distance surveillée change à un degré prédéterminé dans l'une au moins de la première et de la seconde zone de détection (23, 25).

7. Procédé selon la revendication 6,  
**caractérisé en ce que** l'on attache le dispositif (10) sur un article vestimentaire (16) porté par le sujet.

8. Procédé selon la revendication 6 ou 7,  
**caractérisé en ce que** l'on sélectionne une distance parmi la distance entre l'estomac du sujet (20) et le

premier capteur de proximité (22) ou la distance entre l'estomac du sujet (20) et le second capteur de proximité (24), pour celle de ces distances qui varie avec la plus grande amplitude, et on active l'alarme si le motif de ladite distance sélectionnée change à un degré prédéterminé.

9. Procédé selon l'une quelconque des revendications 6 à 8,

**caractérisé en ce que** ledit changement du motif de la distance surveillée, est que la période entre des augmentations des diminutions successives dans la distance dépasse une période maximum prédéterminée.

10. Procédé selon l'une quelconque des revendications 6 à 8,



**caractérisé en ce que** ledit changement du motif de la distance surveillée, est que la période entre des augmentations ou des diminutions successives dans la distance est plus courte qu'une période minimum prédéterminée.

11. Procédé selon l'une quelconque des revendications 6 à 10,

**caractérisé en ce que** l'on détecte la présence d'objets dans une troisième zone de détection (27), ladite troisième zone de détection (27) s'étendant en éloignement depuis le corps (20) dudit sujet, et on active l'alarme si un objet est détecté dans la troisième zone de détection (27).

12. Procédé selon la revendication 11,

**caractérisé en ce que** l'on surveille la distance entre le dispositif et ledit objet dans la troisième zone de détection (27), et on active l'alarme uniquement si ladite distance dévie à un degré prédéterminé par rapport au motif de la distance mesurée par au moins un capteur parmi le premier capteur de proximité et le second capteur de proximité.

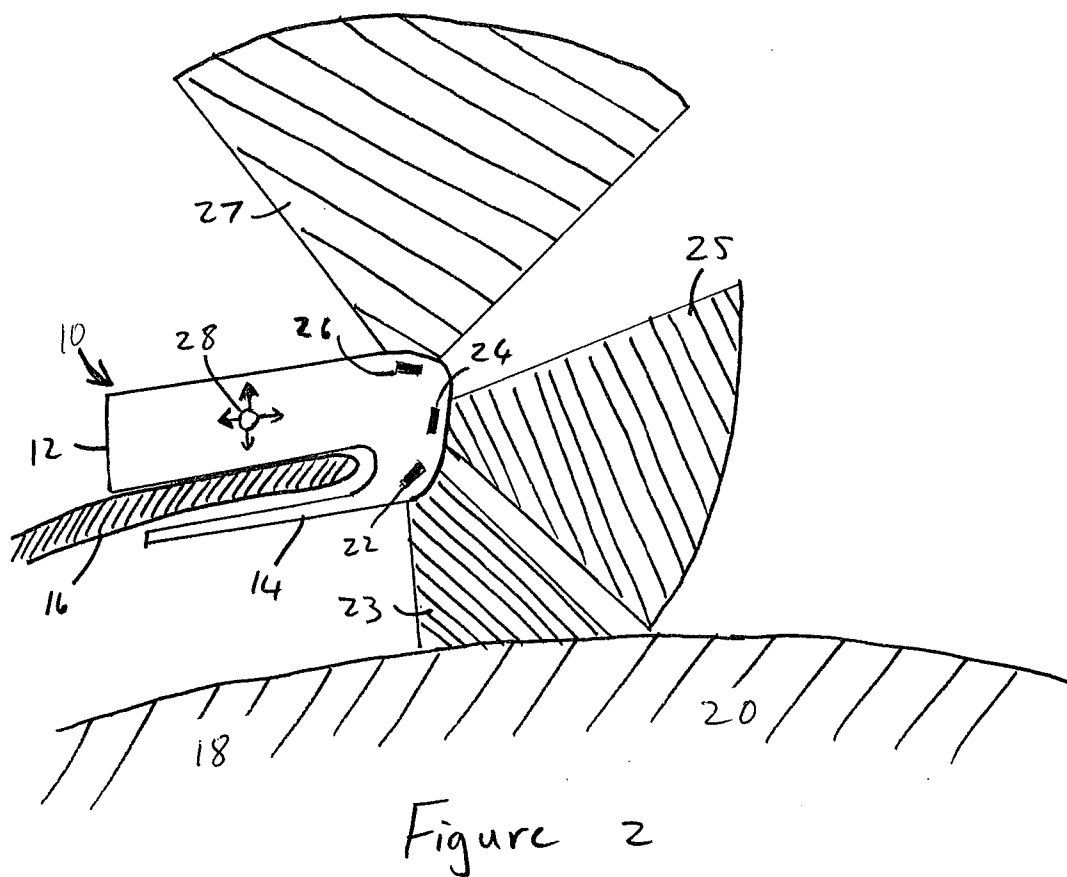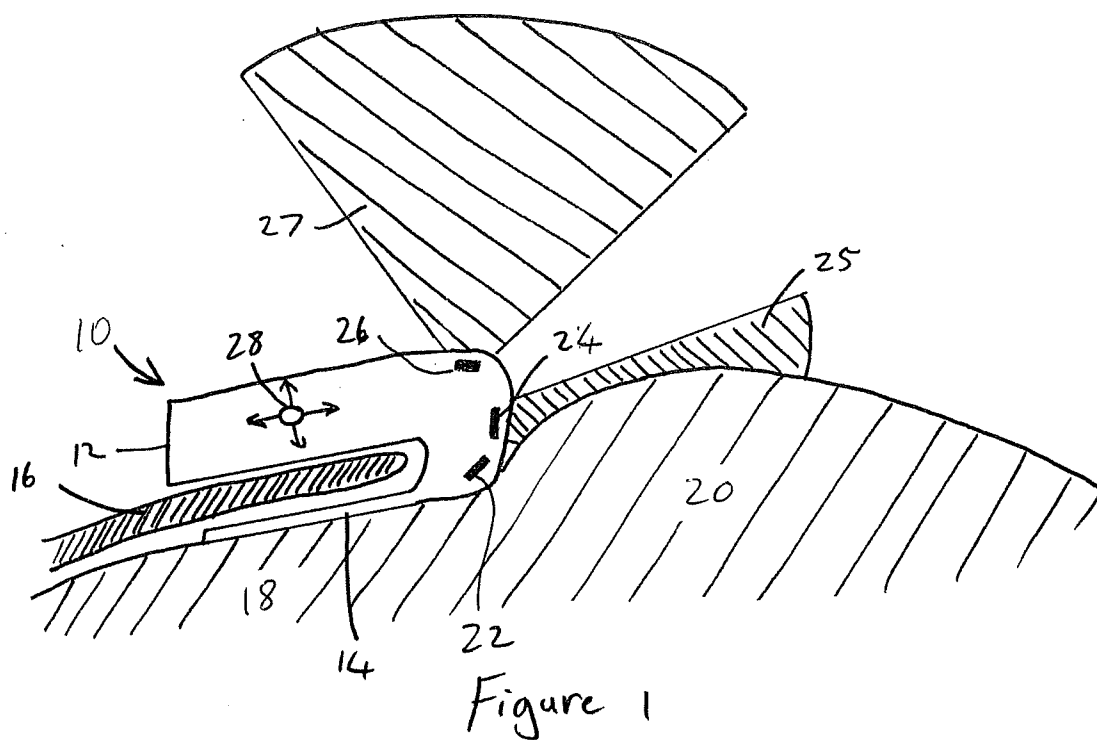

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- WO 2008096328 A [0002] [0020] [0021]
- WO 2009050702 A [0003]

|                |                                                                                                                                        |         |            |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 运动监视器                                                                                                                                  |         |            |
| 公开(公告)号        | <a href="#">EP2928369B1</a>                                                                                                            | 公开(公告)日 | 2016-09-07 |
| 申请号            | EP2013801802                                                                                                                           | 申请日     | 2013-10-15 |
| [标]申请(专利权)人(译) | GALLAGHER GREGORY JOHN                                                                                                                 |         |            |
| 申请(专利权)人(译)    | GALLAGHER , GREGORY JOHN                                                                                                               |         |            |
| 当前申请(专利权)人(译)  | GALLAGHER , GREGORY JOHN                                                                                                               |         |            |
| [标]发明人         | GALLAGHER GREGORY JOHN                                                                                                                 |         |            |
| 发明人            | GALLAGHER, GREGORY JOHN                                                                                                                |         |            |
| IPC分类号         | A61B5/113 A61B5/00 A61B5/08                                                                                                            |         |            |
| CPC分类号         | A61B5/113 A61B5/0816 A61B5/4818 A61B5/6804 A61B5/6808 A61B5/6823 A61B5/6838 A61B5/6844 A61B5/746 A61B2503/04 A61B2503/12 A61B2562/0257 |         |            |
| 优先权            | 2012021967 2012-12-06 GB                                                                                                               |         |            |
| 其他公开文献         | EP2928369A1                                                                                                                            |         |            |
| 外部链接           | <a href="#">Espacenet</a>                                                                                                              |         |            |

#### 摘要(译)

提供了一种方法和装置 ( 10 ) , 用于监测人类对象 ( 例如婴儿 ) 的身体 ( 20 ) 的规则运动。装置 ( 10 ) 包括电子电路, 用于附接到受试者身体 ( 18 ) 的警报和附接装置 ( 14 ) , 第一非接触式接近传感器 ( 22 ) 和第二接近传感器。当装置 ( 10 ) 附接到受试者的身体时, 两个接近传感器 ( 22,24 ) 监测受试者身体在两个传感器区域中的移动 - 第一传感器区域 ( 23 ) 和第二传感器区域 ( 25 ) 。设备的父亲比第一个传感器区域 ( 23 ) 。如果在任一传感器 ( 22,24 ) 中监测的距离中的图案改变预定程度, 则该警报被激活。

