



(11) **EP 1 525 560 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
12.09.2018 Bulletin 2018/37

(21) Application number: **03740994.3**

(22) Date of filing: **11.07.2003**

(51) Int Cl.:
G06T 7/60 (2017.01)

(86) International application number:
PCT/IB2003/003117

(87) International publication number:
WO 2004/010382 (29.01.2004 Gazette 2004/05)

(54) **AUTOMATED MEASUREMENT OF OBJECTS USING DEFORMABLE MODELS**

AUTOMATISIERTE MESSUNG VON OBJEKTEN UNTER VERWENDUNG VON VERFORMBAREN MODELLEN

MESURE AUTOMATISEE D'OBJETS A L'AIDE DE MODELES DEFORMABLES

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR

(30) Priority: **19.07.2002 EP 02016061**

(43) Date of publication of application:
27.04.2005 Bulletin 2005/17

(73) Proprietors:
• **Philips Intellectual Property & Standards GmbH**
20099 Hamburg (DE)
Designated Contracting States:
DE
• **Koninklijke Philips N.V.**
5656 AE Eindhoven (NL)
Designated Contracting States:
AT BE BG CH CY CZ DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR

(72) Inventors:
• **KAUS, Michael,**
c/o Philips Intellectual Property
52066 Aachen (DE)

• **WEESE, Jürgen,**
c/o Philips Intellectual Property
52066 Aachen (DE)
• **LOBREGT, Steven,**
c/o Philips Intellectual Property
52066 Aachen (DE)

(74) Representative: **de Haan, Poul Erik et al**
Philips International B.V.
Philips Intellectual Property & Standards
High Tech Campus 5
5656 AE Eindhoven (NL)

(56) References cited:
WO-A-96/41567 US-A- 5 673 298

• **PARDO J M ET AL: "Application of deformable models in orthopaedic surgery planning"**
JOURNAL OF COMPUTING AND INFORMATION TECHNOLOGY - CIT, JUNE 1998, UNIV. COMPUT. CENTRE, ZAGREB, CROATIA, vol. 6, no. 2, pages 191-201, XP008025535 ISSN: 1330-1136

EP 1 525 560 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method for determining geometrical properties of a structure of an object displayed in an image. Furthermore, the present invention relates to a method for determining a deformable model for adaptation to an object, to an image processing device and to a computer program for an image processing device for determining geometrical properties of an object.

[0002] WO 96/41567 discloses an anatomical visualisation system in which 2D scanned slices are stored along with a 3D computer model generated from those slices, the model comprising polygonal shapes or parametric surface models. A composite image is created from the geometric 3D model and a selected 2D slice. To determine the length of a blood vessel shown in the 2D slices, a user may interact with the computer to select the vessel, and compute its length from the 2D slice data.

[0003] The present invention relates in particular to the automated measurement of geometrical properties of anatomical objects using deformable models in the field of medical digital imaging. The increasing availability of 3D medical image data improves diagnostics and treatment possibilities dramatically. Due to the size and complexity of large 3D datasets, automated tools for quantitative measurements are important for fast, accurate and reproducible analysis of such image data in daily clinical routine. For example, applications include orthopaedic diagnosis and treatment (e.g. define and measure geometrical properties of bones in CT), or cardiac imaging (e.g. extract the location of specific axes required for scan-plane-planning in MR).

[0004] Manual definition and measurement of geometrical properties (e.g. the long axis of a femur shaft, the short axis of the left heart ventricle) based on image data is time consuming, subjective, and error prone, and therefore not clinically practical. A first step towards the automatic measurement is the extraction of the object surface, e.g. by adapting a deformable, parametric surface model to the object of interest. Methods of this kind are known, for example, from J. Weese et al. "Shape constrained deformable models for 3D medical image segmentation" 17th International Conference on Information Processing in Medical Imaging (IPMI), pages 380-387, Davis, CA, USA, 2001, Springer Verlag, and T. McInerney et al. "Deformable models in medical image analysis: A survey" in Medical Image Analysis, 1(2):91-108, 1996. After initial placement of the deformable model by an operator with, for example, a mouse, the model is iteratively deformed until it matches the surface of the object to be measured. However, often the measurement of geometrical properties cannot readily be derived from the complete object surface. For example, the axis of a femur shaft or an angle between two vertebral endplates are geometrical properties defined by parts of the object, which are difficult to specify by a human operator in an accurate and reproducible fashion.

Such methods are very well adapted to extract the surface of the object, providing all necessary information concerning the surface of the object. However, there are a great number of measurements of geometrical properties which cannot be derived from the object surface. For example, a center of a femur head or an axis of a femur shaft of the femur are geometrical properties which cannot be directly derived from the complete object surface.

[0005] It is an object of the present invention to provide a method for determining geometrical properties of a structure of an object displayed in an image, allowing automated measurements of geometrical properties of objects.

[0006] The invention is defined by the claims.

[0007] In accordance with the present invention, this object is solved with a method for determining geometrical properties of a structure of an object displayed in an image comprising the steps of adapting a deformable surface model to the object, applying additional geometrical information to the adapted deformable surface model of the object, and extracting the geometrical properties of the structure of the object from the adapted deformable surface model to which additional geometrical information has been applied.

[0008] According to the present invention, due to the integration of additional geometrical information into the deformable surface model, geometrical properties of the objects can advantageously automatically be measured. Furthermore, the present invention allows to derive geometrical properties from a surface of an object which have a definition based on sub-parts of the object. For example, the present invention allows to automatically extract a center of the femur head, whereas, only the surface of the whole femur is displayed. Due to the integration of additional geometrical information, diagnosis and treatment of a patient can be carried out more precisely.

[0009] Surface elements belonging to a particular sub-part of the object are identified. Due to the identification of surface elements of sub-parts of the object, particular sub-parts of the object may be recognized automatically. For example, by identifying surface elements in the model belonging to the femur head, a femur head in an unseen image can be automatically identified and the boundaries of the femur head can be identified.

[0010] Geometrical properties of the object are derived on the basis of the geometrical primitive. Advantageously, this allows a very simple procedure to identify geometrical properties of the object which are not based on the surface of the object. For example, the center of the femur head is identified from coordinates and parameters of the sphere fit to the femur head. Advantageously, a computation time is minimized.

[0011] A deformable model is provided for adaptation to an object, enabling the automated measurement of geometric properties of objects when applied to an object. The deformable model enables a highly accurate adaptation of the model to the object.

[0012] Advantageously, according to another exemplary embodiment of the present invention, surface elements belonging to sub-parts of the object are selected and labelled. This allows a simple and efficient reconnaissance of sub-parts of the object and an identification of surface elements belonging to these sub-parts requiring a minimized number of calculations when the model is applied to a new object in an image.

[0013] A simple method is provided allowing an efficient determination of a transformation rule for fitting the geometric primitive into the surface model.

[0014] As apparent from the above explanations and the following description, it is the gist of the present invention to integrate additional geometrical information into a deformable model, which model is then applied to an object displayed in an image, wherein, for determining geometrical properties of the structure of the object, the additional geometrical information is used. The geometrical properties may be included into the model by identifying and labelling sub-parts (e.g. surface elements of a mesh such as triangles) of the surface model and fitting geometric primitives (e.g. a sphere to the femur head) to these sub-parts in order to represent the geometrical properties. Since the number of surface elements (here the number of triangle) of a sub-part remains constant during adaptation of the surface model to the object, and the triangles reach the same anatomical location for individual objects, the adaptation of a label deformable model to an unseen image advantageously allows to identify the sub-parts on the unseen object surface based on a one-to-one point correspondence between original and adapted mesh.

[0015] These and other aspects of the invention will be apparent from and elucidated with the reference to the exemplary embodiments described hereinafter. The following exemplary embodiments of the present invention will be described with reference to the Figures.

Fig. 1 shows a schematic representation of an exemplary embodiment of an image processing device suitable for executing an exemplary embodiment of the method according to the present invention.

Fig. 2 shows a flow chart of an exemplary embodiment of a method for determining an extended deformable surface model according to the present invention.

Fig. 3 shows a flow chart of an exemplary embodiment of the method according to the present invention.

Fig. 4 shows an image of a vertebra model determined with a method according to an exemplary embodiment of the present invention applied to a vertebra.

Fig. 5 shows an exemplary embodiment of an adaptation of a surface model according to an exemplary embodiment of the present invention to an image of a vertebra and the fitting of a plane to the top endplate of the vertebra in accordance with an exemplary em-

bodiment of the present invention.

Fig. 6 shows an exemplary image of a femur head, wherein the surface elements belonging to a sub-part of the femur have been labelled, in accordance with an exemplary embodiment of the present invention.

Fig. 7 shows an image of a femur wherein primitives were fit to sub-parts of the femur, in accordance with an exemplary embodiment of the present invention.

Fig. 8 shows an image wherein geometric properties of the femur are derived from the geometric primitive, in accordance with an exemplary embodiment of the present invention.

[0016] Figure 1 depicts an exemplary embodiment of an image processing device according to the present invention, for executing an exemplary embodiment of a method in accordance with the present invention. The image processing device depicted in Fig. 1 comprises a central processing unit (CPU) or image processor 1 connected to a memory 2 for storing a deformable model and an image depicting an object. The image processor 1 may be connected by a link 3 to a plurality of input/output-, network- or diagnosis-devices such as an MR device or a CT device. The image processor is furthermore connected to a display device 4 (for, e.g. a computer monitor) for displaying information or images computed or adapted in the image processor 1. An operator may interact with the image processor 1 via a keyboard 5 and/or other output devices which are not depicted in Fig. 1.

[0017] Figure 2 shows a flow chart of an exemplary embodiment of a method for determining an extended deformable model for adaptation to an object in accordance with the present invention. After an initialisation in step 50, in step 51, a surface model of the object wherein the surface model describes a surface of the object is generated. According to the present exemplary embodiment, the surface is represented by a polygonal mesh, where vertices x_i are connected with edges. Here, a triangular mesh is used, but other representations such as simplex or general polygonal meshes are possible. The surface representation can be derived by a common triangulation method of a simple training object, for example as suggested by W.E. Lorensen et al. "Marching cubes: A high resolution 3d surface construction algorithm" *Computer Graphics*, 21(3): 163-169, 1987. Instead of a single surface triangulation, it is also possible to use a statistical shape model, such as suggested by T.F. Cootes "Active shape model- 'smart snakes', in *British Mach. and Vision Conf.*, pp. 266-275, 1992.

[0018] After generating the surface representation, i.e. the deformable surface model, additional geometric properties are integrated into the deformable surface model in step 52.

[0019] Step 52 comprises a step 53 wherein surface elements belonging to sub-parts of the object are identified. If the example of a femur is used, sub-parts of the

femur are for example a femur head, a femur shaft etc. The sub-parts, i.e. the subdivision of the object into sub-parts, depends on which measurements are of interest. If, for example, a center of the femur head is of interest, preferably the femur is subdivided into a femur head and a femur shaft. Then, in a following step 54, surface elements of the surface model, i.e. the triangles of the mesh, are labelled in accordance with the respective sub-part of the object to which they belong. As label, for example, integer numbers can be attached to the respective triangles. The triangles are labelled such that all triangles belonging to the same sub-part have the same label. This can for example be carried out by a physician with an interactive display and a pointing and selection device or with a corresponding selection method. However, it is also possible to use a pattern recognition algorithm for identifying and labelling sub-parts of the object for the geometric property to be measured.

[0020] Then, in step 55, a suitable geometric primitive is selected in accordance with the measurement to be carried out and a form of the respective sub-part. For example, when the center of the femur head is to be determined, a sphere is selected. Also, when the axis of the femur shaft is to be detected, a straight line is selected as geometrical primitive. This can be done by a physician or a suitable pattern recognition method.

[0021] Then, in step 56, the geometric primitive is fit into the surface model, i.e. the geometric primitive is fit to the surface elements of the respective sub-part of the object. The primitive can be fitted to the triangles of the mesh labelled as belonging to a particular sub-part, by for example minimizing orthogonal distances between the triangle coordinates and the primitive surface in the least-square sense. Examples for such fitting methods are described in D. Eberly, "Least squares fitting of points", Technical report, Chapel Hill, NC, USA, 2001 and H. Hoppe et al., "Surface reconstruction from unorganized points" Computer Graphics (SIGGRAPH '92 Proceedings), 26(2):71-78, 1992.

[0022] Then, in a step 57, a rule is determined for mapping the geometric primitives onto the sub-parts. In the present exemplary embodiment, the rule consists of the particular primitive for the particular sub-part and of the method for fitting the primitive to the sub-part.

[0023] Then, after the execution of step 52, which comprises steps 53-57, the method continues to step 58, where it ends with a finished extended deformable surface model. In distinction to known deformable surface models, this extended deformable surface model comprises additional geometrical information relating to, for example, which triangles of the surface mesh belong to a particular sub-part of the object of interest, which primitive fits to the form of this particular sub-part and which method is to be used for fitting this primitive to the particular sub part.

[0024] In the following, with reference to the flow chart of Fig. 3, an exemplary embodiment of the method for determining geometrical properties of a structure of an

object displayed in an image, in accordance with the present invention is described. After initialisation in step 100, in a step 101, an extended deformable model in accordance with the structure of the object in the image I containing the structure of interest is loaded. The extended deformable model M is described as $M(x_i, S_i, R)$ and may have been determined in accordance with the flow chart described with reference to Figure 2.

[0025] In the following steps 102 and 103, an adaptation procedure is carried out that results in varying the positions of the deformable surface model, so that it optimally fits the surface of the object of interest in the image. Procedures for adapting the deformable surface model to the surface of the object are known for example from J. Weese et al. "Shape constrained deformable models for 3D medical image segmentation" 17th International Conference on Information Processing in Medical Imaging (IPMI), pages 380-387, Davis, CA, USA, 2001, Springer Verlag or from T. McInerney et al. "Deformable models in medical image analysis: A survey" in Medical Image Analysis, 1(2):91-108, 1996.

[0026] The method of Weese et al. can be summarized as follows: In step 102, for each of the triangles, a search along the triangle normal is carried out to find a point x_i that potentially lies on the boundary of the object in the image. From these surface points, an energy function is formulated. A minimization of the energy is carried out in step 103. The results are found vertex coordinates which reflect a tradeoff between being close to the boundary points and staying similar to the initial deformable model. From these new triangle coordinates, new boundary points are searched for in step 102, and so forth. Steps 102 and 103 are iterated a fixed number of times, leading to a deformed model close to the surface of the object of interest.

[0027] In the following steps 104 and 105, the actual measurement of the geometric properties of the object is carried out.

[0028] In step 104, a subset of vertices or triangles x_i is extracted that defines the geometrical measurement to be carried out. This will be described with reference to the exemplary images shown in Figs. 4 and 5. Fig. 4 shows a vertebra to which the extended deformable surface model has been applied and Fig. 5 is an image showing the surface mesh of the extended deformable surface model and the primitive, here a plane, fit to the top endplate of the vertebra. In the example shown in Figs. 4 and 5, a position or orientation of the plane of the vertebra end plate is to be measured. Therefore, triangles that belong to top of the vertebra endplate are extracted, i.e. identified.

[0029] During adaptation of the deformable model to the object in steps 102 and 103, all triangles reach the same geometric location on the object, as on the training object. This means, a triangle that was located on the top endplate of the model before adaptation, will always be on the top endplate after adaptation to the new object. Also, the number of triangles that belong to the particular

sub-part, here to the top endplate, remains constant during adaptation. These two facts together are called "one-to-one point correspondence" between original and adaptation.

[0030] Due to the one-to-one point correspondence, when applying the extended deformable surface model determined in accordance with the method described with reference to Fig. 2, the triangles belonging to a particular sub-part of the objects can be easily recognized. By this, an automatic reconnaissance of sub-parts of the object, such as the top endplate of a vertebra, is possible. In detail, in step 104, information relating to which triangles are part of the surface of which sub-part is applied as additional geometrical information to the surface model which has been adapted to the surface of the object in the image. This additional geometrical information is applied to the adapted deformable surface model by using the labels of the triangles which are part of the extended deformable surface model. As shown with the darker surface of the top endplate in Fig. 4, all triangles of the surface mesh adapted to the surface of the object which belong to the top endplate of the vertebra were identified. Then coordinates of these labelled triangles are determined.

[0031] This step 104 advantageously allows to automatically identify particular sub-parts of an object in a new image. This ability significantly facilitates the work of a physician. For example, in complex structures such as the brain, particular parts thereof can be recognized more easily and more accurately. This ability is also useful for the planning and rapid prototyping of prostheses, e.g. of femur prostheses.

[0032] Having extracted coordinates of the triangles of a particular sub-part, the method continues with step 105, where parameters representing geometric properties are estimated. In the examples of Figures 4 and 5, the parameters representing the geometric properties are a point p_{11} and the normal p_{12} of the plane fit to the top endplate of the vertebra. To do this, additional geometrical information, here the rule relating to a particular geometric primitive and a method for fitting the geometric primitives to the coordinates of the labelled triangles is applied to the deformable surface model which was adapted to the surface of the object in the image.

[0033] The rule for estimating these parameters, given the coordinates of the triangles is given by the extended deformable model loaded in step 101. As already indicated above, the rule consists of a particular geometric primitive (here a plane) and a method for fitting the geometric primitives to the coordinates of the labelled triangles.

[0034] Then, in step 105, the respective geometric primitive, here the plane, is fit to the coordinates of the labelled triangles belonging to the top end plate of the by, for example, minimizing the orthogonal distances between the triangle coordinates and the surface of the geometrical primitive in the least-square sense.

[0035] After the orthogonal distances are minimized,

coordinates of a point p_{11} and the normal p_{12} of the plane are known, which may be output at 106 as the geometric properties.

[0036] In brief, according to the method described with reference to Fig. 3, a deformable surface model as known in the art is adapted to the surface of the object of interest in the image. This means that positions of triangles of a surface mesh are altered until the triangles "lie" on the surface of the object. Then, additional geometrical information is applied to the adapted surface mesh: The triangles belonging to a particular sub-part of the object are identified, e.g. labelled with a respective integer number, and the geometrical primitive is fit to the labelled triangles. The geometrical primitive and the method for fitting the geometrical primitive to the labelled triangles are part of the extended deformable surface model loaded in step 101. On the basis of the coordinates of the fitted primitive and the properties of the primitive, the desired geometrical properties are determined.

[0037] Figures 6, 7 and 8 show another example for automated geometric measurements in accordance with an exemplary embodiment of the present invention. In Fig. 6, an extended deformable model determined in accordance with the present invention was applied to an image of a femur. In the extended deformable model, the femur head was labelled, the femur neck was labelled and the beginning of the shaft was labelled. Thus, due to the one-to-one point correspondence between original and adapted mesh, the femur head is identified and all surface elements of the mesh belonging to the femur head are labelled with the same label and recognized automatically. Also, the femur neck and the femur shaft were automatically identified and all surface elements belonging to the femur neck and the femur shaft were labelled accordingly.

[0038] In Fig. 7, in accordance with the rule formulated in the deformable model, suitable primitives were fit to the respective surface elements labelled in accordance with the respective sub-part. Here, a sphere was fit to the surface elements of the femur head, a straight line was fit to the respective surface elements of the femur neck and another neck and another straight line was fit to the surface elements belonging to the femur shaft.

[0039] Then, here indicated with Fig. 8, automatically, a center of the femur head, a direction location of the axis of the femur neck and a location and orientation of the femur shaft can be derived directly from the two straight lines and the sphere by just using the parameter of these primitives.

[0040] Accordingly, the present invention enables the extraction of geometric properties of an object which are not directly defined by the surface of the object.

[0041] Exemplary embodiments of the above methods and device may advantageously be used for orthopaedic diagnosis and treatment (for example, to define and measure geometric properties of bones etc.) or cardiac imaging (for example, exacting the location of specific axes required for scan-plane-planning in MR).

Claims

1. Method for determining geometric properties of a structure of an object displayed in a 3D image, comprising a computer performing the steps of:
- (a) loading (101) a predetermined extended deformable 3D surface model of a training object corresponding to the displayed object, wherein the deformable surface model describes a surface of the object and comprises integrated additional geometrical information identifying surface elements of the deformable 3D surface model which belong to a sub-part of the object, identifying a geometric primitive in accordance with the form of the sub-part, and identifying a transformation rule which maps the geometric primitive onto the surface elements of the deformable surface model;
- (b) adapting (102, 103) the loaded extended deformable 3D surface model to the surface of the displayed object;
- (c) adapting (104, 105) the additional geometric information of the extended deformable 3D surface model to the object, by using the rule to map the geometric primitive onto a sub-part of the displayed object; and then
- (d) extracting (106) the geometric properties of the structure of the displayed object from the adapted extended deformable 3D surface model to which additional geometrical information has been applied.
2. Method according to claim 1, wherein the geometric properties of the object are extracted on the basis of the geometric primitive.
3. Method according to claim 1 or 2, wherein the extended deformable 3D surface model comprises labels identifying the surface elements of the particular sub-part of the object.
4. Method according to claim 3, wherein surface elements which belong to the same sub-part have the same label.
5. An extended deformable 3D surface model for use in the method of any one of the preceding claims for adaptation to an object, wherein the extended deformable 3D surface model describes a surface of a training 3D object and comprises integrated additional geometrical information identifying surface elements of the deformable 3D surface model which belong to a sub-part of the object, identifying a geometric primitive in accordance with the form of the sub-part, and identifying a transformation rule which maps the geometric primitive onto the surface elements of the deformable surface model.

6. A model according to claim 5, wherein the surface elements of the extended deformable 3D surface model which belong to the same sub-part have the same label.

7. Image processing device, comprising:

a memory for storing an extended deformable 3D surface model and a 3D image depicting an object; and
an image processor configured to determine geometrical properties of the object by performing the method of any one of claims 1 to 4.

8. Computer program which, when loaded into the image processor of the image processing device of claim 7, causes it to perform the method of any one of claims 1 to 4.

Patentansprüche

1. Verfahren zum Bestimmen der geometrischen Eigenschaften einer Struktur eines Objekts, das in einem 3D-Bild angezeigt wird, umfassend das Ausführen durch einen Computer der folgenden Schritte:
- a) Laden (101) eines vorbestimmten erweiterten verformbaren 3D-Oberflächenmodells eines Lernobjekts, das dem angezeigten Objekt entspricht, wobei das verformbare Oberflächenmodell eine Oberfläche des Objekts beschreibt und integrierte zusätzliche geometrische Informationen umfasst, die Oberflächenelemente des verformbaren 3D-Oberflächenmodells identifizieren, die zu einem Unterabschnitt des Objekts gehören, die einen geometrischen Grundkörper gemäß der Form des Unterabschnitts identifizieren, und die eine Transformationsregel identifizieren, die den geometrischen Grundkörper auf die Oberflächenelemente des verformbaren Oberflächenmodells abbildet;
- b) Anpassen (102, 103) des geladenen erweiterten verformbaren 3D-Oberflächenmodells auf die Oberfläche des angezeigten Objekts;
- c) Anpassen (104, 105) der zusätzlichen geometrischen Informationen des erweiterten verformbaren 3D-Oberflächenmodells an das Objekt unter Verwendung der Regel, um den geometrischen Grundkörper auf einen Unterabschnitt des angezeigten Objekts abzubilden; und dann
- d) Extrahieren (106) der geometrischen Eigenschaften der Struktur des angezeigten Objekts aus dem angepassten erweiterten verformbaren 3D-Oberflächenmodell, auf das zusätzliche geometrische Informationen angewendet wurden.

2. Verfahren nach Anspruch 1, wobei die geometrischen Eigenschaften des Objekts auf der Grundlage des geometrischen Grundkörpers extrahiert werden.
3. Verfahren nach Anspruch 1 oder 2, wobei das erweiterte verformbare 3D-Oberflächenmodell Etiketten umfasst, welche die Oberflächenelemente des bestimmten Unterabschnitts des Objekts identifizieren.
4. Verfahren nach Anspruch 3, wobei Oberflächenelemente, die zu dem gleichen Unterabschnitt gehören, das gleiche Etikett aufweisen.
5. Erweitertes verformbares 3D-Oberflächenmodell zur Verwendung bei dem Verfahren nach einem der vorhergehenden Ansprüche zur Anpassung an ein Objekt, wobei das erweiterte verformbare 3D-Oberflächenmodell eine Oberfläche eines 3D-Lernobjekts beschreibt und integrierte zusätzliche geometrische Informationen umfasst, die Oberflächenelemente des verformbaren 3D-Oberflächenmodells identifizieren, die zu einem Unterabschnitt des Objekts gehören, die einen geometrischen Grundkörper gemäß der Form des Unterabschnitts identifizieren, und die eine Transformationsregel identifizieren, die den geometrischen Grundkörper auf die Oberflächenelemente des verformbaren Oberflächenmodells abbildet.
6. Modell nach Anspruch 5, wobei die Oberflächenelemente des erweiterten verformbaren 3D-Oberflächenmodells, die zu dem gleichen Unterabschnitt gehören, das gleiche Etikett aufweisen.
7. Bildverarbeitungsvorrichtung, umfassend:
- einen Speicher zum Speichern eines erweiterten verformbaren 3D-Oberflächenmodells und eines 3D-Bildes, das ein Objekt darstellt; und einen Bildprozessor, der konfiguriert ist, um die geometrischen Eigenschaften des Objekts zu bestimmen, indem er das Verfahren nach einem der Ansprüche 1 bis 4 ausführt.
8. Computerprogramm, das bewirkt, wenn es auf den Bildprozessor der Bildverarbeitungsvorrichtung von Anspruch 7 geladen wird, dass dieser das Verfahren nach einem der Ansprüche 1 bis 4 ausführt.
- (a) chargement (101) d'un modèle de surface en 3D déformable étendu prédéterminé d'un objet d'apprentissage correspondant à l'objet affiché, dans lequel le modèle de surface déformable décrit une surface de l'objet et comprend des informations géométriques supplémentaires intégrées identifiant des éléments de surface du modèle de surface en 3D déformable qui appartiennent à une sous-partie de l'objet, identifiant une primitive géométrique selon la forme de la sous-partie, et identifiant une règle de transformation qui cartographie la primitive géométrique sur les éléments de surface du modèle de surface déformable ;
- (b) adaptation (102, 103) du modèle de surface en 3D déformable étendu chargé à la surface de l'objet affiché ;
- (c) adaptation (104, 105) des informations géométriques supplémentaires du modèle de surface en 3D déformable étendu à l'objet, en utilisant la règle pour cartographier la primitive géométrique sur une sous-partie de l'objet affiché ; puis
- (d) extraction (106) des propriétés géométriques de la structure de l'objet affiché du modèle de surface en 3D déformable étendu adapté auquel des informations géométriques supplémentaires ont été appliquées.
2. Procédé selon la revendication 1, dans lequel les propriétés géométriques de l'objet sont extraites sur la base de la primitive géométrique.
3. Procédé selon la revendication 1 ou 2, dans lequel le modèle de surface en 3D déformable étendu comprend des étiquettes identifiant les éléments de surface de la sous-partie particulière de l'objet.
4. Procédé selon la revendication 3, dans lequel des éléments de surface qui appartiennent à la même sous-partie ont la même étiquette.
5. Modèle de surface en 3D déformable étendu destiné à être utilisé dans le procédé de l'une quelconque des revendications précédentes pour une adaptation à un objet, dans lequel le modèle de surface en 3D déformable étendu décrit une surface d'un objet en 3D d'apprentissage et comprend des informations géométriques supplémentaires intégrées identifiant des éléments de surface du modèle de surface en 3D déformable qui appartiennent à une sous-partie de l'objet, identifiant une primitive géométrique selon la forme de la sous-partie, et identifiant une règle de transformation qui cartographie la primitive géométrique sur les éléments de surface du modèle de surface déformable.
6. Modèle selon la revendication 5, dans lequel les éléments

Revendications

1. Procédé de détermination de propriétés géométriques d'une structure d'un objet affiché dans une image en 3D, comprenant la réalisation par un ordinateur des étapes de :

ments de surface du modèle de surface en 3D déformable étendu qui appartiennent à la même sous-partie ont la même étiquette.

7. Dispositif de traitement d'image, comprenant : 5
- une mémoire pour stocker un modèle de surface en 3D déformable étendu et une image en 3D représentant un objet ; et
 - un processeur d'image configuré pour déterminer des propriétés géométriques de l'objet en réalisant le procédé de l'une quelconque des revendications 1 à 4. 10
8. Programme d'ordinateur qui, lorsqu'il est chargé dans le processeur d'image du dispositif de traitement d'image de la revendication 7, l'amène à réaliser le procédé de l'une quelconque des revendications 1 à 4. 15

20

25

30

35

40

45

50

55

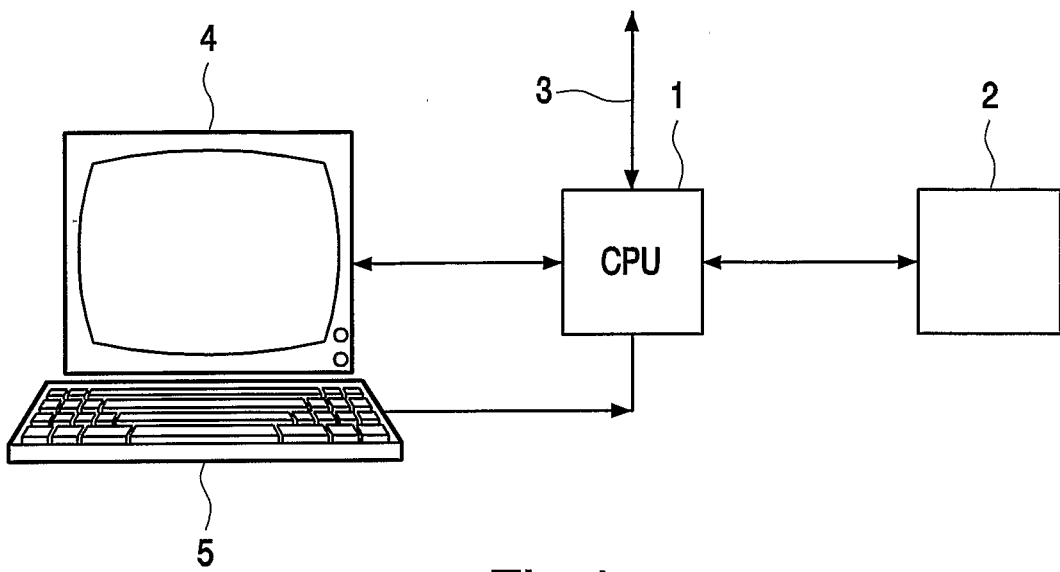


Fig.1

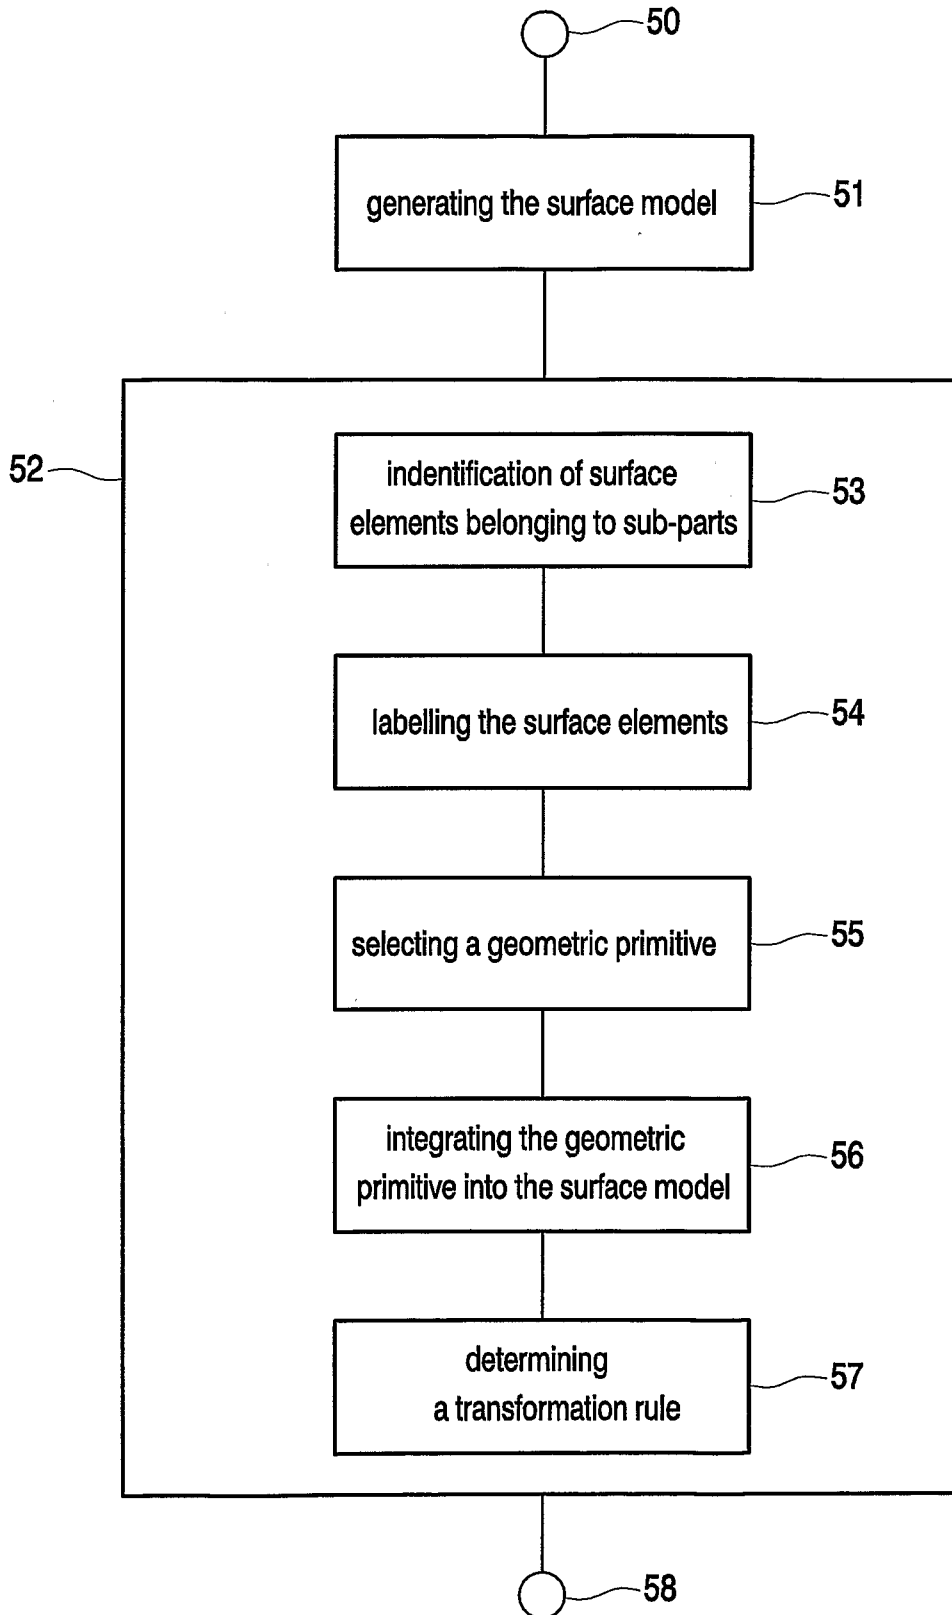


Fig.2

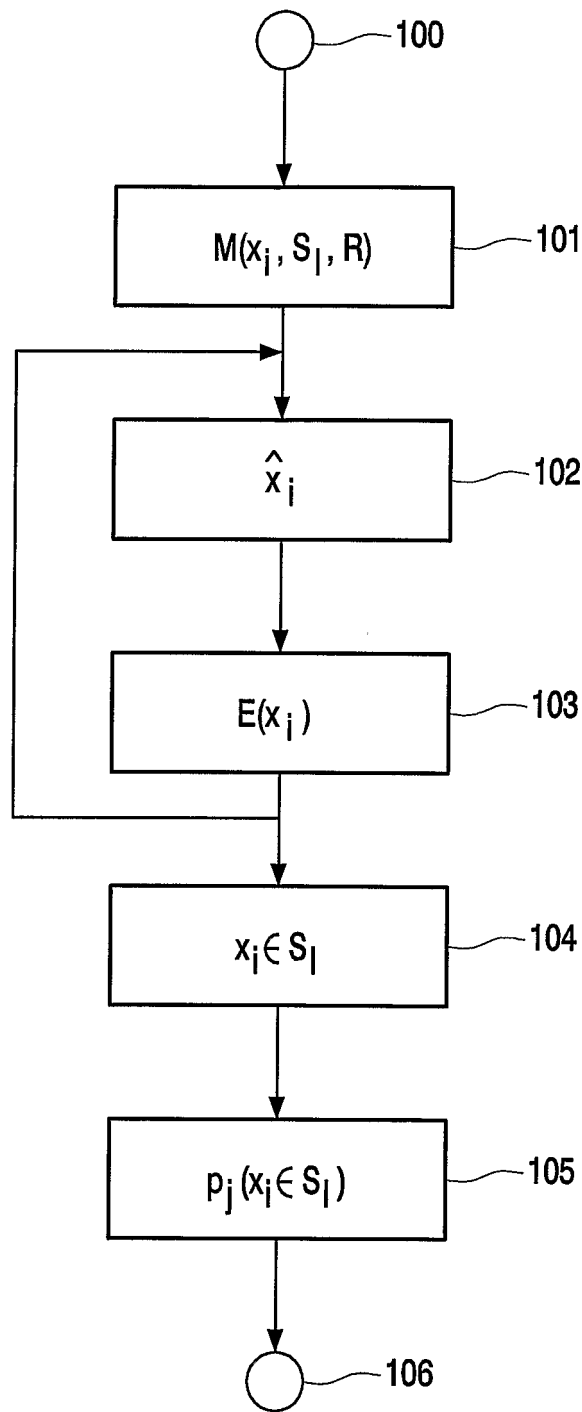


Fig.3

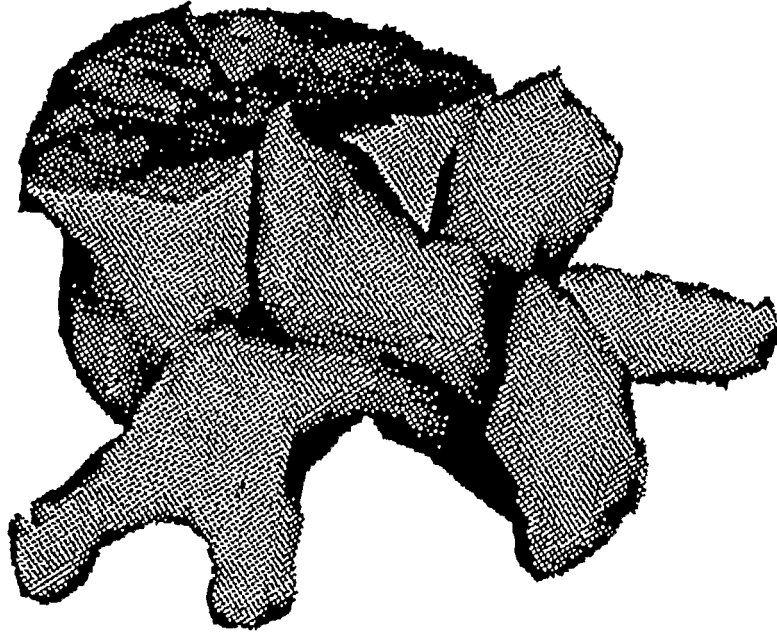


FIG.4

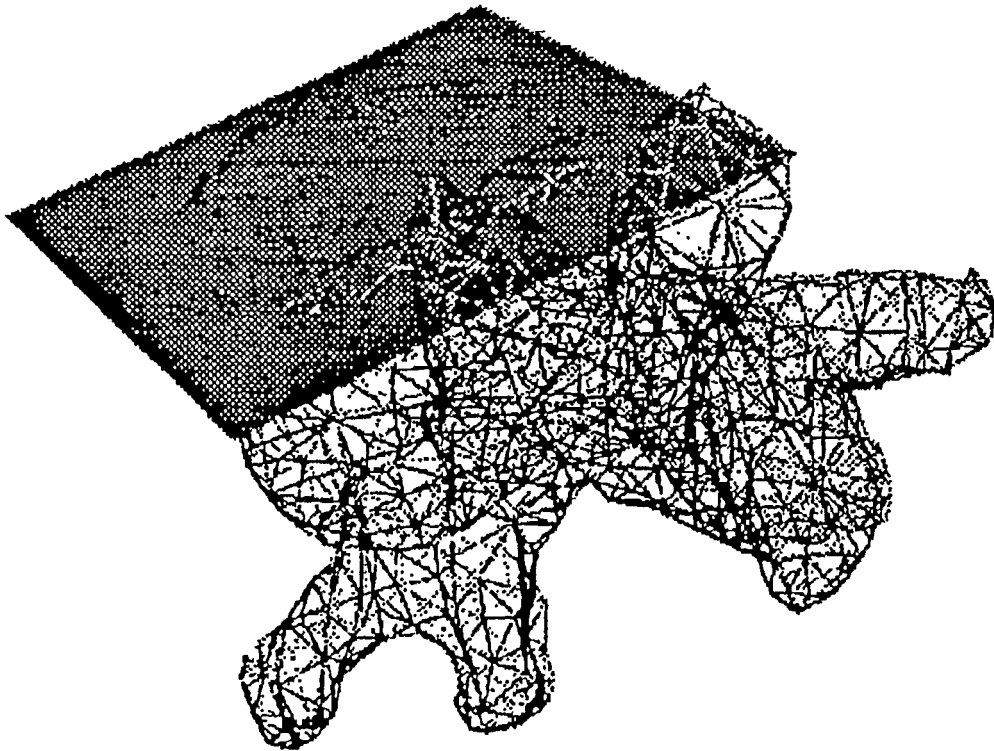


FIG.5

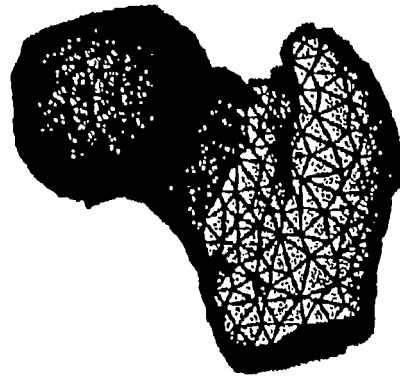


FIG. 6

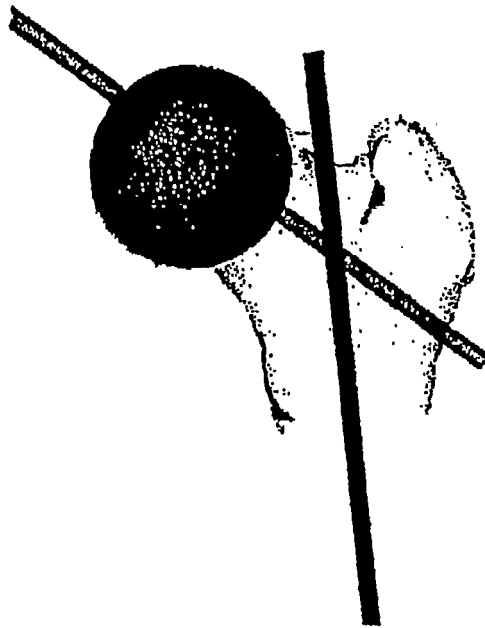


FIG. 7

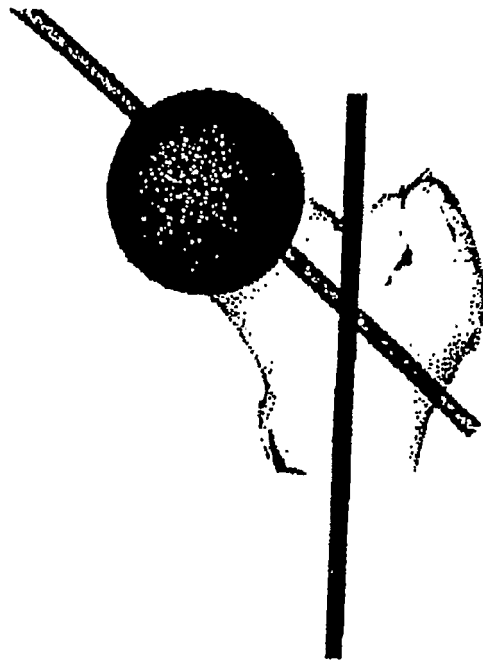


FIG.8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9641567 A [0002]

Non-patent literature cited in the description

- Shape constrained deformable models for 3D medical image segmentation. **J. WEESE et al.** 17th International Conference on Information Processing in Medical Imaging (IPMI). Springer Verlag, 2001, 380-387 [0004] [0025]
- **T. MCINERNEY et al.** Deformable models in medical image analysis: A survey. *Medical Image Analysis*, 1996, vol. 1 (2), 91-108 [0004] [0025]
- **W.E. LORENSEN et al.** Marching cubes: A high resolution 3d surface construction algorithm. *Computer Graphics*, 1987, vol. 21 (3), 163-169 [0017]
- **T.F. COOTES.** Active shape model- 'smart snakes'. *British Mach. and Vision Conf.*, 1992, 266-275 [0017]
- **D. EBERLY.** Least squares fitting of points. *Technical report*, 2001 [0021]
- **H. HOPPE et al.** Surface reconstruction from unorganized points. *Computer Graphics (SIGGRAPH '92 Proceedings)*, 1992, vol. 26 (2), 71-78 [0021]

专利名称(译)	使用可变形模型自动测量对象		
公开(公告)号	EP1525560B1	公开(公告)日	2018-09-12
申请号	EP2003740994	申请日	2003-07-11
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	飞利浦知识产权及标准部GMBH 皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	皇家飞利浦N.V. 飞利浦知识产权及标准部GMBH		
[标]发明人	KAUS MICHAEL C O PHILIPS INTPROP LOBREGT STEVEN C O PHILIPS INTPROP		
发明人	KAUS, MICHAEL, C/O PHILIPS INTELLECTUAL PROPERTY WEESE, JÜRGEN, C/O PHILIPS INTELLECTUAL PROPERTY LOBREGT, STEVEN, C/O PHILIPS INTELLECTUAL PROPERTY		
IPC分类号	G06T7/60 A61B5/00 A61B5/055 G06T1/00		
CPC分类号	G06T7/60 Y10S128/922		
代理机构(译)	德哈恩波尔ERIK		
优先权	2002016061 2002-07-19 EP		
其他公开文献	EP1525560A1		
外部链接	Espacenet		

摘要(译)

本发明涉及数字成像领域，尤其涉及估计解剖对象的几何特性的领域。根据本发明，自动测量几何特性，并导出具有基于对象的子部分的定义的几何特性。为此，将额外的几何信息集成到表面模型中。通过识别和标记表面模型的子部分并将几何图元拟合到这些子部分，将几何特性包括在表面模型中。这有利地允许在看不见的物体表面上识别这些子部件并自动提取相关的几何特性。

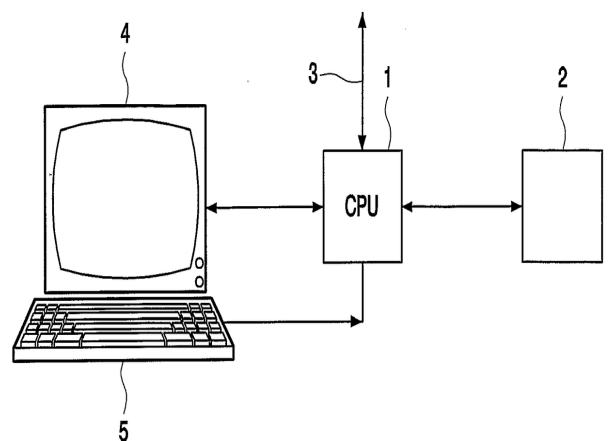


Fig.1