



(11) **EP 1 672 356 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
25.04.2012 Bulletin 2012/17

(51) Int Cl.:
G01N 21/86 (2006.01) **G01N 33/487** (2006.01)
G01N 21/77 (2006.01) **A61B 5/00** (2006.01)

(21) Application number: **05257800.2**

(22) Date of filing: **19.12.2005**

(54) **Sensor having integrated light detector and light source**

Sensor mit integriertem Lichtdetektor und integrierter Lichtquelle

Capteur ayant un détecteur de lumière intégré et une source lumineuse

(84) Designated Contracting States:
CH DE FR GB LI

(30) Priority: **17.12.2004 US 13373**

(43) Date of publication of application:
21.06.2006 Bulletin 2006/25

(73) Proprietor: **Alverix, Inc.**
San Jose, CA 95131 (US)

(72) Inventor: **Helbing, Rene**
CA 94303 (US)

(74) Representative: **Tollett, Ian et al**
Williams Powell
Staple Court
11 Staple Inn Buildings
London, WC1V 7QH (GB)

(56) References cited:
WO-A-2004/048881 US-A1- 2002 092 973
US-A1- 2004 065 806 US-A1- 2004 086 871
US-B1- 6 331 438

- **SAVVATE'EV V ET AL: "Integrated organic light-emitting device/fluorescence-based chemical sensors" APPLIED PHYSICS LETTERS, AIP, AMERICAN INSTITUTE OF PHYSICS, MELVILLE, NY, US, vol. 81, no. 24, 9 December 2002 (2002-12-09), pages 4652-4654, XP012032780 ISSN: 0003-6951**
- **PATENT ABSTRACTS OF JAPAN vol. 018, no. 255 (E-1548), 16 May 1994 (1994-05-16) & JP 06 037300 A (NIPPON TELEGR & TELEPH CORP <NTT>), 10 February 1994 (1994-02-10)**

EP 1 672 356 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The Present invention relates to an apparatus for sensing data.

There are many different types of sensors, such as biosensors and chemical sensors, that are commonly used to detect a variety of conditions and body functions. For example, biosensors and chemical sensors are commonly used for home pregnancy testing, blood sugar testing and drug testing. Some of these sensors use integrated optical detection to improve readability and accuracy.

[0002] For example, FIG. 1 is a diagram illustrating a conventional lateral flow biosensor, which is a specific type of biosensor. Referring now to FIG. 1, an analyte (i.e., a sample being tested) 10 is placed on a chemical layer 12. Chemical layer 12 is typically referred to as a "test strip" when used in a lateral flow biosensor. Analyte 10 laterally flows across chemical layer 12 to a detection zone 16 via capillary action, typically resulting, for example, in some chemical or physical modification of analyte 10, or resulting in modification of chemicals or materials in or on chemical layer 12. An optical signal 14 is produced in response to the modification. The presence, absence or the concentration of analyte 10 in zone 16 of chemical layer 12 can be determined from signal 14.

[0003] With many types of lateral flow biosensors, the modification of analyte 10 or chemicals or materials in or on chemical layer 12 causes an absorption change in zone 16, either in intensity or wavelength. Therefore, signal 14 is simply a color change that is visually identified by a person.

[0004] However, color based tests are difficult to quantify visually by a person because the degree of absorption change is difficult to judge. Therefore, if a test requires a quantitative measurement (such as, for example, in a blood sugar test), an optical detector is often provided to read signal 14.

[0005] For example, in FIG. 1, light detector 18 is provided to read signal 14. Light detector 18 detects signal 14, to thereby detect the presence, absence or concentration of analyte 10. Signal 14 is an optical signal, so that light detector 18 is conventionally a photodiode which produces an electrical output corresponding to the intensity of the detected signal 14. Light detector 18 is connected to an external display device (not illustrated) to display, for example, a numerical readout or other indication corresponding to the electrical output of light detector 18.

[0006] As indicated above, with many lateral flow biosensors, signal 14 is produced in response to an absorption change. Ambient light is sometimes sufficient for detector 18 to detect a signal 14 produced in response to an absorption change. If so, the sensor might not include a light source. However, if ambient light is not sufficient, then sensor 30 would include a light source 20, such as an LED or laser.

[0007] Moreover, some sensors require a light source

to produce signal 14. For example, light source 20 might be an LED or laser which emits a light that causes fluorescence to occur, and thereby causes signal 14 to be produced.

[0008] Optical components 22 and 24, which may be optical lens and/or filters, are often provided to improve performance of the sensor.

[0009] In a conventional sensor, light source 20, light detector 18, optical components 22 and 24 are discrete, relatively large components, which are assembled and held in place by mechanical fixtures. As a result, the sensor is overly large, and can be expensive to produce.

[0010] In addition, many sensors are intended to be disposable sensors. For example, the sensor might be provided in an enclosure 25, which could be a disposable box. The use of discrete, individually assembled components for light source 20, detector 18 and optical components 22 and 24 makes the sensor prohibitively expensive as a disposable sensor.

[0011] As an example, METRICA produces such a disposable sensor for glycomic management. However, the sensor is assembled from discrete components, i.e., discrete LEDs, discrete optics, discrete photodiodes. As a result, the sensor is relatively expensive for one time use.

[0012] Therefore, in many conventional sensors, light source 20, detector 18 and optical components 22 and 24 are included in a separate, reusable, external optical system that is used with a disposable test strip or chemical layer 12. However, reusing such an external optical system has many disadvantages. For example, with home use, the user must carry around both the external optical system and test strips. For tests that are done infrequently, the user has to remember the location of the external optical system. Moreover, with a reusable external optical system, there is a danger of cross contamination between tests, especially when the optical system is used repeatedly for multiple tests such as in a doctor's office. The chance of cross contamination is especially troublesome in drug testing, where even the remote possibility of cross transfer can result in legal challenges of the outcome of the test.

[0013] US-B1-6 331 438 discloses an apparatus comprising: a chemical layer via which an optical signal is produced in response to an analyte being placed on the chemical layer, a detector which detects the optical signal to thereby detect presence, absence or concentration of the analyte, a substrate, the chemical layer and the substrate being laminated together and a light source which emits light which causes the signal to be produced or detected in response to the analyte being placed on the chemical layer. The disclosure of this document corresponds generally to the preamble of claim 1.

[0014] According to a first aspect of the present invention there is provided an apparatus according to claim 1.

[0015] According to a second aspect of the present invention there is provided an apparatus according to claim 2.

[0016] Various embodiments of the present invention

provide an apparatus including (a) a chemical layer via which an optical signal is produced in response to an analyte being placed on the chemical layer; (b) a detector which detects the optical signal to thereby detect presence, absence or concentration of the analyte; and (c) a substrate, wherein the detector is on the substrate, and the chemical layer and the substrate are laminated together.

[0017] Moreover, various embodiments of the present invention provide an apparatus including (a) a chemical layer via which an optical signal is produced in response to an analyte being placed on the chemical layer, (b) a detector, being an organic photodiode or amorphous silicon, which detects the signal to thereby detect the presence, absence or concentration of the analyte; (c) an organic light emitting diode (OLED) which emits a light that causes the optical signal to be produced or detected in response to the analyte being placed on the chemical layer, and (d) a substrate, wherein the detector and the OLED are manufactured directly on the substrate, and the chemical layer and the substrate are laminated together.

[0018] In addition, various embodiments of the present invention provide an apparatus including (a) a chemical layer via which an optical signal is produced in response to an analyte being placed on the chemical layer; and (b) a detector which detects the signal, to thereby detect presence, absence or concentration of the analyte, wherein the chemical layer and the detector are integrated together by lamination.

[0019] These and other aspects and advantages of the invention will become apparent and more readily appreciated from the following description of the preferred embodiments, taken in conjunction with the accompanying drawings of which:

FIG. 1 (prior art) is a diagram illustrating a conventional lateral flow biosensor.

FIG. 2 is a diagram illustrating a sensor according to an embodiment of the present invention.

FIG. 3 is a diagram illustrating a sensor having an integrated display device, according to an embodiment of the present invention.

FIGS. 4 and 5 are diagrams illustrating a sensor according to an additional embodiment of the present invention.

FIGS. 6 and 7 illustrate a sensor having a light source and detector on opposite sides of a chemical layer, according to an embodiment of the present invention.

[0020] Reference will now be made in detail to the present preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to like elements throughout.

[0021] FIG. 2 is a diagram illustrating a sensor 30 according to an embodiment of the present invention. In

FIG. 2, sensor 30 is a lateral flow biosensor. However, the present invention is not limited to being a "lateral flow" biosensor. Instead, the present invention is applicable to biosensors other than "lateral flow" biosensors. Moreover, the present invention is not limited to being a "biosensor". Instead, the present invention is applicable to many different types of sensors, including biosensors and chemical sensors.

[0022] Referring now to FIG. 2, sensor 30 includes a chemical layer 32. When an analyte 34 is placed on chemical layer 32, an optical signal 38 is produced in zone 39 of chemical layer 32. For example, optical signal 38 is produced in response to a chemical or physical modification of analyte 34, or a chemical or physical modification of a chemical or material in or on chemical layer 32. A detector 36 detects signal 38, to thereby detect the presence, absence or concentration of analyte 34. For example, in some embodiments, the presence of analyte 34 would be detected. In other embodiments, the concentration of analyte 34 would be detected. Detector 36 is placed in appropriate proximity to zone 39 to allow sufficient detection of signal 38. Detector 36 is, for example, a photodiode. However, the present invention is not limited to detector 36 being a photodiode, and other suitable detectors can be used.

[0023] In some types of sensors, it is not required for the sensor to include a light source. For example, in some sensors, detector 36 may detect an absorption change in zone 39. Ambient light might be sufficient for detector 36 to detect the change. If ambient light is sufficient, it may not be necessary for the sensor to include a light source. Otherwise, a light source might be provided.

[0024] However, some sensors must include a light source. For example, some sensors require a light source to produce signal 38. As an example, a light source might be required to cause signal 38 to be produced via fluorescence.

[0025] If a light source is required to produce or detect signal 38, sensor 30 would include a light source 42. Light source 42 is, for example, a light emitting diode (LED). LEDs are well known. However, light source 42 is not limited to being an LED, and other suitable types of light sources can be used.

[0026] Sensor 30 also includes a substrate 40. Substrate 40 includes conductive elements (not illustrated) to connect components together on substrate 40 or, if necessary, to connect external components to components on substrate 40. Substrate 40 is, for example, a flexible substrate such as, for example, a polyimide substrate. Such substrates are well known. However, substrate 40 is not limited to being a flexible substrate, and is also not limited to being a polyimide substrate. Instead, other suitable substrates can be used.

[0027] Detector 36 is on substrate 40. In the embodiment in FIG. 2, if sensor 30 also includes light source 42, then light source 42 is also on substrate 40. For example, detector 36 and light source 42 are bonded to substrate 40, or attached to substrate in any suitable other manner.

Chemical layer 32 and substrate 40 are laminated together. In other embodiments of the present invention, detector 36 and light source 42 can be on opposite sides of chemical layer 32. Hence, two optical layers (i.e., one layer including detector 36 and one layer including light source 42) are bonded to a chemical layer

[0028] A separation layer 44 can be used to provide the necessary optical separation between chemical layer 32 and the optical components such as light source 42 and detector 36, which is especially important when both light source 42 and detector 36 are mounted on the same side of chemical layer 32. For example, separation layer 44 can be provided between chemical layer 32 and substrate 40 so that separation layer 44 is between chemical layer 32 and detector 36, and between chemical layer 32 and light source 42. Separation layer 44 can be, for example, a separate piece of plastic or a clear, conformal coating on top of substrate 40. Here, "clear" indicates that separate layer 44 is "clear" to signal 38, and not necessarily "clear" to the human eye. For example, if light source 42 emits infrared light, separation layer 44 might be black in color to the human eye. Chemical layer 32, separation layer 44 and substrate 40 are laminated together.

[0029] By using an appropriate detector 36 (such as, for example, an surface mount photodiode), a suitable light source (such as, for example, an surface mount LED), and a suitable substrate (such as, for example, a polyimide flex substrate), the present invention integrates chemical layer 32, detector 36 and light source 42 together into one unit, and can be used, for example, as a disposable sensor. Such a disposable sensor would be relatively inexpensive compared to a conventional sensor. Further, such a disposable sensor would have substantial cost and size savings due to the lack of required submounts and alignments as compared to a conventional sensor. In addition, due to the proximity of detector 38 to chemical layer 32, a disposable sensor according to various embodiments of the present invention might not require any collection optics.

[0030] The integration of light source 42 and detector 36 on substrate 40 is based, for example, on flex technology. Generally, flex technology is typically used to integrate electronic components onto a flexible substrate. Flex technology is known, and has been applied for low cost manufacturing of a variety of electronic components such as, for example, CMOS cameras. For example, within conventional flex technology, the camera IC and any required passive components are directly mounted onto a flex substrate that is used to connect the camera to a PC board.

[0031] FIG. 3 is a diagram illustrating sensor 30 having an integrated display device, according to an embodiment of the present invention. Referring now to FIG. 3, a display device 50 is on substrate 40. For example, display device 50 is bonded to substrate 40, or attached to substrate in any suitable other manner. Display device 50 displays a result corresponding to signal 38 detected

by detector 36. Display device 50 might, for example, simply provide a light which goes ON or OFF to indicate YES or NO. Or, display device 50 might, for example, provide a numerical readout corresponding, for example, to the concentration of the analyte. Display device 50 is, for example, a light emitting diode (LED), an organic light emitting diode (OLED) or a liquid crystal display. However, display device 50 is not limited to being an LED, an OLED or a liquid crystal display, and any suitable display device can be used.

[0032] By using an appropriate display device 50 (such as, for example, an LED or a liquid crystal display), the present invention integrates chemical layer 32, detector 36, light source 42 and display device 50 together into one laminated unit, and can be used, for example, as a disposable sensor. Such a disposable sensor would be relatively inexpensive compared to a convention sensor using discrete components and a separate, external display device.

[0033] Although not shown in FIGS. 2 and 3, appropriate components such as polarizers, optical filters and other measurement supporting components, can be integrated into the optical sensor to cooperate with light source 42 and/or detector 36, if desired. These components can be, for example, bonded to substrate 40, or provided as a layer between chemical layer 32 and substrate 40, and laminated together with chemical layer 32 and substrate 40. The selection of appropriate materials for such components would be within the skill of a person of ordinary skill in the art, in view of the disclosure herein.

[0034] According to embodiments of the present invention, if the appropriate materials are selected for use as light source 42, detector 36 and substrate 40, then light source 42 and detector 36 can be manufactured directly on substrate 40. For example, light source 42 and detector 36 can be made of organic materials (such as light source 42 being an OLED and detector 36 being an organic photodiode). Alternatively, detector 36 can be of a material such as, for example, amorphous silicon. In addition, substrate 40 can be, for example, a flexible substrate such as, for example, a polyimide substrate. With such material selection, light source 42 and detector 36 can be manufactured directly on substrate 40. As a result, the sensor can be manufactured by a potentially low cost manufacturing method. The manufacturing of a light source such, for example, as an OLED on a substrate, such as, for example, a flexible substrate, is known. The manufacturing of a detector such as, for example, an organic photodiode or amorphous silicon, directly on a substrate, such as, for example, a flexible substrate, is known.

[0035] Although not shown in FIGS. 2 or 3, a power source would also typically be provided on the sensor A power supply for integration in such a sensor would be understood by a person of ordinary skill in the art in view of this disclosure.

[0036] Moreover, although not shown in FIG. 3, a processing device might be provided on substrate 40 to

process the output signal of detector 36 for use by display device 50. A processing device in such a sensor would be understood by a person of ordinary skill in the art in view of this disclosure.

[0037] Sensor 30 in FIGS. 2 and 3 is a lateral flow biosensor, since analyte 34 laterally flows across chemical layer 32, which causes signal 38 to be produced in zone 39. However, the present invention also applies to sensors which are not lateral flow biosensors.

[0038] For example, FIGS. 4 and 5 illustrate a sensor 60 according to additional embodiments of the present invention. Sensor 60 is not a lateral flow sensor. Referring now to FIGS. 4 and 5, an analyte (not illustrated in FIGS. 4 and 5) is placed directly in zone 39, to thereby produce signal 38. Otherwise, sensor 60 in FIGS. 4 and 5 is similar to sensor 30 in FIGS. 2 and 3, respectively.

[0039] In FIGS. 2-5, light source 42 and detector 36 are on the same side of chemical layer 32 with respect to each other. However, in some embodiments, light source 42 and detector 36 can be on opposite sides of chemical layer 32 with respect to each other.

[0040] For example, FIGS. 6 and 7 illustrate a sensor having a light source and detector on opposite sides of chemical layer 32. Referring now to FIGS. 6 and 7, light source 42 is provided on a separate substrate 70. Substrate 70 might be, for example, a flexible substrate such as, for example, a polyimide substrate. However, substrate 70 is not limited to being a flexible substrate or a polyimide substrate. Chemical layer 32 is sandwiched between substrates 40 and 70. Although separation layer 44 is shown in FIGS. 6 and 7, a separation layer would often not be necessary, and could be eliminated, if light source 42 and detector 36 are on opposite sides of chemical layer 32. Further, a display device, such as display device 50 in FIGS. 3 and 5, could be positioned on either substrate 40 or 70.

[0041] In FIGS. 6 and 7, substrate 70 is shown as being much shorter in length than substrate 40. The present invention is not limited to substrate 70 being any specific length or size with respect to substrate 40. In some embodiments of the present invention, a window (not illustrated) could be provided on substrate 70 to allow an analyte to be passed through the window and be placed on chemical layer 32.

[0042] There are many different types of sensors that operate in different manners. The present invention is not limited to any particular type of sensor. The present invention is particularly applicable to biosensors and chemical sensors. Moreover, there are many different types of chemical layers or test strips that can be used in a sensor, and these chemical layers or test strips can operate with different underlying chemicals and in accordance with different mechanisms of action. The present invention is not limited to any particular type of chemical layer or test strip, to any particular underlying chemical, or to any particular mechanism of action.

Claims

1. An apparatus comprising:

a chemical layer (32) via which an optical signal is produced in response to an analyte (34) being placed on the chemical layer;
a detector (36) which detects the optical signal to thereby detect presence, absence or concentration of the analyte; and
a substrate (40), wherein the chemical layer and the substrate are laminated together; and
a light source (42) which emits light which causes the signal to be produced or detected in response to the analyte being placed on the chemical layer, wherein the light source is on the substrate;

characterised in that:

the detector is on the substrate; **in that** the light source (42) and the chemical layer (32) are on the same side of the substrate (40); and **in that** the apparatus further comprises a separation layer (44) between the chemical layer (32) and the substrate (40) so that the separation layer is between the chemical layer and the detector (36), wherein the chemical layer, the separation layer and the substrate are laminated together.

2. An apparatus comprising:

a chemical layer (32) via which an optical signal is produced in response to an analyte (34) being placed on the chemical layer;
a detector (36) which detects the optical signal to thereby detect presence, absence or concentration of the analyte; and
a substrate comprising a first substrate (40) and a second substrate (70) wherein the chemical layer and the first substrate are laminated together;
a second substrate (70) on the chemical layer (32);
a light source (42) which emits light which causes the signal to be produced or detected in response to the analyte being placed on the chemical layer;

characterised in that:

the detector is on the first substrate (40);
the light source is on the second substrate (70);
the light source (42) and the chemical layer (32) are on the same side of the first substrate (40).

3. An apparatus as in claims 1 or 2, wherein the substrate is a flexible substrate.
4. An apparatus as in claims 1 to 3, wherein the detector (36) is a photodiode. 5
5. An apparatus as in claim 1 or 2, wherein the light source is a light emitting diode (LED).
6. An apparatus as in claim 1, wherein the detector (36) is an organic photodiode or amorphous silicon, the light source (42) is an organic light emitting diode (OLED), and the detector and the light source are manufactured directly on the substrate, and the chemical layer and the substrate are laminated together. 10 15
7. An apparatus as in claims 1 to 6, further comprising: 20
 a display device (50) on the substrate (40) and which displays a result corresponding to the signal detected by the detector. 25

Patentansprüche

1. Einrichtung aufweisend:

eine chemische Schicht (32), mittels welcher ein optisches Signal in Abhängigkeit von einem Analyten (34) erzeugt wird, welcher auf der chemischen Schicht platziert ist; 30
 einen Detektor (36), welcher das optische Signal detektiert, um dabei das Vorhandensein, die Abwesenheit oder die Konzentration des Analyten zu detektieren; und 35
 ein Substrat (40), wobei die chemische Schicht und das Substrat zusammenlaminiert sind; und eine Lichtquelle (42), welche Licht emittiert, welches das Signal auslöst, das in Abhängigkeit von dem auf der chemischen Schicht platzierten Analyten erzeugt oder detektiert werden soll, wobei die Lichtquelle auf dem Substrat ist; 40
dadurch gekennzeichnet, 45
dass der Detektor auf dem Substrat ist, **dass** die Lichtquelle (42) und die chemische Schicht (32) auf der gleichen Seite des Substrates (40) sind, und 50
dass die Einrichtung außerdem eine Trennschicht (44) zwischen der chemischen Schicht (32) und dem Substrat (40) aufweist, sodass die Trennschicht zwischen der chemischen Schicht und dem Detektor (36) liegt, 55
 wobei die chemische Schicht, die Trennschicht und das Substrat zusammenlaminiert sind.

2. Einrichtung aufweisend:

eine chemische Schicht (32), mittels welcher ein optisches Signal in Abhängigkeit von einem Analyten (34) erzeugt wird, welcher auf der chemischen Schicht platziert ist; 5
 einem Detektor (36), welcher das optische Signal detektiert, um dabei das Vorhandensein, die Abwesenheit oder die Konzentration des Analyten zu detektieren; und 10
 ein Substrat, welches ein erstes Substrat (40) und ein zweites Substrat (70) aufweist, wobei die chemische Schicht und das erste Substrat zusammenlaminiert sind; 15
 ein zweites Substrat (70) auf der chemischen Schicht (32); 20
 eine Lichtquelle (42), welche Licht emittiert, welches das Signal auslöst, das in Abhängigkeit von dem auf der chemischen Schicht platzierten Analyten erzeugt wird; 25
dadurch gekennzeichnet,
dass der Detektor auf dem ersten Substrat (40) ist; 30
dass die Lichtquelle auf dem zweiten Substrat (70) ist; 35
dass die Lichtquelle (42) und die chemische Schicht (32) auf der gleichen Seite des ersten Substrates (40) sind. 40

3. Einrichtung nach Anspruch 1 oder 2, in welcher das Substrat ein flexibles Substrat ist. 30

4. Einrichtung nach einem der Ansprüche 1 bis 3, in welcher der Detektor (36) eine Fotodiode ist. 35

5. Einrichtung nach Anspruch 1 oder 2, in welcher die Lichtquelle eine Licht emittierende Diode (LED) ist. 40

6. Einrichtung nach Anspruch 1, in welcher der Detektor (36) eine organische Fotodiode oder amorphes Silizium ist, die Lichtquelle (42) eine organische Licht emittierende Diode (OLED) ist, und der Detektor und die Lichtquelle direkt aus dem Substrat hergestellt sind, und die chemische Schicht und das Substrat zusammenlaminiert sind. 45

7. Einrichtung nach einem der Ansprüche 1 bis 6, außerdem aufweisend: 50

eine Anzeigevorrichtung (50) auf dem Substrat (40), welche ein Ergebnis entsprechend dem von dem Detektor detektierten Signal anzeigt. 55

Revendications

1. Appareil comprenant :

une couche chimique (32) à travers laquelle un signal optique est produit en réponse au placement d'un analyte (34) sur la couche chimique ; un détecteur (36) qui détecte le signal optique afin de détecter ainsi la présence, l'absence ou la concentration de l'analyte ; et un substrat (40), dans lequel la couche chimique et le substrat sont stratifiés ensemble ; et une source lumineuse (42) qui émet de la lumière, ce qui entraîne la production ou la détection du signal en réponse au placement de l'analyte sur la couche chimique, la source lumineuse étant localisée sur le substrat ;

caractérisé en ce que :

le détecteur est situé sur le substrat ; **en ce que**

la source lumineuse (42) et la couche chimique (32) sont situées sur le même côté du substrat (40) ; et **en ce que**

l'appareil comprend en outre une couche (44) de séparation entre la couche chimique (32) et le substrat (40) de sorte que la couche de séparation est située entre la couche chimique et le détecteur (36), dans lequel la couche chimique, la couche de séparation et le substrat sont stratifiés ensemble.

2. Appareil comprenant :

une couche chimique (32) à travers laquelle un signal optique est produit en réponse au placement d'un analyte (34) sur la couche chimique ; un détecteur (36) qui détecte le signal optique afin de détecter ainsi la présence, l'absence ou la concentration de l'analyte ; et

un substrat comprenant un premier substrat (40) et un second substrat (70), dans lequel la couche chimique et le premier substrat sont stratifiés ensemble ;

un second substrat (70) situé sur la couche chimique (32) ;

une source lumineuse (42) qui émet de la lumière, ce qui entraîne la production ou la détection du signal en réponse au placement de l'analyte sur la couche chimique ;

caractérisé en ce que :

le détecteur est situé sur le premier substrat (40) ;

la source lumineuse est située sur le second substrat (70) ;

la source lumineuse (42) et la couche chimique (32) sont localisées du même côté du premier substrat (40).

3. Appareil selon la revendication 1 ou 2, dans lequel le substrat est un substrat flexible.

4. Appareil selon l'une des revendications 1 à 3, dans lequel le détecteur (36) est une photodiode.

5. Appareil selon la revendication 1 ou 2, dans lequel la source lumineuse est une diode électroluminescente (DEL).

6. Appareil selon la revendication 1, dans lequel le détecteur (36) est une photodiode organique ou du silicium amorphe, la source lumineuse (42) est une diode électroluminescente organique (DELO), et le détecteur et la source lumineuse sont fabriqués directement sur le substrat, et la couche chimique et le substrat sont stratifiés ensemble.

7. Appareil selon l'une des revendications 1 à 6, comprenant en outre :

un dispositif (50) d'affichage situé sur le substrat (40) et qui affiche un résultat correspondant au signal détecté par le détecteur.

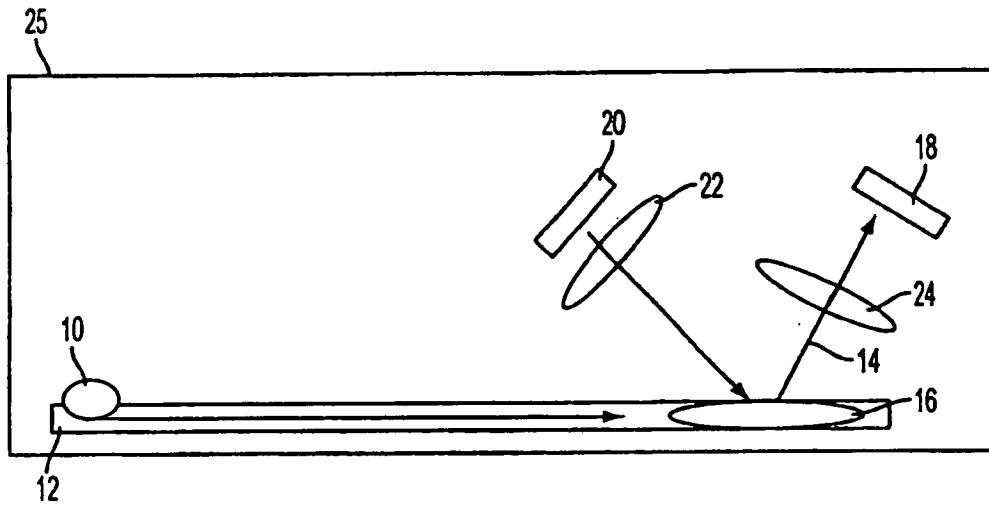


FIG. 1
PRIOR ART

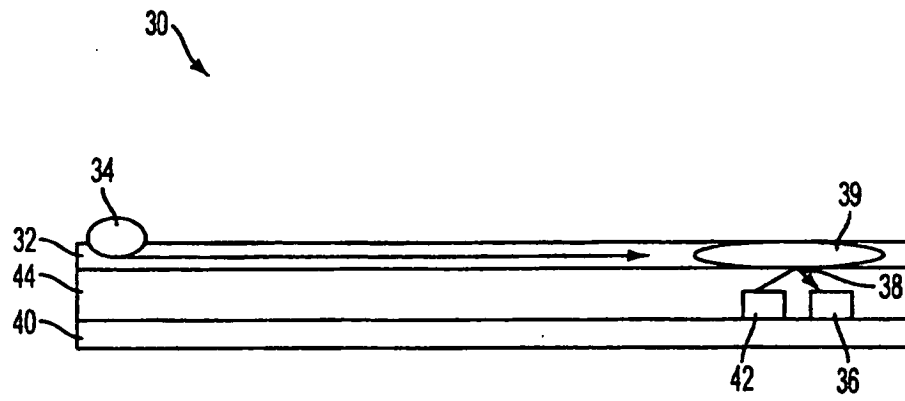


FIG. 2

30 ↗

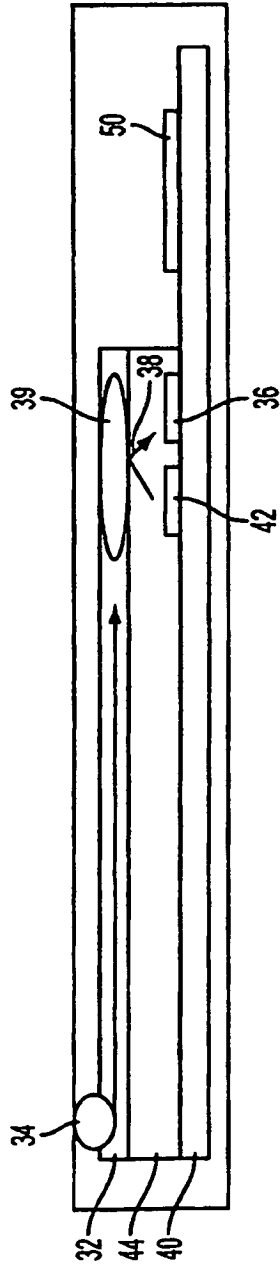


FIG. 3




FIG. 4

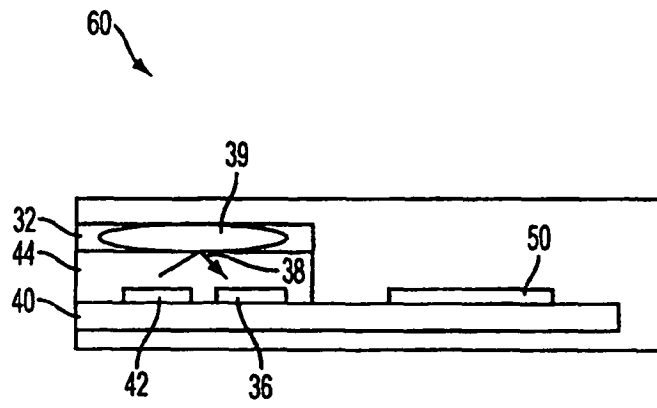


FIG. 5

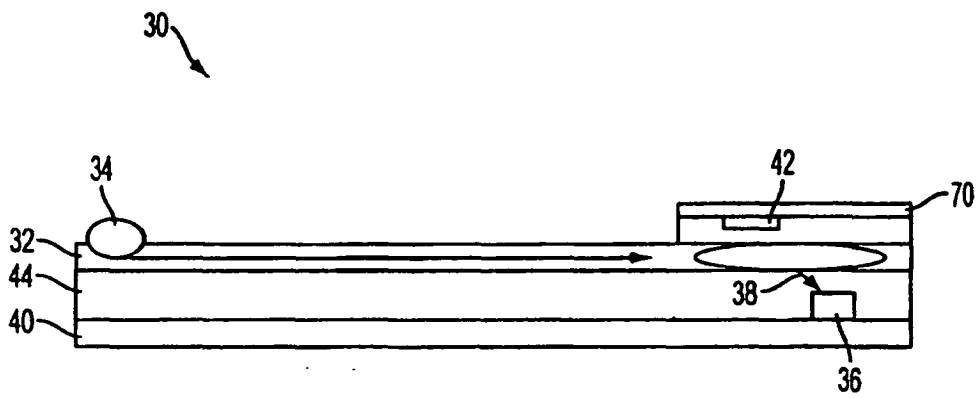


FIG. 6

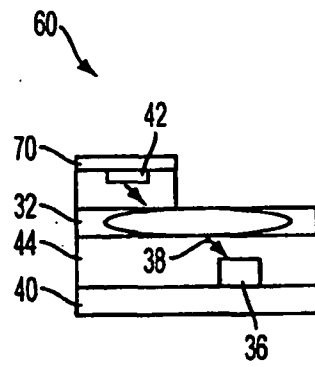


FIG. 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6331438 B1 [0013]

专利名称(译)	传感器具有集成的光检测器和光源		
公开(公告)号	EP1672356B1	公开(公告)日	2012-04-25
申请号	EP2005257800	申请日	2005-12-19
[标]申请(专利权)人(译)	安捷伦科技有限公司		
申请(专利权)人(译)	安捷伦科技股份有限公司.		
当前申请(专利权)人(译)	ALVERIX INC.		
[标]发明人	HELBING RENE		
发明人	HELBING, RENE		
IPC分类号	G01N21/86 G01N33/487 G01N21/77 A61B5/00		
CPC分类号	G01N21/77 A61B5/14532 A61B5/14546 A61B5/1455 A61B2562/0295 G01N2201/0628		
代理机构(译)	托列, 伊恩		
优先权	11/013373 2004-12-17 US		
其他公开文献	EP1672356A1		
外部链接	Espacenet		

摘要(译)

传感器 (30) , 例如横向流量传感器 , 其包括在柔性基板 (40) 上的化学层 (32) 和检测器 (36) 。响应于放置在化学层上的分析物 (34) 产生光学信号。检测器检测信号 , 从而检测分析物的存在 , 不存在或浓度。探测器位于基板上。将化学层和基板层压在一起 , 从而形成集成传感器。传感器可包括光源 (42) 。光源可以位于基板上 , 或者位于化学层的与检测器相对的一侧。

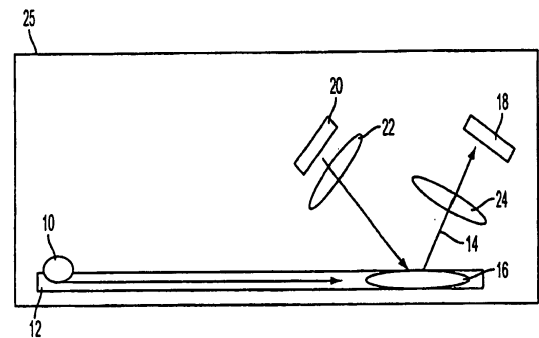


FIG. 1
PRIOR ART