



(11) **EP 2 724 669 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
30.11.2016 Bulletin 2016/48

(51) Int Cl.:
A61B 5/05 (2006.01) **A61B 10/00 (2006.01)**
G01N 22/00 (2006.01) **G01N 27/72 (2006.01)**
G01R 33/035 (2006.01) **A61B 5/00 (2006.01)**

(21) Application number: **13197371.1**

(22) Date of filing: **14.08.2006**

(54) **Method of and apparatus for measuring properties of an object with acoustically induced electromagnetic waves**

Verfahren und Vorrichtung zur Messung der Eigenschaften eines Objekts mit akustisch induzierten elektromagnetischen Wellen

Procédé et appareil de mesure des caractéristiques d'un objet avec des ondes électromagnétiques induites acoustiquement

(84) Designated Contracting States:
DE

(30) Priority: **09.11.2005 JP 2005325064**

(43) Date of publication of application:
30.04.2014 Bulletin 2014/18

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
06796418.9 / 1 952 763

(73) Proprietor: **Japan Science and Technology Agency**
Kawaguchi-shi,
Saitama 332-0012 (JP)

(72) Inventors:
• **Ikushima, Kenji**
Koganei-shi, Tokyo 184-8588 (JP)
• **Komiyama, Susumu**
Setagaya-ku, Tokyo 154-0016 (JP)

(74) Representative: **Serjeants LLP**
Dock
75 Explorator Drive
Leicester, LE4 5NU (GB)

(56) References cited:
WO-A2-00/15097 **JP-A- H01 307 681**
JP-A- H08 193 982 **JP-A- S63 311 185**
US-A- 4 309 905 **US-A1- 2003 133 596**

- **JOHN HOMER AND MARK J HOWARD: "Studies on the origin of sonically induced narrowing of solid-state nuclear magnetic resonance spectra", JOURNAL OF THE CHEMICAL SOCIETY. FARADAY TRANSACTIONS, ROYAL SOCIETY OF CHEMISTRY, CAMBRIDGE, GB, vol. 89, no. 16, 21 August 1993 (1993-08-21), pages 3029-3038, XP008167357, ISSN: 0956-5000, DOI: 10.1039/FT9938903029**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 724 669 B1

DescriptionTechnical Field

5 **[0001]** The present invention relates to a method of and an apparatus for measuring properties of an object of every sort, including a human body, which when acoustically vibrated may be capable of emitting electromagnetic waves, from such electromagnetic waves induced by applicable sound waves. The present invention relates in particular to a technique using such a method for the measurement of an active site of a brain.

10 Background Art

[0002] In the interest of elucidating a relation between a human mental activity and a brain's action and in an effort to specify a lesion in brain's disease therapeutics, attempts have been made to identify a neural active site of the brain. Neurons in a neural activity control an ion concentration to form a charge distribution and transmit information through propagation of a potential created by the charge distribution, namely of an action potential (see Non-patent Reference 1). Thus, the most direct information source that can identify a site of neural activity is the action potential, more cardinally the charge distribution which the neuron creates.

15 **[0003]** While in the measurement of an action potential in the nervous system, a method is usually taken in which to directly insert an electrode into the body, use cannot be made of this method for a human body, inter alia for its brain tissue but necessarily of a noninvasive measuring method to identify an active region from the outside of the human body without harming the body part.

20 **[0004]** As the noninvasive method of measuring a neural activity, PET (positron emission tomography; see Non-patent Reference 2), fMRI (functional magnetic resonance imaging; see Non-patent Reference 3), near infrared topography (see Non-patent Reference 4) and magneto-encephalography (see Non-patent Reference 5) have been primarily put

25 **[0005]** In any of PET, fMRI and near infrared topography, however, in which neuron's activity is indirectly detected from a change in amount of metabolism, namely in amount of bloodstream in the blood or oxygen therein, in the region of an active site, no electrical signal created by neurons is directly measured. As a result, their position and time resolutions for an active site are not sufficient in elucidating a relation between a human mental activity and a brain's action or in serving for disease therapy. They require a cyclotron accelerator for producing positrons, a high field generating apparatus for nuclear magnetic resonance or the like and are extremely high in apparatus cost.

30 **[0006]** Magneto-encephalography which detects a very weak magnetic field as induced by an intracellular electric current is a process that is high in time resolution as it detects neurons' activity more directly than do the others above. This method in which a position is estimated on the basis of a magnetic field distribution and hence determined indirectly is not enough in position resolution. Especially if a plurality of sites are active simultaneously, their identification then becomes difficult. There is also the problem that it is difficult to detect information from a deep part and an electric current passed towards a normal to a surface.

35 **[0007]** Included in properties of a material is a magnetic property. As regards the magnetization of a magnetic material, it is reported in Non-patent Reference 8, for example, that a ferromagnetic thin film irradiated with laser light of femto-seconds is observed to produce a coherent radiation in a THz band. The preamble of claims 1 and 10 is derivable from WO 00/15097.

40 Non-patent Reference 1: Michikazu Matsumura "Invitation to Brain Science (The secret of a neural circuit is expounded)" (in Japanese) Science Co., Ltd., July 10, 2003, first Ed. third print issue, pp. 55 - 65;

45 Non-patent Reference 2: M. I. Posner & M. E. Raichele (translated into Japanese by Takeshi Yoro, Masako Kato and Kiyoto Kasai) "Observing the Brain - The riddle of the mind that the cognitive neuroscience reveals" (in Japanese) Nikkei Science Co., Ltd., June 25, 2002, third print issue;

Non-patent Reference 3: P. Jezzard, P. M. Matthews, S. M. Smith edited "Functional Mri: An Introduction & Methods", Oxford Univ. Pr (Sd), ISBN: 01985277 3X, (2003/06);

50 Non-patent Reference 4: Michikazu Matsumura "Invitation to Brain Science (The secret of a neural circuit is expounded)" (in Japanese) Science Co., Ltd., July 10, 2003, first Ed. third print issue, p. 173;

Non-patent Reference 5: Michikazu Matsumura "Invitation to Brain Science (The secret of a neural circuit is expounded)" (in Japanese) Science Co., Ltd., July 10, 2003, first Ed. third print issue, pp. 168 - 169;

Non-patent Reference 6: <http://www.rofuku.go.jp/hanasi/eswl.htm>;

55 Non-patent Reference 7: <http://www.edap-hifu.com/>; and

Non-patent Reference 8: E. Beaurepaire and five others, Appl. Phys. Lett., Vol. 84, No. 18, pp. 3465 - 3467, May 3, 2004.

Disclosure of the InventionProblems to be solved by the Invention

5 **[0008]** Identifying an active site in a brain that is related to a particular mental activity is an extremely effective means for elucidating a relation between a human mental activity and a brain's action, and determining in a therapy of a brain's disease if the activity of a particular site in a brain is normal or abnormal is extremely important to cure the brain's disease.

10 **[0009]** As will have been appreciated from the description above, however, the problem remains that neither the prior-art method of detecting a change in amount of metabolism in the blood to indirectly determine an active site nor the prior-art method of detecting a very weak magnetic field as induced by an intracellular electric current with the excitation of a neuron is sufficient in position resolution, and they are incapable of identifying an active site with necessity and sufficiency and yet are extremely high in apparatus cost.

15 **[0010]** In view of the problems mentioned above, it is an object of the present invention to provide a method of and an apparatus for measuring a change in property value of charged particles in an object, from electromagnetic waves induced by irradiating the object with acoustic waves, namely from acoustically induced electromagnetic waves and, in particular, a process of determining an active site in a brain to which the method is applied and which is capable of detecting a neuron's charge distribution which is representative of the most direct quantity of a neuron's activity to identify the active site in the brain at a high position resolution.

20 Means for Solving the Problem

[0011] As viewed microscopically, an object or substance necessarily comprises particles with positive charges and those with negative charges which as a whole are neutral. For instance, Si crystal is made up of a Si core having positive charges and electrons revolving around the core and having negative charges, which are neutral as a whole. An ionic crystal is made up of cations and anions which as a whole are neutral. A colloidal solution consists of colloidal particles with positive or negative charges and ions or molecules surrounding a colloidal particle and with charges opposite in sign to those of the colloidal particle which in toto are neutral. Further, a biological liquid in a living organism comprises cations such as of Na, K or the like and anions of Cl or the like which are neutral as a whole.

25 **[0012]** The particles which make up a part of an object which is irradiated with acoustic waves are caused to oscillate harmonically at an acoustic frequency and, based on the harmonic oscillations of their charges, the charged particles generate electromagnetic waves at the acoustic frequency. Thus, a change if any in concentration between charged particles in a part irradiated with acoustic waves cause a change in strength of the electromagnetic waves. By the way, since an object is neutral as a whole, if there exist positive charged particles there also exist negative charged particles of the same number and since electromagnetic waves generated by positive charged particles and those generated by negative charged particles are different by π in phase and canceled by each other, it is apt to be considered that no electromagnetic wave is radiated from the object. Such a situation is rare, however. Even if in the part irradiated with acoustic waves there exist positive charged particles and negative charged particles in the same concentration, a difference between the positive and negative charged particles in their mass, size, shape, or number of charges or in interaction force of their surrounding medium, namely in their property value, makes a difference in amplitude between their harmonic oscillations, thus making a difference in strength between the electromagnetic waves they produce which are not fully canceled out by each other but emitted externally.

35 **[0013]** Thus, if a change has occurred in strength of electromagnetic waves radiated from the part of an object irradiated with sound waves, it means that any one of concentrations, masses, sizes, shapes, and numbers of charges of charged particles and interaction forces of their surrounding medium or in a plurality of these property values of the charged particles have been changed. That conversely, a change in such property value of the charged particles can be determined from a change in strength of the electromagnetic waves. And, on what change in proper values the change is based can be narrowed down on the basis of other information on the object irradiated with sound waves. For example, assuming that the state is that the masses, sizes, shapes, numbers of charges and interaction forces with surrounding media cannot be altered, a change in strength of the electromagnetic waves can be tied to a change in concentration of charged particles in the part of an object irradiated with acoustic waves.

40 **[0014]** Especially, in the case of a neuron when it is activated, a channel for Na ions on a cell wall is opened through which Na ions outside of a cell are diffused into the cell under their concentration gradient to form a distribution of Na ion charges, focusing sound waves on such a part to measure a strength of electromagnetic waves allows the strength of the electromagnetic waves to largely vary with a neuron's action and permits detecting the neuron's action directly. Likewise, when a muscle tissue of a living body is made active where a charge distribution for Ca ions is created, focusing acoustic waves on such a part to measure an intensity of electromagnetic waves allows the active site of muscle tissue to be detected directly.

55 **[0015]** The present invention has been made based on principles as mentioned above and will be described in detail

hereinafter.

[0016] Accordingly, there is provided in accordance with the present invention a method of measuring a property of an object with acoustically induced electromagnetic waves according to claim 1.

[0017] The electric property determined of the measurable object preferably includes a change or changes in one or more of property values for electric field, dielectric constant, spatial gradient of electric field and spatial gradient of dielectric constant and for concentration, mass, size, shape and number of charges of charged particles which the measurable object possesses and for interaction with a medium surrounding the charged particles. The magnetic property determined of the measurable object preferably includes a property value for magnetization due to electron spin or nuclear spin in the measurable object or for acousto-magnetic resonance attributable to electron spin or nuclear spin in the measurable object. The electromagnetic mechanical property preferably includes a piezoelectric property or magnetostriction property of the measurable object.

[0018] If a change has occurred in a property value of charged particles contained in a part of the object irradiated with acoustic waves, namely in concentration, mass, size, shape and number of charges of charged particles or interaction force with their surrounding medium or in a plurality of such property values, it is possible to determine any of electric property, magnetic property or electromagnetic mechanical property from a change in intensity, phase or frequency characteristic of electromagnetic waves which then occur and can be detected. For example, if there could be no possibility of change other than in the concentration of charged particles, a change in intensity of electromagnetic waves can be tied to a change in the concentration of charged particles. Also, if there could be no possibility of change other than in the interaction force with the medium surrounding the charged particles, a change in intensity of electromagnetic waves can be tied to a change in polarizability of electrons or cations in the charged particles. Further, as a magnetic property of the measurable object, magnetization due to electron spin or nuclear spin, or acousto-magnetic resonance due to electron spin or nuclear spin can be measured, and as an electromagnetic mechanical property, piezoelectric or magnetostriction property of the measurable object can be measured.

[0019] The acoustic waves can be in the form of those of a fixed frequency in a narrow band or acoustic wave pulses of a fixed frequency in a narrow band. The electromagnetic waves can then be measured at a high sensitivity, preferably by heterodyne or phase detection of the electromagnetic waves radiated from the measurable object with a frequency of the acoustic waves as a reference signal. Then, external noises having other frequency components can be excluded to allow detecting even a change very small in intensity of electromagnetic waves.

[0020] The acoustic waves of a fixed frequency in a narrow band can be in the form of pulses. Then, the electromagnetic waves are measured by heterodyne or phase detection of the electromagnetic waves radiated from the measurable object with a frequency of the acoustic waves as a reference signal and heterodyne or phase detection of a signal resulting from the said detection with a pulse frequency of the said pulses. In this case, too, external noises having other frequency components can further be excluded to allow detecting even a change extremely small in intensity of electromagnetic waves.

[0021] Preferably, from phase information of the phase detection it is determined in which of positive charged particles or negative charged particles that the object possesses the electromagnetic waves as a signal are originated. Using the phase detection allows it to be determined from phase information in which of positive charged particles or negative charged particles that the object possesses the electromagnetic waves as a signal are originated.

[0022] A signal of said electromagnetic waves can be measured that is isolated with respect to time from electromagnetic noises occurring at a source of emission of said acoustic wave pulses if a time period for a said acoustic wave pulse to propagate over a distance between the emission source of said acoustic wave pulses and said measurable object is chosen to be longer than a pulse duration of said acoustic wave pulse or if the said pulse duration is made shorter than the said time period for the acoustic wave pulse to propagate, thus allowing detection of a change very small in intensity of electromagnetic waves.

[0023] The measurable object is irradiated with acoustic waves preferably by focusing acoustic waves from a plurality of a source on a desired small part of the measurable object and electromagnetic waves induced at the small part are measured with an antenna or coil means disposed to surround the measurable object. Then, acoustic waves can be focused on a desired part and on the desired part from a desired direction and electromagnetic waves radiated from a desired position and from the desired positions towards a desired direction can be measured while their radiation bearing distribution can be determined. When an object is irradiated with acoustic waves, anisotropy in elasticity modulus of charged particles contained in the object may allow electromagnetic waves to be radiated in a direction different from that perpendicular to that of the acoustic oscillations. Then, measuring the radiation bearing distribution allows the type of charged particles and a change in the property value to be determined.

[0024] Preferably, focusing acoustic waves is scanned over a two-dimensional surface or three-dimensional volume of the measurable object and an intensity of induced electromagnetic waves at each scanning position is measured using an antenna or coil means surrounding the measurable object to determine a two-dimensional or three-dimensional distribution of changes in a property value of charged particles of the object by comparing the scanned position and the intensity of the measured electromagnetic waves.

5 [0025] The acoustic waves are preferably applied in the form of broadband ultrashort pulses composed of a plurality of frequency components. Then, the frequency of the electromagnetic waves can be measured so that from the measured frequency of electromagnetic waves, information may be derived on depthwise position of charged particles generating the electromagnetic waves inasmuch as acoustic waves higher in frequency damp faster and those lower in frequency arrive deeper in a brain or a muscle tissue of a living body. For example, it is possible to enhance the accuracy in depthwise position information of the acoustic wave focused part.

10 [0026] If the measurable object is a nervous tissue representative of a brain, a charge distribution can be formed when neuron is activated and if it is a muscle tissue of a living body, a charge distribution can likewise be formed when the muscle tissue is activated. Since the intensity of electromagnetic waves grow with the charge distribution, a two-dimensional or three-dimensional map of the activated site of brain or muscle tissue can be prepared if acoustic focusing is scanned over a two-dimensional surface or three-dimensional volume of the brain or muscle tissue, the intensity of electromagnetic waves induced at each scanning position is measured with the antenna or coil means disposed to surround the brain or muscle tissue and each scanning position and each measured intensity of electromagnetic waves are made corresponding to each other.

15 [0027] The method mentioned above is not limited to an object if it is a living body but can be applied to an object of any one of materials selected from the group which consists of colloidal solution, liquid crystal, solid electrolyte, ionic crystal, semiconductor, dielectric, metal, magnetic material and magnetic fluid or a composite material thereof or a structure or a functional device composed of such a material, in which a change in property value of charged particles can be measured to aid in clarifying the related phenomena.

20 [0028] The present invention also provides an apparatus for measuring a property of an object with acoustically induced electromagnetic waves according to claim 10.

25 [0029] The acoustic generator preferably comprises a plurality of acoustic generators whereby acoustic wave pulses generated from the acoustic generators are controlled of their mutual phase by the control, measure and process unit so as to be focused on a desired position of said measurable object and the focusing position of acoustic waves is scanned over a two-dimensional surface or three-dimensional volume of the measurable object.

30 [0030] The acoustic generator may comprise a plurality of acoustic generators fixed on a concaved surface whose normal is focused on a point. Then, the control, measure and process unit preferably drives these acoustic generators simultaneously to generate acoustic wave pulses and at the same time causes the acoustic generators fixed on the concaved surface to scan mechanically around the measurable object whereby the focusing position of acoustic waves is scanned over a two-dimensional surface or three-dimensional volume of the measurable object.

35 [0031] The control, measure and process unit preferably includes a means by which electromagnetic waves received by the antenna or coil means are heterodyne- or phase-detected with a frequency of the acoustic waves or a pulse frequency of the acoustic wave pulses. Then, external noises possessed by other frequency components can be excluded to allow a change very small in intensity of electromagnetic waves to be detected.

40 [0032] A means is preferably included by which an electromagnetic wave signal resulting from detection by the said detecting means is locked in with a pulse frequency of the acoustic wave pulses. Then, external noises possessed by other frequency components can be excluded to allow a change very small in intensity of electromagnetic waves to be detected.

A means is preferably included by which an electromagnetic wave signal resulting from detection by the said detecting means is locked in with a pulse frequency of the acoustic wave pulses. Then, external noises possessed by other frequency components can be excluded more to allow a change very small in intensity of electromagnetic waves to be detected.

45 [0033] The control, measure and process unit preferably comprises a means for causing broadband ultrashort pulses to be generated from the acoustic generator and a means for measuring a frequency of electromagnetic waves received by the antenna or coil means. Then, it is possible to enhance accuracy in depth-wise position information of the acoustic wave focused part.

[0034] The means for measuring a frequency of electromagnetic waves preferably comprises a bandpass filter provided in the control, measure and process unit.

50 [0035] The means for measuring a frequency of electromagnetic waves may also comprise a bandpass filter and a lock-in amplifier provided in the control, measure and process unit. Then, external noises possessed by other frequency components can further be excluded to allow a frequency of electromagnetic waves to be detected even if their intensity is very small.

55 [0036] The means for measuring a frequency of electromagnetic waves may also comprise a spectrum analyzer provided in the control, measure and process unit. Then, Fourier transformation by the spectrum analyzer of electromagnetic waves allow the intensity for each of frequency components of electromagnetic waves to be detected and the frequency of electromagnetic waves to be determined from the frequency component exhibiting the maximum intensity.

Effects of the Invention

5 [0037] According to the method and apparatus of the present invention, irradiating a measurable object with acoustic waves followed by measuring electromagnetic waves generated from the measurable object allows any one of electric, magnetic and electromagnetic mechanical properties of the measurable object to be determined from any one or a combination of intensity, phase and frequency characteristic of the electromagnetic waves measured. As an electric property of the measurable object, any one or a combination of electric field, dielectric constant, spatial gradient of electric field or dielectric constant, concentration, mass, size, shape, number of charges of charged particles that the measurable object possesses or interaction force with their surrounding medium can be measured of a change or changes thereof. As a magnetic property of the measurable object, magnetization due to electron spin or nuclear spin, or acousto-magnetic resonance due to electron spin or nuclear spin thereof can be measured. As an electromagnetic mechanical property of the measurable object, piezoelectric or magnetostriction property of the measurable object can be measured. Accordingly, measuring a change or changes in these property values in a living body, colloidal solution, liquid crystal, solid electrolyte, ionic crystal, semiconductor, dielectric, metal, magnetic material or magnetic fluid or a composite material thereof or a structure or a functional device composed of such a material is useful in clarifying the related phenomena. Especially, using the present invention in the determination of an active site in a brain makes it possible to identify an activated site at an extremely high position resolution.

Brief Description of the Drawings

20 [0038] In the Drawings:

Fig. 1 is a diagram illustrating a state that a part of an object is irradiated with acoustic waves to induce electromagnetic waves;

25 Fig. 2 is a diagram illustrating the structure of an apparatus for measuring a property of charged particles in an object by means of acoustically induced electromagnetic waves in accordance with the present invention;

Fig. 3 is a diagram illustrating a way of focusing acoustic waves;

Fig. 4 is a diagram illustrating an alternative way of focusing acoustic waves;

30 Fig. 5 is a block diagram illustrating the structure of a control, measure and process unit used in a first method of measurement according to the present invention;

Fig. 6 is a diagram illustrating a method of measuring a change with time characteristic of a property value of charged particles in accordance with the present invention;

Fig. 7 is a block diagram illustrating the structure of a control, measure and process unit used in a second method of measurement according to the present invention;

35 Fig. 8 is a block diagram illustrating the structure of a control, measure and process unit used in a third method of measurement according to the present invention;

Fig. 9 is a block diagram illustrating the structure of a control, measure and process unit used in a fourth method of measurement according to the present invention;

40 Fig. 10 illustrates a block diagram of the structure of a control, measure and process unit used in a fifth method of measurement according to the present invention wherein (a) shows the apparatus structure and (b) shows occurrence timings of gate pulses and acoustic generating pulses produced by a pulse generator, those of acoustic waves generated by an acoustic generator and those of electromagnetic waves induced in an object;

45 Fig. 11 is a block diagram illustrating the structure of a control, measure and process unit used in determining a polarity of charges of a source of emission of electromagnetic waves in the case of using broadband acoustic wave pulses;

Fig. 12 is a block diagram illustrating the structure of another control, measure and process unit used in determining a polarity of charges of a source of emission of electromagnetic waves in the case of using broadband acoustic wave pulses;

50 Fig. 13 diagrammatically illustrates the structure of an apparatus for measuring a property of an object with acoustically induced electromagnetic waves in Example 1, showing at (a) the apparatus structure, at (b) a modification of ultrasonic probe and at (c) a waveform of ultrasonic waves, respectively;

Fig. 14 illustrates detected waveforms of acoustically induced electromagnetic waves from semiconductor GaAs crystal as the object, showing at (a) an ultrasonic waveform, at (b) a waveform obtained in the property measuring apparatus in Example 1 and at (c) a waveform obtained in a property measuring apparatus in Example 2;

55 Fig. 15 illustrates detected waveforms of acoustically induced electromagnetic waves from a measurable object, showing at (a) waveform for Si crystal, and at (b) and (c) waveforms for GaAs crystals different in crystal arrangement;

Fig. 16 illustrates detected waveforms in chart of acoustically induced electromagnetic waves, indicating at (a) a signal for hard osseous tissue of pig in Example 4, at (b) a signal for timber in Example 5, at (c) a signal for

polypropylene in Example 6 and at (d) a signal for aluminum in Example 7; and Fig. 17 is a chart of waveforms detected of acoustically induced electromagnetic waves from a ferrite magnet in Example 9.

5 Description of Reference Characters

[0039]

- 1: acoustic beam
- 10 2: acoustic focused part
- 3: positive charged particle
- 4: negative charged particle
- 5: oscillating directions of acoustic waves
- 6: electromagnetic waves induced by acoustic waves
- 15 21: apparatus for property measurement with acoustically induced electromagnetic waves
- 22: anechoic chamber
- 23: measurable object
- 23a: acoustic focused part
- 24: retainer table
- 20 25: acoustic wave generator
- 26: acoustic waves
- 27: electromagnetic waves
- 28: antenna (array-type antenna or array-type coil)
- 28a: element antenna
- 25 29, 30, 50, 52, 60, 65, 75, 76:
a control, measure and process unit
- 31: RF oscillator
- 30 31a: RF signal
- 31b: pulse signal
- 32: gate switch
- 33: pulse generator
- 34: amplifier
- 35 35: small signal amplifier
- 36: mixer
- 37: phase shifter
- 38: amplifier
- 39: low-pass filter
- 40 40: digital oscilloscope
- 41: personal computer
- 42, 62, 68, 78: signal line
- 43: time relaxation wave form of acoustically induced electromagnetic waves
- 51, 61, 77: lock-in amplifier
- 45 54: broadband acoustic wave pulse
- 55, 57: band-pass filter
- 66: gate pulse
- 67: spectrum analyzer
- 69: pulse for generating acoustic waves

50 Best Modes for Carrying Out the Invention

[0040] Explanation is given hereinafter of best modes for carrying out the present invention:

55 At the outset, mention is made of how electromagnetic waves are induced from an object when irradiated with acoustic waves.

[0041] Fig. 1 is a diagram illustrating a state that a part of an object is irradiated with acoustic waves to induce

electromagnetic waves. In Fig. 1, an acoustic wave focusing beam 1 is shown as focused on a part 2 of a measurable object wherein positive charged particles 3 and negative charged particles 4 are shown by + and - signs, respectively, which are encircled with circles. Also, in the part 2 of the object, the positive charged particles 3 and the negative charged particles 4 lose their balance in concentration, exhibiting a charge distribution in which the positive charged particles 3 predominate. The arrow 5 indicates oscillating directions of acoustic waves whereas the arrow 6 indicates the electromagnetic waves produced with oscillations of the positive and negative charged particles 3 and 4 by acoustic waves and propagating in directions perpendicular to the arrow 5.

[0042] As shown in Fig. 1, where the positive and negative charged particles 3 and 4 when irradiated with the acoustic beam 1 are oscillated at a frequency of the acoustic waves in oscillating directions 5 of the acoustic waves, the oscillations which are of their charges induce the electromagnetic waves 6 which propagate in the directions perpendicular to the oscillating directions 5. By the way, when the positive and negative charged particles are oscillated identically, the electromagnetic waves then produced, respectively, by the positive and negative charged particles are deviated by π in phase and canceled out by each other so that no electromagnetic waves may be produced as a whole. In the part 2 of the object, however, having a charge distribution in which the positive charged particles 3 are predominant so that there is no such cancelation, net electromagnetic waves 6 are induced.

[0043] Thus, observing acoustically induced electromagnetic waves to observe a change in intensity of the electromagnetic waves makes it possible to ascertain that a change has been brought about in charge distribution, namely that a change has occurred in concentration of positive charged particles 3 or negative charged particles 4 or both. To wit, from the measurement of acoustically induced electromagnetic waves it is possible to determine a change in a property value, here concentration, of charged particles in the object.

[0044] While in connection with Fig. 1 the measurement of acoustically induced electromagnetic waves is shown to determine a change in concentration of charge particles, the property value of charged particles whose change can be determined may be the mass, size, shape or number of charges of charged particles or interaction force with their surrounding medium as mentioned below.

[0045] Assuming that X: the position coordinate of a charge particle, M: the mass of the charged particle, S: the effective cross-sectional area on which the charged particle receives a force based on acoustic oscillations from its surrounding medium, p: the pressure of acoustic oscillations, ν : the frequency of the acoustic oscillations and t: time, the equation of motion of the charged particle can be expressed by equation (1) below.

$$M \frac{d^2 X}{dt^2} = Sp \sin 2\pi\nu t \quad (1)$$

[0046] The solution of this equation can be expressed by expression (2) below.

$$X(t) = \frac{pS}{(2\pi\nu)^2 M} \sin 2\pi\nu t \quad (2)$$

[0047] The oscillation amplitude A of the charged particle can be expressed by equation (3) below.

$$A \equiv \frac{pS}{(2\pi\nu)^2 M} \quad (3)$$

[0048] From equation (3) above, it can be seen that the amplitude A of the charged particle varies with the mass of the charged particle. Also, since changing the size or shape of the charged particle changes the effective cross-sectional area S on which the charged particle receives the force due to the acoustic oscillations from its surrounding media, the amplitude A of the charged particle is changed also by a change in the size or shape. Further, since a change in interaction force with the medium surrounding the charged particle becomes a change in mass M approximately, it can be seen that a change in interaction force also causes a change in amplitude A of the charged particle.

[0049] Assuming that e is the charge of the charged particle, the oscillations of the charged particle can be expressed as the harmonic oscillations of charge e by $P = eA \sin 2\pi\nu t$. The radiating power I(t) of electromagnetic waves radiating from the oscillation P in a unit time with the assumption that ϵ_0 : vacuum dielectric constant and c: velocity of light can be expressed by equation (4) below.

$$I(t) = \frac{1}{6\pi\epsilon_0 c^3} \left(\frac{d^2 P}{dt^2} \right)^2 \quad (4)$$

which if time averaged can yield equation (5) below.

$$I = \frac{1}{12\pi\epsilon_0 c^3} \left[(2\pi\nu)^2 eA \right]^2 = \frac{4\pi^3 e^2}{3\epsilon_0 c^3} \nu^4 A^2 \quad (5)$$

[0050] From equation (5) above, it can be seen that changing in amplitude A changes the radiating power of electromagnetic waves. Accordingly, from measurement of the acoustically induced electromagnetic waves it can be seen that the mass, size, shape or number of charges of charged particle or interaction force with its surrounding medium can also be determined. For instance, if it can be assumed from other information on the state of the measurable object or the knowledge gained by any other means that the concentration, mass, size, shape and number of charges are in the state that cannot be altered, a change in strength of electromagnetic waves measured can be tied to a change in interaction force with the medium surrounding the charged particle, for example to a change in polarizability of electrons or cations.

[0051] In the method of measuring a property of an object with the acoustically induced electromagnetic waves, the electric property that can be measured of the measurable object may be an electric field, a dielectric constant or a spatial gradient of electric field or dielectric constant.

[0052] Assuming that ρ : the density of charges which the measurable object possesses, ρ can be related to the electric field according to the Poisson's equation (Gauss' law) as follows:

$$\rho = \nabla D = \nabla \epsilon E = \nabla \epsilon \cdot E + \epsilon \cdot \nabla E \quad (6)$$

where D, ϵ and E are the electric flux density, dielectric constant and electric field, respectively.

[0053] Since acoustically induced electromagnetic waves are caused by change of the charge density with time ($\partial\rho/\partial t$) information on the charge density, namely on the electric flux density gradient can be acquired from the intensity of electromagnetic waves. Further, in case the electric field can be assumed to be spatially constant, then $\rho = \nabla \epsilon \cdot E$, the spatial gradient of dielectric constant can be obtained. In case the dielectric constant can be assumed to be constant, information on the electric field gradient can likewise be acquired. In other words, electromagnetic radiation is microscopically created by charge oscillation by charges which a measurable object possesses. Macroscopically, it can be considered that electromagnetic waves are radiated by the electric flux density, dielectric constant or electric field changing with time. Accordingly, in measuring a function of a living body, e. g., its brain function for analysis as well in accordance with the method of the present invention, the acoustically induced electromagnetic waves have their root cause in change of intra-corporeal ion distribution with time and, with a sound focused area taken into account which is more macroscopic than the ion scale, can be regarded as a means for measuring a change in electric flux density or electric field gradient due to a neural activity.

[0054] In the method of measuring a property of an object with the acoustically induced electromagnetic waves, a magnetization due to electron spin or nuclear spin as the magnetic property of the measurable object can be measured as stated below. As with the electric polarization, an electromagnetic radiation is generated by a magnetization changing with time. According to the Maxwell's equation, a radiant electric field is proportional to the second derivative with respect to time of a magnetization (see Non-patent Reference 8). It follows, therefore, that the magnitude and direction of a magnetization can be determined from the strength or phase of electromagnetic waves.

[0055] In the method of measuring a property of an object with the acoustically induced electromagnetic waves, an acousto-magnetic resonance due to electron spin or nuclear spin as the magnetic property of the measurable object can be measured as stated below. From the fact that acoustic waves can efficiently be absorbed at a certain particular resonance frequency to change the direction of electron spin or nuclear spin, it is anticipated that the strength or phase of electromagnetic waves largely varies at that frequency. As the information, the resonance frequency can then be fixed upon. The rest can be to scan, as in ESR (electron spin resonance) or NMR (nuclear magnetic resonance), frequencies of sound waves to obtain a spectrum, thereby making it possible to obtain information on electron spin or nuclear spin. Also, the relaxation time of electron spin or nuclear spin can be measured.

[0056] In the method of measuring a property of an object with the acoustically induced electromagnetic waves, a piezoelectric or magnetostriction property as the electromagnetic mechanical property of the measurable object can be

measured as stated below. An ionic crystal without inversion symmetry brings about an electric polarization according to its strain in principle. Thus, it is possible to derive the magnitude of a polarization from the intensity of acoustically induced electromagnetic waves. Scanning acoustic waves allows imaging a piezoelectric property of a measurable object. Further, it is possible to measure the piezoelectric tensor contactlessly without mounting an electrode on a measurable object from the direction of propagation of acoustic waves and the radiation distribution of electromagnetic waves. Since numerous bio-molecular crystals of bones or muscles in a living body have piezoelectric properties, their properties can be measured non-invasively. As for bones, there is a treatment which is said to heal a fracture sooner by irradiation with ultrasonic waves. There have been growing interest in researches on bones' piezoelectric properties. The method and apparatus of the present invention can provide a good application for piezoelectric properties of bio-specimens.

[0057] In the method of measuring a property of an object with the acoustically induced electromagnetic waves, a magnetostriction as the electromagnetic- magnetic property of the measurable object can be measured as stated below. The magnetostriction refers to a phenomenon that an electron orbit is altered by crystal strain to add a change to the electron spin magnetization through an orbit-spin interaction. Also, the crystal strain may bring about a change in crystal field splitting to alter the electron state, thereby altering the size of an electron spin magnetization. These changes with time are considered to generate electromagnetic waves. Therefore, it is possible to determine a relationship between the magnitude of magnetization, the orbit-spin interaction or the crystal strain and the sensitiveness of the electron orbit change or between the crystal field splitting and the strain sensitiveness or between the crystal field splitting and the electron spin state from the intensity of acoustically induced electromagnetic waves. It is possible to measure the magnetostriction tensor contactlessly and without mounting an electrode on the measurable object from the direction of propagation of acoustic waves and the intensity of radiation. The magnetostriction property can be imaged as can the piezoelectric property be.

[0058] According to the method of measuring a property of an object with acoustically induced electromagnetic waves, irradiating a measurable object with acoustic waves and measuring electromagnetic waves generated from the measurable object allow any one of properties of the object, including its electrical, magnetic and electromagnetic mechanical properties, to be determined from any one or a combination of strength, phase and frequency characteristics of the electromagnetic waves. Thus, the electric property can be determined of said measurable object, including a change or changes in one or more of property values for electric field, dielectric constant, spatial gradient of electric field and spatial gradient of dielectric constant and for concentration, mass, size, shape and number of charges of charged particles which the measurable object possesses and for interaction with a medium surrounding the charged particles. The magnetic property can be determined of said measurable object, including a property value for magnetization due to electron spin or nuclear spin in the measurable object or for acousto-magnetic resonance attributable to electron spin or nuclear spin in the measurable object. The electromagnetic mechanical property can be determined including a piezoelectric property or magnetostriction property of the measurable object.

[0059] An apparatus for measuring a property of an object with acoustically induced electromagnetic waves according to the present invention will be mentioned next.

[0060] Fig. 2 is a diagram illustrating the structure of an apparatus 21 for measuring a property of charged particles in an object by means of acoustically induced electromagnetic waves in accordance with the present invention. Using the Figure, an explanation is given of the structure and operation of the property measuring apparatus with the acoustically induced electromagnetic waves on the basis of charged particles which the object possesses.

[0061] The measuring apparatus 21 comprises an anechoic chamber 22, a retainer table 24 for holding thereon a measurable object 23 disposed in the anechoic chamber 22, an acoustic generator 25 disposed adjacent to or in contact with the object 23, an antenna 28 for receiving electromagnetic waves 27 generated from a region 23a on which acoustic waves 26 are focused that the acoustic generator 25 generates, and a control, measure and process unit 29 for controllably driving the acoustic generator 25 and measuring and processing electromagnetic wave signals 27 received by one or more of element antennas 28a of the antenna 28.

[0062] Here, the electromagnetic waves radiated from the measurable object 23 can be measured of their near field or non-near field, namely far field measurement. As will be described later, a magnetic field such as a near-field of the electromagnetic waves emitted from the measurable object 23 may be measured by SQUID. The antenna 28 may be an antenna of any type that is capable of detecting electromagnetic waves. For example, an antenna of every kind such as a loop antenna or array antenna or that made up of a looped or arrayed coil can be used.

[0063] To operate the measuring apparatus 21 of the present invention, the measurable object 23 is placed on the retainer table 24, acoustic waves are generated from the acoustic generator 25, and electromagnetic waves 27 radiated from the area 23a on which acoustic waves are focused are received by any one or more of the element antennas 28a of the array antenna or coil 28 for measurement at the control, measure and process unit 29. Also, scanning is effected over the area 23a where acoustic waves are focused and electromagnetic waves 27 are measured for each of the scanning positions to determine an intensity distribution of electromagnetic waves over a two-dimensional surface or a three-dimensional volume of the object.

[0064] While the element antennas 28a making up the array antenna 28 in Fig. 2 are shown disposed on a circumference in a cross section of the array antenna 8. The element antennas 28a are disposed at a uniform density thereof over 4π radians around the object 23 so that they can receive electromagnetic waves induced from any desired part of the object or electromagnetic waves induced, if acoustic waves are focused, from any desired direction.

[0065] A way of and an apparatus for focusing acoustic waves on a desired position on a measurable object will be explained next.

[0066] Fig. 3 shows a way of focusing acoustic waves. This way is called a phased array method. Acoustic wave pulses 26 generated individually by piezoelectric elements 25 arrayed in a row are focused by lagging and advancing acoustic wave pulses 26 in phase more than those from piezoelectric elements 25 lying towards the outside and inside of the row as shown. While the piezoelectric elements 25 are shown arrayed in a single row, they may be arrayed in a plurality of lines step by step so that acoustic wave pulses 26 generated by such piezoelectric elements 25 may, when shifted appropriately in phase, be focused over a three-dimensional volume of the measurable object.

[0067] Fig. 4 is a diagram illustrating an alternative way of focusing acoustic waves. This way is called an acoustic lens method. Piezoelectric elements 25 are disposed on a concaved surface with a curvature such that each point thereon has a normal focused on a focal point to generate acoustic wave pulses 26 simultaneously so that the individual acoustic wave pulses 26 propagate towards the focal point defined by the concaved surface and are thereby focused. By mechanically scanning the acoustic lens around a measurable object, it is possible to focus at a desired site over a three-dimensional volume of the measurable object. The two ways described above can also be combined.

[0068] Mention is made specifically of the measuring method and apparatus according to the present invention.

[0069] An explanation is first given of a first measuring method and apparatus according to the present invention.

[0070] Fig. 5 is a block diagram illustrating the structure of a control, measure and process unit used in the first measuring method of the present invention. Using the Figure, the structure and operation of the control, measure and process unit is described. The Figure shows the structure where acoustic waves for irradiation are narrow band pulses at a fixed frequency. In Fig. 5, the control, measure and process unit 30 is shown comprising an RF oscillator 31, a gate switch 32 for shaping an RF signal 31a output from the RF oscillator 31 into a pulsed signal 31b of fixed shape, a pulse generator 33 for turning the gate switch 32 on and off and an amplifier 34 for amplifying the pulsed signal 31b output from the gate switch 32 and feeding the pulsed signal 31b output from the amplifier 34 into the acoustic generator 25 for generating acoustic wave pulses 26.

[0071] The control, measure and process unit 30 also comprises a small signal amplifier 35 connected to the array antenna 28 for amplifying electromagnetic waves received by the array antenna 28, a mixer 36 for phase-detecting the electromagnetic waves from the small signal amplifier 35 with an oscillation frequency ν of the RF oscillator 31, a phase shifter 37 for controlling the phase of an oscillation frequency ν signal of the RF oscillator 31 to furnish therewith and control the mixer 36, an amplifier 38 for amplifying an electromagnetic wave signal passed through the mixer 36, a low-pass filter 39 for passing frequency components lower than at a fixed frequency selectively of the electromagnetic wave signal amplified by the amplifier 38, and a digital oscilloscope 40 for measuring the intensity of the electromagnetic wave signal passed through the low-pass filter 39 in synchronism with pulse generation timings produced by the pulse generator 33. Also, indicated by 33a is a signal line for synchronizing the pulse generator 33 and the digital oscilloscope 40.

[0072] The control, measure and process unit 30 also includes a personal computer 41. The RF oscillator 31, the pulse generator 33 and the digital oscilloscope 40 are connected to the personal computer 41. The personal computer 41 is used to control the RF signal 31a and the pulsed signal 31b, to acquire an electromagnetic wave signal measured by the digital oscilloscope 40 and to control measurement by the digital oscilloscope 40.

[0073] While in the description above the phase detection is shown as effected with the frequency of acoustic waves, it may be effected with the frequency of acoustic wave pulses in which case the phase shifter 37 may be connected to the pulse generator 33 to use the oscillation frequency of the pulse generator 33 as a reference signal.

[0074] While in the Figure the structure of a controller is shown in which only one acoustic generator is driven, where a desired site of the object is to have acoustic wave pulses focused thereon and to be scanned in position as described above, a plurality of acoustic generators as shown should be provided together with a plurality of controllers as shown whereby they are controllably driven. Using the phase detection which can exclude external noises contained in the other frequency components permits detecting even an extremely small change in intensity of electromagnetic waves. Also, with the phase detection which allows the phase of the reference signal to be varied with the phase shifter 37 and measured, it is possible to find which of positive or negative charged particles in oscillation the electromagnetic waves for measurement are based on according to the positive or negative sign of a measured value taken when the electromagnetic waves and the reference signal are matched in phase.

[0075] Also, by selecting the distance d between the acoustic generator 25 and the site of the object 23 to be irradiated with acoustic wave pulses to adjust the time period it takes an acoustic wave pulse to propagate over the distance d to be longer than the time duration of an acoustic wave pulse or adjusting the duration of the acoustic wave pulse to be shorter than that propagation time period, it is possible to ensure that the acoustically induced electromagnetic wave signal radiated from the object can be measured upon separation in time from electromagnetic noises produced when

the acoustic generator 25 generates acoustic wave pulses. In this case, as shown in Fig. 6, it is possible to measure a time dependent change in property value of charged particles contained in the object by measuring variations with time of the intensity of electromagnetic waves 43 detected subsequent to irradiation with an acoustic wave pulse 26. For example, a relaxation time by acoustic excitation of property value of the charged particles can be measured.

5 [0076] Mention is next made of a second measuring method and apparatus according to the present invention.

[0077] Fig. 7 is a block diagram illustrating the structure of a control, measure and process unit used in the second measuring method according to the present invention. The control, measure and process unit 50 differs from that in the structure shown in Fig. 1 that a lock-in amplifier 51 is disposed between the low-pass filter 39 and the digital oscilloscope 40. The lock-in amplifier 51 is used to detect, by locking-in, an electromagnetic wave signal passed through the low-pass filter 39 with the oscillation frequency μ of the pulse generator 33 used as a reference signal. Indicated by 42 is a signal line for supplying the lock-in amplifier 51 with the oscillation frequency μ of the pulse generator 33.

[0078] According to this method in which both the frequency ν of acoustic waves and the pulse period μ of acoustic wave pulses are used for phase detection, it is possible to further exclude external noises having the other frequency components and to detect even an extremely small change in intensity of electromagnetic waves.

15 [0079] Here, the lock-in amplifier comprises a gate switch and a narrowband amplifier for phase detection used for measurement based on the same measuring principles as those of phase detection. A lock-in amplifier has been marketed having a set of gate switch and narrowband amplifier for applications where the reference frequency for phase detection is low. Since the phase detection where the reference frequency is low is customarily called lock-in detection, the terms "lock-in amplifier" and "lock-in detection" are used here if the reference frequency for phase detection is low.

20 [0080] Mention is next made of a third measuring method and apparatus according to the present invention.

[0081] In a brain or muscle tissue of a living body, acoustic waves whose frequency is higher damp quickly and those of lower frequency reach deep. Consequently, measuring the frequency of electromagnetic waves acoustically induced makes it possible to find if their emission source is deep or shallow. This phenomenon is utilized in the third method of the present invention. This method can be found from the frequency determined of electromagnetic waves if their emission source is deep or shallow to enhance its position resolution depthwise in an acoustic wave focused part.

25 [0082] Fig. 8 is a block diagram illustrating the structure of a control, measure and process unit used in a third measuring method of the present invention. The control, measure and process unit 52 is devoid of the RF oscillator 31 in the structure of Fig. 1 and is configured so that a single pulse 53 generated from the pulse generator 33 is applied to the acoustic generator 25. The acoustic generator 25 may comprise, e.g., a piezoelectric element. When the single pulse 53 is applied to the piezoelectric element, the piezoelectric element will oscillate freely until its oscillation energy is dissipated to become zero. Acoustic wave pulse 54 by the free oscillations of the piezoelectric element is a wideband acoustic wave pulse in which frequencies are distributed over a wider range than with the narrowband acoustic wave pulse 31b in Fig. 1.

30 [0083] The control, measure and process unit 52 as shown has its measuring section comprising a first bandpass filter 55 for passing particular frequency components in an electromagnetic wave signal amplified by the small signal amplifier 35, the narrowband amplifier 38 for amplifying the frequency components transmitted through the first bandpass filter 55, a second bandpass filter 57 for passing particular frequency components in the frequency components amplified by the narrowband amplifier 38 and the digital oscilloscope 40 for integrating the frequency components passed through the second bandpass filter 57 to measure the intensity of electromagnetic waves.

35 [0084] In measurement using the control, measure and process unit 52, frequency components of an electromagnetic wave signal are roughly chosen through the first bandpass filter 55, of which frequency components are finely selected through the second bandpass filter 57. Intensities of the selected frequency components are measured of the electromagnetic wave signal to identify the frequency of the electromagnetic waves from the frequency exhibiting the maximum intensity. The depth-wise position can be determined in the acoustic wave focused part from a frequency of the measured electromagnetic waves.

40 [0085] According to this method, since acoustic waves higher in frequency quickly attenuate and acoustic waves lower in frequency reach deeper in a brain or muscle tissue of a living body, it is possible to know a depthwise position of the acoustic waves in their focused part from a frequency of the measured electromagnetic waves.

[0086] Mention is next made of a fourth measuring method and apparatus according to the present invention.

45 [0087] Fig. 9 is a block diagram illustrating the structure of a control, measure and process unit 60 used in a fourth measuring method of the present invention. The control, measure and process unit 60 has its measuring section which differs from that in the structure shown in Fig. 8 only in that between the second bandpass filter 57 and the digital oscilloscope 40 its control section includes a lock-in amplifier 61 that uses pulse generation timings of the pulse generator 33 as a reference frequency. Indicated at 62 is a signal line for supplying the lock-in amplifier 61 with pulse generation timings of the pulse generator 33 as a reference frequency.

50 [0088] In the third method, the intensity of electromagnetic waves is measured by integrating electromagnetic wave signals by means of the digital oscilloscope. This method integrates electromagnetic wave signals excluded of external noises by the lock-in amplifier 61 so that it can exclude external signals having other frequency components as well to

enable a further smaller change in intensity of electromagnetic waves than with the third method to be detected.

[0089] Mention is next made of a fifth measuring method and apparatus according to the present invention.

[0090] Fig. 10 is a block diagram illustrating the structure of a control, measure and process unit used in a fifth measuring method of the present invention, showing the apparatus structure at (a). At (b) there are shown generation timings of gate pulses 66 and acoustic generating pulses 69 produced by the pulse generator 33, those of acoustic waves 54 generated by the acoustic generator 25 and those of electromagnetic waves 27 induced in an object.

[0091] The control, measure and process unit 65 as shown in Fig. 10(a) has its measuring section comprising a small signal amplifier 35 for amplifying received electromagnetic waves 27, the gate switch 32 by which an electromagnetic wave signal amplified by the small signal amplifier 35 is passed for a duration of the gate pulse 66 produced by the pulse generator 33 and a spectrum analyzer 67 for displaying with a frequency signal the electromagnetic wave signal passed the gate switch 32. The spectrum analyzer 67 has a function to detect and memorize the signal intensity for each of frequency components. The function of the spectrum analyzer 67 can be processed by Fourier transformation at a processor equipped in the control, measure and process unit 65. A signal line 68 is provided to supply the gate switch 32 with gate pulses 66 and a signal line 33b is provided to synchronize the pulse generator in operation with the spectrum analyzer 67.

[0092] As can be seen from the upper waveform chart in Fig. 10(b), a gate pulse 66 occurs in a time interval between two successive acoustic wave generating pulses 69. The lower waveform chart shows a timing of generation of an acoustic wave pulse 54 produced at the acoustic generator 25 by an acoustic wave generating pulse 69 and a timing of generation of electromagnetic waves 27 induced upon arrival of the acoustic wave pulse 54 at the object 23. As shown, the gate pulse 66 and electromagnetic waves 27 are made coincident in timing of generation. And, signals introduced into the spectrum analyzer 67 are only in time intervals in which electromagnetic waves 27 are induced, thereby excluding external noises in the other time intervals and making it possible to detect a change extremely small in intensity of electromagnetic waves.

[0093] Mention is next made of a method of and an apparatus for determining a polarity of charges of a source of emission of electromagnetic waves in the case of using broadband acoustic wave pulses.

[0094] Fig. 11 is a block diagram illustrating the structure of a control, measure and process unit 75 used in determining a polarity of charges of a source of emission of electromagnetic waves in the case of using broadband acoustic wave pulses. The control, measure and process unit 75 has its measuring section comprising the small signal amplifier 35 that amplifies received electromagnetic waves, the mixer 36 by which the electromagnetic waves amplified at the small signal amplifier 35 are phase-detected with an oscillation frequency ν of the RF oscillator 31, a phase shifter 37 for controlling the phase of an oscillation frequency ν of the RF oscillator 31 for supply to control operation of the mixer 36, the amplifier 38 that amplifies an electromagnetic wave signal passed through the mixer 36, the low pass filter 39 that passes only components of frequencies less than a certain frequency among the electromagnetic signal amplified by the amplifier 38, and the digital oscilloscope 40 for measuring the intensity of an electromagnetic wave signal passed through the low pass filter 39.

[0095] Thus, in measurement, the reference signal is varied in phase by the phase shifter 37 until it is matched in phase with the electromagnetic wave signal; then finding if the measured value is positive or negative makes it possible to determine that the electromagnetic waves measured are based by the oscillations of positive charged particles or of negative charged particles.

[0096] Fig. 12 is a block diagram illustrating the structure of another control, measure and process unit 76 used in determining a polarity of charges of a source of emission of electromagnetic waves in the case of using broadband acoustic wave pulses. The control, measure and process unit 76 has its measuring section which is the same in structure as that in Fig. 11 except that a lock-in amplifier 77, in which reference signal is supplied from the oscillation frequency of the pulse generator 33, is included between the low pass filter 39 and the digital oscilloscope 40. 78 is a signal line to supply the oscillation frequency of the pulse generator 33 to the lock-in amplifier 77. Since this method compared with that of Fig.11 can exclude external noises having other frequency components, this method is able to determine the charge polarity if the electromagnetic waves are extremely small in intensity.

[0097] In the apparatus for measuring properties of an object with acoustically induced electromagnetic waves in accordance with the present invention, a magnetic field of electromagnetic waves from the measurable object 23 can be measured using a SQUID (superconducting quantum interference device). The SQUID is a device having one or two Josephson junctions in a ring formed of a superconductor. With one Josephson junction and with two Josephson junctions, it is referred to as RF-SQUID and DC-SQUID, respectively. The SQUID is a supersensitive magnetic sensor having a quantization phenomenon of superconductor and has a sensitivity more than hundred times compared with the conventional sensor. The SQUID is capable of detecting a feeble electric field as weak as one fifty-millionth of earth magnetism.

[0098] The control, measure and process unit 29, 30, 50, 52, 60, 65, 75, 76 mentioned above can be made up having a computer, a display and a memory. If a given time of a time sequence signal of acoustically induced electromagnetic waves is Fourier-transformed in an algorithm of the fast Fourier transformation (FFT) by the computer, the time of computation can then be shortened. Means for obtaining a Fourier spectrum to this end can be a DSP (digital signal

processor) or FFT unit which is exclusive or dedicated without recourse to a computer. Also, while as regards the signal processing such as amplifying and demodulating, individual circuit components and means for measuring frequencies have been shown variously, they can be substituted by an integrated circuit tailored for the receiver or DSP.

[0099] In the present method of measuring an object's property with acoustically induced electromagnetic waves, the magnetostriction property as an electromagnetic-magnetic property of the measurable object can be measured as stated below.

[0100] The magnetostriction is meant a phenomenon that crystal strain alters an electron orbit so that a change in spin magnetization is added through the orbit-spin interaction. Or, the crystal strain may cause a change in crystal field splitting which changes the electron state, thereby changing the magnitude of electron spin magnetization. A change in these with time is thought to generate electromagnetic waves. Accordingly, from the intensity of acoustically induced electromagnetic waves, it is possible to determine the magnitude of magnetization, the orbit-spin interaction or the relationship between the crystal strain and the sensitiveness of electron orbit change, between the crystal field splitting and the sensitiveness of strain or between the crystal field splitting and the electron spin state. From the acoustic propagation bearing and radiant intensity, it is possible to measure the magnetostriction tensor contactlessly or without an electrode mounted on the measurable object. As is the piezoelectric property, the magnetostriction property can be imaged.

[0101] According to a method of measuring a property of an object by acoustically induced electromagnetic waves, upon irradiating the measurable object with acoustic waves and measuring electromagnetic waves generated from the measurable object, it is possible to determine any of electric, magnetic and electromagnetic mechanical properties from any one or a combination of the intensity, phase and frequency characteristic of the electromagnetic waves.

[0102] Thus, as electric property of the measurable object, any one of electric field, dielectric constant, spatial gradient of electric field or dielectric constant, concentration, mass, size, shape and number of charges of charged particles that the measurable object possesses and interaction with their surrounding medium or a change or changes in one or more of these property values can be measured. As a magnetic property of the measurable object, magnetization due to electron spin or nuclear spin, or acousto-magnetic resonance due to electron spin or nuclear spin of the measurable object can be measured. As an electromagnetic mechanical property of the measurable object, piezoelectric or magnetostriction property of the measurable object can be measured.

[0103] Mention is next made supplementarily of the case that the method and apparatus of the present invention for measuring a property of an object is applied to identifying an active site in a brain.

[0104] The operating frequencies of piezoelectric element currently used for medical care are 3.5 MHz, 5 MHz, 7.5 MHz, 10 MHz and 30 MHz. Assuming that acoustic waves travel in a human body at a velocity of 1600 m/second, acoustic waves of 7.5 MHz come to have a wavelength of 213 μ m in a human body and, if used for a human body, can become focused on a region of about 213 μ m. It follows, therefore, that if the method of the present invention is applied to identifying an active site in a human brain using acoustic waves of frequency 7.5 MHz, it is then possible to identify the active site in the brain at a resolution of 213 μ m. The use of high-frequency acoustic waves of 100 MHz or more for the purpose of dealing with other than human bodies makes a resolution of 10 μ m or less possible.

[0105] Focusing acoustic waves has practically been applied in ways as shown in Figs. 3 and 4 to the medical field, e. g., used in a modern therapy without need for a surgical operation, such as extracorporeal shock wave lithotripsy (see Non-patent Reference 6) or treatment by high intensity focused ultrasound (see Non-patent Reference 7) used for cancer therapy. As for a brain, it is preferred to irradiate acoustic waves via an acoustic matching layer on the cranial bones which is less transmissive of acoustic waves. In so identifying an active area in a brain, the apparatus of the present invention for measuring an object's property with acoustically induced electromagnetic waves can be used for measurement. In this case, the measured data of brain's acoustically induced electromagnetic waves are separately taken and the recorded data can be analyzed by a computer.

Example 1

[0106] The present invention in further detail with reference to specific examples will be mentioned.

[0107] Fig. 13 diagrammatically illustrates the structure of an apparatus measuring a property of an object with acoustically induced electromagnetic waves in Example 1, showing at (a) the apparatus structure, at (b) a modification of ultrasonic probe and at (c) a waveform of ultrasonic waves, respectively.

[0108] As shown in Fig. 13(a), the measuring apparatus 21 comprises the anechoic chamber 22, the retainer table for holding thereon a measurable object 23 disposed in the anechoic chamber 22, the acoustic generator 25 disposed adjacent to or in contact with the object 23, a loop antenna 28 for receiving electromagnetic waves generated from a region 23a on which acoustic waves 26 are focused that the acoustic generator 25 generates, and the control, measure and process unit 29 (not shown) for controllably driving the acoustic generator and measuring and processing electromagnetic wave signals 27 received by the loop antennas 28. The acoustic generator 25 comprises a pulser (Panametrics Inc., model 5077PR) and an ultrasonic vibrator of polyvinylidene fluoride driven by this pulser. The pulser produced a

rectangular wave of 50 ns pulse width at a repetition frequency of 100 to 500 Hz (see Fig. 13(c)). The ultrasonic vibrator was spaced from the measurable object 23 at a distance of 50 to 70 mm across a water medium used. The acoustic waves traveling in water at a velocity of 1500 m/s, it turned out that electromagnetic waves ultrasonically generated from the measurable object 23 occurred every 33 to 47 μ s. The measurement by a broadband underwater microphone

indicated that the ultrasonic waves were focused on an area of 2 mm diameter at a position of the measurable object 23. [0109] At the output side of the loop antenna 28, there are a pair of tuning capacitors of variable capacitance whose output is input into a small signal amplifier via a line of coaxial cable or the like. As shown, the small signal amplifier is connected in turn to a first small signal amplifier having a voltage gain of 46 dB, a low pass filter, an attenuator, a second small signal amplifier having a voltage gain of 46 dB, an attenuator, a diode limiter and a third small signal amplifier having a voltage gain of 55 dB. The output of the third small signal amplifier is input to the digital oscilloscope.

Example 2

[0110] An apparatus for measuring a property of charged particles was prepared which was identical to that in Example 1 except that the output of the third small amplifier was heterodyne-detected. The mixer used was a double balanced mixer.

Example 3

[0111] Using a semiconductor made of GaAs crystal as the measurable object 23, acoustically induced electromagnetic waves were detected with the apparatus of Example 1 or 2 for measuring a property of charged particles.

[0112] Fig. 14 illustrates detected waveforms of acoustically induced electromagnetic waves from semiconductor GaAs crystal as the object 23, showing at (a) an ultrasonic waveform, at (b) a waveform obtained in the property measuring apparatus in Example 1 and at (c) a waveform obtained in a property measuring apparatus in Example 2. In the graph of Fig. 14, the abscissa axis represents time (in μ s) and the ordinate axis represents the signal intensity (in arbitrary scale). The GaAs used was a non-doped crystal of 350 μ m thickness. Its [110] axis was aligned in orientation with the direction of wave number vector k of the incident ultrasonic waves. The GaAs is a material whose piezoelectric coefficient is expressed by equation (7) below.

$$\left| d_{14}^{GaAs} \right| = 2.7 \text{ pC/N} \quad (7)$$

[0113] Accordingly, if the wave number vector of longitudinal acoustic mode of the GaAs is parallel to piezoelectric axis $\langle 110 \rangle$, it is predicted that electromagnetic waves are generated.

[0114] Fig. 14(a) shows an ordinary ultrasonic echo signal. It is seen that excitation (0 μ s) by a high-frequency pulse of about 9.25 MHz produces an ultrasonic echo with a delay of 88 μ s.

[0115] As is apparent from Fig. 14(b), an electromagnetic wave signal is seen to occur at 44 μ s that is one half of the period, namely at an instant when GaAs is irradiated with ultrasonic waves. This measurement was performed with the charged particles' property measuring apparatus of Example 1, where the small signal amplifier had an amplification degree of 82 dB and the digital oscilloscope had an integration of 200 pulses (in 1 second). The electromagnetic waves obtained from the GaAs had a peak to-peak signal intensity (Vp-p) of 68 μ V.

[0116] As is apparent from Fig. 14(c), an electromagnetic wave signal is seen to occur at 44 μ s that is one half of the period, at an instant when GaAs is irradiated with ultrasonic waves. This measurement was performed with the charged particles' property measuring apparatus of Example 2 using the heterodyne detection and gave rise to an electromagnetic wave signal more lucid than that shown in Fig. 14(c).

[0117] Fig. 15 illustrates detected waveforms of acoustically induced electromagnetic waves from a measurable object 23, showing at (a) waveform for Si crystal, and at (b) and (c) waveforms for GaAs crystals different in crystal arrangement. In Figs. 15(a) to Fig. 15(c), the abscissa axis represents time (in μ s) and the ordinate axis represents the signal intensity (in arbitrary scale).

[0118] From Fig. 15(a) where the measurable object is of Si, it is seen that no signal is detected. This is due to the fact that since Si is a single-element semiconductor, it does not exhibit a piezoelectric property.

[0119] Figs. 15(b) and Fig. 15(c) are shown that the ultrasonic wave number vector is oriented parallel to the (100) and (110) planes of GaAs crystal, respectively. When GaAs crystal is arranged to be excited by ultrasonic wave, it is seen that a high frequency signal is detected (see Fig. 15(c)).

[0120] The inserted figure in Fig. 15 is a graph illustrating a waveform of an electromagnetic wave signal generated from the GaAs crystal of Fig. 15(c) and transformed into a signal from a temporal range to a frequency range, specifically detected by the spectrum analyzer. In this inserted figure in Fig. 15, the abscissa axis represents the frequency (MHz) and the ordinate axis represents the signal intensity (arbitrary scale).

[0121] As is apparent from the inserted figure of Fig. 15, a high frequency signal of 7.60 MHz was observed. This high frequency signal occurred from the resonance oscillation waveform of ultrasonic waves of GaAs and had its Q (quality factor, also called voltage build-up rate) of about 10. The frequency of 7.60 MHz, with the acoustic propagation velocity in GaAs of 4730 m/s taken into account is presumed to be due to a mechanical resonance of one half wavelength corresponding to the thickness 350 μ m of GaAs.

Example 4

[0122] As Example 4, acoustically induced electromagnetic waves from a rib of a pig were detected. The bone is made up of 70 % of hydroxyapatite and 20 % of a fiber consisting of oriented collagen, of which it is known that the fiber consisting of oriented collagen has a piezoelectric coefficient expressed by equation (8) below.

$$|d^{bone}| \approx 0.1 \text{ pC/N} \quad (8)$$

[0123] As the measurable object 23, a hard tissue of outer bone and a soft tissue of inner bone were prepared from a 2 mm thick square plate of bone cut out of the rib. The axis of the tissues was paralleled to the surface of the plate. Such specimens were ultrasonically cleaned with an ethanol solution for 1 hour. For all the specimens, the vector of ultrasonic waves is made perpendicular to the tissue axis. Ultrasonic pulses had a repetition frequency of 500 Hz to irradiate each of the bone specimens with ultrasonic waves via water for detection of electromagnetic waves. The gain of the small signal amplifier had set to 97 dB. And, the digital oscilloscope was used for 10 minutes for signal detection.

[0124] Fig. 16(a) shows a detected waveform of acoustically induced electromagnetic waves from the hard tissue of pig's bone in Example 4, wherein the abscissa axis represents time (μ s) and the ordinate axis represents the signal intensity (arbitrary scale).

[0125] As is apparent from Fig. 16(a) it is seen that electromagnetic waves can be detected from a hard tissue of a pig's bone. The soft tissue of pig's bone was likewise measured and a waveform of electromagnetic waves as in Fig. 16(a) could be detected. The piezoelectric coefficient of a bone has so far been reported to markedly damp in water with ion screening. As shown in Example 4, however, it was found that electromagnetic waves could be detected from a specimen of bone disposed in water. This indicates that the ion screening which is a phenomenon slower than in a MHz frequency band is negligible in the use of high frequency pulses of about 10 MHz level as in the present invention.

Example 5

[0126] As Example 5, electromagnetic waves from timber were detected, wherein the timber was irradiated with ultrasonic waves caused to propagate through a plastic tube (see Fig. 13(b)) as an ultrasonic probe. Fig. 16(b) is a chart illustrating a detected waveform of acoustically induced electromagnetic waves from timber in Example 5. In Fig. 16(b), the abscissa axis represents time (μ s) and the ordinate axis represents the signal intensity (arbitrary scale). As is apparent from Fig. 16(b), it is seen that electromagnetic waves from timber can be detected. In this case it is presumed that timber which has cellulose as its main component which exhibits piezoelectricity brings about electromagnetic waves.

Example 6

[0127] As Example 6, acoustically induced electromagnetic waves were detected in a setup identical to that in Example 5 except that the measurable object 23 was of polypropylene as a plastic material.

[0128] Fig. 16(c) shows a detected waveform of acoustically induced electromagnetic waves from polypropylene in Example 6. In Fig. 16(c), the abscissa axis represents time (μ s) and the ordinate axis represents the signal intensity (arbitrary scale). As is apparent from Fig. 16(c), it is seen that electromagnetic waves from polypropylene can be detected though its signal is extremely weak. In this case, it is presumed that polypropylene which is piezoelectric but feeble in signal output generates electromagnetic waves from crystallized grains.

Example 7

[0129] As Example 7, acoustically induced electromagnetic waves were detected in a setup identical to that in Example 5 except that the measurable object was of aluminum.

[0130] Fig. 16(d) shows a detected waveform of acoustically induced electromagnetic waves from aluminum in Example 7. In Fig. 16(d), the abscissa axis represents time (μ s) and the ordinate axis represents the signal intensity (arbitrary scale). As is apparent from Fig. 16(d), it is seen that very strong electromagnetic waves from aluminum can be detected.

In the case of aluminum in which the longitudinal waves in their acoustic mode change the bottom of a valence band via a potential modified interaction, it is presumed that electromagnetic waves are generated by this action causing the conduction electrons to be given a displacement repetitively.

5 Example 8

[0131] As Example 8, acoustically induced electromagnetic waves were detected in a setup identical to that in Example 5 except that the measurable object was of copper. As a result, it was found that very strong electromagnetic waves from copper as from aluminum could be detected.

10

Example 9

[0132] As Example 9, acoustically induced electromagnetic waves from ferrite magnets composed of SrO and Fe₂O₃ were detected.

15

[0133] Fig. 17 shows a detected waveform of acoustically induced electromagnetic waves from the ferrite magnet in Example 9. In Fig. 17, the abscissa axis represents time (μ s) and the ordinate axis at the left hand side represents the intensity of high frequency signal of 8 MHz detected while the ordinate axis at the right hand side represents the intensity (arbitrary scale) of ultrasonic echo signal detected. It is seen that in a time range prior to arrival of acoustic waves at the specimen, the electromagnetic waves are low in noise level but subsequent to arrival of acoustic waves at the measurable object, the electromagnetic waves grows in background level over a long time. This suggests that the acoustic waves once entering inside of ferrite repeat reflection back and forth inside of the measurable object. As a result, it is presumed that the electromagnetic waves continue to be radiated over a time much longer than the acoustic waves are irradiated. Thus, from Example 9 it was found that acoustically induced electromagnetic waves could be detected from the measurable object if composed of a magnetic material, too.

20

25

[0134] The present invention is not limited to specific examples as mentioned above and allows various modifications within the scope of the invention set forth in the appended claims, which should, needless to say, fall within the scope of the invention.

Industrial Applicability

30

[0135] As will be appreciated from the foregoing description, the use of a method and apparatus of the present invention in which a measurable object is irradiated with acoustic waves and electromagnetic waves emitted from the measurable object are measured, allows any of electric, magnetic and electromagnetic mechanical properties of the measurable object to be determined from one or a combination of intensity, phase and frequency characteristic of the electromagnetic waves.

35

[0136] Thus, as the electric property of a measurable object, a change or changes in one or more of property values for electric field, dielectric constant, spatial gradient of electric field and spatial gradient of dielectric constant, for concentration, mass, size, shape and number of charges of charged particles which the measurable object possesses and for interaction with a medium surrounding the charged particles can be measured. As the magnetic property of a measurable object, a property value for magnetization due to electron spin or nuclear spin in the measurable object or for acousto- magnetic resonance attributable to electron spin or nuclear spin in the measurable object can be measured. As the electromagnetic mechanical property of a measurable object, a piezoelectric property or magnetostriction property of said measurable object can be measured. Since a change or changes in one or more of property values for concentration, mass, size, shape and number of charges of charged particles which the measurable object possesses and for interaction with a medium surrounding the charged particles can thus be measured, measurement of a change or changes in these property values in a living body, colloidal solution, liquid crystal, solid electrolyte, ionic crystal, semiconductor, dielectric, metal, magnetic material and magnetic fluid or a composite material thereof or a structure or a functional device composed of such a material allows aiding in clarification of a related phenomenon. Especially, using the present invention in the determination of an active site in a brain makes it possible to identify an activated site at an extremely high position resolution and hence is extremely useful.

40

45

50

Claims

55

1. A method of measuring a property of an object (23) with acoustically induced electromagnetic waves (27), comprising the steps of:

irradiating the measurable object (23) with acoustic waves (26) in the form of acoustic wave pulses; and

measuring electromagnetic waves (27) generated from said measurable object (23) to determine any one of properties of the object (23), including its electrical, magnetic and electromagnetic mechanical properties, from any one or a combination of strength, phase and frequency characteristics of said electromagnetic waves, wherein the method further comprises:

5

placing the measurable object (23) at a distance (d) from a source of emission (25) of said acoustic wave pulses and emitting said acoustic wave pulses from said emission source (25) towards said measurable object (23), wherein the distance (d) is such that the time it takes said acoustic wave pulses to propagate over the distance (d) is longer than a pulse duration of said acoustic wave pulses,

10

measuring said electromagnetic waves (27) of time dependence of their intensity detected subsequent to irradiation with said acoustic wave pulses, and

characterised by determining a relaxation characteristic of a property value for charged particles (3, 4) which said measurable object (23) possesses.

15

2. A method according to claim 1, wherein the electric property determined of said measurable object (23) includes a change or changes in one or more of property values for electric field, dielectric constant, spatial gradient of electric field and spatial gradient of dielectric constant and for concentration, mass, size, shape and number of charges of charged particles (3, 4) which said measurable object (23) possesses and for interaction with a medium surrounding said charged particles (3, 4).

20

3. A method according to claim 1, wherein the property determined of said measurable object (23) includes:

a property value for magnetization due to electron spin or nuclear spin in said measurable object (23) or for acousto- magnetic resonance attributable to electron spin or nuclear spin in said measurable object (23); or a piezoelectric property or magnetostriction property of said measurable object (23).

25

4. A method according to claim 1, wherein from phase information of said phase detection it is determined whether said electromagnetic wave signals are originated from positively charged particles (3) or negatively charged particles (4) possessed by said object (23) to be measured.

30

5. A method according to claim 1, wherein a signal of said electromagnetic waves is measured that is isolated with respect to time from electromagnetic noises occurring at said emission source (25) by choosing a time period for said acoustic wave pulses to propagate over said distance (d) so as to be longer than the pulse duration of said acoustic wave pulses or by making said pulse duration shorter than said time period for the acoustic wave pulses to propagate.

35

6. A method according to any of claims 1 to 3, wherein said measurable object (23) is irradiated with acoustic waves by focusing acoustic waves from a plurality of sources on a desired small part (23a) of said measurable object (23) and electromagnetic waves induced at said small part (23a) are measured with an antenna or coil means (28) disposed to surround said measurable object (23) whereby acoustic waves are focused on a desired part from a desired direction and electromagnetic waves radiated from a desired position towards a desired direction is measured while their radiation bearing distribution is determined.

40

7. A method according to claim 6, wherein focusing acoustic waves are scanned over a two-dimensional surface or three-dimensional volume of said measurable object (23) and an intensity of induced electromagnetic waves at each scanning position is measured using an antenna or coil means (28) surrounding said measurable object (23) to determine a two-dimensional or three-dimensional distribution of changes in a property value of charged particles (3, 4) of said object (23).

45

8. A method according to any of claims 1 to 3, wherein said acoustic waves (26) are applied in the form of broadband ultrashort pulses and the frequency of said electromagnetic waves (27) is measured and from the measured frequency of electromagnetic waves, information is derived on depthwise position of charged particles (3, 4) generating the electromagnetic waves.

50

9. A method according to any preceding claim, wherein said measurable object (23) is of any one of materials selected from the group which consists of colloidal solution, liquid crystal, solid electrolyte, ionic crystal, semiconductor, dielectric, metal, magnetic material and magnetic fluid or a composite material thereof or a structure or a functional device composed of such a material, in which a change in property value of charged particles (3, 4) is measured.

55

10. An apparatus (21) for measuring a property of an object (23) with acoustically induced electromagnetic waves (27), the apparatus comprising:

5 a retainer table (24) for holding a measurable object (23),
 an acoustic generator (25) disposed adjacent to said object (23),
 an antenna or coil means (28) for receiving electromagnetic waves (27) generated from a part (23a) which is irradiated with acoustic waves (26) or pulses produced by said acoustic generator, and
 a control, measure and process unit (29, 30, 50, 52, 60, 65, 75, 76) for driving and controlling said acoustic generator and for measuring and processing electromagnetic waves received by said antenna or coil means;
 10 wherein
 the control, measure and process unit is configured to control the acoustic generator to produce acoustic wave pulses, to determine the time dependence of the intensity of the electromagnetic waves subsequent to irradiation with said acoustic wave pulses, wherein
 15 a distance (d) between said acoustic generator (25) and said measurable object (23) is such that the time it takes said acoustic wave pulses to propagate over the distance (d) is longer than a pulse duration of said acoustic wave pulses, wherein the control, measure and process unit is configured to determine a relaxation characteristic of a property value for charged particles which said object possesses.

11. An apparatus according to claim 10, wherein said acoustic generator (25) comprises a plurality of acoustic generators or a plurality of acoustic generators fixed on a concaved surface whose normal is focused on a point whereby acoustic wave pulses generated from said acoustic generators (25) are controlled of their mutual phase by said control, measure and process unit (29, 30, 50, 52, 60, 65, 75, 76) to be focused on a desired position of said measurable object (23) and the focusing position of acoustic waves is scanned over a two-dimensional surface or three-dimensional volume of said measurable object (23) or said acoustic generators (25) are scanned mechanically
 20 around said measurable object (23) to scan the focusing position of acoustic waves over a two-dimensional surface or three-dimensional volume of said measurable object (23).
 25

12. An apparatus according to claim 10 or claim 11, wherein said control, measure and process unit (29, 30, 50, 52, 60, 65, 75, 76) includes a SQUID for detecting a magnetic field.
 30

13. An apparatus according to claim 10 or claim 11, wherein said control, measure and process unit (29, 30, 50, 52, 60, 65, 75, 76) includes a means by which electromagnetic waves received by said antenna or coil means (28) are heterodyne- or phase-detected with a frequency of said acoustic waves, and means by which an electromagnetic wave signal so detected is locked in with a pulse frequency of said acoustic wave pulses and thereby detected.
 35

14. An apparatus according to claim 10 or claim 11, wherein said control, measure and process unit (29, 30, 50, 52, 60, 65, 75, 76) comprises a means for causing broadband ultrashort pulses to be generated from said acoustic generator (25) and a means for measuring a frequency of electromagnetic waves received by said antenna or coil means (28).
 40

Patentansprüche

1. Verfahren zum Messen eine Eigenschaft eines Objekts (23) mit akustisch induzierten elektromagnetischen Wellen (27), umfassend die Schritte:
 45

Bestrahlen des messbaren Objekts (23) mit akustischen Wellen (26) in Form von akustischen Wellenimpulsen und
 Messen von elektromagnetischen Wellen (27), die von dem messbaren Objekt (23) generiert werden, um eine beliebige von Eigenschaften des Objekts (23), einschließlich seiner elektrischen, magnetischen und elektro-
 50 magnetischen mechanischen Eigenschaften, aus einer beliebigen oder einer Kombination der Stärke-, Phase- und Frequenz-Charakteristiken der elektromagnetischen Wellen zu ermitteln, wobei das Verfahren des Weiteren umfasst:

55 Platzieren des messbaren Objekts (23) in einer Distanz (d) von einer Emissionsquelle (25) der akustischen Wellenimpulse und Emittieren der akustischen Wellenimpulse von der Emissionsquelle (25) in Richtung des messbaren Objekts (23), wobei die Distanz (d) so ist, dass die Zeit, die die akustischen Wellenimpulse brauchen, um sich über die Distanz (d) auszubreiten, länger ist, als eine Impulsdauer der akustischen

Wellenimpulse,

Messen der elektromagnetischen Wellen (27) nach Zeitabhängigkeit ihrer Intensität, die nach der Bestrahlung mit den akustischen Wellenimpulsen detektiert wurde, und

gekennzeichnet durch

Ermitteln einer Relaxationscharakteristik eines Eigenschaftswerts für geladene Partikel (3, 4), welche das messbare Objekt (23) besitzt.

2. Verfahren nach Anspruch 1, wobei die von dem messbaren Objekt (23) ermittelte elektrische Eigenschaft eine Veränderung oder Veränderungen in einer oder mehreren Eigenschaftswerten für elektrisches Feld, dielektrische Konstante, Raumgradient des elektrischen Felds und Raumgradient der dielektrischen Konstante und für Konzentration, Masse, Größe, Form und Anzahl von Ladungen von geladenen Partikeln (3, 4), welche das messbare Objekt (23) besitzt, und für Interaktion mit einem Medium, das die geladenen Partikel (3, 4) umgibt, enthält.
3. Verfahren nach Anspruch 1, wobei die von dem messbaren Objekt (23) ermittelte Eigenschaft enthält:
 - einen Eigenschaftswert für Magnetisierung aufgrund von Elektronenspin oder Kernspin in dem messbaren Objekt (23) oder für dem Elektronenspin oder Kernspin zuordenbare akustomagnetische Resonanz in dem messbaren Objekt (23), oder
 - eine piezoelektrische Eigenschaft oder Magnetostruktions-Eigenschaft des messbaren Objekts (23).
4. Verfahren nach Anspruch 1, wobei aus der Phaseninformation der Phasendetektion ermittelt wird, ob die elektromagnetischen Wellensignale von positiv geladenen Partikeln (3) oder negativ geladenen Partikeln (4) stammen, die das zu messende Objekt (23) besitzt.
5. Verfahren nach Anspruch 1, wobei ein Signal der elektromagnetischen Wellen gemessen wird, das bezüglich Zeit von elektromagnetischem Rauschen isoliert ist, das an der Emissionsquelle (25) auftritt, indem eine Zeitperiode, die die akustischen Wellenimpulse benötigen, sich über die Distanz (d) auszubreiten, gewählt wird, länger zu sein, als die Impulsdauer der akustischen Wellenimpulse oder indem die Impulsdauer kürzer gemacht wird als die Zeitperiode, die die akustischen Wellenimpulse benötigen, sich auszubreiten.
6. Verfahren nach einem der Ansprüche 1 bis 3, wobei das messbare Objekt (23) mit akustischen Wellen bestrahlt wird, indem akustische Wellen von einer Mehrzahl von Quellen auf einen gewünschten kleinen Teil (23a) des messbaren Objekts (23) fokussiert werden, und an dem kleinen Teil (23a) induzierte elektromagnetische Wellen mit einer Antennen- oder Spuleneinrichtung (28), die angeordnet ist, das messbare Objekt (23) zu umgeben, gemessen werden, wobei akustische Wellen auf einen gewünschten Teil aus einer gewünschten Richtung fokussiert werden und elektromagnetische Wellen, die von einer gewünschten Position in einer gewünschten Richtung abgestrahlt werden, gemessen werden, während ihre Strahlungslageverteilung ermittelt wird.
7. Verfahren nach Anspruch 6, wobei fokussierende akustische Wellen über eine zweidimensionale Oberfläche oder ein dreidimensionales Volumen des messbaren Objekts (23) abgetastet werden und eine Intensität von induzierten elektromagnetischen Wellen an jeder Abtastposition unter Verwendung einer Antennen- oder Spuleneinrichtung (28), die das messbare Objekt (23) umgibt, gemessen wird, um eine zweidimensionale oder dreidimensionale Verteilung von Änderungen in einem Eigenschaftswert von geladenen Partikeln (3, 4) des Objekts (23) zu ermitteln.
8. Verfahren nach einem der Ansprüche 1 bis 3, wobei die akustischen Wellen (26) in Form von Breitband-Ultrakurzimpulsen angewendet werden und die Frequenz der elektromagnetischen Wellen (27) gemessen wird und aus der gemessenen Frequenz von elektromagnetischen Wellen Informationen zur Tiefenposition von geladenen Partikeln (3, 4), die die elektromagnetischen Wellen generieren, abgeleitet werden.
9. Verfahren nach einem vorhergehenden Anspruch, wobei das messbare Objekt (23) ein beliebiges von Materialien ist, ausgewählt aus der Gruppe, welche besteht aus kolloidaler Lösung, Flüssigkristall, Festelektrolyt, Ionenkristall, Halbleiter, Dielektrikum, Metall, magnetischem Material und magnetischem Fluid oder einem Verbundmaterial davon oder einer Struktur oder einer funktionalen Vorrichtung, die aus einem solchen Material zusammengesetzt ist, in welchem eine Veränderung im Eigenschaftswert von geladenen Partikeln (3, 4) gemessen wird.
10. Vorrichtung (21) zum Messen eine Eigenschaft eines Objekts (23) mit akustisch induzierten elektromagnetischen Wellen (27), wobei die Vorrichtung umfasst:

einen Halteisch (24) zum Halten eines messbaren Objekts (23),
 einen akustischen Generator (25), der benachbart zu dem Objekt (23) angeordnet ist,
 eine Antennen- oder Spuleneinrichtung (28) zum Empfangen von elektromagnetischen Wellen (27), die von
 einem Teil (23a) generiert werden, welcher mit von dem akustischen Generator produzierten akustischen Wellen
 (26) oder Impulsen bestrahlt wird,
 eine Steuer-, Mess- und Verarbeitungseinheit (29, 30, 50, 52, 60, 65, 75, 76) zum Antreiben und Steuern des
 akustischen Generators und zum Messen und Verarbeiten von von der Antennen- oder Spuleneinrichtung
 empfangenen elektromagnetischen Wellen,
 wobei die Steuer-, Mess- und Verarbeitungseinheit eingerichtet ist, den akustischen Generator zu steuern, um
 akustische Wellenimpulse zu produzieren, um die Zeitabhängigkeit der Intensität der elektromagnetischen Wel-
 len nach Bestrahlung mit den akustischen Wellenimpulsen zu ermitteln,
 wobei eine Distanz (d) zwischen dem akustischen Generator (25) und dem messbaren Objekt (23) so ist, dass
 die Zeit, die die akustischen Wellenimpulse brauchen, sich über die Distanz (d) auszubreiten, länger ist als eine
 Impulsdauer der akustischen Wellenimpulse, wobei die Steuer-, Mess- und Verarbeitungseinheit eingerichtet
 ist, eine Relaxationscharakteristik eines Eigenschaftswerts für geladene Partikel zu ermitteln, welche das Objekt
 besitzt.

11. Vorrichtung nach Anspruch 10, wobei der akustische Generator (25) eine Mehrzahl von akustischen Generatoren
 oder eine Mehrzahl von akustischen Generatoren fixiert auf einer konkaven Oberfläche, deren Normale auf einen
 Punkt fokussiert ist, umfasst, wobei
 akustische Wellenimpulse, die von den akustischen Generatoren (25) generiert werden, von der Steuer-, Mess-
 und Verarbeitungseinheit (29, 30, 50, 52, 60, 65, 75, 76) in ihrer gegenseitigen Phase gesteuert werden, um auf
 eine gewünschte Position des messbaren Objekts (23) fokussiert zu sein, und die fokussierte Position von akusti-
 schen Wellen über eine zweidimensionale Oberfläche oder ein dreidimensionales Volumen des messbaren Objekts
 (23) abgetastet wird oder die akustischen Generatoren (25) mechanisch um das messbare Objekt (23) herum
 abgetastet werden, um die fokussierte Position von akustischen Wellen über einer zweidimensionalen Oberfläche
 oder einem dreidimensionalen Volumen des messbaren Objekts (23) abzutasten.
12. Vorrichtung nach Anspruch 10 oder Anspruch 11, wobei die Steuer-, Mess- und Verarbeitungseinheit (29, 30, 50,
 52, 60, 65, 75, 76) einen SQUID zum Detektieren eines magnetischen Felds enthält.
13. Vorrichtung nach Anspruch 10 oder Anspruch 11, wobei die Steuer-, Mess- und Verarbeitungseinheit (29, 30, 50,
 52, 60, 65, 75, 76) eine Einrichtung enthält, mit welcher von der Antennen- oder Spuleneinrichtung (28) empfangene
 elektromagnetische Wellen mit einer Frequenz der akustischen Wellen heterodyn- oder phasen-detektiert werden,
 und eine Einrichtung, mit welcher ein Lock-in eines so detektierten elektromagnetischen Wellensignals mit einer
 Impulsfrequenz der akustischen Wellenimpulse erfolgt und es dadurch detektiert wird.
14. Vorrichtung nach Anspruch 10 oder Anspruch 11, wobei die Steuer-, Mess- und Verarbeitungseinheit (29, 30, 50,
 52, 60, 65, 75, 76) eine Einrichtung zum Bewirken von Breitband-Ultrakurzimpulsen umfasst, die von dem akusti-
 schen Generator (25) erzeugt werden sollen, und eine Einrichtung zum Messen einer Frequenz von elektromag-
 netischen Wellen, die von der Antennen- oder Spuleneinrichtung (28) empfangen werden.

Revendications

1. Procédé de mesure d'une propriété d'un objet (23) avec des ondes électromagnétiques induites acoustiquement
 (27), comprenant les étapes consistant à :

irradier l'objet mesurable (23) avec des ondes acoustiques (26) sous la forme d'impulsions d'ondes acoustiques ;
 et
 mesurer des ondes électromagnétiques (27) générées à partir dudit objet mesurable (23) de façon à déterminer
 l'une quelconque de propriétés de l'objet (23), comprenant ses propriétés électriques, magnétiques, électro-
 magnétiques et mécaniques, à partir de l'une quelconque ou d'une combinaison des caractéristiques de force,
 de phase et de fréquence desdites ondes électromagnétiques, le procédé comprenant de plus :

le fait de disposer l'objet mesurable (23) à une distance (d) par rapport à une source d'émission (25) desdites
 impulsions d'ondes acoustiques et l'émission desdites impulsions d'ondes acoustiques à partir de ladite
 source d'émission (25) vers ledit objet mesurable (23), la distance (d) étant telle que le temps que mettent

lesdites impulsions d'ondes acoustiques pour se propager sur la distance (d) est plus long qu'une durée d'impulsion desdites impulsions d'ondes acoustiques,

la mesure desdites ondes électromagnétiques (27) vis-à-vis de la dépendance vis-à-vis du temps de leur intensité détectée après l'irradiation avec lesdites impulsions d'ondes acoustiques, et

5 **caractérisé par :**

la détermination d'une caractéristique de relaxation d'une valeur de propriété pour des particules chargées que possède ledit objet mesurable (23).

10 **2.** Procédé selon la revendication 1, dans lequel la propriété électrique déterminée dudit objet mesurable (23) comprend un changement ou des changements dans une ou plusieurs valeurs de propriété pour le champ électrique, la constante diélectrique, le gradient spatial de champ électrique et le gradient spatial de constante diélectrique et pour la concentration, la masse, la taille, la forme et le nombre de charges de particules chargées (3, 4) que possède ledit objet mesurable (23) et pour l'interaction avec un milieu entourant lesdites particules chargées (3, 4).

15 **3.** Procédé selon la revendication 1, dans lequel la propriété déterminé dudit objet mesurable (23) comprend :

une valeur de propriété pour la magnétisation due à un spin d'électron ou à un spin nucléaire dans ledit objet mesurable (23) ou pour une résonance acousto-magnétique pouvant être attribuée à un spin d'électron ou à un spin nucléaire dans ledit objet mesurable (23) ; ou
 20 une propriété piézoélectrique ou une propriété de magnétostriction dudit objet mesurable (23).

25 **4.** Procédé selon la revendication 1, dans lequel, à partir d'une information de phase de ladite détection de phase, il est déterminé si lesdits signaux d'ondes électromagnétiques ont pour origine des particules chargées de façon positive (3) ou des particules chargées de façon négative (4) possédées par ledit objet (23) devant être mesuré.

30 **5.** Procédé selon la revendication 1, dans lequel il est mesuré un signal desdites ondes électromagnétiques qui est isolé, vis-à-vis du temps, de bruits électromagnétiques se produisant au niveau de ladite source d'émission (25) par le choix d'une période de temps pendant laquelle lesdites impulsions d'ondes acoustiques se propagent sur ladite distance (d) de telle sorte qu'elle soit plus longue que la durée d'impulsion desdites impulsions d'ondes acoustiques, ou par le fait de rendre ladite durée d'impulsion plus courte que ladite période de temps pendant laquelle les impulsions d'ondes acoustiques se propagent.

35 **6.** Procédé selon l'une quelconque des revendications 1 à 3, dans lequel ledit objet mesurable (23) est irradié avec des ondes acoustiques par focalisation d'ondes acoustiques à partir d'une pluralité de sources sur une petite partie désirée (23a) dudit objet mesurable (23), et des ondes électromagnétiques induites dans ladite petite partie (23a) sont mesurées avec des moyens formant antenne ou enroulement (28) disposés de façon à entourer ledit objet mesurable (23), grâce à quoi des ondes acoustiques sont focalisées sur une partie désirée à partir d'une direction désirée et des ondes électromagnétiques rayonnées à partir d'une position désirée vers une direction désirée sont mesurées tandis que leur distribution de portée de rayonnement est déterminée.

40 **7.** Procédé selon la revendication 6, dans lequel des ondes acoustiques de focalisation sont amenées à balayer une surface en deux dimensions ou un volume en trois dimensions dudit objet mesurable (23) et une intensité d'ondes électromagnétiques induites dans chaque position de balayage est mesurée à l'aide de moyens formant antenne ou enroulement (28) entourant ledit objet mesurable (23) de façon à déterminer une distribution en deux dimensions ou en trois dimensions de changements dans une valeur de propriété de particules chargées (3, 4) dudit objet (23).

45 **8.** Procédé selon l'une quelconque des revendications 1 à 3, dans lequel lesdites ondes acoustiques (26) sont appliquées sous la forme d'impulsions ultra-courtes à large bande et la fréquence desdites ondes électromagnétiques (27) est mesurée, et, à partir de la fréquence mesurée d'ondes électromagnétiques, il est dérivé une information concernant une position dans le sens de la profondeur de particules chargées (3, 4) générant les ondes électromagnétiques.

50 **9.** Procédé selon l'une quelconque des revendications précédentes, dans lequel ledit objet mesurable (23) est l'un quelconque parmi des matériaux sélectionnés parmi le groupe qui comprend une solution colloïdale, un cristal liquide, un électrolyte solide, un cristal ionique, un semiconducteur, un diélectrique, un métal, un matériau magnétique et un fluide magnétique ou un matériau composite de ceux-ci ou une structure ou un dispositif fonctionnel constitué par un tel matériau, dans lequel un changement dans une valeur de propriété de particules chargées (3, 4) est mesuré.

10. Appareil (21) pour mesurer une propriété d'un objet (23) avec des ondes électromagnétiques induites acoustiquement (27), l'appareil comprenant :

5 une table de maintien (24) pour supporter un objet mesurable (23),
un générateur acoustique (25) disposé au voisinage dudit objet (23),
des moyens formant antenne ou enroulement (28) pour recevoir des ondes électromagnétiques (27) générées à partir d'une partie (23a) qui est irradiée par des ondes acoustiques (26) ou des impulsions produites par ledit générateur acoustique, et
10 une unité de commande, de mesure et de traitement (29, 30, 50, 52, 60, 65, 75, 76) pour entraîner et commander ledit générateur acoustique et pour mesurer et traiter des ondes électromagnétiques reçues par lesdits moyens formant antenne ou enroulement ; dans lequel :

15 l'unité de commande, de mesure et de traitement est configurée de façon à commander le générateur acoustique afin de produire des impulsions d'ondes acoustiques, afin de déterminer la dépendance vis-à-vis du temps de l'intensité des ondes électromagnétiques après l'irradiation avec lesdites impulsions d'ondes acoustiques, dans lequel :

20 une distance (d) entre ledit générateur acoustique (25) et ledit objet mesurable (23) est telle que le temps que mettent lesdites impulsions d'ondes acoustiques pour se propager sur la distance (d) soit plus long qu'une durée d'impulsion desdites impulsions d'ondes acoustiques, l'unité de commande, de mesure et de traitement étant configurée de façon à déterminer une caractéristique de relaxation d'une valeur de propriété pour des particules chargées que possède ledit objet.

- 25 11. Appareil selon la revendication 10, dans lequel ledit générateur acoustique (25) comprend une pluralité de générateurs acoustiques ou une pluralité de générateurs acoustiques fixés sur une surface concave dont la normale est focalisée sur un point, grâce à quoi :

30 des impulsions d'ondes acoustiques générées à partir desdits générateurs acoustiques (25) sont commandées vis-à-vis de leur phase mutuelle par ladite unité de commande, de mesure et de traitement (29, 30, 50, 52, 60, 65, 75, 76) de façon à être focalisées sur une position désirée dudit objet mesurable (23) et la position de focalisation d'ondes acoustiques est amenée à balayer une surface en deux dimensions ou un volume en trois dimensions dudit objet mesurable (23) ou lesdits générateurs acoustiques (25) sont amenés à effectuer mécaniquement un balayage autour dudit objet mesurable (23) de façon à balayer la position de focalisation d'ondes acoustiques sur une surface en deux dimensions ou un volume en trois dimensions dudit objet mesurable (23).

- 40 12. Appareil selon la revendication 10 ou la revendication 11, dans lequel ladite unité de commande, de mesure et de traitement (29, 30, 50, 52, 60, 65, 75, 76) comprend un dispositif d'interférence quantique à supraconducteurs pour détecter un champ magnétique.

- 45 13. Appareil selon la revendication 10 ou la revendication 11, dans lequel ladite unité de commande, de mesure et de traitement (29, 30, 50, 52, 60, 65, 75, 76) comprend des moyens grâce auxquels des ondes électromagnétiques reçues par lesdits moyens formant antenne ou enroulement (28) sont détectées de façon hétérodyne ou en phase avec une fréquence desdites ondes acoustiques, et des moyens grâce auxquels un signal d'onde électromagnétique ainsi détecté est verrouillé avec une fréquence d'impulsion desdites impulsions d'ondes acoustiques, et, ainsi, détecté.

- 50 14. Appareil selon la revendication 10 ou la revendication 11, dans lequel ladite unité de commande, de mesure et de traitement (29, 30, 50, 52, 60, 65, 75, 76) comprend des moyens pour amener des impulsions ultra-courtes à large bande à être générées à partir dudit générateur acoustique (25) et des moyens pour mesurer une fréquence d'ondes électromagnétiques reçues par lesdits moyens formant antenne ou enroulement (28).

FIG. 1

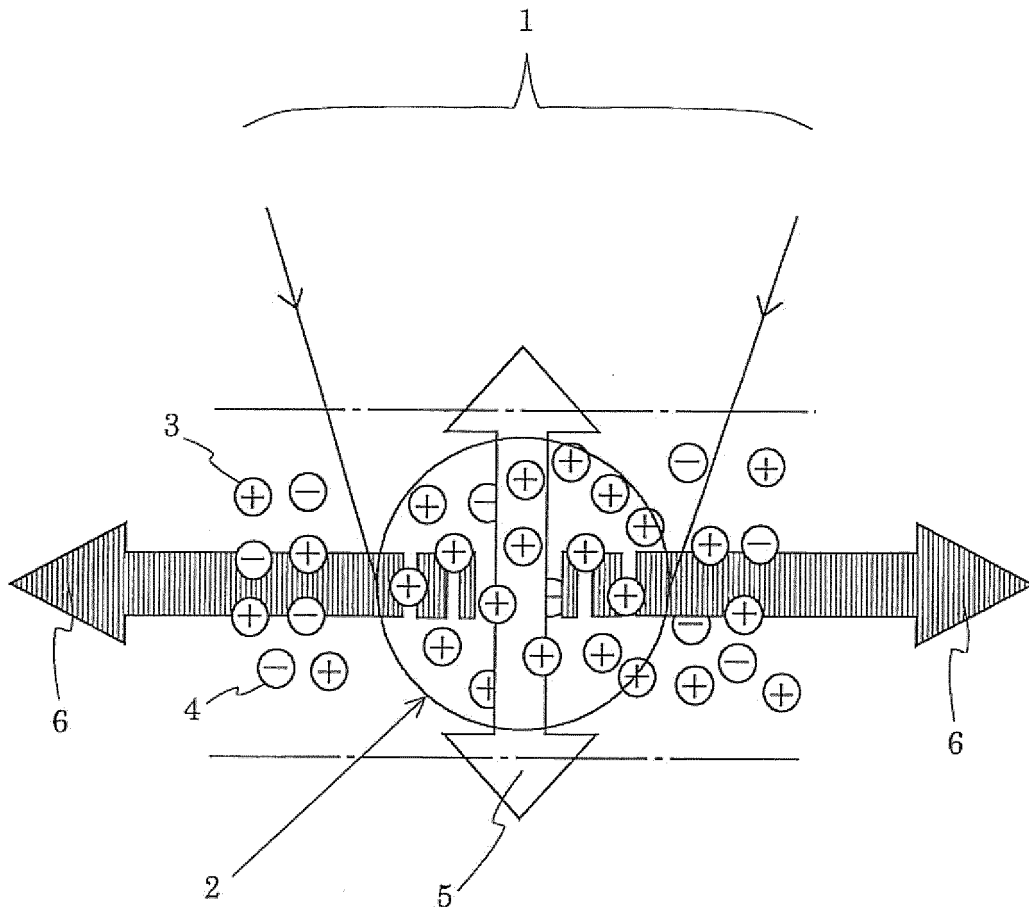


FIG.2

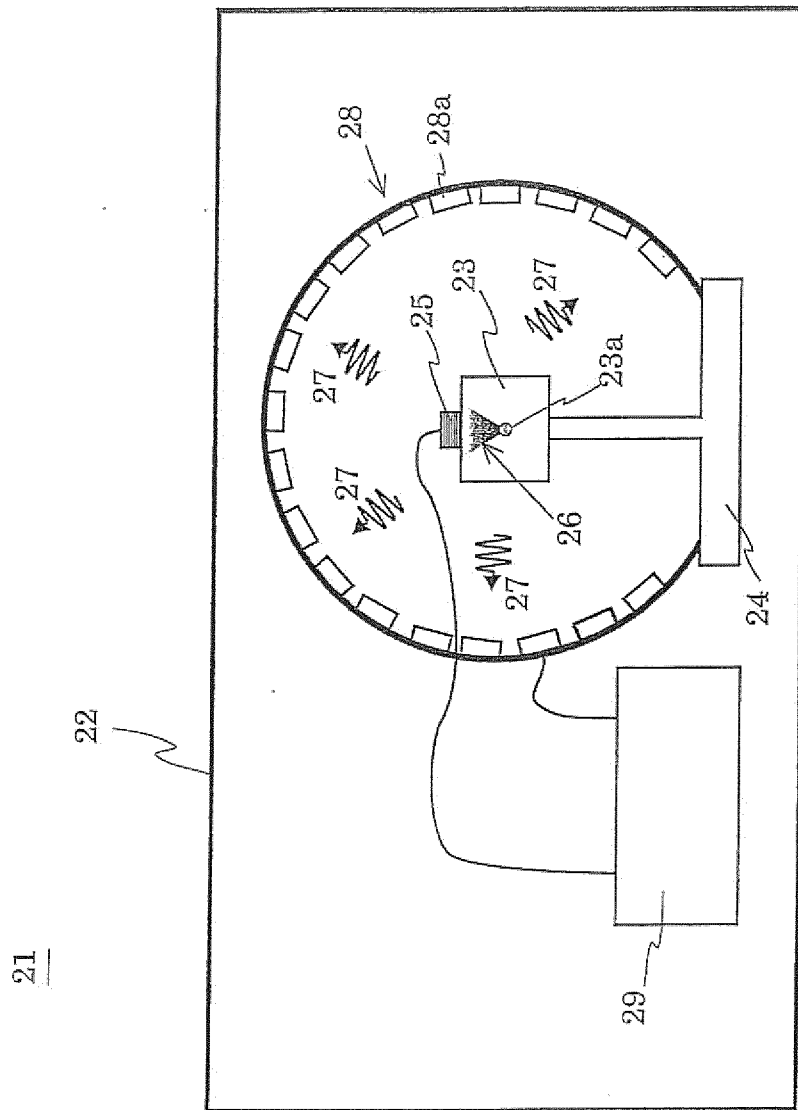


FIG.3

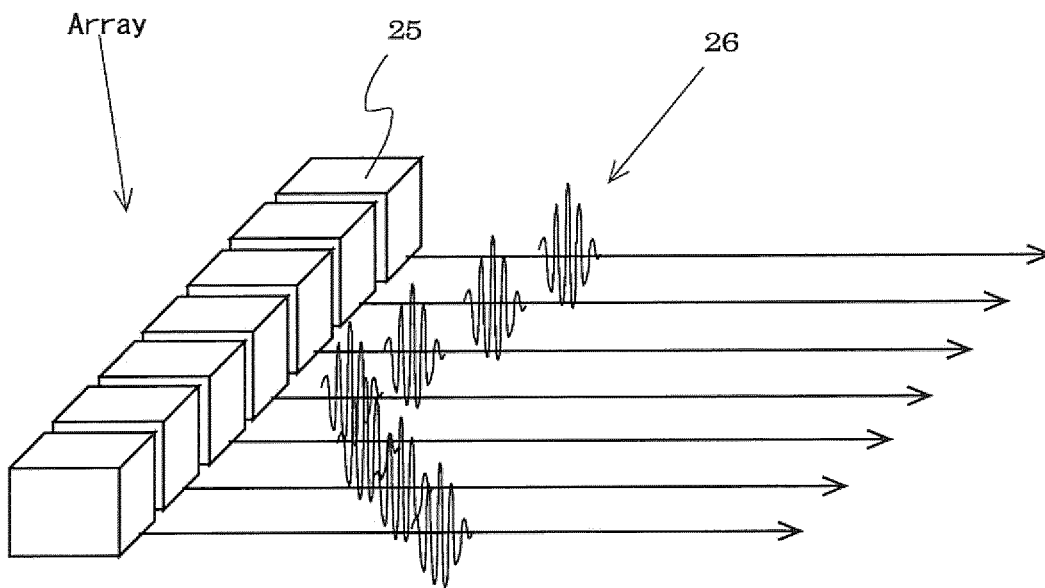


FIG.4

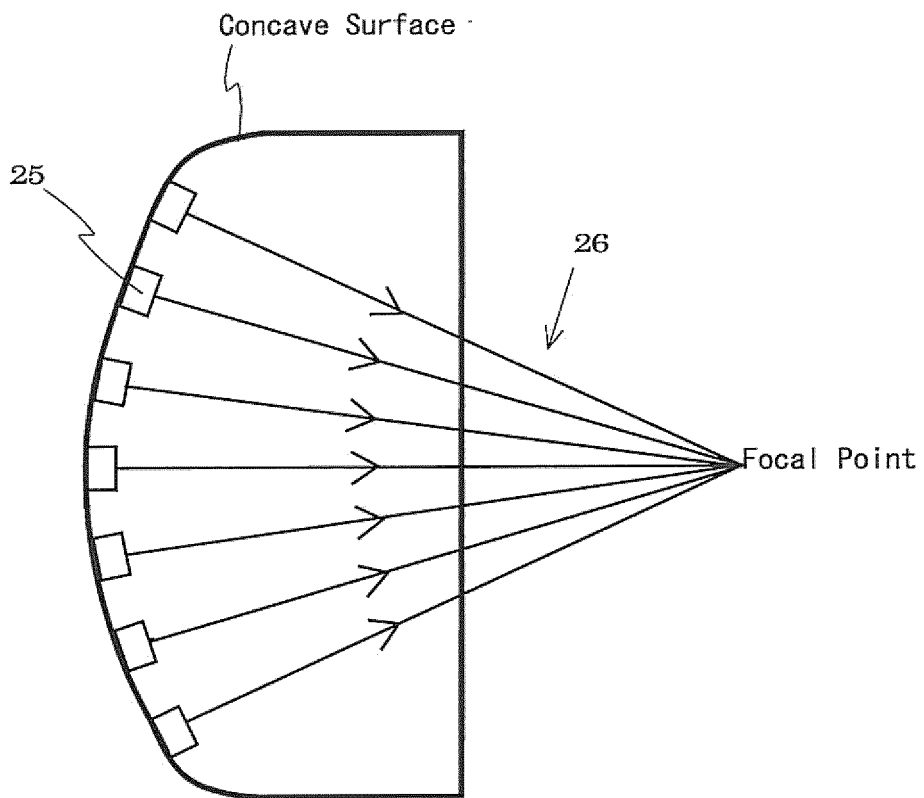


FIG. 5

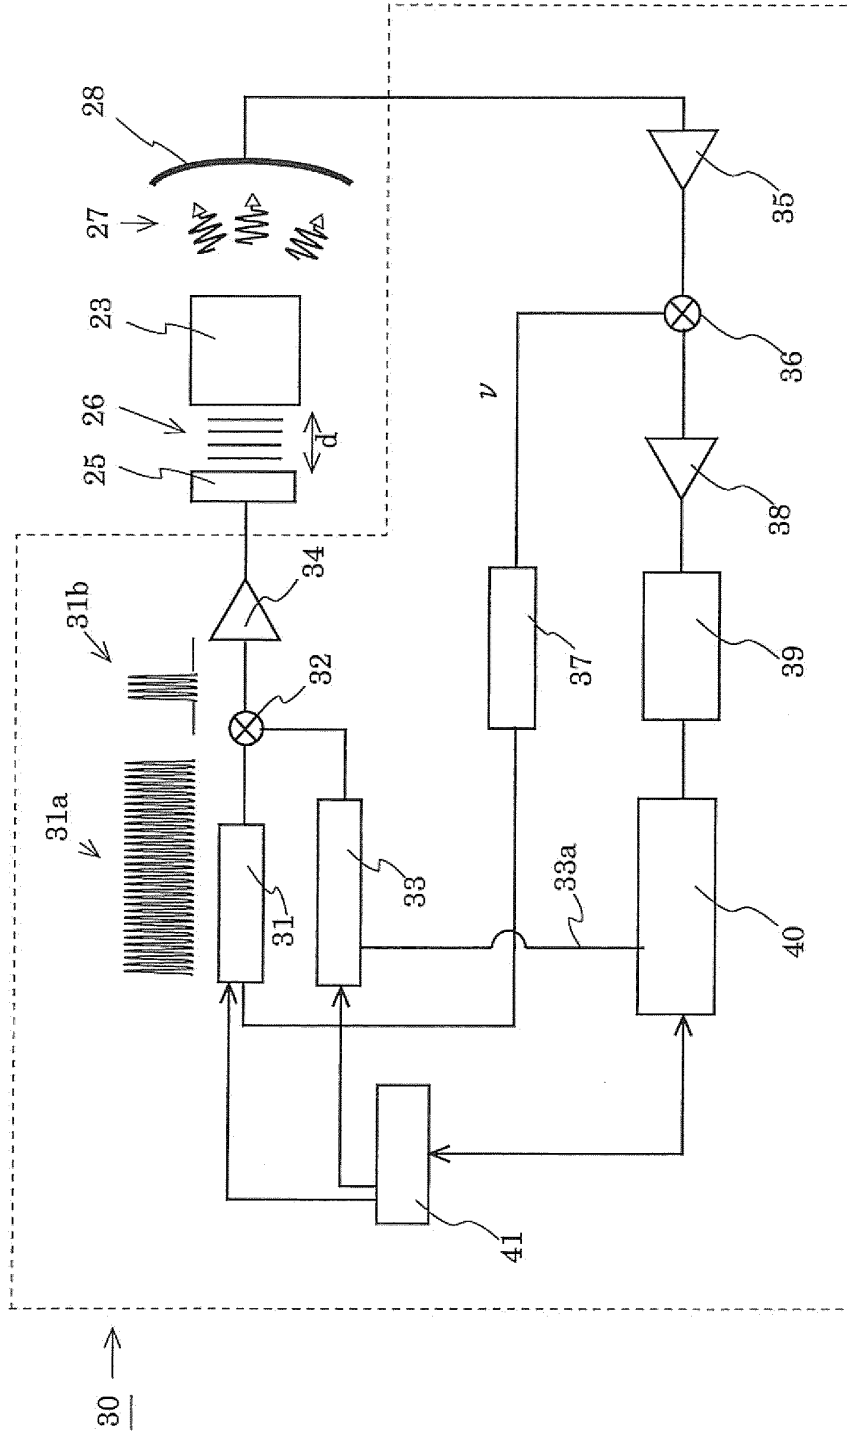


FIG.6

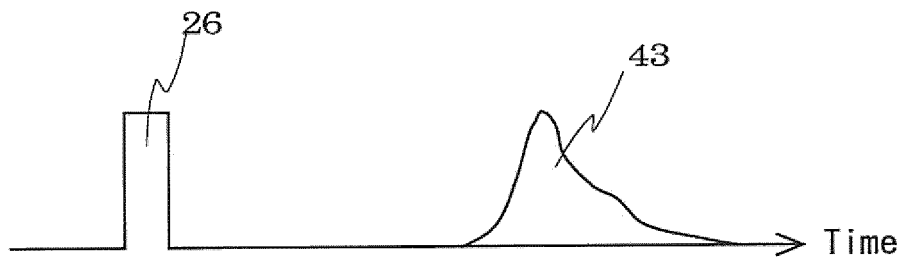


FIG. 7

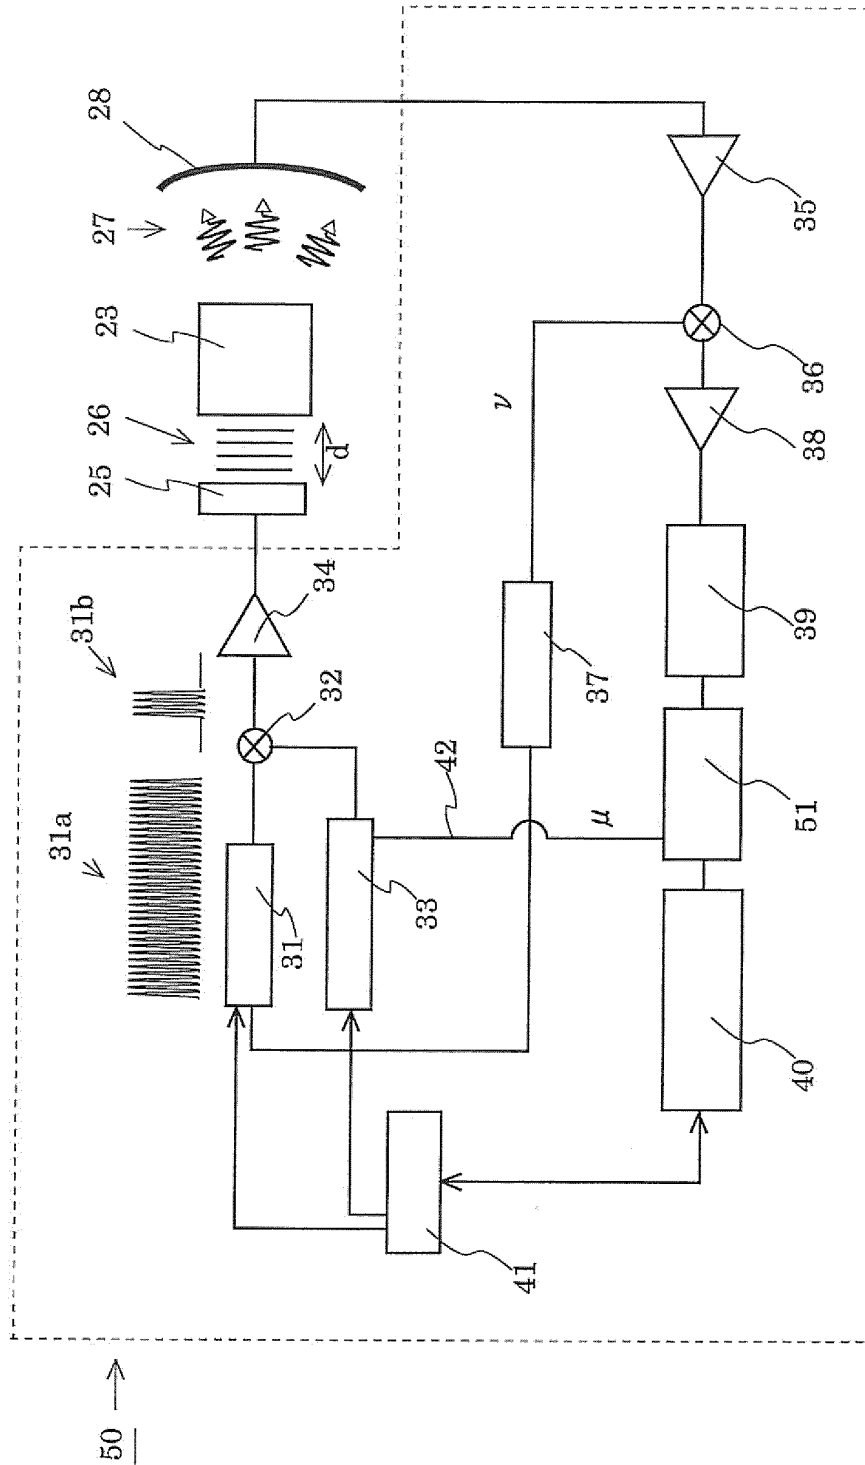


FIG. 8

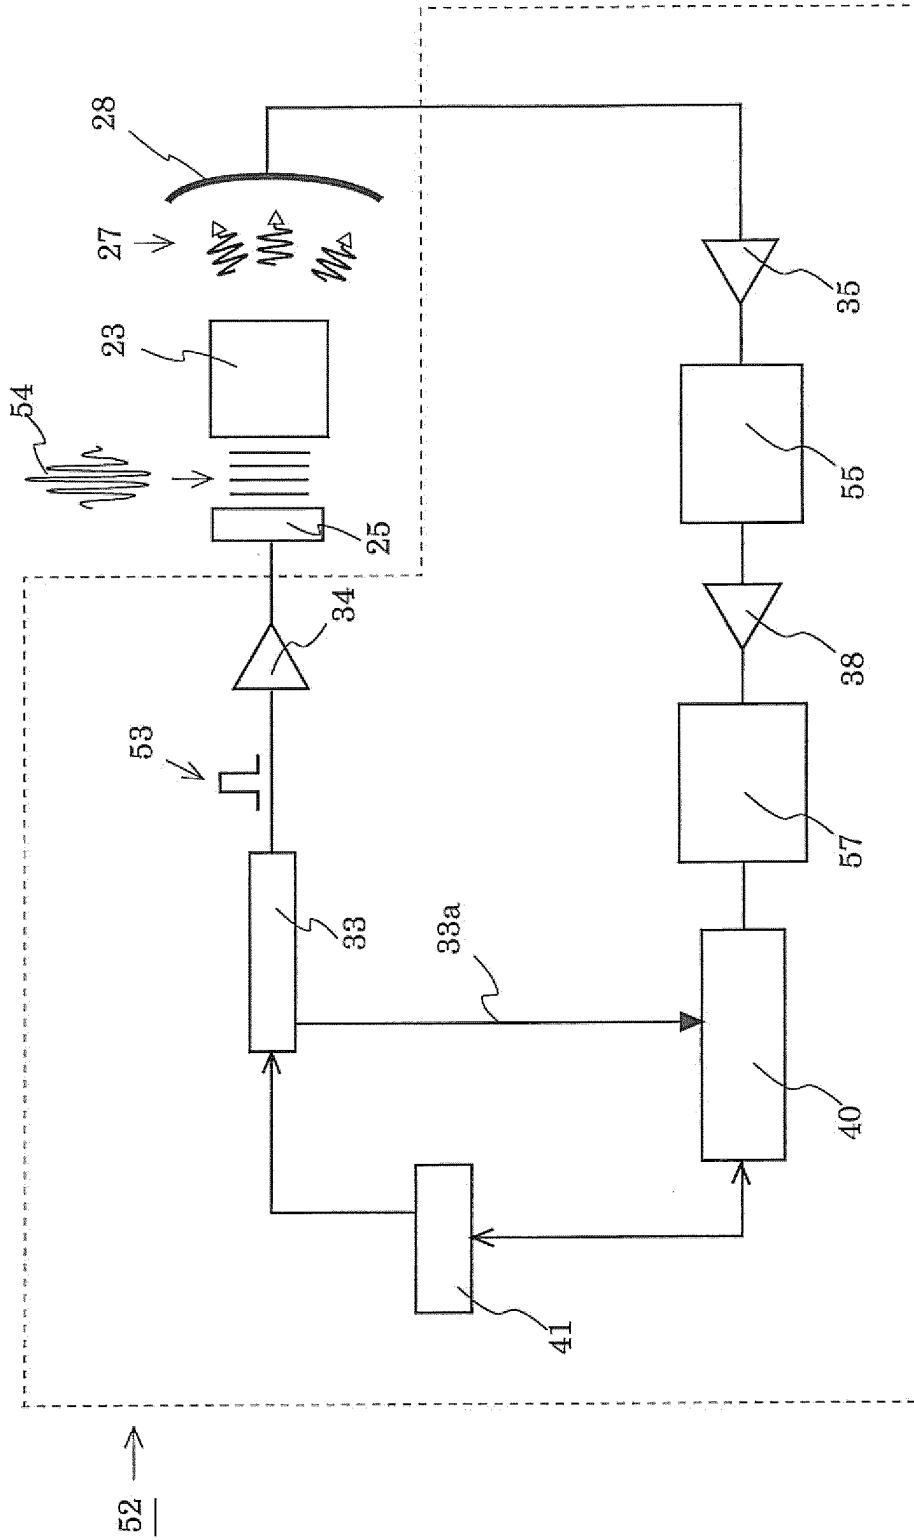


FIG.9

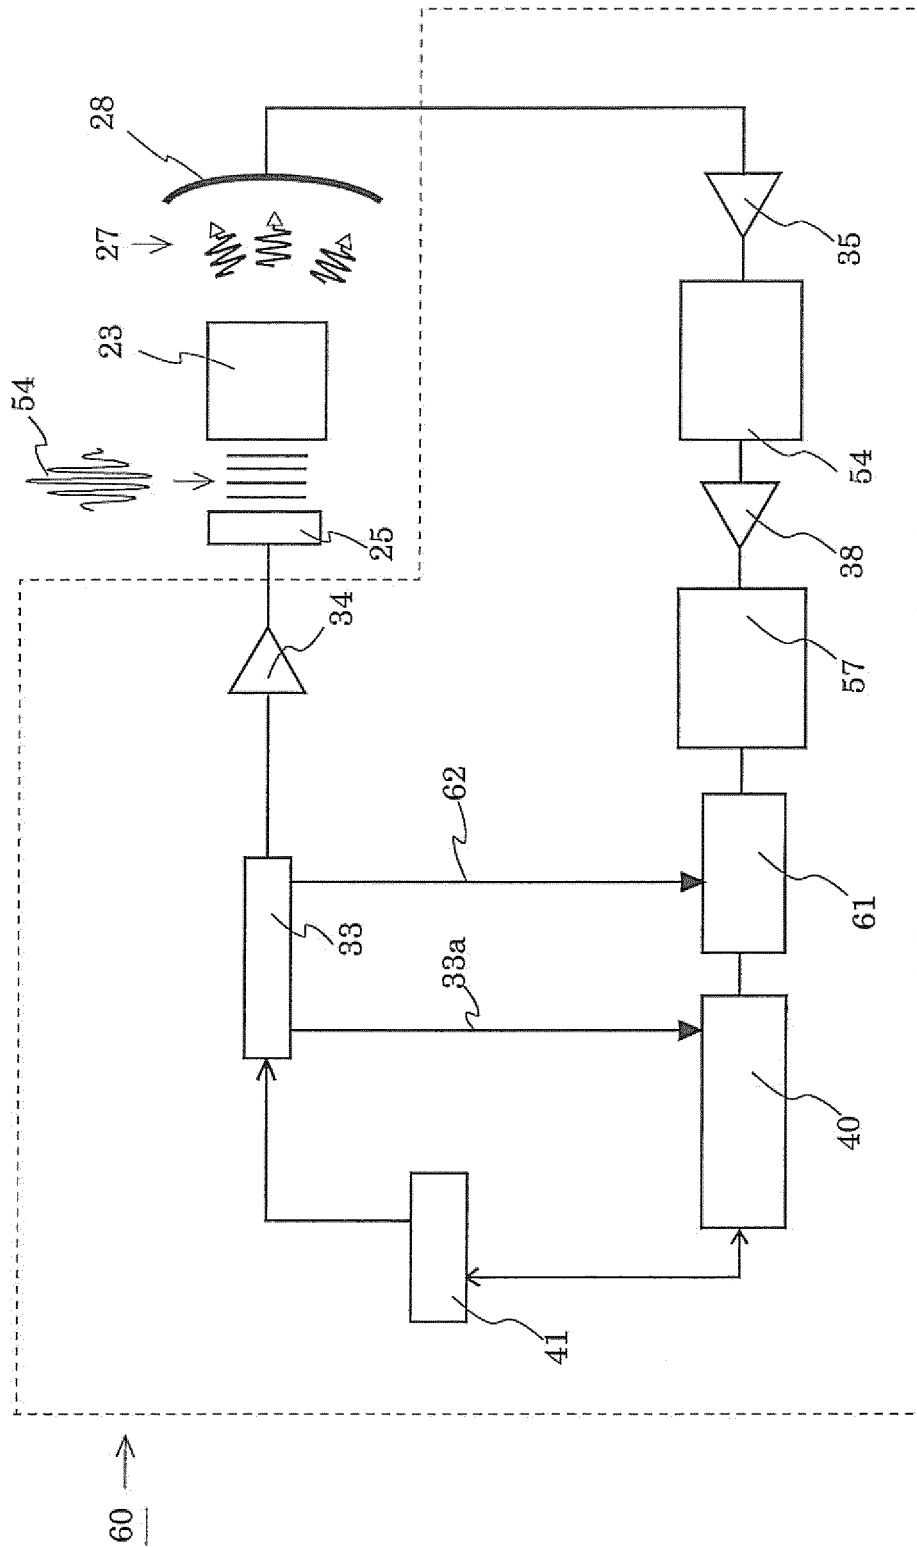


FIG. 10

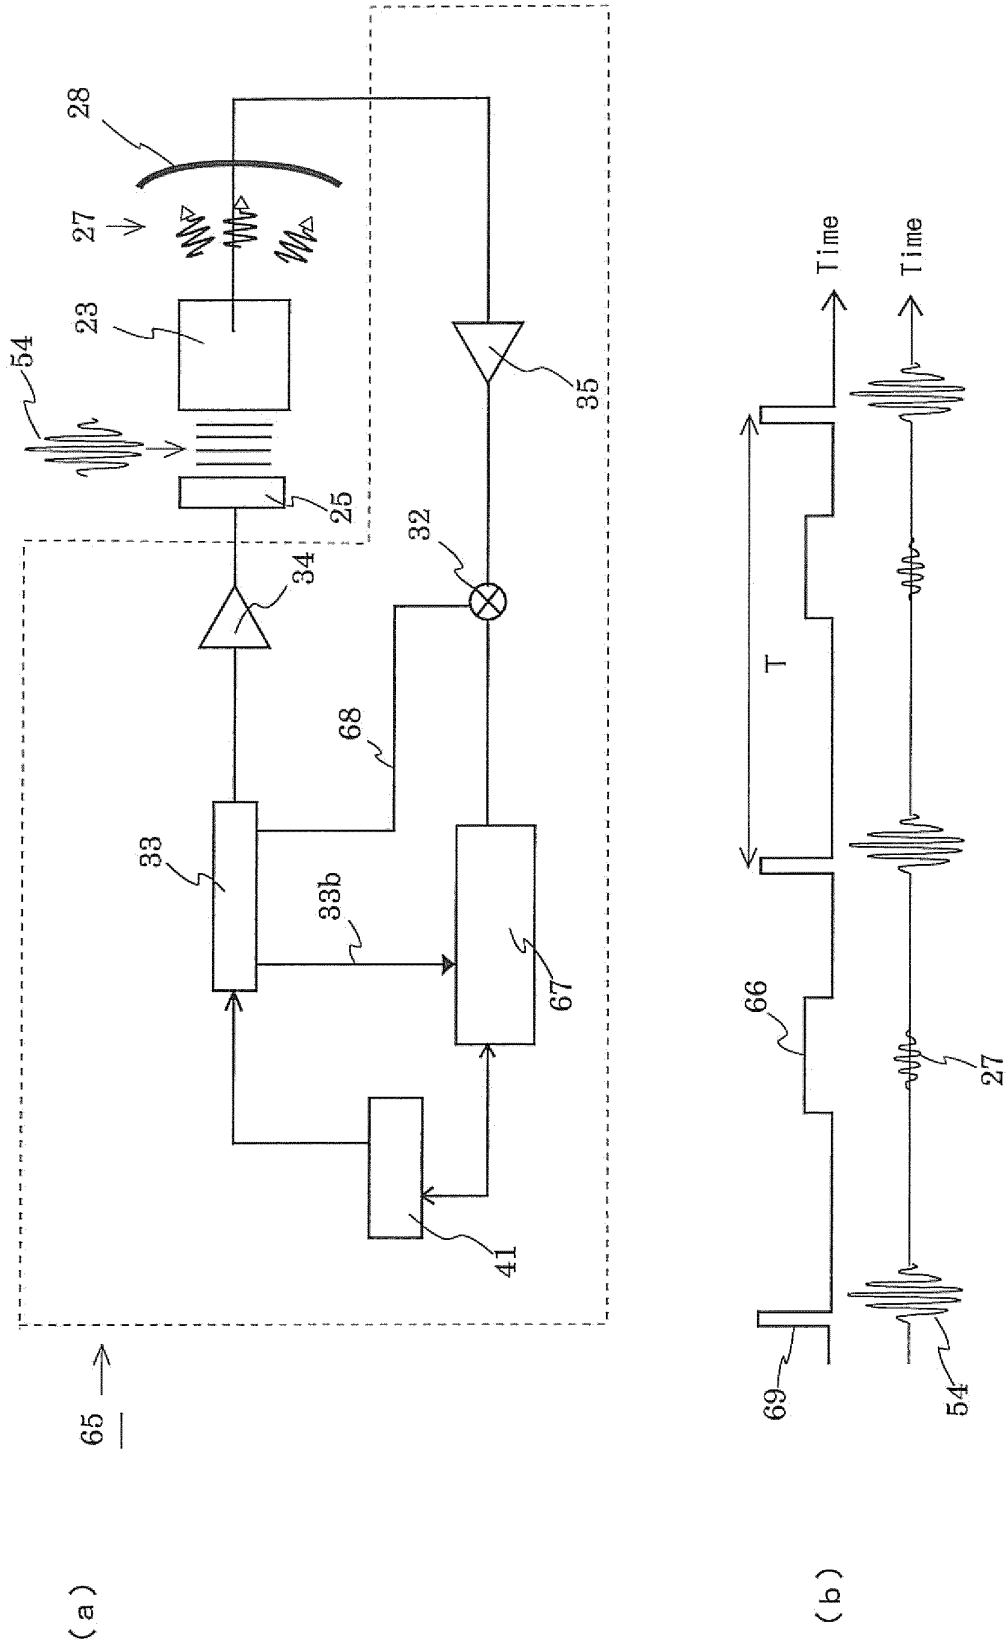


FIG. 11

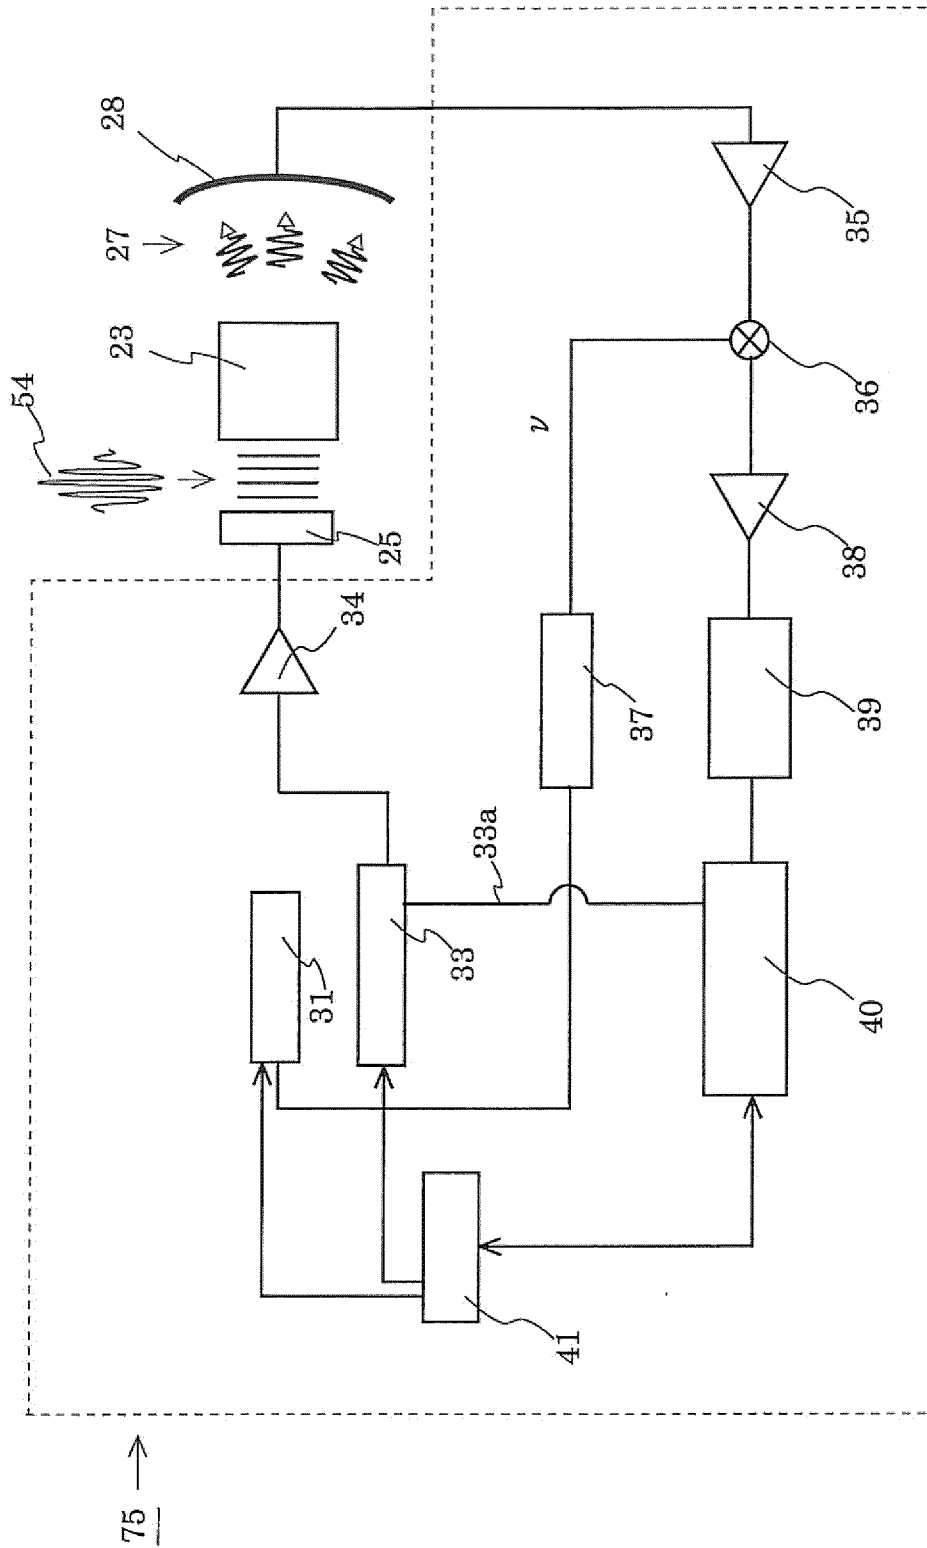


FIG.12

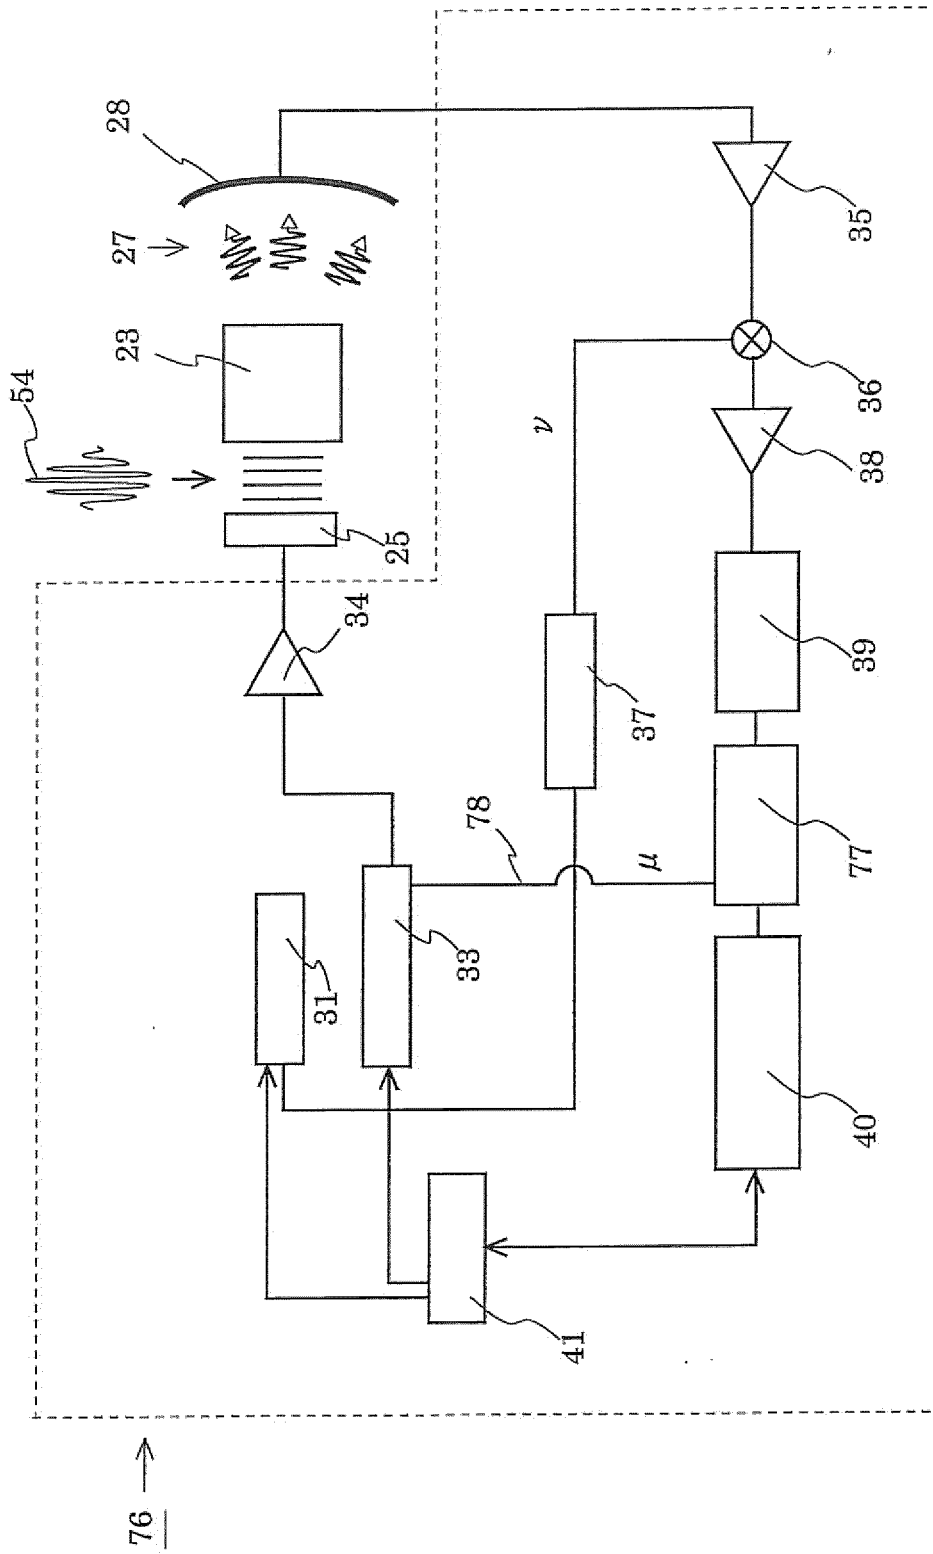


FIG.13

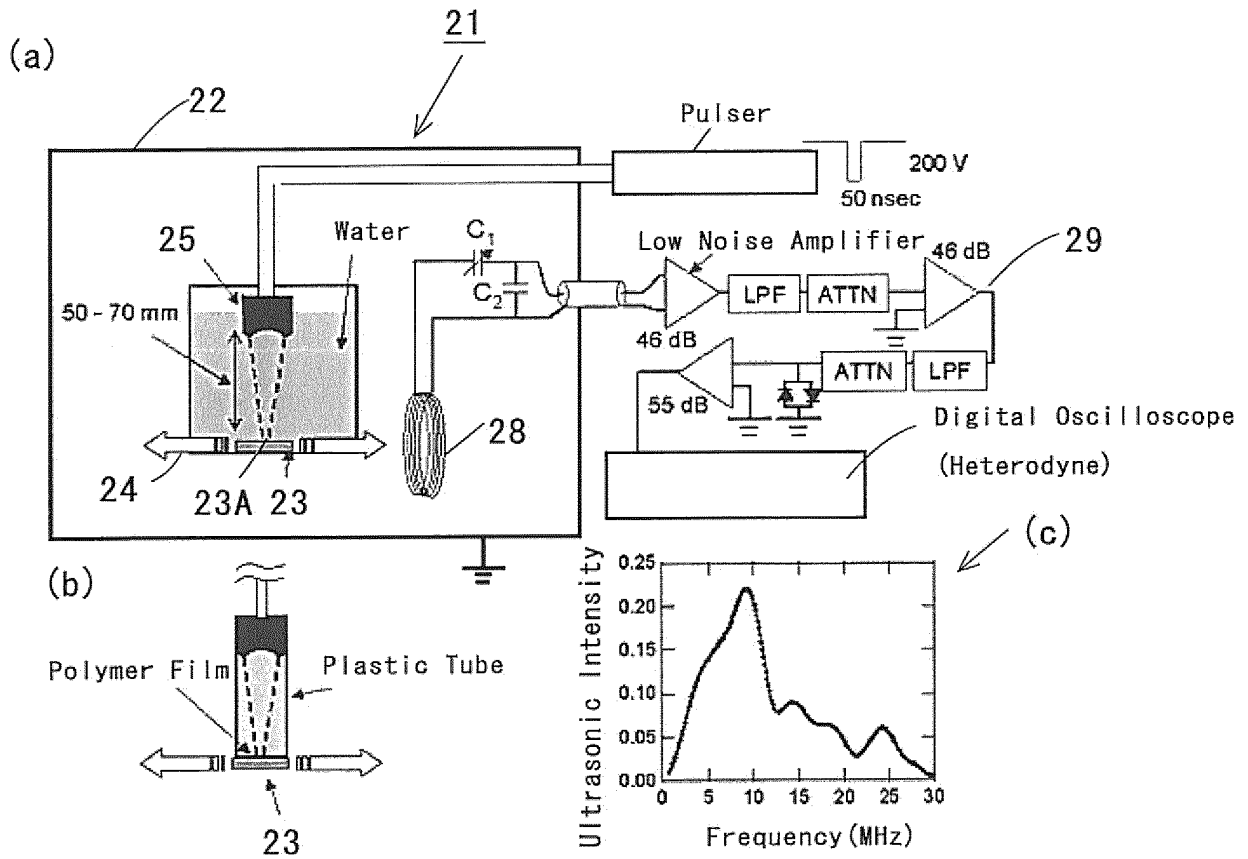


FIG. 14

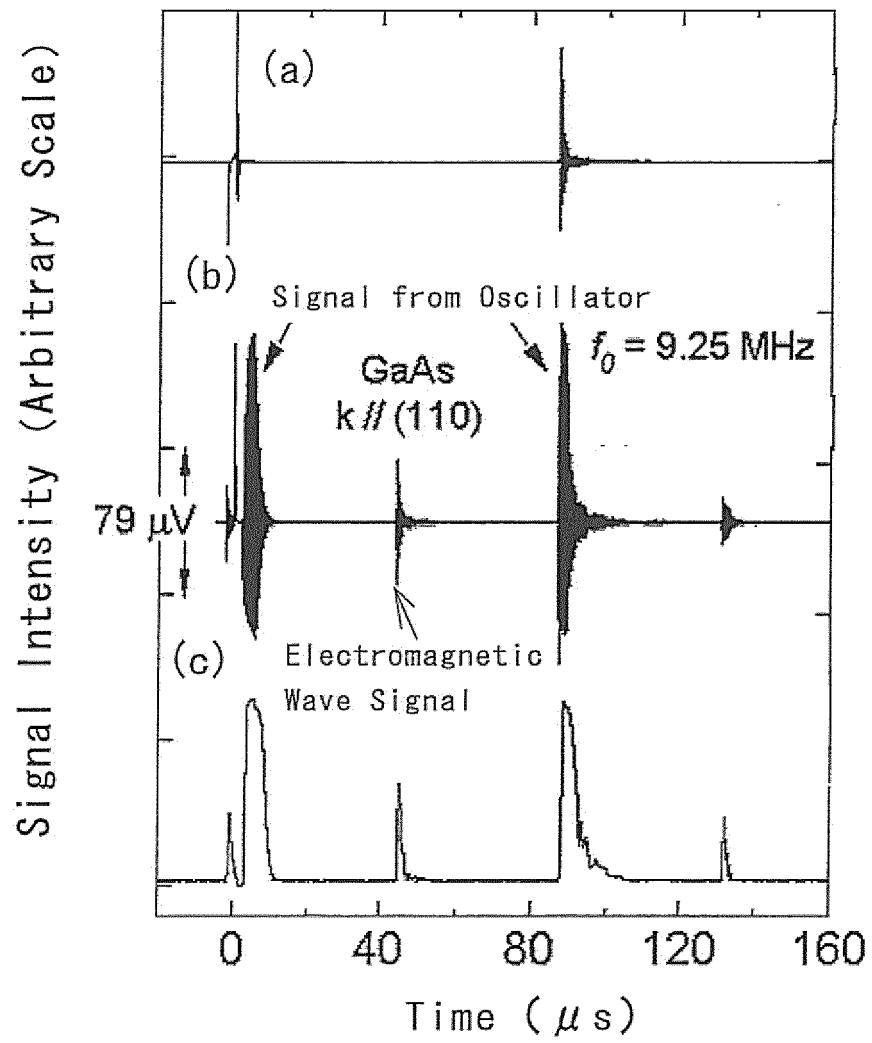


FIG.15

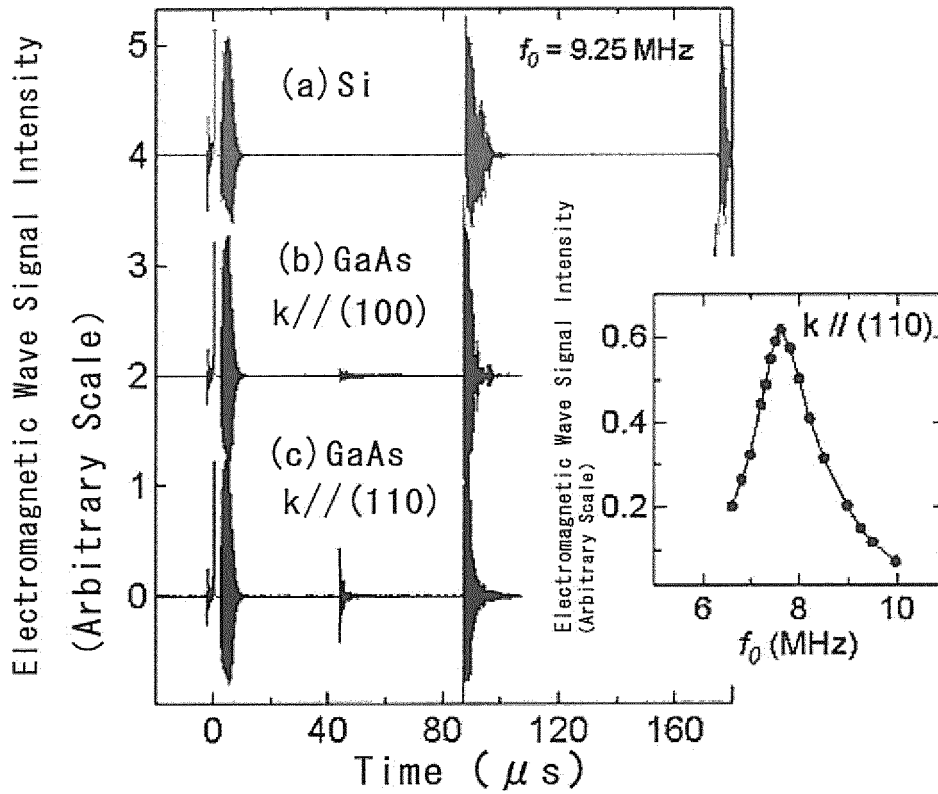


FIG. 16


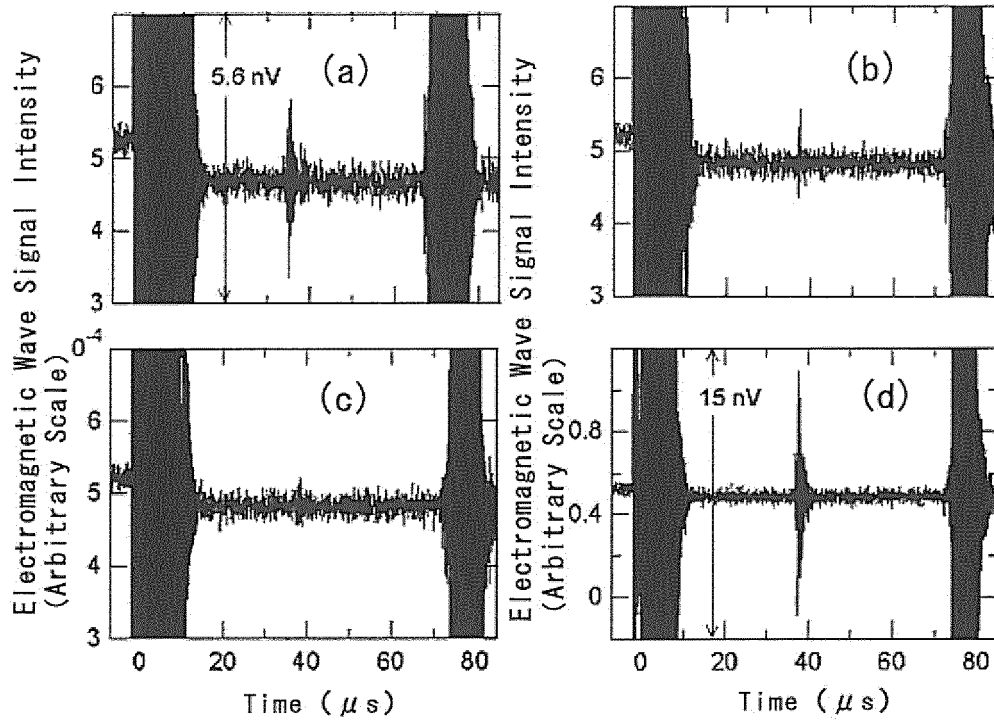


FIG.17

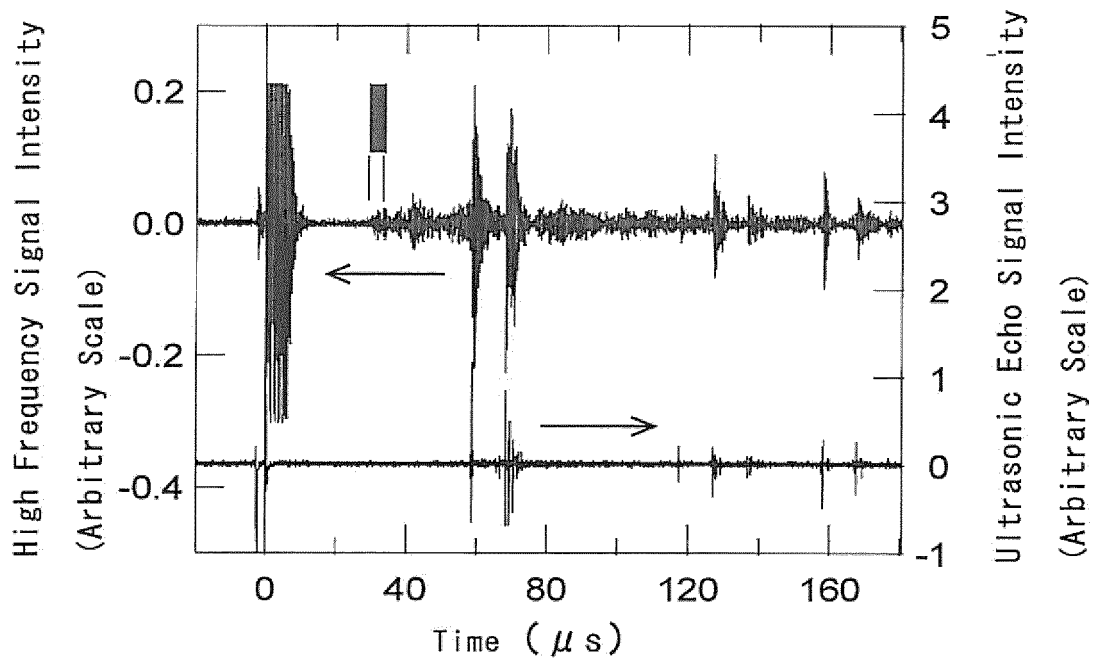

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 0015097 A [0007]

Non-patent literature cited in the description

- **MICHIKAZU MATSUMURA.** Invitation to Brain Science (The secret of a neural circuit is expounded). Science Co., Ltd, 10 July 2003, 55-65 [0007]
- **M. I. POSNER ; M. E. RAICHELE.** Observing the Brain - The riddle of the mind that the cognitive neuroscience reveals. Nikkei Science Co., Ltd, 25 June 2002 [0007]
- **P. JEZZARD ; P. M. MATTHEWS ; S. M. SMITH.** Functional Mri: An Introduction & Methods. Oxford Univ. Pr (Sd), June 2003 [0007]
- **MICHIKAZU MATSUMURA.** Invitation to Brain Science (The secret of a neural circuit is expounded). Science Co., Ltd, 10 July 2003, 173 [0007]
- **MICHIKAZU MATSUMURA.** Invitation to Brain Science (The secret of a neural circuit is expounded). Science Co., Ltd, 10 July 2003, 168-169 [0007]
- **E. BEAUREPAIRE.** *Appl. Phys. Lett.*, 03 May 2004, vol. 84 (18), 3465-3467 [0007]

专利名称(译)	用声学感应电磁波测量物体特性的方法和设备		
公开(公告)号	EP2724669B1	公开(公告)日	2016-11-30
申请号	EP2013197371	申请日	2006-08-14
[标]申请(专利权)人(译)	独立行政法人科学技术振兴机构		
申请(专利权)人(译)	日本科学技术振兴机构		
当前申请(专利权)人(译)	日本科学技术振兴机构		
[标]发明人	IKUSHIMA KENJI KOMIYAMA SUSUMU		
发明人	IKUSHIMA, KENJI KOMIYAMA, SUSUMU		
IPC分类号	A61B5/05 A61B10/00 G01N22/00 G01N27/72 G01R33/035 A61B5/00		
CPC分类号	A61B5/05 A61B5/0093 A61B5/4064 A61B5/7203 A61B5/7225 A61B5/7228 A61B5/7235 A61B8/00 A61B2562/0223 A61B2562/18 G01R33/0213 G01R33/035 G01R33/1269		
代理机构(译)	差役LLP		
优先权	2005325064 2005-11-09 JP		
其他公开文献	EP2724669A1		
外部链接	Espacenet		

摘要(译)

一种测量方法和设备，其中可测量物体 (23) 被声波照射以测量物体中的带电粒子的特性值由其所感应的电磁波的变化。用声聚焦束 (1) 照射的可测量物体的一部分 (2) 处于电荷分布状态，其中正电荷粒子 (3) 在由正电荷粒子 (3) 引起的电磁波的部分 (2) (3) 不被那些由带负电荷的粒子 (4) 诱导并且诱发净电磁波 (6) 的那些物体取消。由于正电荷粒子 (3) 和/或负电荷粒子 (4) 的浓度变化会改变电磁波 (6) 的强度，因此可以从强度变化中知道带电粒子浓度的这种变化的电磁波 (6)。

$$M \frac{d^2 X}{dt^2} = S p \sin 2\pi \nu t \quad (1)$$