



(11) **EP 2 886 050 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
04.01.2017 Bulletin 2017/01

(21) Application number: **12891423.1**

(22) Date of filing: **14.08.2012**

(51) Int Cl.:
A61B 5/053 ^(2006.01) **A61B 5/00** ^(2006.01)

(86) International application number:
PCT/JP2012/005152

(87) International publication number:
WO 2014/027377 (20.02.2014 Gazette 2014/08)

(54) **BODY WATER METER**
KÖRPERWASSERZÄHLER
HUMIDIMÈTRE CORPOREL

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
24.06.2015 Bulletin 2015/26

(73) Proprietor: **Terumo Kabushiki Kaisha**
Tokyo 151-0072 (JP)

(72) Inventors:
• **YOSHINO, Keisuke**
Ashigarakami-gun
Kanagawa 259-0151 (JP)
• **HONDA, Kei**
Ashigarakami-gun
Kanagawa 259-0151 (JP)
• **NISHIO, Kosuke**
Ashigarakami-gun
Kanagawa 259-0151 (JP)

- **KONDOU, Akira**
Ashigarakami-gun
Kanagawa 259-0151 (JP)
- **TSUBOUCHI, Takeshi**
Ashigarakami-gun
Kanagawa 259-0151 (JP)
- **KOYAMA, Miyuki**
Ashigarakami-gun
Kanagawa 259-0151 (JP)

(74) Representative: **Casalonga**
Casalonga & Partners
Bayerstraße 71/73
80335 München (DE)

(56) References cited:
WO-A1-2012/042878 WO-A2-2008/132714
GB-A- 2 133 990 JP-A- 2000 051 153
JP-A- 2009 153 727 US-A- 5 755 672

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a device for measuring the amount of water in a subject's body. In particular, the present invention relates to a device according to the preamble of claim 1, such as it is for example known from US 755672 A.

Background Art

[0002] Measuring the amount of water in a subject's body is essential. Dehydration in a living body is a pathological condition in which water in a living body is reduced and often occurs when a person is exercising or when the temperature is high because a lot of water is excreted from the body by sweating and an elevated body temperature. Especially, elderly people are more likely to experience dehydration than general healthy people because of deterioration in the water retention ability itself in the body.

[0003] Usually, it is said that, when water in a living body is lost by 3% or more of the body weight, the body temperature regulation is disturbed. This causes the body temperature to increase, and then water in the living body is further reduced.

[0004] In other words, vicious circle is created, which leads to, at last, a pathological condition called a heat illness. A heat illness includes conditions such as heat cramp, heat exhaustion, and heatstroke. In some cases, all the organs in the body are affected by the heat illness. Thus, it is important to accurately obtain the amount of water in the body to avoid the risk of a heat illness.

[0005] Under such circumstances, the applicant of the present application focuses on the armpit of a subject as a region suitable for accurately obtaining the amount of water in the subject's body and has been working to develop a device for measuring the amount of water in a subject's body that includes a sensor unit having electrodes arranged thereon and measures the capacitance between the electrodes while applying the sensor unit to the armpit to calculate the amount of water in the subject's body.

[0006] In Fig. 12, 12a is a diagram illustrating an example of a device 1200 for measuring the amount of water in a subject's body proposed by the applicant. As illustrated in 12a of Fig. 12, the device 1200 for measuring the amount of water in a subject's body is provided with a main body part 1210 and an insertion part 1220. The main body part grasped by a measurer is formed in a linear shape as a whole. A display unit 1212 is arranged on the surface of a casing of the main body part 1210 to display, for example, a measurement result 1231 thereon. On the other hand, the insertion part 1220 to be inserted into the armpit extends from one end of the main body part 1210 and is gently curved downward as a whole relative to the main body part 1210.

[0007] A sensor unit 1221 is slidably supported on a tip surface 1222 of the insertion part 1220. The sensor unit 1221 includes a sensor head 1223 which has a surface substantially parallel to the tip surface 1222. The sensor unit 1221 is biased in a direction indicated by an arrow 1241b in order to gain a pressing force for ensuring close contact between the sensor head 1223 and the skin. When the sensor head 1223 is pressed against the skin of the armpit of a subject, the sensor unit 1221 slides in a direction indicated by an arrow 1241a by a predetermined amount and measurement is started accordingly.

[0008] The patent document US 5 755 672 A discloses an oil and water content measurement device for measuring the amount of oil and the amount of water adhering to the surface of a specimen under examination, the device comprising:

a main body formed in a linear shape,
a measurement probe projecting from said main body and having a tip, a water content sensor arranged on the tip of said probe for detecting the amount of water content on the surface of a specimen under examination, the water content sensor having an output signal dependent on said amount of water content, and a means for measuring the amount of water content which calculates the amount of water content based on the output signal of said water content sensor.

Citation List

Patent Literature

[0009] Patent Literature 1: JP 4417841 B1

Summary of Invention

Technical Problems

[0010] However, in the device 1200 for measuring the amount of water in a subject's body having the above configuration, the tip surface 1222 has an opening for allowing the sensor unit 1221 to slide in the direction indicated by the arrow 1241a. In Fig. 12, 12b is a diagram illustrating a cross-sectional configuration of a tip region 1250 of the insertion part 1220 including the sensor unit 1221.

[0011] As illustrated in 12b of Fig. 12, an opening surface of the opening 1251 is larger than the sensor head 1223 of the sensor unit 1221. Thus, a gap 1252 is left between the side surface of the sensor unit 1221 and the inner wall surface of the opening 1251. This enables the sensor unit 1221 to smoothly slide.

[0012] On the other hand, when the gap 1252 is formed between the side surface of the sensor unit 1221 and the inner wall surface of the opening 1251, liquid (e. g. , alcohol used for wiping off dirt on the sensor unit 1221) enters the inside of the device 1200 for measuring the

amount of water in a subject's body through the gap 1252, which may cause failure of the device 1200 for measuring the amount of water in a subject's body.

[0013] Further, dust and dirt, for example, a piece of skin adhered during measurement are accumulated inside the device 1200 for measuring the amount of water in a subject's body through the gap 1252, which may cause failure of the device 1200 for measuring the amount of water in a subject's body or infection between patients.

[0014] The present invention has been made in view of the above problems and an object thereof is to improve the waterproof and antifouling properties in a device for measuring the amount of water in a subject's body that has a slidable sensor unit.

Solution to Problem

[0015] In order to achieve the above object, a device for measuring the amount of water in a subject's body according to the present invention has the following configuration. Specifically, the device for measuring the amount of water in a subject's body includes a main body part formed in a linear shape and an insertion part extending in a curved shape from one end of the main body part. The insertion part includes a tip side insertion part having a tip surface to which a sensor unit is fixed, wherein the sensor unit is brought into contact with a body surface of a subject to measure data regarding water in a subject's body, a base end side insertion part supporting the tip side insertion part through a slide mechanism, wherein the slide mechanism allows the tip side insertion part to slide in a direction substantially perpendicular to the tip surface, and a protective member liquid-tightly covering the slide mechanism between the tip side insertion part and the base end side insertion part, wherein the protective member smoothly connects an outer peripheral surface of the tip side insertion part and an outer peripheral surface of the base end side insertion part to each other, and wherein the protective member is configured to extend and contract in the slide direction.

Advantageous Effects of Invention

[0016] The present invention makes it possible to improve the waterproof and antifouling properties in a device for measuring the amount of water in a subject's body that has a slidable sensor unit.

[0017] The other features and advantages of the present invention will become apparent from the following description with reference to the accompanying drawings. Identical reference numerals designate identical or similar elements throughout the accompanying drawings.

Brief Description of Drawings

[0018] The accompanying drawings are included in the

specification, constitute a part of the specification, illustrate embodiments of the present invention, and used for explaining the principle of the present invention together with the description of the embodiments.

Fig. 1A is a diagram illustrating an appearance configuration of a device for measuring the amount of water in a subject's body according to a first embodiment of the present invention.

Fig. 1B is a diagram illustrating the configuration of a tip region of the device for measuring the amount of water in a subject's body.

Fig. 2 is a diagram illustrating a functional configuration of the device for measuring the amount of water in a subject's body.

Fig. 3 is a diagram illustrating an example of the configuration of a measurement circuit of the device for measuring the amount of water in a subject's body.

Fig. 4 is a diagram for explaining an operation of the device for measuring the amount of water in a subject's body.

Fig. 5 is a diagram illustrating a data configuration of measurement information.

Fig. 6 is a diagram illustrating an appearance configuration of a device for measuring the amount of water in a subject's body according to a second embodiment of the present invention and the configuration of a tip region thereof.

Fig. 7 is a diagram illustrating an appearance configuration of a device for measuring the amount of water in a subject's body according to a third embodiment of the present invention and the configuration of a tip region thereof.

Fig. 8 is a diagram illustrating an appearance configuration of a device for measuring the amount of water in a subject's body according to a fourth embodiment of the present invention and the configuration of a tip region thereof.

Fig. 9 is a diagram for explaining a method for connecting a protective member.

Fig. 10 is a diagram for explaining another method for connecting the protective member.

Fig. 11 is a diagram for explaining still another method for connecting the protective member.

Fig. 12 is a diagram illustrating an appearance configuration of a device for measuring the amount of water in a subject's body and the configuration of a tip region thereof.

Description of Embodiments

[0019] Hereinbelow, embodiments of the present invention will be described with reference to the drawings. The embodiments described below are preferred concrete examples of the present invention and, therefore, have technically preferred various limitations. However, the scope of the present invention is not limited to these embodiments unless it is particularly stated to limit the in-

vention in the following description.

[First Embodiment]

<1. Appearance Configuration of Device for Measuring Amount of Water in Subject's Body>

[0020] Fig. 1A is a diagram illustrating an appearance configuration of the device 100 according to a first embodiment of the present invention. The device 100 allows a sensor unit to make contact with the skin of the armpit which is a body surface of a subject to detect a physical quantity corresponding to an electric signal supplied in the sensor unit, thereby detecting the amount of water in the subject's body. The device 100 according to the present invention measures the capacitance of a subject as the physical quantity (data regarding water in the body) to detect the degree of wetness of the skin of the armpit and calculates the amount of water in the subject's body.

[0021] As illustrated in Fig. 1A, the device 100 includes a main body part 110 and an insertion part 120 which extends in a curved shape from one end of the main body part 110. The main body part 110 has an upper surface 114, a lower surface 115, and side surfaces 116, 117 all of which are formed in substantially parallel to a long-axis direction (not illustrated) and is formed in a linear shape as a whole. Various user interfaces are arranged on the surface of a casing of the main body part 110. An electronic circuit for calculating the amount of water in a subject's body is housed inside the casing.

[0022] In the example of Fig. 1A, a power switch 111 and a display unit 112 are illustrated as the user interfaces. The power switch 111 is arranged on a recess of a rear end surface 113 of the main body part 110. Arranging the power switch 111 on the recess in this manner makes it possible to prevent an operation error of the power switch 111. When the power switch 111 is turned on, power supply from a power supply unit 211 (Fig. 2, described below) to each unit of the device 100 is started. Accordingly, the device 100 is brought into an operating state.

[0023] The display unit 112 is arranged at a position slightly shifted toward the front side from the center in the long-axis direction on the side surface 117 of the main body part 110 in order to prevent the display unit 112 from being completely covered with a hand of a measurer when the measurer grasps a grasping region 118 in measurement of the amount of water in a subject's body using the device 100 (in order to allow a measurement result to be visually recognized even in the grasping state).

[0024] A current measurement result 131 of the amount of water is displayed on the display unit 112. The last measurement result 132 is also displayed together with the current measurement result 131 as reference. A remaining amount of a battery (the power supply unit 211 of Fig. 2) is displayed on a battery display part 133. When an invalid measurement result is obtained or a

measurement error is detected, "E" is displayed on the display unit 112 to notify a measurer of the invalid measurement result or the measurement error. Characters and the like on the display unit 112 are displayed by defining the upper surface 114 of the main body part 110 as the upper side and the lower surface 115 thereof as the lower side.

[0025] The insertion part 120 of the device 100 has a curved upper surface 124 and a curved lower surface 125 and is gently curved downward as a whole relative to the main body part 110.

[0026] A sensor unit 121 is fixed to a tip surface 122 of the insertion part 120. The sensor unit 121 has a sensor head 123 which has a surface substantially parallel to the tip surface 122.

[0027] The insertion part 120 is separated into a base end side insertion part 120-1 which is connected to the main body part 110 and a tip side insertion part 120-2 to which the sensor unit 121 is fixed. The tip side insertion part 120-2 is biased (e. g. , with a biasing force of approximately 150 gf) in a direction indicated by an arrow 141b by an elastic member, for example, a spring in order to gain a pressing force for ensuring close contact between the sensor head 123 and the skin. When the sensor head 123 is pressed against the skin of the armpit of a subject, the entire tip side insertion part 120-2 slides in a direction indicated by an arrow 141a (the direction substantially perpendicular to the tip surface 122, or the normal direction of the tip surface 122) by a predetermined amount (e.g., 1 mm to 10 mm, and 3 mm in the present embodiment) and measurement is started accordingly (hereinbelow, the direction indicated by the arrow 141a is referred to as "slide direction"). The outer peripheral surface of the base end side insertion part 120-1 and the outer peripheral surface of the tip side insertion part 120-2 are connected to each other through a protective member 151 which is composed of an elastic member (a bellows-like elastic member) which is extendable and contractable in the slid direction (a detailed configuration of a tip region (the region indicated by a dotted line 161) of the device 100 including the protective member 151 will be described below).

[0028] With such a configuration, when the sensor head 123 is detected to be pressed against the armpit of a subject after a measurer turns on the power switch 111 to bring the device 100 into an operating state, measurement of the amount of water in the subject's body is started. Alternatively, when the sensor head 123 is detected to be pressed against the armpit of a subject with a predetermined load (e. g. , 20 gf to 200 gf, more preferably 100 gf to 190 gf, and 150 gf in the present embodiment) after a measurer turns on the power switch 111 to bring the device 100 into an operating state, measurement of the amount of water in the subject's body is started. Such a structure enables the degree of close contact between the sensor head 123 and the armpit during the measurement to be constant.

<2. Configuration of Tip Region of Device for Measuring Amount of Water in Subject's Body>

[0029] Next, the detailed configuration of the tip region (the region indicated by the dotted line 161 of Fig. 1A) of the device 100 will be described. Fig. 1B is a diagram illustrating the configuration of the tip region of the device 100. Fig. 1B illustrates the configuration of the inside of a region covered with the protective member 151.

[0030] As illustrated in Fig. 1B, the protective member 151 is disposed along the outer peripheral surface of the base end side insertion part 120-1 and the outer peripheral surface of the tip side insertion part 120-2. The protective member 151 smoothly connects the outer peripheral surface of the base end side insertion part 120-1 and the outer peripheral surface of the tip side insertion part 120-2 so as to be integrally configured in the insertion part 120 which is gently curved downward relative to the main body part 110 and tapered toward the tip thereof.

[0031] Such an integrated configuration between the outer peripheral surface of the base end side insertion part 120-1 and the outer peripheral surface of the tip side insertion part 120-2 enables a measurer to easily perform a wiping operation when wiping off dirt adhered to the insertion part 120.

[0032] A support member 171 is arranged inside the protective member 151 to slidably support the tip side insertion part 120-2. Further, an elastic member 172, for example, a spring is arranged to bias the tip side insertion part 120-2 in the direction indicated by the arrow 141b.

[0033] Arranging the mechanism (slide mechanism) for allowing the tip side insertion part 120-2 to slide inside the protective member 151 makes it possible to prevent liquid from entering the device 100 through the slide mechanism. That is, it is possible to improve the water-proof and antifouling properties of the device 100.

[0034] The protective member 151 is extendable and contractable in the slide direction. When the sensor head 123 is pressed against the skin of the armpit of a subject and further pressed against a biasing force of the elastic member 172, the tip side insertion part 120-2 slides in the direction indicated by the arrow 141a. Accordingly, the protective member 151 is compressed in the slide direction (refer to the right side in the drawing).

[0035] The protective member 151 which is extendable and contractable in the slide direction prevents the protective member 151 from disturbing the slide operation of the tip side insertion part 120-2. Thus, a measurer can perform the pressing operation with a constant pressing force. Examples of a preferred material of the protective member 151 include elastic members such as elastomers such as a silicone elastomer, polyurethane elastomer and styrene elastomer, and polyolefins such as polyethylene. Further, in order to give the protective member 151 an antifouling property, the protective member 151 may be coated with a fluorine resin having a trifluoromethyl group (-CF₃) as a functional group.

[0036] The configuration in which the insertion part 120

is separated into the base end side insertion part 120-1 and the tip side insertion part 120-2, and the slide mechanism is disposed between the base end side insertion part 120-1 and the tip side insertion part 120-2 further has the following advantages.

[0037] As an example, the advantages will be described with a comparison to a case in which a protective member is arranged between a tip surface 1222 and a sensor unit 1221 in a device 1200 for measuring the amount of water in a subject's body illustrated in Fig. 12 which includes a slide mechanism disposed between an insertion part 1220 and the sensor unit 1221.

[0038] In this case, one end of the protective member is connected to the tip surface 1222 and the other end thereof is connected to the side surface of the sensor unit 1221. As is apparent from Fig. 12, a region exposed from the insertion part 1220 in the side surface of the sensor unit 1221 is small. Further, a region in the tip surface 1222 excepting an opening 1251 is also small. That is, it is assumed that connecting the protective member in the body water amount measuring device illustrated in Fig. 12 makes manufacture of the device difficult because the regions to which both ends of the protective member can be connected are limited.

[0039] On the other hand, in the device 100 according to the present embodiment, it is possible to ensure a large region to which the protective member can be connected. Thus, the device 100 has an advantage of easy attachment of the protective member 151 in the manufacturing process.

[0040] Further, when the protective member is connected to the body water amount measuring device having the sensor unit 1221 which is smaller than the tip surface 1222 as illustrated in Fig. 12, the protective member is arranged in an inclined manner. That is, an extension/contraction direction of the protective member is not aligned with a slide direction of the sensor unit 1221. As a result, an elastic force of the protective member that is nonuniform in the slide direction also affects a pressing force of the sensor unit 1221.

[0041] On the other hand, the device 100 according to the present embodiment is capable of achieving an elastic force that is uniform in the slide direction. Thus, it is possible to eliminate the influence of the elastic force of the protective member 151 on the pressing force in the slide direction.

<3. Functional Configuration of Device for Measuring Amount of Water in Subject's Body>

[0042] Next, a functional configuration of the device 100 will be described. Fig. 2 is a diagram illustrating the functional configuration of the device 100. In Fig. 2, a control unit 201 includes a CPU 202 and a memory 203. The CPU 202 executes programs stored in the memory 203 to perform various controls in the device 100.

[0043] For example, the CPU 202 performs display control for the display unit 112, drive control for a buzzer

222 and an LED lamp 223, and measurement of the amount of water in a subject's body (measurement of capacitance in the present embodiment) which will be described below with reference to a flowchart of Fig. 4. The memory 203 includes a nonvolatile memory and a volatile memory. The nonvolatile memory is used as a program memory and the volatile memory is used as an operation memory of the CPU 202.

[0044] The power supply unit 211 includes a replaceable battery or a rechargeable battery and supplies power to each unit of the device 100. A voltage regulator 212 supplies a constant voltage (e.g., 2.3 V) to the control unit 201 and the like. A battery remaining amount detection unit 213 detects the amount of remaining battery on the basis of a voltage value supplied from the power supply unit 211 and notifies the control unit 201 of a result of the detection. The control unit 201 controls display of the battery display part 133 on the basis of a battery remaining amount detection signal from the battery remaining amount detection unit 213.

[0045] When the power switch 111 is depressed, power supply from the power supply unit 211 to each unit is started. Then, upon detecting that the depression of the power switch 111 by a measurer has been continued for one second or more, the control unit 201 maintains the power supply from the power supply unit 211 to each unit to bring the device 100 into an operating state. As described above, a measurement switch 214 is turned on simultaneously with the start of the power supply from the power supply unit 211. The control unit 201 starts measurement of the amount of body water when the tip side insertion part 120-2 is pressed in the direction indicated by the arrow 141a by a predetermined amount or more and finishes the measurement when the on state of the measurement switch 214 has continued for a predetermined time (e.g., two seconds). In order to prevent consumption of the power supply unit 211, when measurement is not started even after two minutes from the transition of the device 100 to the operating state, the control unit 201 automatically shifts the device 100 to a power-off state.

[0046] A measurement circuit 221 is connected to the sensor head 123 and measures the capacitance. Fig. 3 is a diagram illustrating an example of the configuration of the measurement circuit 221. As illustrated in Fig. 3, a CR oscillation circuit is formed from inverters 301, 302, resistors 303, 304, and a subject's capacitance 310. The oscillatory frequency of an output signal 305 varies depending on the subject's capacitance 310. Thus, the control unit 201 measures the frequency of the output signal 305 to calculate the subject's capacitance 310. The sensor head 123 of the present embodiment includes two comb-shaped electrodes which are arranged in such a manner that comb teeth of the respective electrodes are alternately arranged.

[0047] Referring back to Fig. 2, the display unit 112 performs the display as described with reference to Fig. 1A under the control of the control unit 201. The buzzer

222 sounds when measurement is started in response to pressing the tip side insertion part 120-2 or measurement of the amount of water in a subject's body has been completed, and notifies a measurer of the start or completion of the measurement. The LED lamp 223 also performs the same notification as performed by the buzzer 222. That is, the LED lamp 223 is lit when measurement is started in response to pressing the tip side insertion part 120-2 or measurement of the amount of water in a subject's body has been completed, and notifies a measurer of the start or completion of the measurement. A clocking unit 224 operates by receiving power supply from the power supply unit 211 even in a power-off state and notifies the control unit 201 of time in an operating state.

<4. Operation of Device for Measuring Amount of Water in Subject's Body>

[0048] An operation of the device 100 having the above configuration will be described with reference to the flowchart of Fig. 4.

[0049] In step S401, the control unit 201 detects an instruction of starting measurement. In the present embodiment, a state of the measurement switch 214 is monitored. When an on state of the measurement switch 214 has continued for two seconds or more, the instruction of starting measurement is determined to be detected. Upon detecting the instruction of starting measurement, the control unit 201 measures the oscillatory frequency of the output signal 305 from the measurement circuit 221 in step S402.

[0050] In step S403, the amount of water in a subject's body is calculated on the basis of the oscillatory frequency of the output signal 305 measured in step S402.

[0051] In step S404, whether the subject is in a dehydrated state is determined on the basis of whether the amount of water in the subject's body calculated in step S403 exceeds a predetermined threshold. The threshold in this case is desirably a value corresponding to, for example, 35% when defining water as 100% and air as 0%.

[0052] In step S405, the current measurement information is stored in the memory 203. Fig. 5 is a diagram illustrating a data configuration of measurement information stored in the memory 203. In Fig. 5, a measurement value 501 is the amount of water in the subject's body calculated in the current measurement. A determination result 502 is information indicating whether the subject is in a dehydrated state or non-dehydrated state which has been determined in step S404 with respect to the amount of water in the subject's body calculated in the current measurement. A measurement time 503 is information indicating time notified from the clocking unit 224 in the current measurement. The measurement time 503 is, for example, time notified from the clocking unit 224 at the point when the measurement is performed in step S402.

[0053] In step S406, the amount of water in the subject's body calculated in the current measurement is displayed on the display unit 112. At this time, the display is performed in a display form corresponding to a determination result of whether the subject is in a dehydrated state or non-dehydrated state (e.g., the amount of water in the subject's body is displayed in red when the subject is in a dehydrated state and in blue when the subject is in a non-dehydrated state).

[0054] As is apparent from the above description, the device 100 according to the present embodiment includes the insertion part 120 which is separated into the base end side insertion part 120-1 and the tip side insertion part 120-2 and the slidemechanism disposed between the base end side insertion part 120-1 and the tip side insertion part 120-2. Further, the outer peripheral surface of the base end side insertion part 120-1 and the outer peripheral surface of the tip side insertion part 120-2 are smoothly connected to each other by the protective member 151 which is extendable and contractable in the slide direction to thereby liquid-tightly cover the slide mechanism.

[0055] Accordingly, it is possible to improve the water-proof and antifouling properties of the device 100. Further, even when dirt is adhered to the insertion part 120, it is possible to easily wipe off the dirt. Further, the protective member never obstructs the slide operation. Thus, a measurer can perform a pressing operation with a constant pressing force.

[Second Embodiment]

[0056] In the first embodiment, a bellows-like elastic member is used as the protective member 151. However, the present invention is not limited thereto.

[0057] Fig. 6 is a diagram illustrating an appearance configuration of a device 600 for measuring the amount of water in a subject's body according to a second embodiment of the present invention and the configuration of a tip region 661 of the device 600 for measuring the amount of water in a subject's body. Configurations that are the same as the configurations described with reference to Figs. 1A and 1B in the first embodiment will be denoted by the same reference numerals, and description thereof will be omitted. Hereinbelow, differences from the first embodiment will be mainly described.

[0058] As illustrated in 6b of Fig. 6, in the device 600 for measuring the amount of water in a subject's body, a protective member 651 has a thickness that is thin at a central position in the slide direction. When a tip side insertion part 120-2 slides in a direction indicated by an arrow 141a, the protective member 651 is bent outward at the central position in the slide direction, thereby releasing a force acting in the slide direction outward (refer to the right side on the drawing).

[0059] Forming the cross-sectional shape of the protective member 651 in such a manner to guide a bending direction prevents the protective member 651 from dis-

turbing the slide operation of the tip side insertion part 120-2 as in the first embodiment. Thus, a measurer can perform a pressing operation with a constant pressing force. Examples of a preferred material of the protective member 651 include elastic members such as elastomers such as a silicone elastomer, polyurethane elastomer and styrene elastomer, and polyolefins such as polyethylene. Further, in order to give the protective member 651 an antifouling property, the protective member 651 may be coated with a fluorine resin having a trifluoromethyl group (-CF₃) as a functional group.

[0060] The protective member 651 has no unevenness on the outer peripheral surface thereof. Therefore, even when dirt is adhered to the protective member 651 itself, it is possible to wipe off the dirt more easily than the case in which a bellows-like elastic member is used as the protective member as in the first embodiment.

[Third Embodiment]

[0061] In the second embodiment, the protective member 651 is bent outward. However, the present invention is not limited thereto, and the protective member may be bent inward.

[0062] Fig. 7 is a diagram illustrating an appearance configuration of a device 700 for measuring the amount of water in a subject's body according to a third embodiment of the present invention and the configuration of a tip region 761 of the device 700 for measuring the amount of water in a subject's body. Configurations that are the same as the configurations described with reference to Figs. 1A and 1B in the first embodiment will be denoted by the same reference numerals, and description thereof will be omitted. Hereinbelow, differences from the first and second embodiments will be mainly described.

[0063] As illustrated in 7b of Fig. 7, in the device 700 for measuring the amount of water in a subject's body, a protective member 751 has a thickness that is thin at a central position in the slide direction. When a tip side insertion part 120-2 slides in a direction indicated by an arrow 141a, the protective member 751 is bent inward at the central position in the slide direction, thereby releasing a force acting in the slide direction inward (refer to the right side on the drawing).

[0064] Forming the cross-sectional shape of the protective member 751 in such a manner to guide a bending direction prevents the protective member 751 from disturbing the slide operation of the tip side insertion part 120-2 as in the first embodiment. Thus, a measurer can perform a pressing operation with a constant pressing force. Examples of a preferred material of the protective member 751 include elastic members such as elastomers such as a silicone elastomer, polyurethane elastomer and styrene elastomer, and polyolefins such as polyethylene. Further, in order to give the protective member 751 an antifouling property, the protective member 751 may be coated with a fluorine resin having a trifluoromethyl group (-CF₃) as a functional group.

[0065] The third embodiment also has an advantage capable of preventing interference with the armpit of a subject during measurement compared to the configuration that is bent outward as in the second embodiment.

[Fourth Embodiment]

[0066] In the first to third embodiments, the outer peripheral surface of the base end side insertion part 120-1 and the outer peripheral surface of the tip side insertion part 120-2 are smoothly connected to each other by the protective member to thereby liquid-tightly cover the slide mechanism. However, the present invention is not limited thereto.

[0067] For example, the base end side insertion part 120-1 and the sensor unit 121 may be directly and smoothly connected to each other by the protective member without providing the tip side insertion part.

[0068] Fig. 8 is a diagram illustrating an appearance configuration of a device 800 for measuring the amount of water in a subject's body according to a fourth embodiment of the present invention and the configuration of a tip region 861 of the device 800 for measuring the amount of water in a subject's body. Configurations that are the same as the configurations described with reference to Figs. 1A and 1B in the first embodiment will be denoted by the same reference numerals, and description thereof will be omitted. Hereinbelow, differences from the first embodiment will be mainly described.

[0069] As illustrated in 8b of Fig. 8, in the device 800 for measuring the amount of water in a subject's body, a base end side insertion part 120-1 and the side surface of a sensor unit 121 are directly connected to each other by a protective member 851. When the sensor unit 121 slides in a direction indicated by an arrow 141a, the protective member 851 is curved outward (refer to the right side on the drawing). Examples of a preferred material of the protective member 851 include elastic members such as elastomers such as a silicone elastomer, polyurethane elastomer and styrene elastomer, and polyolefins such as polyethylene. Further, in order to give the protective member 851 an antifouling property, the protective member 851 may be coated with a fluorine resin having a trifluoromethyl group (-CF₃) as a functional group.

[0070] Directly connecting the sensor unit 121 and the base end side insertion part 120-1 to each other in this manner eliminates a step between a tip surface 122 of the tip side insertion part 120-2 and the sensor unit 121. Therefore, even when dirt is adhered to the sensor unit 121, it is possible to wipe off the dirt more easily than the first to third embodiments.

[Fifth Embodiment]

[0071] In the first to third embodiments, details of a method for connecting the protective member to the base end side insertion part and the tip side insertion part has

not been particularly described. However, the base end side and tip end side insertion parts and the protective member desirably have configurations capable of preventing entrance of liquid through contact surfaces therebetween. Hereinbelow, details of the connection method will be specifically described taking the protective member 651 of the second embodiment as an example.

[0072] Fig. 9 is a diagram for explaining details of the method for connecting the protective member 651. In Fig. 9, 9a is the same as 6b of Fig. 6 and 9b is an enlarged view of a region indicated by a dotted line 901 of 9a.

[0073] As illustrated in 9b of Fig. 9, a groove 911 is formed on the outer peripheral surface of the base end side insertion part 120-1 over the whole circumference thereof. Further, a groove 912 is formed on the outer peripheral surface of the tip side insertion part 120-2 over the whole circumference thereof. On the other hand, projections 921 and 922 are formed on opposite ends of the protective member 651 in a direction substantially perpendicular to the slide direction. When the protective member 651 is connected to the base end side insertion part 120-1 and the tip side insertion part 120-2, the projections 921 and 922 are respectively fitted with the grooves 911 and 912.

[0074] Forming the grooves 911, 912 in the direction that is substantially perpendicular to a liquid entering direction in this manner makes it possible to reliably prevent entrance of liquid through a contact surface between the protective member 651 and the outer peripheral surface of the base end side insertion part 120-1 or a contact surface between the protective member 651 and the outer peripheral surface of the tip side insertion part 120-2.

[Sixth Embodiment]

[0075] In the fifth embodiment, a single groove is formed on each of the outer peripheral surface of the base end side insertion part 120-1 and the outer peripheral surface of the tip side insertion part 120-2, respectively. However, the present invention is not limited thereto.

[0076] Fig. 10 is a diagram for explaining another method for connecting the protective member 651. In Fig. 10, 10a is the same as 6b of Fig. 6 and 10b is an enlarged view of a region indicated by a dotted line 901 of 10a.

[0077] As illustrated in 10b of Fig. 10, two grooves (grooves 1011, 1012) are formed on the outer peripheral surface of the base end side insertion part 120-1 over the whole circumference thereof. Further, two grooves (grooves 1013, 1014) are formed on the outer peripheral surface of the tip side insertion part 120-2 over the whole circumference thereof.

[0078] On the other hand, two projections (projections 1021, 1022) are formed on one end of the protective member 651 in a direction substantially perpendicular to the slide direction. Further, two projections (projections 1023, 1024) are formed on the other end of the protective member 651 in the direction substantially perpendicular

to the slide direction. When the protective member 651 is connected to the base end side insertion part 120-1 and the tip side insertion part 120-2, the projections 1021 to 1024 are respectively fitted with the grooves 1011 to 1014.

[0079] Forming the two grooves in each of the insertion parts in the direction that is substantially perpendicular to a liquid entering direction in this manner makes it possible to more reliably prevent entrance of liquid through a contact surface between the protective member 651 and the outer peripheral surface of the base end side insertion part 120-1 or a contact surface between the protective member 651 and the outer peripheral surface of the tip side insertion part 120-2.

[Seventh Embodiment]

[0080] In the fifth and sixth embodiments, the configuration that emphasizes improvement of the waterproof and antifouling properties has been described as the method for connecting the protective member to the base end side insertion part and the tip side insertion part. However, the present invention is not limited thereto. A connection method that improves the waterproof and antifouling properties and also makes a wiping operation easy may be employed. Hereinbelow, details of a connection method of the present embodiment will be specifically described also taking the protective member 651 of the second embodiment as an example.

[0081] Fig. 11 is a diagram for explaining still another method for connecting the protective member 651. In Fig. 11, 11a is the same as 6b of Fig 6 and 11b is an enlarged view of a region indicated by a dotted line 901 of 11a.

[0082] As illustrate in 11b of Fig. 11, a groove 1111 which has a depth corresponding to the thickness of the end of the protective member 651 is formed on the end of the outer peripheral surface of the base end side insertion part 120-1 over the whole circumference thereof. Further, a groove 1112 which has a depth corresponding to the thickness of the end of the protective member 651 is formed on the end of the outer peripheral surface of the tip side insertion part 120-2 over the whole circumference thereof.

[0083] Accordingly, when the protective member 651 is connected to the base end side insertion part 120-1 and the tip side insertion part 120-2, the ends of the protective member 651 are fitted with the grooves 1111 and 1112.

[0084] As a result, it is possible to reliably prevent entrance of liquid through a contact surface between the protective member 651 and the outer peripheral surface of the base end side insertion part 120-1 or a contact surface between the protective member 651 and the outer peripheral surface of the tip side insertion part 120-2. In addition, it is possible to completely eliminate steps between the outer peripheral surface of the base end side insertion part 120-1 and the protective member 651 and between the outer peripheral surface of the tip side

insertion part 120-2 and the protective member 651, and thereby make a wiping operation by a measurer easier.

[0085] The present invention is not limited to the above embodiments. Various changes and modifications can be made without departing from the scope of the invention. Therefore, the following claims are appended to disclose the scope of the invention.

10 Claims

1. A device (100, 600, 700, 800) for measuring the amount of water in a subject's body comprising:

a main body part (110) formed in a linear shape; and
an insertion part (120)
a tip side insertion part (120-2) having a tip surface (122) to which a sensor unit (121) is fixed, wherein the sensor unit (121) is configured to be brought into contact with a body surface of a subject to measure data regarding water in a subject's body,
a base end side insertion part (120-1) supporting the tip side insertion part (120-2) through a slide mechanism, wherein the slide mechanism allows the tip side insertion part (120-2) to slide in a direction substantially perpendicular to the tip surface (122);
characterized in that said insertion part (120) extends in a curved shape from one end of the main body part (110) and a protective member (151, 651, 751, 851) liquid-tightly covers the slide mechanism between the tip side insertion part (120-2) and the base end side insertion part (120-1), wherein the protective member (151, 651, 751, 851) smoothly connects an outer peripheral surface of the tip side insertion part (120-2) and an outer peripheral surface of the base end side insertion part (120-1) to each other, and wherein the protective member (151, 651, 751, 851) is configured to extend and contract in the slide direction.

2. The device (100, 600, 700, 800) for measuring the amount of water in a subject's body according to claim 1, wherein the protective member (151, 651, 751, 851) is bendable at a central position in the slide direction to release a force acting in the slide direction to a direction that differs from the slide direction.

3. The device (100, 600, 700, 800) for measuring the amount of water in a subject's body according to any one of claims 1 to 2, wherein at least one groove (912, 1013, 1014, 1112) is formed on the outer peripheral surface of the tip side insertion part (120-2) in a region to which the protective member (151, 651, 751, 851) is connected over the whole circumfer-

ence, at least one groove (911, 1011, 1012, 1111) is formed on the outer peripheral surface of the base end side insertion part (120-1) in a region to which the protective member (151, 651, 751, 851) is connected over the whole circumference, and projections (921, 922, 1021, 1022, 1023, 1024) formed on ends of the protective member (151, 651, 751, 851) are fitted with the grooves (911, 912, 1011, 1012, 1013, 1014, 1111, 1112) when the protective member (151, 651, 751, 851) is connected.

4. The device (100, 600, 700, 800) for measuring the amount of water in a subject's body according to any one of claims 1 to 2, wherein a groove (1111) having a depth corresponding to the thickness of one end of the protective member (151, 651, 751, 851) is formed on the outer peripheral surface of the tip side insertion part (120-2) in a region to which the protective member (151, 651, 751, 851) is connected over the whole circumference, a groove (1112) having a depth corresponding to the thickness of the other end of the protective member (151, 651, 751, 851) is formed on the outer peripheral surface of the base end side insertion part (120-1) in a region to which the protective member (151, 651, 751, 851) is connected over the whole circumference, and the ends of the protective member (151, 651, 751, 851) are fitted with the grooves (911, 912, 1011, 1012, 1013, 1014, 1111, 1112) when the protective member (151, 651, 751, 851) is connected.

Patentansprüche

1. Vorrichtung (100, 600, 700, 800) zum Messen der Wassermenge im Körper einer Person, welche umfasst:

ein Hauptkörperteil (110), welches mit einer linearen Gestalt gebildet ist; und

ein Einführteil (120), welches einschließt ein spitzenseitiges Einführteil (120-2), welches eine Spitzenfläche (122) hat, an welcher eine Sensoreinheit (121) befestigt ist, wobei die Sensoreinheit (121) so gestaltet ist, dass sie mit einer Körperfläche einer Person in Kontakt gebracht werden kann, um Daten bezüglich Wasser im Körper einer Person zu messen, ein grundendseitiges Einführteil (120-1), welches das spitzenseitiges Einführteil (120-2) mittels eines Schiebemechanismus stützt, wobei der Schiebemechanismus es dem spitzenseitigen Einführteil (120-2) ermöglicht, in eine Richtung im Wesentlichen senkrecht zu der Spitzenfläche (122) zu gleiten;

dadurch gekennzeichnet, dass besagtes Einführteil (120) sich in einer gekrümmten Gestalt von einem Ende des Hauptkörperteils (110) er-

streckt und ein Schutzelement (151, 651, 751, 851) den Schiebemechanismus zwischen dem spitzenseitigen Einführteil (120-2) und dem grundendseitigen Einführteil (120-1) flüssigkeitsdicht abdeckt, wobei das Schutzelement (151, 651, 751, 851) eine äußere Umfangsfläche des spitzenseitigen Einführteils (120-2) und eine äußere Umfangsfläche des grundendseitigen Einführteils (120-1) glatt miteinander verbindet, und wobei das Schutzelement (151, 651, 751, 851) so gestaltet ist, dass es sich in Gleitrichtung ausdehnen und kontrahieren kann.

2. Vorrichtung (100, 600, 700, 800) zum Messen der Wassermenge im Körper einer Person nach Anspruch 1, wobei das Schutzelement (151, 651, 751, 851) sich an einer zentralen Position in die Gleitrichtung biegen lässt, um eine Kraft, welche in die Gleitrichtung wirkt, in eine Richtung, die sich von der Gleitrichtung unterscheidet, freizusetzen.

3. Vorrichtung (100, 600, 700, 800) zum Messen der Wassermenge im Körper einer Person nach einem der Ansprüche 1 bis 2, wobei mindestens eine Nut (912, 1013, 1014, 1112) an der äußeren Umfangsfläche des spitzenseitigen Einführteils (120-2) in einer Region gebildet ist, mit welcher das Schutzelement (151, 651, 751, 851) über den gesamten Umfang verbunden ist, wobei mindestens eine Nut (911, 1011, 1012, 1111) an der äußeren Umfangsfläche des grundendseitigen Einführteils (120-1) in einer Region gebildet ist, mit welcher das Schutzelement (151, 651, 751, 851) über den gesamten Umfang verbunden ist, und wobei Projektionen (921, 922, 1021, 1022, 1023, 1024) an Enden des Schutzelements (151, 651, 751, 851) mit den Nuten (911, 912, 1011, 1012, 1013, 1014, 1111, 1112) angepasst sind, wenn das Schutzelement (151, 651, 751, 851) verbunden ist.

4. Vorrichtung (100, 600, 700, 800) zum Messen der Wassermenge im Körper einer Person nach einem der Ansprüche 1 bis 2, wobei eine Nut (1111), welche eine Tiefe entsprechend der Dicke eines Endes des Schutzelements (151, 651, 751, 851) hat, an der äußeren Umfangsfläche des spitzenseitigen Einführteils (120-2) in einer Region gebildet ist, mit welcher das Schutzelement (151, 651, 751, 851) über den gesamten Umfang verbunden ist, wobei eine Nut (1112), welche eine Tiefe entsprechend der Dicke des anderen Endes des Schutzelements (151, 651, 751, 851) hat, an der äußeren Umfangsfläche des grundendseitigen Einführteils (120-1) in einer Region gebildet ist, mit welcher das Schutzelement (151, 651, 751, 851) über den gesamten Umfang verbunden ist, und wobei die Enden des Schutzelements (151, 651, 751, 851) mit den Nuten (911, 912, 1011, 1012, 1013, 1014, 1111, 1112) angepasst sind,

wenn das Schutzelement (151, 651, 751, 851) verbunden ist.

Revendications

1. Dispositif (100, 600, 700, 800) pour mesurer la quantité d'eau dans le corps d'un sujet comprenant :

une partie de corps principale (110) formée avec une forme linéaire ; et

une partie d'insertion (120) incluant une partie d'insertion côté pointe (120-2) comportant une surface de pointe (122) sur laquelle une unité de capteur (121) est fixée, dans lequel l'unité de capteur (121) est configurée pour être amenée en contact avec une surface de corps d'un sujet pour mesurer des données concernant l'eau dans le corps d'un sujet, une partie d'insertion côté extrémité de base (120-1) supportant la partie d'insertion côté pointe (120-2) par l'intermédiaire d'un mécanisme coulissant, dans lequel le mécanisme coulissant permet à la partie d'insertion côté pointe (120-2) de coulisser dans une direction sensiblement perpendiculaire à la surface de pointe (122) ;

caractérisé en ce que ladite partie d'insertion (120) s'étend en une forme courbée depuis une extrémité de la partie de corps principale (110) et un élément protecteur (151, 651, 751, 851) couvre de manière étanche aux liquides le mécanisme de coulissement entre la partie d'insertion côté pointe (120-2) et la partie d'insertion côté extrémité de base (120-1), dans lequel l'élément protecteur (151, 651, 751, 851) relie ensemble de façon lisse une surface périphérique extérieure de la partie d'insertion côté pointe (120-2) et une surface périphérique extérieure de la partie d'insertion côté extrémité de base (120-1), et dans lequel l'élément protecteur (151, 651, 751, 851) est configuré pour s'allonger et se contracter dans la direction de coulissement.

2. Dispositif (100, 600, 700, 800) pour mesurer la quantité d'eau dans le corps d'un sujet selon la revendication 1, dans lequel l'élément protecteur (151, 651, 751, 851) peut être courbé en une position centrale dans la direction de coulissement pour libérer une force agissant dans la direction de coulissement dans une direction qui diffère de la direction de coulissement.
3. Dispositif (100, 600, 700, 800) pour mesurer la quantité d'eau dans le corps d'un sujet selon l'une quelconque des revendications 1 à 2, dans lequel au moins une rainure (912, 1013, 1014, 1112) est formée sur la surface périphérique extérieure de la par-

tie d'insertion côté pointe (120-2) dans une région à laquelle l'élément protecteur (151, 651, 751, 851) est connecté sur toute la circonférence, au moins une rainure (911, 1011, 1012, 1111) est formée sur la surface périphérique extérieure de la partie d'insertion côté extrémité de base (120-1) dans une région à laquelle l'élément protecteur (151, 651, 751, 851) est connecté sur toute la circonférence, et des saillies (921, 922, 1021, 1022, 1023, 1024) formées sur des extrémités de l'élément protecteur (151, 651, 751, 851) sont ajustées avec les rainures (911, 912, 1011, 1012, 1013, 1014, 1111, 1112) quand l'élément protecteur (151, 651, 751, 851) est connecté.

4. Dispositif (100, 600, 700, 800) pour mesurer la quantité d'eau dans le corps d'un sujet selon l'une quelconque des revendications 1 à 2, dans lequel une rainure (1111) ayant une profondeur correspondant à l'épaisseur d'une extrémité de l'élément protecteur (151, 651, 751, 851) est formée sur la surface périphérique extérieure de la partie d'insertion côté pointe (120-2) dans une région à laquelle l'élément protecteur (151, 651, 751, 851) est connecté sur toute la circonférence, une rainure (1112) ayant une profondeur correspondant à l'épaisseur de l'autre extrémité de l'élément protecteur (151, 651, 751, 851) est formée sur la surface périphérique extérieure de la partie d'insertion côté extrémité de base (120-1) dans une région à laquelle l'élément protecteur (151, 651, 751, 851) est connecté sur toute la circonférence, et les extrémités de l'élément protecteur (151, 651, 751, 851) sont ajustées avec les rainures (911, 912, 1011, 1012, 1013, 1014, 1111, 1112) quand l'élément protecteur (151, 651, 751, 851) est connecté.

FIG. 1A

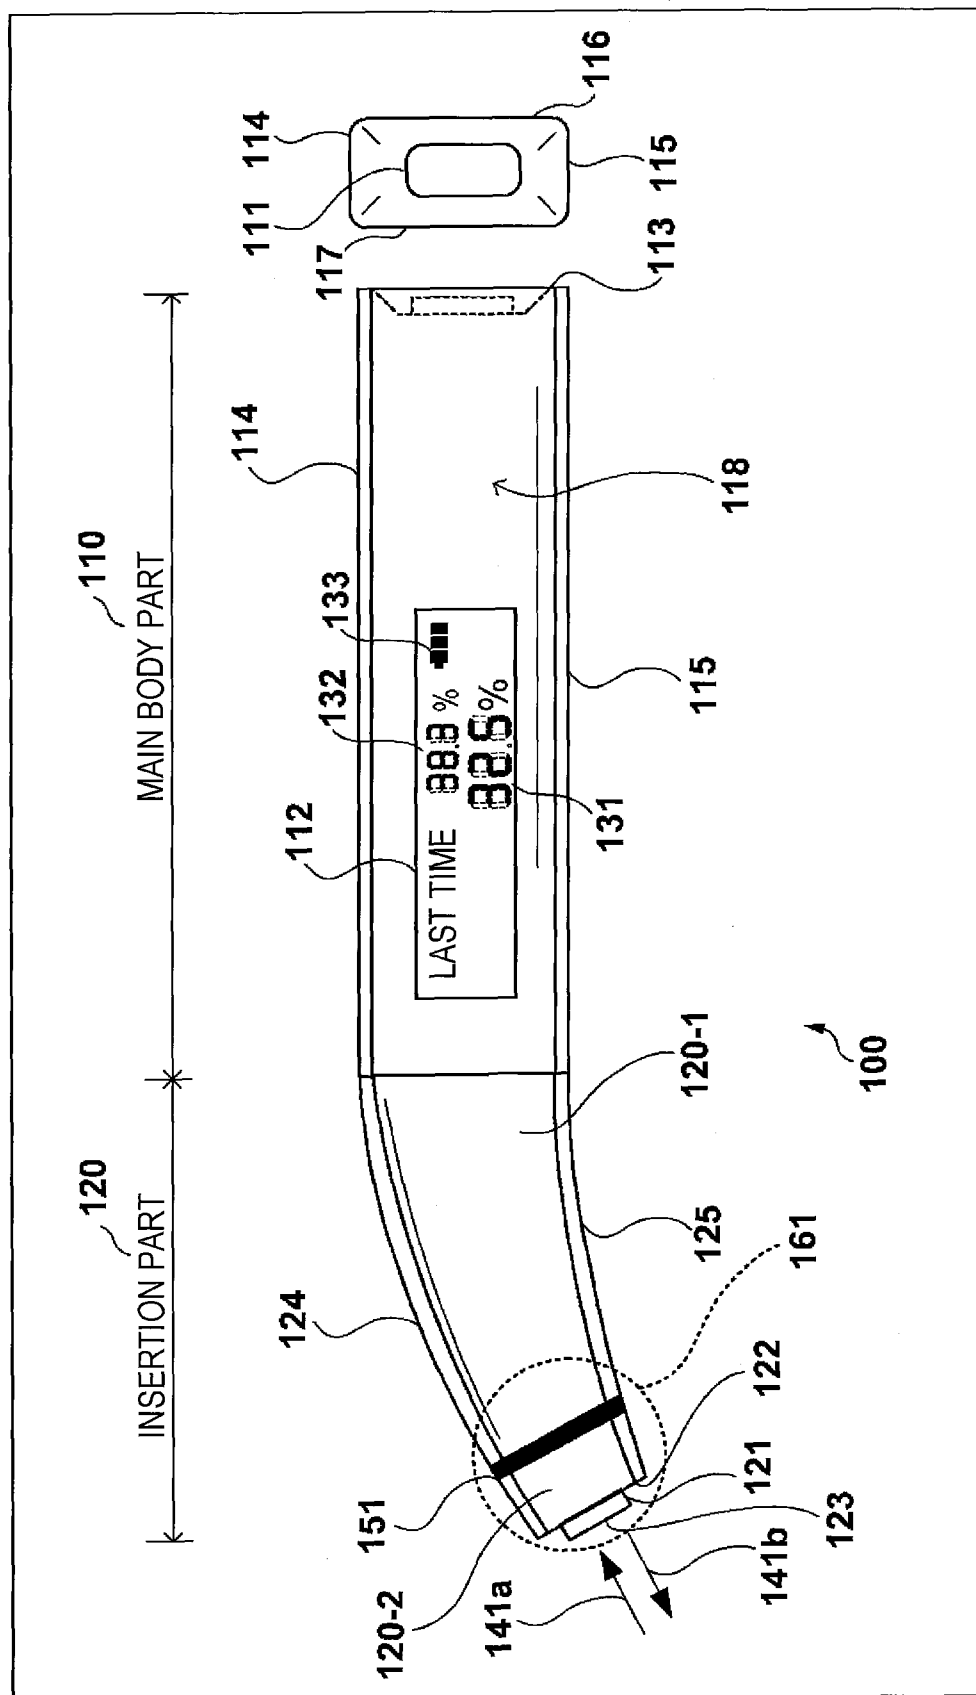


FIG. 1B

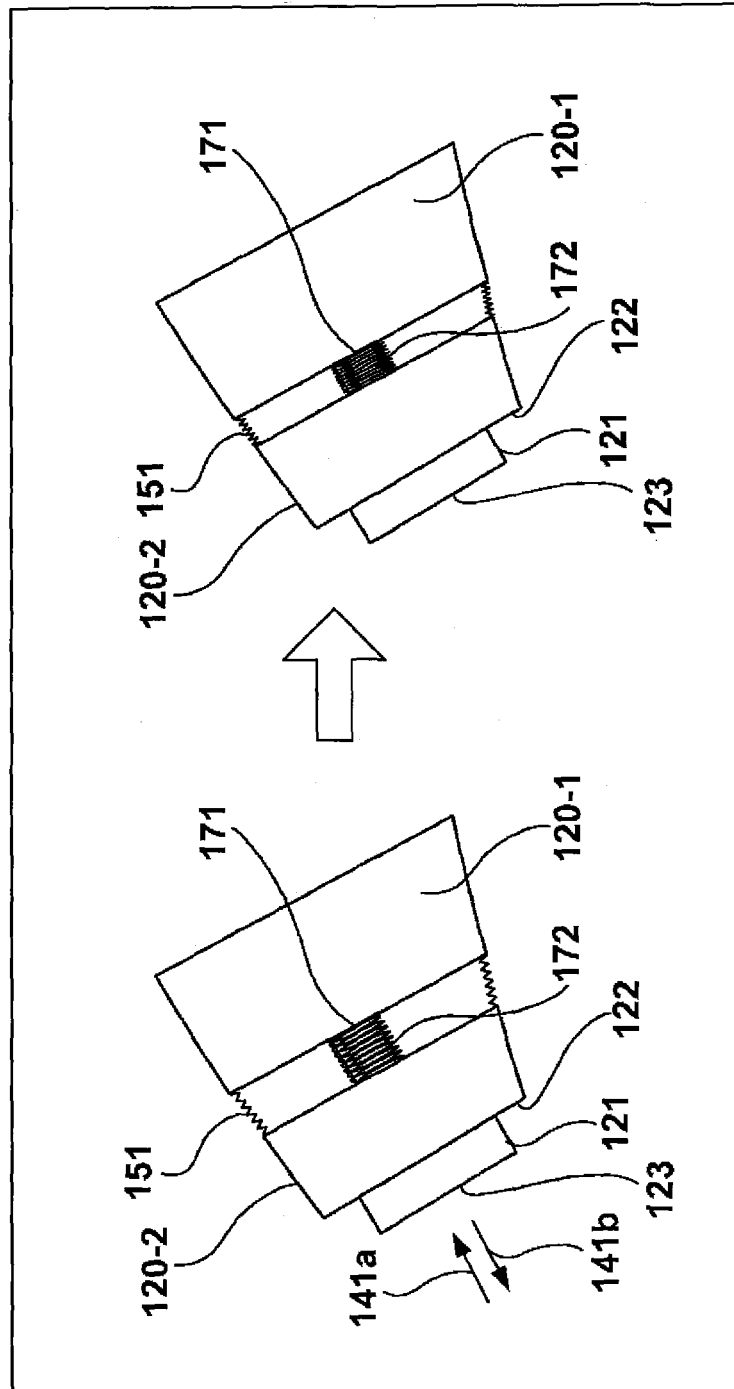


FIG. 2

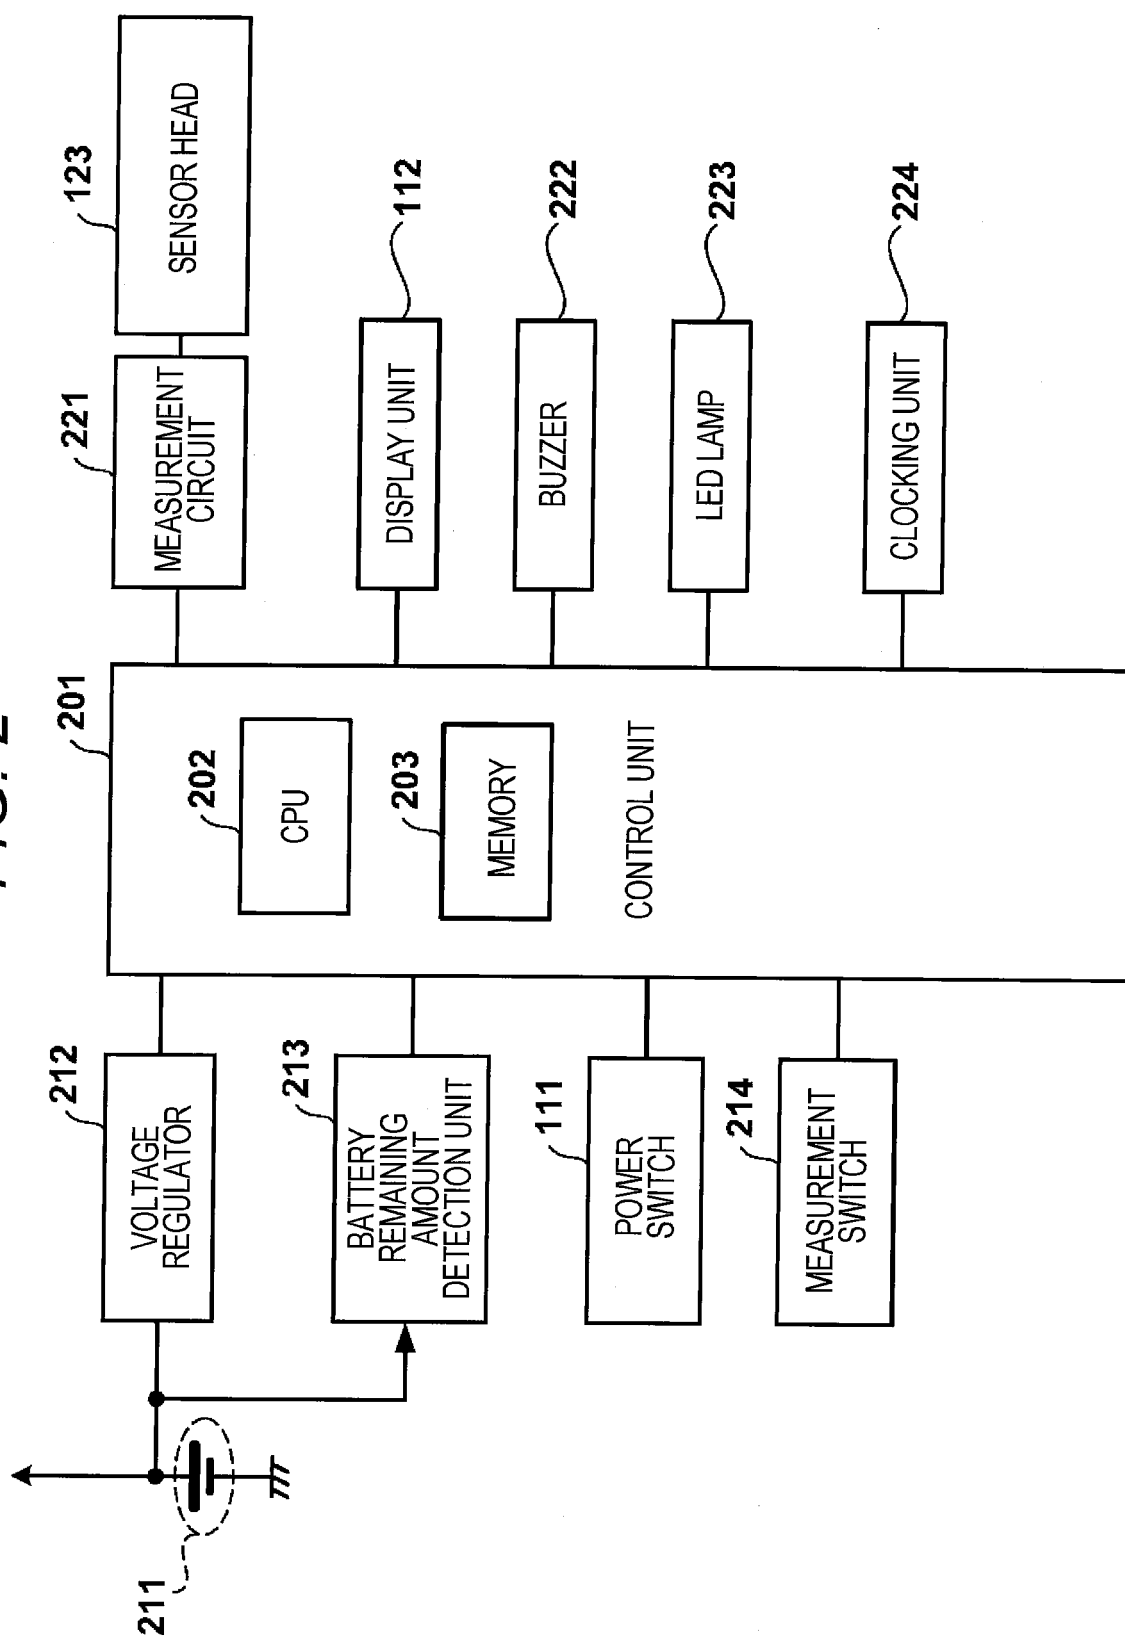


FIG. 3

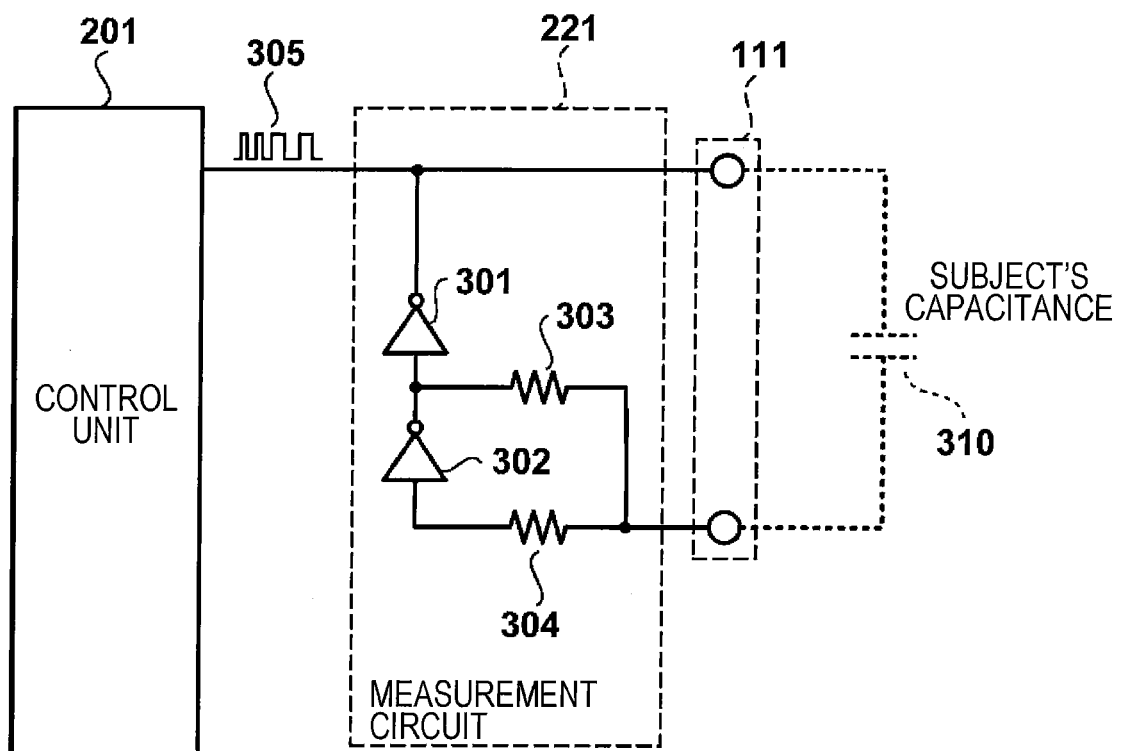


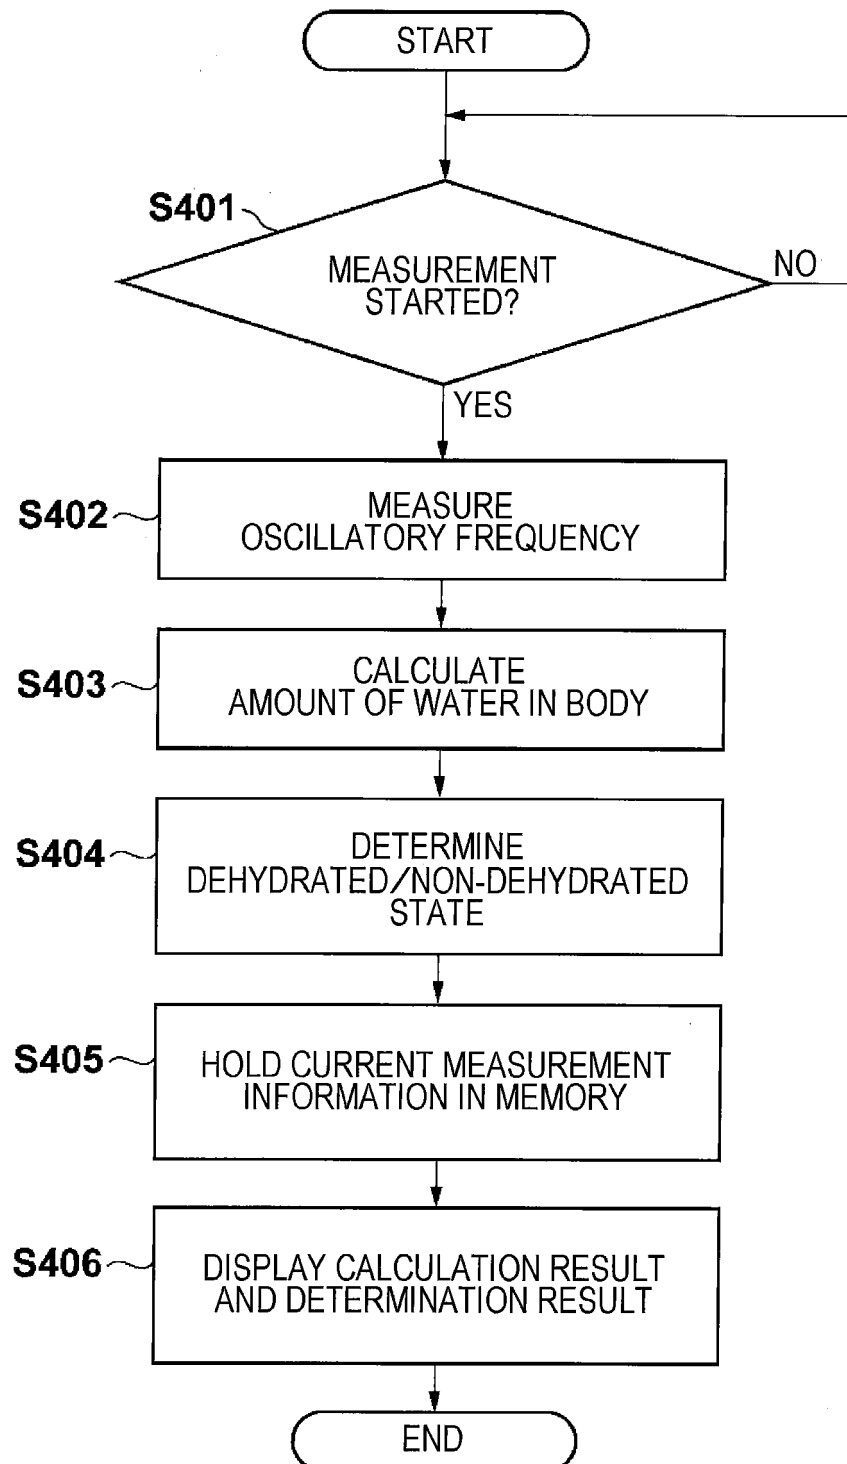
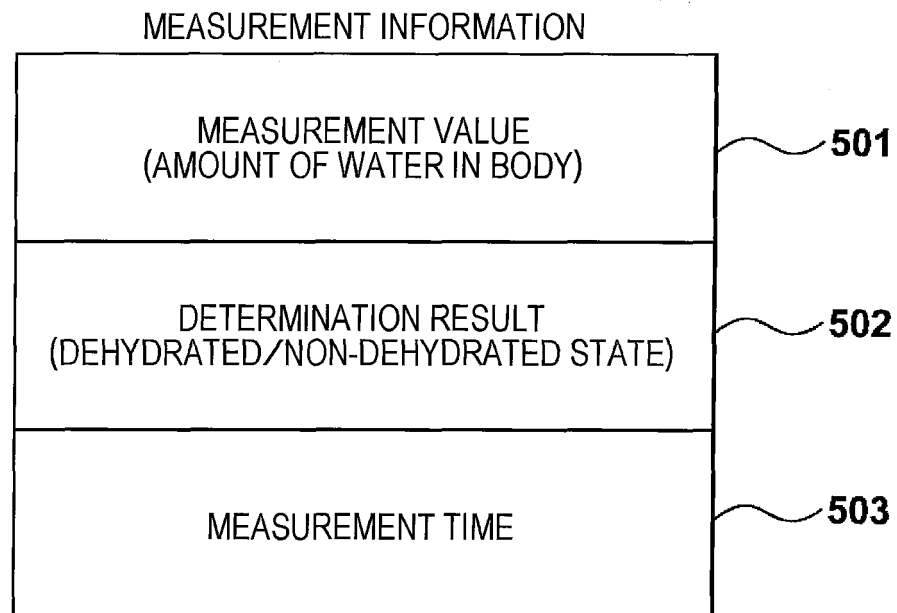
FIG. 4

FIG. 5



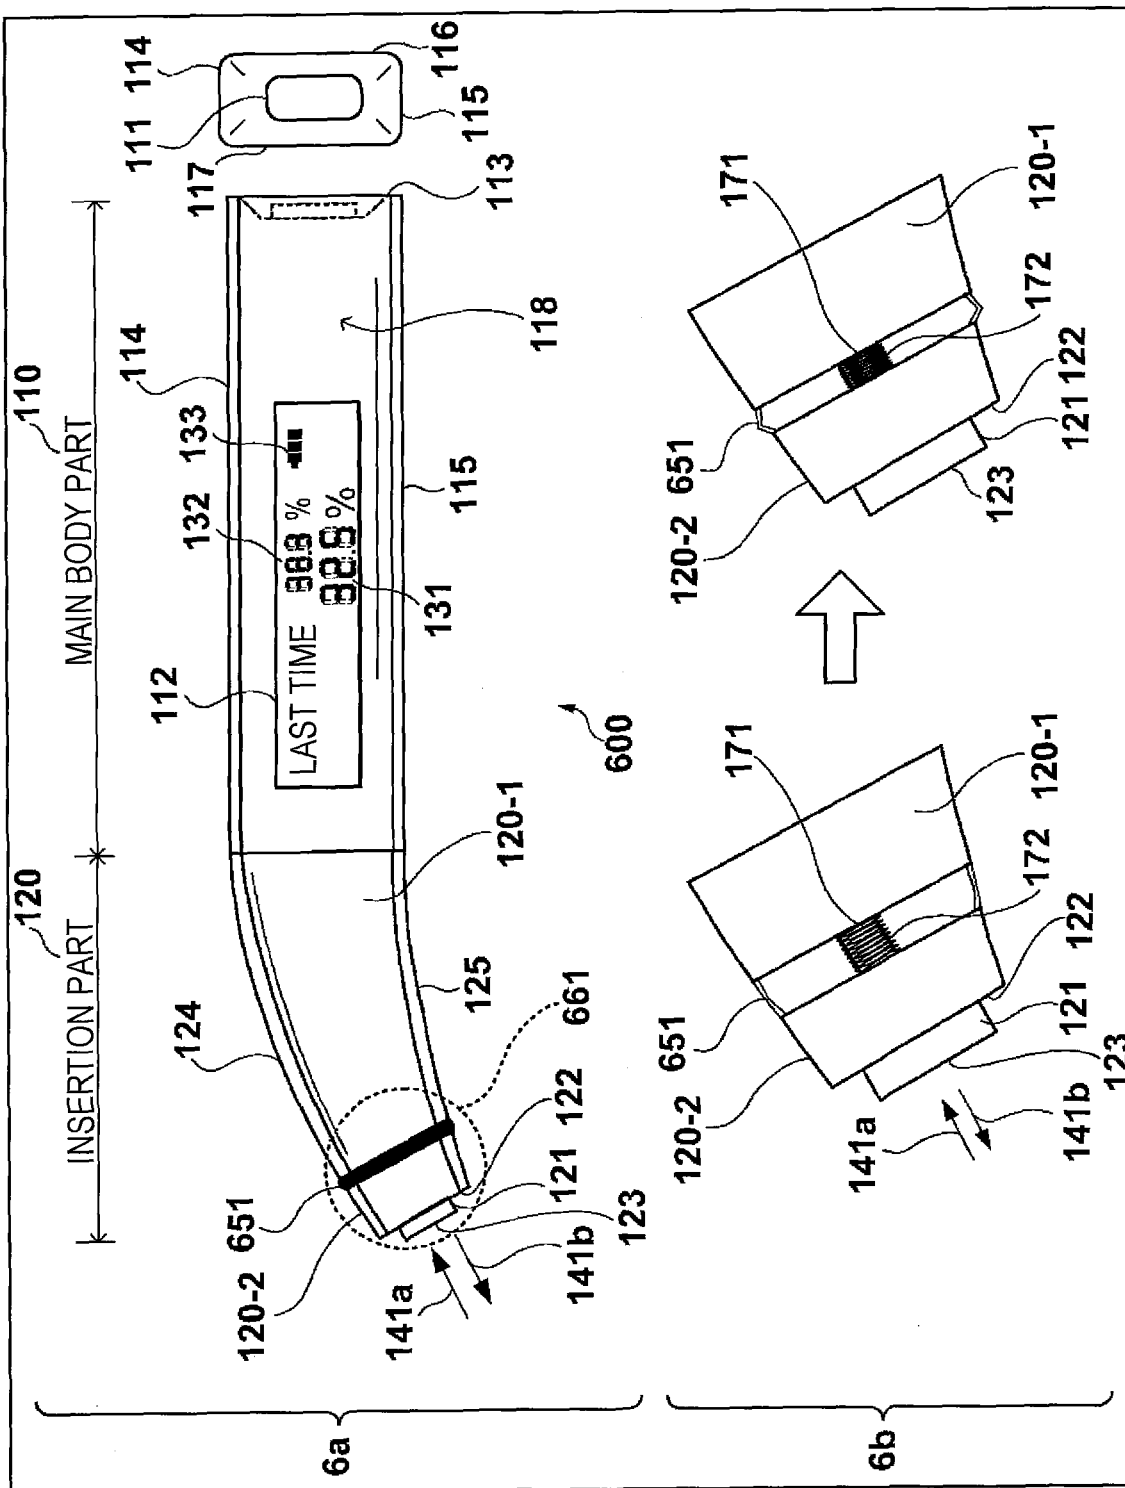


FIG. 6

FIG. 7

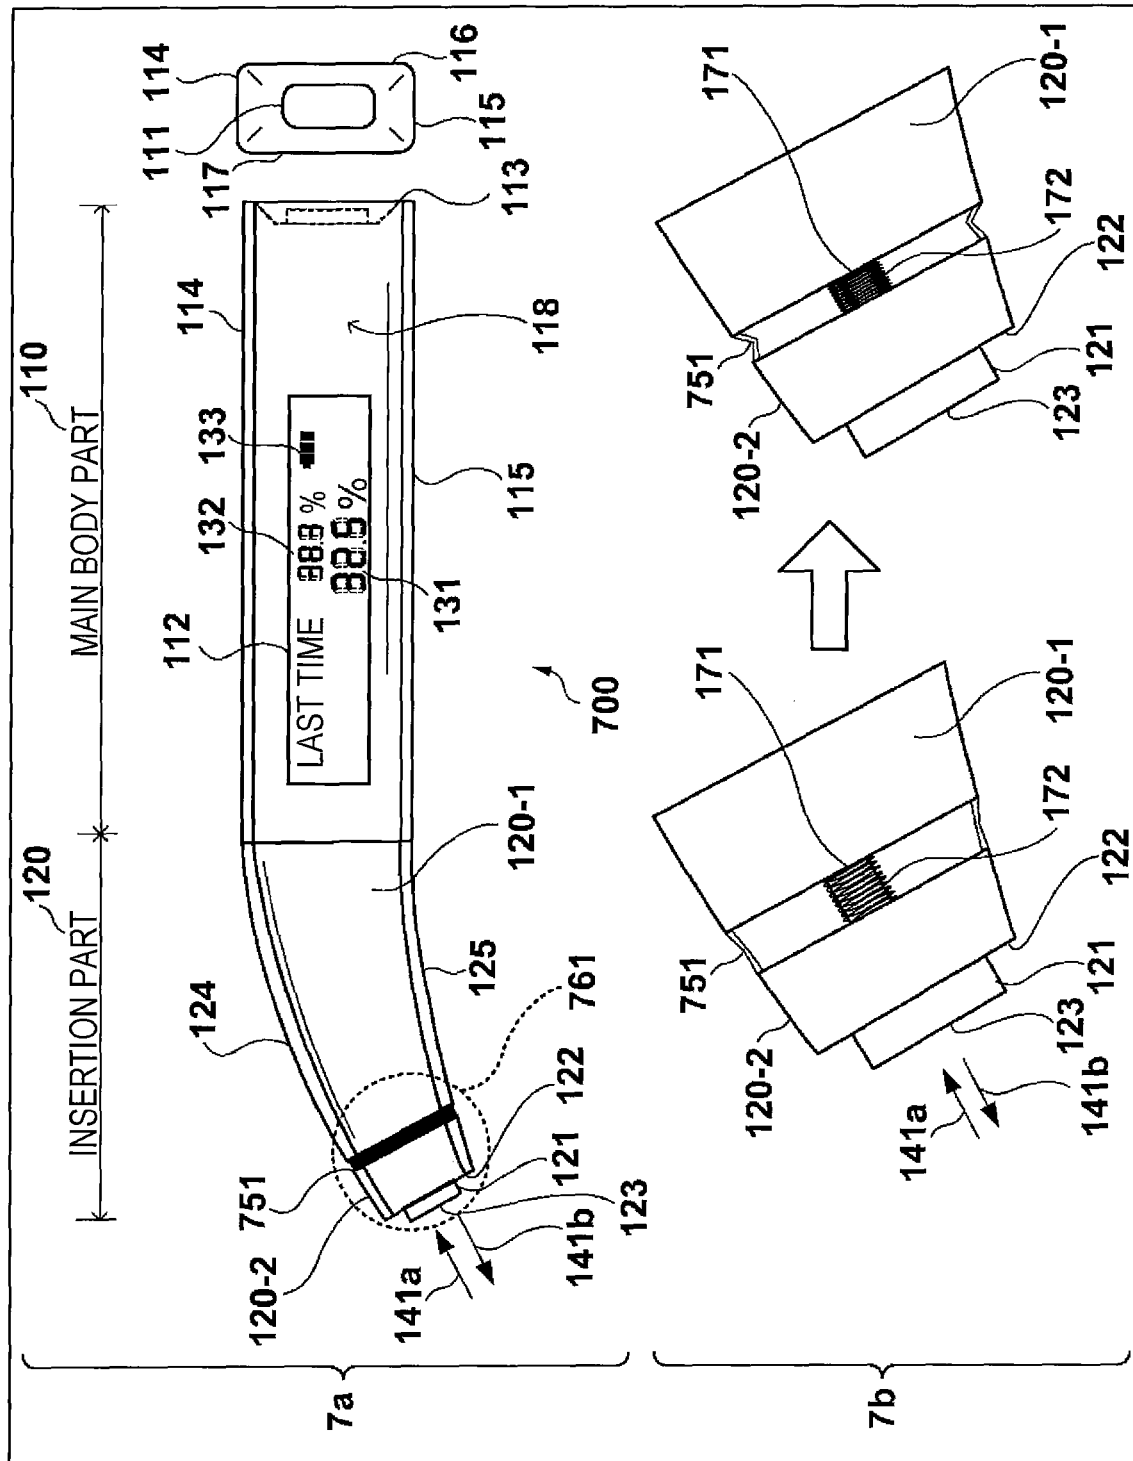


FIG. 8

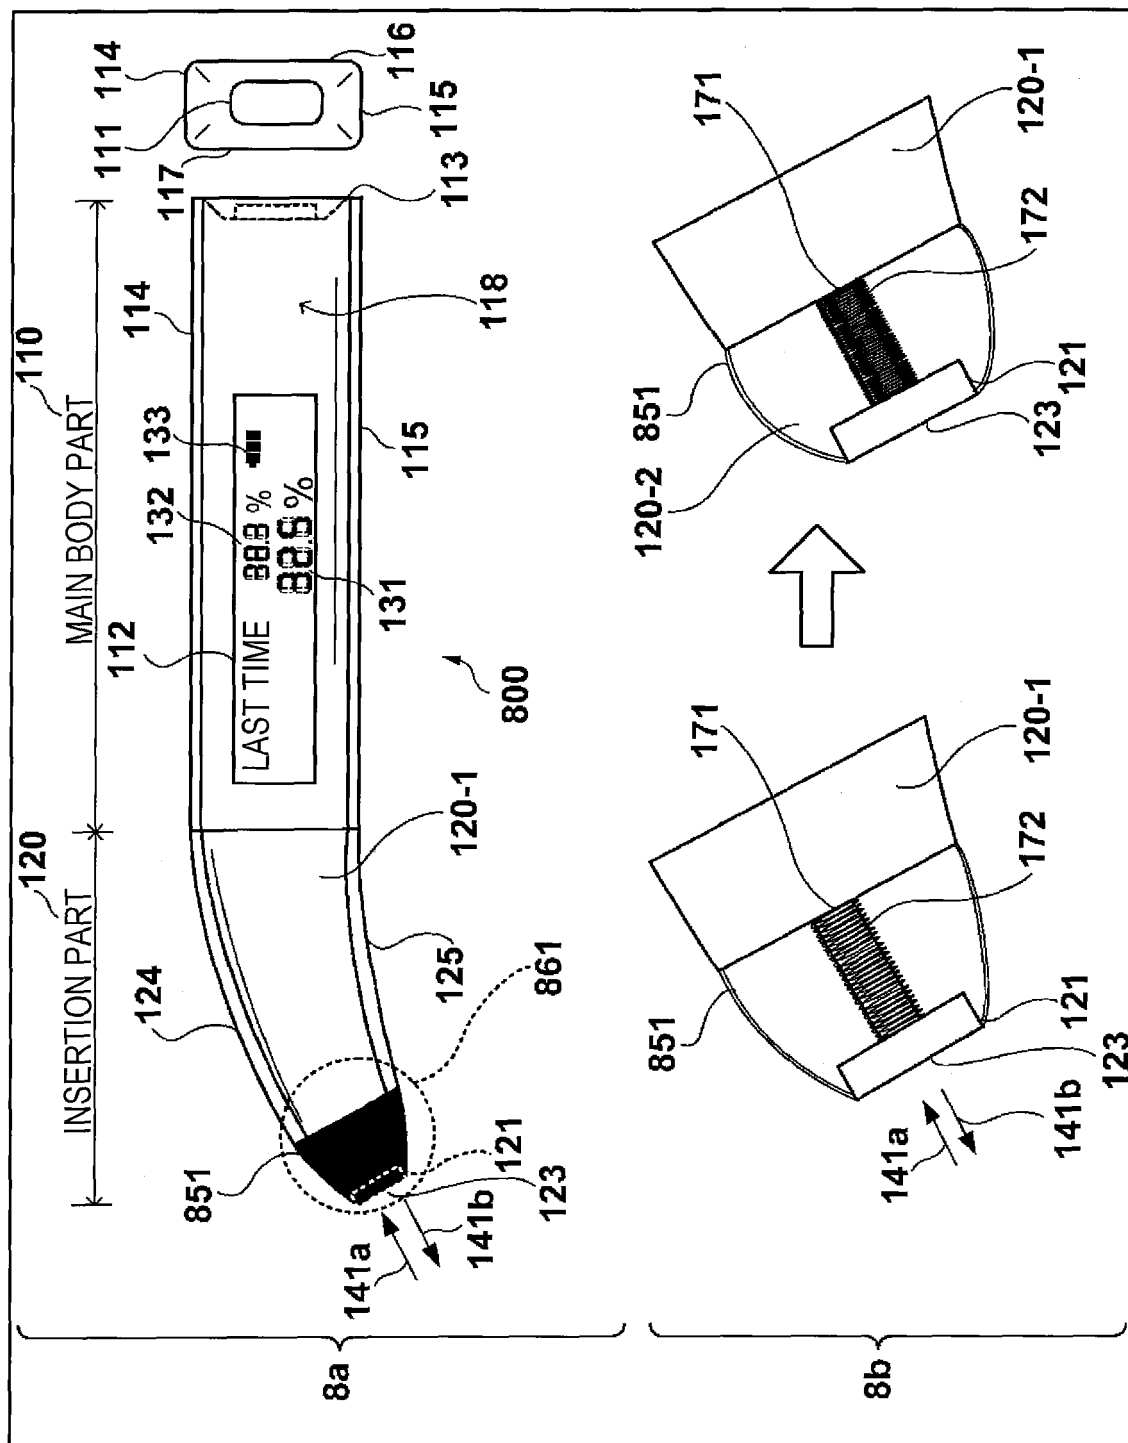


FIG. 9

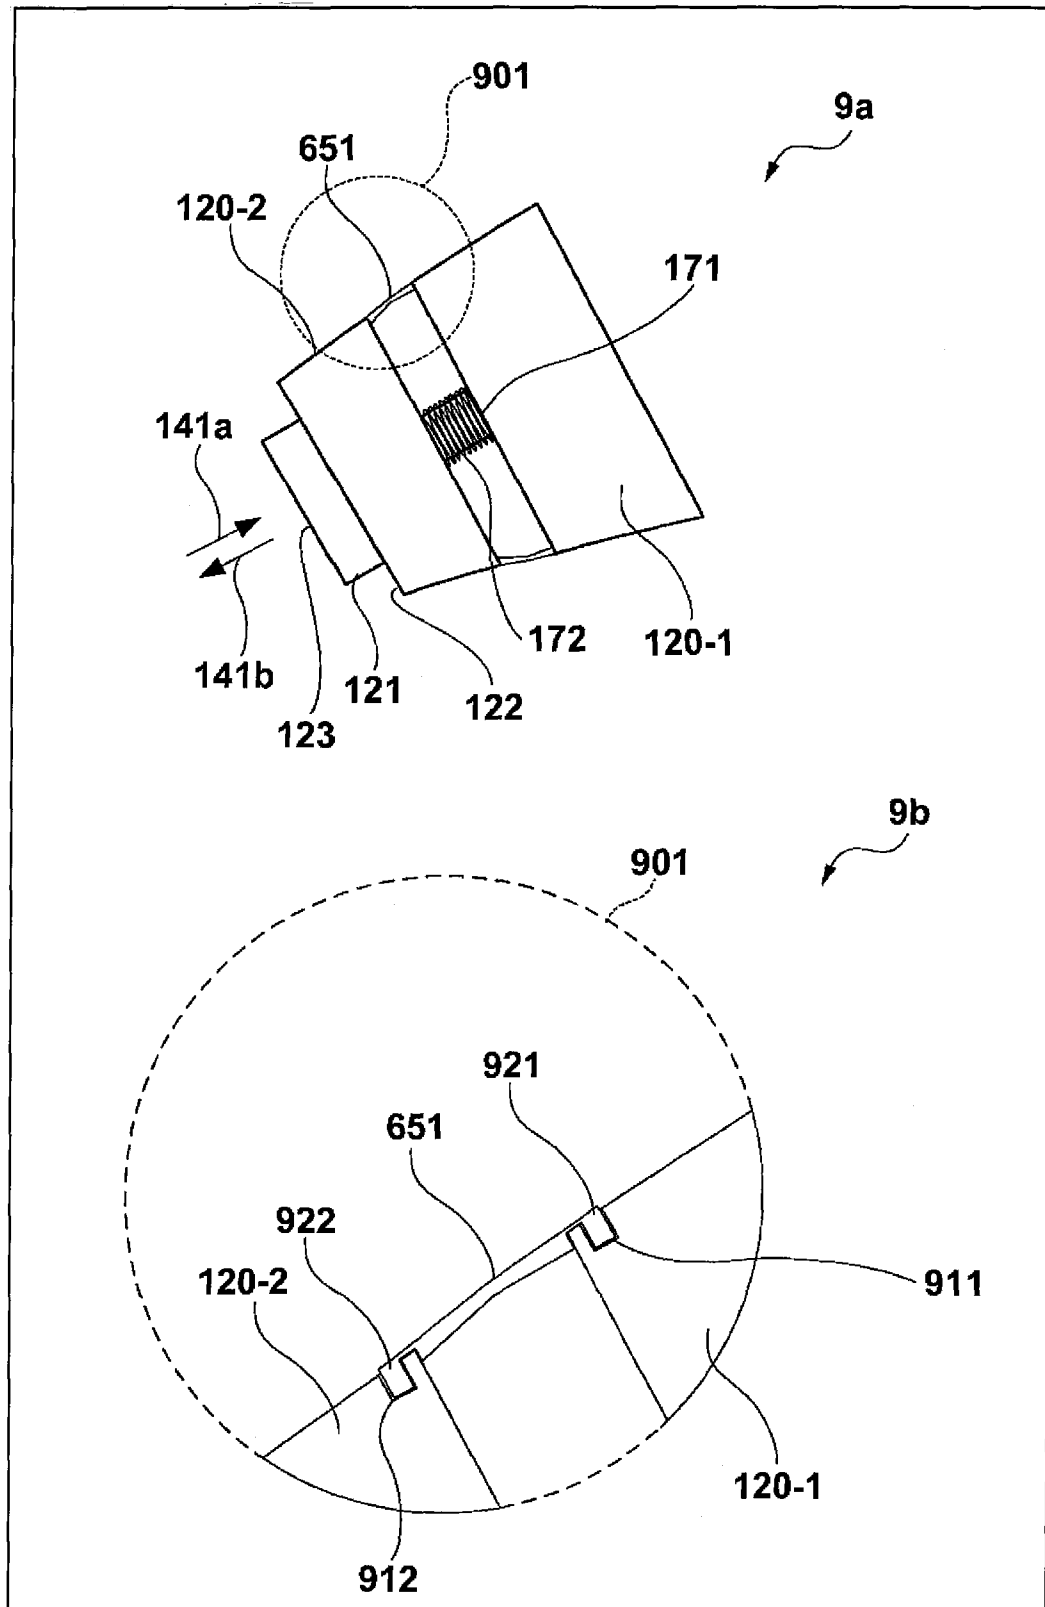


FIG. 10

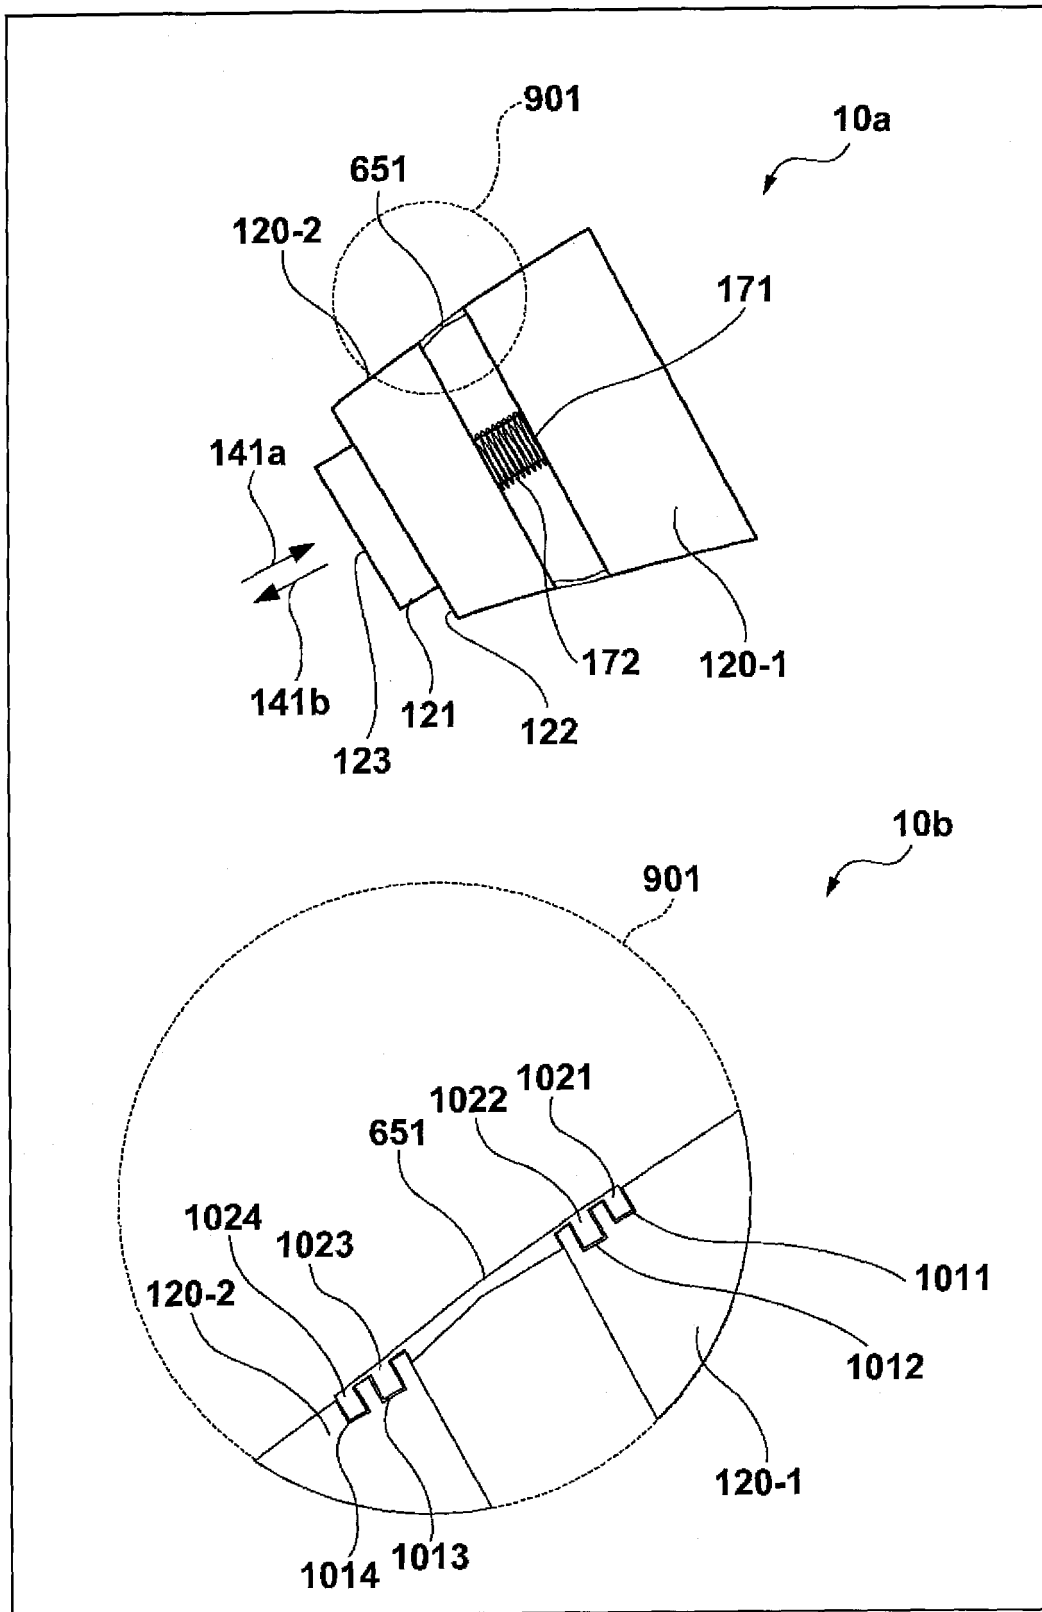


FIG. 11

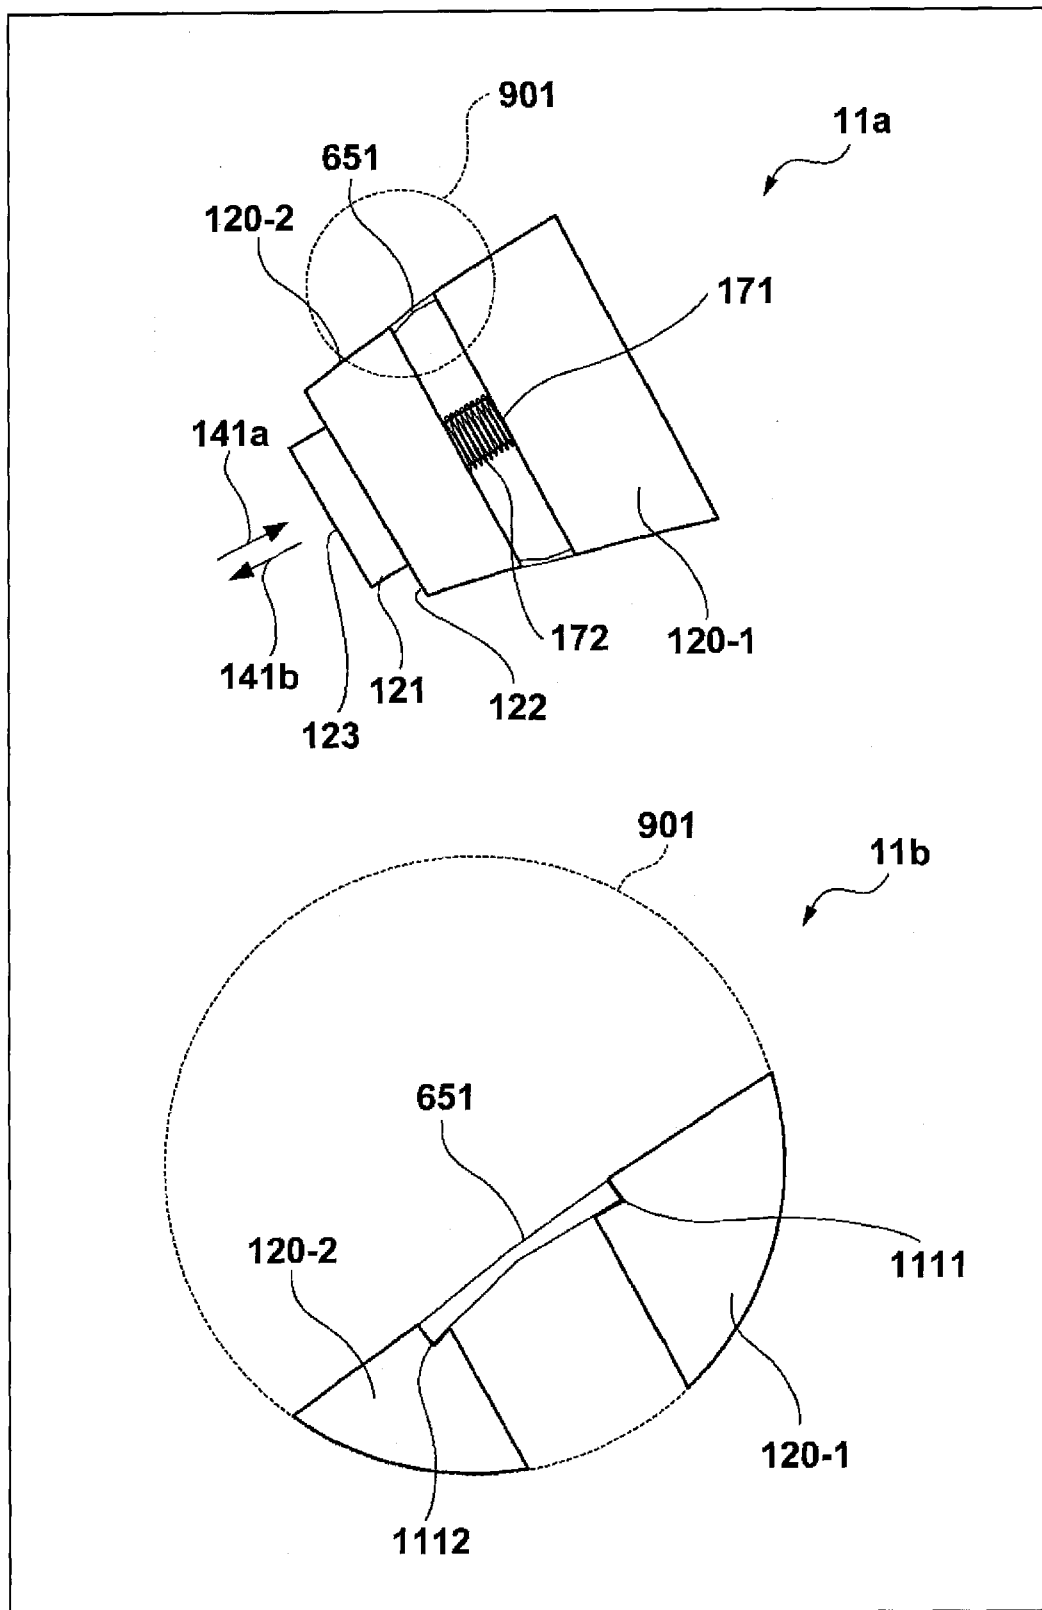
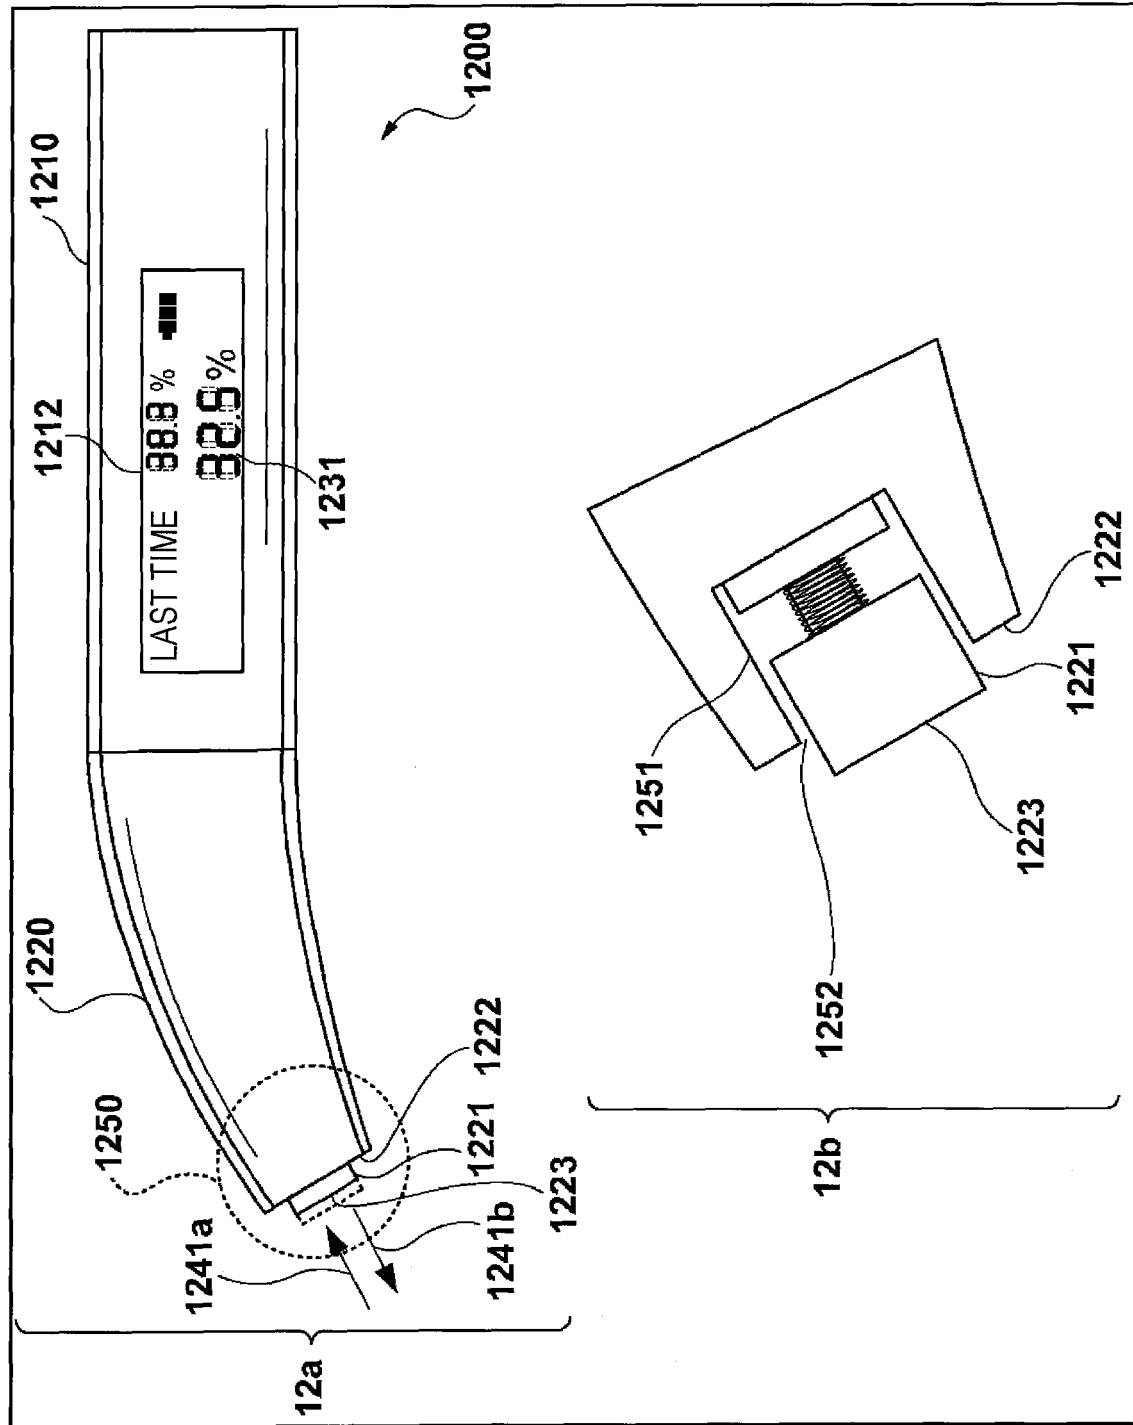


FIG. 12



REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 755672 A [0001]
- US 5755672 A [0008]
- JP 4417841 B [0009]

专利名称(译)	身体水表		
公开(公告)号	EP2886050B1	公开(公告)日	2017-01-04
申请号	EP2012891423	申请日	2012-08-14
[标]申请(专利权)人(译)	泰尔茂株式会社		
申请(专利权)人(译)	泰尔茂株式会社		
当前申请(专利权)人(译)	泰尔茂株式会社		
[标]发明人	YOSHINO KEISUKE HONDA KEI NISHIO KOSUKE KONDOU AKIRA TSUBOUCHI TAKESHI KOYAMA MIYUKI		
发明人	YOSHINO, KEISUKE HONDA, KEI NISHIO, KOSUKE KONDOU, AKIRA TSUBOUCHI, TAKESHI KOYAMA, MIYUKI		
IPC分类号	A61B5/053 A61B5/00		
CPC分类号	A61B5/0537 A61B5/4875 A61B2560/0418 A61B2562/029 A61B2562/247 G01N33/18		
其他公开文献	EP2886050A4 EP2886050A1		
外部链接	Espacenet		

摘要(译)

一个目的是改善用于测量受试者体内水量的装置的防水和防污性能。根据本发明的用于测量受试者身体中的水量的装置（100）包括形成为线性形状的主体部分（110）和从其一端以弯曲形状延伸的插入部分（120）。主体部分（100）。插入部分（120）包括尖端侧插入部分（120-2），尖端侧插入部分（120-2）具有固定有传感器单元（121）的尖端表面（122），其中传感器单元（121）与体表接触用于测量受试者体内水的数据的受试者，通过滑动机构支撑尖端侧插入部分（120-2）的基端插入部分（120-1），其中滑动机构允许尖端侧插入部分（120-2）在基本垂直于尖端表面（122）的方向上滑动，并且保护构件（651）液密地覆盖在尖端侧插入部分（120-2）和基端侧插入之间的滑动机构部分（120-1），其中保护构件（651）平滑地连接尖端侧插入部分（120-2）的外周表面和基端侧插入部分（120-1）的外周表面其他。

(19)		(11)	
(12)	EUROPEAN PATENT SPECIFICATION		
(45)	Date of publication and mention of the grant of the patent: 04.01.2017 - Bulletin 2017/01	(51)	Int. Cl. A61B 5/053 (2006.01) A61B 5/00 (2006.01)
(21)	Application number: 12891423.1	(86)	International application number: PCT/JP2012/080512
(22)	Date of filing: 14.08.2012	(87)	International publication number: WO 2014/027377 (20.02.2014 Gazette 2014/08)
(54)	BODY WATER METER KORFFENKAPSELZÄHLER HUMIDIMETRE CORPOREL		
(84)	Designated Contracting States: AE, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HH, HU, IE, IL, IT, LI, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR		
(43)	Date of publication of application: 24.06.2015 - Bulletin 2015/26		
(73)	Proprietor: Terumo Kabushiki Kaisha Tokyo 151-0872 (JP)		
(72)	Inventors: • YOSHINO, Keisuke Ashtigarakami-gun Kanagawa 259-0151 (JP) • HONDA, Kei Ashtigarakami-gun Kanagawa 259-0151 (JP) • NISHIO, Kosuke Ashtigarakami-gun Kanagawa 259-0151 (JP)		
(74)	Representative: Casabong & Partners Bayerstraße 7/175 80335 München (DE)		
(54)	National phase: WO-A1-2012/042878 JP-A-2009 051 153 JP-A-2009 153 727 US-A- 5 755 672		
Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention)			

EP 2 886 050 B1