



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 228 782 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
20.04.2005 Bulletin 2005/16

(51) Int Cl.⁷: **A61N 1/372, A61B 5/00**

(21) Application number: **01126937.0**

(22) Date of filing: **13.11.2001**

(54) **Medical communication system**

Medizinisches Kommunikationssystem

Système de communication médical

(84) Designated Contracting States:
CH DE FR IT LI

(72) Inventor: **Abrahamson, Hans**
113 38 Stockholm (SE)

(30) Priority: **31.01.2001 SE 0100284**

(56) References cited:

US-A- 5 107 833

US-A- 5 345 597

(43) Date of publication of application:
07.08.2002 Bulletin 2002/32

US-A- 5 438 329

US-A- 5 620 472

US-A- 6 150 951

(73) Proprietor: **St. Jude Medical AB**
175 84 Järfälla (SE)

EP 1 228 782 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the invention

[0001] The present invention relates to a medical communication system and to a method in a medical communication system according to the preambles of the independent claims.

Background of the invention

[0002] In RF coupled systems, which are perhaps the most commonly employed communication systems in modern implantable device systems, information is transferred from a transmitting coil to a receiving coil by way of a radiofrequency carrier signal. The carrier signal is modulated with the data that is to be transmitted using an appropriate modulation scheme, such as phase shift keying (PSK), frequency shift keying (FSK), or pulse position modulation (PPM), among numerous others. The modulated carrier induces a voltage in the receiving coil that tracks the modulated carrier signal. This received signal is then demodulated in order to recover the transmitted data. Because the stainless steel or titanium can commonly used to hermetically enclose an implanted device acts as a low-pass filter for the transmitted RF signals, attenuation increases as frequency is increased. Devices currently on the market have a maximum frequency of less than 200-kHz. Also, the transmitting range has been limited to 2- to 3-inches or so.

[0003] Depending upon the type of modulation and demodulation used in an RF communication system, the data or bit rate cannot exceed a predetermined fraction of the carrier frequency; otherwise, the ability to reliably distinguish between modulation representing a digital (binary) "1" from a digital "0" is compromised. Schemes are known which encode digital data to transmit more data per unit time and reduce implanted device current drain. However, at very high data transmission rates, the current drain would be very high.

[0004] RF communication programming units typically interface with the implanted device through the use of a programming head or programming paddle, a handheld unit adapted to be placed on the patient's body over the implant site of the patient's implanted device. In some cases, a magnet in the programming head effects reed switch closure in the implanted device to initiate a communication session (this is a safeguard against accidental programming of the device; otherwise, reed switch closure has little meaning as far as communication of information). Thereafter, uplink and downlink communication takes place between the implanted device's transmitter and receiver and a receiver and transmitter disposed within the programming head.

[0005] A newly proposed standard for Medical Implant Communications Service, MICS, states that a number of radio communication channels within a certain frequency range can be used to establish a com-

munication link between an implanted device and an external unit, or between implanted devices. According to the standard one communication link, i.e. communication between two devices, is not allowed to use more than one channel at a time. If a channel becomes unusable of some reason the system can switch to another of the specified channels. Before a new channel can be accessed, the channel shall be monitored in a manner described by the standard in order to avoid collisions.

[0006] To avoid accessing a channel in use, a MICS system shall, according to the standard, monitor the channel within the frequency range allocated for MICS information transmission before attempting to establish contact. The earmarked frequency range for communication is divided into N channels. The standard states that a channel shall be monitored for a period of at least 10 ms within 5 seconds prior to access, to ensure it is not occupied. In a noisy environment the channel in use can become inaccessible and a rather frequent channel switching can be necessary due to circumstances beyond the control of the operator.

[0007] If a search fails on one channel, e.g. due to too high noise level or if the channel is already in use, a 10 ms search period must be started to monitor a new channel and the procedure must be repeated until a noise-free channel is found. Repetitive searches might result in several 10ms search periods before a noise free channel is found which lowers the transmission stability of the communication link.

[0008] Furthermore, the standard prescribes a procedure how to investigate a channel before accessing it. In short a frequency monitoring is performed by incorporating a mechanism in a medical implant transmitter for monitoring the channel or channels that the MICS system devices intend to occupy. The monitoring system antenna shall be the antenna normally used by the transmitter for a communications session. Before a medical implant transmitter initiates a MICS communication session, the following access criteria must be met:

(1) The monitoring system bandwidth measured at its 20 dB down points must be equal to or greater than the emission bandwidth of the intended transmission.

(2) Within 5 seconds prior to initiating a communications session, circuitry associated with a medical implant transmitter must monitor the channel or channels the MICS system devices intend to occupy for a minimum of 10 milliseconds per channel. Before transmitting on an alternate channel, the channel must be monitored for a period of at least 10 milliseconds.

[0009] A similar way of detecting carrier frequencies is also included in a standard draft version from European Telecommunication Standard Institute (ETSI). The European standard covers radio equipment in the fre-

quency range 402 MHz to 405 MHz for Ultra Low Power Active Medical Implants and Accessories. Within this frequency range the maximum permitted emission bandwidth for each channel is set to 300 kHz, i.e. 10 channels side by side starting from 402 MHz.

[0010] US-6,150,951 relates to a medical telemetry system with wireless and physical communication channels. The system includes an apparatus for monitoring a transmission activity in a pre-given channel range for determining possible channels in use, so that the transmission channel is assigned to the transmitter in accordance with the determined channels in use. Before a transmitter will be used for transmission purposes in combination with a receiver, the receiver monitors the "on air activity" in its environment for any transmission activity in a certain channel range assigned to the receiver. This phase is called the "scanning phase". The receiver thus determines which channels are in use, e.g., by any other transmitter or by other functional units. The receiver may e.g. comprise a synthesizer receiver unit for stepping through a predefined channel range and for measuring the received signal strength on each of the channels. When the received signal strength of a certain channel exceeds a certain predefined value, the receiver will treat this channel as being in use.

In this known device the transmitter is designated a specific channel during the scanning phase that it then uses during operation. One drawback with this system is that it is unable to handle a situation when e.g. noise disturbs the used specific channel during operation. The reason is that the scanning phase is performed before the transmitter will be used for transmission purposes.

[0011] The object of the present invention is to set forth a technique that minimizes the time spent to decide which new channel to be used once the currently used channel becomes unusable in order to recognize an available channel for a fast channel switchover.

Summary of the invention

[0012] A medical communication system and a medical communication method according to the characterizing parts of the independent claims achieve the above-mentioned object.

[0013] Preferred embodiments are set forth in the dependent claims.

[0014] Thus, instead of interrupting the transmission once the current channel is discarded and wasting time during the one or several 10 ms search periods the new channel(s) being monitored the monitoring process runs continuously and concurrently with the normal transmission process.

Short description of the appended drawings

[0015]

Figure 1 shows a simplified block diagram of a med-

ical communication system according to the present invention.

Figure 2 shows a flow chart illustrating a method in the medical communication system according to the present invention.

Detailed description of preferred embodiments of the invention

[0016] Figure 1 shows a simplified block diagram of a medical communication system according to the present invention.

The medical communication system comprises two units wherein at least one of the units is adapted to be implanted in a human or animal body. The figure discloses a system comprising an external unit 2 and an internal unit 4 separated by the skin 6 of the patient. The external unit 2 comprises external transmitter means 8, monitoring means 10, control means 12 and register tables 14. Naturally many other means are included in the external means, but these are omitted when describing the present invention, as they are not directly involved when practising the invention. Persons skilled in the art are aware of these other means, among which can be mentioned energising means, memory means, display means, data entering means e.g. a keyboard, etc. Also omitted is a programming head, which inter alia includes transmitting coils, used to generate the radio frequency signals. The programming head is connected to the external transmitter means 8 e.g. via an electrical cable and is positioned during transmission on the skin close to the internal unit 4. Naturally other possibilities are possible, e.g. the programming head need not be positioned in the vicinity of the internal unit and the communication between the programming head and the external emitter may be wireless.

Any conventional programming head adapted for the used radio frequencies may be used.

The internal unit 4 is adapted to be implanted into a human or animal body and comprises internal transmitter means 16 arranged to communicate with the external transmitter means 8. The internal transmitter means 16 is provided with all necessary circuitry in order to be able to perform the communication, e.g. a transmitting antenna, modulation and demodulation means.

The internal unit 4 may be any device adapted to be implanted into a human or animal body, e.g. a heart pacemaker, a heart defibrillator, a cardioverter or an infusion pump, and is naturally provided with the necessary means needed to perform its intended purpose. In case of a heart pacemaker the internal unit includes a battery means, pulse generating means, electrode means, control means etc.

[0017] In figure 1 the dotted double-arrowhead line designates the radio frequency communication signal between the units.

[0018] Using one active channel of a number of radio communication channels e.g. in accordance with the

above-described MICS system performs the communication between the two units.

[0019] According to the present invention the monitoring means 10 monitors all communication channels in the prescribed frequency range not presently used for communication between the units, i.e. the passive channels. These channels are continuously monitored by the monitoring means concurrently with the performed communication.

[0020] During the monitoring the monitoring means preferably uses the antenna, e.g. the programming head, connected to the transmitter means.

[0021] The intention of the monitoring is to assess the activity in channel using a specific frequency. The activity may be caused by that the channel already is used or by any type of interference, e.g. noise due to electromagnetic interference.

When the activity in the monitored channel is too high that channel is regarded as non-available for communication. The activity of a specific channel may be determined in many different ways. One obvious way is to integrate the signal in the frequency designated to the channel and compare the calculated value with a threshold, wherein if the value is below the threshold the activity is low and the channel is available for communication. If the value is above the threshold the activity of the channel is considered too high to allow secure communication. The result of the monitoring is stored in the register table 14 that is provided with one register for each communication channel. In each register may be stored information reflecting the result of the monitoring, either as a logic value, e.g. OK or not OK for communication, or the analogue value resulting from the integration. Alternatively both these values may be stored.

[0022] When switching to a new channel the control means 12 that initiates the switching may either use a simple criterion that the activity level shall be lower than a threshold, i.e. choose one of the channels having an OK stored in its register. Alternatively the channel is chosen with the lowest analogue value stored in the register table provided that this value is below the threshold. Upon channel switching one of the passive channels that fulfils the above-mentioned criterion becomes active and the presently active channel becomes passive. The channel switching according to the present invention is more or less instantly performed and depends upon which channel switching method that is presently used. In one channel switching method the messages sent from a transmitter to a receiver includes information about which channel/channels the receiver should switch to. The channel switching is performed either in response of a direct switching command, in response of a command included in the message, or the receiver itself changes to a defined channel if the connection to the transmitter is broken.

Alternately the transmitter and receiver have a predefined channel switching scheme to follow as soon as a channel switching takes place. Thus, if the receiver does

not receive a message within a prescribed time or does not receive confirmation of the last sent message the receiver switches to the next predefined channel, naturally provided that the next predefined channel is available for communication.

[0023] According to a preferred embodiment of the present invention all passive channels are monitored for a period of at least 10 ms at least every 5th second.

[0024] The minimum time set for monitoring and the frequency of the monitoring are dependants of requirements set by different standards that of course may be changed, e.g. to a shorter monitoring period and a more frequent monitoring. All these possible changes fall within the broadest scope of the present invention that is defined by the independent claims.

[0025] According to a first preferred embodiment of the present invention the passive channels are monitored using a first monitoring mode where all passive channels are scanned in sequence, wherein each channel is at least scanned each 5th second.

[0026] According to a second preferred embodiment of the present invention the passive channels are monitored using a second monitoring mode where all passive channels are monitored in parallel.

[0027] According to a third preferred embodiment of the present invention the passive channels are monitored using a third monitoring mode where all passive channels are monitored in parallel by using a frequency analysing algorithm. In this embodiment a wide-band signal is created from the received radio signal with a bandwidth equal to the sum of the bandwidths of all N channels. After applying a frequency analysing algorithm, such as the Fast Fourier Transform or a wavelet algorithm, the signal level in all N channels can be calculated simultaneously in on single process. The corresponding activity level in each channel, resulting from the calculation, is then stored in the register table in the same way as described above. The wavelet algorithm is a method for determining the frequency content in an unknown signal by adapting known signals having known frequency contents to the unknown signal so that the unknown signal may be expressed in terms of the known signals.

[0028] When choosing a new active channel different selection criterion may be used when activity information is stored in the register table in the form of OK or not OK.

According to one selection criterion the channel that last received an OK is chosen. According to another selection criterion the channel using a frequency that differs most from the frequency of the presently used active channel is chosen. Naturally combinations of these criteria may be used.

[0029] As indicated above each unit comprises communication means e.g. transmitter coils, adapted to transmit and receive information using said communication channels.

[0030] Figure 2 shows a flow chart illustrating a meth-

od in the medical communication system according to the present invention.

The flow chart only schematically illustrates the principles of the present invention.

The illustrated method comprises the following main steps or procedures:

- a) Start a communication session between two units, using one active channel of a number of radio communication channels. At least one of said units is adapted to be implanted in a human or animal body.
- b) Continuously monitoring the communication channels not presently used for communication, called passive channels, by using monitoring means concurrently with the performed communication. Shown in the left branch of the figure.
- c) Storing the result of said monitoring in a register table provided with one register for each communication channel, wherein the result indicates if a channel is available for communication.

[0031] The figure further illustrates (in the right branch) that the active channel is continuously monitored and that a channel switching is performed if it is determined that the active channel is unusable. Upon channel switching one of the passive channels available for communication instantly becomes active.

[0032] According to a preferred embodiment each one of the passive channels is monitored in step b) for a period of at least 10 ms at least every 5th second.

[0033] The present invention is not limited to the above-described preferred embodiments. Various alternatives, modifications and equivalents may be used. Therefore, the above embodiments should not be taken as limiting the scope of the invention, which is defined by the appending claims.

Claims

1. A medical communication system adapted to establish a communication link and to perform communication between two units (2,4), where at least one of said units is adapted to be implanted in a human or animal body, the system being arranged to use a single channel, selected from a plurality of communication channels which can be either active or passive, for establishing said communication link and for performing said communication as the active communication channel during a communication time interval, the other channels being termed passive channels, and further to comprise a monitoring means (10) adapted to monitor said plurality of communication channels, **characterized by** a register table (14) provided with one register for each communication channel, and control means (12), said monitoring means (10) and said control means (12) are such that said passive channels are monitored with respect to their availability for communication by said monitoring means (10) during said communication time interval and that the result of said monitoring is stored in said register table (14) said active channel is continuously monitored by said monitoring means and said control means (12) performs a channel switching, when determining that the active channel is unusable, to an available passive channel which then instantly becomes the active channel.
2. Medical communication system according to claim 1, **characterized in that** each one of the passive channels is monitored for a period of at least 10 ms at least every 5th second.
3. Medical communication system according to any preceding claim, **characterized in that** said passive channels are monitored using a first monitoring mode where all passive channels are scanned in sequence, wherein each channel is at least scanned each 5th second.
4. Medical communication system according to any of claims 1-2, **characterized in that** said passive channels are monitored using a second monitoring mode where all passive channels are monitored in parallel.
5. Medical communication system according to any of claims 1-2, **characterized in that** said passive channels are monitored using a third monitoring mode where all passive channels are monitored in parallel by using a frequency analysing algorithm.
6. Medical communication system according to any preceding claim, **characterized in that** said monitoring means is adapted to generate an acknowledgement signal when a channel fulfils a predetermined access criterion and to store said signal in a register representing the channel.
7. Medical communication system according to claim 6, **characterized in that**, wherein said access criterion is fulfilled if a value representing the energy content of the signal activity in the monitored channel is lower than a predetermined value.
8. Medical communication system according to claim 7, **characterized in that** the energy content is determined by integrating the signal activity.
9. Method in a medical communication system, wherein the method comprises the following steps:
 - a) start communication session between two units, at least one of said units is implanted in

a human or animal body, using one active channel, of a number of communication channels, b) monitoring the communication channels not presently used for communication, passive channels, **characterized in that** said monitoring occurs concurrently with the performed communication, and

c) storing the result of said monitoring in a register table provided with one register for each communication channel, wherein the result indicates if a channel is available for communication.

d) continuously monitoring the active channel and performing a channel switching if it is determined that the active channel is unusable, wherein upon channel switching one of the passive channels available for communication instantly becomes active.

10. Method in a medical communication system according to claim 9, **characterized in that** each one of the passive channels is monitored in step b) for a period of at least 10 ms at least every 5th second.

Patentansprüche

1. Medizinisches Kommunikationssystem, ausgelegt zwischen zwei Einheiten (2, 4) eine Kommunikationsverbindung herzustellen und eine Kommunikation auszuführen, wobei wenigstens eine der genannten Einheiten ausgelegt ist, in einen menschlichen oder tierischen Körper implantiert zu werden, das System ausgebildet ist, einen einzigen aus einer Vielzahl von Kommunikationskanälen ausgewählten Kanal zu benutzen, der entweder aktiv oder passiv sein kann, zum Erstellen der genannten Kommunikationsverbindung und zum Durchführen der genannten Kommunikation während eines Kommunikationszeitintervalls als aktiver Kommunikationskanal, wobei die anderen Kanäle als passive Kanäle benannt werden, und ferner eine Überwachungsvorrichtung (10) zu enthalten, die ausgelegt ist, die genannte Vielzahl von Kommunikationskanälen zu überwachen, **gekennzeichnet durch** eine Registertabelle (14), die mit einem Register für jeden Kommunikationskanal ausgestattet ist, und eine Steuervorrichtung (12), wobei die genannte Überwachungsvorrichtung (10) und die genannte Steuervorrichtung (12) so ausgebildet sind, dass die genannten passiven Kanäle im Hinblick auf ihre Verfügbarkeit für eine Kommunikation während des genannten Kommunikationszeitintervalls **durch** die genannte Überwachungsvorrichtung (10) überwacht werden, und dass das Ergebnis der genannten Überwachung in der genannten Registertabelle (14) gespeichert wird, dass der genannte aktive Kanal kontinuierlich **durch** die genannte Überwa-

chungsvorrichtung überwacht wird und die genannte Steuervorrichtung (12) eine Kanalumschaltung auf einen verfügbaren passiven Kanal ausgeführt, der dann sofort der aktive Kanal wird, wenn festgestellt wird, dass der aktive Kanal nicht benutzbar ist.

2. Medizinisches Kommunikationssystem nach Anspruch 1, **dadurch gekennzeichnet, dass** jeder der passiven Kanäle für eine Periode von wenigstens 10 ms wenigstens jede fünfte Sekunde überwacht wird.
3. Medizinisches Kommunikationssystem nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die genannten passiven Kanäle unter Verwendung eines ersten Überwachungsmodus, bei dem alle passiven Kanäle nacheinander abgetastet werden, überwacht werden, wobei jeder Kanal wenigstens jede fünfte Sekunde abgetastet wird.
4. Medizinisches Kommunikationssystem nach einem der Ansprüche 1 bis 2, **dadurch gekennzeichnet, dass** die genannten passiven Kanäle unter Verwendung eines zweiten Überwachungsmodus überwacht werden, bei dem alle passiven Kanäle parallel überwacht werden.
5. Medizinisches Kommunikationssystem nach einem der Ansprüche 1 bis 2, **dadurch gekennzeichnet, dass** die genannten passiven Kanäle unter Verwendung eines dritten Überwachungsmodus überwacht werden, bei dem alle passiven Kanäle unter Verwendung eines Frequenzanalyseralgorithmus parallel überwacht werden.
6. Medizinisches Kommunikationssystem nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die genannte Überwachungsvorrichtung ausgelegt ist, ein Bestätigungssignal zu erzeugen, wenn ein Kanal ein vorbestimmtes Zugangskriterium erfüllt und das genannte Signal in einem Register zu speichern, das den Kanal repräsentiert.
7. Medizinisches Kommunikationssystem nach Anspruch 6, **dadurch gekennzeichnet, dass** das genannte Zugangskriterium erfüllt wird, falls ein Wert, der den Energieinhalt der Signalaktivität in dem überwachten Kanal repräsentiert, niedriger als ein vorbestimmter Wert ist.
8. Medizinisches Kommunikationssystem nach Anspruch 7, **dadurch gekennzeichnet, dass** der Energieinhalt durch Integrieren der Signalaktivität bestimmt wird.
9. Verfahren in einem medizinischen Kommunikati-

onssystem, wobei das Verfahren die folgenden Schritte umfasst:

- a) Starten einer Kommunikationssitzung zwischen zwei Einheiten, von denen wenigstens eine der genannten Einheiten in einen menschlichen oder tierischen Körper implantiert ist, unter Verwendung eines aktiven Kanals aus einer Anzahl von Kommunikationskanälen,
- b) Überwachen der für die Kommunikation gegenwärtig nicht benutzten Kommunikationskanäle, der passiven Kanäle, **dadurch gekennzeichnet, dass** die genannte Überwachung gleichzeitig mit der durchgeführten Kommunikation erfolgt, und
- c) Speichern des Ergebnisses der genannten Überwachung in einer Registertabelle, die mit einem Register für jeden Kommunikationskanal ausgestattet ist, wobei das Ergebnis angezeigt ob ein Kanal für die Kommunikation verfügbar ist,
- d) kontinuierliches Überwachen des aktiven Kanals und Durchführen einer Kanalschaltung, falls festgestellt wird, dass der aktive Kanal nicht benutzbar ist, wobei auf die Kanalschaltung hin einer der für die Kommunikation verfügbaren passiven Kanäle sofort aktiv wird.

10. Verfahren in einem medizinischen Kommunikationssystem nach Anspruch 9, **dadurch gekennzeichnet, dass** jeder der passiven Kanäle im Schritt b) für eine Periode von wenigstens 10 ms wenigstens jede fünfte Sekunde überwacht wird.

Revendications

1. Système de communication médical conçu pour établir une liaison de communication et pour réaliser une communication entre deux unités (2, 4), dans lequel au moins l'une des unités est conçue pour être implantée dans un corps humain ou animal, le système étant agencé pour utiliser une voie unique, sélectionnée parmi une pluralité de voies de communication qui peuvent être soit actives soit passives, pour établir la liaison de communication et pour réaliser la communication, en tant que voie de communication active pendant un intervalle de temps de communication, les autres voies étant appelées passives, et agencé en outre, pour comprendre un moyen (10) de surveillance, conçu pour surveiller la pluralité de voies de communication, **caractérisé par** une table (14) de registres dotée d'un registre pour chaque voie de communication, et un moyen (12) de commande, le moyen (10) de surveillance et le moyen (12) de commande étant tels que les voies passives sont surveillées pour ce qui concerne leur disponibilité pour la communication par le moyen (10) de surveillance, pendant l'intervalle de temps de communication et le résultat de la surveillance est mémorisé dans la table (14) de registres, la voie active étant surveillée en continu par le moyen de surveillance et le moyen (12) de commande effectue une commutation de voie, lorsqu'il détermine que la voie active est inutilisable, sur une voie passive disponible qui devient dès lors, immédiatement la voie active.

2. Système de communication médical, suivant la revendication 1, **caractérisé en ce que** chacune des voies passives est surveillée pendant une durée d'au moins 10 ms, au moins tous les 5 secondes.
3. Système de communication médical, suivant l'une quelconque des revendications précédentes, **caractérisé en ce que** les voies passives sont surveillées au moyen d'un premier mode de surveillance où toutes les voies passives sont balayées en séquence, chaque voie étant balayée au moins toutes les 5 secondes.
4. Système de communication médical, suivant l'une quelconque des revendications 1 et 2, **caractérisé en ce que** les voies passives sont surveillées au moyen d'un deuxième mode de surveillance où toutes les voies passives sont surveillées en parallèle.
5. Système de communication médical, suivant l'une quelconque des revendications 1 et 2, **caractérisé en ce que** les voies passives sont surveillées au moyen d'un troisième mode de surveillance où toutes les voies passives sont surveillées en parallèle, à l'aide d'un algorithme d'analyse de fréquence.
6. Système de communication médical, suivant l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen de surveillance est conçu pour produire un signal d'accusé de réception lorsqu'une voie satisfait un critère d'accès déterminé à l'avance et pour mémoriser le signal dans un registre représentant la voie.
7. Système de communication médical, suivant la revendication 6, **caractérisé en ce que** le critère d'accès est satisfait si une valeur représentant le contenu énergétique de l'activité du signal sur la voie surveillée est inférieure à une valeur déterminée à l'avance.
8. Système de communication médical, suivant la revendication 7, **caractérisé en ce que** le contenu énergétique est déterminé par intégration de l'activité du signal.
9. Procédé dans un système de communication médical comprenant les étapes suivantes :

a) faire débiter une session de communication entre deux unités, au moins l'une des unités étant implantée dans un corps humain ou animal, en utilisant une voie active, parmi un certain nombre de voies de communication, 5

b) surveiller les voies de communication non utilisées actuellement pour la communication, dites voies passives, **caractérisée en ce que** la surveillance se produit simultanément à la communication réalisée, 10

c) mémoriser le résultat de la surveillance dans une table de registres dotée d'un registre pour chaque voie de communication, le résultat indiquant si une voie est disponible pour la communication, et 15

d) surveiller en continu la voie active et effectuer une commutation de voie s'il est déterminé que la voie active est inutilisable, lors de la commutation de voie, l'une des voies passives disponibles pour la communication devenant immédiatement active. 20

10. Procédé dans un système de communication médical, suivant la revendication 9, **caractérisé en ce que** chacune des voies passives est surveillée à l'étape b) pendant une durée d'au moins 10 ms, au moins toutes les 5 secondes. 25

30

35

40

45

50

55

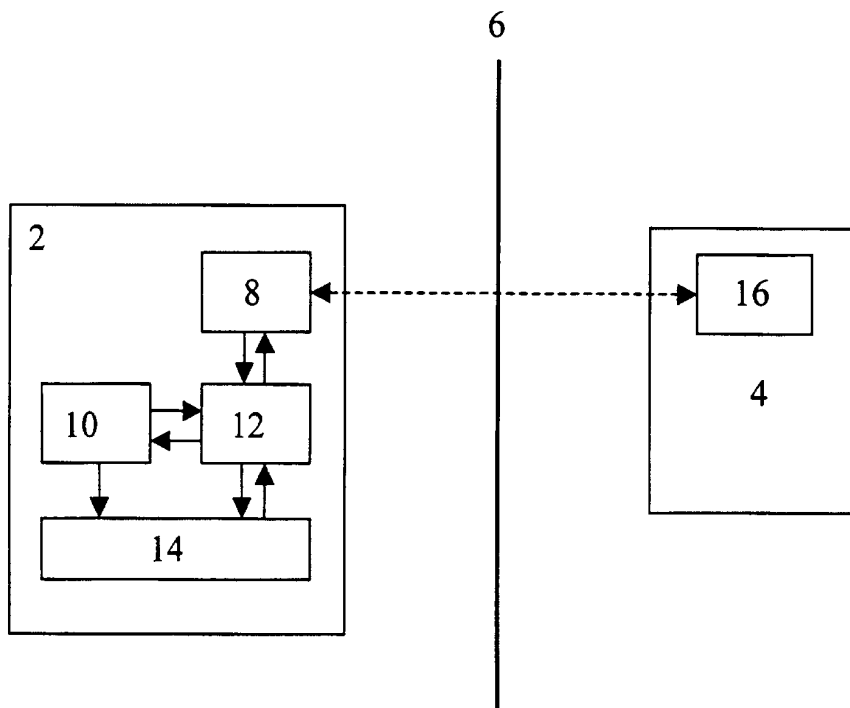


Fig. 1

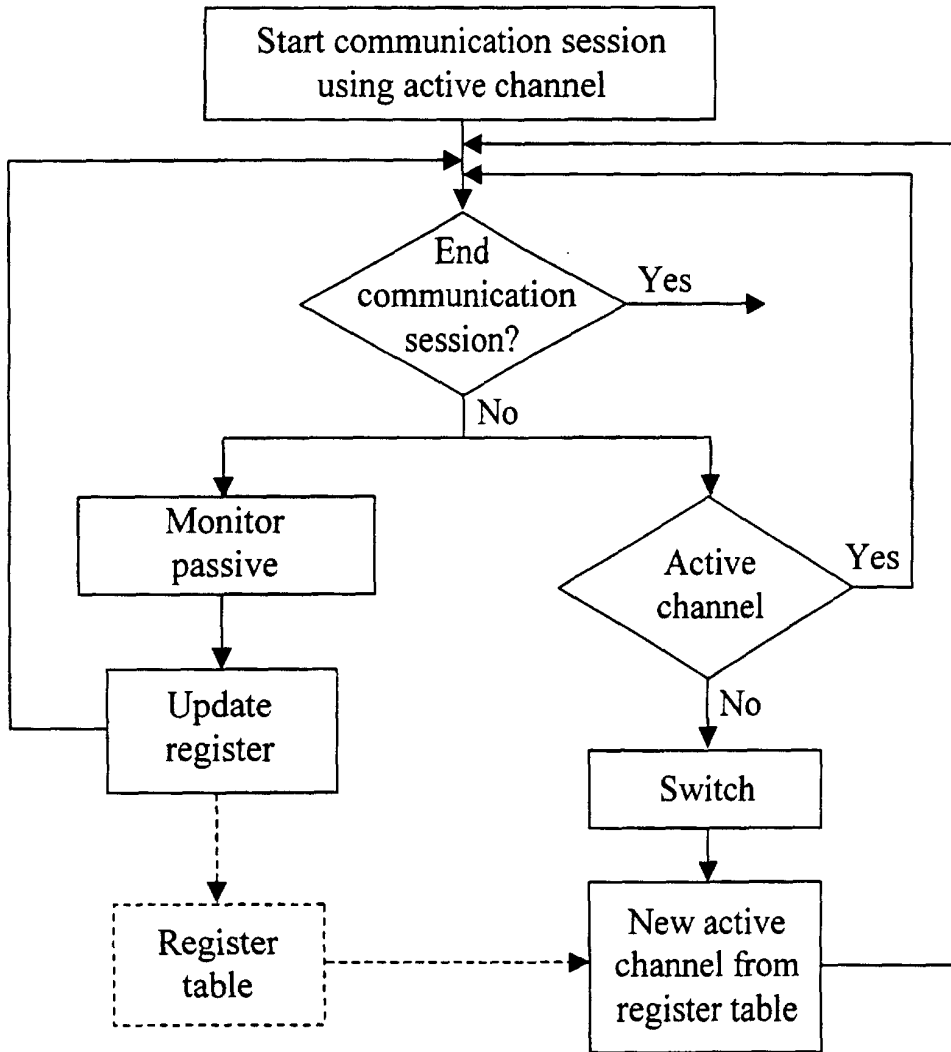


Fig. 2

专利名称(译)	医疗通信系统		
公开(公告)号	EP1228782B1	公开(公告)日	2005-04-20
申请号	EP2001126937	申请日	2001-11-13
申请(专利权)人(译)	ST.犹达医疗用品AB		
当前申请(专利权)人(译)	ST.犹达医疗用品AB		
[标]发明人	ABRAHAMSON HANS		
发明人	ABRAHAMSON, HANS		
IPC分类号	A61B5/00 A61N1/372		
CPC分类号	A61B5/0031 A61N1/37235 A61N1/37252 Y10S128/904		
优先权	0100284 2001-01-31 SE		
其他公开文献	EP1228782A1		
外部链接	Espacenet		

摘要(译)

适于在两个单元2,4之间进行通信的医疗通信系统, 所述单元中的至少一个适于使用多个通信信道中的一个活动信道植入人体或动物体内, 该系统包括适应的监测装置10监控沟通渠道。目前不用于所述单元之间通信的所有信道, 称为被动信道, 由所执行的通信同时由监视装置连续监视, 并且所述监视的结果存储在为每个通信信道提供一个寄存器的寄存器表中。

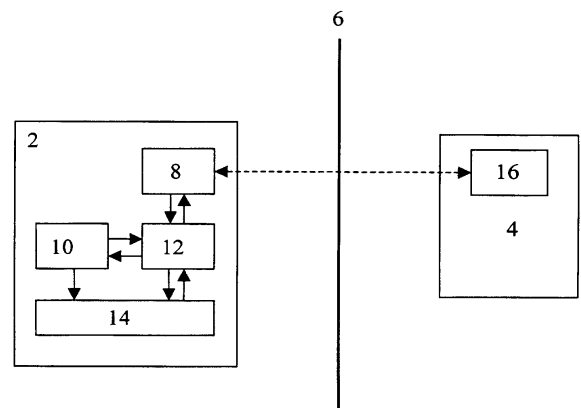


Fig. 1