

(19)



(11)

**EP 2 519 207 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**18.04.2018 Bulletin 2018/16**

(51) Int Cl.:  
**A61B 5/20** (2006.01)      **G01N 27/22** (2006.01)  
**A61F 13/42** (2006.01)      **A61F 13/84** (2006.01)  
**A61B 5/00** (2006.01)

(21) Application number: **10840662.0**

(86) International application number:  
**PCT/IB2010/055277**

(22) Date of filing: **18.11.2010**

(87) International publication number:  
**WO 2011/080607 (07.07.2011 Gazette 2011/27)**

(54) **CONDUCTOR-LESS DETECTION SYSTEM FOR AN ABSORBENT ARTICLE**

LEITERLOSES ERKENNUNGSSYSTEM FÜR EINEN SAUGFÄHIGEN ARTIKEL

SYSTÈME DE DÉTECTION SANS CONDUCTEUR POUR ÉLÉMENT ABSORBANT

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

- **LONG, Andrew, Mark**  
**Appleton**  
**WI 54915 (US)**

(30) Priority: **29.12.2009 US 648645**

(74) Representative: **Davies, Christopher Robert**  
**Dehns**  
**St Bride's House**  
**10 Salisbury Square**  
**London EC4Y 8JD (GB)**

(43) Date of publication of application:  
**07.11.2012 Bulletin 2012/45**

(73) Proprietor: **Kimberly-Clark Worldwide, Inc.**  
**Neenah, Wisconsin 54956 (US)**

(56) References cited:  
**WO-A1-2010/123425**      **WO-A2-01/18535**  
**JP-A- 9 220 259**      **JP-A- 2002 071 584**  
**KR-A- 20090 081 886**      **US-A- 5 469 145**  
**US-A- 5 760 694**      **US-A- 5 838 240**  
**US-A- 5 903 222**      **US-A- 5 903 222**  
**US-A1- 2005 195 085**

(72) Inventors:  
• **ALES III, Thomas, Michael**  
**Neenah**  
**WI 54956 (US)**  
• **GAKHAR, Sudhanshu**  
**Neenah**  
**WI 54956 (US)**

**EP 2 519 207 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### BACKGROUND

**[0001]** Absorbent articles such as diapers, training pants, incontinence products, feminine hygiene products, swim undergarments, and the like, conventionally include a liquid permeable body-side liner, a liquid impermeable outer cover, and an absorbent structure. The absorbent structure is typically located between the outer cover and the liner for taking in and retaining liquids (e.g., urine) exuded by the wearer. The absorbent structure can be made of, for instance, superabsorbent particles. Many absorbent articles, especially those sold under the trade name HUGGIES by the Kimberly-Clark Corporation, are so efficient at absorbing liquids that it is sometimes difficult to tell whether or not the absorbent article has been insulted with a body exudate, especially when the absorbent article is being worn by a newborn or other very young wearers. Insult amounts in such wearers tend to be very small. Other wearers might also produce very small insults.

**[0002]** Accordingly, various types of moisture or wetness indicators have been suggested for use in absorbent articles, for example those described in U.S. Pat. 5,903,222; U.S. Pat. 5,469,145; U.S. Pat. 2005/195085 and JP Pat. 2002 071584. The wetness indicators include various passive indicators such as indicator strips, printing, or other devices within each absorbent article, requiring a caregiver to pay for the wetness indicator in each absorbent article whether or not the caregiver intends to use the wetness indicator. Wetness indicators can also include alarm devices that are designed to assist parents or attendants in identifying a wet absorbent article condition early on. The devices can produce an audible, tactile, electromagnetic, or visual signal. Many of these devices rely on electronics, including conductive elements within each absorbent article that can increase the expense of the absorbent article.

**[0003]** In some aspects, for instance, conductive threads or foils have been placed in the absorbent articles that extend from the front of the article to the back of the article. The conductive materials serve as conductive leads for a signaling device and form an open circuit in the article that can be closed when a body fluid, such as urine, closes the circuit.

**[0004]** Incorporating conductive leads into absorbent articles, however, has caused various problems. For example, absorbent articles are typically mass produced on very fast moving machinery. Incorporating conductive leads into an absorbent article at conventional machine speeds has been problematic.

**[0005]** In addition, packaged absorbent articles are typically fed through a metal detector to ensure that there are no foreign objects contained in the package. If the conductive leads are made from or contain a metal, the metal detector can be activated registering a false positive. The incorporation of metallic materials into absorb-

ent articles can also cause problems for those wearing the garments when attempting to pass through security gates that include metal detectors.

**[0006]** In view of the above, a need currently exists for a signaling system for an absorbent article that does not require conductive elements containing metal or other devices to be inserted into the interior of the article.

### SUMMARY

**[0007]** The present inventors undertook intensive research and development efforts with respect to improving absorbent articles, particularly in providing a wetness indicator only when desired by a caregiver and without adding to the cost of an absorbent article. A need exists for wetness detection in absorbent articles and incontinence products in general. Technology that can be implemented without altering absorbent article construction is preferred.

**[0008]** A non-invasive sensor measures electrical capacitance at some depth within an absorbent article. A useful approach is a capacitive sensor that can be attached to an appropriate target zone on the outer cover of the absorbent article.

**[0009]** The present disclosure is generally directed to various signaling systems that are particularly well suited for use in conjunction with absorbent articles. The signaling systems, for instance, can be connected to a signaling device that can be configured to emit a signal, such as an audible, tactile, electromagnetic or visual signal, for indicating to a user that a body fluid is present in the absorbent article. For example, in one aspect, the absorbent article includes a diaper and the signaling system is configured to indicate the presence of urine or a bowel movement.

**[0010]** More particularly, the present disclosure is directed to signaling systems for absorbent articles that can detect the presence of a body fluid without having to place or insert conductive elements into the interior of the article. For instance, in embodiments, a sensor can be mounted to an exterior surface of the absorbent article that is capable of sensing a change on the interior of the article that indicates the presence of a body fluid, such as urine, which is a conductive fluid. In this aspect, the sensor can include, for instance, a capacitive sensor. Insulting the absorbent article with urine will create a change in capacitance. The sensor can be placed in communication with a signaling device. Once a change within the interior of the absorbent article is detected, the signaling device can be configured to emit a signal that indicates a body fluid is present in the absorbent article.

**[0011]** The present invention provides a signaling device in accordance with claim 1, and a body exudate collection and detection system in accordance with claim 10.

**[0012]** Other features and aspects of the present disclosure are discussed in greater detail herein.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0013]** The foregoing and other features and aspects of the present disclosure and the manner of attaining them will become more apparent, and the disclosure itself will be better understood by reference to the following description, appended claims, and accompanying drawings.

Figure 1 is a rear perspective view of one aspect of an absorbent article;

Figure 2 is a front perspective view of the absorbent article illustrated in Fig. 1 including one aspect of a wetness indicator of the present disclosure;

Figure 3 is a plan view of the absorbent article shown in Fig. 1 with the article in an unfastened, unfolded and laid flat condition showing the surface of the article that faces away from the wearer;

Figure 4 is a plan view similar to Fig. 3 showing the surface of the absorbent article that faces the wearer when worn and with portions cut away to show underlying features;

Figure 5 is a schematic view of the electric field created by an open face virtual capacitor when energized, as used in the wetness indicator of the present disclosure;

Figure 6 is a schematic view of several array geometries that can be used for a capacitive sensing array, as used in the wetness indicator of the present disclosure;

Figure 7 is a schematic view of one method of providing a wetness indicator of the present disclosure;

Figure 8 is a block diagram of an alternate method of providing a wetness indicator of the present disclosure;

Figure 9 is a block diagram of an alternate method of providing a wetness indicator of the present disclosure;

Figure 10 illustrates a representative set of sensor data in which a change in capacitance is detected using a wetness indicator of the present disclosure; and

Figure 11 illustrates an example of a similar set of data collected for children using a wetness indicator of the present disclosure.

**[0014]** Repeat use of reference characters in the present specification and drawings is intended to repre-

sent the same or analogous features or elements of the present disclosure.

## DETAILED DESCRIPTION

**[0015]** It is to be understood by one of ordinary skill in the art that the present discussion is a description of exemplary aspects only, and is not intended as limiting the broader aspects of the present disclosure.

**[0016]** The present disclosure is generally directed to signaling systems for absorbent articles that indicate to a user when a body fluid has insulted the article. For example, in one aspect, the signaling system is designed to emit a signal when urine is detected in the absorbent article. Of particular advantage, signaling systems made in accordance with the present disclosure can sense the presence of a body fluid within the absorbent article without having to construct the absorbent article with any elements or sensors contained in the interior of the article. In the past, for instance, metallic conductive leads were typically placed within the interior of the absorbent article. The signaling systems of the present disclosure, on the other hand, can sense the presence of a body fluid from an exterior surface of the article that can greatly simplify the incorporation of the signaling system into the article.

**[0017]** In accordance with the present disclosure, the signaling system can have various configurations and designs. Referring to **Figs. 1** and **2**, for exemplary purposes, an absorbent article **20** that can be used in conjunction with signaling systems of the present disclosure, is shown. The absorbent article **20** can be disposable or not. It is understood that the present disclosure is suitable for use with various other absorbent articles intended for personal wear, including but not limited to diapers, training pants, swim pants, feminine hygiene products, incontinence products, medical garments, surgical pads and bandages, other personal care or health care garments, and the like without departing from the scope of the present disclosure.

**[0018]** By way of illustration only, various materials and methods for constructing absorbent articles such as the absorbent article **20** of the various aspects of the present disclosure are disclosed in PCT Patent Application WO 00/37009 published June 29, 2000 by A. Fletcher et al; U.S. Patent 4,940,464 issued July 10, 1990 to Van Gompel et al.; U.S. Patent 5,766,389 issued June 16, 1998 to Brandon et al., and U.S. Patent 6,645,190 issued November 11, 2003 to Olson et al.

**[0019]** An absorbent article **20** is representatively illustrated in **Fig. 1** in a partially fastened condition. The absorbent article **20** shown in **Figs. 1** and **2** is also represented in **Figs. 3** and **4** in an opened and unfolded state. Specifically, **Fig. 3** is a plan view illustrating the exterior side of the absorbent article **20**, while **Fig. 4** illustrates the interior side of the absorbent article **20**. As shown in **Figs. 3** and **4**, the absorbent article **20** defines a longitudinal direction **48** that extends from the front of the article when worn to the back of the article. Orthogonal to the

longitudinal direction **48** is a lateral direction **49**.

**[0020]** The absorbent article **20** defines a pair of longitudinal end regions, otherwise referred to herein as a front region **22** and a back region **24**, and a center region, otherwise referred to herein as a crotch region **26**, extending longitudinally between and interconnecting the front and back regions **22**, **24**. The absorbent article **20** also defines an inner surface **28** adapted in use (e.g., positioned relative to the other components of the article **20**) to be disposed toward the wearer, and an outer surface **30** opposite the inner surface. The front and back regions **22**, **24** are those portions of the absorbent article **20**, that, when worn, wholly or partially cover or encircle the waist or mid-lower torso of the wearer. The crotch region **26** generally is that portion of the absorbent article **20** that, when worn, is positioned between the legs of the wearer and covers the lower torso and crotch of the wearer. The absorbent article **20** has a pair of laterally opposite side edges **36** and a pair of longitudinally opposite waist edges, respectively designated front waist edge **38** and back waist edge **39**.

**[0021]** The illustrated absorbent article **20** includes a chassis **32** that, in this aspect, encompasses the front region **22**, the back region **24**, and the crotch region **26**. Referring to **Figs. 1-4**, the chassis **32** includes an outer cover **40** and a bodyside liner **42** (**Figs. 1** and **4**) that can be joined to the outer cover **40** in a superimposed relation therewith by adhesives, ultrasonic bonds, thermal bonds or other conventional techniques. Referring to **Fig. 4**, the liner **42** can suitably be joined to the outer cover **40** along the perimeter of the chassis **32** to form a front waist seam **62** and a back waist seam **64**. As shown in **Fig. 4**, the liner **42** can suitably be joined to the outer cover **40** to form a pair of side seams **61** in the front region **22** and the back region **24**. The liner **42** can be generally adapted, i.e., positioned relative to the other components of the article **20**, to be disposed toward the wearer's skin during wear of the absorbent article **20**. The chassis **32** can further include an absorbent structure **44** particularly shown in **Fig. 4** disposed between the outer cover **40** and the bodyside liner **42** for absorbing liquid body exudates exuded by the wearer, and can further include a pair of containment flaps **46** secured to the bodyside liner **42** for inhibiting the lateral flow of body exudates.

**[0022]** The elasticized containment flaps **46** as shown in **Fig. 4** define a partially unattached edge that assumes an upright configuration in at least the crotch region **26** of the absorbent article **20** to form a seal against the wearer's body. The containment flaps **46** can extend longitudinally along the entire length of the chassis **32** or can extend only partially along the length of the chassis. Suitable constructions and arrangements for the containment flaps **46** are generally well known to those skilled in the art and are described in U.S. Patent 4,704,116 issued November 3, 1987 to Enloe.

**[0023]** To further enhance containment and/or absorption of body exudates, the absorbent article **20** can also suitably include leg elastic members **58** (**Fig. 4**), as are

known to those skilled in the art. The leg elastic members **58** can be operatively joined to the outer cover **40** and/or the bodyside liner **42** and positioned in the crotch region **26** of the absorbent article **20**.

**[0024]** The leg elastic members **58** can be formed of any suitable elastic material. As is well known to those skilled in the art, suitable elastic materials include sheets, strands or ribbons of natural rubber, synthetic rubber, or thermoplastic elastomeric polymers. The elastic materials can be stretched and adhered to a substrate, adhered to a gathered substrate, or adhered to a substrate and then elasticized or shrunk, for example, with the application of heat, such that elastic retractive forces are imparted to the substrate. In one particular aspect, for example, the leg elastic members **58** can include a plurality of dry-spun coalesced multifilament spandex elastomeric threads sold under the trade name LYCRA and available from Invista, Wilmington, Delaware, U.S.A.

**[0025]** In some aspects, the absorbent article **20** can further include a surge management layer (not shown) that can be optionally located adjacent the absorbent structure **44** and attached to various components in the article **20** such as the absorbent structure **44** or the bodyside liner **42** by methods known in the art, such as by using an adhesive. A surge management layer helps to decelerate and diffuse surges or gushes of liquid that can be rapidly introduced into the absorbent structure of the article. Desirably, the surge management layer can rapidly accept and temporarily hold the liquid prior to releasing the liquid into the storage or retention portions of the absorbent structure. Examples of suitable surge management layers are described in U.S. Pat. No. 5,486,166; and U.S. Pat. No. 5,490,846. Other suitable surge management materials are described in U.S. Pat. No. 5,820,973.

**[0026]** As shown in **Figs. 1-4**, the absorbent article **20** further includes a pair of opposing elastic side panels **34** that are attached to the back region of the chassis **32**. As shown particularly in **Figs. 1** and **2**, the side panels **34** can be stretched around the waist and/or hips of a wearer to secure the garment in place. As shown in **Figs. 3** and **4**, the elastic side panels are attached to the chassis along a pair of opposing longitudinal edges **37**. The side panels **34** can be attached or bonded to the chassis **32** using any suitable bonding technique. For instance, the side panels **34** can be joined to the chassis by adhesives, ultrasonic bonds, thermal bonds, or other conventional techniques.

**[0027]** In an alternative aspect, the elastic side panels can also be integrally formed with the chassis **32**. For instance, the side panels **34** can include an extension of the bodyside liner **42**, of the outer cover **40**, or of both the bodyside liner **42** and the outer cover **40**.

**[0028]** In the aspects shown in the figures, the side panels **34** are connected to the back region of the absorbent article **20** and extend over the front region of the article when securing the article in place on a user. It should be understood, however, that the side panels **34**

can alternatively be connected to the front region of the article **20** and extend over the back region when the article is donned.

**[0029]** With the absorbent article **20** in the fastened position as partially illustrated in **Figs. 1** and **2**, the elastic side panels **34** can be connected by a fastening system **80** to define a 3-dimensional absorbent article configuration having a waist opening **50** and a pair of leg openings **52**. The waist opening **50** of the article **20** is defined by the waist edges **38** and **39** that encircle the waist of the wearer.

**[0030]** In the aspects shown in the figures, the side panels are releasably attachable to the front region **22** of the article **20** by the fastening system. It should be understood, however, that in other aspects the side panels can be permanently joined to the chassis **32** at each end. The side panels can be permanently bonded together, for instance, when forming a training pant or absorbent swimwear.

**[0031]** The elastic side panels **34** each have a longitudinal outer edge **68**, a leg end edge **70** disposed toward the longitudinal center of the absorbent article **20**, and waist end edges **72** disposed toward a longitudinal end of the absorbent article. The leg end edges **70** of the absorbent article **20** can be suitably curved and/or angled relative to the lateral direction **49** to provide a better fit around the wearer's legs. However, it is understood that only one of the leg end edges **70** can be curved or angled, such as the leg end edge of the back region **24**, or alternatively, neither of the leg end edges can be curved or angled, without departing from the scope of the present disclosure. As shown in **Fig. 4**, the outer edges **68** are generally parallel to the longitudinal direction **48** while the waist end edges **72** are generally parallel to the transverse axis **49**. It should be understood, however, that in other aspects the outer edges **68** and/or the waist edges **72** can be slanted or curved as desired. Ultimately, the side panels **34** are generally aligned with a waist region **90** of the chassis.

**[0032]** The fastening system **80** can include laterally opposite first fastening components **82** adapted for re-fastenable engagement to corresponding second fastening components **84**. In the aspect shown in the figures, the first fastening component **82** is located on the elastic side panels **34**, while the second fastening component **84** is located on the front region **22** of the chassis **32**. In one aspect, a front or outer surface of each of the fastening components **82, 84** includes a plurality of engaging elements. The engaging elements of the first fastening components **82** are adapted to repeatedly engage and disengage corresponding engaging elements of the second fastening components **84** to releasably secure the article **20** in its three-dimensional configuration.

**[0033]** The fastening components **82, 84** can be any re-fastenable fasteners suitable for absorbent articles, such as adhesive fasteners, cohesive fasteners, mechanical fasteners, or the like. In particular aspects, the fastening components include mechanical fastening el-

ements for improved performance. Suitable mechanical fastening elements can be provided by interlocking geometric shaped materials, such as hooks, loops, bulbs, mushrooms, arrowheads, balls on stems, male and female mating components, buckles, snaps, or the like.

**[0034]** In the illustrated aspect, the first fastening components **82** include hook fasteners and the second fastening components **84** include complementary loop fasteners. Alternatively, the first fastening components **82** can include loop fasteners and the second fastening components **84** can be complementary hook fasteners. In another aspect, the fastening components **82, 84** can be interlocking similar surface fasteners, or adhesive and cohesive fastening elements such as an adhesive fastener and an adhesive-receptive landing zone or material; or the like.

**[0035]** In addition to possibly having elastic side panels, the absorbent article **20** can include various waist elastic members for providing elasticity around the waist opening. For example, as shown in the figures, the absorbent article **20** can include a front waist elastic member **54** and/or a back waist elastic member **56**.

**[0036]** In one aspect of the present disclosure best illustrated in **Fig. 2**, a signaling device **110** includes a capacitive sensor **120** that is adapted to detect the presence of a body exudate in the absorbent article **20**. A noninvasive capacitive-based touch sensor can be used to determine the permittivity of material near the sensing element. The sensing element can take the form of an open face virtual capacitor that, when energized, creates an electric field such as that illustrated in **Fig. 5**.

**[0037]** The capacitive sensor **120** includes a capacitive touch sensing means. The capacitive touch sensing means can include two electrodes creating an electrostatic field that extends beyond the face of the antenna or electrodes, in this case beyond the face of the signaling device **110**. Conductive substances such as body exudates in the absorbent article **20** act as dielectrics that change field dynamics, causing a load on the system. This load amount can be read as merely the presence or the extent of the presence of moisture, for example. Construction and the power applied to the electrodes can control the extent to which the field extends and the frequency of the power can be adjusted to fine tune selectivity to certain dielectrics.

**[0038]** For example, a noninvasive, capacitive-based touch sensor can be used to determine the permeability of material near the sensing element. The sensing element can take a form of an inter-digitized electrode forming an open-face virtual capacitor. Similar technology has been used to determine moisture content in soil and in touch sensors such as key pads, thumbwheels, etc. As described herein, this technology can be applied to detect wetness in an absorbent article from outside the outer cover. Key challenges, however, with such a capacitive touch sensing system are managing the penetration depth of the electric field and the ability of the system to detect a small amount of wetness from outside the outer

cover. Such challenges can be resolved through signal conditioning and developing algorithms to ignore environmental interferences, as described below.

**[0039]** Sensor design is important in determining the sensitivity of the capacitive sensor **120** to detect wetness in the absorbent article **20**. Some of the important parameters include the diameter of the capacitor pad, for example from 5 to 15 mm, the number of capacitors in one array, for example from 1 to 10, and the spacing between the capacitor and the ground plane being from 1 mm to 2.5 mm. A ground plane is positioned at the back of the sensor to prevent interference from the back side of the sensor. There are several array geometries that can be used for a capacitive sensing array, including but not limited to those illustrated in **Fig. 6**.

**[0040]** In various aspects of the present disclosure, different methods can be used in constructing a capacitive sensor **120**. In a first method illustrated in **Fig. 7**, the sensor **120** can be viewed as a constant capacitance sensor because the sensor size and distance to the ground plane cannot change. Any parasitic capacitance, either trace capacitance, IC capacitance, or ADC capacitance, can be said to be constant. When the sensor is in open air, it is a parallel plate capacitor, with one side seeing electric fields normal to the ground plane below it. There is slight fringing to the adjacent ground plane.

**[0041]** When an absorbent article **20** or any material with a higher dielectric than air is present on the top of the sensor **120**, the fringing fields present when air was only present now spread into the higher dielectric material and have a better path to a lower potential or ground. This increases the capacitance and can be detected using the ADC. When water is present in the absorbent article **20**, the dielectric constant now increases much more than when an absorbent article **20** or other dielectric was present. Water has a dielectric greater than 50 and now provides a better path for the electric fields to a lower potential or ground.

**[0042]** One example of a system design for this method includes a microcontroller made by Microchip Inc., part number PIC24FJ128GA106, which has a dedicated charge time measurement unit (CTMU). The CTMU is a module add-on to the microcontroller that can be used directly to detect changes in capacitance. In this system design, an array of capacitor sensors are attached to the A/D inputs of the Microchip PIC 24FJ series microcontroller and used to compute the changes in capacitance as the dielectric changes in presence of wetness.

**[0043]** In a second method, changes are detected in the resonant frequency of an LC circuit. As the capacitance value of the resonator circuit changes the frequency of the oscillating frequency of the resonator changes, this can be detected by a frequency-to-voltage (F/V) converting chip such as TC 9400 made by Microchip Technologies Inc. of Chandler, Arizona U.S.A. The F/V converter produces a voltage used by a microcontroller. When a voltage setpoint is reached, as determined by the microcontroller, an alarm signal is generated as fur-

ther described herein. A block diagram of such a system is illustrated in **Fig. 8**.

**[0044]** A third method measures the time taken to discharge a capacitor. A resistor-capacitor (RC) circuit has a characteristic discharge curve dependent on the capacitor under test. A system capable of measuring this time constant of this discharge curve can be used to detect the changes in the capacitance. A block diagram for such a system is illustrated in **Fig. 9**. In other words, as the capacitance of the system is different with an insulted absorbent article as compared to a dry absorbent article, the discharge curve will be different as well. In use, an open face virtual capacitor is manufactured using an RC circuit including a step function/pulse generator. The discharge time of the system capacitance is detected and processed using a digital signal processing (DSP) algorithm in a microcontroller. When insult conditions are reached, as determined by the microcontroller, an alarm signal is generated as further described herein.

**[0045]** **Fig. 10** illustrates a representative set of sensor data in which a change in capacitance is detected when an absorbent article **20** is insulted. **Fig. 10** also demonstrates the capability of detecting multiple insults.

**[0046]** **Fig. 11** illustrates an example of a similar set of data collected for children of age 18-32 months, where sensors were attached to each child's absorbent article while data was being collected. These data also show a significant change in capacitance in presence of wetness.

**[0047]** Two algorithms were developed and implemented to detect wetness in the absorbent article **20**: sensor-by-sensor detection and compare, and coherent addition.

**[0048]** A sensor-by-sensor detection and compare algorithm was developed and performed including the following steps:

1. Measure each sensor, and calculate a moving average baseline for each sensor.
2. Calculate the delta between the baseline and current sensor value.
3. If a sensor is above a threshold, an event timer begins.
  - a. If the event timer does not time out, any samples above the threshold are counted
  - b. If the event timer times out, a percentage of samples above the threshold are created and compared to a set value.
    - i. If the value is above the set percentage, a void occurred.
    - ii. If the value is below the set percentage, a void did not occur.

4. If a void is detected on a sensor in step 3, then look at the other present sensors to see if they detected a void as well. If the number of sensors that detected a void is greater than a set value (usually 50% of the number of sensors present) and happens within a set time of each other, a tone plays.

5. The algorithm continues to run, but the detection algorithm is disabled for a set amount of time.

**[0049]** This algorithm works well, but can be susceptible to movement noise. A window threshold can be created for all voids that occurred after the first void. This window helps filter out movement noise once the first void occurs. Using this algorithm requires a sensor line to be above a threshold for a certain time, and a percentage value must be above its threshold. Such percentage and time filter out fast-moving noise. The threshold should be approximately three or four counts for a 5mil board, and six or seven counts for a 28mil board.

**[0050]** A coherent addition algorithm uses less processing cycles because it does not require a moving average to be calculated for each sensor line, only one pseudo sensor line. A coherent addition algorithm was developed and performed including the following steps:

1. Measure each sensor and take the sum of present sensors.
2. Calculate a moving average baseline for the sum of the present sensors.
3. Calculate the delta between the baseline and sum of the present sensors.
4. If a delta is above a threshold, an event timer begins.
  - a. If the event timer does not time out, any samples above the threshold are counted.
  - b. If the event timer times out, a percentage of samples above the threshold is created and compared to a set value.
    - i. If the value is above the set percentage, a void occurred, and a tone plays.
    - ii. If the value is below the set percentage, a void did not occur.
5. The algorithm continues to run, but the detection algorithm is disabled for a set amount of time.
6. Repeat steps 1 through 3.
7. If a delta is within the multiple void window, an event timer begins.

a. If the event timer does not time out, any samples above the threshold are counted.

b. If the event timer times out, a percentage of samples above the threshold is created and compared to a set value.

i. If the value is above the set percentage, a void occurred, and a tone plays

ii. If the value is below the set percentage, a void did not occur.

The algorithm continues to run, but the detection algorithm can be disabled for a set amount of time. Upon detection, steps 6 and 7 run again.

**[0051]** The signaling device **110** can emit any suitable signal to indicate to the user that the absorbent article **20** has been insulted. The signal, for instance, can include an audible signal, a tactile signal, an electromagnetic signal, or a visual signal. The audible signal, for instance, can be as simple as a beep or can include a musical tune. In still another aspect, the signaling device can emit a wireless signal that then activates a remote device, such as a telephone or a pager.

**[0052]** Further aspects of the signaling device **110** can be found in co-pending U.S. Patent Application Serial No. 12/347,539, entitled "Remote Detection Systems For Absorbent Articles".

**[0053]** The electronics associated with the capacitive sensor **120** are relatively simple and can be miniaturized. The complete capacitive sensor **120** is disposed in a housing **135** (see **Fig. 2**) that is adapted to be attached to the absorbent article **20**, or held in vicinity to the absorbent article **20**. If the housing **135** is to be attached to the absorbent article **20** using an attachment mechanism, the housing **135** can be a pouch or a rigid or semi-rigid housing **135** that attaches to the outer cover **40** of the absorbent article **20** near the region where insults are expected. Such attachment mechanism can use adhesive, hook and loop, mechanical fasteners such as snaps, a clip, or a clasp, any other suitable attachment mechanism, or any combination of these. Various attachment mechanisms include those disclosed in co-pending and co-assigned U.S. Patent Application Publication No. 2007/0142797 to Long, et al. and entitled "Garments With Easy-To-Use Signaling Device"; U.S. Patent Application Publication No. 2006/0244614 to Long and entitled "Connection Mechanisms"; and U.S. Patent Application Publication No. 2007/0024457 to Long, et al. and entitled "Connection Mechanisms In Absorbent Articles For Body Fluid Signaling Devices".

**[0054]** In another aspect of the present disclosure, the signaling device **110** is adapted to be held near the outermost surface of the outer cover **40** of the absorbent article **20**. In this aspect, no attachment mechanism is needed. The wearer of the absorbent article **20** or a caregiver holds the signaling device **110** near the outer cover

**40** of the absorbent article **20** to detect whether the absorbent article **20** has received an insult.

**[0055]** Sensors such as those described herein are further described, for instance, in U.S. Patent Application Serial No. 11/511,583 and in U.S. Patent Application Publication No. 2008/0048786.

**[0056]** For example, in one aspect, the system can be configured such that the signaling device will not emit signals within a certain period of time once the system is first activated, where being activated means the system is in a condition to detect and provide a signal. The period of time can vary depending upon the particular circumstances and the particular application. For example, in one aspect, the system can be configured not to emit signals for at least the first 15 minutes, such as at least the first 30 minutes, such as at least the first 45 minutes, such as at least the first hour the absorbent article is worn.

**[0057]** In an alternative aspect, steady state is determined by the capacitive sensor **120** used in the system. Steady state can be determined when substantial or significant changes in capacitance fail to occur for a certain period of time indicating that steady state conditions have been reached. For instance, the system can be configured to only become activated once the capacitive sensor **120** determines no substantial changes within the interior of the article for a period of about five minutes, such as about 10 minutes, such as about 20 minutes, such as about 30 minutes, such as about 45 minutes, such as about one hour. For example, if the sensor is a capacitive sensor **120**, steady state can be determined when the capacitive sensor **120** senses no more than about 5 percent change in capacitance on the interior of the article for a period of at least 10 minutes.

**[0058]** When using a capacitive sensor **120**, the capacitive sensor **120** can be placed in any suitable location on the absorbent article **20**. For instance, the capacitive sensor **120** can be placed in the crotch region **26**, on the back region **24**, or on the front region **22** of the article **20** depending upon various factors. As described herein, in certain applications, the capacitive sensor **120** can be placed on an exterior surface of the outer cover **40** of the absorbent article **20**.

**[0059]** All of the sensors described herein can be configured to be disposed of with the absorbent article **20**. When disposable, the capacitive sensor **120** can be integrated into the outer cover **40** of the absorbent article **20**. For instance, in one aspect, the outer cover **40** can include more than one layer and the capacitive sensor **120** can be positioned in between the two layers.

**[0060]** In an alternative aspect, the capacitive sensor **120** can be configured to be removed from the absorbent article **20** when the absorbent article **20** is disposed and placed on a new absorbent article **20**. In fact, in one aspect, the capacitive sensor **120** and/or signal device can include multiple settings depending upon the absorbent article **20** to which it is attached. In this manner, the signaling system can be modified based upon the particular

product specifications. The product purchased can provide information to the consumer as to which setting to use.

**[0061]** As absorbent articles increase in effectiveness, in one aspect, the signaling system of the present disclosure can be configured to emit a signal or not emit a signal during a first insult of urine and/or to emit a signal when a second insult occurs. In one aspect, for instance, the absorbent article **20** can be constructed so as to be capable of holding two insults of urine from the wearer. A wetness sensing system can be particularly needed for these types of absorbent articles **20** so that a caregiver can differentiate between the first insult and the second insult. In accordance with the present disclosure, the signaling system can be constructed so as to recognize a change within the absorbent article **20** due to the first insult and then readjust the criteria based upon the second insult. Once the second insult is recognized, the signaling system can be designed to emit a signal.

**[0062]** For instance, after a first insult with urine, the capacitive sensor **120** can sense a change in capacitance within the absorbent article **20**. The capacitive sensor **120** can also be configured to sense a change in capacitance after second and succeeding insults as well.

**[0063]** When using a capacitive sensor **120** as described herein, in one aspect, the system can be designed to take into account changes in the above measurements when the absorbent article **20** is first placed on the wearer. For example, when the absorbent article **20** is first donned, a change in capacitance can be expected. To account for this change, the system of the present disclosure can be configured to only cause signals to be emitted by the signaling device **110** when steady state conditions within the article have been reached.

**[0064]** In some instances, it is conceivable that the capacitive sensor **120** needs to contend with nearby objects that can cause interference. In practical applications, however, such a situation is unlikely because the interference-causing object typically needs to be very close to the capacitive sensor **120**. This makes the appearance of an interference-causing object unlikely when the capacitive sensor **120** is used in conjunction with an absorbent article **20**. Nevertheless, an interference problem of this sort can be managed by an intelligent algorithm that recognizes and stores signal output once the capacitive sensor **120** is in position and activated. The algorithm uses this signal output as a reference point and interprets subsequent signals in relation to this reference point. In other words, the algorithm includes an intelligent zeroing feature.

**[0065]** Once the device is activated, the algorithm takes a baseline measurement, which is automatic and transparent to the user. Once the signaling device **110** is installed by a user, the capacitive sensor **120** automatically zeroes itself to establish the point of zero wetness baseline needed.

**[0066]** In another aspect of the present disclosure (not shown), the signaling device **110** uses more than one

capacitive sensor **120**. For example, capacitive sensors **120** can be positioned such that one is near the front of the absorbent article **20** to detect urine and the other is near the rear of the absorbent article **20** to detect fecal matter.

### Claims

1. A signaling device (110) for sensing and indicating the presence of a body exudate in an absorbent article (20), the device comprising:

a housing (135); and  
a capacitive sensor (120) disposed within the housing, the capacitive sensor adapted to sense a change in capacitance due to an insult to the absorbent article; and **characterized in that** a ground plane is positioned at a back of the capacitive sensor to prevent interference from a back side of the capacitive sensor, wherein a spacing between the ground plane and a capacitor of the capacitive sensor is from 1 mm to 2.5 mm.

2. The device of claim 1, further comprising an attachment mechanism for removably attaching the device to the absorbent article.
3. The device of claim 1, wherein the capacitive sensor includes an inter-digitized electrode forming an open face virtual capacitor.
4. The device of claim 1, wherein the housing (135) is flexible.
5. The device of claim 1, wherein the signaling device (110) is adapted to provide notification of the presence of a body exudate in the absorbent article.
6. The device of claim 5, wherein the signaling device (110) is adapted to provide a visual notification; or wherein the signaling device is adapted to provide an audio notification; or wherein the signaling device is adapted to provide a wireless notification; or wherein the signaling device is adapted to provide a vibratory notification.
7. The device of claim 1, wherein the signaling device (110) is configured to become activated only once no substantial changes within the interior of the article occur for a period of five minutes.
8. The device of claim 1, wherein the capacitive sensor (120) is adapted to sense a change in capacitance by measuring the time taken to discharge a capacitor.

9. The device of claim 1, the capacitive sensor (120) including an inductance-capacitance circuit, wherein the capacitive sensor is adapted to sense a change in capacitance by measuring changes in the resonant frequency of the inductance-capacitance circuit.

10. A body exudate collection and detection system comprising:

an absorbent article (20); and  
the signaling device (110) of claim 3.

### Patentansprüche

1. Signalisierungsrichtung (110) für das Erfassen und Angeben des Vorhandenseins eines Körper-Exsudats in einem absorbierenden Artikel (20), die Vorrichtung umfassend:

ein Gehäuse (135); und  
einen kapazitiven Sensor (120), der im Gehäuse angeordnet ist, wobei der kapazitive Sensor so angepasst ist, dass er eine Änderung bei der Kapazität aufgrund eines Insults des absorbierenden Artikels erfasst; und **dadurch gekennzeichnet, dass** eine Grundfläche an der Rückseite des kapazitiven Sensors positioniert ist, um eine Störung von einer Rückseite des kapazitiven Sensors zu verhindern, wobei ein Abstand zwischen der Grundfläche und einem Kondensator des kapazitiven Sensors von 1 mm bis 2,5 mm beträgt.

2. Vorrichtung nach Anspruch 1, ferner umfassend einen Befestigungsmechanismus für das entfernbare Befestigen der Vorrichtung am absorbierenden Artikel.
3. Vorrichtung nach Anspruch 1, wobei der kapazitive Sensor eine interdigitale Elektrode beinhaltet, die einen virtuellen Kondensator mit offener Fläche ausbildet.
4. Vorrichtung nach Anspruch 1, wobei das Gehäuse (135) flexibel ist.
5. Vorrichtung nach Anspruch 1, wobei die Signalisierungsrichtung (110) so angepasst ist, dass sie eine Benachrichtigung des Vorhandenseins eines Körper-Exsudats im absorbierenden Artikel bereitstellt.
6. Vorrichtung nach Anspruch 5, wobei die Signalisierungsrichtung (110) so angepasst ist, dass sie eine visuelle Benachrichtigung bereitstellt; oder wobei die Signalisierungsrichtung so angepasst ist,

dass sie eine drahtlose Benachrichtigung bereitstellt; oder wobei die Signalisierungsvorrichtung so angepasst ist, dass sie eine Vibrationsbenachrichtigung bereitstellt.

7. Vorrichtung nach Anspruch 1, wobei die Signalisierungsvorrichtung (110) so konfiguriert ist, dass sie erst aktiviert wird, wenn für einen Zeitraum von fünf Minuten keine wesentlichen Veränderungen im Inneren des Artikels auftreten.
8. Vorrichtung nach Anspruch 1, wobei der kapazitive Sensor (120) so angepasst ist, dass er eine Veränderung bei der Kapazität durch Messen der Zeit erfasst, die für das Entladen eines Kondensators benötigt wird.
9. Vorrichtung nach Anspruch 1, wobei der kapazitive Sensor (120) eine induktiv-kapazitive Schaltung beinhaltet, wobei der kapazitive Sensor so angepasst ist, dass er eine Veränderung bei der Kapazität durch Messen von Veränderungen bei der Resonanzfrequenz der induktiv-kapazitiven Schaltung erfasst.
10. Ein Sammel- und Erkennungssystem für Körper-Exsudate, umfassend:

einen absorbierenden Artikel (20); und die Signalisierungsvorrichtung (110) nach Anspruch 3.

### Revendications

1. Dispositif de signalement (110) destiné à détecter et indiquer la présence d'un exsudat corporel dans un article absorbant (20), le dispositif comprenant :
  - un boîtier (135) ; et
  - un capteur capacitif (120) disposé dans le boîtier, le capteur capacitif étant adapté pour détecter un changement de capacité dû à un écoulement sur l'article absorbant ; et **caractérisé en ce qu'un** plan de masse est positionné au niveau d'une partie arrière du capteur capacitif pour empêcher une interférence depuis un côté arrière du capteur capacitif, un espacement entre le plan de masse et un condensateur du capteur capacitif étant de 1 mm à 2,5 mm.
2. Dispositif de la revendication 1, comprenant en outre un mécanisme de fixation destiné à fixer de manière amovible le dispositif à l'article absorbant.
3. Dispositif de la revendication 1, dans lequel le capteur capacitif comprend une électrode inter-numérisée formant un condensateur virtuel à face ouverte.

4. Dispositif de la revendication 1, dans lequel le boîtier (135) est souple.

5. Dispositif de la revendication 1, le dispositif de signalement (110) étant adapté pour fournir une notification de la présence d'un exsudat corporel dans l'article absorbant.

6. Dispositif de la revendication 5, le dispositif de signalement (110) étant adapté pour fournir une notification visuelle ; ou le dispositif de signalement étant adapté pour fournir une notification sonore ; ou le dispositif de signalement étant adapté pour fournir une notification sans fil ; ou le dispositif de signalement étant adapté pour fournir une notification vibratoire.

7. Dispositif de la revendication 1, le dispositif de signalement (110) étant configuré pour devenir activé seulement une fois qu'aucun changement sensible à l'intérieur de l'article ne s'est produit pendant une période de cinq minutes.

8. Dispositif de la revendication 1, dans lequel le capteur capacitif (120) est adapté pour détecter un changement de capacité en mesurant la durée nécessaire pour décharger un condensateur.

9. Dispositif de la revendication 1, le capteur capacitif (120) comprenant un circuit d'inductance-capacité, le capteur capacitif étant adapté pour détecter un changement de capacité en mesurant les changements de la fréquence de résonance dans le circuit d'inductance-capacité.

10. Système de collecte et de détection d'exsudats corporels comprenant :

un article absorbant (20) ; et le dispositif de signalement (110) de la revendication 3.

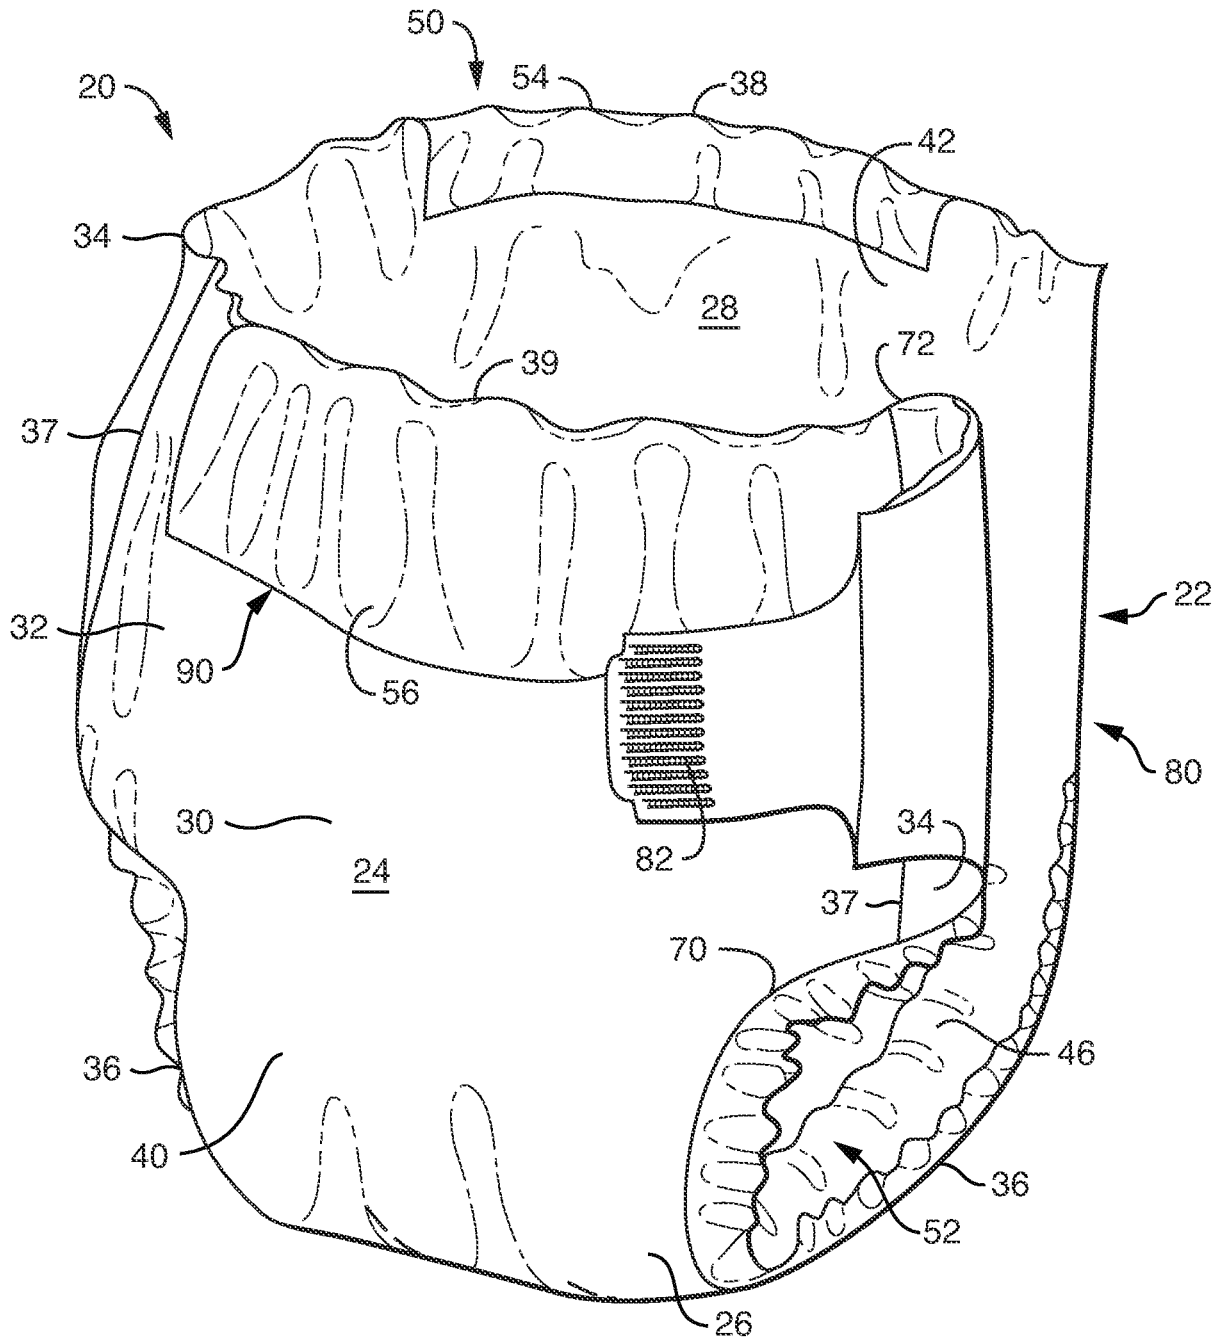


FIG. 1

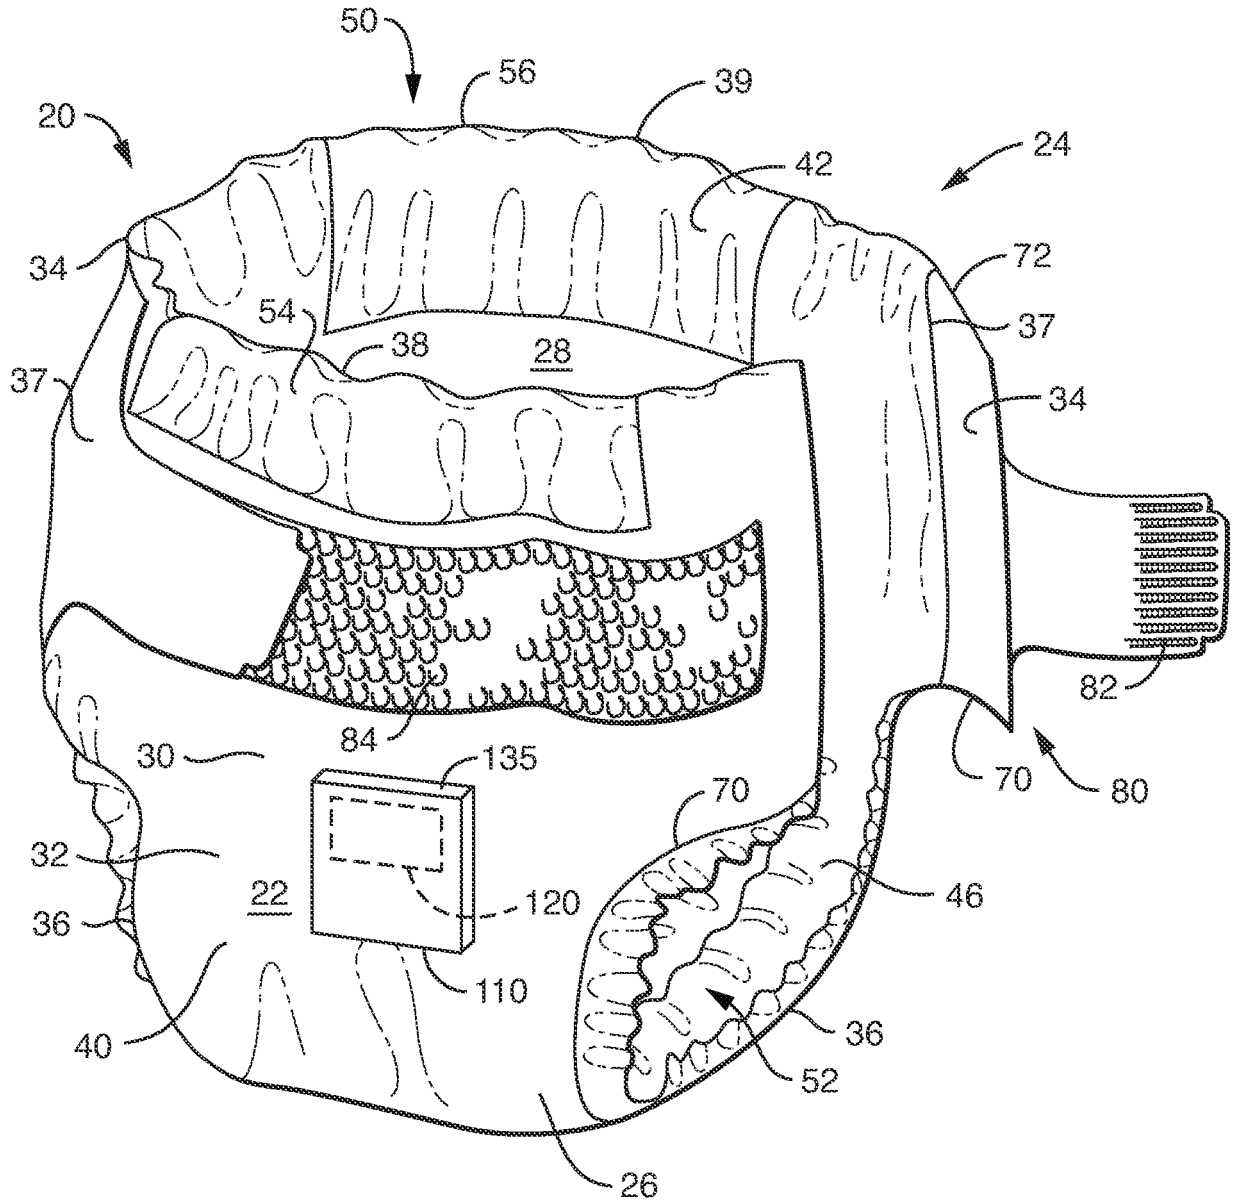


FIG. 2

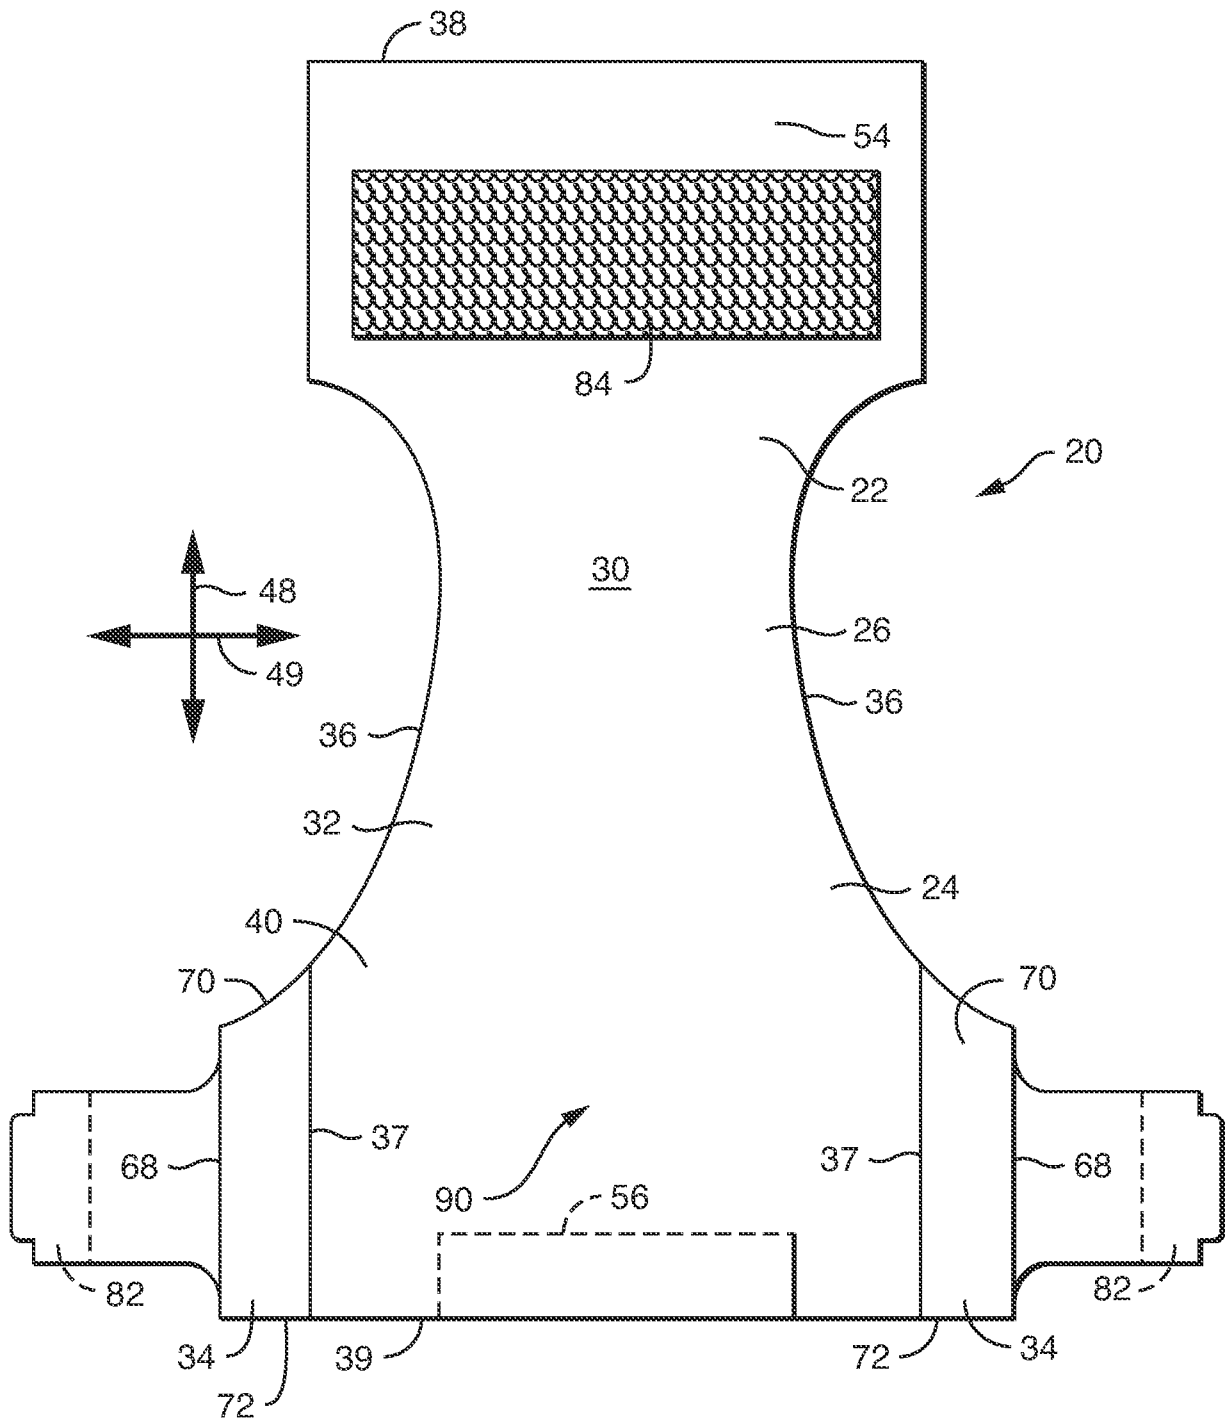


FIG. 3

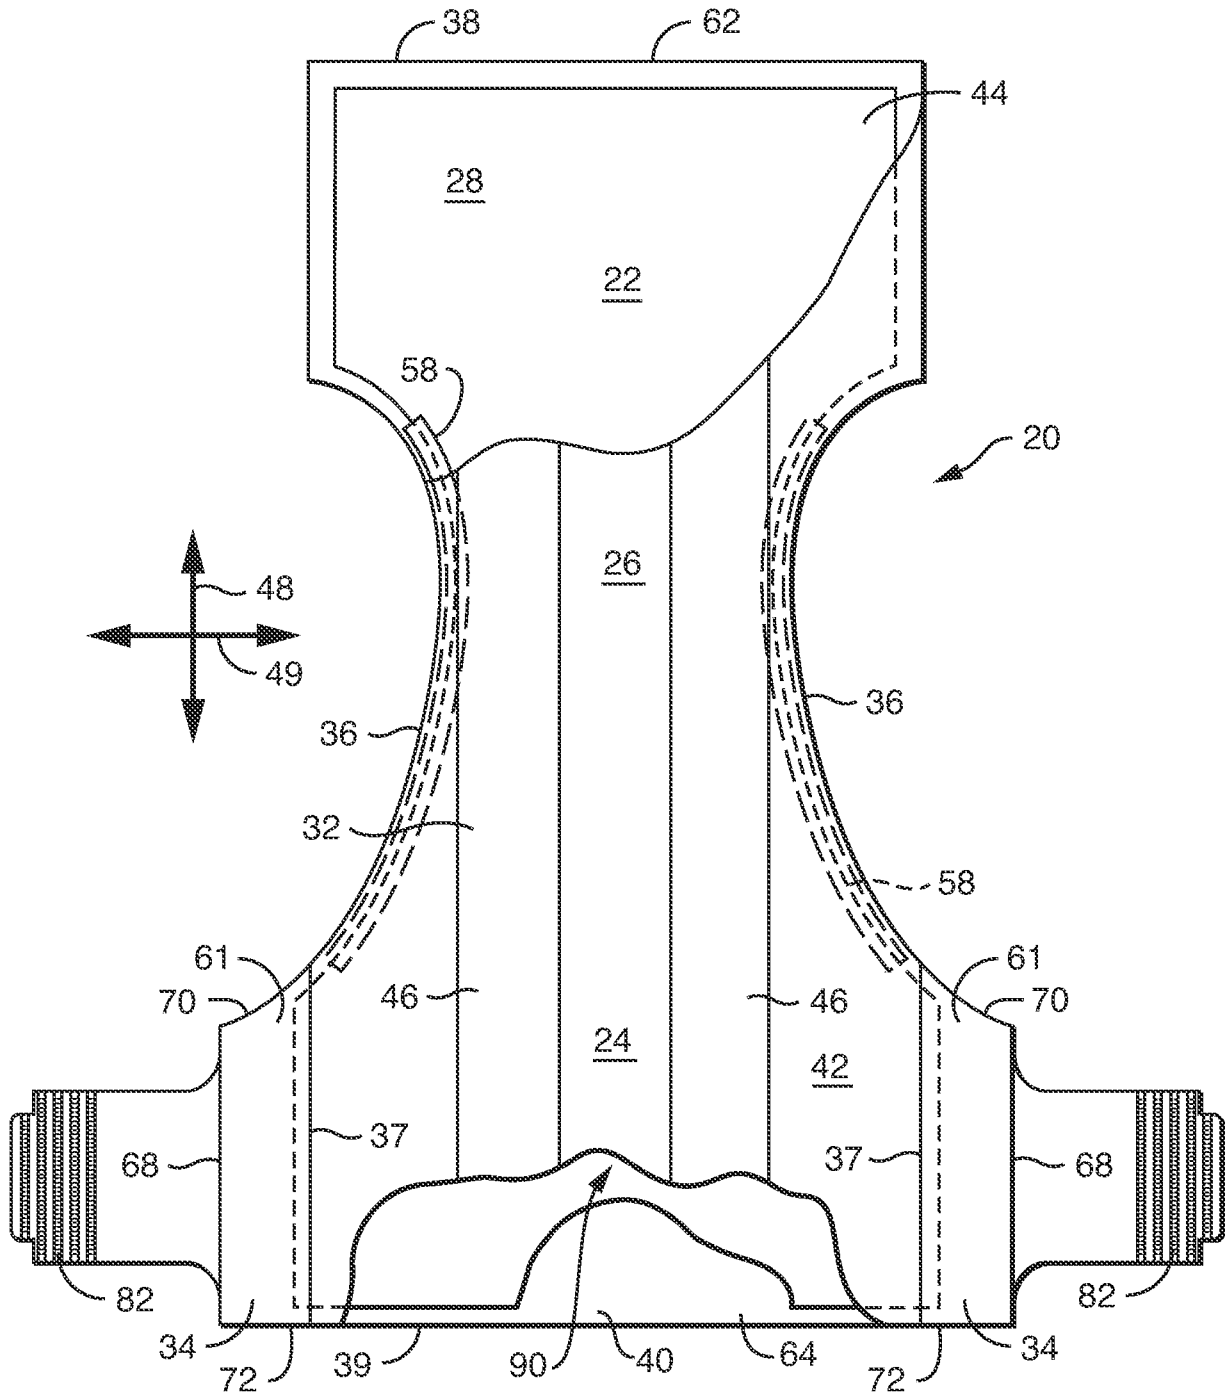


FIG. 4

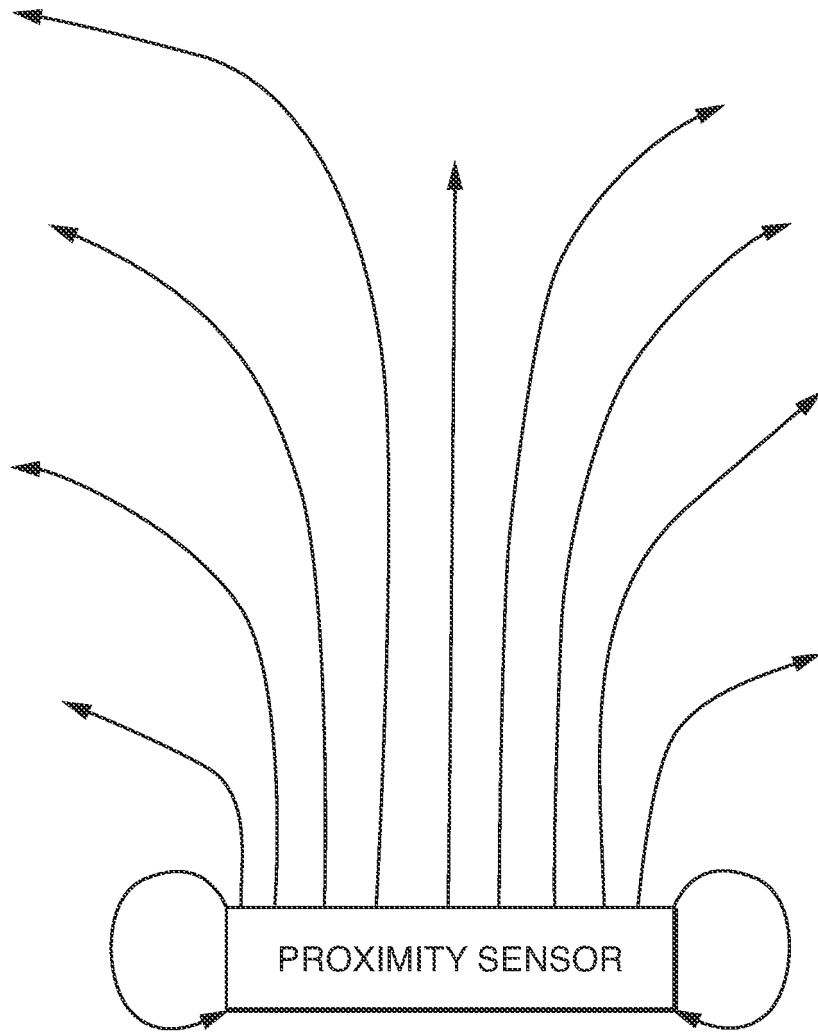


FIG. 5

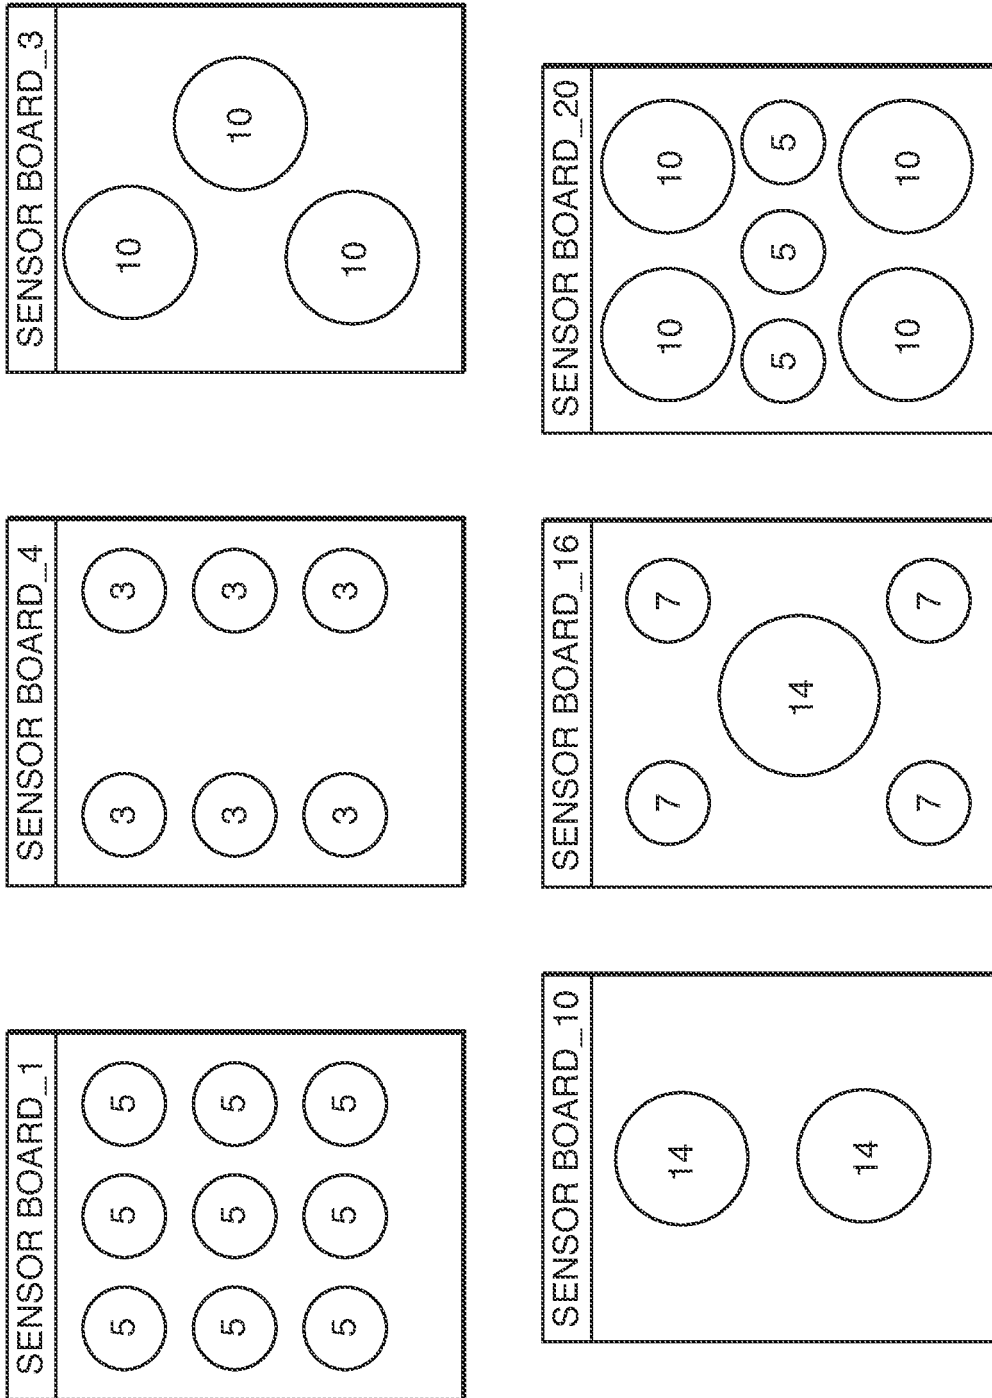


FIG. 6

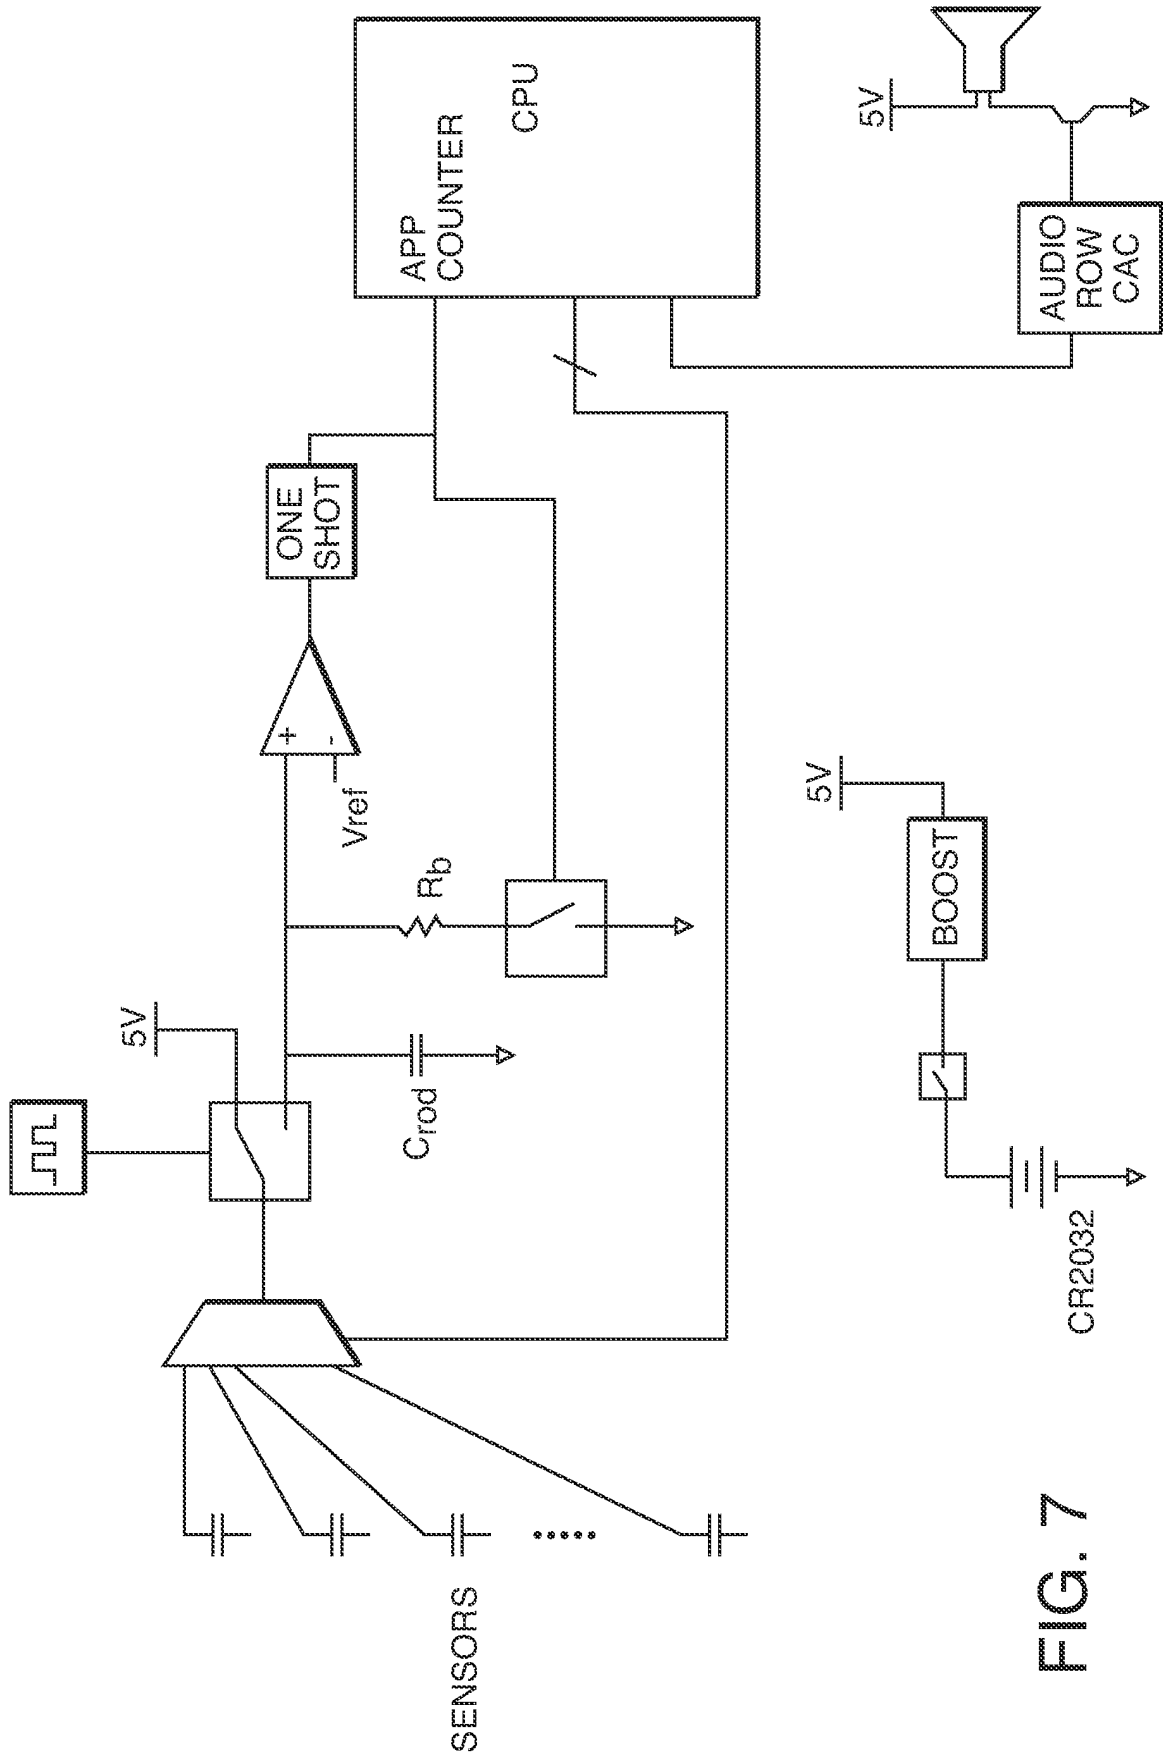


FIG. 7

CR2032

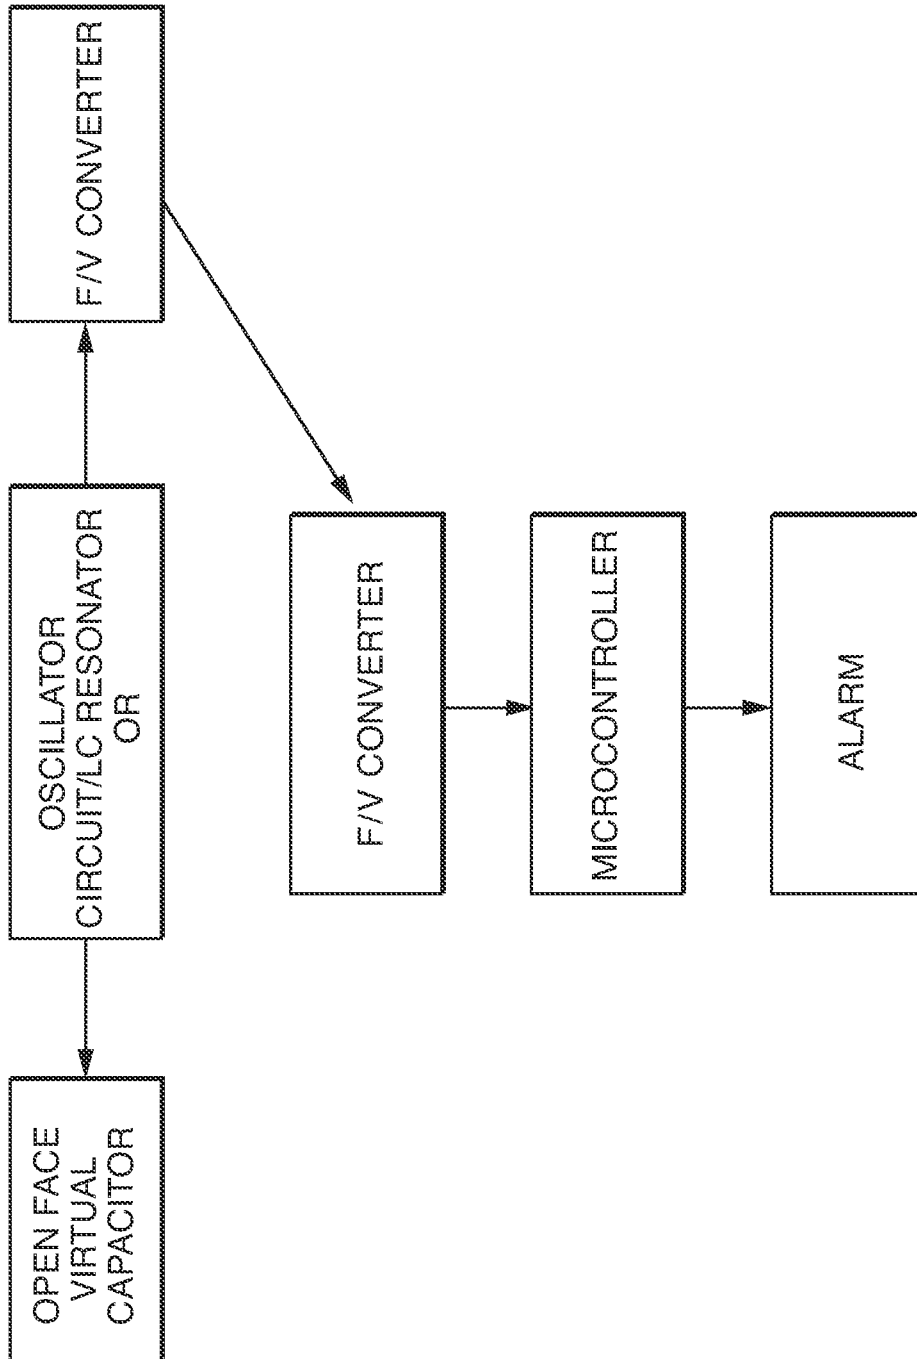


FIG. 8

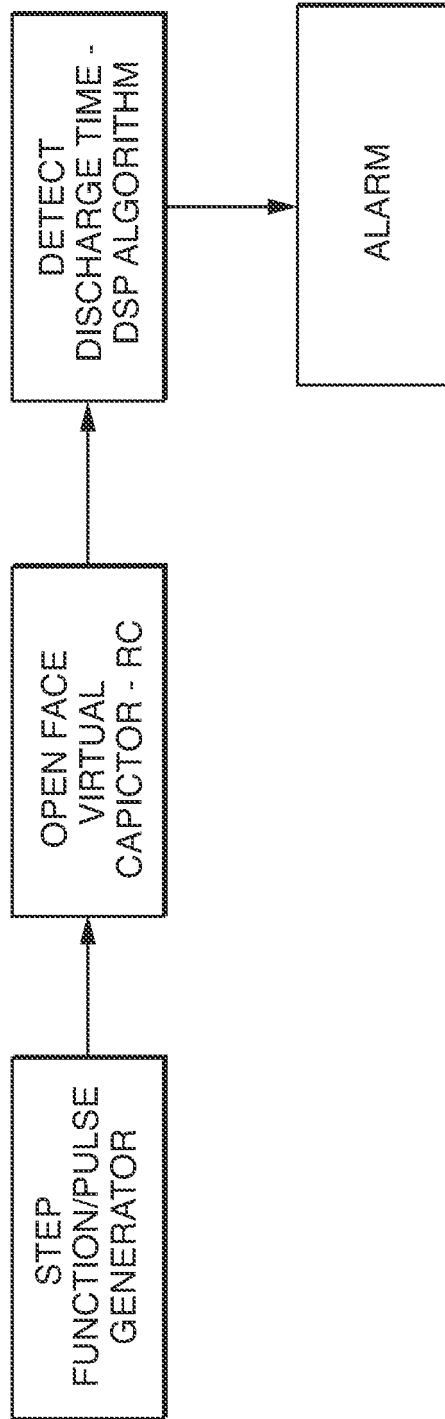


FIG. 9

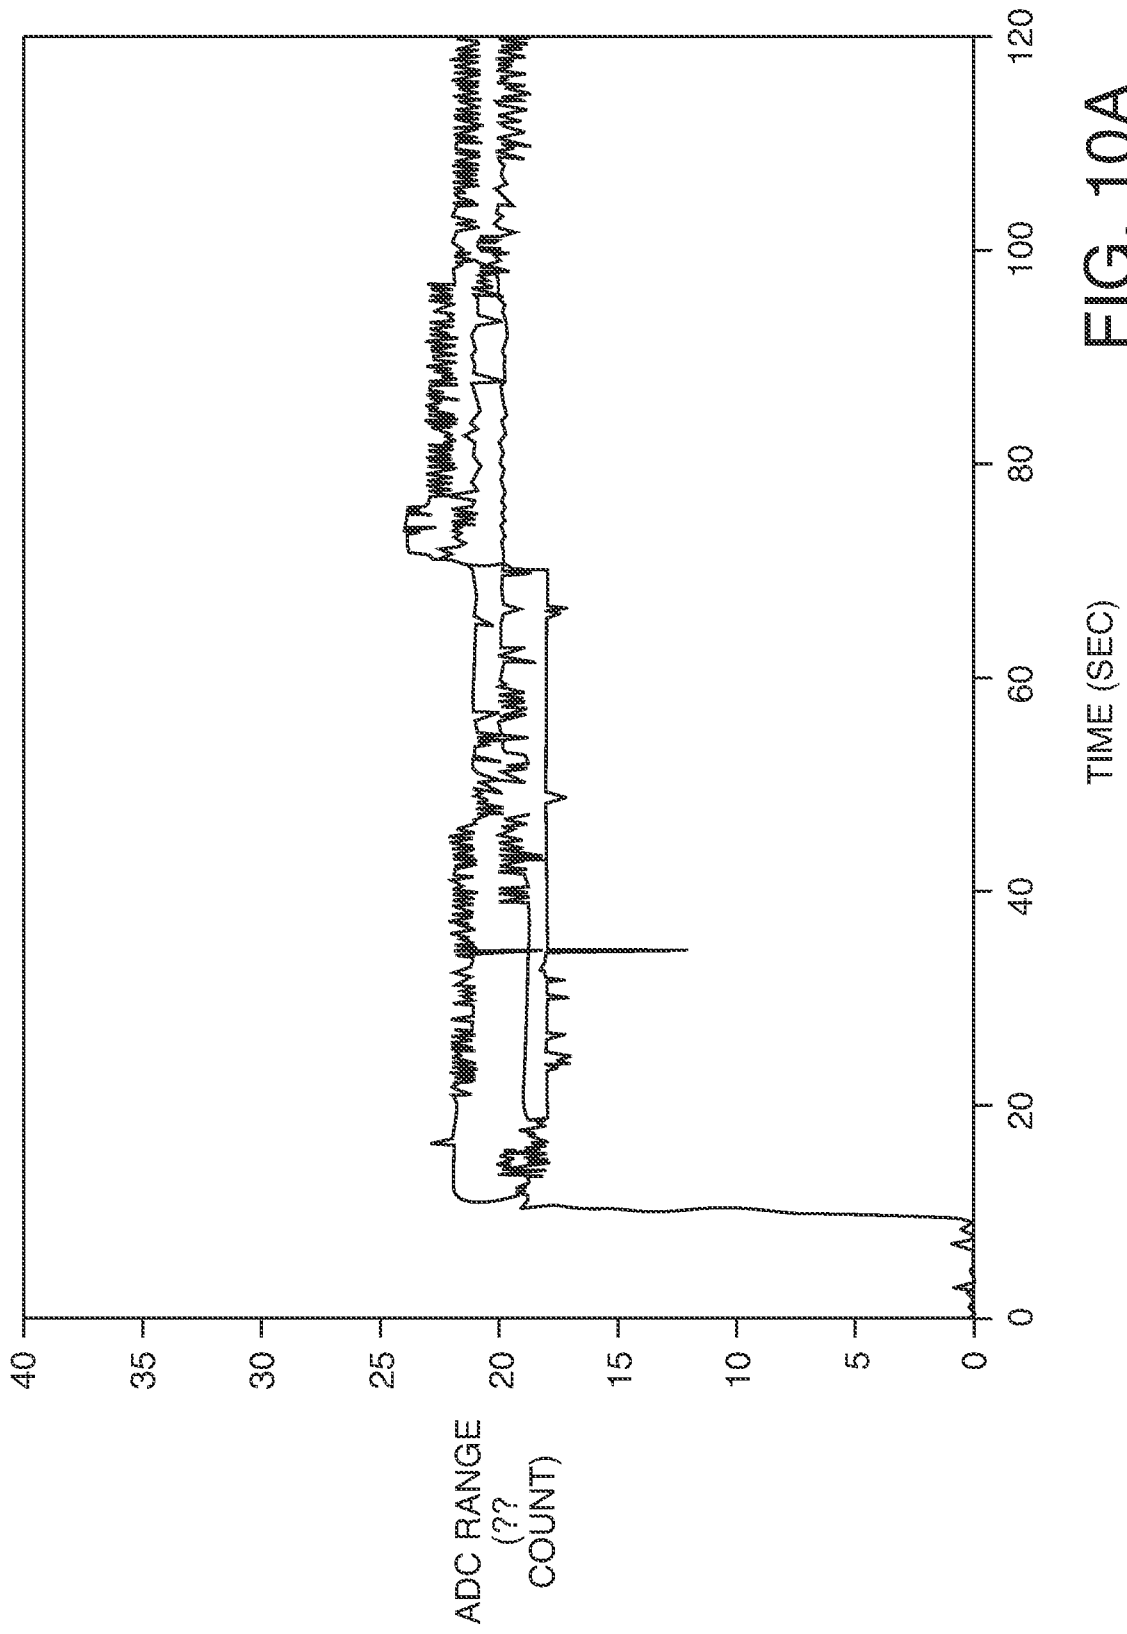


FIG. 10A

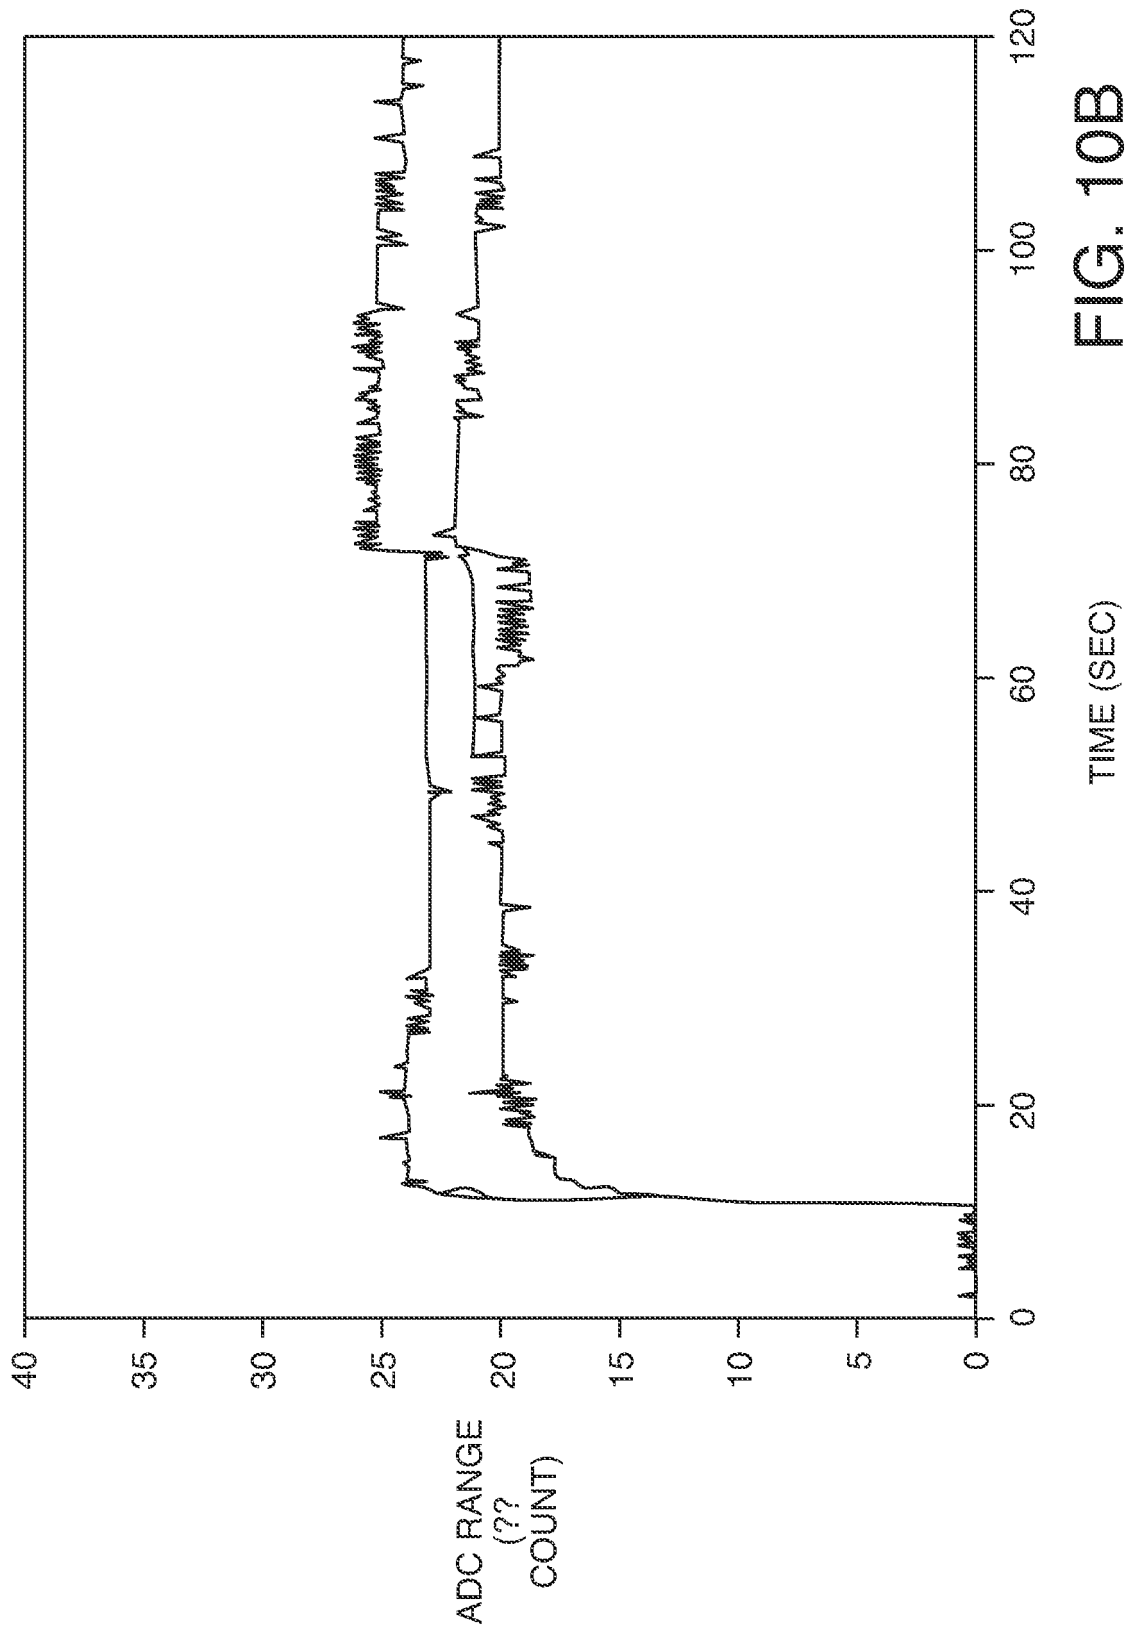


FIG. 10B

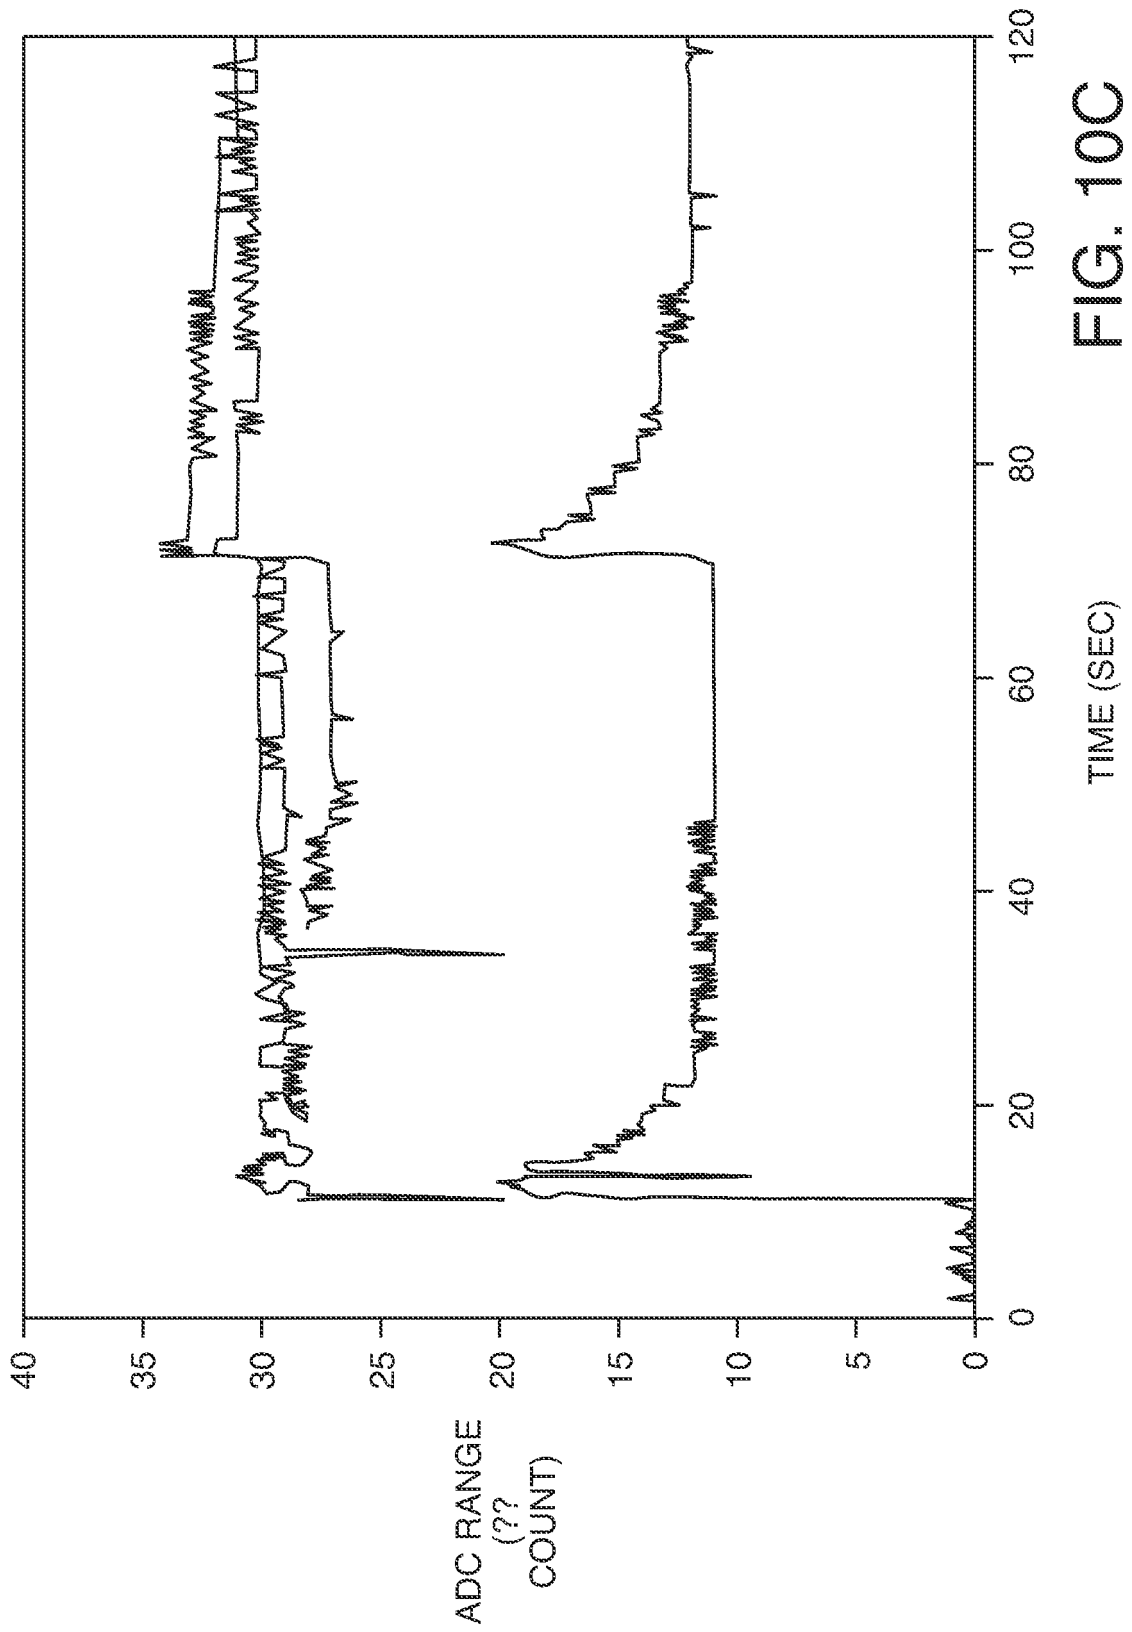


FIG. 10C

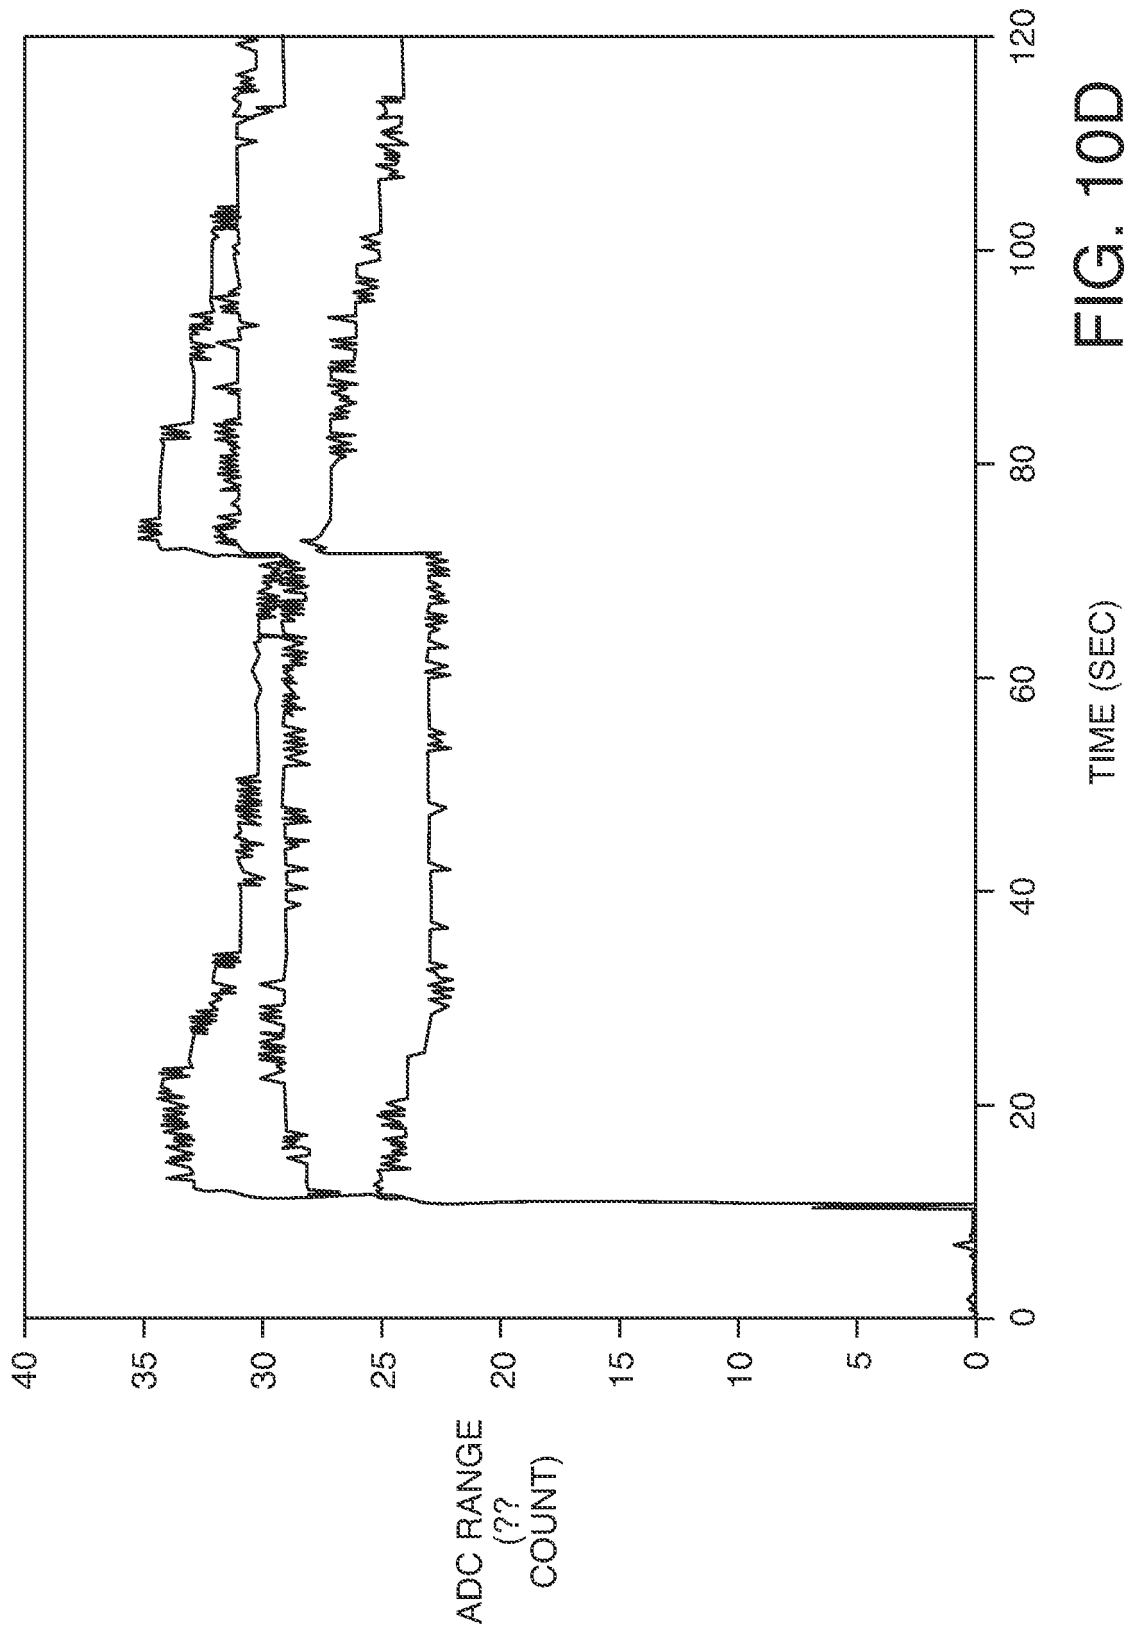


FIG. 10D

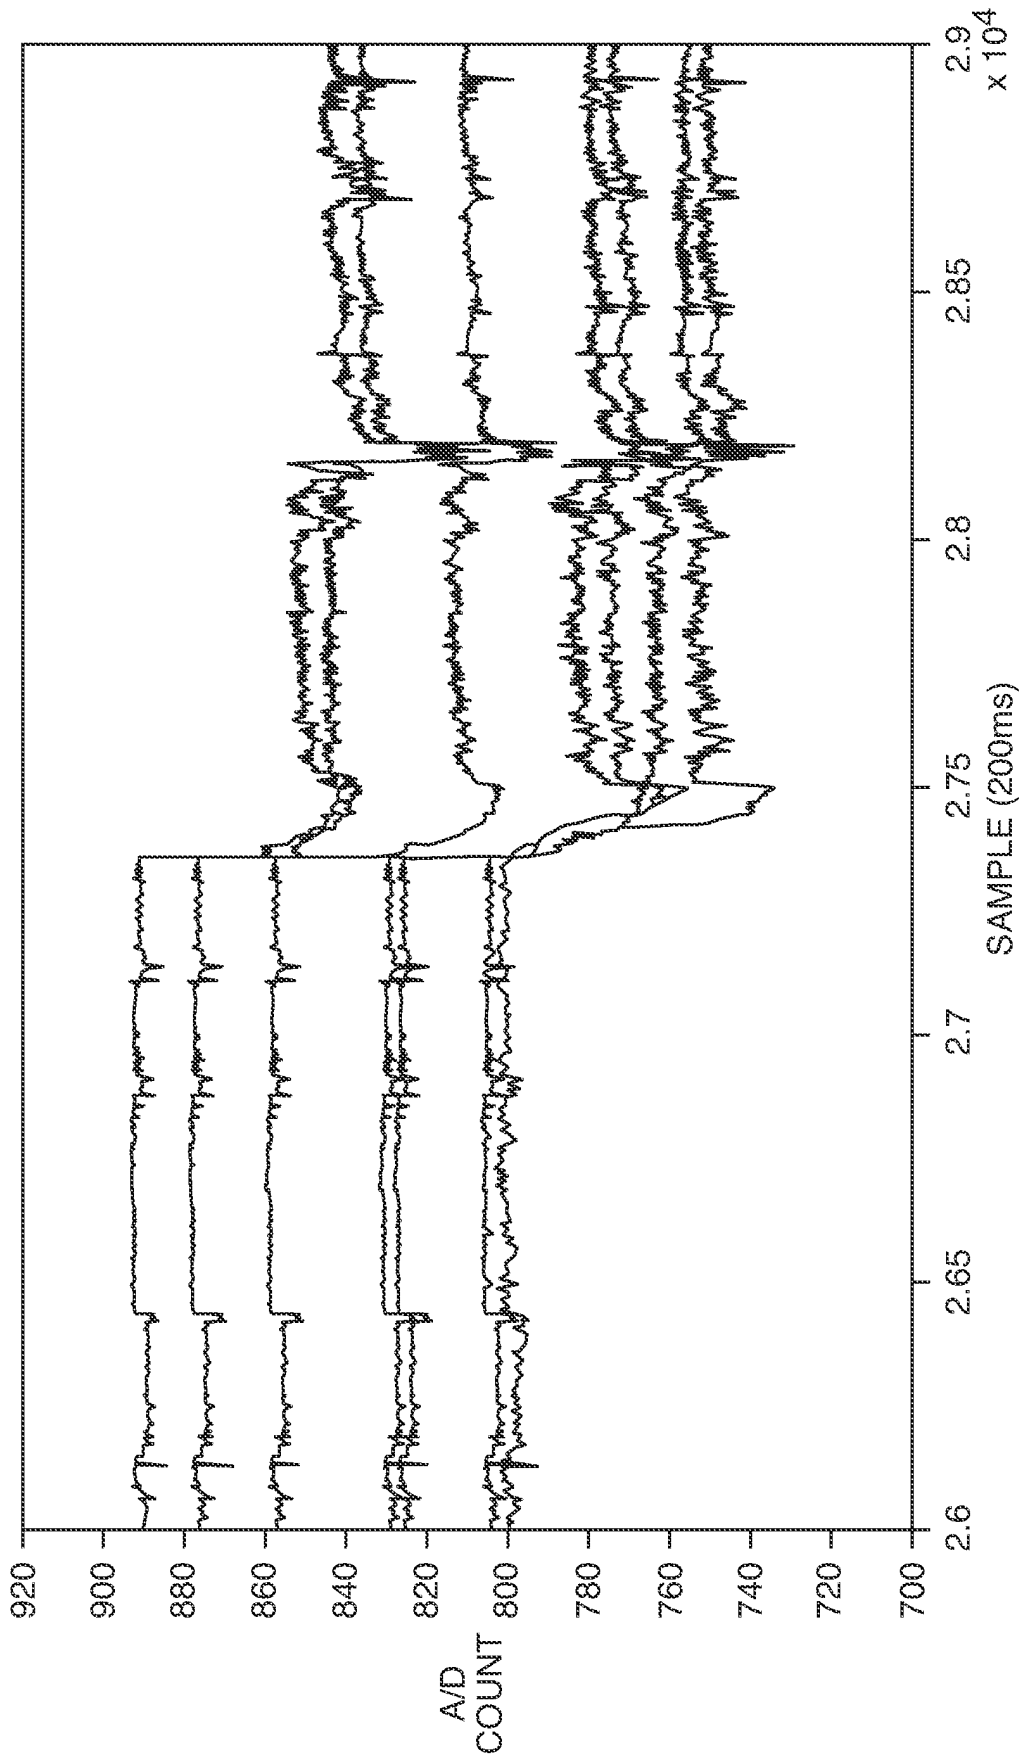


FIG. 11

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 5903222 A [0002]
- US 5469145 A [0002]
- US 2005195085 A [0002]
- JP 2002071584 A [0002]
- WO 0037009 A, A. Fletcher [0018]
- US 4940464 A, Van Gompel [0018]
- US 5766389 A, Brandon [0018]
- US 6645190 B, Olson [0018]
- US 4704116 A, Enloe [0022]
- US 5486166 A [0025]
- US 5490846 A [0025]
- US 5820973 A [0025]
- US 347539 A [0052]
- US 20070142797 A, Long [0053]
- US 20060244614 A, Long [0053]
- US 20070024457 A, Long [0053]
- US 511583 A [0055]
- US 20080048786 A [0055]

专利名称(译)	用于吸收制品的无导体检测系统		
公开(公告)号	<a href="#">EP2519207A4</a>	公开(公告)日	2013-07-10
申请号	EP2010840662	申请日	2010-11-18
[标]申请(专利权)人(译)	金伯利-克拉克环球有限公司		
申请(专利权)人(译)	金佰利WORLDWIDE , INC.		
当前申请(专利权)人(译)	金佰利WORLDWIDE , INC.		
[标]发明人	ALES III THOMAS MICHAEL GAKHAR SUDHANSHU LONG ANDREW MARK		
发明人	ALES III, THOMAS, MICHAEL GAKHAR, SUDHANSHU LONG, ANDREW, MARK		
IPC分类号	A61F13/42 A61F13/505 A61F13/84 G08B5/00 G08B3/00 G08B6/00 A61B5/00		
CPC分类号	A61B5/202 A61B5/6808 A61B5/7207 A61F13/42 A61F2013/424 A61F2013/8482 G01N27/223 A61F13/505 A61F13/84 G01N21/3554 G01N21/3577		
优先权	12/648645 2009-12-29 US		
其他公开文献	EP2519207B1 EP2519207A2		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

公开了信号系统，其指示吸收制品的变化，例如体液的存在。所公开的各种不同的信号系统不包括过去所需的包含在物品内部的任何导电元件。相反，从文章的外壳监控变更。在一个方面，例如，提供了一种信号装置，用于感测和指示吸收制品中身体流出物的存在，该装置包括壳体 and 设置在壳体内部的电容传感器，电容传感器适于检测壳体内部的变化。由于对吸收性物品的污染导致的电容。信号装置可包括用于将壳体可拆卸地连接到吸收制品的连接机构。