

(19)



(11)

**EP 2 898 828 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:

**03.04.2019 Bulletin 2019/14**

(51) Int Cl.:

**A61B 5/1473** <sup>(2006.01)</sup> **A61B 5/00** <sup>(2006.01)</sup>

(21) Application number: **12884951.0**

(86) International application number:

**PCT/JP2012/074442**

(22) Date of filing: **24.09.2012**

(87) International publication number:

**WO 2014/045448 (27.03.2014 Gazette 2014/13)**

(54) **SENSOR INSERTION DEVICE**

**SENSOREINSATZVORRICHTUNG**

**DISPOSITIF D'INSERTION DE CAPTEUR**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

• **MATSUMOTO, Atsushi**

**Ashigarakami-gun**

**Kanagawa 259-0151 (JP)**

(43) Date of publication of application:

**29.07.2015 Bulletin 2015/31**

(74) Representative: **Casalonga**

**Casalonga & Partners**

**Bayerstraße 71/73**

**80335 München (DE)**

(73) Proprietor: **Terumo Kabushiki Kaisha**

**Tokyo 151-0072 (JP)**

(56) References cited:

**WO-A2-2013/152090**

**JP-A- 2003 527 138**

**JP-A- 2004 520 898**

**JP-A- 2010 538 745**

(72) Inventors:

• **OHKOSHI, Takahiro**

**Ashigarakami-gun**

**Kanagawa 259-0151 (JP)**

**EP 2 898 828 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### Technical Field

**[0001]** The present invention relates to a sensor insertion device which inserts a detection element of a sensor which measures biological information of a subject (patient) in a body of the subject.

### Background Art

**[0002]** An analyte (e.g., glucose or pH, cholesterol, or protein) in the blood or body fluid of a patient (subject) has been detected by a sensor inserted or implanted in the body of the patient so far. A sensor insertion device is adjusted to penetrate the skin of the patient promptly and easily for the patient. (e.g., refer to JP 2008-506468 W).

**[0003]** An applicator (sensor insertion device) disclosed in JP 2008-506468 W is provided with an insertion needle which is inserted together with a sensor, a plunger subassembly (movement mechanism) which moves the sensor and the insertion needle for sticking, and an attachment unit (implant member) which implants the sensor on the skin of a patient. An electrode unit (data process unit) which has a transmission function capable of transmitting the acquired information (biological information) of the detected blood glucose level to an external medical device is attached to the sensor.

**[0004]** In order to insert and implant a sensor inside the body of a patient using this type of sensor insertion device, steps (usage procedure) listed below are generally performed.

Step [1]: Attaching a sensor to a sensor insertion device.

Step [2]: Detaching a safety mechanism of an insertion needle so as to be released to make the insertion needle movable.

Step [3]: Positioning the sensor insertion device at a desired position (insertion position) inside the body of a subject and sticking an implant member onto the skin of the subject.

Step [4]: Operating the sensor insertion device to insert a detection element of the sensor and the insertion needle into the body of the subject.

Step [5]: Retracting the insertion needle from the sensor to implant the sensor and the implant member inside the body (and on the skin) of the subject.

Step [6]: Removing the sensor insertion device from the subject.

Step [7]: Connecting a data process unit to a part of the sensor exposed on the skin of the subject to leave the data process unit in place together with the sensor.

**[0005]** WO2013/152090A2, which is prior art under Art. 54(3) EPC, discloses that a device for sensor appli-

cators and methods of use with pushbutton activation that implant the sensor, withdraw the insertion needle, engage the transmitter with the housing, and disengage the applicator from the housing.

### Summary of Invention

### Technical Problem

**[0006]** Among the above steps [1] to [7], in order to perform, in particular, steps [2], [5], and [6], it is necessary for an operator (mainly, a subject himself/herself) to perform complicated operations such as pressing a button and releasing a mating state between members of the sensor insertion device. Thus, especially Children and elderly people are unfamiliar with the insertion device. It is so difficult for them to handle the sensor insertion device.

**[0007]** Further, as can be understood from the above, there are many operation steps. Thus, an operator may erroneously perform the sensor insertion operation, and, as a result, may fail to insert the sensor. This causes a burden to the subject.

**[0008]** Further, the safety mechanism detached in step [2] has to be discarded. This increases waste products, and therefore results in the lack of convenience.

**[0009]** A general object of the present invention is to provide a sensor insertion device which easily inserts a sensor into the body of a subject.

**[0010]** A principal object of the present invention is to provide a sensor insertion device capable of preventing an increase in the number of waste products.

**[0011]** Another aspect of the present disclosure is to provide a sensor insertion method capable of inserting a sensor into the body of a subject with a simple operation.

### Solution to Problem

**[0012]** An embodiment of the present invention provides a sensor insertion device for inserting a detection element of a sensor measuring biological information of a subject into the body of the subject, the sensor insertion device including:

a device body to which a data process unit processing a signal including biological information detected by the detection element is attached;

a movement mechanism detachably attached to the device body, the movement mechanism moving the detection element together with an insertion needle to be stuck into the body of the subject to insert the detection element and the insertion needle into the body of the subject;

a displacement preventing member prevent displacement of the movement mechanism toward the body of the subject,

the movement mechanism including

a hollow guide member engageable with the device body,  
 a needle holding member pushing the insertion needle to move inside the guide member,  
 a grip member gripped by an operator,  
 a pushing member held by the grip member and displaced to push the needle holding member interlocking with displacement of the grip member along the guide member caused by the operator, and  
 a resilient member elastically biasing the needle holding member in a direction away from the device body; and  
 a displacement preventing member preventing displacement of the movement mechanism toward the body of the subject, wherein  
 the displacement preventing member blocks the grip member when the data process unit is not attached to the device body and, on the other hand, moves under a pushing action of the data process unit to release the blockage with respect to the grip member when the data process unit is attached to the device body,  
 the insertion needle is stuck into the body of the subject when the pushing member is displaced along with displacement of the grip member released from the blockage by the displacement preventing member toward the body of the subject and the pushing member pushes the needle holding member,  
 the pushing member remaining held by the grip member is engaged with the guide member when the pushing member reaches a displacement end point,  
 the guide member is released from engagement with the device body by the grip member when the grip member and the pushing member reach the displacement end point, and  
 the needle holding member is displaced in a direction away from the device body by an action of the resilient member when the grip member and the pushing member reach the displacement end point, so that the detection element is implanted inside the body by the engagement between the pushing member and the guide member, the release of the engagement of the guide member with the device body, and the displacement of the needle holding member in the direction away from the device body.

**[0013]** That is, in the present invention, the safety mechanism is configured by blocking the grip member by the displacement preventing member. Further, the safety mechanism is released by a simple operation essential in the sensor insertion step of attaching the data process unit. This prevents an erroneous operation of inserting the insertion needle and the detection element into the body of a subject without attaching the data process unit thereto.

**[0014]** In addition, the above configuration enables the detection element to be inserted into the body and the

movement mechanism to be detached from the device body merely by performing a simple operation of displacing the movement mechanism toward the body of the subject after releasing the safety mechanism. Thus, even a person unfamiliar with the sensor insertion device is not likely to perform an erroneous operation.

**[0015]** As described above, the present invention makes it possible to prevent an operator from erroneously performing the sensor insertion operation. Therefore, there is less burden on a subject.

**[0016]** Preferred specific examples of the displacement preventing member include a bar-like member attached to the guide member. In this case, in order to turn the bar-like member, the bar-like member may be directly pushed by the data process unit.

**[0017]** Alternatively, when the device body includes a base plate, a housing attached to the base plate, and a lid member attached to the housing to block an opening of the housing, the lid member may serve as the displacement preventing member. In this case, when the data process unit is attached to the device body, the data process unit pushes the base plate to displace the base plate. Along with this, the lid member turns to release the blockage with respect to the grip member. Accordingly, the safety mechanism is released.

**[0018]** In order to displace the needle holding member in a direction away from the device body under an action of the resilient member when the grip member and the pushing member reach the displacement end point, for example, the needle holding member may be provided as a long member and a slit may be formed along the longitudinal direction of the needle holding member.

**[0019]** Further, a stopper is disposed on the slit, and an entrance portion which enters the notch is formed on the pushing member. In such a configuration, when the entrance portion climbs over the stopper and enters the slit, the needle holding member is displaced in the direction away from the device body under an action of the resilient member.

**[0020]** In order to release the guide member from the engagement with the device body when the grip member and the pushing member reach the displacement end point, an engagement portion of the guide member to be engaged with the device body may be formed on the tip of a spreading portion that spreads outward from the guide member.

**[0021]** In this case, the spreading portion is pushed by an inner wall of the grip member when the grip member is displaced toward the device body. As a result, the spreading portion is displaced in a direction approaching the guide member, that is, a direction away from the device body. Accordingly, the engagement of the engagement portion with the device body is released.

**[0022]** For example, the resilient member may be held by a holding wall which is formed inside the guide member.

**[0023]** Further, a catching portion which catches the sensor when the needle holding member reaches the

displacement end point is preferably formed on the device body. In this case, when the needle holding member returns to the direction away from the device body, the sensor is positioned and fixed by the catching portion. Thus, the detection element inserted into the body of the subject can be easily detached from the needle. That is, the catching portion serves as a retainer for the detection element.

**[0024]** A transmitter is preferably attached to the device body as the data process unit. A transmitter is capable of performing wireless communication. Thus, it is possible to obtain biological information of a subject, for example, in an external medical device such as a display device and an electronic medical recording system.

**[0025]** Another aspect of the disclosure provides a sensor insertion method for inserting a detection element of a sensor measuring biological information of a subject into the body of the subject by a movement mechanism detachably attached to a device body holding a data process unit processing a signal including biological information detected by the detection element, wherein the movement mechanism includes a hollow guide member engageable with the device body, a needle holding member pushing the insertion needle to move inside the guide member, a grip member gripped by an operator, a pushing member held by the grip member and displaced to push the needle holding member interlocking with displacement of the grip member along the guide member caused by the operator, and a resilient member elastically biasing the needle holding member in a direction away from the device body, the sensor insertion method including the steps of:

disposing a displacement preventing member blocking the grip member to prevent displacement of the movement mechanism toward the body of the subject;

allowing the device body to which the movement mechanism is attached by engagement of the guide member to come into contact with the subject, attaching the data process unit to the device body, and moving the displacement preventing member under a pushing action of the data process unit to release blockage with respect to the grip member;

displacing the pushing member to push the needle holding member interlocking with the grip member released from the blockage by the displacement preventing member to stick the insertion needle into the body of the subject and move the sensor; and

moving the grip member, the pushing member, and the needle holding member to a displacement end point to engage the pushing member remaining held by the grip member with the guide member, to release the guide member from engagement with the device body by the grip member, and to displace the needle holding member in a direction away from the device body by an action of the resilient member so that the detection element is implanted inside the

body.

**[0026]** The present invention makes it possible to release the safety mechanism merely by performing an operation of attaching the data process unit to the device body. Further, an operator can insert the detection element of the sensor into the body of the subject and detach the movement mechanism from the device body merely by performing an operation of displacing the movement mechanism toward the body of the subject thereafter.

**[0027]** As can be understood from the above, the sensor insertion method includes a small number of steps. Thus, even a person unfamiliar with the sensor insertion device is not likely to perform an erroneous operation. Therefore, there is less burden on a subject.

**[0028]** The displacement preventing member may be configured as a bar-like member attached to the guide member as described above. In this case, the bar-like member may be turned by directly pushing the bar-like member by the data process unit.

**[0029]** When the device body includes a base plate, a housing attached to the base plate, and a lid member attached to the housing to block an opening of the housing, the lid member may serve as the displacement preventing member. In this case, when the data process unit is attached to the device body, the base plate may be pushed by the data process unit to displace the base plate, and the lid member may be turned along with this.

**[0030]** In order to displace the needle holding member in the direction away from the device body under an action of the resilient member when the grip member and the pushing member reach the displacement end point, the needle holding member may be configured in the above manner and the entrance portion may be allowed to climb over the stopper and enter the slit.

**[0031]** Further, in order to release the guide member from the engagement with the device body when the grip member and the pushing member reach the displacement end point, the guide member may be configured in the above manner, and the spreading portion may be pushed by the inner wall of the grip member displaced toward the device body to displace the engagement portion in the direction away from the device body.

**[0032]** Further, a catching portion is preferably disposed on the device body so that the sensor is caught by the catching portion when the needle holding member reaches the displacement end point. This is because of that, when the needle holding member returns to the direction away from the device body, detachment of the detection element is prevented by such a configuration.

#### Brief Description of Drawings

**[0033]**

Fig. 1 is an overall schematic perspective view of a sensor insertion device according to a first embodiment of the present invention.

Fig. 2 is an exploded perspective view of the sensor insertion device.

Fig. 3 is a schematic perspective view of a base plate of a device body illustrated in relation with the position of a sensor.

Fig. 4 is a schematic perspective view of a housing of the device body viewed from the lower side.

Fig. 5 is a schematic perspective view of a lid member of the device body viewed from the lower side.

Fig. 6 is a schematic perspective view of a transmitter to be attached to the device body from the lower side.

Fig. 7 is a principal part schematic perspective view illustrating the positional relationship between a grip member, the lid member, a needle holder (needle holding member), a safety bar, and the sensor.

Fig. 8 is a schematic perspective view of a guide member with the safety bar attached thereto.

Fig. 9 is a schematic perspective view of the guide member viewed from the upper side.

Fig. 10 is an overall schematic perspective view of the needle holder (needle holding member).

Fig. 11 is a principal part enlarged perspective view of the needle holder.

Fig. 12 is a vertical cross-sectional view of the sensor insertion device before a movement mechanism is displaced.

Fig. 13 is a lower-side plan view illustrating the positional relationship between the grip member, the lid member, the needle holder, a coil spring (resilient member), the safety bar, and the sensor.

Fig. 14 is an overall schematic perspective view of a pusher (pushing member).

Fig. 15 is a vertical cross-sectional view of the sensor insertion device illustrating a state in which lock of the safety bar is released along with attachment of the transmitter to the device body.

Fig. 16 is a vertical cross-sectional view of the sensor insertion device illustrating a state in which the movement mechanism is displaced toward the body of a subject and the coil spring is compressed.

Fig. 17 is a schematic perspective view illustrating the base plate in the positional relationship when a catching portion disposed on the base plate catches the sensor.

Fig. 18 is a vertical cross-sectional view of the sensor insertion device illustrating a state in which the coil spring extends and the needle holding member is displaced in a direction away from the body of the subject.

Fig. 19 is a principal part schematic perspective view illustrating a state in which the movement mechanism is detached from the device body.

Fig. 20 is an exploded perspective view of a sensor insertion device according to a second embodiment of the present invention.

Fig. 21 is a schematic perspective view of a lid member of a device body of the sensor insertion device according to the second embodiment viewed from

the lower side.

Fig. 22 is a principal part schematic perspective view of a grip member of a movement mechanism of the sensor insertion device according to the second embodiment viewed from the lower side.

Fig. 23 is a vertical cross-sectional view of the sensor insertion device according to the second embodiment before a transmitter is attached to the device body.

Fig. 24 is a principal part schematic perspective view illustrating the positional relationship between a base plate and a housing in the device body before the transmitter is attached to the device body.

Fig. 25 is a principal part schematic perspective view illustrating the positional relationship between the base plate, the housing, and the transmitter when the transmitter is attached to the device body and the housing is moved forward (displaced) from the state of Fig. 24.

Fig. 26 is a vertical cross-sectional view of the sensor insertion device according to the second embodiment after the transmitter is attached to the device body.

## 25 Description of Embodiments

**[0034]** Hereinbelow, a sensor insertion method will be specifically described with reference to the accompanying drawings by showing preferred embodiments in relation with a sensor insertion device according to the present invention for performing the method.

**[0035]** Fig. 1 is an overall schematic perspective view of a sensor insertion device 10 according to a first embodiment. Fig. 2 is an exploded perspective view of the sensor insertion device 10. The sensor insertion device 10 is provided with a device body 14 to which a transmitter 12 (refer to Fig. 2) as a data process unit is attached and a movement mechanism 16. As illustrated in Fig. 1, the sensor insertion device 10 is placed at an appropriate position (e.g., an inconspicuous place with less body motion such as the abdomen) on the skin S of a patient (subject) to be used.

**[0036]** The sensor insertion device 10 is positioned on the skin S by an adhesive member 18 which is disposed on the bottom face of the device body 14. The lower end face of the adhesive member 18 is coated with an adhesive which has a sticking power sufficient to prevent the adhesive member 18 from easily peeling off when stuck to the skin S of the patient. Further, a part of the upper end face of the adhesive member 18, the part facing the device body 14, is also coated with an adhesive.

**[0037]** First, the device body 14 will be described. The device body 14 includes a base plate 20, a housing 22 which is attached to the base plate 20, and a lid member 24 which blocks an opening of the housing 22 (refer to Fig. 2).

**[0038]** As illustrated in Fig. 3, the base plate 20 includes a first attachment portion 26, a circuit board hold-

ing portion 28, and a second attachment portion 30. The first attachment portion 26 includes two thick standing portions 34a and 34b each of which stands on a bottom frame 32. Engagement recesses 36 are formed in a depressed form near bottoms of opposed vertical walls of the standing portions 34a and 34b. A first insertion groove 38a and a second insertion groove 40a are respectively formed on the outer side face and the top face of the standing portion 34a along the longitudinal direction of the base plate 20. A first insertion groove 38b and a second insertion groove 40b are respectively formed on the outer side face and the top face of the standing portion 34b along the longitudinal direction of the base plate 20.

**[0039]** The circuit board holding portion 28 is arranged between the standing portions 34a and 34b, and holds a circuit board 44 which is provided with a connector 42.

**[0040]** In the base plate 20, an insertion opening 48 for inserting an insertion needle 46 (described below) therethrough is formed on the tip of the circuit board holding portion 28. Further, a catching claw 54 (catching portion) for catching a sensor base 52 of a sensor 50 is formed above the insertion opening 48. Further, a lock portion 55 for preventing displacement of a safety bar 106 (described below, refer to Fig. 1) when the transmitter 12 is not attached to the base plate 20 is formed on the rear end of the circuit board holding portion 28.

**[0041]** The second attachment portion 30 is a region for attaching the transmitter 12 (refer to Fig. 6) thereto. Grasping claws 56a and 56b which project vertically upward are formed on the second attachment portion 30. A blocking portion 58 which is formed of a generally semicylindrical body lying on the side is disposed on the end of the second attachment portion 30.

**[0042]** The housing 22 has a generally U shape. As illustrated in Fig. 4, the housing 22 includes first prisms 60a and 60b which project along the horizontal direction are formed on the inner side of side walls and second prisms 62a and 62b which project downward along the vertical direction are formed on a ceiling wall. The first prisms 60a and 60b are slidably inserted into the first insertion grooves 38a and 38b, respectively. The second prisms 62a and 62b are slidably inserted into the second insertion grooves 40a and 40b, respectively.

**[0043]** Generally cylindrical locking shafts 64a and 64b for locking the lid member 24 are disposed on the tip of the housing 22.

**[0044]** On the other hand, as illustrated in Fig. 5, circular arc-like recesses 66a and 66b are formed on the tip of the lid member 24. The locking shafts 64a and 64b are respectively inserted into the circular arc-like recesses 66a and 66b. The lid member 24 is tiltably locked to the housing 22 by inserting the locking shafts 64a and 64b respectively into the circular arc-like recesses 66a and 66b.

**[0045]** Hooking claws 68a and 68b which project vertically downward are formed on the lower end face of the lid member 24. These hooking claws 68a and 68b are hooked on the ceiling wall of the housing 22 when the lid

member 24 is in a closed state.

**[0046]** The transmitter 12 attached to the second attachment portion 30 is electrically connected to the circuit board 44 through an electrode 70 illustrated in Fig. 6 and used for receiving a signal, converting the signal into information, and wirelessly transmitting the information to an external medical device (e.g., a display device or an electronic medical recording system, not illustrated) automatically or by an operation. Accordingly, it is possible to manage the blood glucose level or the like of a subject (patient) in a place away from the subject.

**[0047]** Grooves 72a and 72b to be grasped are formed in a depressed form on opposite side parts of the transmitter 12. The grasping claws 56a and 56b (refer to Fig. 3) are respectively inserted into the grooves 72a and 72b. Further, an entrance recess 74 is formed on the bottom of one end of the transmitter 12. The blocking portion 58 enters the entrance recess 74.

**[0048]** As will be described below, the transmitter 12 is attached to the device body 14 before a detection element 76 (refer to Fig. 2) of the sensor 50 is inserted into the body of a subject by the sensor insertion device 10.

**[0049]** The movement mechanism 16 is used for moving the detection element 76 illustrated in Fig. 2 together with the insertion needle 46 so as to be inserted into the body of a subject.

**[0050]** First, the sensor 50 will be described. The sensor 50 includes the detection element 76 and the sensor base 52. The detection element 76 is formed in a long shape and housed inside the insertion needle 46 as illustrated in Figs. 3 and 7. The detection element 76 detects, for example, information about the concentration of glucose contained in a body fluid component of a patient (biological information: blood glucose level).

**[0051]** On the other hand, the sensor base 52 is formed in a thin plate shape and coupled to the base end of the detection element 76. The sensor base 52 has a rectangular hole 78 to be caught which is formed to penetrate the sensor base 52. The tip of the catching claw 54 passes through the hole 78.

**[0052]** The sensor base 52 is coated with an insulation material, and has a sensor circuit (not illustrated) disposed inside thereof. As the sensor circuit using fluorescent dye, for example, a structure in which a base body made of, for example, silicon, a light receiving element, a protective film, a filter, a light emitting element, an indicator layer, and the like are laminated is employed.

**[0053]** A flexible cable 80 for electrically connecting the detection element 76 and the transmitter 12 is disposed on the sensor base 52. Information about, for example, the glucose concentration detected by the detection element 76 is transmitted to the transmitter 12 through the flexible cable 80 and the connector 42.

**[0054]** Next, the insertion needle 46 will be described. The insertion needle 46 is made of a metal material (e.g., stainless steel) having rigidity so as to be easily stuck into the skin S of a patient. Further, a part of the tip of the insertion needle 46 is cut to have an acute angle

(sharpness) to allow the insertion needle 46 to be easily stuck into the skin S.

**[0055]** The cross section in the horizontal direction of the insertion needle 46 is formed in a generally C shape (or a generally U shape), and a hollow groove is defined inside the C-shaped cross section. The hollow groove extends along the longitudinal direction of the insertion needle 46, and is capable of housing the detection element 76 of the sensor 50 therein. That is, the detection element 76 is covered with the insertion needle 46.

**[0056]** Next, the movement mechanism 16 for moving the detection element 76 and the insertion needle 46 configured in the above manner toward a subject will be described.

**[0057]** As illustrated in Fig. 2, the movement mechanism 16 includes a guide member 82 which is engageable with the device body 14, a needle holder 84 (needle holding member) which pushes the insertion needle 46 to move, a grip member 86 which is gripped by an operator, a pusher 88 (pushing member) which pushes the needle holder 84, and a coil spring 90 (resilient member) which elastically biases the needle holder 84.

**[0058]** As illustrated in Figs. 8 and 9, the guide member 82 is provided as a hollow body which is slightly inclined relative to the vertical direction. That is, an insertion hole 92 is formed on the guide member 82 along the longitudinal direction thereof.

**[0059]** A holding wall 94 is formed inside the guide member 82 in a manner to narrow the insertion hole 92 (refer to Fig. 9). The lower end of the coil spring 90 is seated on the holding wall 94. In other words, the coil spring 90 is held by the holding wall 94.

**[0060]** Two notched grooves 96a and 96b are formed on each side wall on the long side of the guide member 82 (refer to Fig. 8). A part between the notched grooves 96a and 96b spreads outward from the guide member 82. Hereinbelow, the part between the notched grooves 96a and 96b is referred to as a spreading portion 98.

**[0061]** An engagement projection 100 is formed on the tip of each spreading portion 98. These engagement projections 100 are engaged with the respective engagement recesses 36 (refer to Fig. 3) formed on the base plate 20 of the device body 14.

**[0062]** Further, two shaft support portions 102a and 102b are formed in a projecting form on one side wall on the short side of the guide member 82. A turning shaft 108 of a safety bar 106 (bar-like member) as a displacement preventing member is turnably supported on support holes 104 of the shaft support portions 102a and 102b. On the same side wall as above, a first locking window 110 and a second locking window 111 are formed in a penetrating manner in this order from the lower side.

**[0063]** The safety bar 106 is formed as a long member, and has a portion 112 to be pushed which is formed in a projecting form on a lower end thereof and extends in a direction perpendicular to the longitudinal direction. A locking recess 113 to be engaged with the lock portion 55 (refer to Fig. 3) is formed on the lower end face of the

portion 112 and depressed upward. The turning shaft 108 to be inserted into the support holes 104 of the shaft support portions 102a and 102b is formed on the middle part in the longitudinal direction of the safety bar 106 and projects along the width direction thereof. A wide portion 114 which spreads in the width direction is formed on an upper end of the safety bar 106.

**[0064]** The needle holder 84 is inserted into the insertion hole 92 of the guide member 82. As illustrated in Fig. 10, the needle holder 84 includes a needle holding portion 116 which holds the insertion needle 46, a long body 118, and a wide head 120 which are formed in this order from the lower side toward the upper side.

**[0065]** As illustrated in Fig. 11, the needle holding portion 116 has a notched portion 122 which is formed by notching a part of the needle holding portion 116 by approximately 90° and a base holding portion 124 which is formed in a projecting form adjacent to the notched portion 122. A needle step portion 126 is formed on the notched portion 122, and the insertion needle 46 is disposed on the needle step portion 126. On the other hand, a base step portion 128 is formed on the base holding portion 124 (refer to Figs. 7 and 11), and the sensor base 52 comes into contact with the base step portion 128. The formation of the notched portion 122 prevents the flexible cable 80 from interfering with the needle holding portion 116.

**[0066]** As illustrated in Fig. 10, the needle holder 84 includes a slit 130 which is formed from the head 120 through the body 118. The needle holder 84 also includes a stopper 132 which is disposed on the slit 130 at a position near the head 120. The stopper 132 bulges in a direction substantially perpendicular to the longitudinal direction of the slit 130.

**[0067]** As can be understood from Figs. 7 and 12, the body 118 of the needle holder 84 is inserted into the coil spring 90. An upper end of the coil spring 90 is seated on the lower end face of the head 120. That is, the coil spring 90 is located between the holding wall 94 of the guide member 82 and the head 120 of the needle holder 84.

**[0068]** As illustrated in Figs. 1 and 2, the grip member 86 is provided as a hollow member which is inclined corresponding to the guide member 82.

**[0069]** As illustrated in Fig. 13, a surrounding wall 134 for surrounding and thereby holding the guide member 82 is formed inside the grip member 86. Further, two holding pillars 136a and 136b which extend along the longitudinal direction of the grip member 86 are formed near a short inclined surface. A clearance between the holding pillars 136a and 136b is set smaller than the dimension in the width direction of the wide portion 114 of the safety bar 106. Thus, the safety bar 106 is blocked by the holding pillars 136a and 136b.

**[0070]** An engagement hole 138 (refer to Figs. 1 and 2) is formed in a penetrating manner on a flat upper end face of the grip member 86.

**[0071]** As illustrated in Fig. 14, the pusher 88 includes

a head 140 which has a quadrangular pyramid shape without one top, a first hanging portion 142 and a second hanging portion 144 which hang down from two long sides of the bottom face of the head 140, and an entrance portion 146 which is disposed between the first hanging portion 142 and the second hanging portion 144 and extends in the same direction as the extending direction of the first hanging portion 142 and the second hanging portion 144. The first hanging portion 142 and the second hanging portion 144 are arranged at opposed positions. The head 120 of the needle holder 84 is slidably supported between the first hanging portion 142 and the second hanging portion 144.

**[0072]** The tip of the first hanging portion 142 is folded back to extend outward from the first hanging portion 142 to form a folded portion 148. As will be described below, the folded portion 148 is locked on the second locking window 111 of the guide member 82. On the other hand, the second hanging portion 144 which extends along the insertion hole 92 is held by the insertion hole 92.

**[0073]** The entrance portion 146 faces the slit 130 of the needle holder 84. The tip of the entrance portion 146 abuts on the stopper 132. That is, the entrance portion 146 pushes the stopper 132 to thereby push the needle holder 84. When the needle holder 84 is displaced by the pushing and reaches a displacement end point, the entrance portion 146 climbs over the stopper 132 and enters the slit 130.

**[0074]** Engagement grooves 150a and 150b are formed on the respective two side faces on the short sides of the bottom face of the head 140. As illustrated in Figs. 1, 12, and the like, a part of the head 140 passes through the engagement hole 138 from the inside of the grip member 86 so as to be exposed from the engagement hole 138.

**[0075]** When the head 140 passes through the engagement hole 138, the engagement hole 138 of the grip member 86 is elastically deformed to expand. Then, when the positions of the engagement grooves 150a and 150b are aligned with the engagement hole 138, the engagement hole 138 is contracted to return to its original shape. It is needless to say that the inner wall of the engagement hole 138 enters the engagement grooves 150a and 150b. Accordingly, the pusher 88 and the grip member 86 are engaged with each other.

**[0076]** The sensor insertion device 10 according to the first embodiment is basically configured in the above manner. Next, effects of the sensor insertion device 10 will be described in relation with an operation thereof (sensor insertion method).

**[0077]** First, the lock portion 55 (refer to Fig. 3) of the base plate 20 is engaged with the locking recess 113 which is formed on the lower end face of the portion 112 to be pushed of the safety bar 106. Then, the transmitter 12 is attached to the device body 14 in which the displacement of the safety bar 106 is prevented by the engagement between the lock portion 55 and the locking recess 113. That is, the grasping claws 56a and 56b are

respectively inserted into the grooves 72a and 72b which are formed on the opposite side parts of the transmitter 12. In this state, the transmitter 12 is allowed to slide toward the first attachment portion 26. The slide finishes when the tip face of the transmitter 12 comes into contact with the rear end face of the housing 22 and the blocking portion 58 enters the entrance recess 74. That is, the transmitter 12 is attached to the second attachment portion 30 of the base plate 20.

**[0078]** When the transmitter 12 is attached to the second attachment portion 30 in this manner, as illustrated in Fig. 15, the portion 112 of the safety bar 106 is pushed by the tip face of the transmitter 12. As a result, the locking recess 113 formed on the lower end face of the portion 112 is disengaged from the lock portion 55 (both refer to Fig. 2). Accordingly, the safety bar 106 is released from the lockup by the base plate 20 (device body 14). Thus, the safety bar 106 turns around the turning shaft 108. Along with this, the wide portion 114 of the safety bar 106 is disengaged from the holding pillars 136a and 136b of the grip member 86.

**[0079]** When the upper end face of the wide portion 114 of the safety bar 106 abuts on the lower end faces of the holding pillars 136a and 136b, the holding pillars 136a and 136b are blocked by the wide portion 114. Thus, it is not possible to displace the grip member 86. In other words, when the transmitter 12 is not attached, it is not possible to move the insertion needle 46 and the detection element 76. Therefore, it is possible to prevent an erroneous operation of inserting the insertion needle 46 and the detection element 76 into the body without attaching the transmitter 12 thereto.

**[0080]** At this point, the lid member 24 is supported between the inner wall of the grip member 86 and the surrounding wall 134 and housed inside the grip member 86. It is needless to say that the locking shafts 64a and 64b (refer to Fig. 4) formed on the housing 22 are previously respectively inserted into the circular arc-like recesses 66a and 66b (refer to Fig. 5) of the lid member 24.

**[0081]** The folded portion 148 of the pusher 88 is locked on the second locking window 111 formed near the upper end of the guide member 82. This prevents the grip member 86 and the pusher 88 from moving away from the device body 14 and coming off the guide member 82.

**[0082]** Then, a release paper stuck on the lower end face of the adhesive member 18 is peeled off, and the adhesive member 18 is stuck at an appropriate position on the skin S of a patient. Accordingly, the sensor insertion device 10 is positioned on the skin S.

**[0083]** Then, an operator (mainly, a subject himself/herself) grips the grip member 86, and pushes down the grip member 86 along the guide member 82 as illustrated in Fig. 16. That is, the grip member 86 is displaced toward the body of the subject. Along with this, the pusher 88 engaged with the grip member 86 is also displaced. Since the lock by the safety bar 106 has been already released as described above, the displacement is easily performed.

**[0084]** The entrance portion 146 of the pusher 88 abuts on the stopper 132 of the needle holder 84. Thus, the needle holder 84 is also displaced in the same direction as the displacement direction of the grip member 86 and the pusher 88 along with the displacement of the pusher 88. Thus, the insertion needle 46 held by the needle holding portion 116 of the needle holder 84 and the detection element 76 housed inside the insertion needle 46 move toward the body of the subject. That is, the insertion needle 46 and the detection element 76 pass through the insertion opening 48 (refer to Fig. 3) of the base plate 20 so as to be inserted into the body of the subject. Further, the folded portion 148 is disengaged from the second locking window 111, and the coil spring 90 is compressed.

**[0085]** As the grip member 86 is displaced, the spreading portion 98 of the guide member 82 is gradually housed inside the grip member 86. Thus, the spreading portion 98 is pushed toward the guide member 82 by the inner wall of the grip member 86. As a result, a force in a direction away from the engagement recesses 36 acts on the engagement projections 100 formed on the tip of the spreading portion 98. Therefore, as the grip member 86 is displaced, the engagement projections 100 gradually move away from the engagement recesses 36.

**[0086]** When the grip member 86 reaches the displacement end point, the displacement of the pusher 88 and the needle holder 84 finishes, and the insertion of the insertion needle 46 and the detection element 76 also finishes. At this point, the position of the hole 78 of the sensor base 52 is aligned with the catching claw 54 of the device body 14 (base plate 20), and, as illustrated in Fig. 17, the tip of the catching claw 54 passes through the hole 78.

**[0087]** Accordingly, the sensor base 52 is positioned and fixed to the device body 14. This prevents the detection element 76 from coming off the body, and also prevents the flexible cable 80 from being twisted.

**[0088]** At the same time, the engagement projections 100 formed on the tip of the spreading portion 98 of the guide member 82 move away from the engagement recesses 36. As a result, the engagement of the guide member 82 with the device body 14 is released, and the movement mechanism 16 is detached from the device body 14.

**[0089]** When the grip member 86 reaches the displacement end point, the entrance portion 146 climbs over the stopper 132 disposed on the needle holder 84. That is, the entrance portion 146 enters the slit 130 (refer to Fig. 16).

**[0090]** Along with this, the needle holder 84 is released from the pushing by the pusher 88. Thus, as illustrated in Fig. 18, the compressed coil spring 90 stretches to return to its original shape. At this point, the coil spring 90 elastically biases the needle holder 84. As a result, the needle holder 84 is displaced obliquely upward along the guide member 82, that is, in a direction away from the device body 14. Along with this, the insertion needle

46 is also displaced obliquely upward. Thus, the insertion needle 46 is taken out of the body of the subject. Fig. 17 illustrates the state at this point.

**[0091]** The sensor base 52 is held by the catching claw 54 as described above. This prevents movement of the sensor 50 and also coming-off of the detection element 76 from the body of the subject along with the displacement of the needle holder 84.

**[0092]** Further, the folded portion 148 of the pusher 88 is locked on the first locking window 110 of the guide member 82. That is, the pusher 88 is engaged with the guide member 82.

**[0093]** Then, as illustrated in Fig. 19, the movement mechanism 16 is integrally detached from the device body 14 by the release of the engagement of the guide member 82 with the device body 14, the engagement of the pusher 88 with the guide member 82, and the displacement of the needle holder 84 in the direction away from the device body 14. In other words, in the first embodiment, it is possible to release the safety mechanism, to insert the detection element 76 of the sensor 50 into the body of a subject, and to detach the movement mechanism 16 from the device body 14 while retaining only the device body 14 on the body merely by performing the simple operation of attaching the transmitter 12 to the device body 14, and then gripping and pushing down the grip member 86 toward the body. Therefore, even a person unfamiliar with the sensor insertion device 10 is not likely to perform an erroneous operation.

**[0094]** As described above, the first embodiment makes it possible to prevent an operator from erroneously performing the sensor insertion operation. Therefore, there is less burden on a subject.

**[0095]** In addition, the safety bar 106 is not detached from the movement mechanism 16, but remains integrated with the movement mechanism 16. Thus, there is also an advantage in that the number of waste products does not increase.

**[0096]** In addition, the needle holder 84 is displaced upward in the movement mechanism 16 detached from the device body 14. Thus, the insertion needle 46 is housed inside the guide member 82. This prevents the insertion needle 46 from being stuck in an operator who handles the detached movement mechanism 16 or a surrounding person. That is, it is possible to prevent erroneous sticking of the insertion needle 46.

**[0097]** Along with the detachment of the movement mechanism 16 from the device body 14, the lid member 24 housed inside the grip member 86 is exposed. The lid member 24 is turned around the locking shafts 64a and 64b so as to be a closed state to thereby block the opening of the housing 22. At this point, the hooking claws 68a and 68b (refer to Fig. 5) are hooked on the ceiling wall of the housing 22.

**[0098]** Then, an analyte (e.g., glucose or pH, cholesterol, or protein) in the blood or body fluid of the subject is detected by the detection element 76. A result detected by the detection element 76 is transmitted, as a signal,

from the sensor base 52 to the connector 42 through the flexible cable 80. Further, the signal is received by the transmitter 12 through the electrode 70, converted into information, and wirelessly transmitted to the external medical device (specifically, a display device or an electronic medical recording system) automatically or by an operation.

**[0099]** The biological information of the subject can be obtained in the above manner.

**[0100]** Next, a sensor insertion device according to a second embodiment will be described. In elements that correspond to the elements of the sensor insertion device 10 according to the first embodiment, regions having the same functions will be designated by the same reference numerals.

**[0101]** Fig. 20 is an exploded perspective view of a sensor insertion device 210 according to the second embodiment. The sensor insertion device 210 is provided with a device body 214 to which a transmitter 12 (refer to Fig. 2) is attached and a movement mechanism 216. The sensor insertion device 210 is stuck at an appropriate position on the skin S of a patient (subject) to be used with an adhesive member 18 interposed therebetween in the same manner as in the sensor insertion device 10.

**[0102]** First, the device body 214 will be described. The device body 214 includes a base plate 20, a housing 22 which is attached to the base plate 20, and a lid member 224 which blocks an opening of the housing 22.

**[0103]** As illustrated in Fig. 21, a blocking recess 226 is formed in a depressed form on one end of the lid member 224. As is the case with the lid member 24, circular arc-like recesses 66a and 66b into which locking shafts 64a and 64b of the housing 22 are respectively inserted are formed on the other end of the lid member 224, and hooking claws 68a and 68b which project vertically downward are formed on the lower end face of the lid member 24.

**[0104]** That is, the lid member 224 is also turnably locked to the housing 22 by respectively inserting the locking shafts 64a and 64b into the circular arc-like recesses 66a and 66b. Further, when the lid member 224 is in a closed state, the hooking claws 68a and 68b are hooked on a ceiling wall of the housing 22.

**[0105]** The movement mechanism 216 is used for moving a detection element 76 of a sensor 50 illustrated in Fig. 20 together with an insertion needle 46 so as to be inserted into the body of a subject.

**[0106]** The movement mechanism 216 will be specifically described. The movement mechanism 216 includes a guide member 282 which is engageable with the device body 214, a needle holder 84 (needle holding member) which pushes the insertion needle 46 to move, a grip member 286 which is gripped by an operator, a pusher 88 (pushing member) which pushes the needle holder 84, and a coil spring 90 (resilient member) which elastically biases the needle holder 84.

**[0107]** The guide member 282 is configured conforming to the guide member 82 excepting that the shaft sup-

port portions 102a and 102b illustrated in Figs. 8 and 9 are not provided. Thus, regions that are the same as the respective regions of the guide member 82 will be designated by the same reference numerals, and description thereof will be omitted.

**[0108]** As illustrated in Figs. 22 and 23, a step portion 288 is formed by notching a part of the inner wall of a long inclined face of the grip member 286. As can be understood from Fig. 23, the step portion 288 enters the blocking recess 226 (refer to Fig. 21) formed on the end of the lid member 224. This entrance brings the grip member 286 into a locked state so that the grip member 286 cannot be displaced toward the body of the subject.

**[0109]** Further, a surrounding wall 134 for surrounding and thereby holding the guide member 282 is formed inside the grip member 286. Further, an engagement hole 138 is formed in a penetrating manner on a flat upper end face of the grip member 286.

**[0110]** As elements other than the elements described above, the same elements as those of the sensor insertion device 10 according to the first embodiment are employed. Thus, those elements will be designated by the same reference numerals as in the first embodiment, and description thereof will be omitted.

**[0111]** Next, effects of the sensor insertion device 210 according to the second embodiment will be described in relation with an operation thereof (sensor insertion method).

**[0112]** Before the transmitter 12 is attached to the device body 214, as illustrated in Fig. 24, the housing 22 is slidably held by the base plate 20 in such a manner that the rear end face of the housing 22 slightly projects from standing portions 34a and 34b. That is, first prisms 60a and 60b (refer to Fig. 3) are slidably inserted into first insertion grooves 38a and 38b, respectively. Further, second prisms 62a and 62b are slidably inserted into second insertion grooves 40a and 40b, respectively.

**[0113]** In this state, the blocking recess 226 of the lid member 224 enters the step portion 288 of the grip member 286 (refer to Fig. 23). This entrance allows the grip member 286 to be blocked by the lid member 224 and brings the grip member 286 into a locked state so that the grip member 286 cannot be displaced toward the body of a subject. That is, it is not possible to insert the detection element 76 into the body of a subject without attaching the transmitter 12 thereto.

**[0114]** In this manner, the lid member 224 functions as a displacement preventing member in the second embodiment. Thus, it is possible to prevent an erroneous operation of inserting the insertion needle 46 and the detection element 76 without attaching the transmitter 12 thereto.

**[0115]** In this state, the transmitter 12 is attached to the device body 214. Specifically, grasping claws 56a and 56b are respectively inserted into grooves 72a and 72b to be grasped which are formed on opposite side parts of the transmitter 12. Then, in this state, the transmitter 12 is allowed to slide toward a first attachment

portion 26.

**[0116]** During the slide, the tip face of the transmitter 12 comes into contact with the rear end face of the housing 22 because the rear end face of the housing 22 slightly projects from the standing portions 34a and 34b as described above (refer to Fig. 24).

**[0117]** Thus, the housing 22 is pushed by the sliding transmitter 12, and moves forward (displaced) in a direction away from a second attachment portion 30. The displacement of the housing 22 and the slide of the transmitter 12 finish when the tip face of the transmitter 12 comes into contact with the rear end faces of the standing portions 34a and 34b and a blocking portion 58 which is disposed on the base plate 20 enters an entrance recess 74 (refer to Fig. 6) of the transmitter 12 as illustrated in Fig. 25.

**[0118]** Along with the displacement of the housing 22, the lid member 224 in which the locking shafts 64a and 64b of the housing 22 are respectively inserted into the circular arc-like recesses 66a and 66b turns to be inclined toward the housing 22. As a result, as illustrated in Fig. 26, the blocking recess 226 is disengaged from the step portion 288, and the blocked state of the grip member 286 is released to release the locked state.

**[0119]** Then, a release paper stuck on the lower end face of an adhesive member 18 is peeled off, and the adhesive member 18 is stuck at an appropriate position on the skin S of the patient. Accordingly, the sensor insertion device 210 is positioned on the skin S.

**[0120]** Then, an operator (mainly, a subject himself/herself) grips the grip member 286, and pushes down the grip member 286 along the guide member 282. Along with this, the pusher 88 which is engaged with the grip member 286 is also displaced. Since the lock of the grip member 286 by the lid member 224 has been already released as described above, the displacement is easily performed.

**[0121]** Thereafter, the same operations as performed in the first embodiment are performed. Specifically, an entrance portion 146 of the pusher 88 abuts on a stopper 132 of the needle holder 84. Thus, the needle holder 84 is also displaced in the same direction as the displacement direction of the grip member 286 and the pusher 88 along with the displacement of the pusher 88. Thus, the insertion needle 46 held by a needle holding portion 116 of the needle holder 84 and the detection element 76 housed inside the insertion needle 46 move toward the body of the subject. That is, the insertion needle 46 and the detection element 76 pass through an insertion opening 48 (refer to Fig. 24) of the base plate 20 so as to be inserted into the body of the subject. Further, a folded portion 148 of the pusher 88 is disengaged from a second locking window 111 of the guide member 282, and the coil spring 90 is compressed.

**[0122]** As the grip member 286 is displaced, a spreading portion 98 of the guide member 282 is gradually housed inside the grip member 286. Thus, the spreading portion 98 is pushed toward the guide member 282 by

the inner wall of the grip member 286. As a result, a force in a direction away from engagement recesses 36 acts on engagement projections 100 formed on the tip of the spreading portion 98. Therefore, as the grip member 286 is displaced, the engagement projections 100 gradually move away from the engagement recesses 36.

**[0123]** When the grip member 286 reaches a displacement end point, the displacement of the pusher 88 and the needle holder 84 finishes, and the insertion of the insertion needle 46 and the detection element 76 also finishes. At this point, the position of a hole 78 to be caught of a sensor base 52 is aligned with a catching claw 54 of the device body 214 (base plate 20), and, in the same manner as illustrated in Fig. 17, the tip of the catching claw 54 passes through the hole 78.

**[0124]** Accordingly, the sensor base 52 is positioned and fixed to the device body 214. This prevents the detection element 76 from coming off the body, and also prevents a flexible cable 80 from being twisted.

**[0125]** At the same time, the engagement projections 100 formed on the tip of the spreading portion 98 of the guide member 282 move away from the engagement recesses 36. As a result, the engagement of the guide member 282 with the device body 214 is released, and the movement mechanism 216 is detached from the device body 214.

**[0126]** When the grip member 286 reaches the displacement end point, the entrance portion 146 climbs over the stopper 132 disposed on the needle holder 84. That is, the entrance portion 146 enters a slit 130.

**[0127]** Along with this, the needle holder 84 is released from the pushing by the pusher 88. Thus, in the same manner as illustrated in Fig. 18, the compressed coil spring 90 stretches to return to its original shape. At this point, the coil spring 90 elastically biases the needle holder 84. As a result, the needle holder 84 is displaced obliquely upward along the guide member 282, that is, in a direction away from the device body 214. Along with this, the insertion needle 46 is also displaced obliquely upward. Thus, the insertion needle 46 is taken out of the body of the subject.

**[0128]** The sensor base 52 is held by the catching claw 54 as described above. This prevents movement of the sensor 50 and also coming-off of the detection element 76 from the body of the subject along with the displacement of the needle holder 84.

**[0129]** Further, the folded portion 148 of the pusher 88 is locked on a first locking window 110 of the guide member 282. That is, the pusher 88 is engaged with the guide member 282.

**[0130]** Then, in the same manner as illustrated in Fig. 19, the movement mechanism 216 is integrally detached from the device body 214 by the release of the engagement of the guide member 282 with the device body 214, the engagement of the pusher 88 with the guide member 282, and the displacement of the needle holder 84 in the direction away from the device body 214. In other words, also in the second embodiment, it is possible to release

the safety mechanism, to insert the detection element 76 of the sensor 50 into the body of a subject, and to detach the movement mechanism 216 from the device body 214 while retaining only the device body 214 on the body merely by performing the simple operation of attaching 5 the transmitter 12 to the device body 214, and then gripping and pushing down the grip member 286 toward the body. Therefore, even a person unfamiliar with the sensor insertion device 210 is not likely to perform an erroneous operation. Further, since the insertion needle 46 is housed inside the guide member 282, it is possible to prevent erroneous sticking of the insertion needle 46. 10

**[0131]** As described above, the second embodiment makes it possible to prevent an operator from erroneously performing the sensor insertion operation as is the case with the first embodiment. In addition, since the lid member 224 constitutes a part of the device body 214, there is also an advantage in that the number of waste products does not increase. 15

**[0132]** Along with the detachment of the movement mechanism 216 from the device body 214, the lid member 224 housed inside the grip member 286 is exposed. The lid member 224 is turned around the locking shafts 64a and 64b so as to be a closed state to thereby block the opening of the housing 22. At this point, the hooking claws 68a and 68b (refer to Fig. 5) are hooked on the ceiling wall of the housing 22. 20 25

**[0133]** Then, an analyte (e.g., glucose or pH, cholesterol, or protein) in the blood or body fluid of the subject is detected by the detection element 76. A result detected by the detection element 76 is transmitted, as a signal, from the sensor base 52 to a connector 42 through the flexible cable 80. Further, the signal is received by the transmitter 12 through an electrode 70, converted into information, and wirelessly transmitted to the external 30 35 medical device (specifically, a display device or an electronic medical recording system) automatically or by an operation.

**[0134]** The present invention is not particularly limited to the above embodiments, and various modifications may be made without departing from the gist of the invention. 40

**[0135]** For example, the transmitter 12 may be attached after the sensor insertion device 10 or 210 is positioned on the skin S. 45

## Claims

1. A sensor insertion device (10) for inserting a detection element (76) of a sensor (50) measuring biological information of a subject into the body of the subject, the sensor insertion device (10) comprising: 50

a device body (14) to which a data process unit (12) processing a signal including biological information detected by the detection element (76) is attached; 55

a movement mechanism (16) detachably attached to the device body (14), the movement mechanism (16) moving the detection element (76) together with an insertion needle (46) to be stuck into the body of the subject to insert the detection element (76) and the insertion needle (46) into the body of the subject;

a displacement preventing member preventing displacement of the movement mechanism (16) toward the body of the subject;

the movement mechanism (16) including a hollow guide member (82) engageable with the device body (14),

a needle holding member (84) pushing the insertion needle (46) to move inside the guide member (82),

a grip member (86) gripped by an operator, a pushing member (88) held by the grip member (86) and displaced to push the needle holding member (84) interlocking with displacement of the grip member (86) along the guide member (82) caused by the operator, and

a resilient member (90) elastically biasing the needle holding member (84) in a direction away from the device body (14); and

a displacement preventing member preventing displacement of the movement mechanism (16) toward the body of the subject, wherein the displacement preventing member blocks the grip member (86) when the data process unit (12) is not attached to the device body (14) and, on the other hand, moves under a pushing action of the data process unit (12) to release the blockage with respect to the grip member (86) when the data process unit (12) is attached to the device body (14),

the insertion needle (46) is stuck into the body of the subject when the pushing member (88) is displaced along with displacement of the grip member (86) released from the blockage by the displacement preventing member toward the body of the subject and the pushing member (88) pushes the needle holding member (84), the pushing member (88) remaining held by the grip member (86) is engaged with the guide member (82) when the pushing member (88) reaches a displacement end point,

the guide member (82) is released from engagement with the device body (14) by the grip member (86) when the grip member (86) and the pushing member (88) reach the displacement end point, and

the needle holding member (84) is displaced in a direction away from the device body (14) by an action of the resilient member (90) when the grip member (86) and the pushing member (88) reach the displacement end point, so that the detection element (76) is implanted inside

- the body by the engagement between the pushing member (88) and the guide member (82), the release of the engagement of the guide member (82) with the device body (14), and the displacement of the needle holding member (84) in the direction away from the device body (14).
2. The sensor insertion device (10) according to claim 1, wherein the displacement preventing member is a bar-like member (106) that is attached to the guide member (82) and directly pushed by the data process unit (12) to turn.
  3. The sensor insertion device (210) according to claim 1, wherein the device body (214) includes a base plate (20), a housing (22) attached to the base plate (20), and a lid member (224) attached to the housing (22) to block an opening of the housing (22), and the displacement preventing member is the lid member (224) and turns along with displacement of the base plate (20) pushed by the data process unit (12).
  4. The sensor insertion device (10) according to any one of claims 1 to 3, wherein the needle holding member (84) is a long member and has a slit (130) extending along the longitudinal direction of the needle holding member (84), a stopper (132) is disposed on the slit (130), the pushing member (88) has an entrance portion (146) that enters the slit (130), and when the entrance portion (146) climbs over the stopper (132) and enters the slit (130), the needle holding member (84) is displaced in the direction away from the device body (14) under an action of the resilient member (90).
  5. The sensor insertion device (10) according to claim 1, wherein an engagement portion (100) of the guide member (82) to be engaged with the device body (14) is formed on the tip of a spreading portion (98) that spreads outward from the guide member (82), and the spreading portion (98) is pushed by an inner wall of the grip member (86) when the grip member (86) is displaced toward the device body (14) and displaced in a direction away from the device body (14).
  6. The sensor insertion device (10) according to claim 1, wherein a holding wall (94) for holding the resilient member (90) is formed inside the guide member (82).
  7. The sensor insertion device (10) according to claim 1, wherein the device body (14) includes a catching portion (54) that catches the sensor (50) when the needle holding member (84) reaches the displacement end point.

8. The sensor insertion device (10) according to claim 1, wherein the data process unit (12) is a transmitter (12).

## Patentansprüche

1. Sensoreinsetzvorrichtung (10) zum Einsetzen eines Erfassungselements (76) eines Sensors (50), der biologische Informationen eines Subjekts misst, in den Körper des Subjekts, wobei die Sensoreinsetzvorrichtung (10) umfasst:

einen Vorrichtungskörper (14), an dem eine Datenverarbeitungseinheit (12) befestigt ist, die ein Signal verarbeitet, das biologische Informationen beinhaltet, die durch das Erfassungselement (76) erfasst wurden;

einen Bewegungsmechanismus (16), der lösbar an dem Vorrichtungskörper (14) befestigt ist, wobei der Bewegungsmechanismus (16) das Erfassungselement (76) zusammen mit einer Einführungsnadel (46), die in den Körper des Probanden hineinzustecken ist, bewegt, um das Erfassungselement (76) und die Einführungsnadel (46) in den Körper des Probanden einzuführen;

ein Verschiebungs-Verhinderungselement, welches das Verschieben des Bewegungsmechanismus (16) in Richtung des Körpers des Subjekts verhindert;

wobei der Bewegungsmechanismus (16) umfasst

ein hohles Führungselement (82), das mit dem Vorrichtungskörper (14) in Eingriff bringbar ist,

ein Nadelhalteelement (84), das die Einführungsnadel (46) drückt, um sich innerhalb des Führungselements (82) zu bewegen,

ein Griffelement (86), das durch eine Bedienperson ergriffen wird,

ein Drückelement (88), das von dem Griffelement (86) gehalten und verschoben wird, um das Nadelhalteelement (84) zu drücken, das mit der Verschiebung des Griffelements (86) entlang des Führungselements (82) ineinandergreifend ist, was durch die Bedienperson hervorgerufen wird, und

ein elastisches Element (90), welches das Nadelhalteelement (84) in einer Richtung weg von dem Vorrichtungskörper (14) elastisch vorspannt; und

ein Verschiebungs-Verhinderungselement, welches das Verschieben des Bewegungsmechanismus (16) in Richtung des Körpers des Subjekts verhindert; wobei das Verschiebungs-Verhinderungselement das Griffelement (86) blockiert, wenn die Datenverarbeitungseinheit (12) nicht an dem Vorrichtungskörper (14) befestigt ist, und sich auf der

- anderen Seite unter einer Drückwirkung der Datenverarbeitungseinheit (12) bewegt, um die Blockade in Bezug auf das Griffelement (86) aufzuheben, wenn die Datenverarbeitungseinheit (12) an dem Vorrichtungskörper (14) befestigt ist,
- die Einführradel (46) in den Körper des Subjekts hineingesteckt wird, wenn das Drückelement (88) zusammen mit der Verschiebung des Griffelements (86), das von der Blockade durch das Verschiebungs-Verhinderungselement freigesetzt wird, in Richtung des Körpers des Subjekts verschoben wird und das Drückelement (88) das Nadelhalteelement (84) drückt, das Drückelement (88), das von dem Griffelement (86) gehalten bleibt, mit dem Führungselement (82) in Eingriff steht, wenn das Drückelement (88) einen Verschiebungsendpunkt erreicht, das Führungselement (82) durch das Griffelement (86) aus dem Eingriff mit dem Vorrichtungskörper (14) freigesetzt wird, wenn das Griffelement (86) und das Drückelement (88) den Verschiebungsendpunkt erreichen, und das Nadelhalteelement (84) durch eine Wirkung des elastischen Elements (90) in eine Richtung weg von dem Vorrichtungskörper (14) verschoben wird, wenn das Griffelement (86) und das Drückelement (88) den Verschiebungsendpunkt erreichen, sodass das Erfassungselement (76) durch den Eingriff zwischen dem Drückelement (88) und dem Führungselement (82), die Freisetzung des Eingriffs von dem Führungselement (82) mit dem Vorrichtungskörper (14) und die Verschiebung des Nadelhalteelements (84) in die Richtung weg von dem Vorrichtungskörper (14) in den Körper implantiert wird.
2. Sensoreinsetzvorrichtung (10) nach Anspruch 1, wobei das Verschiebungs-Verhinderungselement ein stabförmiges Element (106) ist, das an dem Führungselement (82) befestigt ist und direkt von der Datenverarbeitungseinheit (12) zum Drehen gedrückt wird.
3. Sensoreinsetzvorrichtung (210) nach Anspruch 1, wobei der Vorrichtungskörper (214) eine Grundplatte (20), ein an der Grundplatte (20) befestigtes Gehäuse (22) und ein an dem Gehäuse (22) befestigtes Deckelelement (224) zum Blockieren einer Öffnung des Gehäuses (22) beinhaltet, und das Verschiebungs-Verhinderungselement das Deckelelement (224) ist und sich mit der Verschiebung der Grundplatte (20) dreht, die von der Datenverarbeitungseinheit (12) gedrückt wird.
4. Sensoreinsetzvorrichtung (10) nach einem der Ansprüche 1 bis 3, wobei
- das Nadelhalteelement (84) ein langes Element ist und einen Schlitz (130) aufweist, der sich entlang der Längsrichtung des Nadelhalteelements (84) erstreckt,
- ein Anschlag (132) an dem Schlitz (130) angeordnet ist,
- das Drückelement (88) einen Eintrittsabschnitt (146) aufweist, der in den Schlitz (130) eintritt, und wenn der Eintrittsabschnitt (146) über den Anschlag (132) klettert und in den Schlitz (130) eintritt, das Nadelhalteelement (84) unter einer Wirkung des elastischen Elements (90) in die Richtung weg von dem Vorrichtungskörper (14) verschoben wird.
5. Sensoreinsetzvorrichtung (10) nach Anspruch 1, wobei ein Eingriffsabschnitt (100) des Führungselements (82), der mit dem Vorrichtungskörper (14) in Eingriff zu bringen ist, an der Spitze eines Spreizabschnitts (98) ausgebildet ist, welcher sich von dem Führungselement (82) nach außen spreizt, und der Spreizabschnitt (98) durch eine Innenwand des Griffelements (86) gedrückt wird, wenn das Griffelement (86) in Richtung des Vorrichtungskörpers (14) verschoben und in eine Richtung weg von dem Vorrichtungskörper (14) verschoben wird.
6. Sensoreinsetzvorrichtung (10) nach Anspruch 1, wobei innerhalb des Führungselements (82) eine Haltewand (94) zum Halten des elastischen Elements (90) ausgebildet ist.
7. Sensoreinsetzvorrichtung (10) nach Anspruch 1, wobei der Vorrichtungskörper (14) einen Fangabschnitt (54) aufweist, der den Sensor (50) einfängt, wenn das Nadelhalteelement (84) den Verschiebungsendpunkt erreicht.
8. Sensoreinsetzvorrichtung (10) nach Anspruch 1, wobei die Datenverarbeitungseinheit (12) ein Sender (12) ist.

## Revendications

1. Dispositif d'insertion de capteur (10) destiné à insérer un élément de détection (76) d'un capteur (50), mesurant des informations biologiques d'un sujet, dans le corps du sujet, le dispositif d'insertion de capteur (10) comprenant :

un corps de dispositif (14) auquel est fixée une unité de traitement de données (12) qui traite un signal comportant des informations biologiques détectées par l'élément de détection (76) ;  
un mécanisme de mouvement (16) qui est fixé de manière amovible au corps de dispositif (14), le mécanisme de mouvement (16) déplaçant

l'élément de détection (76) conjointement avec une aiguille d'insertion (46) devant être enfoncée dans le corps du sujet, aux fins d'insérer l'élément de détection (76) et l'aiguille d'insertion (46) dans le corps du sujet ;  
un élément d'empêchement de déplacement qui empêche le déplacement du mécanisme de mouvement (16) en direction du corps du sujet ;  
le mécanisme de mouvement (16) comportant :

un élément de guidage (82) creux, pouvant être amené en prise avec le corps de dispositif (14),  
un élément de support d'aiguille (84) poussant l'aiguille d'insertion (46) pour qu'elle entre dans l'élément de guidage (82),  
un élément de préhension (86) saisi par un opérateur,  
un élément de poussée (88) tenu par l'élément de préhension (86) et déplacé pour pousser l'élément de support d'aiguille (84) en interaction avec le déplacement de l'élément de préhension (86), le long de l'élément de guidage (82), effectué par l'opérateur, et  
un élément souple (90) sollicitant de façon élastique l'élément de support d'aiguille (84) dans une direction opposée au corps de dispositif (14) ; et

un élément d'empêchement de déplacement qui empêche le déplacement du mécanisme de mouvement (16) en direction du corps du sujet ;  
dans lequel  
l'élément d'empêchement de déplacement bloque l'élément de préhension (86) lorsque l'unité de traitement de données (12) n'est pas fixée au corps de dispositif (14) et, d'un autre côté, se déplace sous l'action de poussée de l'unité de traitement de données (12), pour libérer le blocage par rapport à l'élément de préhension (86), lorsque l'unité de traitement de données (12) est fixée au corps de dispositif (14),  
l'aiguille d'insertion (46) est enfoncée dans le corps du sujet lorsque l'élément de poussée (88) est déplacé en même temps que l'élément de préhension (86), libéré du blocage par l'élément d'empêchement de blocage, en direction du corps du sujet, et l'élément de poussée (88) pousse l'élément de support d'aiguille (84),  
l'élément de poussée (88), qui reste maintenu par l'élément de préhension (86), est amené en prise avec l'élément de guidage (82), lorsque l'élément de poussée (88) atteint un point final de déplacement,  
l'élément de guidage (82) est libéré de sa prise avec le corps de dispositif (14) par l'élément de préhension (86), lorsque l'élément de préhen-

sion (86) et l'élément de poussée (88) atteignent le point final de déplacement, et  
l'élément de support d'aiguille (84) est déplacé dans une direction opposée au corps de dispositif (14) par une action de l'élément souple (90), lorsque l'élément de préhension (86) et l'élément de poussée (88) atteignent le point final de déplacement, de sorte que  
l'élément de détection (76) est mis en place dans le corps, du fait de la prise entre l'élément de poussée (88) et l'élément de guidage (82), de la libération de la prise entre l'élément de guidage (82) et le corps de dispositif (14), et du déplacement de l'élément de support d'aiguille (84) dans la direction opposée au corps de dispositif (14).

2. Dispositif d'insertion de capteur (10) selon la revendication 1, dans lequel l'élément d'empêchement de déplacement est un élément en forme de tige (106) qui est fixé à l'élément de guidage (82) et est poussé directement par l'unité de traitement de données (12) pour tourner.
3. Dispositif d'insertion de capteur (210) selon la revendication 1, dans lequel le corps de dispositif (214) comprend une plaque de base (20), un boîtier (22) fixé à la plaque de base (20), et un élément formant couvercle (224) fixé au boîtier (22) pour bloquer l'ouverture du boîtier (22), et  
l'élément d'empêchement de déplacement est l'élément formant couvercle (224) et tourne conjointement avec le déplacement de la plaque de base (20), en étant poussé par l'unité de traitement de données (12).
4. Dispositif d'insertion de capteur (10) selon l'une quelconque des revendications 1 à 3, dans lequel l'élément de support d'aiguille (84) est un élément allongé et présente une fente (130) qui s'étend dans le sens longitudinal de l'élément de support d'aiguille (84),  
une butée (132) est disposée sur la fente (130), l'élément de poussée (88) présente une partie d'entrée (146) qui pénètre dans la fente (130), et lorsque la partie d'entrée (146) passe sur la butée (132) et entre dans la fente (130), l'élément de support d'aiguille (84) est déplacé dans la direction opposée au corps de dispositif (14), sous l'action de l'élément souple (90).
5. Dispositif d'insertion de capteur (10) selon la revendication 1, dans lequel  
une partie d'accouplement (100) de l'élément de guidage (82), destinée à être amenée en prise avec le corps de dispositif (14), est formée à l'extrémité d'une partie d'expansion (98) qui s'étend vers l'extérieur à partir de l'élément de guidage (82) ; et

la partie d'expansion (98) est poussée par une paroi intérieure de l'élément de préhension (86), lorsque l'élément de préhension (86) est déplacé en direction du corps de dispositif (14), et est déplacée dans une direction opposée au corps de dispositif (14).

5

6. Dispositif d'insertion de capteur (10) selon la revendication 1, dans lequel une paroi de support (94), destinée à tenir l'élément souple (90), est formée à l'intérieur de l'élément de guidage (82).

10

7. Dispositif d'insertion de capteur (10) selon la revendication 1, dans lequel le corps de dispositif (14) comprend une partie d'arrêt (54) qui arrête le capteur (50) lorsque l'élément de support d'aiguille (84) atteint le point final de déplacement.

15

8. Dispositif d'insertion de capteur (10) selon la revendication 1, dans lequel l'unité de traitement de données (12) est un transmetteur (12).

20

25

30


35


40

45

50

55

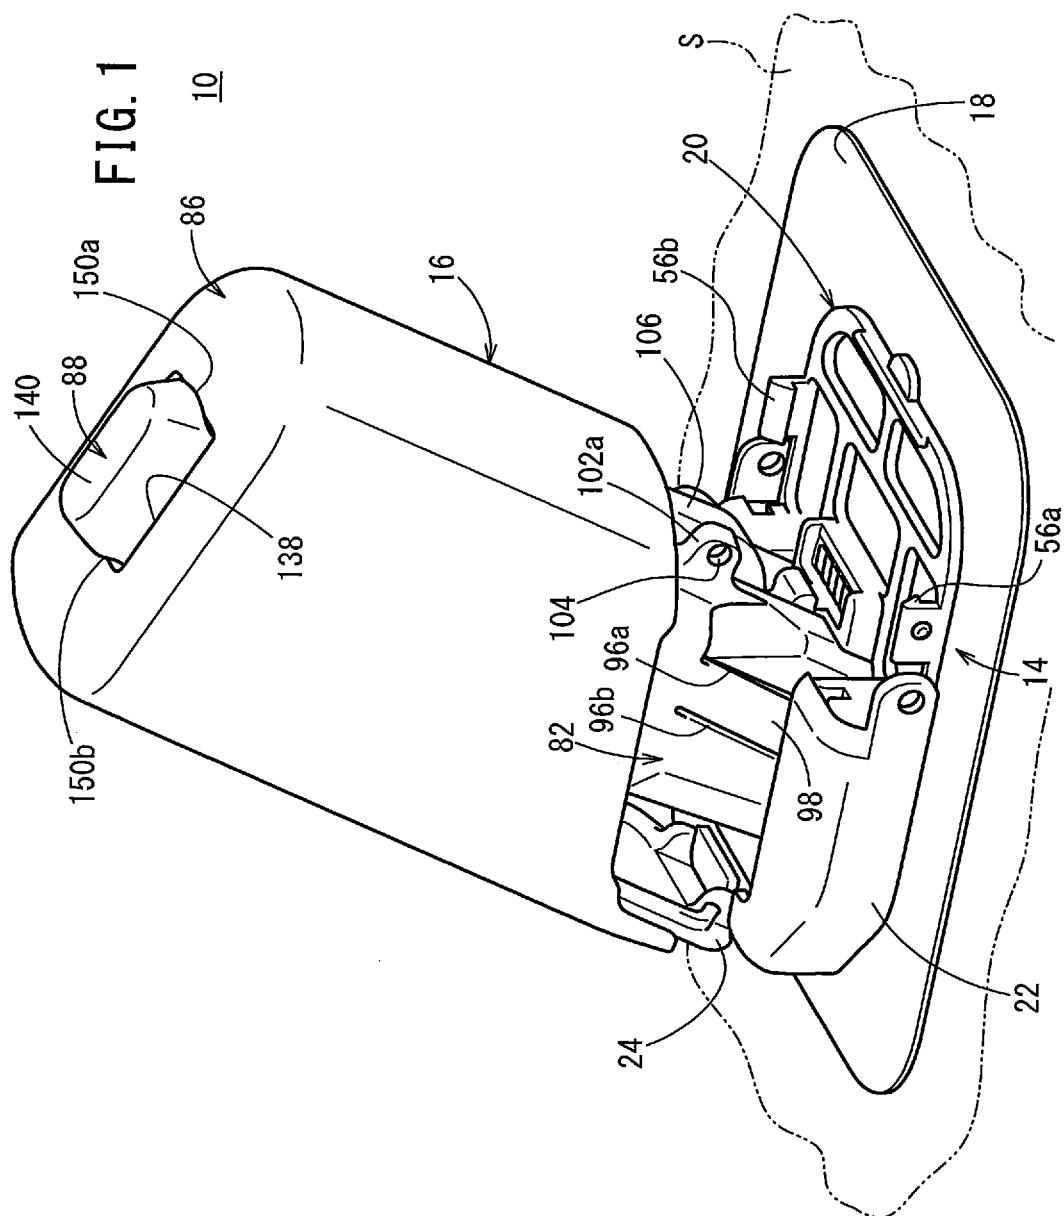

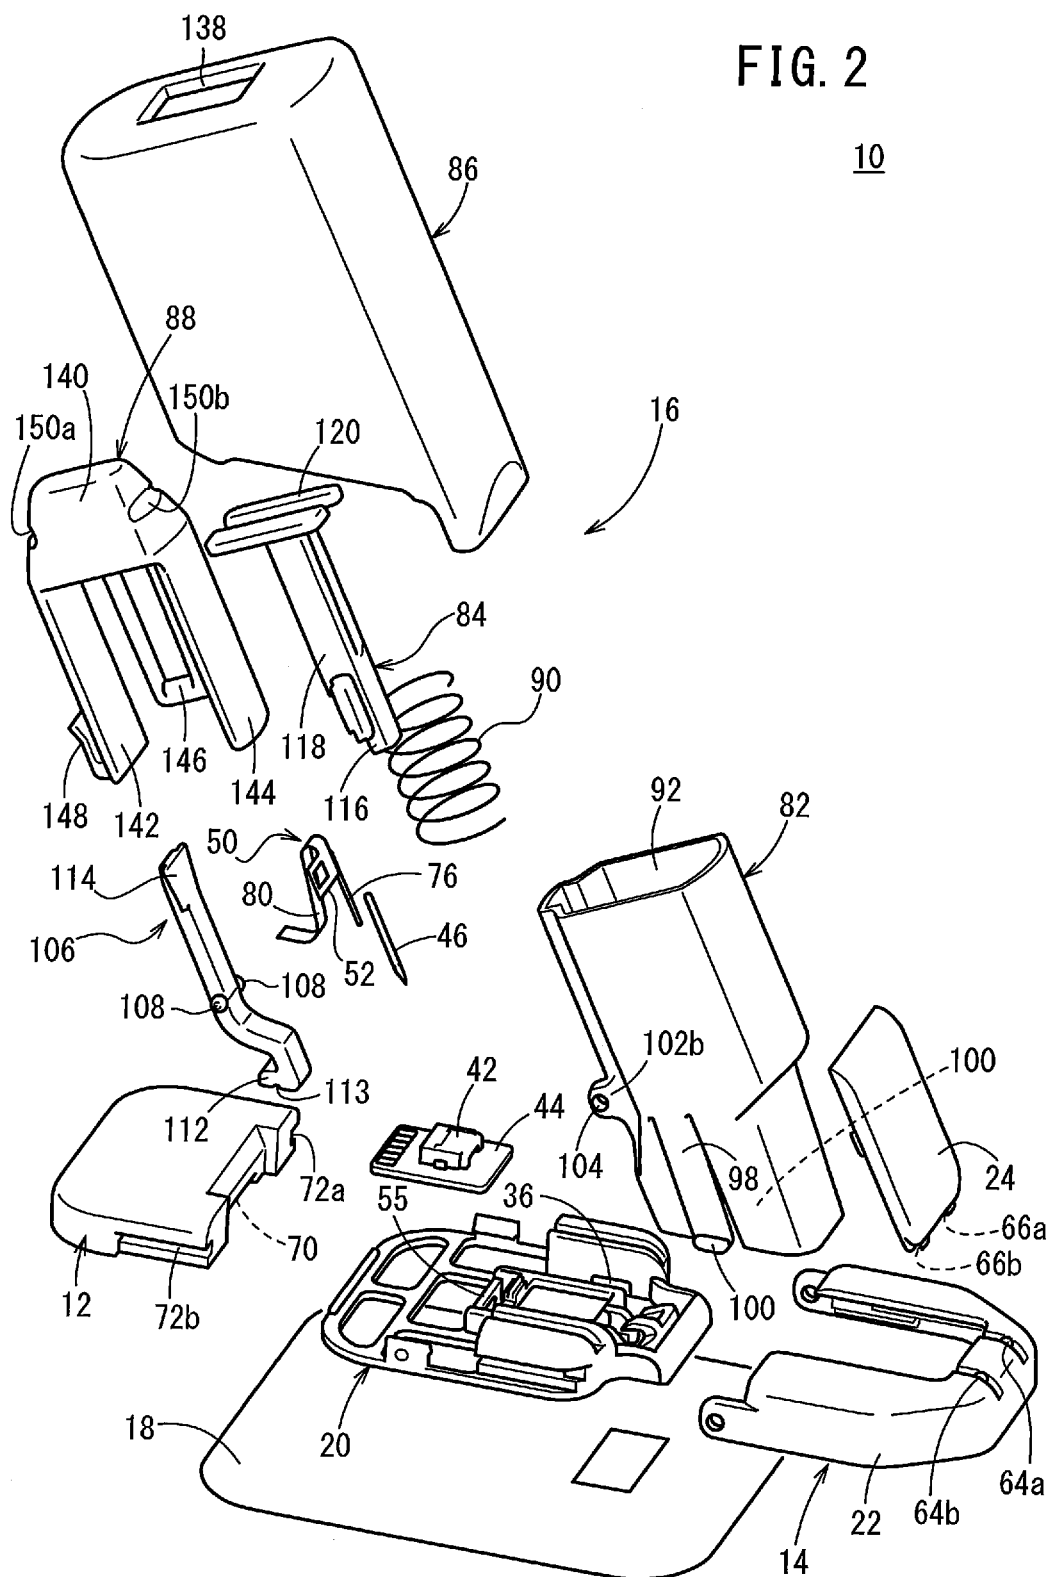

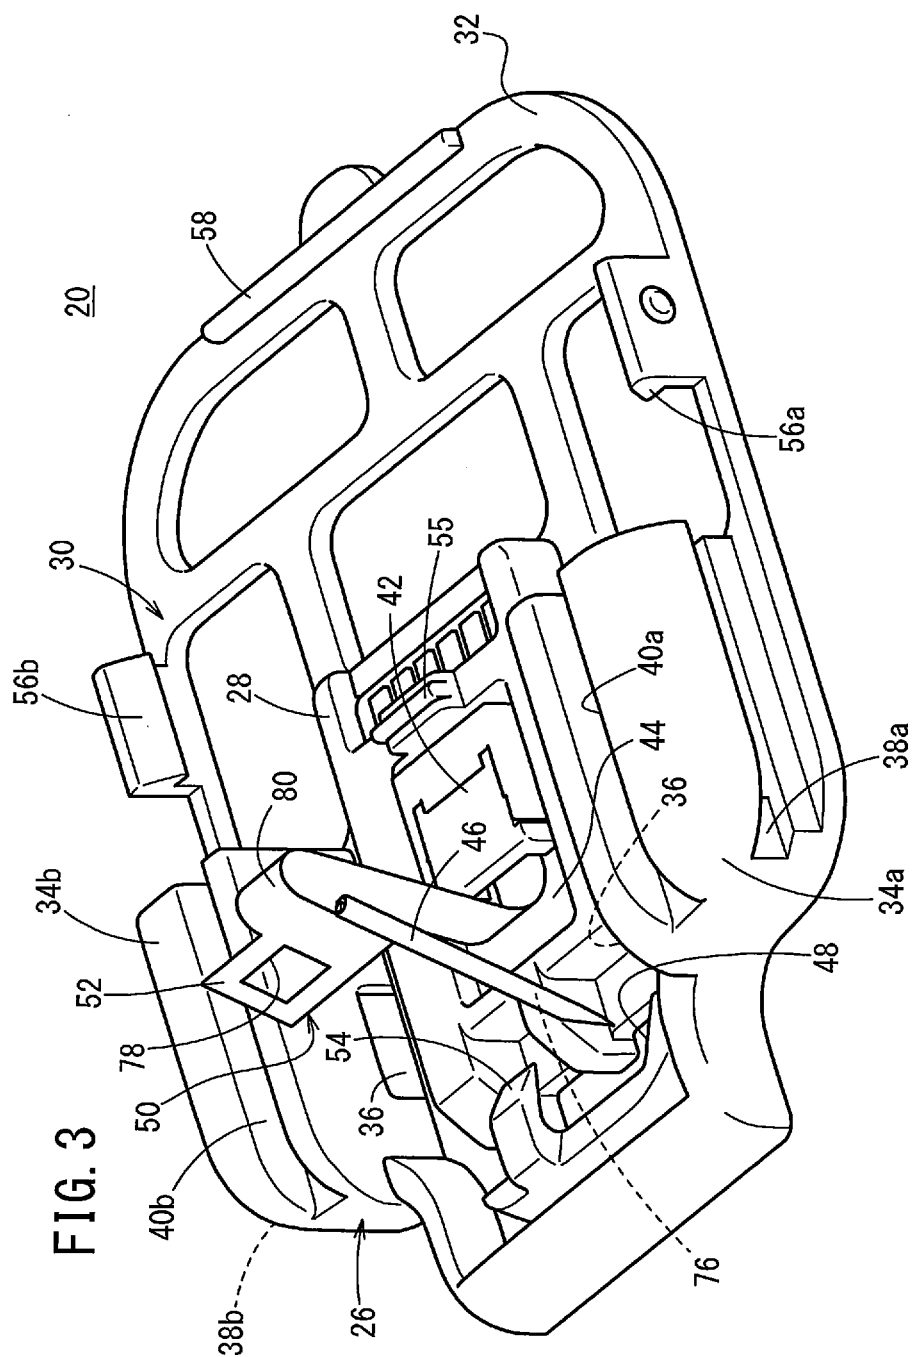


FIG. 4

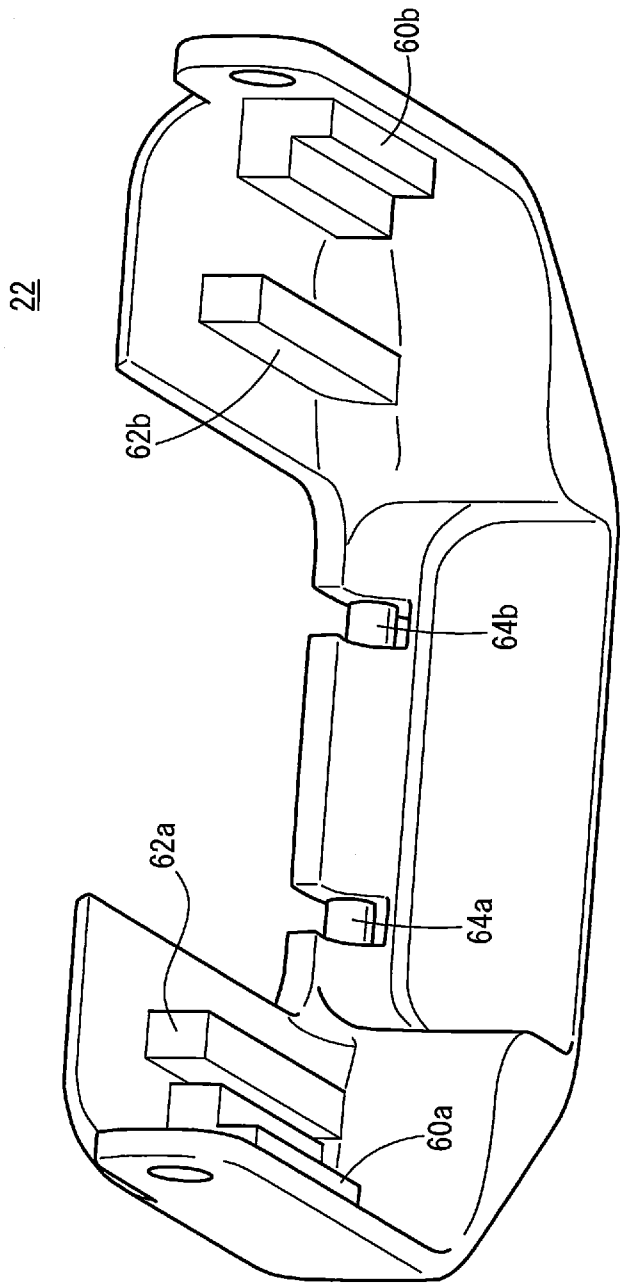
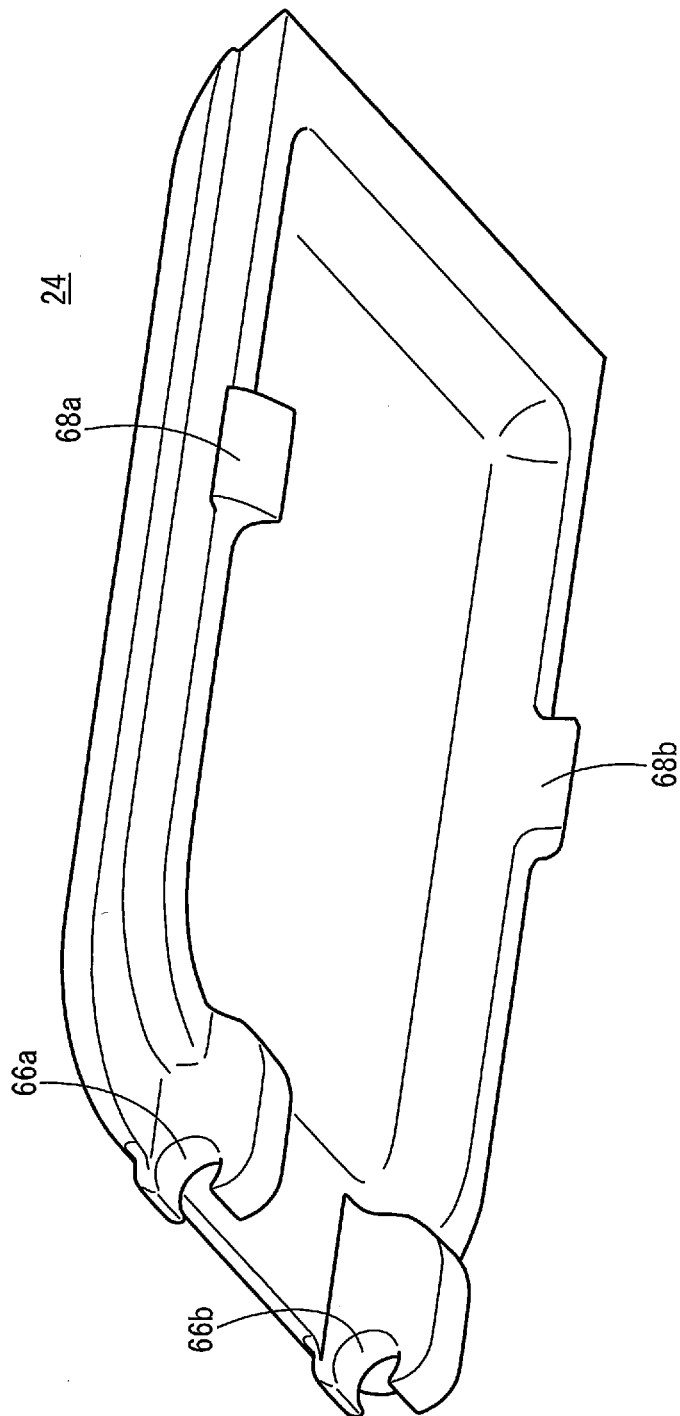


FIG. 5



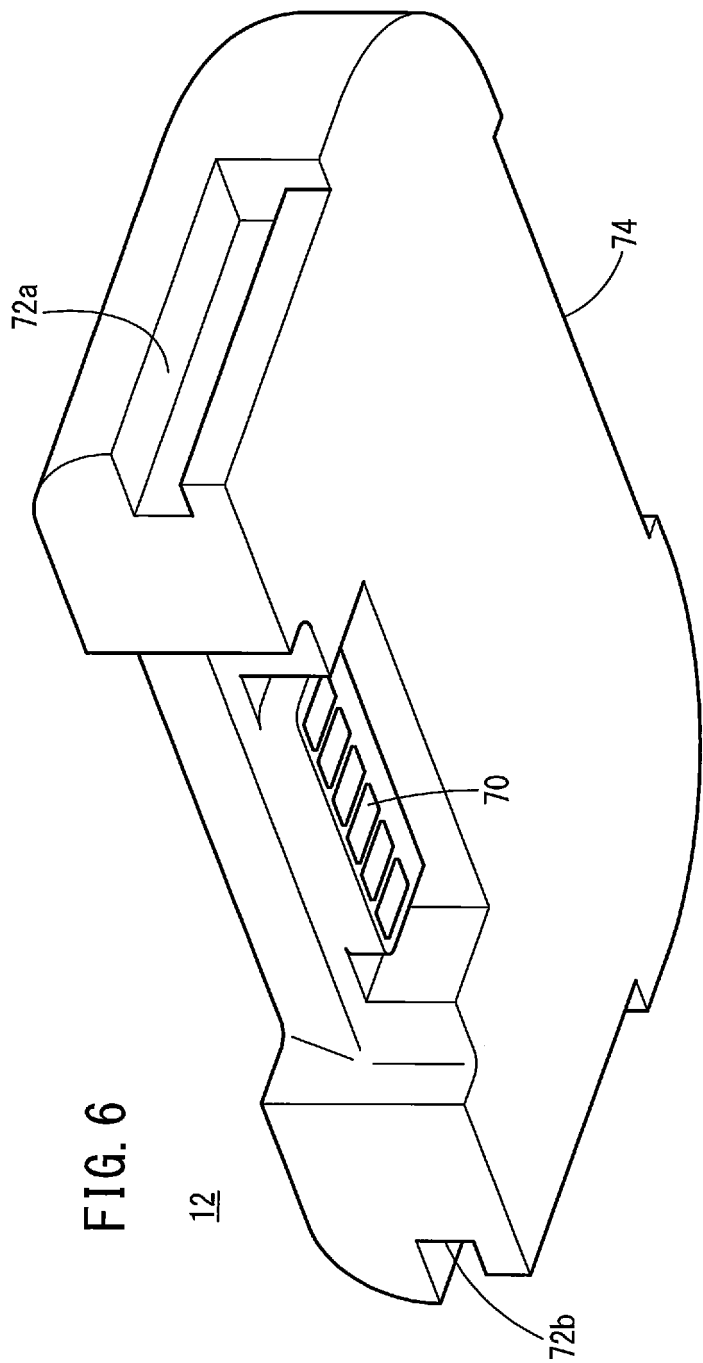


FIG. 6

12

FIG. 7

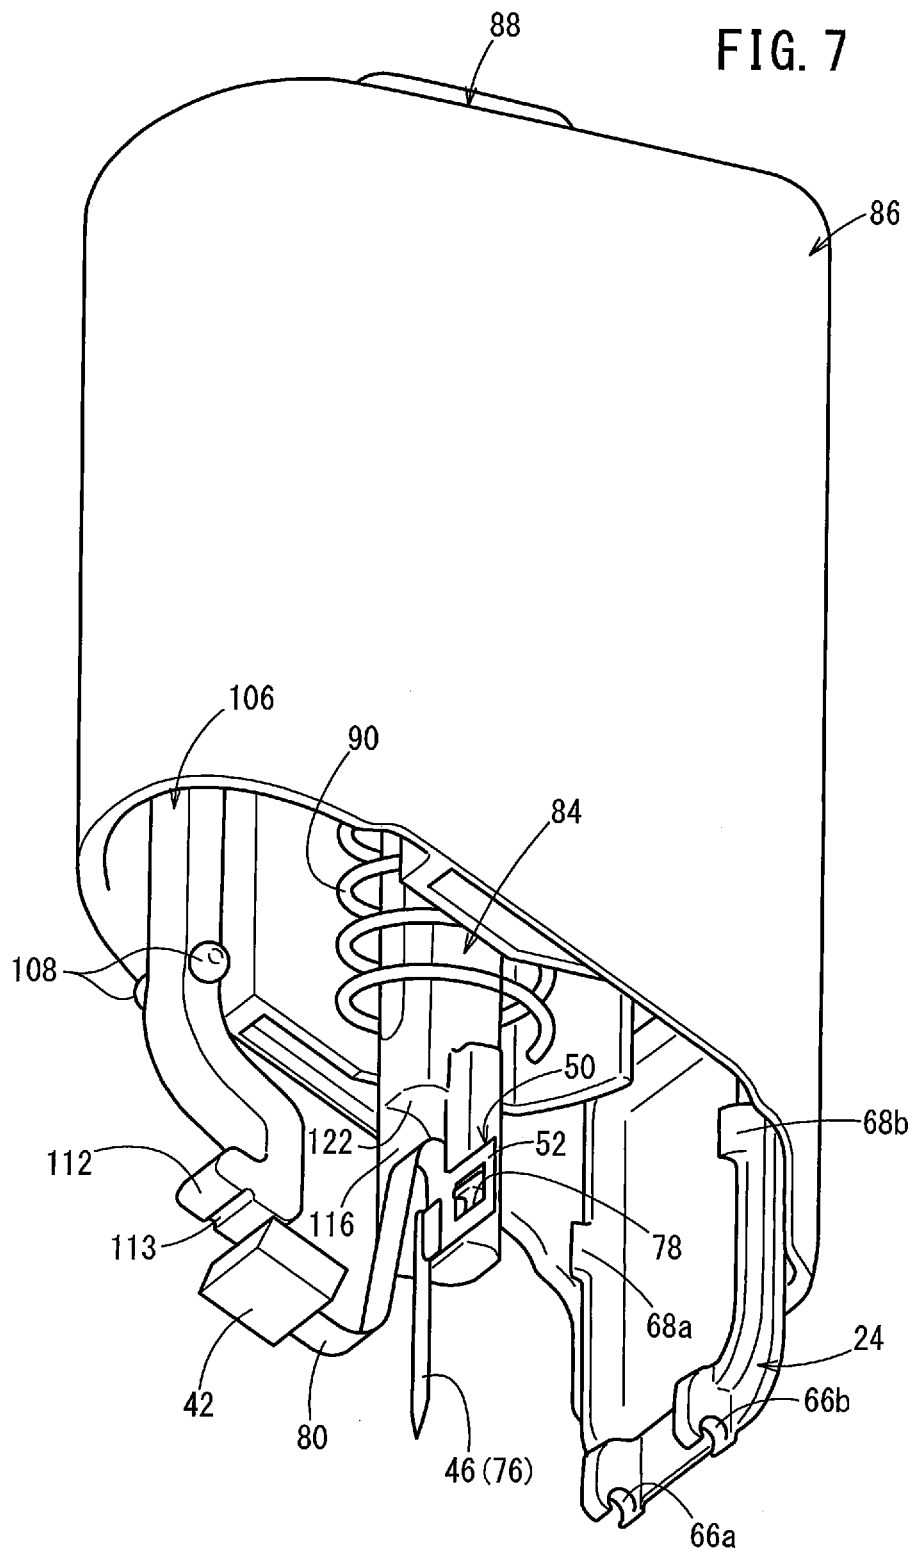


FIG. 8

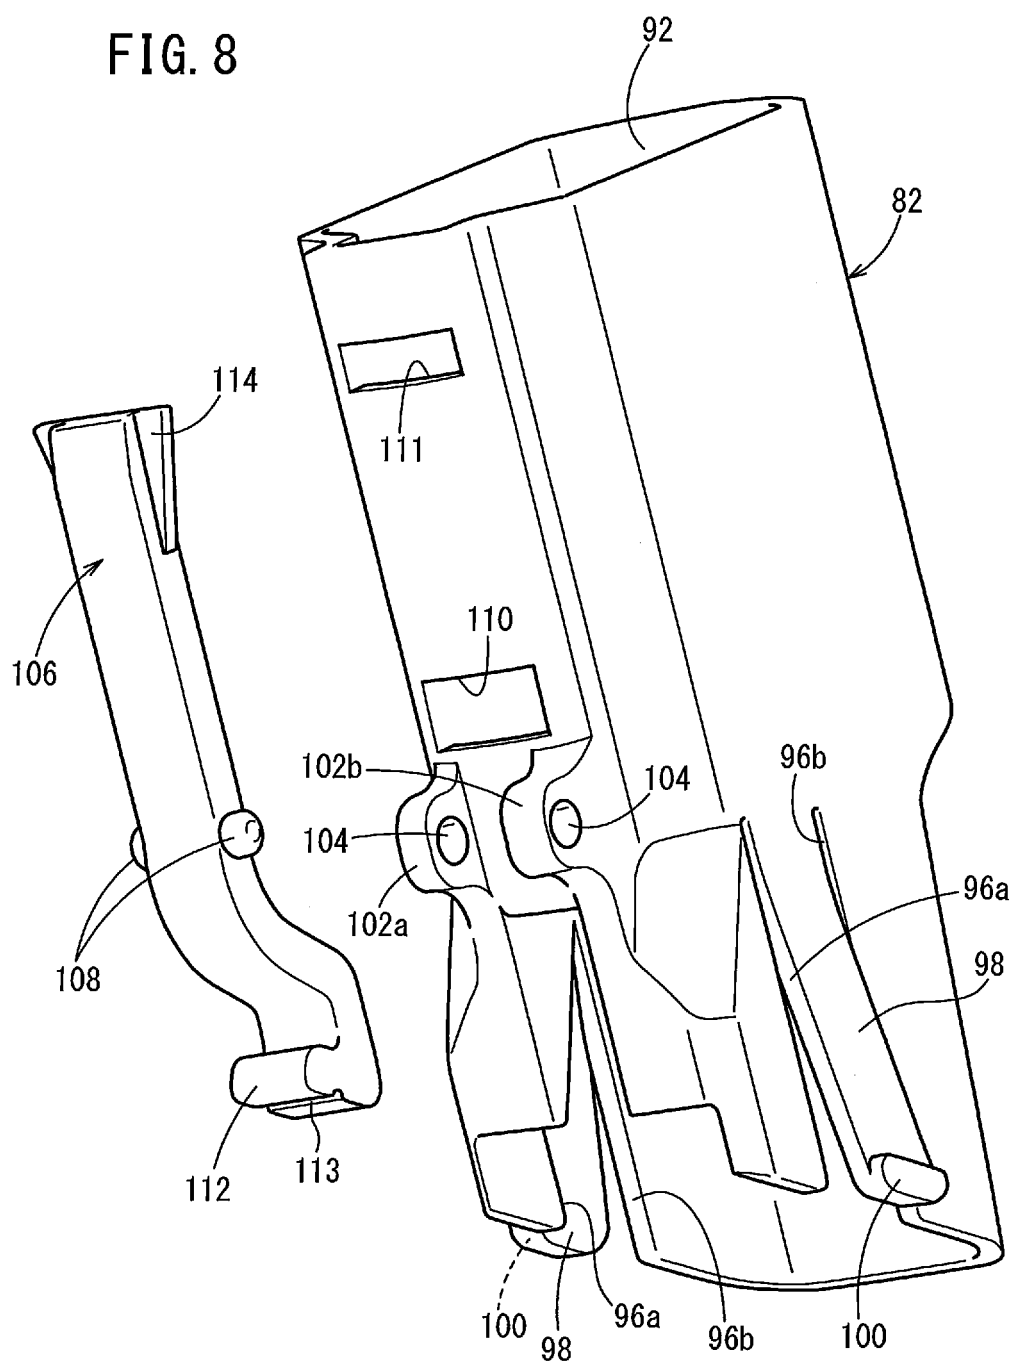


FIG. 9

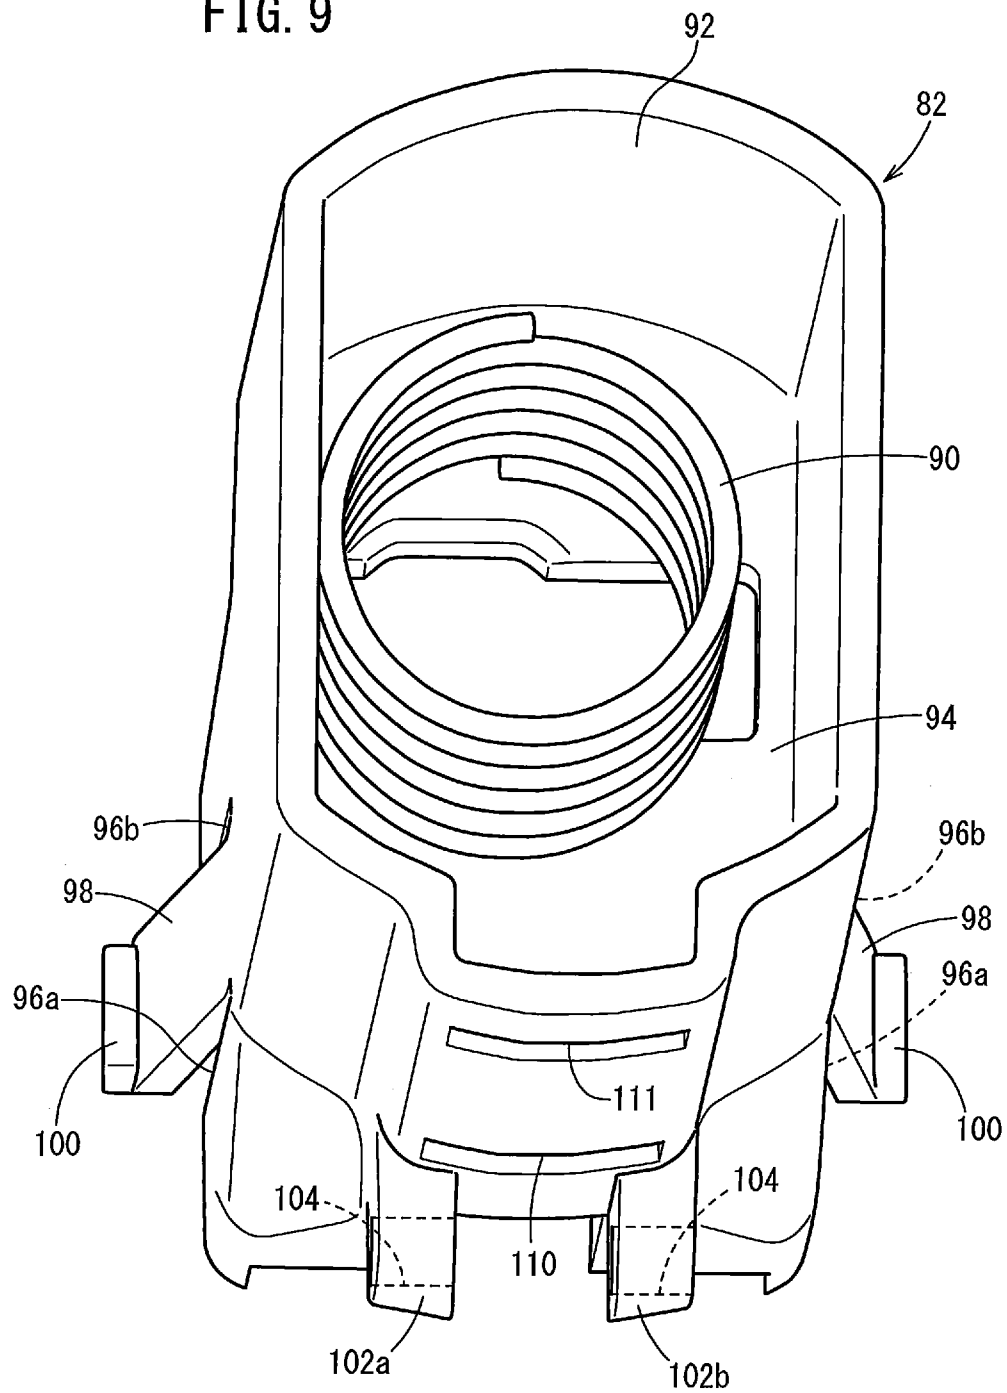


FIG. 10

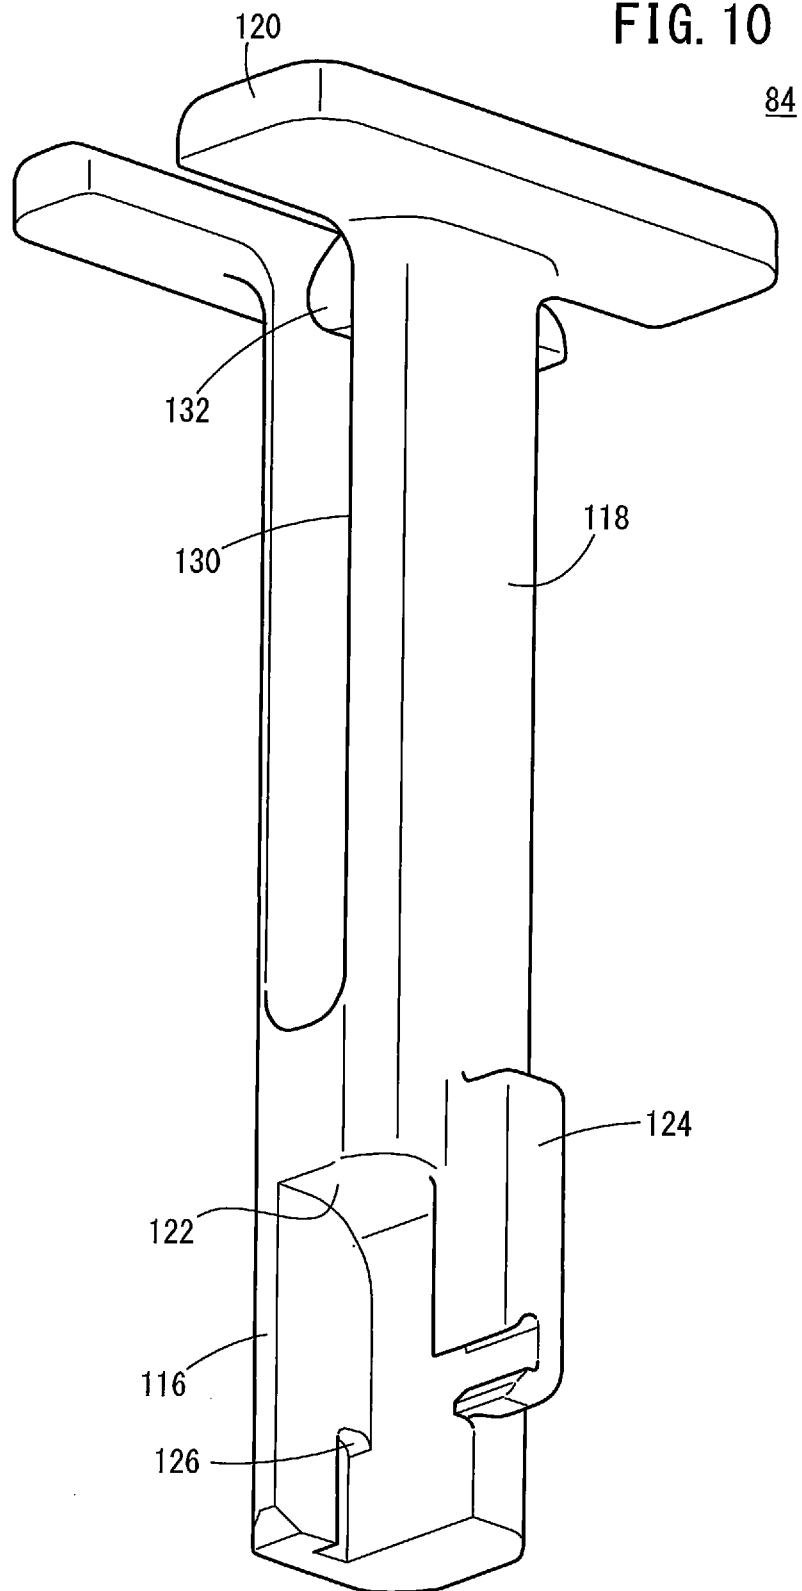


FIG. 11

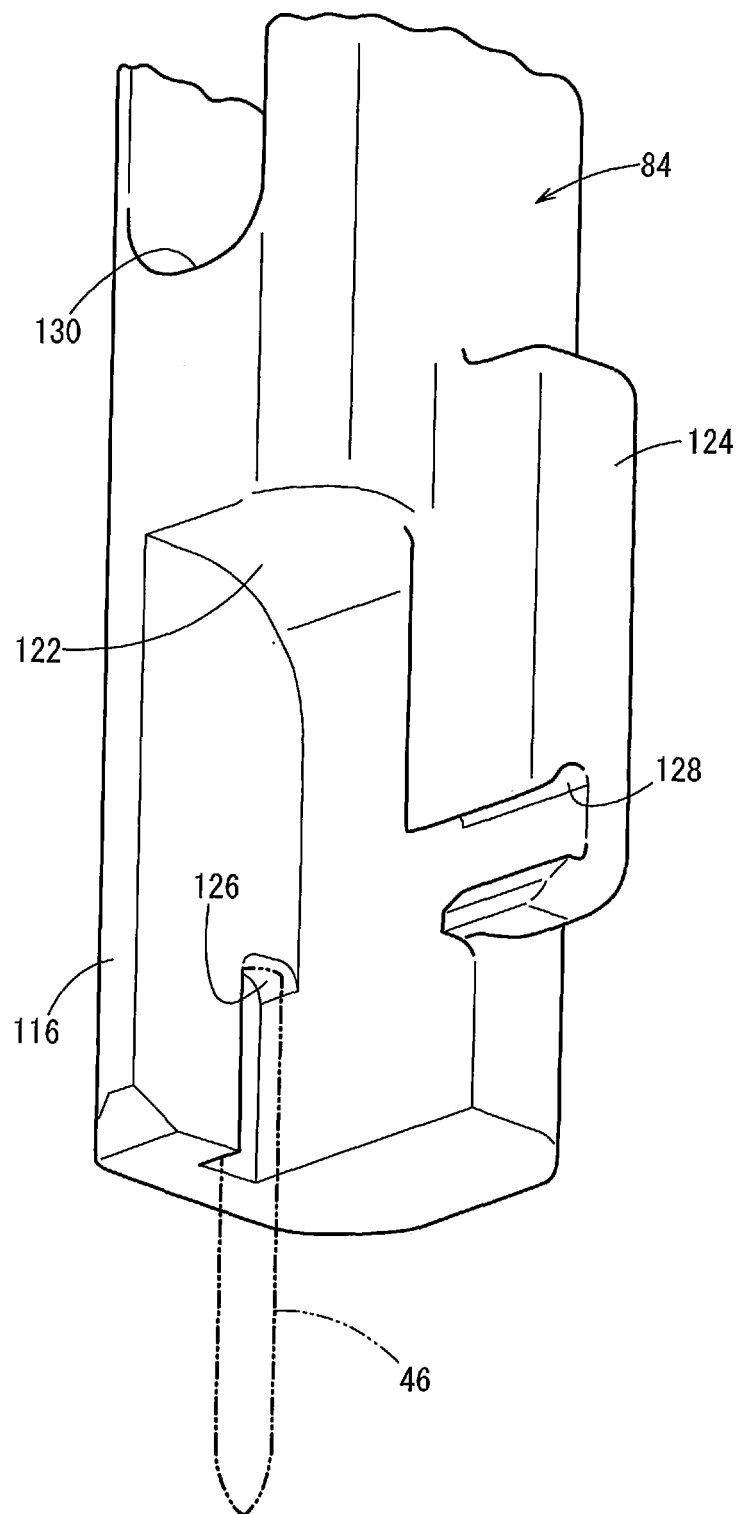
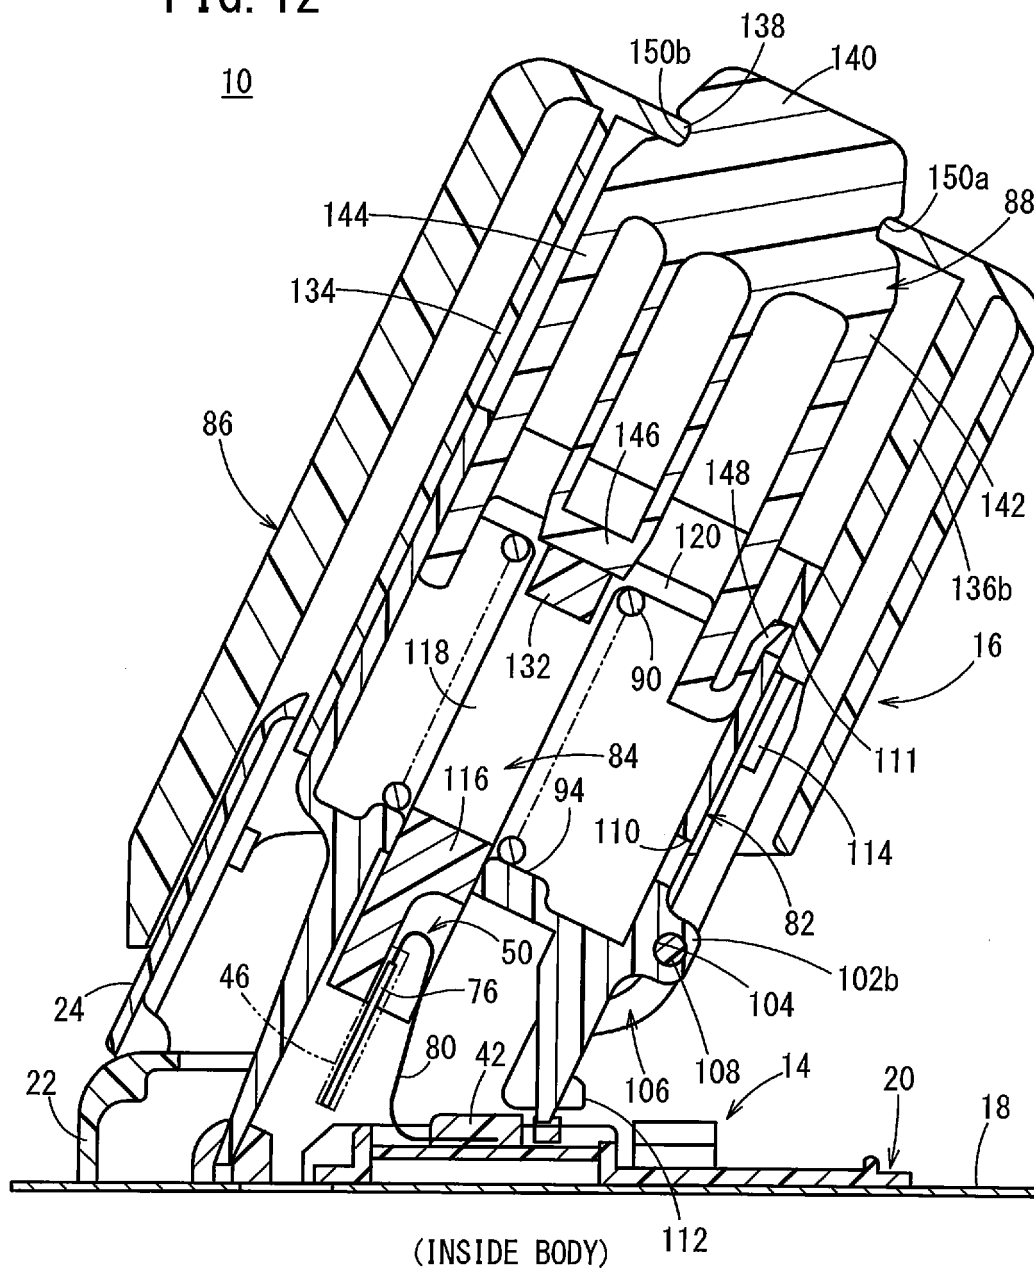


FIG. 12



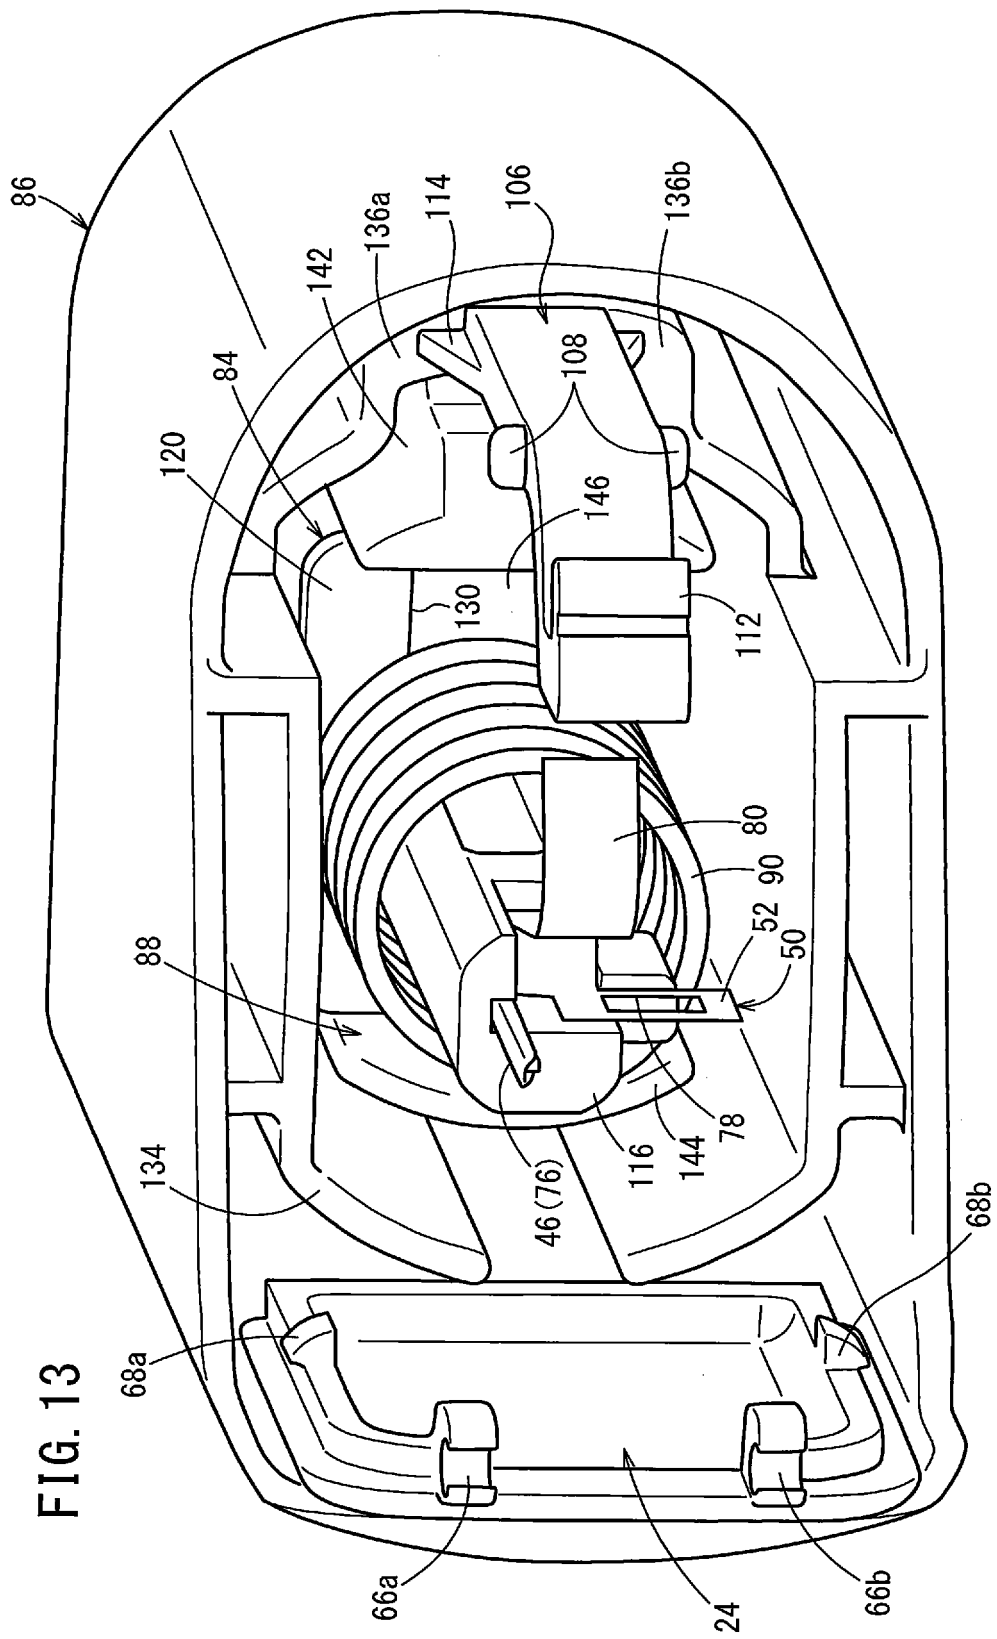
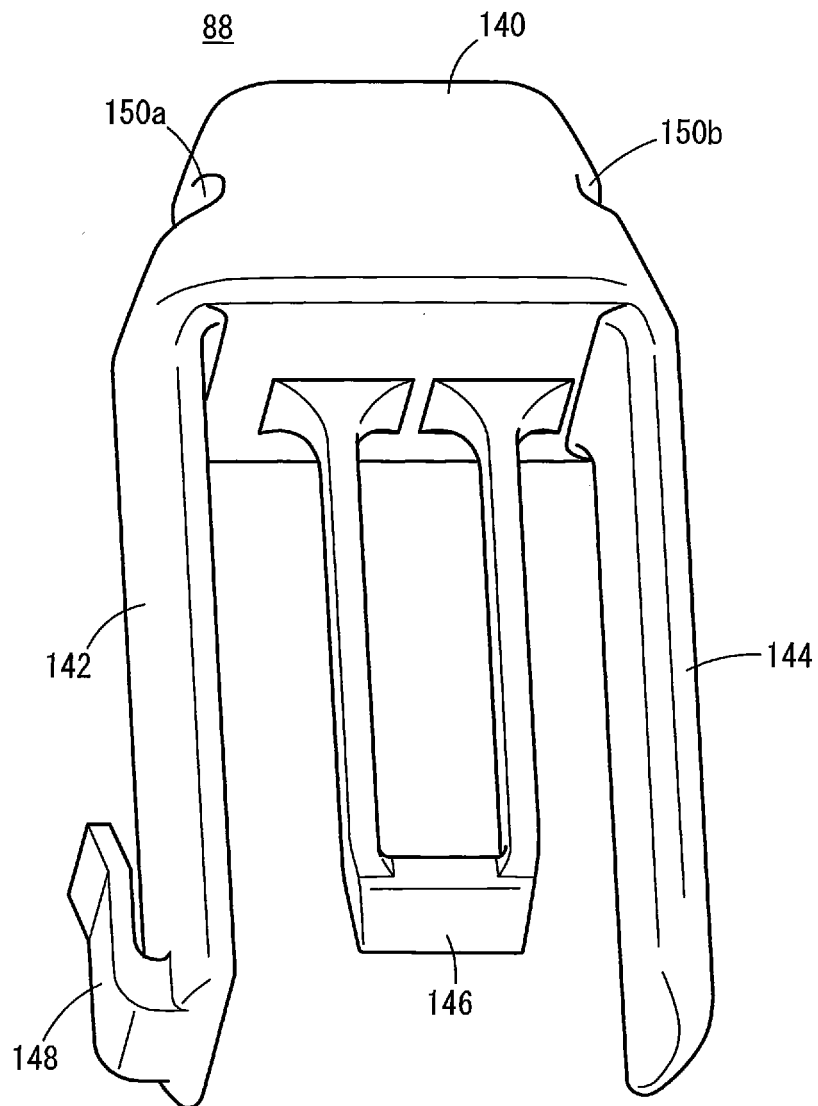


FIG. 14



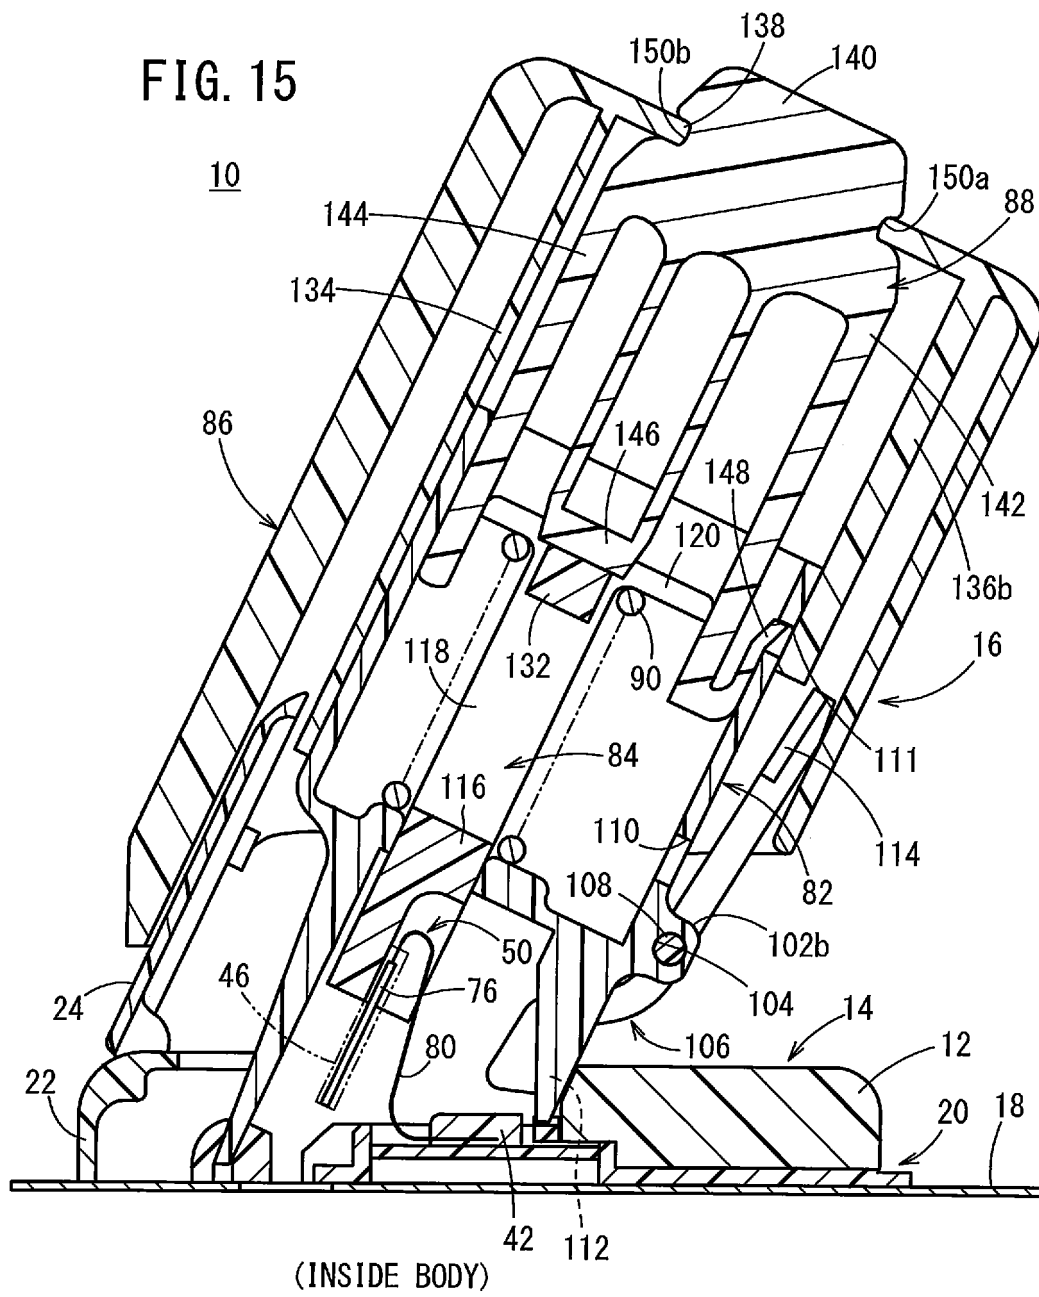
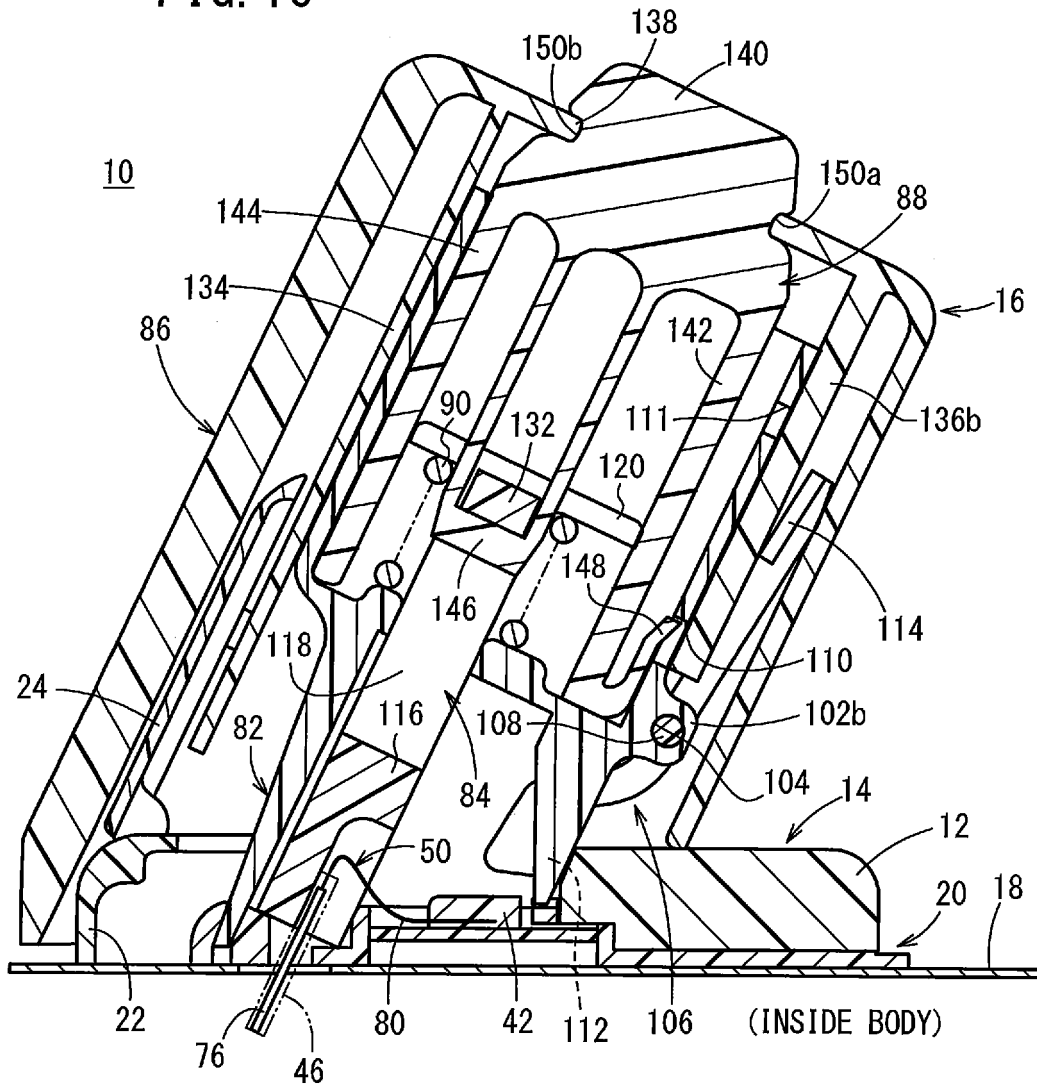


FIG. 16



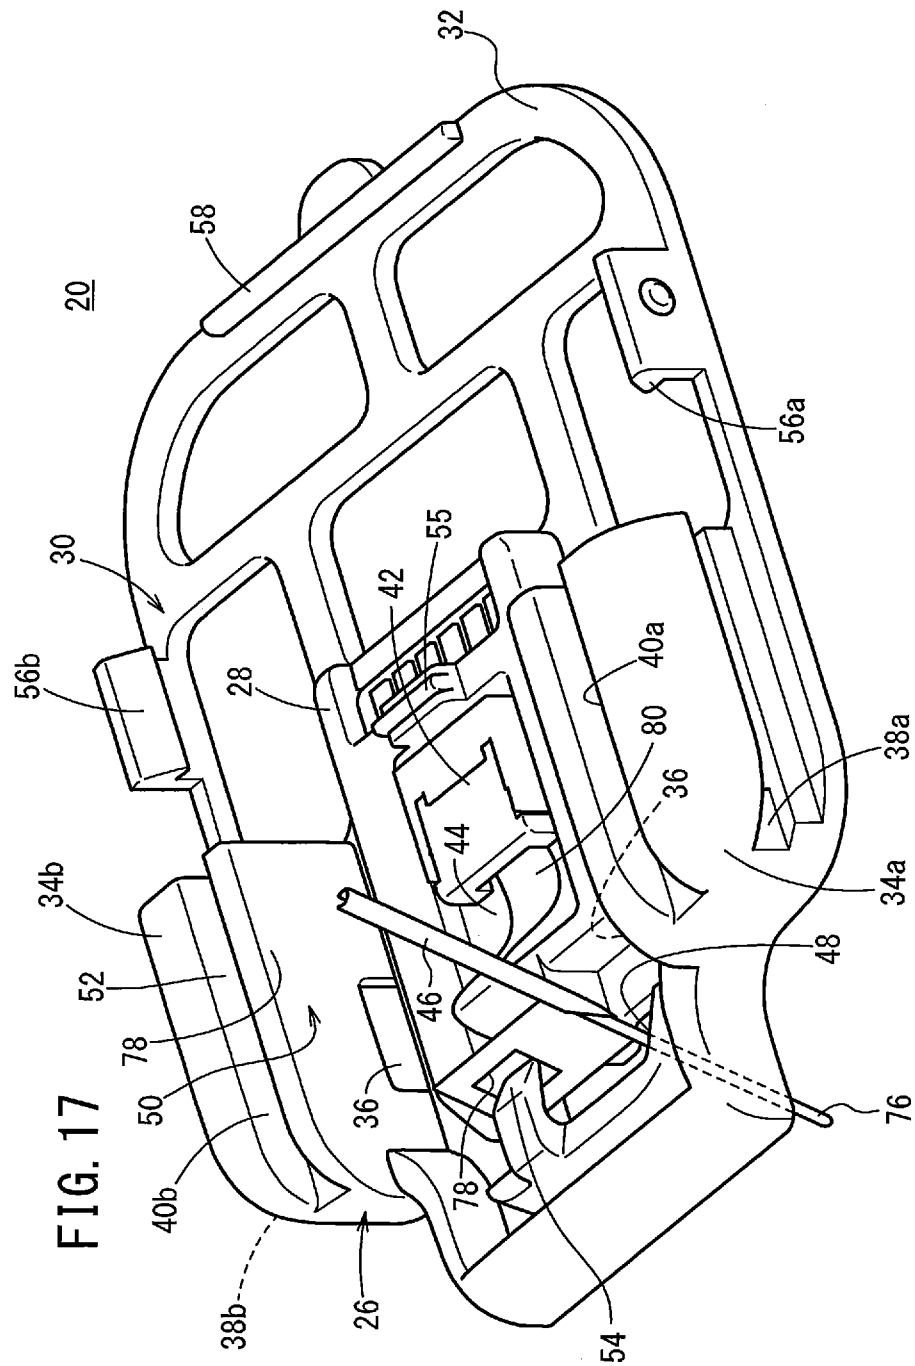


FIG. 18

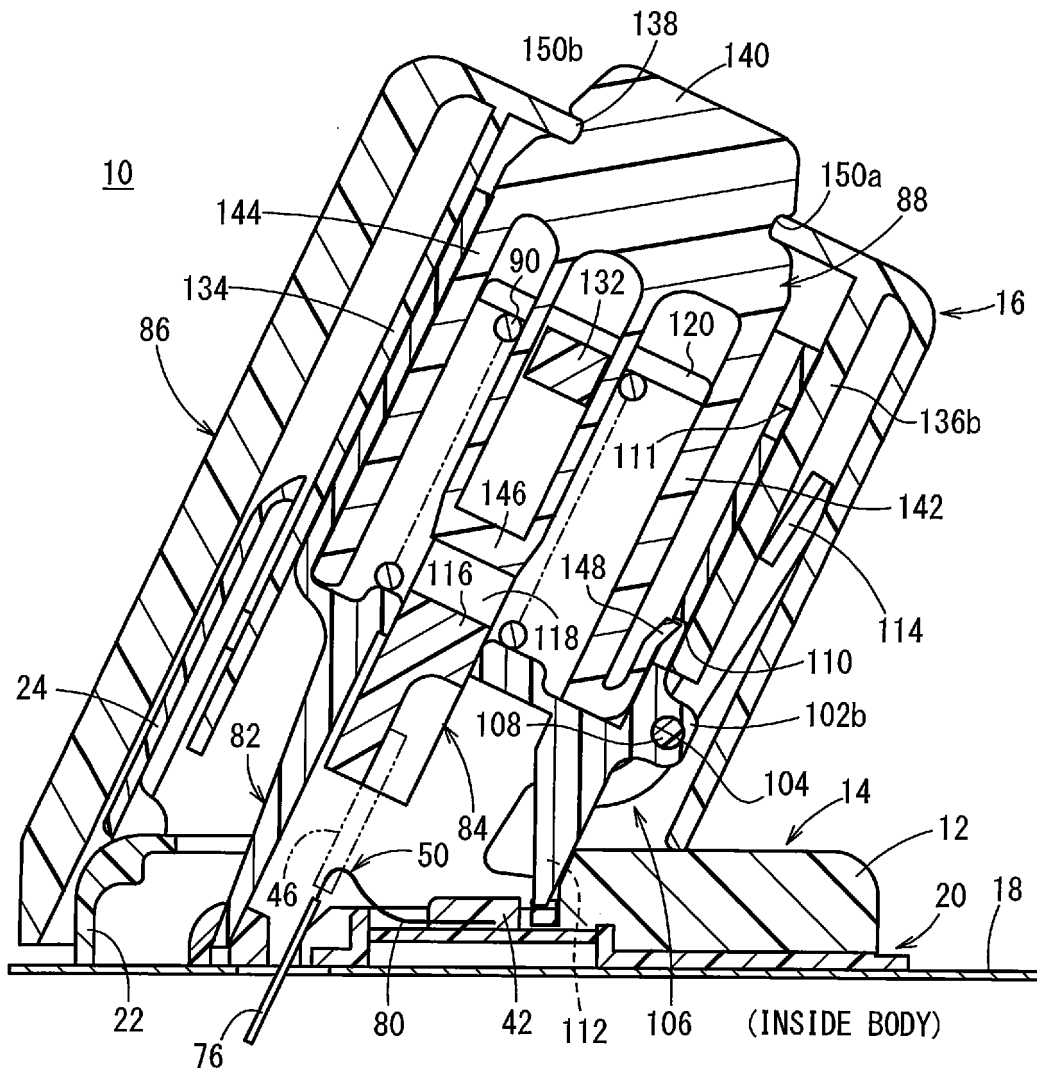


FIG. 19

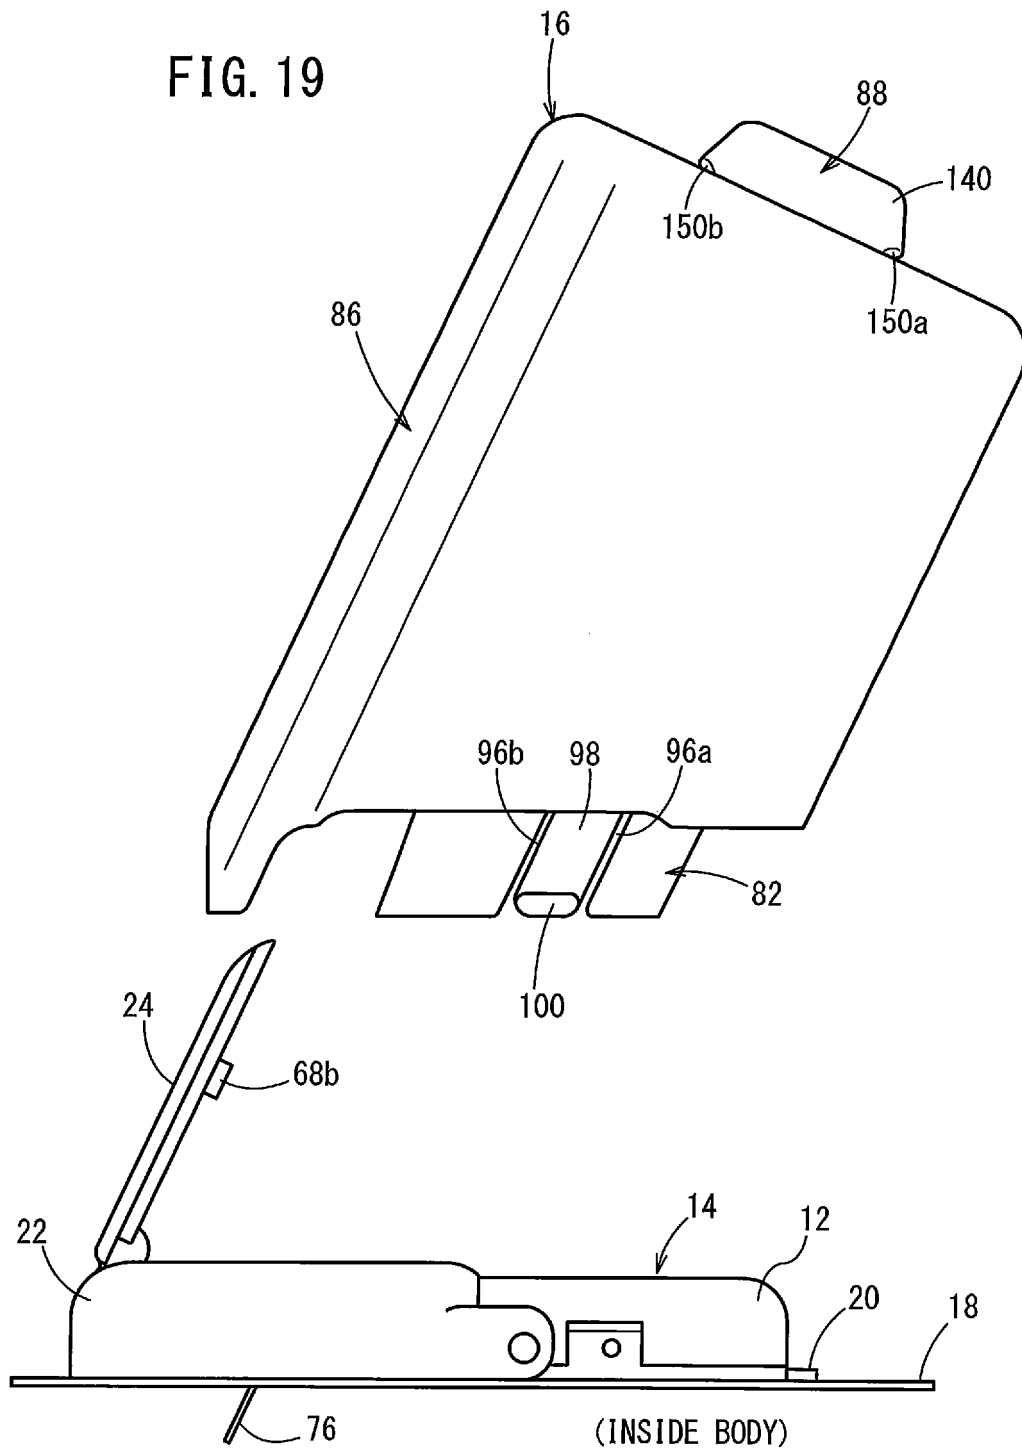


FIG. 20

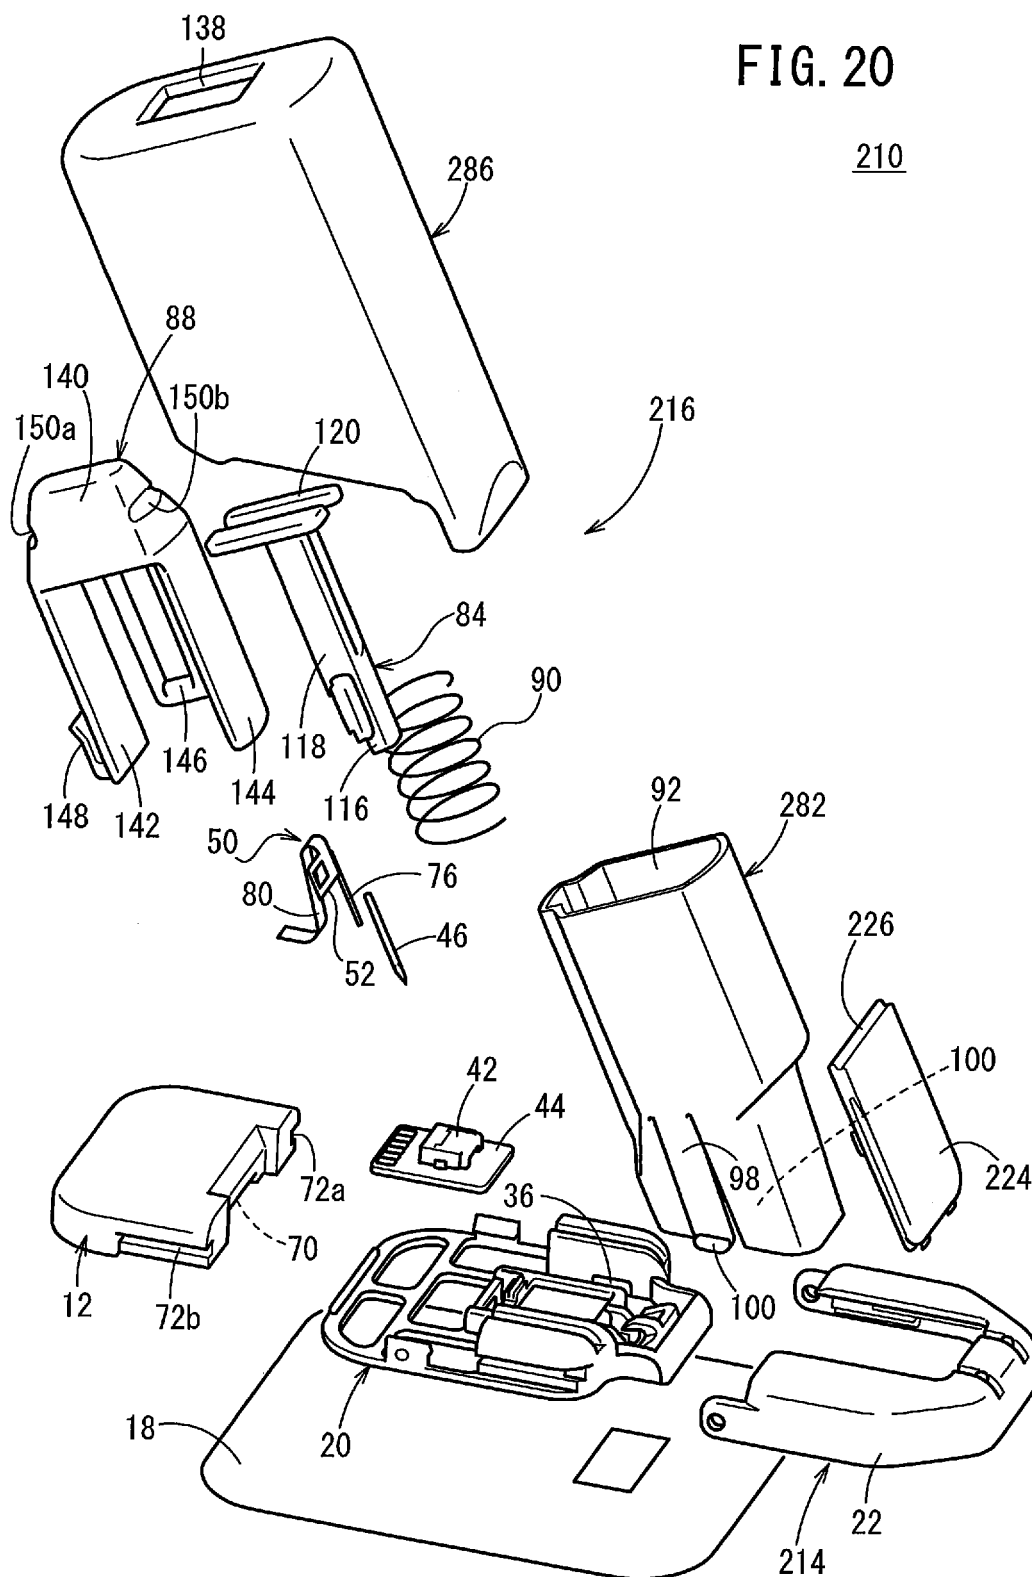


FIG. 21

224

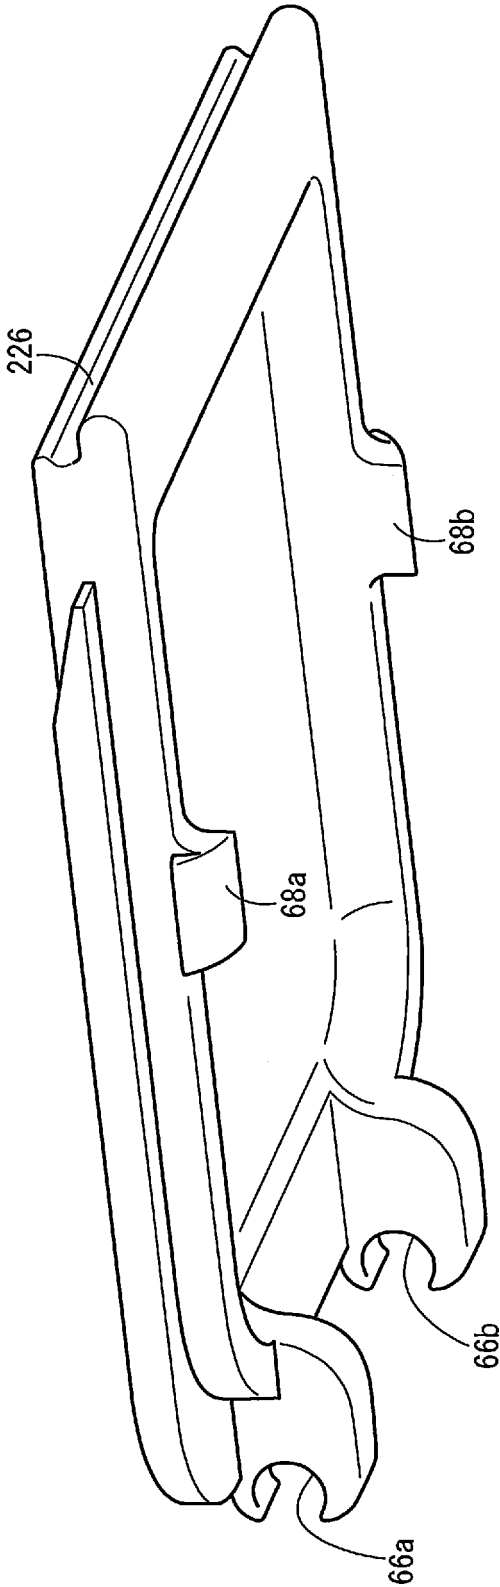


FIG. 22



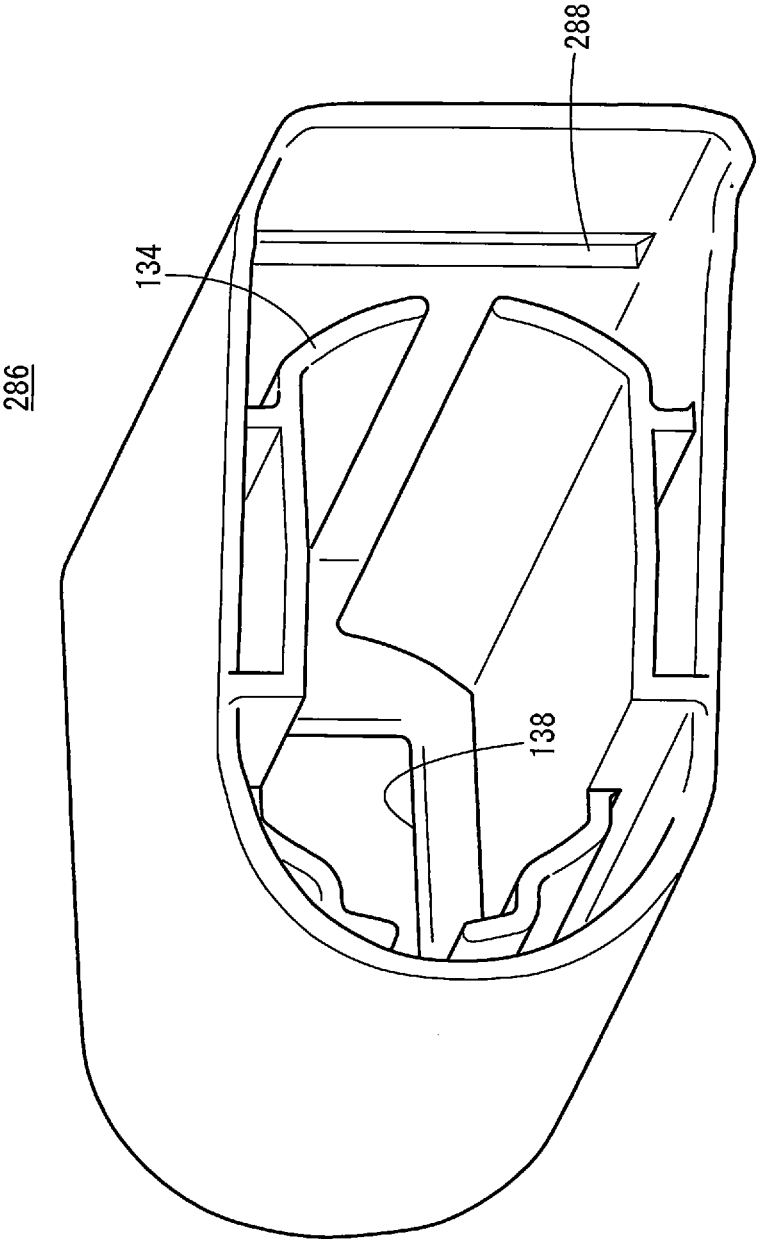


FIG. 23

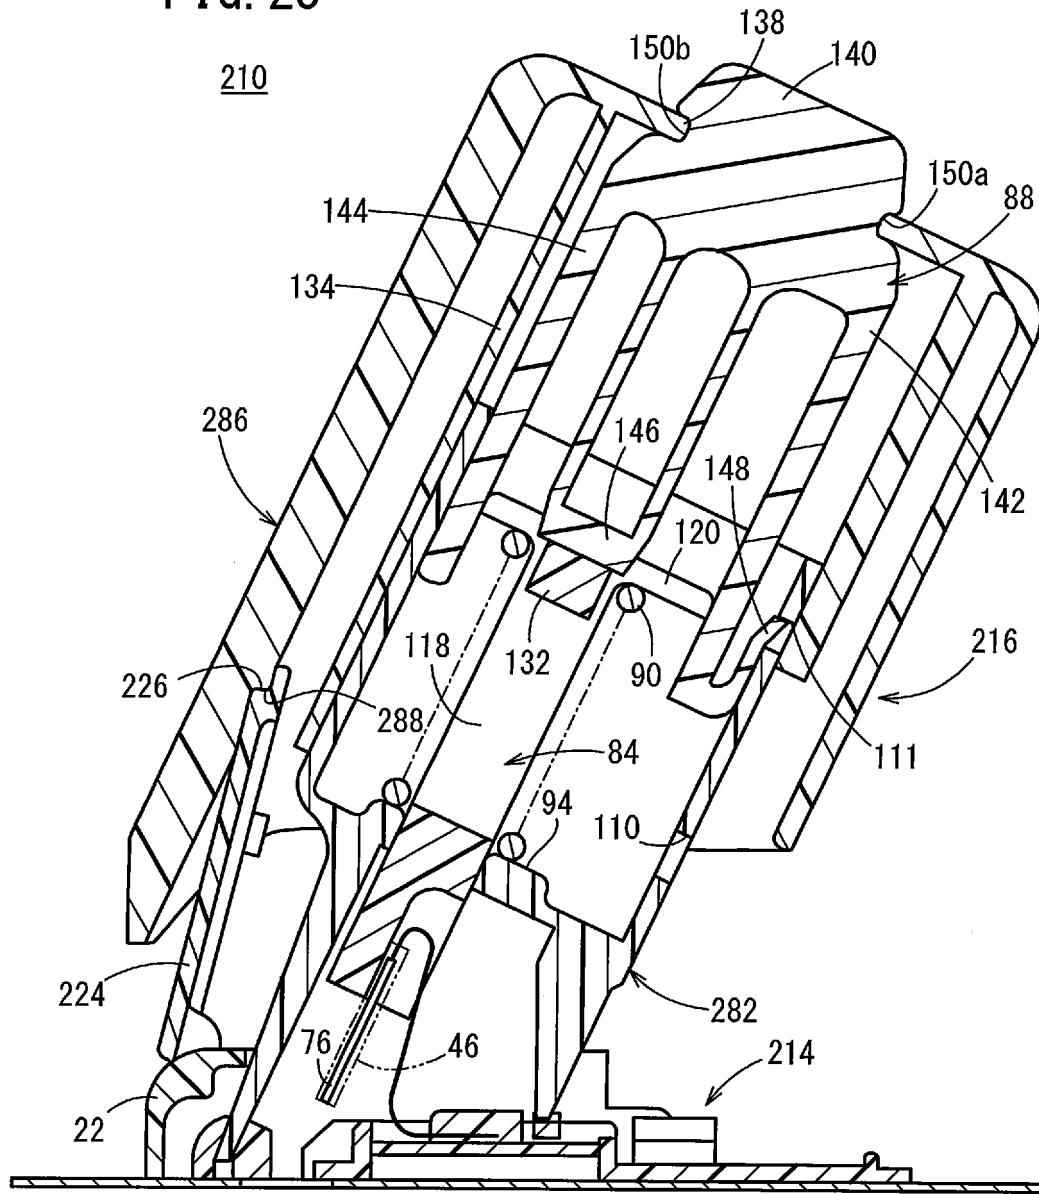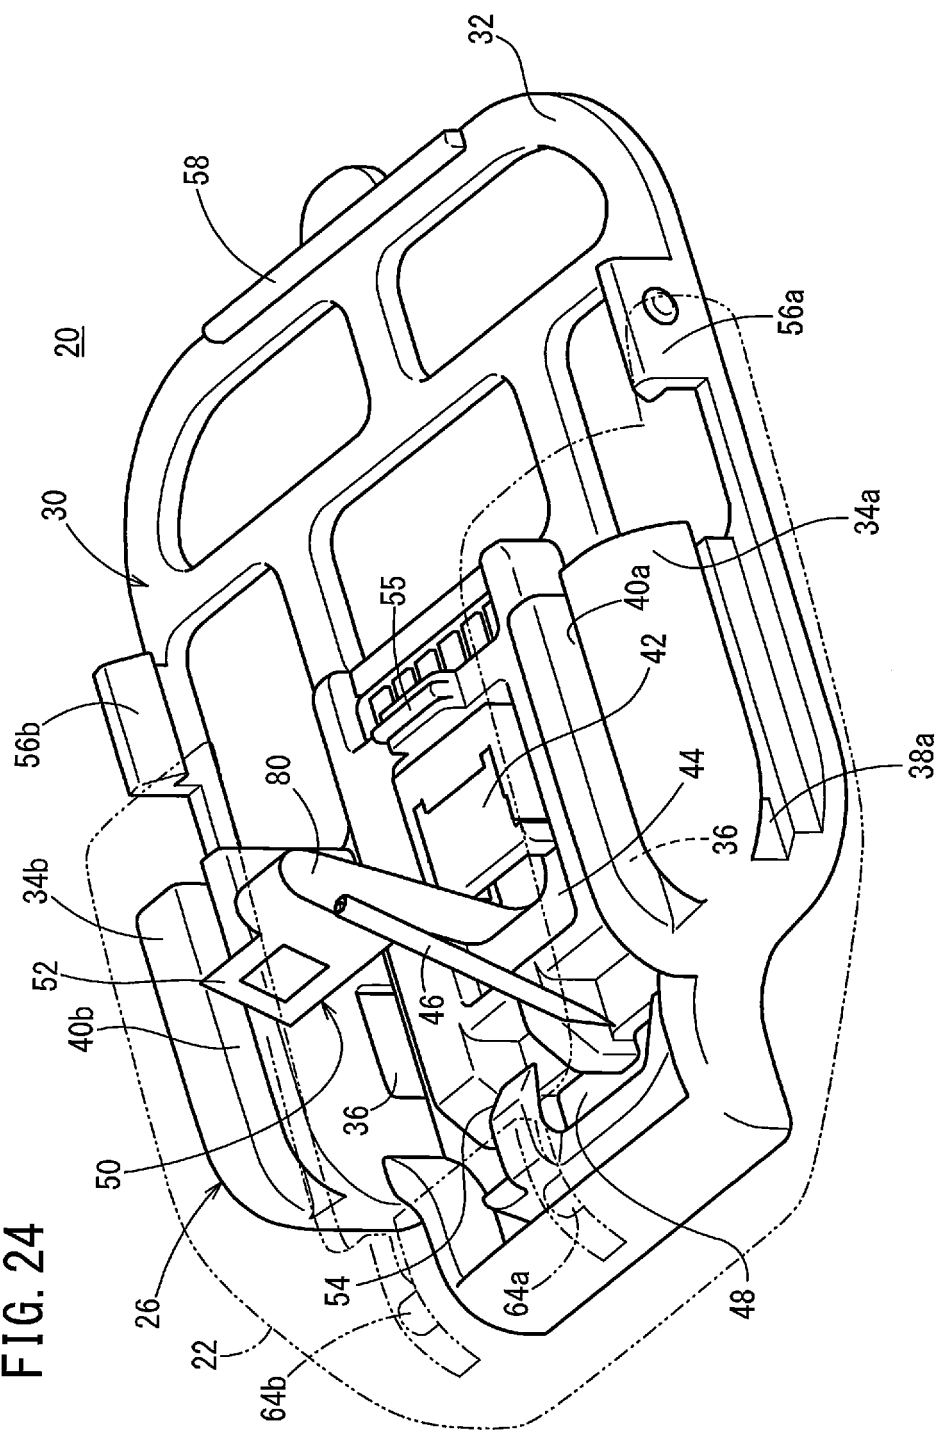

(INSIDE BODY)

FIG. 24




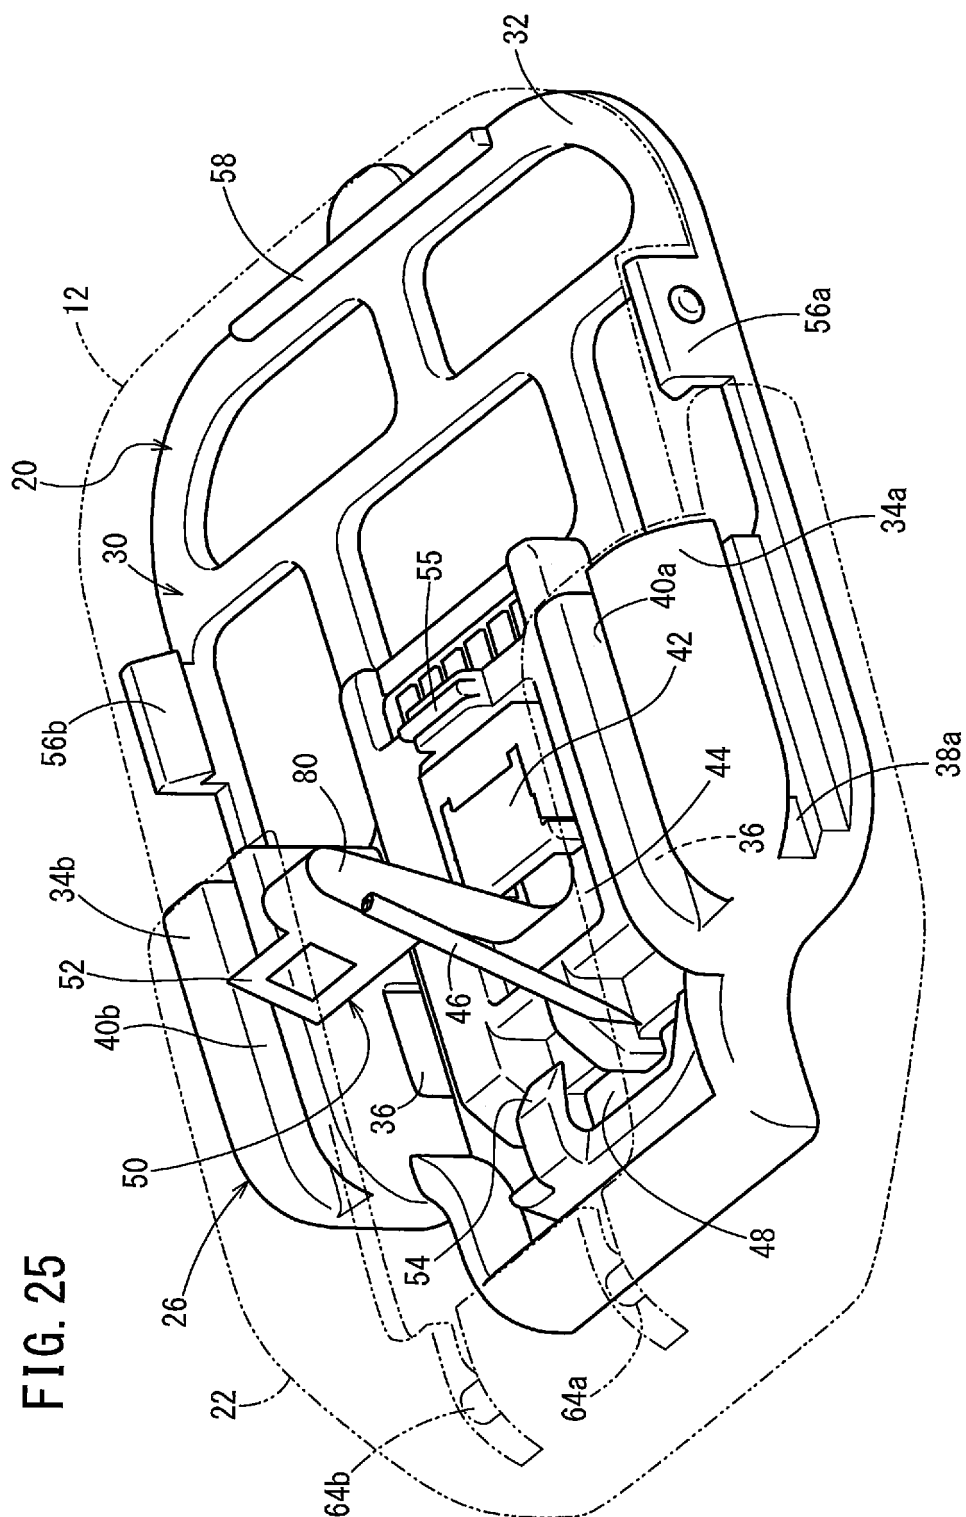


FIG. 25

FIG. 26

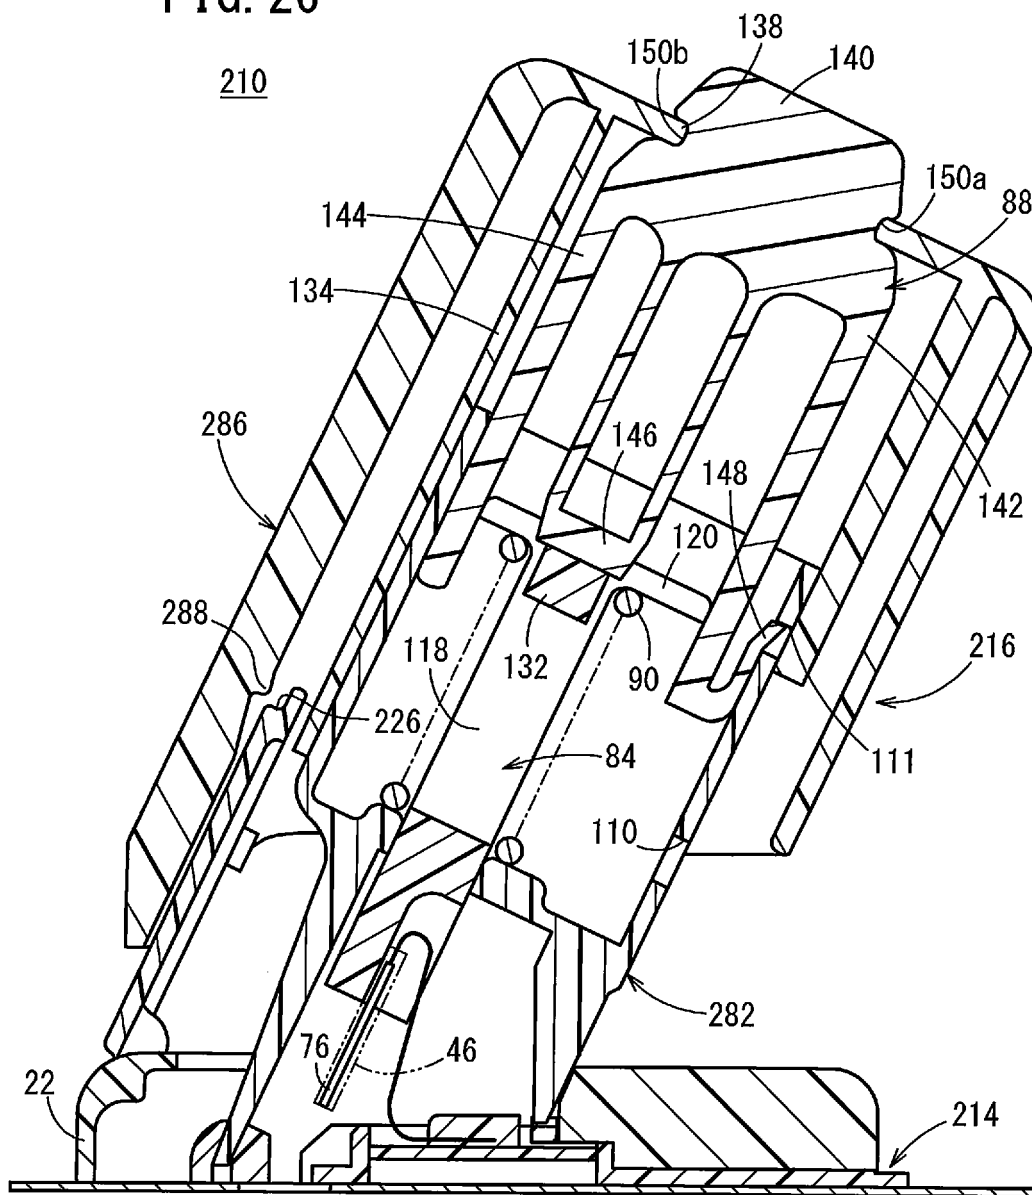

(INSIDE BODY)

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2008506468W B [0002] [0003]
- WO 2013152090 A2 [0005]

|                |                                                                       |         |            |
|----------------|-----------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 传感器插入装置                                                               |         |            |
| 公开(公告)号        | <a href="#">EP2898828B1</a>                                           | 公开(公告)日 | 2019-04-03 |
| 申请号            | EP2012884951                                                          | 申请日     | 2012-09-24 |
| [标]申请(专利权)人(译) | 泰尔茂株式会社                                                               |         |            |
| 申请(专利权)人(译)    | 泰尔茂株式会社                                                               |         |            |
| 当前申请(专利权)人(译)  | 泰尔茂株式会社                                                               |         |            |
| [标]发明人         | OHKOSHI TAKAHIRO<br>MATSUMOTO ATSUSHI                                 |         |            |
| 发明人            | OHKOSHI, TAKAHIRO<br>MATSUMOTO, ATSUSHI                               |         |            |
| IPC分类号         | A61B5/1473 A61B5/00                                                   |         |            |
| CPC分类号         | A61B5/14503 A61B5/0031 A61B5/14532 A61B5/1473 A61B5/6849 A61B2560/063 |         |            |
| 其他公开文献         | EP2898828A4<br>EP2898828A1                                            |         |            |
| 外部链接           | <a href="#">Espacenet</a>                                             |         |            |

#### 摘要(译)

传感器插入装置和传感器插入方法技术领域传感器插入装置 ( 10 ) 包括移动机构 ( 16 ) , 其将检测元件 ( 76 ) 和插入针 ( 46 ) 插入到对象的身体中。移动机构 ( 16 ) 的抓握构件 ( 86 ) 被位移防止构件 ( 106 ) 阻挡, 该位移防止构件防止抓握构件 ( 86 ) 朝向对象的身体移位。当数据处理单元 ( 12 ) ( 例如, 发射器 ) 附接到设备主体 ( 14 ) 时, 位移防止构件 ( 106 ) 被数据处理单元 ( 12 ) 推动以转动。结果, 释放了相对于抓握构件 ( 86 ) 的阻塞。