



(11) **EP 3 250 111 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
17.06.2020 Bulletin 2020/25

(51) Int Cl.:
A61B 5/00 (2006.01) **G06T 7/00** (2017.01)
G16H 30/40 (2018.01) **G16H 50/50** (2018.01)
A61C 9/00 (2006.01)

(21) Application number: **16743844.9**

(86) International application number:
PCT/US2016/013329

(22) Date of filing: **14.01.2016**

(87) International publication number:
WO 2016/122890 (04.08.2016 Gazette 2016/31)

(54) **ESTIMATING AND PREDICTING TOOTH WEAR USING INTRA-ORAL 3D SCANS**

KALKULATION UND VORHERSAGE VON ZAHNVERSCHLEISS MITHILFE INTRAORALER
3D-ABTASTUNGEN

ESTIMATION ET PRÉDICTION DE L'USURE DES DENTS AU MOYEN D'IMAGES SCANNER 3D
INTRABUCCALES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **SCOTT, Shannon D.**
Saint Paul, Minnesota 55133-3427 (US)
- **SABELLI, Anthony J.**
Darien, CT 06820 (US)
- **LORENTZ, Robert D.**
Saint Paul, Minnesota 55133-3427 (US)

(30) Priority: **30.01.2015 US 201514609529**

(43) Date of publication of application:
06.12.2017 Bulletin 2017/49

(74) Representative: **Vossius & Partner**
Patentanwälte Rechtsanwälte mbB
Siebertstrasse 3
81675 München (DE)

(60) Divisional application:
20166109.7

(73) Proprietor: **3M Innovative Properties Company**
St. Paul, MN 55133-3427 (US)

(56) References cited:
EP-A1- 2 258 303 EP-A1- 2 349 062
EP-A1- 2 604 220 US-A1- 2005 095 562
US-A1- 2009 034 811 US-A1- 2013 054 190
US-A1- 2013 308 843 US-B1- 6 766 217
US-B2- 8 422 751

(72) Inventors:

- **RIBNICK, Evan J.**
Saint Paul, Minnesota 55133-3427 (US)
- **SOMASUNDARAM, Guruprasad**
Saint Paul, Minnesota 55133-3427 (US)
- **STANKIEWICZ, Brian J.**
Saint Paul, Minnesota 55133-3427 (US)
- **EID, Aya**
Chicago, Illinois 60626 (US)
- **SIVALINGAM, Ravishankar**
Foster City, California 94404 (US)

- **YOKESH KUMAR ET AL: "Automatic Feature
Identification in Dental Meshes",
COMPUTER-AIDED DESIGN AND
APPLICATIONS, vol. 9, no. 6, 1 January 2012
(2012-01-01) , pages 747-769, XP055388319, DOI:
10.3722/cadaps.2012.747-769**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND**

[0001] Tooth wear (associated with Bruxism) and gingival recession are both conditions that, if not treated in a timely manner by dental professionals, can have serious medical consequences. In the case of Bruxism, lateral movements and tooth grinding can cause significant tooth wear and lead to muscle pain, temporomandibular joint issues, and headaches. In some cases, this may lead to the dentin being exposed, dental decay, and even tooth fracture. Despite the potential severity of these consequences, the tools available to dental professionals for diagnosing and assessing the severity of tooth wear and gingival recession are limited. In the case of tooth wear, these tools include patient questionnaires, clinical examination by a dentist, and bite force measurements. Clinical examinations may be performed using the Individual Tooth-Wear Index, which provides a rating between 0 and 3 based on visual assessment by a dentist. Accordingly, a need exists for additional tools to assess tooth wear, particularly using intra-oral 3D scans.

[0002] EP 2 258 303 A1 discloses a system for creating an individual, three-dimensional virtual tooth model representing a tooth of a patient. The system includes a memory storing at least one virtual three-dimensional model of a template object corresponding to a tooth, including a template tooth corresponding to the tooth, and a data processing system including a memory storing a virtual three-dimensional model of at least a part of the dentition of the patient. The data processing system further comprises software processing the virtual three-dimensional model of at least a part of the dentition and the virtual model of the template object and responsively deriving the individual, three-dimensional, virtual tooth model.

[0003] US 2013/0308843 A1 discloses a method for the geometrical analysis of scan data from oral structures.

[0004] EP 2 604 220 A1 discloses an information processing method that allows the mandibular movement of a patient to be reproduced on a computer.

[0005] WO 2010/033404 A1 discloses methods and systems for determining the positions of orthodontic appliances.

[0006] EP2349062 (A1) is also relevant for understanding the background of the present invention.

SUMMARY

[0007] A method and a system as recited in the independent claims are provided. The dependent claims define embodiments.

[0008] A method for estimating teeth wear, consistent with the present invention, includes receiving a 3D digital model of teeth and segmenting the 3D digital model of teeth to identify individual teeth within the 3D digital model of teeth. A digital model of a tooth is selected from the segmented 3D digital model of teeth, and an original shape of the selected tooth is predicted to obtain a digital model of a predicted original shape. The digital model of the tooth is compared with the digital model of the predicted original shape to estimate wear areas in the tooth.

[0009] There is also disclosed a method for predicting teeth wear that includes receiving a 3D digital model of teeth. A mapping function is applied to the digital model of the teeth based upon values relating to tooth wear. Wear areas in the teeth are predicted based upon the applying step.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The accompanying drawings are incorporated in and constitute a part of this specification and, together with the description, explain the advantages and principles of the invention. In the drawings,

FIG. 1 is a diagram of a system for detecting tooth wear using a 3D digital model based upon intra-oral 3D scans; FIG. 2 illustrates a 3D model of teeth from intra-oral scans; FIG. 3 illustrates a 3D model of teeth segmented to digitally separate each tooth; FIG. 4 is a flow chart of a method for segmenting teeth in a 3D digital model; FIG. 5 illustrates over-segmentation of teeth by a geometric hill-climbing method; FIG. 6 illustrates detection of boundary vertices between teeth in a 3D digital model; FIGS. 7A and 7B illustrate morphological clean up to fix boundaries between teeth in a 3D digital model; FIGS. 8A and 8B illustrate removal of non-aligned boundaries in 3D digital model; FIGS. 9A-9H illustrate merging of the results of segmentation methods to segment teeth in a 3D digital model; FIG. 10 is a flow chart of a method of estimating tooth wear using 3D scans; FIG. 11 is a diagram of a user interface for displaying estimated tooth wear; FIG. 12 is a flow chart of a method of predicting tooth wear using 3D scans; and FIG. 13 is a diagram of a user interface for displaying predicted tooth wear.

DETAILED DESCRIPTION

[0011] Embodiments includes analyzing tooth wear from a single 3D scan of the patient's dentition. One approach is based on estimating the original shape of the surface through use of a database (or collection) of known tooth shapes and learned mathematical model and for reconstructing shape, and then comparing this estimated original shape with the current shape of the surface. Another approach is based upon comparing the current shape of the surface with annotated scans where the annotation indicates an amount of tooth wear.

[0012] A method for determining tooth wear based upon comparison of multiple 3D scans of a patient is described in U.S. Patent Application Serial No. 14/321318, entitled "Detecting Tooth Wear Using Intra-Oral 3D Scans," and filed July 1, 2014.

3D Scan Acquisition and Segmentation

[0013] FIG. 1 is a diagram of a system 10 for detecting tooth wear using a digital 3D model based upon intra-oral 3D scans. System 10 includes a processor 20 receiving digital 3D models of teeth (12) from intra-oral 3D scans or scans of impressions of teeth. System 10 can also include an electronic display device 16, such as a liquid crystal display (LCD) device, for displaying indications of tooth wear and an input device 18 for receiving user commands or other information. An example of digital 3D model of a patient's teeth from a scan is shown in FIG. 2. Systems to generate digital 3D images or models based upon image sets from multiple views are disclosed in U.S. Patent Nos. 7,956,862 and 7,605,817. These systems can use an intra-oral scanner to obtain digital images from multiple views of teeth or other intra-oral structures, and those digital images are processed to generate a digital 3D model representing the scanned teeth. System 10 can be implemented with, for example, a desktop, notebook, or tablet computer. System 10 can receive the 3D scans locally or remotely via a network.

[0014] For certain diagnostic tasks, the individual teeth in the model need to be segmented from one another before the desired analysis or manipulation can be performed. In some cases, a software interface may be presented in order for a user to perform this segmentation, or some parts of it, manually. However, this process can be quite labor intensive and tedious. As such, the automation of this task is desirable. An example of teeth that have been segmented in a digital model is shown in FIG. 3. The segmentation provides for separating individual teeth in the digital 3D model, as represented by the shading in FIG. 3, and each tooth in the model can essentially be digitally separated from the other teeth for further processing to detect tooth wear. Using a segmented digital 3D model for comparing or analyzing individual teeth is more accurate than comparing whole or partial arches within the model.

[0015] Described herein are techniques for tooth segmentation within a digital 3D model. The technique is a combination of two separate algorithms and combines the strengths of both of them. The first algorithm is a geometric hill-climbing approach which takes into account topological structures such as height and curvature. The second algorithm is a machine learning approach which classifies each point on the surface as belonging to either a boundary or a non-boundary. Alternatively, the second algorithm is interstice detection which classifies a set of planes (or points) that approximate the interstitial spaces between teeth. The second algorithm can be complementary to the first algorithm (geometric hill-climbing) and combined with the first algorithm to produce a resulting segmentation. As another alternative to the second algorithm, the first algorithm can be combined with user input estimating centroids of teeth in the digital 3D model. Instead of merging the results of two algorithms, only one algorithm can be used to segment the digital 3D model such as any one of the algorithms described herein.

[0016] The 3D scans addressed herein are represented as triangular meshes. The triangular mesh is common representation of 3D surfaces and has two components. The first component, referred to as the vertices of the mesh, are simply the coordinates of the 3D points that have been reconstructed on the surface - i.e., a point cloud. The second component, the mesh faces, encodes the connections between points on the object and is an efficient way of interpolating between the discrete sample points on the continuous surface. Each face is a triangle defined by three vertices, resulting in a surface that can be represented as a set of small triangular planar patches.

[0017] FIG. 4 is a flow chart of a method 22 for segmenting teeth in a digital 3D model. Method 22 can be implemented in software or firmware modules, for example, for execution by processor 20. Method 22 can alternatively be implemented in hardware modules or a combination of software and hardware.

[0018] Method 22 includes receiving a digital 3D model of a patient's teeth (step 24) and optionally aligning the model (step 25). Method 22 then involving segmenting the model by geometric hill-climbing (step 26) and point classification (step 28). Optionally, post processing on boundaries of the segmentation by point classification is performed (step 32). As an alternative to point classification, the model can be segmented by interstice detection (step 29). As another alternative to point classification, method 22 can receive user input identifying centroids of each tooth in the model (step 31).

[0019] The results of the segmentation methods are iteratively merged (step 30). In particular, the results of segmentation by hill-climbing are merged with the results of segmentation by point classification or interstice detection or user

input identifying the centroids. The merged segmentation can optionally be refined based upon manual, for example user-entered, input (step 34). The results of the segmentation are stored (step 38). The segmentation results in a separate mesh for each tooth from the digital 3D model, as illustrated in FIG. 3. These steps are described in more detail below.

[0020] The optional alignment step 25 can be implemented using a Support Vector Regression (SVR) method to find the occlusal plane fitted to a mesh of the teeth in the digital 3D model. The alignment can be used to have the teeth in the digital 3D model essentially aligned with the Y axis.

[0021] The alignment can use the LIBSVM toolbox and ε -SVR method. The kernel is chosen to be linear and $\varepsilon = 5$. The training is based on the assumption that teeth are roughly pointing up along the Y axis. The output is sample points from the occlusal plane which is given to a simple principal component analysis (PCA) method to find the normal direction. SVR uses a linear loss function with a zero part within the margins which performs better for teeth dataset than the quadratic loss function in regular least square regression methods. It helps to decrease the effect of gingiva cut-lines which can be very jagged and bumpy in mesh scans. It also tries to rule out the vertical points on the teeth (buccal part) and give more weight of importance to the horizontal points on teeth (cuspal part) in determining the occlusal plane orientation. The RANSAC method and Robust PCA method can alternatively be used for the alignment.

[0022] Table 1 provides exemplary pseudocode for implementing the alignment step.

Table 1 - Pseudocode for Normal Direction Extraction	
Input: a 3D mesh with a set of vertices $\mathbf{V}$ specified in 3D coordinate system X,Y and Z. Y represents the rough direction of vertical axis in which the teeth point upwards.	
Output: the normal vector perpendicular to occlusal plane which represents the correct upward direction of teeth.	
Assumptions: Teeth are roughly pointing up along the Y axis. The mesh has been truncated below the gum line.	
Method steps:	
1	Subtract the mean of data points to centralize the data points around (0,0,0).
2	Apply the Support Vector Regression with linear kernel and margin value ε to find the occlusal plane.
3	Find the normal direction of the occlusal plane by geometrical methods or applying a simple PCA.

Segmentation by Geometric Hill-Climbing

[0023] One of the algorithms for segmentation is based upon geometric operations on the mesh. Specifically, the main idea behind this approach is that, if one starts from any point on the surface and moves upwards through a series of points, one will converge to a high point that is a local maximum. In most cases it would be expected all points on a tooth (or on the same cusp of a tooth) will converge to the same local maximum. This type of segmentation can produce very accurate boundaries between teeth, but it typically results in an over-segmentation in which a single tooth may be divided into multiple segments.

[0024] Before performing the segmentation, the mesh is preprocessed using Laplacian smoothing. This preprocessing is an effective way of removing high-frequency noise in the surface reconstruction.

[0025] An energy function is then computed for each vertex on the mesh, on which the algorithm will attempt to find local maxima later in the hill-climbing process. The energy function at each vertex is composed of two terms, where for the i-th vertex:

$$f_i = y_i + \lambda d_i$$

where y_i is the y-coordinate (height) of the i-th vertex, d_i is its angular divergence, and $\lambda > 0$ is a weighting parameter. The parameter λ can be any value greater than zero or, alternatively, λ can be equal to zero.

[0026] Angular divergence is a measure of overall curvature around a point. For a face F comprised of vertices v_i , v_j , and v_k , with normal vectors n_i , n_j , and n_k , respectively, the angular divergence is given by:

$$D_F = |\cos^{-1}(n_i^T n_j)| + |\cos^{-1}(n_i^T n_k)| + |\cos^{-1}(n_j^T n_k)|$$

If the area around a face is completely flat, then all the normal vectors of all three of its vertices will point in the same direction, and the D_F will be zero. Then the angular divergence of the i -th vertex v_i is the mean of the angular divergences of the faces of which v_i is a part.

[0027] Once the energy f_i is computed for each vertex, segmentation is performed according to a hill-climbing procedure. Conceptually, the algorithm can be understood as follows. For each vertex on the surface, the algorithm initializes a hill-climb, in which at each iteration it moves to the connected neighbor (as defined by the faces) that has the highest energy function value. The algorithm continues climbing until it reaches a local maximum that has higher energy than all of its neighbors. All vertices that were passed through along this route are assigned to this local maximum, and all such paths that converge to this local maximum define a segment. This process is repeated until all vertices on the mesh have been traversed.

[0028] This segmentation assigns vertices to segments defined by local energy maxima that can be reached through a monotonically-increasing path through the energy function. The energy function f_i is defined such that each iteration of hill-climbing moves upwards in height, but is discouraged from crossing an area with high curvature by the angular divergence term. This helps ensure that the boundaries between teeth are not crossed.

[0029] An example of a segmentation produced by this algorithm is shown in FIG. 5. As can be seen, the algorithm over-segments the teeth by separating each cusp of a tooth into its own segment - this can be understood intuitively as a result of the hill-climbing procedure, since each cusp will have its own unique local maximum. For example, the digital model of tooth 40 is segmented into five sections. However, the boundaries produced by this approach are quite precise and accurately separate teeth from one another.

[0030] Table 2 provides exemplary pseudocode for implementing the geometric hill-climbing algorithm.

Table 2 - Pseudocode for Hill-Climbing Segmentation

Input: a 3D mesh with a set of vertices $\mathbf{V}$ specified in 3D coordinate system X,Y and Z. Y represents the vertical axis or the general direction in which the teeth point upwards. The mesh also has a set of triangulations or faces $\mathbf{F}$ based on the vertices.

Output: Segmented mesh, where for each vertex v_i in the mesh, a label I_i corresponding to the segment to which that vertex belongs is assigned.

Assumptions: Teeth are roughly pointing up along the Y axis. The mesh has been truncated below the gum line.

Method steps:

1	Perform mesh Laplacian smoothing to reduce error
2	For each vertex v_i in $\mathbf{V}$, compute the surface normal at that vertex
3	For each face f_i in $\mathbf{F}$, compute the divergence of the face as $D_F = \cos^{-1}(\mathbf{n}_i^T \mathbf{n}_j) \div \cos^{-1}(\mathbf{n}_i^T \mathbf{n}_k) \div \cos^{-1}(\mathbf{n}_j^T \mathbf{n}_k) $ where $\mathbf{n}_i$, $\mathbf{n}_j$ and $\mathbf{n}_k$ are the normal directions of vertices i , j , and k of the face
4	Apply the divergence value of every face to all the individual vertices of the face
5	Compute the energy function value at each vertex as $y + \lambda * D_f$
6	For each vertex determine the maximum function value in a local neighborhood
7	Assign all vertices to a segment assigned to the local maximum value in step 6
8	Repeat steps 6 to 7 until a local maximum is reached
9	Assign the appropriate cluster labels to each vertex

Segmentation by Point Classification

[0031] The segmentation by point classification is a data-driven approach. Unlike the geometric hill-climbing approach, this approach relies on manually provided groundtruth segmentation. Groundtruth can be obtained from a user providing nearly accurate segmentation manually using mesh manipulation tools such as the MeshLab system. A selection of an individual tooth can be made using a face selection tool. Individual teeth are selected in this manner and saved as individual mesh files. Using the original mesh and the individual teeth files, a labeling of the vertices in the original mesh can then be inferred. Once groundtruth for a full scan is completed, the inferred labels of all the segments can be visualized.

[0032] From this groundtruth labeling, the boundary vertices between segments can be determined. For each vertex

the distribution of vertex labels around that vertex is examined. If the distribution is not unimodal (i.e., the vertex labels are predominantly the same), then that vertex is considered an interior vertex. If not, the vertex is considered a boundary vertex. This data can be manually entered one time, for example, as training data and then used repeatedly in the point classification algorithm.

[0033] Given the groundtruth boundary vertices labels from multiple training meshes, the algorithm provides for a function that is capable of predicting whether a vertex on a mesh lies in the interior of a tooth or on the boundary between teeth. In particular, the algorithm can classify or label points in the mesh as being on a tooth or on a boundary between teeth. This process involves two tasks: feature extraction and classification. FIG. 6 illustrates detection of boundary vertices 42 between teeth in a digital 3D model.

[0034] Table 3 provides exemplary pseudocode for implementing the point classification (machine learning) training data algorithm.

Table 3 - Pseudocode for Machine Learning Training	
Input: Multiple 3D meshes with a sets of vertices V specified in 3D coordinate system X, Y and Z. Y represents the vertical axis or the general direction in which the teeth point upwards. The mesh also has a set of triangulations or faces F based on the vertices. Also the groundtruth segmentation in the form of the vertices corresponding to boundaries and those in the interior as indicated by manual annotation. Output: A predictive model that is capable of generating the boundary vertex prediction labels for a query set of vertices. Assumptions: Teeth are roughly pointing up along the Y axis. The mesh has been truncated below the gum line.	
Method steps:	
1	For each vertex in every mesh in the training set of data, compute the following features: a. Normal direction b. Absolute, mean and Gaussian curvature c. Shape context d. Mesh fourier e. Spin image f. Mesh local covariance
2	Construct a data matrix X which is M X N where M is the total number of vertices in all the meshes and N is the total number of feature dimensions when all features in step 1 are concatenated
3	Train a RUSBoosted decision tree classifier that can predict the labels corresponding to whether a vertex lies on the boundary or not. (An alternate classifier can be used.)

Feature Extraction

[0035] In order to perform this task, the point classification algorithm extracts many characteristic features for every vertex in the mesh. It is often difficult to determine which features are useful in a segmentation algorithm. There are many features which can be used for segmentation in this framework, including but not limited to multi-scale surface curvature, singular values extracted from PCA of local shape, shape diameter, distances from medial surface points, average geodesic distances, shape contexts, and spin images. Of these, the algorithm implements the following features: absolute and mean curvature, direction of normal at vertex, local covariance of the mesh around the vertex and its principal Eigen values, spin images, Fourier features, shape contexts, and PCA features.

Classification

[0036] Given the feature set for a vertex X, the function f is defined as follows: $f: X \rightarrow \{1,0\}$, that is the function f maps the set of features X to either a 1 or 0. A value 1 indicates that vertex is a boundary vertex and the value 0 indicates otherwise. This function can be one or a combination of many classification methods such as support vector machines, decision trees, conditional random fields, and the like. Additionally, in the segmentation as a classification problem, there is a class imbalance. The number of interior vertices is much greater than the number of boundary vertices. The ratio of interior vertices to boundary vertices is typically 100:1. In such extreme class imbalance situations, regular classifiers

are not optimal. This is because it is possible to obtain very high accuracy by always predicting that a vertex is in the interior, and that would be practically useless since no vertices would be classified as being on a boundary. To remedy this issue, one option involves using classifier ensembles such as boosting.

[0037] The classification algorithm uses RUSBoosting on decision stumps as a classifier. RUSBoost stands for random undersampling boosting and is known to handle the class imbalance very well. Additionally RUSBoost is already implemented in the MATLAB program "fitensemble" function. Based on preliminary analysis, RUSBoost was performed on 700 decision stumps. This number was chosen using cross-validation on the training set with the resubstitution loss as the metric. For our experiments, we used a "leave-scan-out" cross-validation scheme. Our dataset consisted of 39 scans, and for every test scan the remaining 38 scans were used for training. The resulting predictions were compared to the groundtruth boundary labels of the test scan. A confusion matrix can then be obtained by comparing the groundtruth labels with the predicted labels. From this we obtained the false alarm rate and the hit rate. With cross-validation testing on 39 scans we obtained an 80% hit rate and 1.7% false alarm rate on average.

[0038] Table 4 provides exemplary pseudocode for implementing the point classification (machine learning) algorithm.

Table 4 - Pseudocode for Machine Learning Prediction	
Input: a 3D mesh with a set of vertices $\mathbf{V}$ specified in 3D coordinate system X,Y and Z. Y represents the vertical axis or the general direction in which the teeth point upwards. The mesh also has a set of triangulations or faces $\mathbf{F}$ based on the vertices.	
Output: Binarized mesh where for each vertex $\mathbf{v}_i$ in the mesh, a label $\mathbf{I}_i$ corresponding to whether the vertex belongs to a boundary or not.	
Assumptions: Teeth are roughly pointing up along the Y axis. The mesh has been truncated below the gum line.	
Method steps:	
1	For each vertex $\mathbf{v}_i$ in $\mathbf{V}$, compute the following features: a. Normal direction b. Absolute, mean and Gaussian curvature c. Shape context d. Mesh fourier e. Spin image f. Mesh local covariance
2	Construct a data matrix X which is M X N where M is the number of vertices in the mesh and N is the total number of feature dimensions when all features in step 1 are concatenated
3	Predict using the learned decision tree RUSBoost classifier the labels corresponding to whether a vertex lies on the boundary or not

Segmentation by Interstice Detection

[0039] As an alternative to point classification, the second algorithm for segmentation can use interstice detection (step 29 in method 22). Table 5 provides exemplary pseudocode for implementing the interstice detection algorithm.

Table 5 - Pseudocode for Interstice Detection	
Input: a 3D mesh with a set of vertices $\mathbf{V}$ specified in 3D coordinate system X,Y and Z. Y represents the vertical axis or the general direction in which the teeth point upwards. The mesh also has a set of triangulations or faces $\mathbf{F}$ based on the vertices.	
Output: a set of planes that approximate the interstitial spaces between each pair of teeth.	
Assumptions: Teeth are roughly pointing up along the Y axis.	
Method steps:	
1	Form a plan-view range image of the mesh. That is, a range image from the top view, where each pixel represents the height of the surface at the corresponding point.

(continued)

Method steps:	
2	Estimate a one-dimensional parameterization of the dental arch using the Locally-Linear Embedding (LLE) algorithm, which results in a curve that represents the general shape of the arch and passes roughly through the centers of the teeth.
3	Compute a set of evenly-spaced sample points along the one-dimensional parameterization.
4	For each sample point along the curve, compute the sum of heights in the range image along a line normal to the curve at that point.
5	Interstitial spaces are identified as sample points that are local minima in the sum of heights computed in step 4. The orientation of the interstitial space is given by the direction of the normal to the one-dimensional parameterization curve at the corresponding sample point.
6	Detected interstitial spaces, and their orientations, are mapped back to the three-dimensional coordinates of the original mesh.

Morphological Clean Up

[0040] Morphological operations such as mesh erosion and dilation can be done in tandem, resulting in an operation known morphological opening. Unlike images, mesh erosion and dilation are non-trivial since there are no sliding windows. Instead to perform mesh erosion, one can use the connected v-ring of every vertex as its neighborhood. Performing morphological opening removes islands and small streaks which can interfere with the merging algorithm mentioned later. FIGS. 7A and 7B illustrate morphological clean up to fix boundaries between teeth in a digital 3D model with FIG. 7B illustrating clean up of the boundaries shown in FIG. 7A. This morphological clean up can be used to for the optional step 32 in method 22 after the segmentation by point classification.

Complementary Approaches to Segmentation

[0041] Based on the results of the hill-climbing approach and the classification approach, it was observed that the hill-climbing captures the general geometry of cusp and has a tendency to form good boundaries around teeth, but it over-segments and thus creates more false boundaries. The classification approach on the contrary has a somewhat less than desired hit rate on boundaries but has a very low false alarm rate. From this complementary result, a method to merge the results helps reduce the demerits of both approaches and boost the merits of both. In order to accomplish this, a hierarchical merging algorithm is used, which merges the segments in the hill-climbing approach using the boundary predictions of the classification approach. Every boundary predicted by the hill-climbing approach is given a score based on the predicted boundary vertices from the classification approach. Then a hierarchical merging is performed. All the boundaries with a score less than a threshold are discarded and the corresponding segments are merged and the boundary scores are corrected accordingly. This threshold is gradually increased. For example, all boundaries that have score less than 5 are discarded first. The corresponding segments are merged, and then this process is repeated by increasing the threshold step-by-step to, for example, 50. This heuristic provides correct segmentation of the teeth in one of the merge steps in most cases.

Elimination of Non-Aligned Boundaries

[0042] Even after the merging process, there are some strong false boundaries predicted by the machine learning classifier which are not eliminated completely. These boundaries can be removed using a hypothesis of boundary direction alignment. Since each consecutive tooth boundary is roughly parallel, there cannot be any stark changes in the boundary direction between consecutive teeth. In FIGS. 8A and 8B, a misaligned boundary is removed using such a hypothesis where FIG. 8B illustrates removal of a boundary from the model of FIG. 8A. This can be achieved by determining the principal direction of orientation of each boundary segment using PCA. The principal components (PCs) of each consecutive tooth boundary should be aligned, thus resulting in eliminating the boundaries which have misaligned PCs. This process is applied after merging the hill climbing result with the machine learning result.

Segmentation Results

[0043] Sample results of the classification or machine learning (ML), hill-climbing (HC), and the merging steps are shown in FIGS. 9A-9H. The machine learning output (FIG. 9A) shows the mesh labeling for the boundary vertices and the interior vertices. The second mesh (FIG. 9B) is the result of the hill climbing. As shown in FIG. 9B, the hill-climbing over-segments each tooth but in general there is a reduced chance of a segment being shared across teeth. This is also a behavior associated with the choice of the parameter λ . The meshes displayed in FIGS. 9C-9H indicate iteratively the result of each merge step. Merge 1 corresponds to discarding boundaries with a score less than 5 and merge 2 corresponds to scores less than 10 and so on. In this example, the correct segmentation was achieved at step 6. As shown in the example of FIGS. 9C-9H, it is possible there are no changes between some of the successive (iterative) merge steps. Successive merge steps indicate how aggressively nearby segments are merged and, therefore, in some cases changes are only noticeable at later merge steps.

[0044] The score used for merging can represent, for example, the number of points classified as a boundary from the point classification algorithm within a particular vicinity of a boundary determined from the hill-climbing algorithm. An exemplary score of 5 means at least 5 points classified as a boundary are within a particular vicinity of a boundary determined by the hill-climbing algorithm. The particular vicinity used can be based upon, for example, empirical evidence, the typical width or size of a true boundary, or other factors.

[0045] In some cases, the best result would be achieved earlier than the 6th merging step and it is possible to get an over-merged result at step 6. In this case one could use the result at step 5 manually or attempt to separate manually just the teeth that are over-merged. Sometimes, an under-merged or over-segmented result can occur even after step 6. In this scenario, by using a cursor control device and user interface a user could manually select ("click on") and merge the segments that require merging to extract the teeth correctly, for example. The final segmented digital 3D model can then be stored in an electronic storage device for later processing.

[0046] Table 6 provides exemplary pseudocode for implementing the algorithm for merging hill-climbing segmentation with point classification (machine learning) segmentation. For the alternative interstice detection segmentation, Table 7 provides exemplary pseudocode for implementing the algorithm for merging hill-climbing segmentation with interstice detection segmentation.

Table 6 - Pseudocode for Merging Hill-Climbing and Machine Learning Prediction

Input: a 3D mesh with a set of vertices $\mathbf{V}$ specified in 3D coordinate system X,Y and Z. Y represents the vertical axis or the general direction in which the teeth point upwards. The mesh also has a set of triangulations or faces $\mathbf{F}$ based on the vertices. Label assignments from hill climbing and boundary vertex labels predicted by the machine learning are also provided.

Output: Segmented mesh, where for each vertex $\mathbf{v}_i$ in the mesh, a label $\mathbf{l}_i$ corresponding to the segment to which that vertex belongs is assigned.

Assumptions: Teeth are roughly pointing up along the Y axis. The mesh has been truncated below the gum line.

Method steps:

1	Convert hill-climbing label assignments to boundaries between segments and interior vertices of segments resulting in a set of boundaries $\mathbf{B}$
2	Eliminate small boundary prediction regions in the machine learning prediction by way of morphological erosion. Also eliminate boundaries which are misaligned with the general orientation of the quadrant/arch
3	Initialize merge threshold to $\mathbf{Th}$
4	For each boundary $\mathbf{b}_i$ in $\mathbf{B}$, compute the score of the boundary by determining the number of machine learning predicted boundary vertices in the immediate neighborhood of the boundary. Normalize this number by the length of the boundary (total number of vertices)
5	Eliminate the boundaries which have a score less than $\mathbf{Th}$ and merge the segments appropriately by eliminating some cluster assignments and copying cluster assignments.
6	Recompute the boundary scores according to step 4
7	Increase $\mathbf{Th}$ by a predetermined

(continued)

Method steps:	
8	Repeat steps 5 to 7, 5 more times
9	Assign new cluster labels to vertices

Table 7 - Pseudocode for Merging Hill-Climbing Segments using Interstice Detection	
Input: a 3D mesh with a set of vertices $\mathbf{V}$ specified in 3D coordinate system X,Y and Z. Y represents the vertical axis or the general direction in which the teeth point upwards. The mesh also has a set of triangulations or faces $\mathbf{F}$ based on the vertices. Label assignments from hill climbing, as well as detected interstitial spaces, are also provided. Output: Segmented mesh, where for each vertex $\mathbf{v}_i$ in the mesh, a label $\mathbf{I}_i$ corresponding to the segment to which that vertex belongs is assigned. Assumptions: Teeth are roughly pointing up along the Y axis.	
Method steps:	
1	Each detected interstitial space defines a plane in the 3D space of the mesh. For each segment found in Hill-Climbing, compute which side of each interstice plane the majority of its vertices reside. This is referred to the "polarity" of each segment with respect to each interstitial plane.
2	Merge together segments that have the same polarities with respect to nearby interstitial planes.

[0047] As an alternative to point classification and interstice detection, the algorithm can merge the hill-climbing segmentation with user input identifying centroids of teeth (step 31 in method 22). This segmentation method requires input from a user at the beginning of the process. In particular, the user identifies the centroid of each tooth in the digital 3D model of teeth. For example, when viewing the digital 3D model of teeth, such as viewing the model in FIG. 2, on display device 16, the user can use input device 18, such as a cursor control device, to select ("click on") the centroid of each tooth in the model or otherwise identify the centroid. The centroid can include the actual centroid or an estimation of the centroid as perceived by the user. This user entered information is used as the initialization for the step of the segmentation which merges the hill-climbing segments using the Kmeans method. These user-identified centroids need to be close to actual centroids of the teeth in order for the segmentation process to work well and not require post-processing by the user. The only parameter required for this method to be trained is ϵ in SVR for normal direction extraction described above for the alignment process.

[0048] The user-entered information to identify the centroids of each tooth is then merged with the results of the hill-climbing segmentation using the Kmeans clustering method. The vertices should first be replaced by the corresponding local maximum from the hill-climbing step. Then Kmeans method is applied on the new set of vertices to cluster them in k segments, where k is equal to the number of inputs ("clicks") of the user at the beginning of the process. The user's inputs (estimation of teeth centroids) are used as the centroid starting locations of the Kmeans method.

[0049] This merging method can result in successful segmentation as follows: clustering is applied on the local maxima (mostly located on the teeth cusps) and not the full mesh, yielding accuracy and speed benefits. The local maxima of larger clusters find higher weights in Kmeans method, and the centroid starting locations entered by the user avoid converging to other possible local optima of Kmeans methods.

[0050] Table 8 provides exemplary pseudocode for implementing the algorithm for merging hill-climbing segmentation with user-entered estimations of teeth centroids.

Table 8 - Pseudocode for Merging Hill-Climbing Segments using Kmeans	
Input: a 3D mesh with a set of vertices $\mathbf{V}$ specified in 3D coordinate system X,Y and Z, the segmentation result from the hill-climbing segmentation algorithm, in which the local maximum coordination that has been reached by each vertex is reported, and the estimation of centroids of teeth, which has been received from the user at the beginning of the process. Output: Segmented mesh, where to each vertex $\mathbf{v}_i$ in the mesh, a label $\mathbf{I}_i$ corresponding to the segment to which that vertex belongs is assigned.	

(continued)

Method steps:	
1	Represent/substitute each vertex with the local maximum it has reached.
2	Apply the Kmeans clustering method on the new vertices, with the user's centroid estimation as the centroid starting locations of the Kmeans.
3	Assign all vertices to a segment assigned to the corresponding local maximum value in step 2.
4	Assign the appropriate cluster labels to each vertex.

[0051] The exemplary pseudocode in Tables 1-8 is provided for illustrative purposes of particular implementations of the described algorithms, and other implementations are possible.

Tooth Wear Estimation and Prediction

[0052] In one approach, a single scan of a patient's dentition for a person presumed to have tooth wear is compared to an estimated reconstruction of the original "virgin" tooth shape for each tooth or particular teeth (i.e., the shape before any tooth wear occurred), as predicted by a mathematical model as applied to the current patient's teeth. This approach can be summarized according to the following steps: a 3D scan of the patient's teeth is acquired; the individual teeth are segmented from one another using a segmentation algorithm; for each tooth comprising the patient's dentition, the original "virgin" shape of the tooth is predicted using a mathematical model of tooth shape learned from a large database of teeth; and the current scan of each tooth is compared to the predicted virgin tooth shape in order to assess the degree of wear that has occurred.

[0053] FIG. 10 is a flow chart of a method 50 to implement this approach of estimating tooth wear using 3D scans. Method 50 can be implemented in software or firmware modules, for example, for execution by processor 20. Method 50 can alternatively be implemented in hardware modules or a combination of software and hardware. Method 50 includes receiving a segmented model (step 52), for example from the segmentation methodology described above.

[0054] A tooth is selected from the model (step 54), and the original "virgin" shape of the tooth is predicted based upon a database of tooth scans (step 56). In order to accomplish this, a large database of 3D tooth models can be accessed and used, where the degree of wear in each of the teeth in the database is known. Given this database, an aggregate generic mathematical model can be formed of the canonical original "virgin" shape of a tooth location. This can be accomplished for each tooth. For teeth that have a large variability in shape from person-to-person, multiple "virgin" models can be formed, which can include clustering of the space of tooth shape for that particular tooth location.

[0055] Given this database and the mathematical shape models learned from it, the original "virgin" shape of a tooth from the current scan can be predicted. Several approaches exist for performing this step. One approach is as follows. First, the appropriate model from the database for the current tooth is determined, since multiple clustered models may exist for each tooth location, depending on the variability of tooth shape at this bite location. If multiple models exist for this tooth, the appropriate model is determined by computing the similarity of this tooth to each model. Then, a mapping is computed from the current tooth to the model tooth shape. This mapping can be accomplished through use of a non-rigid registration algorithm. Then, once the new tooth is mapped to the model space, its original "virgin" shape is associated with that of the model. Using the inverse of the mapping estimated previously, this model is mapped back to the space of the current tooth, resulting in a prediction of the original shape of this tooth.

[0056] Once the original "virgin" tooth shape has been estimated, it can be compared with the actual current shape in order to assess the amount of wear exhibited (step 60). First, these two models may need to be registered (step 58), using a 3D registration algorithm, so that they are aligned with one another as closely as possible. An example of a registration algorithm is disclosed in the application referenced above. Then, the areas in which the actual and predicted "virgin" models are in disagreement must be located and compared (step 62). These represent the areas of the tooth that have been worn.

[0057] Wear areas can optionally be estimated using local smooth contours on the tooth (step 63), and this estimation can be used to supplement the estimated wear areas from step 62. In particular, local discontinuities in the tooth surface can be detected by analysis of the smooth contours in the digital model localized on or near the top surface of the tooth. A discontinuity in the model of that surface satisfying particular criteria can tend to indicate a worn area. The results of the estimated tooth wear, such as the heights or volumes of the worn areas, can be computed and displayed (step 64).

[0058] FIG. 11 is a diagram of a user interface 68 for displaying estimated tooth wear, for example on display device

16. User interface 68 includes a section 70 for displaying a predicted original shape of the selected tooth, a section 72 for displaying the actual shape as shown in a 3D scan, and a section 74 for displaying a comparison of the shapes to indicate tooth wear. Section 74 can display, for example, the model of the actual shape superimposed on the model of the predicted original shape.

[0059] Another approach involves predicting tooth wear by determining from a single 3D scan of a person's dentition a score or a rating an amount of tooth wear for that person. This approach takes advantage of a large number of annotated 3D scan data of dentitions that have been given scores related to tooth wear. For example, the Smith and Knight tooth wear index could be used for annotating scans. Given these annotations this approach learns a mapping function that uses low-level mesh features such as curvature, spin images, and the features to predict the Smith and Knight tooth wear index for a particular tooth. Such an approach has a benefit for predicting the onset of conditions such as Bruxism at an early stage without the requirement of multiple scans spread out over a longer period of time.

[0060] FIG. 12 is a flow chart of a method 80 to implement this approach of predicting tooth wear using 3D scans. Method 80 can be implemented in software or firmware modules, for example, for execution by processor 20. Method 80 can alternatively be implemented in hardware modules or a combination of software and hardware. Method 80 includes optionally receiving a segmented model (step 82), for example from the segmentation methodology described above. Segmentation is optional in that mapping can be applied to the full mesh or a portion of it, representing a full or partial arch of teeth in the digital model of the teeth. A tooth or arch is selected from the model (step 84), and a mapping function is applied to the selected tooth or arch to predict tooth wear (step 86). The results of the predicted tooth wear can be displayed (step 88).

[0061] Step 86 can be implemented as follows. Many low level mesh features can be computed using well known computer vision and geometric methods. Some examples are features such as multi-scale surface curvature, singular values extracted from Principal Component Analysis of local shape, shape diameter, distances from medial surface points, average geodesic distances, shape contexts, and spin images. Given the ensemble feature set for a mesh X, a function f is defined as follows: $f: X \rightarrow \{0,1,2,3\}$, that is the function f maps the set of features X to a Smith and Knight tooth wear index which takes one of 4 values. In terms of classification, this is a 4-class classification problem. Many different types of classifiers are possible to model this function f. This function can be one or a combination of many classification methods such as support vector machines, decision trees, conditional random fields, or other methods. Support vector machines are known to provide a high a degree of separation between classes with the use of kernels by comparing the features in the appropriate kernel space. Decision trees and ensemble versions of decision trees/stumps such as boosting, bootstrapping, and other versions can be used to combine multiple weak classifiers into strong classifiers with very high performance. Finally, conditional random fields provide great performance by taking neighborhood and group labeling into account. This can be used for localized classification such as classifying the top portion of teeth, i.e. the cusps. Bag-of-features are also possible for use in classifying objects globally by the weighted assimilation of local mesh features computed all over the mesh.

[0062] FIG. 13 is a diagram of a user interface 90 displaying predicted tooth wear, for example on display device 16. User interface 90 includes a section 92 for displaying predicted tooth wear by showing, for example, an annotated scan of the selected tooth.

Claims

1. A method for estimating teeth wear, comprising steps of:

receiving a 3D digital model of teeth;
segmenting the 3D digital model of teeth to identify individual teeth within the 3D digital model of teeth;
selecting a digital model of a tooth (40) from the segmented 3D digital model of teeth;
predicting an original shape of the selected tooth to obtain a digital model of a predicted original shape; and
comparing the digital model of the tooth (40) with the digital model of the predicted original shape to estimate wear areas in the selected tooth (40).

2. The method of claim 1, wherein the segmenting step comprises:

performing a first segmentation method that over segments at least some of the teeth within the 3D digital model of teeth;
performing a second segmentation method that classifies points within the 3D digital model of teeth as being either on an interior of a tooth or on a boundary between teeth in the 3D digital model of teeth; and
combining results of the first and second segmentation methods to generate a segmented 3D digital model of teeth.

3. The method of claim 2, wherein the first segmentation method comprises a geometric hill-climbing approach which takes into account topological structures, and wherein the second segmentation method comprises machine learning or interstice detection.

4. The method of claim 1, wherein the predicting step comprises selecting a digital model of a tooth from known tooth shapes based upon characteristics of a patient corresponding with the 3D digital model of teeth.

5. The method of claim 1, further comprising estimating wear areas in the selected tooth by detecting discontinuities in the digital model of the tooth (40) that satisfy particular criteria.

6. The method of claim 1, wherein the comparing step comprises detecting differences in surface area between the digital model of the tooth (40) and the digital model of the predicted original shape.

7. The method of claim 1, further comprising displaying an indication of the estimated wear areas (74).

8. The method of any one of the preceding claims, wherein the tooth wear of a patient is estimated from a single scan of the patient's dentition.

9. A system (10) for estimating teeth wear, comprising:

a module for receiving a 3D digital model of teeth;

a module for segmenting the 3D digital model of teeth to identify individual teeth within the 3D digital model of teeth;

a module for selecting a digital model of a tooth (40) from the segmented 3D digital model of teeth;

a module for predicting an original shape of the selected tooth to obtain a digital model of a predicted original shape; and

a module for comparing the digital model of the tooth (40) with the digital model of the predicted original shape to estimate wear areas in the tooth.

10. The system (10) of claim 9, wherein the module for segmenting comprises:

a module for performing a first segmentation method that over segments at least some of the teeth within the 3D digital model of teeth;

a module for performing a second segmentation method that classifies points within the 3D digital model of teeth as being either on an interior of a tooth or on a boundary between teeth in the 3D digital model of teeth; and

a module for combining results of the first and second segmentation methods to generate a segmented 3D digital model of teeth.

11. The system (10) of claim 9, wherein the module for predicting comprises selecting a digital model of a tooth (40) from known tooth shapes based upon characteristics of a patient corresponding with the 3D digital model of teeth.

12. The system (10) of claim 9, further comprising a module for estimating wear areas in the selected tooth by detecting discontinuities in the digital model of the tooth that satisfy particular criteria.

13. The system (10) of claim 9, wherein the module for comparing comprises a module for detecting differences in surface area between the digital model of the tooth and the digital model of the predicted original shape.

14. The system (10) of claim 9, further comprising a module (68) for displaying an indication of the estimated wear areas (74).

15. The system (10) of any one of claims 9 to 14, wherein the system (10) is adapted to estimate the tooth wear of a patient from a single scan of the patient's dentition.

Patentansprüche

1. Verfahren zum Schätzen von Zahnverschleiß, aufweisend die Schritte:

Empfangen eines digitalen 3D-Modells von Zähnen;
 Segmentieren des digitalen 3D-Modells von Zähnen, um einzelne Zähne innerhalb des digitalen 3D-Modells von Zähnen zu identifizieren;
 Auswählen eines digitalen Modells eines Zahns (40) aus dem segmentierten digitalen 3D-Modell von Zähnen;
 Vorhersagen einer ursprünglichen Form des ausgewählten Zahns, um ein digitales Modell einer vorhergesagten ursprünglichen Form zu erhalten; und
 Vergleichen des digitalen Modells des Zahns (40) mit dem digitalen Modell der vorhergesagten ursprünglichen Form, um Verschleißbereiche in dem ausgewählten Zahn (40) zu schätzen.

2. Verfahren nach Anspruch 1, wobei der Segmentierschritt aufweist:

Durchführen eines ersten Segmentierungsverfahrens, das mindestens einige der Zähne innerhalb des digitalen 3D-Modells von Zähnen übersegmentiert;
 Durchführen eines zweiten Segmentierungsverfahrens, das Punkte innerhalb des digitalen 3D-Modells von Zähnen als entweder in einen Innenbereich eines Zahns oder auf einer Grenze zwischen Zähnen in dem digitalen 3D-Modell von Zähnen klassifiziert; und
 Kombinieren von Ergebnissen des ersten und des zweiten Segmentierungsverfahrens, um ein segmentiertes digitales 3D-Modell von Zähnen zu erzeugen.

3. Verfahren nach Anspruch 2, wobei das erste Segmentierungsverfahren einen geometrischen Bergsteigeransatz aufweist, der topologische Strukturen berücksichtigt, und wobei das zweite Segmentierungsverfahren ein Maschinenlernen oder eine Zwischenraumerfassung aufweist.

4. Verfahren nach Anspruch 1, wobei der Vorhersageschritt ein Auswählen eines digitalen Modells eines Zahns aus bekannten Zahnformen basierend auf Eigenschaften eines Patienten aufweist, die dem digitalen 3D-Modell von Zähnen entsprechen.

5. Verfahren nach Anspruch 1, ferner aufweisend ein Schätzen von Verschleißbereichen in dem ausgewählten Zahn durch Erfassen von Unregelmäßigkeiten in dem digitalen Modell des Zahns (40), die bestimmte Kriterien erfüllen.

6. Verfahren nach Anspruch 1, wobei der Vergleichsschritt ein Erfassen von Oberflächenunterschieden zwischen dem digitalen Modell des Zahns (40) und dem digitalen Modell der vorhergesagten ursprünglichen Form aufweist.

7. Verfahren nach Anspruch 1, ferner aufweisend ein Anzeigen einer Angabe der geschätzten Verschleißbereiche (74).

8. Verfahren nach einem der vorstehenden Ansprüche, wobei der Zahnverschleiß eines Patienten anhand eines einzigen Scans des Gebisses des Patienten geschätzt wird.

9. System (10) zum Schätzen von Zahnverschleiß, aufweisend:

ein Modul zum Empfangen eines digitalen 3D-Modells von Zähnen;
 ein Modul zum Segmentieren des digitalen 3D-Modells von Zähnen, um einzelne Zähne innerhalb des digitalen 3D-Modells von Zähnen zu identifizieren;
 ein Modul zum Auswählen eines digitalen Modells eines Zahns (40) aus dem segmentierten digitalen 3D-Modell von Zähnen;
 ein Modul zum Vorhersagen einer ursprünglichen Form des ausgewählten Zahns, um ein digitales Modell einer vorhergesagten ursprünglichen Form zu erhalten; und
 ein Modul zum Vergleichen des digitalen Modells des Zahns (40) mit dem digitalen Modell der vorhergesagten ursprünglichen Form, um Verschleißbereiche in dem Zahn zu schätzen.

10. System (10) nach Anspruch 9, wobei das Modul zum Segmentieren aufweist:

ein Modul zum Durchführen eines ersten Segmentierungsverfahrens, das mindestens einige der Zähne innerhalb des digitalen 3D-Modells von Zähnen übersegmentiert;
 ein Modul zum Durchführen eines zweiten Segmentierungsverfahrens, das Punkte innerhalb des digitalen 3D-Modells von Zähnen als entweder in einem Innenbereich eines Zahns oder auf einer Grenze zwischen Zähnen in dem digitalen 3D-Modell von Zähnen klassifiziert; und
 ein Modul zum Kombinieren von Ergebnissen des ersten und des zweiten Segmentierungsverfahrens, um ein

segmentiertes digitales 3D-Modell von Zähnen zu erzeugen.

11. System (10) nach Anspruch 9, wobei das Modul zum Vorhersagen ein Auswählen eines digitalen Modells eines Zahns (40) aus bekannten Zahnformen basierend auf Eigenschaften eines Patienten aufweist, die dem digitalen 3D-Modell von Zähnen entsprechen.
12. System (10) nach Anspruch 9, ferner aufweisend ein Modul zum Schätzen von Verschleißbereichen in dem ausgewählten Zahn durch Erfassen von Unregelmäßigkeiten in dem digitalen Modell des Zahns, die bestimmte Kriterien erfüllen.
13. System (10) nach Anspruch 9, wobei das Modul zum Vergleichen ein Modul zum Erfassen von Oberflächenunterschieden zwischen dem digitalen Modell des Zahns und dem digitalen Modell der vorhergesagten ursprünglichen Form aufweist.
14. System (10) nach Anspruch 9, ferner aufweisend ein Modul (68) zum Anzeigen einer Angabe der geschätzten Verschleißbereiche (74).
15. System (10) nach einem der Ansprüche 9 bis 14, wobei das System (10) dazu ausgelegt ist, den Zahnverschleiß eines Patienten anhand eines einzigen Scans des Gebisses des Patienten zu schätzen.

Revendications

1. Procédé pour estimer l'usure des dents, comprenant les étapes consistant à :

recevoir un modèle numérique 3D de dents ;
segmenter le modèle numérique 3D de dents pour identifier des dents individuelles au sein du modèle numérique 3D de dents ;
sélectionner un modèle numérique d'une dent (40) à partir du modèle numérique 3D de dents segmenté ;
prédire une forme originale de la dent sélectionnée pour obtenir un modèle numérique d'une forme originale prédite ; et
comparer le modèle numérique de la dent (40) avec le modèle numérique de la forme originale prédite pour estimer des zones d'usure dans la dent sélectionnée (40).

2. Procédé selon la revendication 1, dans lequel l'étape de segmentation comprend :

la réalisation d'un premier procédé de segmentation qui sursegmente au moins certaines des dents au sein du modèle numérique 3D de dents ;
la réalisation d'un deuxième procédé de segmentation qui classe des points au sein du modèle numérique 3D de dents comme étant soit sur un intérieur d'une dent soit sur une limite entre des dents dans le modèle numérique 3D de dents ; et
la combinaison de résultats des premier et deuxième procédés de segmentation pour générer un modèle numérique 3D de dents segmenté.

3. Procédé selon la revendication 2, dans lequel le premier procédé de segmentation comprend une approche d'escalade géométrique qui prend en compte des structures topologiques, et dans lequel le deuxième procédé de segmentation comprend un apprentissage automatique ou une détection d'interstice.

4. Procédé selon la revendication 1, dans lequel l'étape de prédiction comprend la sélection d'un modèle numérique d'une dent à partir de formes de dents connues en fonction de caractéristiques d'un patient correspondant au modèle numérique 3D de dents.

5. Procédé selon la revendication 1, comprenant en outre l'estimation de zones d'usure dans la dent sélectionnée en détectant des discontinuités dans le modèle numérique de la dent (40) qui satisfont à des critères particuliers.

6. Procédé selon la revendication 1, dans lequel l'étape de comparaison comprend la détection de différences de surface entre le modèle numérique de la dent (40) et le modèle numérique de la forme originale prédite.

7. Procédé selon la revendication 1, comprenant en outre l'affichage d'une indication des zones d'usure estimées (74).
8. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'usure de dent d'un patient est estimée à partir d'un seul balayage de la dentition du patient.

5

9. Système (10) d'estimation de l'usure des dents, comprenant :

10

un module pour recevoir un modèle numérique 3D de dents ;
 un module pour segmenter le modèle numérique 3D de dents pour identifier des dents individuelles au sein du modèle numérique 3D de dents ;
 un module pour sélectionner un modèle numérique d'une dent (40) à partir du modèle numérique 3D de dents segmenté ;
 un module pour prédire une forme originale de la dent sélectionnée pour obtenir un modèle numérique d'une forme originale prédite ; et
 un module pour comparer le modèle numérique de la dent (40) avec le modèle numérique de la forme originale prédite pour estimer des zones d'usure dans la dent.

15

10. Système (10) selon la revendication 9, dans lequel le module de segmentation comprend :

20

un module pour réaliser un premier procédé de segmentation qui sursegmente au moins certaines des dents au sein du modèle numérique 3D de dents ;
 un module pour réaliser un deuxième procédé de segmentation qui classe des points au sein du modèle numérique 3D de dents comme étant soit sur un intérieur d'une dent soit sur une limite entre des dents dans le modèle numérique 3D de dents ; et
 un module pour combiner des résultats des premier et deuxième procédés de segmentation pour générer un modèle numérique 3D de dents segmenté.

25

11. Système (10) selon la revendication 9, dans lequel le module de prédiction comprend la sélection d'un modèle numérique d'une dent (40) à partir de formes de dent connues en fonction de caractéristiques d'un patient correspondant au modèle numérique 3D de dents.

30

12. Système (10) selon la revendication 9, comprenant en outre un module pour estimer des zones d'usure dans la dent sélectionnée en détectant des discontinuités dans le modèle numérique de la dent qui satisfont à des critères particuliers.

35

13. Système (10) selon la revendication 9, dans lequel le module de comparaison comprend un module pour détecter des différences de surface entre le modèle numérique de la dent et le modèle numérique de la forme originale prédite.

40

14. Système (10) selon la revendication 9, comprenant en outre un module (68) pour afficher une indication des zones d'usure estimées (74).

15. Système (10) selon l'une quelconque des revendications 9 à 14, dans lequel le système (10) est adapté pour estimer l'usure de dent d'un patient à partir d'un seul balayage de la dentition du patient.

45

50

55

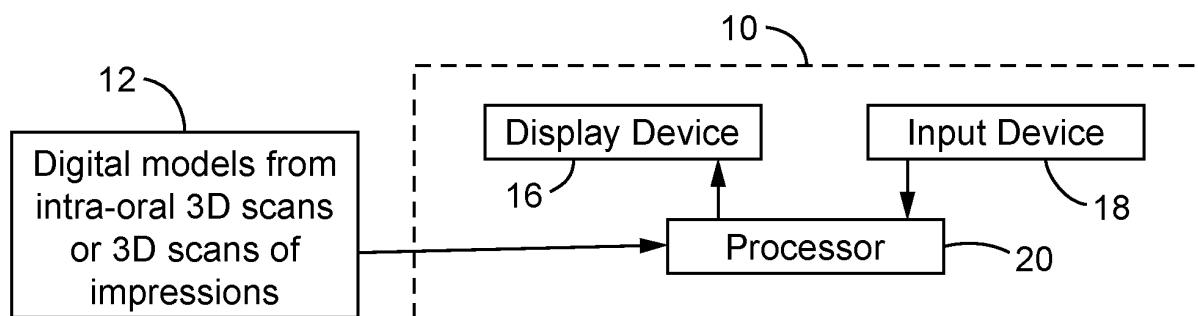


Fig. 1

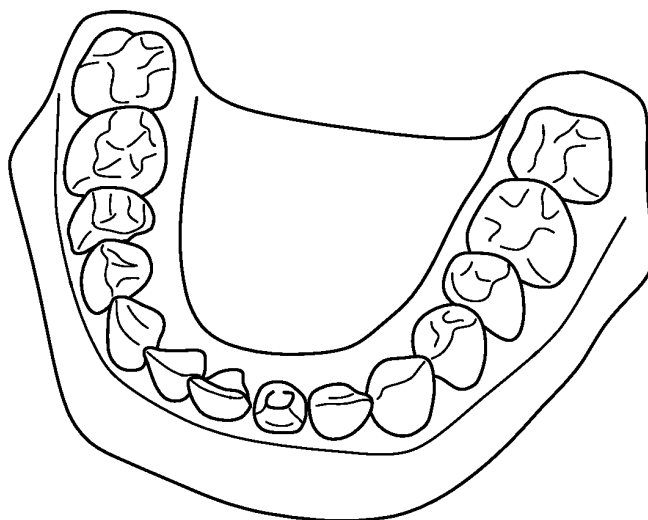


Fig. 2

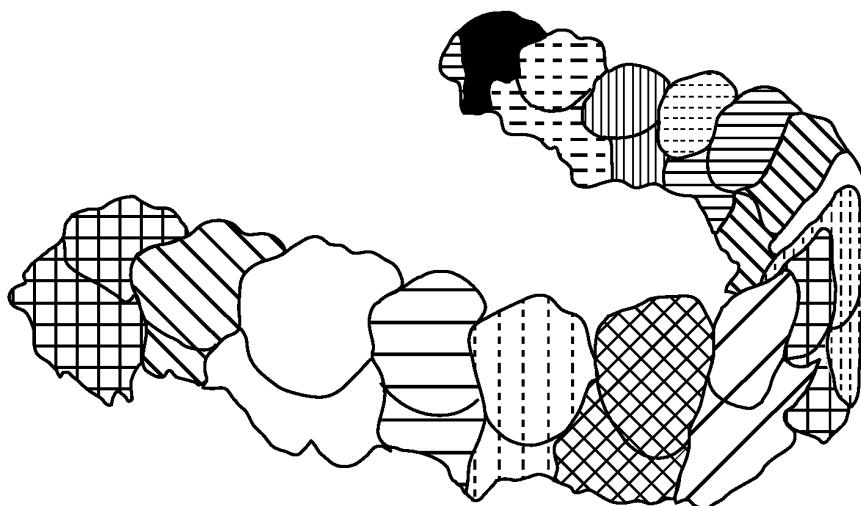
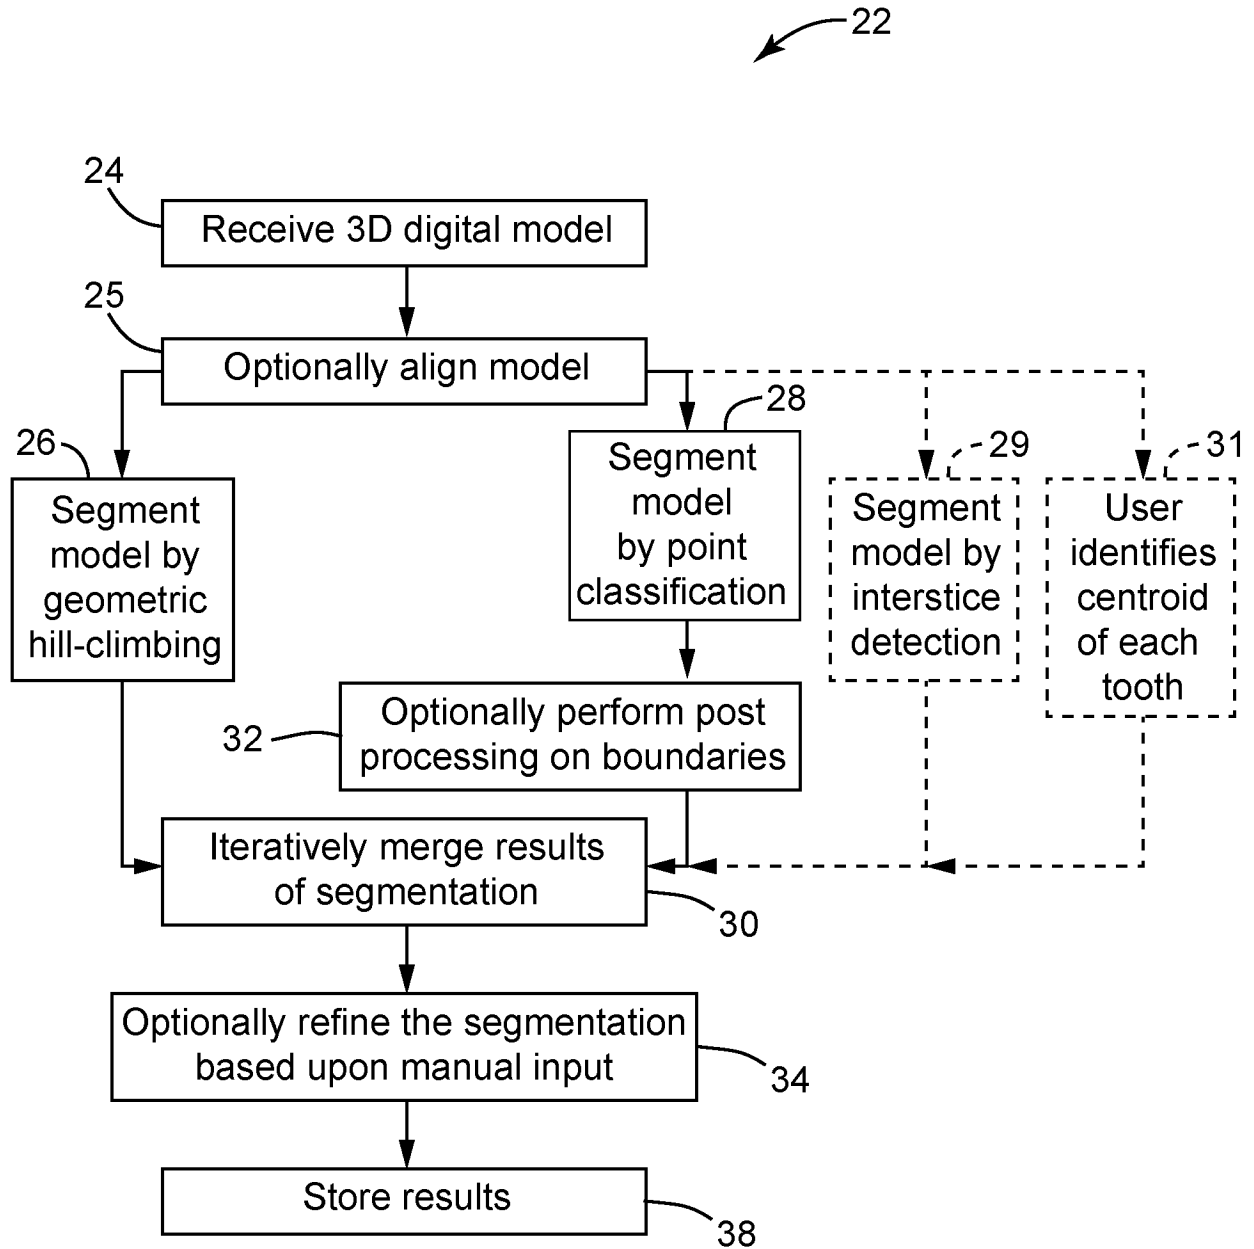


Fig. 3

**Fig. 4**

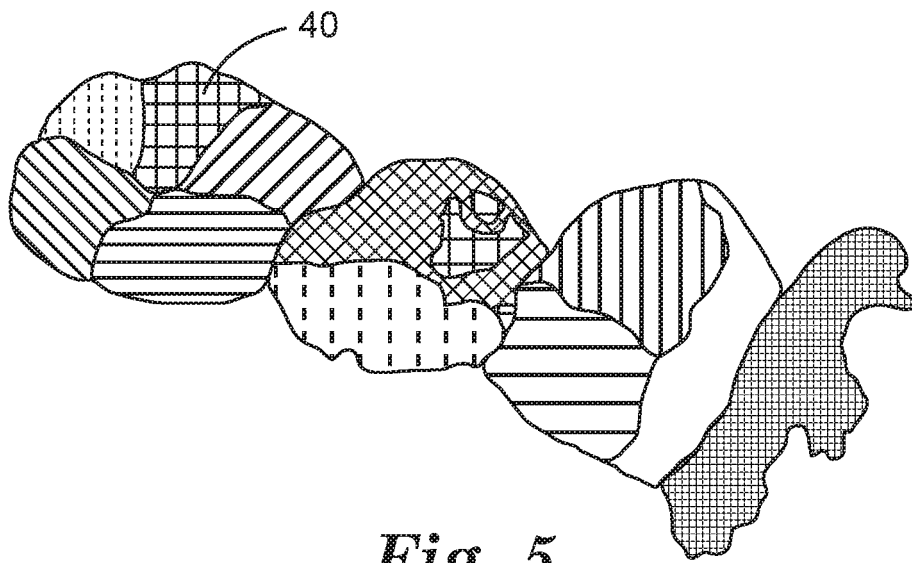


Fig. 5

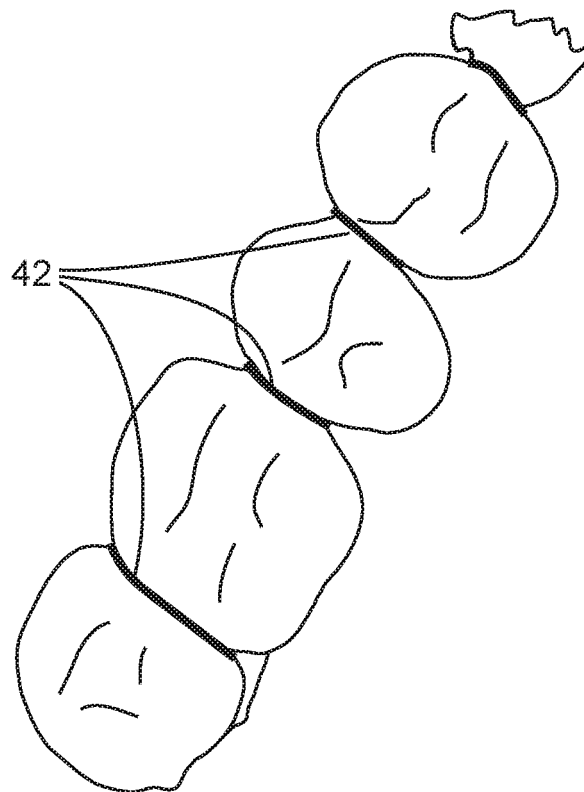


Fig. 6

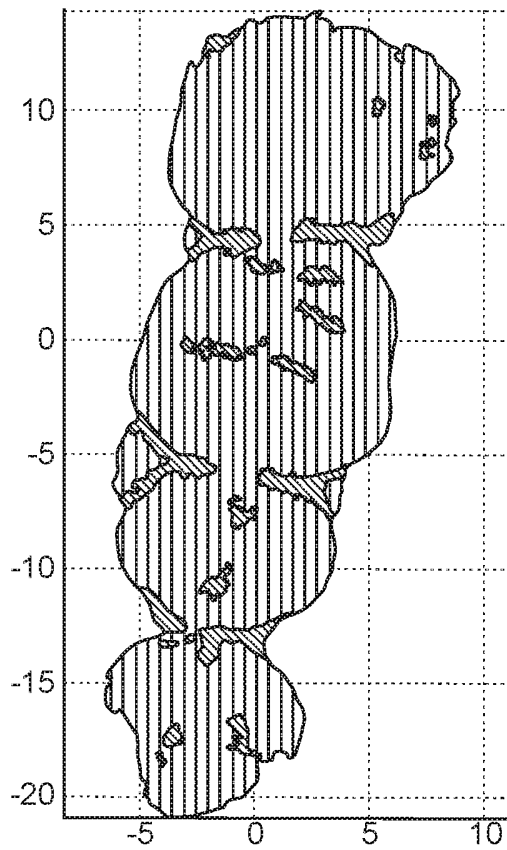


Fig. 7A

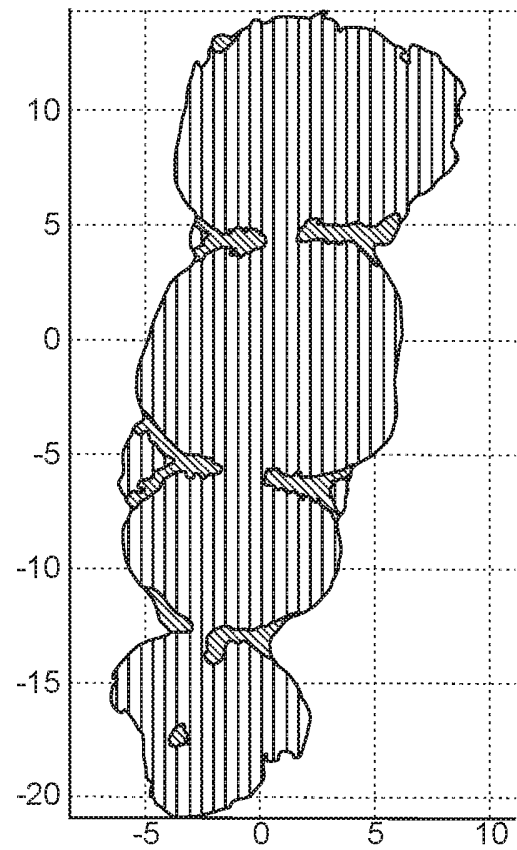


Fig. 7B

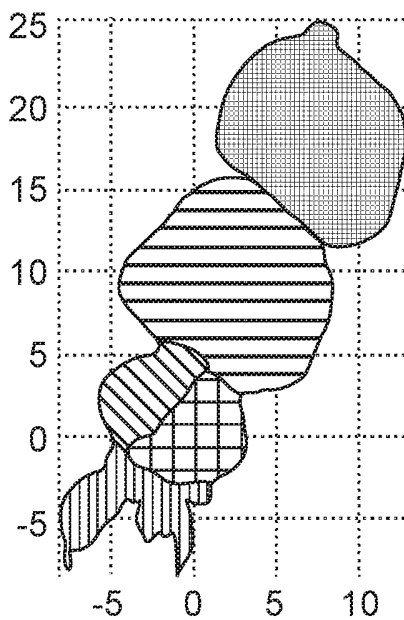


Fig. 8A

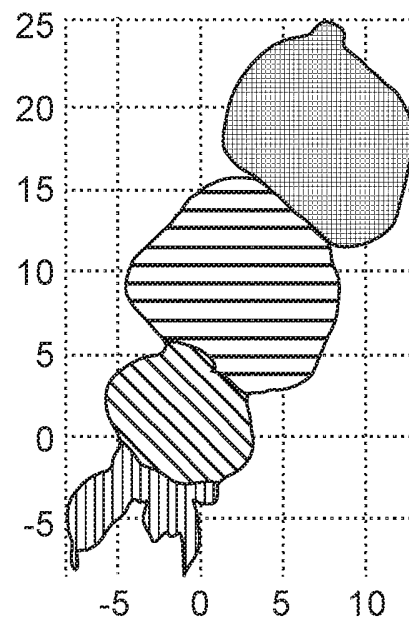
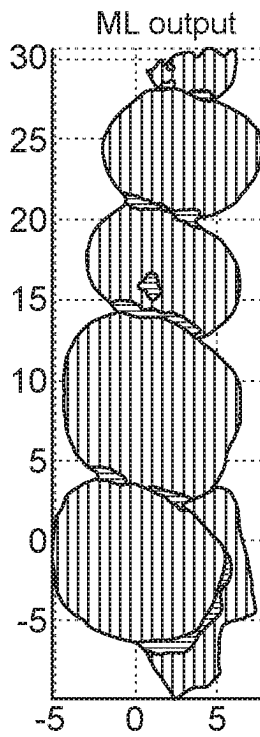
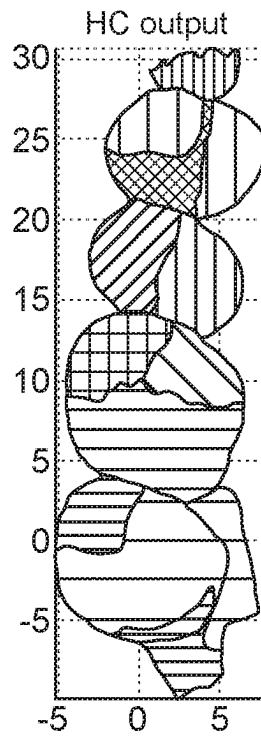
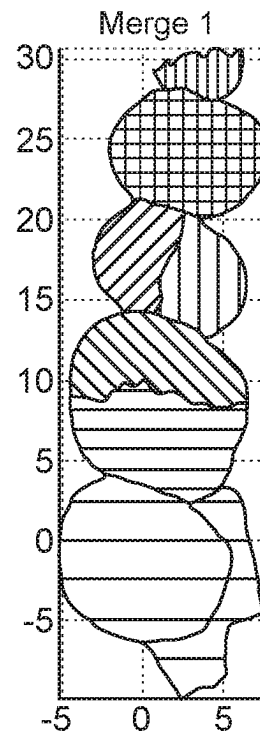
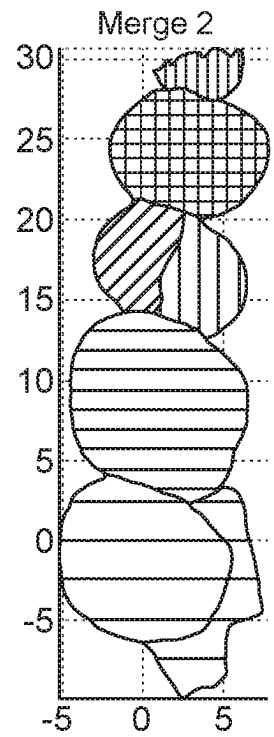
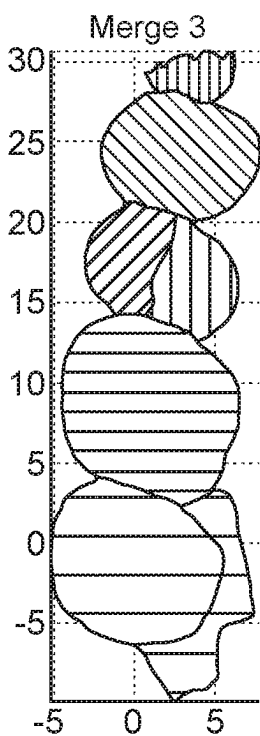
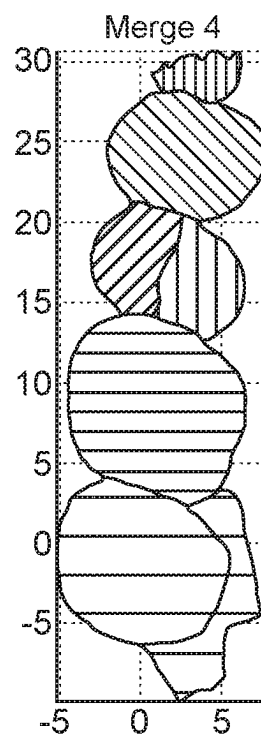
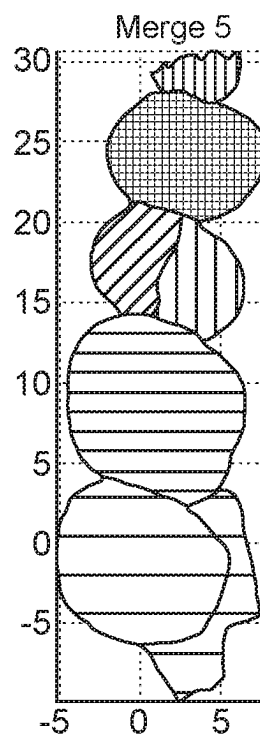
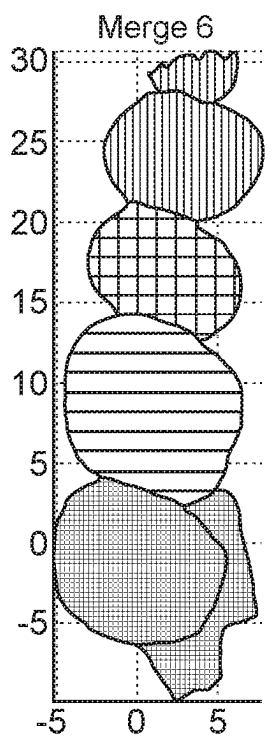
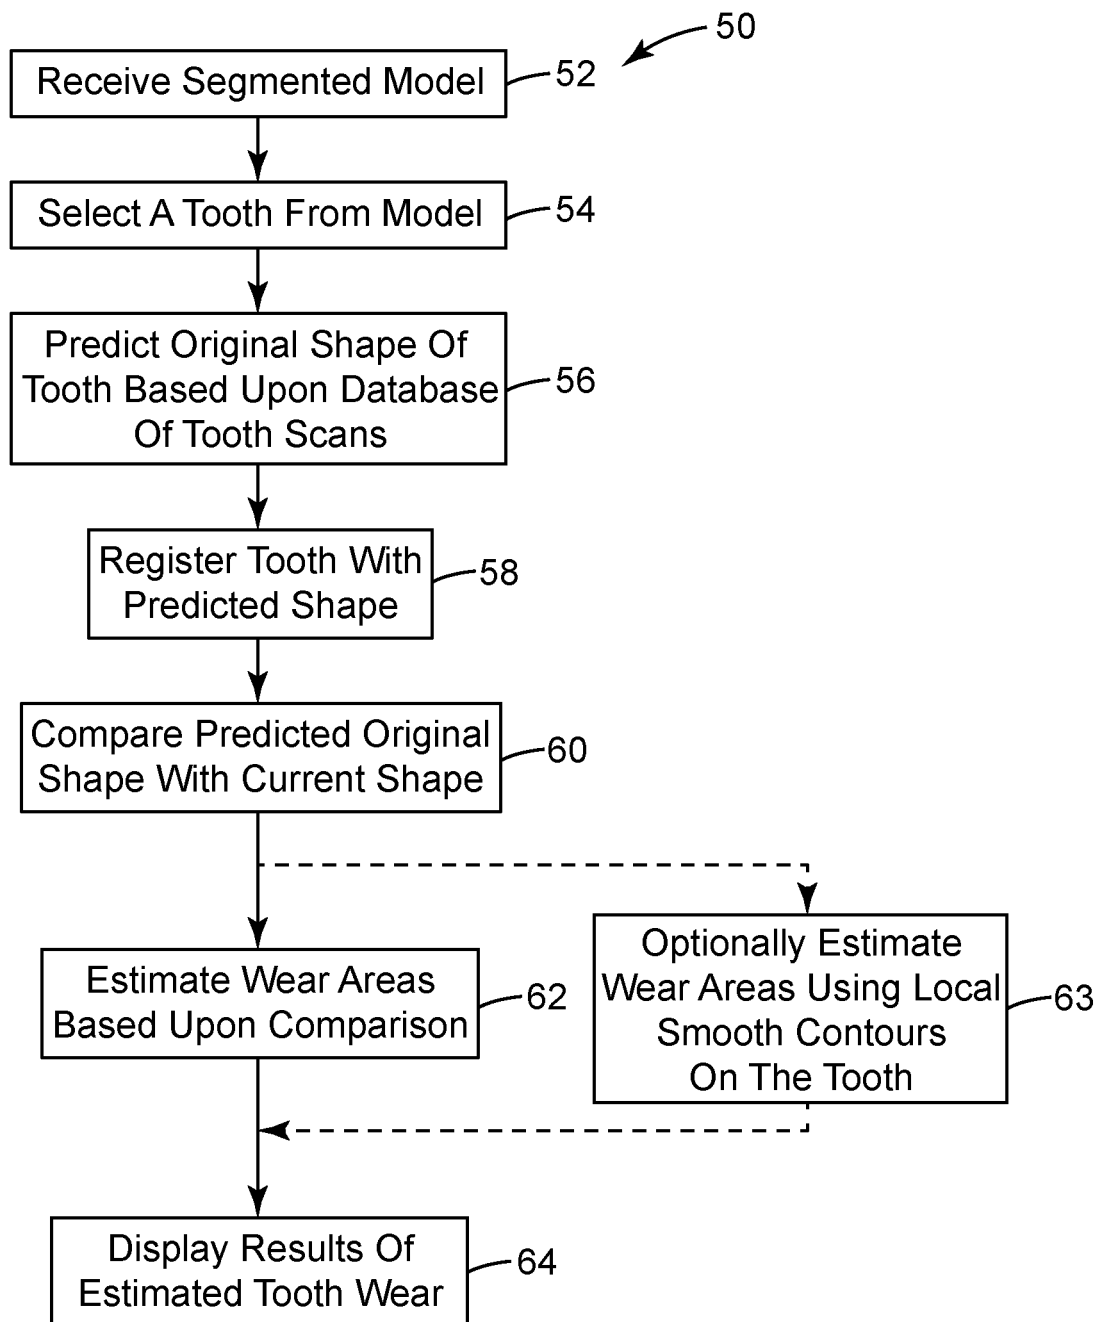


Fig. 8B

*Fig. 9A**Fig. 9B**Fig. 9C**Fig. 9D**Fig. 9E**Fig. 9F**Fig. 9G**Fig. 9H*

*Fig. 10*

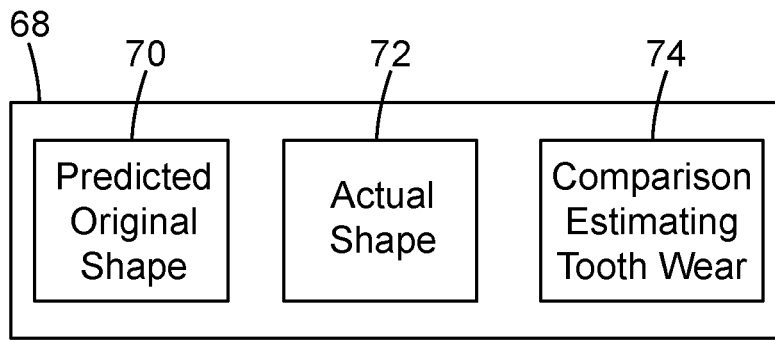


Fig. 11

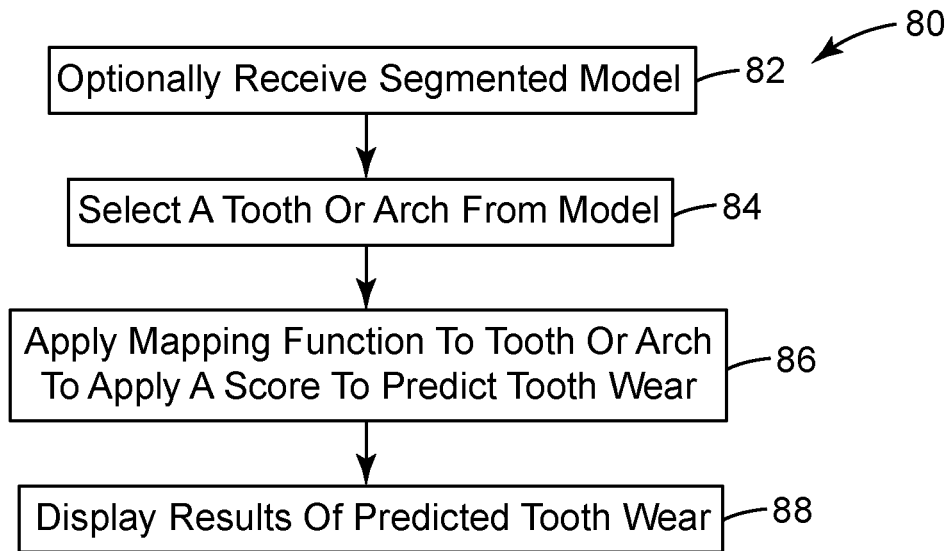


Fig. 12

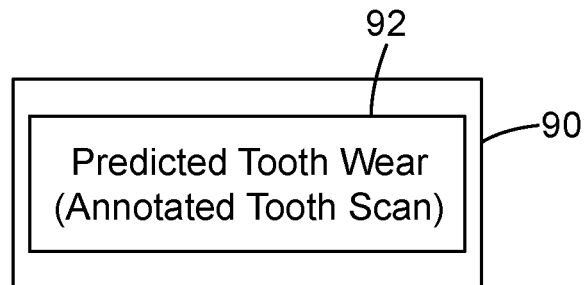


Fig. 13

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2258303 A1 [0002]
- US 20130308843 A1 [0003]
- EP 2604220 A1 [0004]
- WO 2010033404 A1 [0005]
- EP 2349062 A1 [0006]
- US 32131814 [0012]
- US 7956862 B [0013]
- US 7605817 B [0013]

专利名称(译)	使用颊内3D扫描仪图像估算和预测牙齿磨损		
公开(公告)号	EP3250111B1	公开(公告)日	2020-06-17
申请号	EP2016743844	申请日	2016-01-14
[标]申请(专利权)人(译)	明尼苏达州采矿制造公司		
申请(专利权)人(译)	3M创新有限公司		
当前申请(专利权)人(译)	3M创新有限公司		
[标]发明人	RIBNICK EVAN J SOMASUNDARAM GURUPRASAD STANKIEWICZ BRIAN J EID AYA SIVALINGAM RAVISHANKAR SCOTT SHANNON D SABELLI ANTHONY J LORENTZ ROBERT D		
发明人	RIBNICK, EVAN J. SOMASUNDARAM, GURUPRASAD STANKIEWICZ, BRIAN J. EID, AYA SIVALINGAM, RAVISHANKAR SCOTT, SHANNON D. SABELLI, ANTHONY J. LORENTZ, ROBERT D.		
IPC分类号	A61B5/00 G06T7/00 G16H30/40 G16H50/50 A61C9/00		
CPC分类号	A61B5/0062 A61B5/0088 A61B5/4547 A61B5/4557 A61B5/7267 A61B5/7275 A61B5/7278 A61B5/743 A61B2576/02 A61C9/0053 G06T7/0014 G06T2207/10028 G06T2207/30036 G16H30/40 G16H50/50 G06F19/30		
优先权	14/609529 2015-01-30 US		
其他公开文献	EP3250111A1 EP3250111A4		
外部链接	Espacenet		

摘要(译)

基于单个牙齿的3D数字模型估算和预测牙齿磨损的方法。分割3D数字模型以识别模型中的单个牙齿。从分段模型中选择牙齿的数字模型，并预测其原始形状。将数字模型与预测的原始形状进行比较，以估计磨损区域。也可以将基于与牙齿磨损有关的值的映射函数应用于所选的数字模型，以预测牙齿的磨损。

