

(19)



(11)

EP 1 404 219 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
24.11.2010 Bulletin 2010/47

(21) Application number: **02704284.5**

(22) Date of filing: **30.01.2002**

(51) Int Cl.:
A61B 5/113 (2006.01)

(86) International application number:
PCT/US2002/002636

(87) International publication number:
WO 2002/060370 (08.08.2002 Gazette 2002/32)

(54) **COMPOSITE ELASTIC AND WIRE FABRIC FOR PHYSIOLOGICAL MONITORING APPAREL**

ELASTIK/DRAHT-VERBUNDGEWEBE FÜR KLEIDUNG FÜR DIE PHYSIOLOGISCHE
ÜBERWACHUNG

TISSU DE FILS, ELASTIQUE, COMPOSITE POUR APPAREIL DE SURVEILLANCE
PHYSIOLOGIQUE

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **31.01.2001 US 774333**

(43) Date of publication of application:
07.04.2004 Bulletin 2004/15

(73) Proprietor: **Adidas AG**
91072 Herzogenaurach (DE)

(72) Inventor: **ISTOOK, Cynthia, L.**
Raleigh, NC 27613 (US)

(74) Representative: **Wegner, Hans**
Patent- und Rechtsanwälte
Bardehle - Pagenberg - Dost
Altenburg - Geissler
Galileiplatz 1
81679 München (DE)

(56) References cited:
GB-A- 1 596 298 US-A- 4 373 534
US-A- 4 753 088 US-A- 4 807 640
US-A- 5 074 129 US-A- 5 331 968
US-A- 5 416 961 US-A- 5 991 922
US-A- 6 047 203 US-A- 6 066 093

EP 1 404 219 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

[0001] The present invention relates generally to elastic fabrics used in the construction of garments, and, more particularly, to elastic fabrics having conductive wiring affixed to the fabric for use in garments intended for physiological monitoring of prescribed body functions.

Background of the Invention

[0002] As the administration of health care services has shifted from hospital-based or office-based care to home-based or patient-borne self care, strides have been made in the development of devices and garments for monitoring physiological signs, while allowing patients to maintain lifestyles as normal as practical. Thus, traditional invasive-type devices could not be used for such purposes. To overcome the inherent risks in these invasive monitoring devices, non-invasive devices have been developed for adaptation in conventional garments or have been worn on some part of the body; e.g., wristwatch-like.

[0003] The development of these new non-invasive devices has paralleled advances in systems for monitoring vital signs and for communicating this information, particularly when abnormal, directly to the patient as well as to health care providers through a variety of means, including infrared links. However, these devices heretofore have not provided the level of reliability and accuracy necessary for monitoring certain health conditions or vital signs.

[0004] There is known in the art a non-invasive physiological monitoring system comprising a garment in the form of a shirt, multiple inductive plethysmographic sensors attached to and supported by the garment, a transmitter attached to the garment and to the multiple sensors for transmitting signals from the garment, and a processor unit remote from the garment for receiving the signals and sending messages back to the patient. The sensors comprise ends of conductive wire attached to the garment at the measurement points for the physiological signs. The sensors have been attached to the garment in a prescribed curved configuration, desirably sinusoidal, so that as the body expands and contracts the sinusoidal pattern changes with a corresponding change in inductance in the wires. Inductance is the input into the transmitter that is subsequently translated into a physiological reading.

[0005] Inductive plethysmography systems according to the state of the art are also disclosed in GB1596298, US 4373534, US 5331968, US4807640.

[0006] However, the manner in which these conductive wires have heretofore been attached to the garment have led to less than optimal accuracy and reliability as the relative locations of the wires in the garments have shifted or the attachment points have degraded. For example, conductive wires have been adhered to paper

substrates and subsequently attached on or within sleeves of the garment adapted for their placement. While these constructions have advanced the art of physiological monitoring, they have not proven satisfactory for consistent, long-term performance; e.g., paper substrates wear and tear and conductive wires lose their designed configuration for proper monitoring.

Summary of the Invention

[0007] The present invention relates to a fabric for use in apparel of the type used for physiological monitoring of prescribed human body functions. In the preferred embodiment, this fabric includes an elongated band of elastic material that is stretchable in the longitudinal direction, and at least one conductive wire incorporated into the elastic fabric band in a prescribed curved configuration. As the fabric stretches, the curvature of the conductive wire changes. As this occurs, the inductance of the conductive wire varies, and is measured and processed by an attached or monitoring unit. An object of the present invention is to provide a fabric and conductive wire construction that will provide reliable, consistent, and long-term performance.

[0008] The elongated band of elastic material may be formed in any of the conventional ways for forming elastic fabric. These include warp knitting, weft knitting, weaving, braiding, or forming in a non-woven construction. Warp knitting is preferable because conventional crochet machines are adaptable to form bands of elastic having narrow widths. The elastic band of the present invention is desirably 1.90 cm to 1.27 cm ($\frac{3}{4}$ to $\frac{1}{2}$ inches) wide, but may be as narrow as 0.64 cm ($\frac{1}{4}$ inch). The elastomeric material used to form the elongated band of elastic material is desirably Lycra® or Spandex® because of their superior elasticity. Additionally, because these man-made filaments are not abrasive or irritating to the skin, they are quite suitable for applications where the elastomeric material is in direct contact with the skin. However, for most applications, natural extruded filaments of latex may be used for the elastomeric material.

[0009] In forming the elastic band on a conventional crochet machine, such as a machine manufactured by Jacob Müller as Model RD3-8/420 (Jakob Müller of America, Inc., Charlotte, N.C.), the elastic filaments form the warp beams in a longitudinal direction. The fill, or weft, may be formed from a variety of yarns including, but not limited to, single-ply, 150 denier polyester; 2-ply, 70 denier nylon; 2-ply, 100 denier polyester; and, 2-ply, 150 denier polyester.

[0010] At least one conductive wire is incorporated with the elastic fabric. As used herein, "incorporated" means that the conductive wiring is intermeshed with the elastic fabric structure. Copper wire in the 27 American wire gauge ("AWG") to 28 AWG range has been found most suitable for knitting on crochet machines; however, as those skilled in the art will appreciate, other sizes may be used depending upon the particular machine and ma-

chine setup being employed. One such suitable wire is NE 12544 TR Tinned Copper Wire, available from New England Electric Wire Corporation of Lisbon, New Hampshire. The wire may be either braided or stranded and coated or uncoated as long as it may be shaped and incorporated into the fabric in a prescribed curved configuration, preferably sinusoidal.

[0011] For monitoring certain physiological functions where a higher degree of sensitivity and accuracy is required, multiple wires are interconnected in a garment to form a single continuous conductive circuit that encircles the monitored area a number of times corresponding to the number of wires. Where multiple conductive wires are required, they may be intermeshed with a single elastic fabric band so that they are substantially in parallel relation or are in substantially overlapped relation. Once the elastic fabric band is incorporated into a garment, the wires may be interconnected.

[0012] Alternatively, the conductive wire and fabric structure may be formed in a braided construction. Formed in this manner, a number of groupings of elastomeric fibers or filaments may be intertwined by braiding. One of the groupings of fibers or filaments will carry a conductive wire, coated or uncoated. The size and number of elastomeric fibers or filaments in each grouping, in combination with the number of groupings, will determine the size of the sinusoidal pattern of the wire. This braiding technique results in a more compact construction that will stretch and contract, providing an output signal to a monitoring unit.

[0013] As a further alternative, the conductive wire and fabric structure may be formed in a non-woven construction. At least one conductive wire, shaped in a sinusoidal arrangement, is placed in a long narrow mold. Manufactured filaments; e.g., polyester, nylon, etc., are extruded and crisscrossed over at least one side of the shaped wire to form a web or mesh-like overlay. Finally, a film of elastomeric material is extruded to encapsulate one or both surfaces of the wire and web layers. When cooled and dried, this structure will stretch and contract to deliver a satisfactory, reliable output signal.

[0014] These and other aspects of the present invention will become apparent to those skilled in the art after a reading of the following description of the preferred embodiment when considered with the drawings.

Brief Description of the Drawings

[0015]

Figure 1 is a perspective view of a composite fabric constructed according to the present invention with a single uncoated conductive wire;

Figure 2 is a perspective view of the composite fabric of Figure 1 with the fabric stretched in the longitudinal direction;

Figure 3 is a perspective view of a composite fabric constructed according to the present invention with

a plurality of parallel-coated conductive wires;

Figure 4 is a perspective view of the composite fabric of Figure 3 with the fabric stretched in the longitudinal direction;

Figures 5A-B show the setup specifications for a single wire construction;

Figures 6A-B show the setup specifications for a three-wire construction;

Figure 7 is a schematic illustration of a braided fabric incorporating one conductive wire;

Figure 8 is a front view of a garment constructed according to the present invention incorporating the composite fabric; and

Figures 9A-B are block diagrams describing the physiological monitoring unit of the present invention.

Detailed Description of the Preferred Embodiments

[0016] Referring now to Figure 1, there is illustrated a fabric construction, shown generally as 10, for use in apparel of the type used for monitoring prescribed physiological functions. Fabric 10 generally comprises an elongated band of elastic material 12 and at least one conductive wire 14 affixed to the elastic fabric band. As used herein, the term "affixed" means knitted in, sewn onto, or intermeshed with the elastic fabric band. The scope of the present invention is, however, restricted to the alternative of having the conductive wire intermeshed with the elastic fabric band. Figure 3 further demonstrates a fabric construction 100 used for monitoring applications that require multiple conductive wires 140. Where multiple conductive wires 140 are required, they may be affixed to the band of elastic material 120 in substantially parallel fashion, or may be overlapped

[0017] The elongated band of elastic 12, 120 may be formed in any of the conventional ways for forming elastic fabrics including warp knitting, weft knitting, or weaving. Warp knitting on a crochet machine is particularly suited to the present invention since this type of machine is easily adaptable to producing elastic fabric bands having narrow widths. One such machine is an 8-bar crochet machine manufactured by Jacob Muller as Model RD3-8/420 (8-bar, 420mm).

[0018] The band of elastic 12, 120 may vary in width from less than 2.54 to 25.4 cm (one inch to ten inches) but a width of approximately 2.54 cm (one inch) has been found satisfactory or constructions having one to three conductive wires 14, 140. For an elastic band 12, 120 stretchable in the longitudinal direction, the filaments comprising the warp are elastomeric. Spandex® or Lycra®, available from DuPont, have proven most suitable in the present invention. These manmade strands have superior elasticity and have been found to be less abrasive and less irritating to bare skin than natural strands. However, for those applications in which direct contact between the skin and the fabric 10, 100 is not contemplated, extruded natural latex strands will provide

satisfactory elasticity.

[0019] Since elasticity is required only in the warp, or longitudinal, direction, a variety of fill, or weft, yarns may be used to complete the formation of fabric 10, 100. While single ply, 150 denier polyester is quite suitable, other suitable yarns including 2 ply, 70 denier nylon; 2 ply, 100 denier nylon; and, 2 ply, 150 denier polyester, have been found suitable. However, other yarns, formed of natural and man-made materials, as well as other deniers, may also be suitably used.

[0020] The wire used to create the conductive fabric must have conductive properties, but otherwise may be formed in a number of ways. It may be stranded, braided, cotton covered, Teflon coated, uncoated, or any variety of other configurations. The curved shape, preferably sinusoidal, that is created with the wire is ideally configured to have a height of approximately 0.95 cm (3/8") from base to peak, with the sinusoidal curve repeating approximately each 0.95 cm (3/8"). This has proven appropriate for the inductance process. However, the height and repeatability of the sinusoidal shape could vary considerably and still perform the required functions. The main consideration is that the conductive wire pattern expands and contracts without hindrance when placed in the appropriate locations about the body.

[0021] Conductive wire 14, 140 may be operably affixed to the elastic band 12, 120 by sewing in a separate operation subsequent to formation of the band 12, 120, but, according to the invention, it has been found most efficient and cost effective to form the entire composite elastic and wire fabric integrally in the same knitting operation. "Operably affixed" means that the shape of the conductive wire pattern will change proportionally as the elastic band 12, 120 is stretched. As shown in Figures 1 and 3, conductive wire 14, or conductive wires 140 have been stitched onto the face of elastic bands 12, 120 in a sinusoidal pattern during the knitting operation. While other curve-like configurations may be acceptable, a sinusoidal pattern formed in a warp-knitting process is more easily formed and provides the optimal geometry for the intended application. Critical to the wire configuration is the presence of rounded curves with no sharp turns.

[0022] Conductive wires 14, 140 may vary in size and construction depending upon the capability of the machine used to form fabric 10, 100. Copper wire constructions in the 27 AWG to 28 AWG range have proven most desirable for fabric 10, 100 knitted on crochet machines. For example, 27 AWG 12-5-44 cotton braided, 27 AWG 12-5-44-braided wire, or 28 AWG 40/44 tinned copper wire have all proven acceptable. Conductive wire 14, 140 may be either coated or uncoated, with the choice for coating being based on aesthetic, as opposed to functional, reasons. A polyvinyl chloride (PVC) coating is both conventional and acceptable for the present invention. Also, a fabric cover such as cotton may be used as an outer covering for the conductive wire 14, 140.

[0023] To keep from bending or knotting the conduc-

tive wire 14, 140, it has been found that a knitting pattern movement allowing the wire 14, 140 to remain between knitting needles for two consecutive stitches provides an optimal construction that permits the wire 14, 140 to stretch uniformly as elastic band 12, 120 stretches. Figures 2 and 4 best illustrate how wire 14, 140 uniformly changes shape as elastic band 12, 120 is stretched in a longitudinal direction. This knitting pattern allows a "softer" bending of the wire 14, 140 by not moving the wire 14, 140 with each stitch.

[0024] In forming a knitted fabric structure, the crochet machine draws each individual warp yarn through a guide mounted on a guide bar. Tension is applied to stretch the warp yarns.

[0025] Movements of the guide bar (lapping) cause each yarn to lap around a needle. After the yarns are lapped, the needle bar on the machine is moved so as to cause loops to be formed simultaneously at all needles, resulting in a whole knitted course. A yarn inlay is next drawn across the lower warp yarns. As the guide bar is displaced sideways (also known in the art as "to shog") by one or more needles, the upper and lower warp yarns change places before the next cycle produces another course. The shogging of the guide bar determines the structure of the fabric.

[0026] For a fabric and wire construction employing a single wire, the machine is initially set up for two warp beams with a total of 15 Lycra® warp yarns/filaments and 1 nylon or polyester weft inlay yarn. Figures 5A-B provides the setup specifications for this construction. Odd numbered warp yarns are on one beam, while even numbered yarns are on the other beam. In addition to this, a beam of 1 conductive wire is setup and fed through a yarn guide that is directed by a special bar. The bar controls the movement of the guide back and forth across the fabric as the fabric is being formed. The appropriate guide for this formation holds the conductive wire in the position (along the 3rd or 4th warp yarn from the right) for 2 stitches, then shogs left over the next warp yarn (position 1) where it holds for 2 stitches. The bar then causes the guide to shog left again, to position 2 for 2 stitches, and so on until it reaches the 3 or 4 warp yarn on the left side of the fabric setup. At that point it begins shogging to the right in the same manner until it returns to position 0 to start the process over. This 0-0-1-1-2-2-3-3-4-4-3-3-2-2-1-1 pattern allows the creation of a sinusoidal shape that has both an amplitude and peak of approximately 0.95 cm (3/8").

[0027] For a fabric and wire construction employing three conductive wires, the warp machine is setup with 17 or more Lycra® warp yarns and 1 nylon or polyester weft inlay yarn. Figures 6A-B provides the setup specifications for this construction. In addition to this, a beam of 3 conductive wires is setup and fed through 3 separate yarn guides that are directed by the same special bar as is used for the single conductive wire. The bar controls the movement of the 3 guides back and forth across the fabric as the fabric is being formed. The appropriate guide

for this formation holds the conductive wires in the 0 position (wire #1 along the 3rd yarn, wire #2 along the 4th yarn, and wire #3 along the 5th yarn from the right) for 2 stitches. The control bar then shogs the three wire guides left over to the next warp yarn (position 1) where it holds for 2 stitches. The bar then causes the guides to shog left again, to position 2 for 2 stitches, and so on until it reaches the 3rd or 4th warp yarn on the left side of the fabric setup. At that point it begins shogging to the right in the same manner until it returns to position 0 to start the process over. This 0-0-1-1-2-2-3-3-4-4-3-3-2-2-1-1 pattern allows the creation of three parallel sinusoidal shapes that have both an amplitude and peak of 0.95 cm (3/8").

[0028] As shown in Figure 7, another embodiment of the present invention, shown generally in an open and enlarged view as 200, is a composite fabric and conductive wire band formed by braiding. Formed in this manner, at least three groupings 210, 220, and 230 of elastomeric fiber may be intertwined by knitting on a warp knitting machine with weft insertion (such as Jacob Müller model Raschelina RD3-8/420, or an equivalent model) in a conventional manner known in the art. One of the groupings of fibers 230 will carry a conductive wire, coated or uncoated. For example, one grouping may consist of 1/150 textured polyester or equivalent with an elastomer of Spandex® or rubber or equivalent. These may be arranged as 6 ends of 1/150 polyester weft yarn, 23 ends of 1/150 polyester warp yarn, 23 ends of 1120 Spandex® warp yarn, and 1 or more ends of conductive wire in a warp direction. The size and number of elastomeric fibers in each grouping, in combination with the number of groupings, will determine the size of the sinusoidal pattern of the wire. This braiding technique results in a more compact construction that will stretch and contract, providing an output signal to a monitoring unit for interpretation. Although three groupings are shown in Figures 5A-B, groupings of 5, 7, 9 or more may also be intertwined; depending upon the capability of the machine.

[0029] Those skilled in the art will appreciate that there are other warp to form constructions that will function as desired. For example, the conductive wire and fabric structure may be formed in a non-woven embodiment. At least one conductive wire, shaped in a sinusoidal arrangement is placed in a long narrow mold. Manufactured filaments; e.g., polyester, nylon, etc., are extruded and crisscrossed over at least one side of the shaped wire to form a web or mesh-like overlay. Finally, a film of elastomeric fiber is extruded to encapsulate one or both surfaces of the wire and web layers. When cooled and dried, this structure will stretch and contract to deliver a satisfactory, reliable output signal.

[0030] Turning to Figure 8, a garment 300 in the form of a shirt is shown with composite fabric and wire fabric bands 310, 320, and 330 environmentally depicted at representative locations on garment 300. Band 310 illustrates how a 3-wire construction is used in regions such as the wearer's chest, while 320 and 330 are single wire

constructions. The conductive wires, shown as 312, 314, 316, 322, and 332, provide outputs to an attached monitoring unit 340. Although shown loosely connected, the conductive wires may otherwise be attached or affixed to garment 300.

[0031] The fabric and wire bands may be attached to garments in any of several ways. They may be inserted into tunnels or casings created within the garments, including the sleeves and/or collar bands. They may be sewn onto the inside or outside surface of the garment in a stretched shape so that the garment contracts after sewing. Also, they may be attached to the garment with a series of strategically placed "belt loops" on the inside or the outside of the garment. Monitoring unit 340 may be fitted into a pocket in the garment, clipped onto the garment or other item of clothing, or otherwise conveniently carried by a wearer of the garment.

[0032] Fig. 9A illustrates a preferred embodiment of a programmable monitoring unit adapted to monitor a garment, such as garment 300, which produces inductive signals in response to changes in a wearer's physiological functions. The preferred embodiment generally includes interface unit 350 and user device 360. The interface unit includes interface circuit 354, which measures in well known manners the inductance of one or more pairs of monitoring leads 352, and memory 356, which stores monitoring results. Preferably, memory 356 is configured as a removable card, such as the widely used flash memory cards. The user device is preferably a standard handheld device, such as a Handspring VISOR, configured for coupling to interface unit 352 by means of a plug, socket, receptacle, or so forth, generally indicated as interface 358, and loaded with program instructions which cause it to perform the processing described below. Optionally, the user interface device is configured for remote communications, such as by a wireless link indicated by antenna 362.

[0033] Fig. 9B depicts the operation of a physiological monitoring system comprising a garment with composite fabric construction and a monitoring unit. Since the fabric constructions are incorporated into the garment such that they are snugly fitted around the wearer's body, as the wearer's physiological functions change, as when breathing in and out, the geometry of the body changes (370); i.e., expands and contracts. This causes the fabric to stretch and contract (372) in response to changes in the body geometry. The stretching and contracting causes the curvature, or sinusoidal shape, of the affixed conductive wires to change accordingly. This change in shape of the conductive wires causes the inductance of the individual wires to vary (373). The monitoring unit measures the varying inductance (374) and processes it (375) in order to obtain the wearer's physiological indications from the measured inductance, to store the monitoring results in memory 356, and optionally, to transmit the results remotely. Finally, the monitoring results may be displayed (376) to the wearer and alarms generated if necessary.

[0034] Alternatively, in a simpler embodiment, the monitoring results can be directly transmitted to a remote processing location, without processing in the vicinity of the wearer. This embodiment, although less preferred for an ambulatory user, may be more preferred when the user's motion is confined, for example, to a bed.

Claims

1. A composite fabric construction (10, 100) for use in apparel of the type used for monitoring physiological parameters comprising:
 - (a) an elongated band or cord of elastic material which is stretchable in the longitudinal direction (12, 120); and
 - (b) at least one conductive wire (14, 140) intermeshed with the structure of said elastic fabric band or cord in a prescribed curved pattern extending along said longitudinal direction, wherein stretching or contracting of the fabric changes the curved pattern of the wire, and thus changes the inductance of the wire.
2. The composite fabric of Claim 1 wherein said conductive wire (14, 140) is knitted into the structure of said elastic band.
3. The composite fabric of Claim 1 wherein said elastic band (12, 120) is a knitted fabric.
4. The composite fabric of Claim 1 wherein said prescribed curved pattern is substantially sinusoidal.
5. The composite fabric of Claim 1 wherein said curved pattern has an amplitude of about 0.95 cm (3/8 inches) and a repeatability about every 0.95 cm (3/8 inches) when in an unstretched condition.
6. The composite fabric of claim 1 comprising multiple conductive wires (140) intermeshed with the structure of said elastic fabric band.
7. The composite fabric of claim 1 wherein said conductive wire comprises (14, 140) a copper wire for use in knitting or crochet machines.
8. A garment (300) of the type for use in physiological monitoring of prescribed body functions comprising a fabric construction of any one of claims 1 to 7, wherein the elongated band or cord of elastic material (310, 320, 330) is incorporated into the garment to expand and contract responsive to the body function.
9. A system for physiological monitoring of prescribed body functions comprising

- (a) a garment according to claim 8 (300).
- (b) a monitoring unit (340) for measuring and processing an inductance signal, said monitoring unit being responsive to the inductance of the at least one conductive wire.

Patentansprüche

1. Eine Textilverbundstoffkonstruktion (10, 100) zur Verwendung in Bekleidung, wie sie zur Überwachung physiologischer Parameter verwendet wird, aufweisend:
 - a) ein ausgedehntes Band oder Gurt eines elastischen Materials, welches in longitudinaler Richtung (12, 120) dehnbar ist; und
 - b) mindestens einen leitenden Draht (14, 140) der mit der Struktur des elastischen Bandes oder Gurtes gemäß einem vorgeschriebenen kurvenförmigen Muster entlang der longitudinalen Richtung vermascht ist, wobei Dehnen oder Kontrahieren des Stoffes die kurvenförmige Struktur des Drahtes und daher die Induktivität des Drahtes ändert.
2. Textilverbundstoff gemäß Anspruch 1, wobei der leitende Draht (14, 140) in die Struktur des elastischen Bandes eingestrickt ist.
3. Textilverbundstoff gemäß Anspruch 1, wobei das elastische Band (12, 120) ein gestrickter Stoff ist.
4. Textilverbundstoff gemäß Anspruch 1, wobei die vorgeschriebene kurvenförmige Struktur im Wesentlichen sinusförmig ist.
5. Textilverbundstoff gemäß Anspruch 1, wobei die kurvenförmige Struktur eine Amplitude von etwa 0,95 cm (3/8 inches) hat und sich etwa alle 0,95 cm (3/8 inches) wiederholt, wenn es sich in einem nicht gedehnten Zustand befindet.
6. Textilverbundstoff gemäß Anspruch 1, aufweisend mehrere leitende Drähte (140) welche mit der Struktur des elastischen Stoffbandes vermascht sind.
7. Textilverbundstoff gemäß Anspruch 1, wobei der leitende Draht (14, 140) einen Kupferdraht aufweist, der in Strick- oder Häkelmaschinen verwendet werden kann.
8. Ein Kleidungsstück (300) geeignet zur Verwendung zur physiologischen Überwachung vorgegebener Körperfunktionen aufweisend eine Stoffkonstruktion gemäß einem der Ansprüche 1 bis 7, wobei das gedehnte Band oder Gurt aus elastischem Material (310, 320, 330) in das Kleidungsstück eingebaut ist,

so dass es sich in Antwort auf die Körperfunktionen ausdehnt und kontrahiert.

9. System zur physiologischen Überwachung von vorgeschriebenen Körperfunktionen, aufweisend

a) ein Kleidungsstück gemäß Anspruch 8 (300);
b) eine Überwachungseinheit (340) zum Messen und Verarbeiten eines Induktionssignals, wobei die Überwachungseinheit auf die Induktivität des zumindest einen leitenden Drahtes in Antwort darauf reagiert.

Revendications

1. Une structure de textile composite (10, 100) destinée à être utilisée dans un équipement du type utilisé pour surveiller des paramètres physiologiques, comprenant :

(a) une bande allongée ou un cordon de matériau élastique qui est étirable dans la direction longitudinale (12, 120) ; et

(b) au moins un fil conducteur (14, 140) entremêlé avec la structure de ladite bande ou dudit cordon de textile élastique en un motif courbe prescrit s'étendant le long de ladite direction longitudinale, où l'étirement ou la contraction du textile modifie le motif courbé du fil, et change ainsi l'inductance du fil.

2. Le textile composite de la revendication 1, dans lequel ledit fil conducteur (14, 140) est tricoté dans la structure de ladite bande élastique.

3. Le textile composite de la revendication 1, dans lequel ladite bande élastique (12, 120) est un textile tricoté.

4. Le textile composite de la revendication 1, dans lequel ledit motif courbe prescrit est substantiellement sinusoïdal.

5. Le textile composite de la revendication 1, dans lequel ledit motif courbe présente une amplitude d'environ 0,95 cm (3/8 pouce) et une répétabilité d'environ tous les 0,95 cm (3/8 pouce) lorsqu'il est dans un état non étiré.

6. Le textile composite de la revendication 1, comprenant des fils conducteurs multiples (140) entremêlés avec la structure de ladite bande de textile élastique.

7. Le textile composite de la revendication 1, dans lequel ledit fil conducteur comprend (14, 140) un fil de cuivre pour une utilisation avec des machines de tricotage ou au crochet.

8. Un vêtement (300) du type destiné à être utilisé pour la surveillance physiologique de fonctions corporelles, comprenant une structure textile selon l'une quelconque des revendications 1 à 7, dans lequel la bande allongée ou le cordon de matériau élastique (310, 320, 330) est incorporé dans le vêtement pour s'étendre et se contracter en réponse à la fonction corporelle.

9. Un système pour la surveillance physiologique de fonctions corporelles prescrites, comprenant :

(a) un vêtement selon la revendication 8 (300),
(b) une unité de surveillance (340) pour mesurer et traiter un signal d'inductance, ladite unité de surveillance répondant à l'inductance du au moins un fil conducteur.

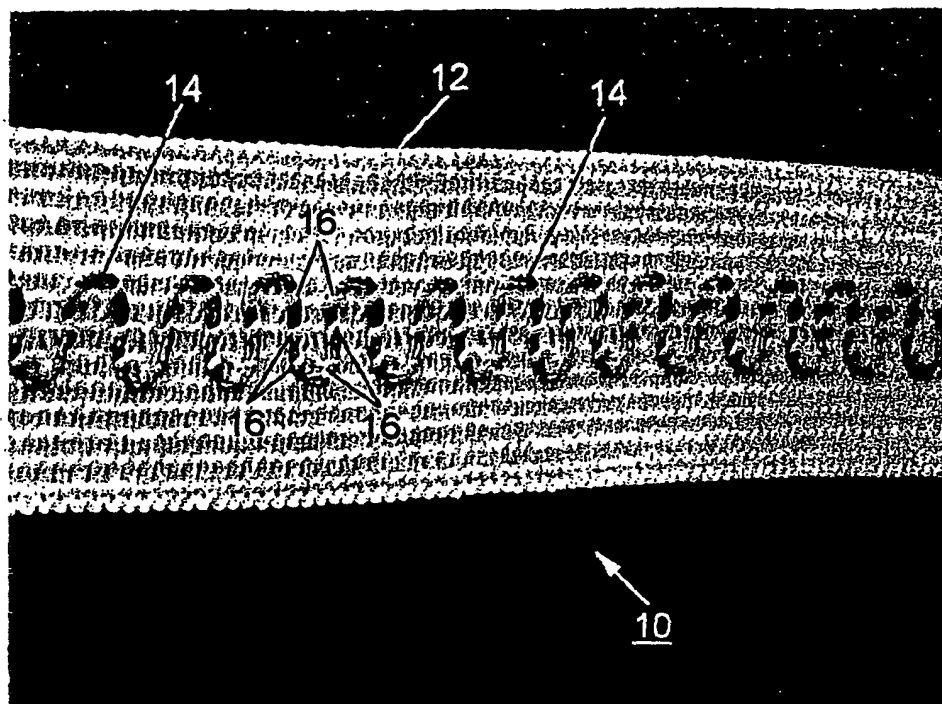


FIG. 1

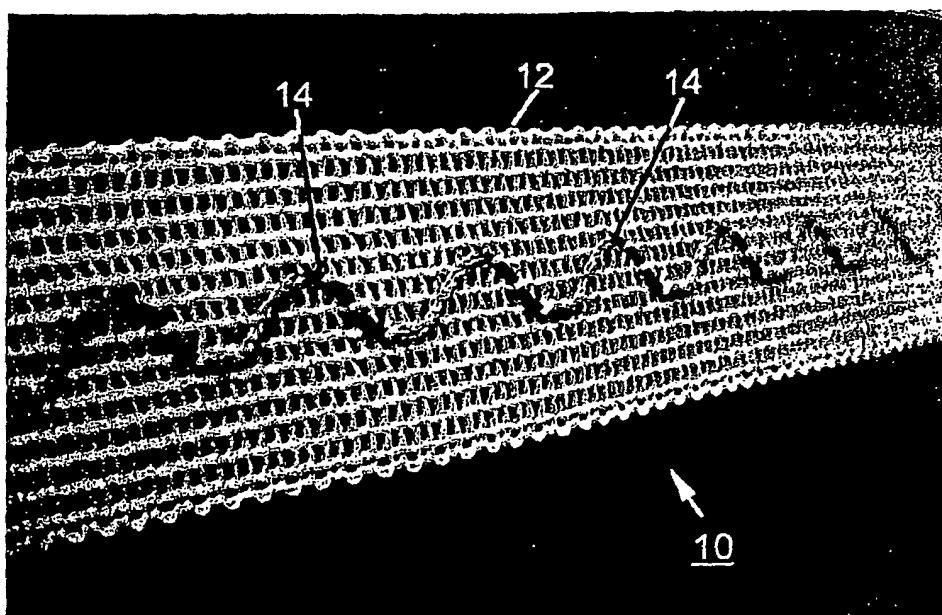


FIG. 2

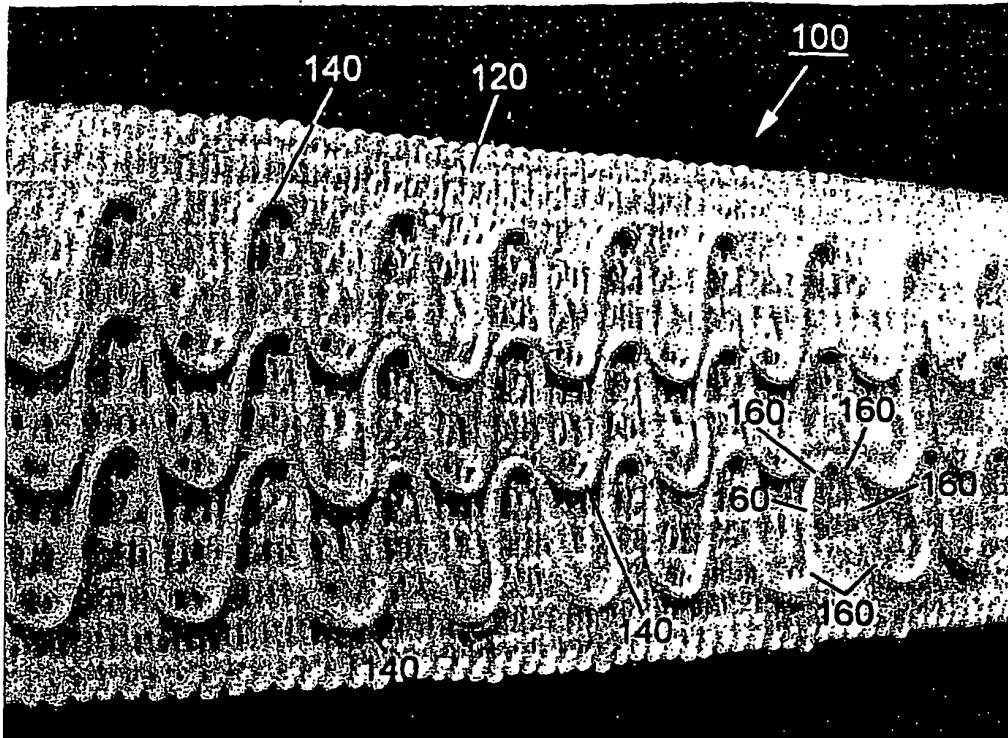


FIG. 3

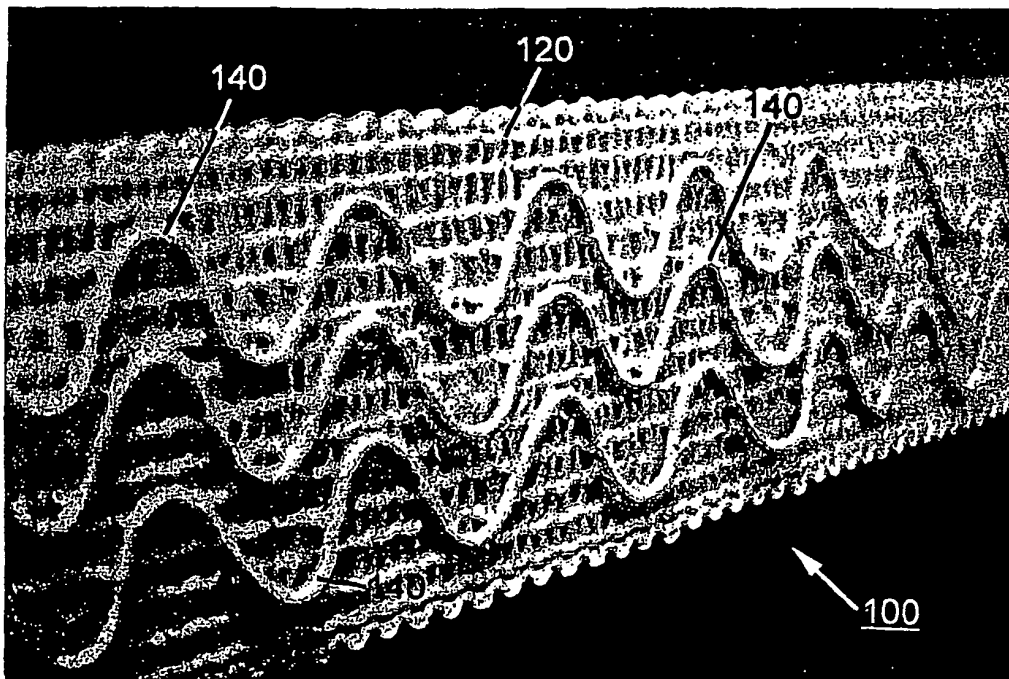


FIG. 4

BAR 1	4 ENDS 1/150 SD
BAR 2	12 ENDS 1680 GLOSPAN
BAR 3	2 ENDS 1/150 SD
BAR 4	1 END NE 12544 TR TINNED COPPER WIRE
BAR 5	
BAR 6	
BAR 7	
BAR 8	
WARPS	12 ENDS 1/150 SD

NEEDLES - WIDTH	12-3/4"
STRETCH AT KNITTER	110+/-10%
STRETCH AFTER 2 HOURS	
STRETCH AFTER CALENDAR	N/C
FRONT PICKS	19
BACK PICKS AT KNITTER	40
BACK PICKS AFTER 2 HOURS	
BACK PICKS AFTER CALENDAR	N/C

COMMENTS WIRE HAS TO RUN THROUGH WEFT STOP MOTION

NEW ENGLAND ELECTRIC WIRE CORPORATION LISBON, NH

FIG.5A

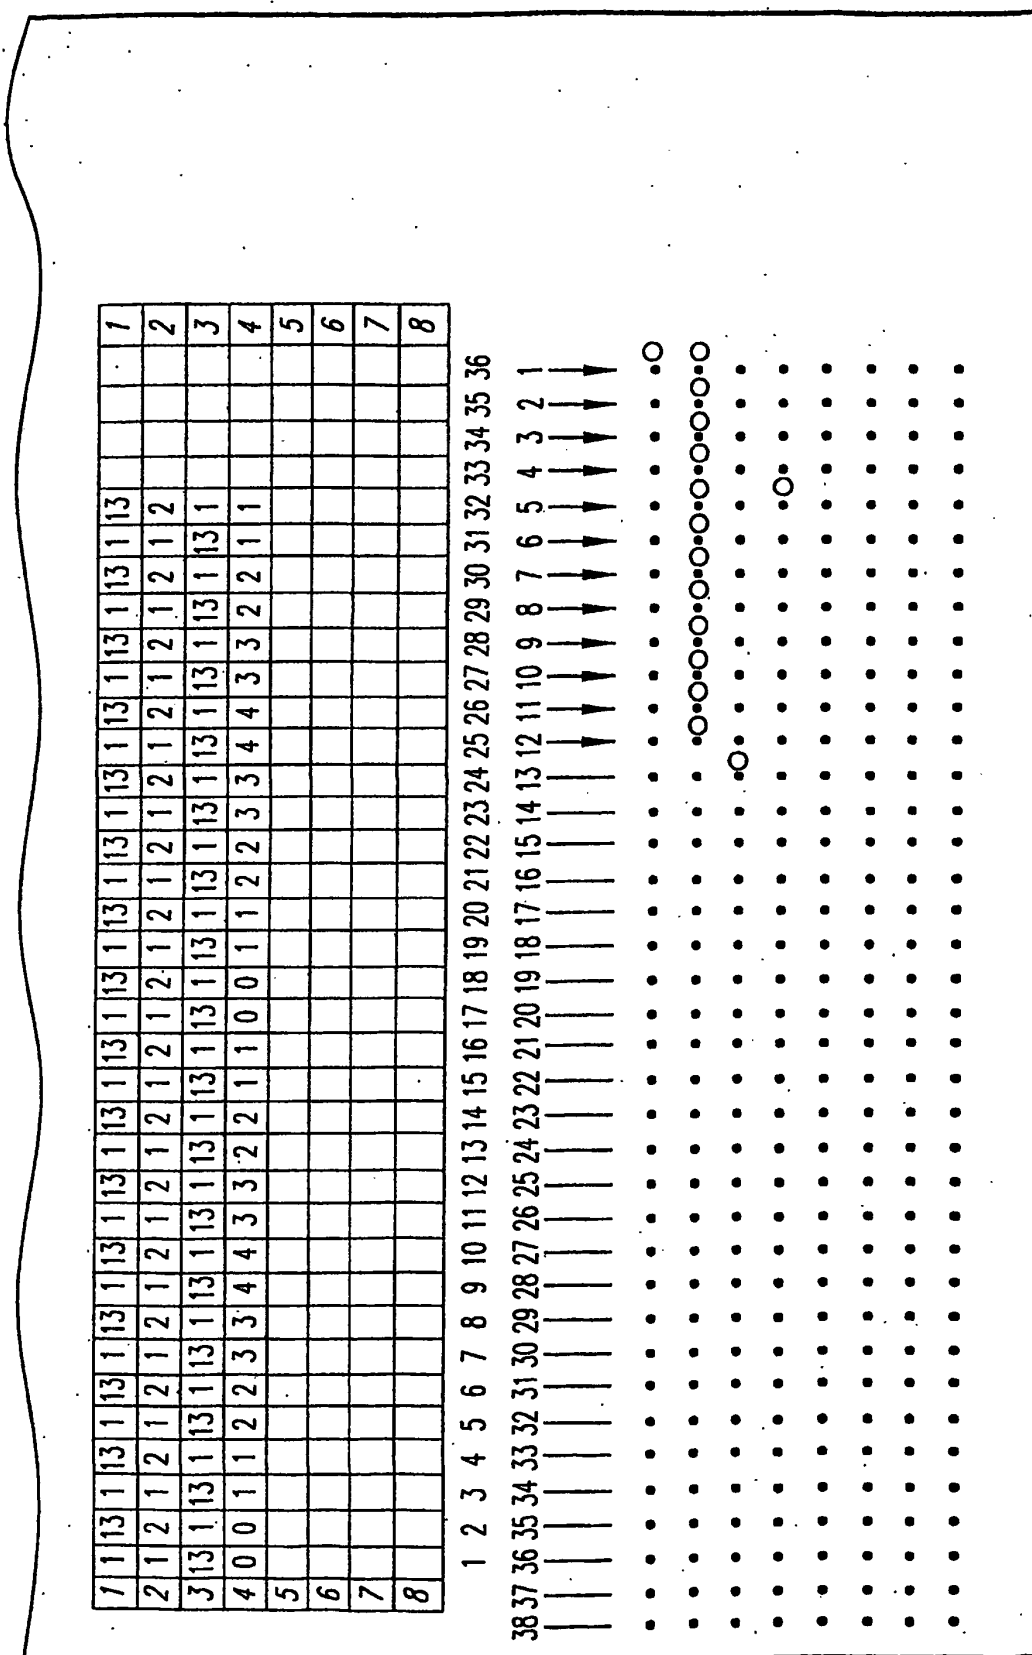


FIG. 5B

BAR 1	4 ENDS 1/150 SD	
BAR 2	19 ENDS 1680 LYCRA	
BAR 3	2 ENDS 1/150 SD	
BAR 4	3 ENDS NE 12544 TR TINNED COPPER WIRE	
BAR 5		
BAR 6		
BAR 7		
BAR 8		
WARPS	12 ENDS 1/150 SD	
NEEDLES - WIDTH		
STRETCH AT KNITTER	19-1 1/4"	
STRETCH AFTER 2 HOURS	110+/-10%	
STRETCH AFTER CALENDAR	N/C	
FRONT PICKS	19	
BACK PICKS AT KNITTER	40	
BACK PICKS AFTER 2 HOURS		
BACK PICKS AFTER CALENDAR	N/C	
COMMENTS WIRE HAS TO RUN THROUGH WEFT STOP MOTION TO REDUCE VIBRATION		
NEW ENGLAND ELECTRIC WIRE CORPORATION LISBON, NH		

FIG.6A

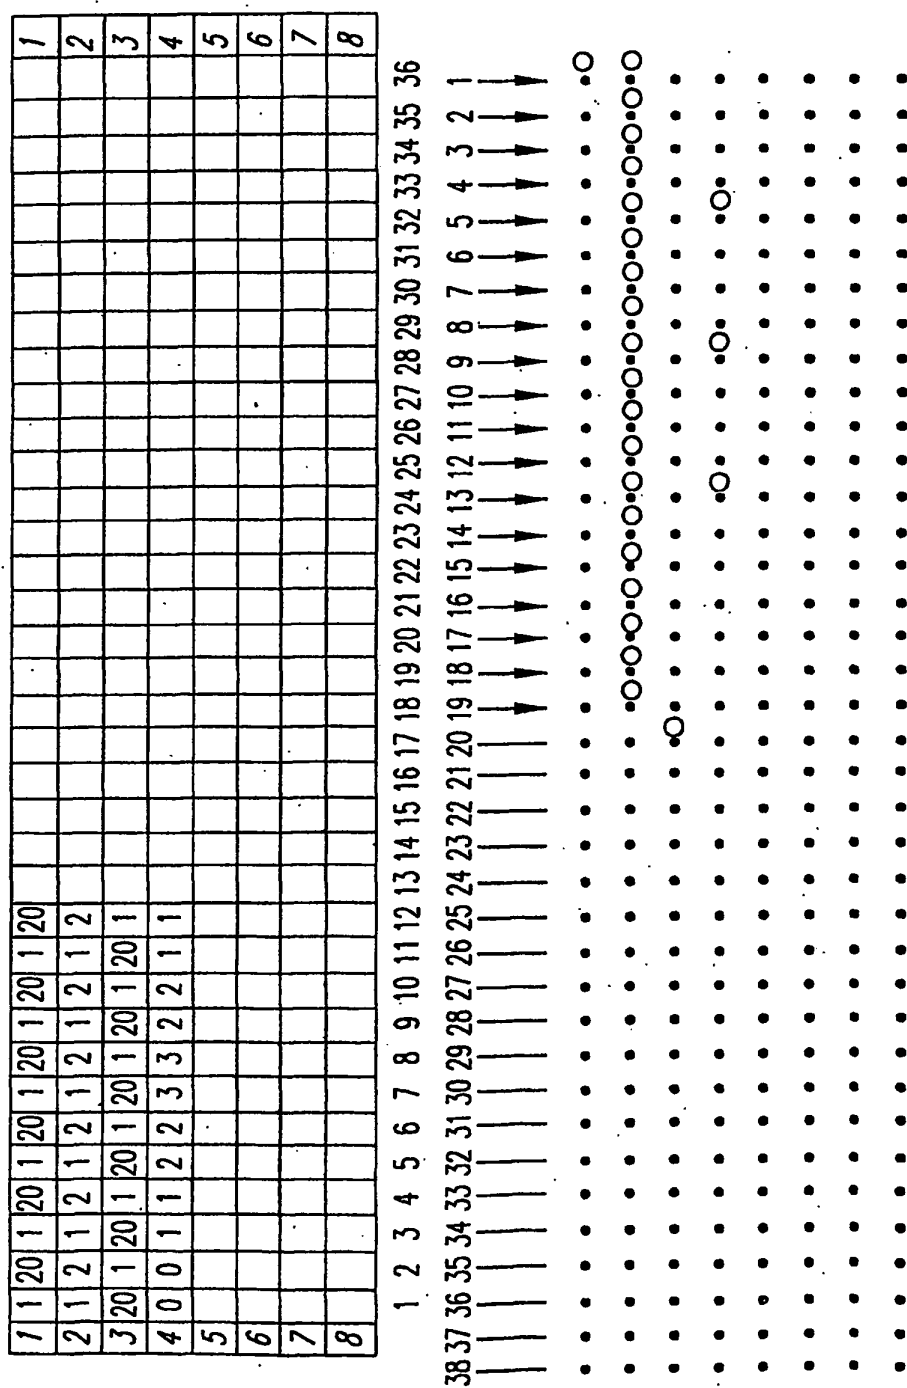


FIG. 6B

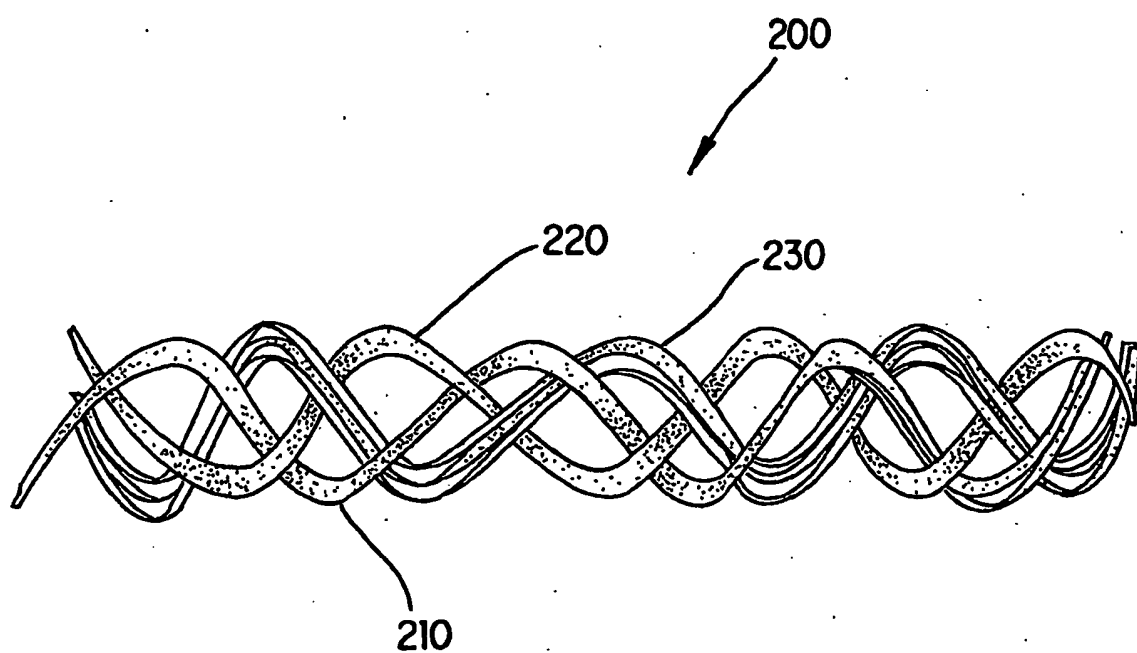


FIG. 7

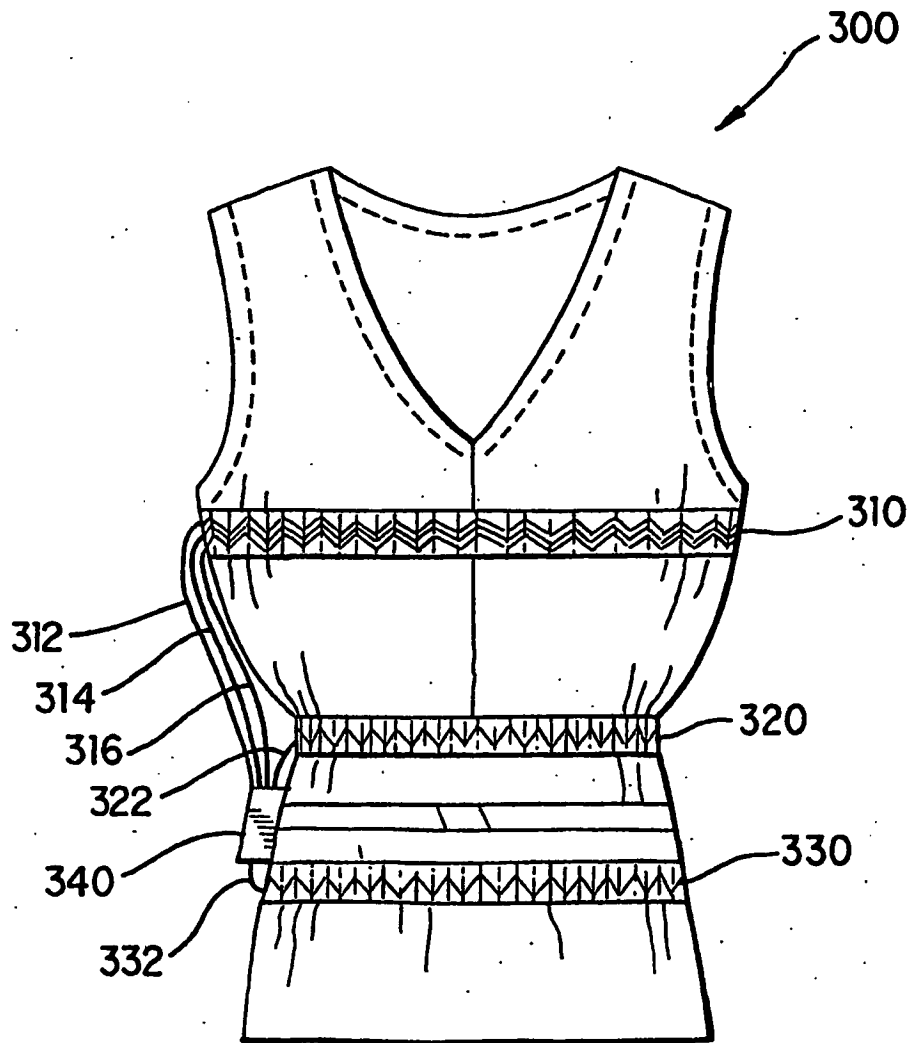


FIG. 8

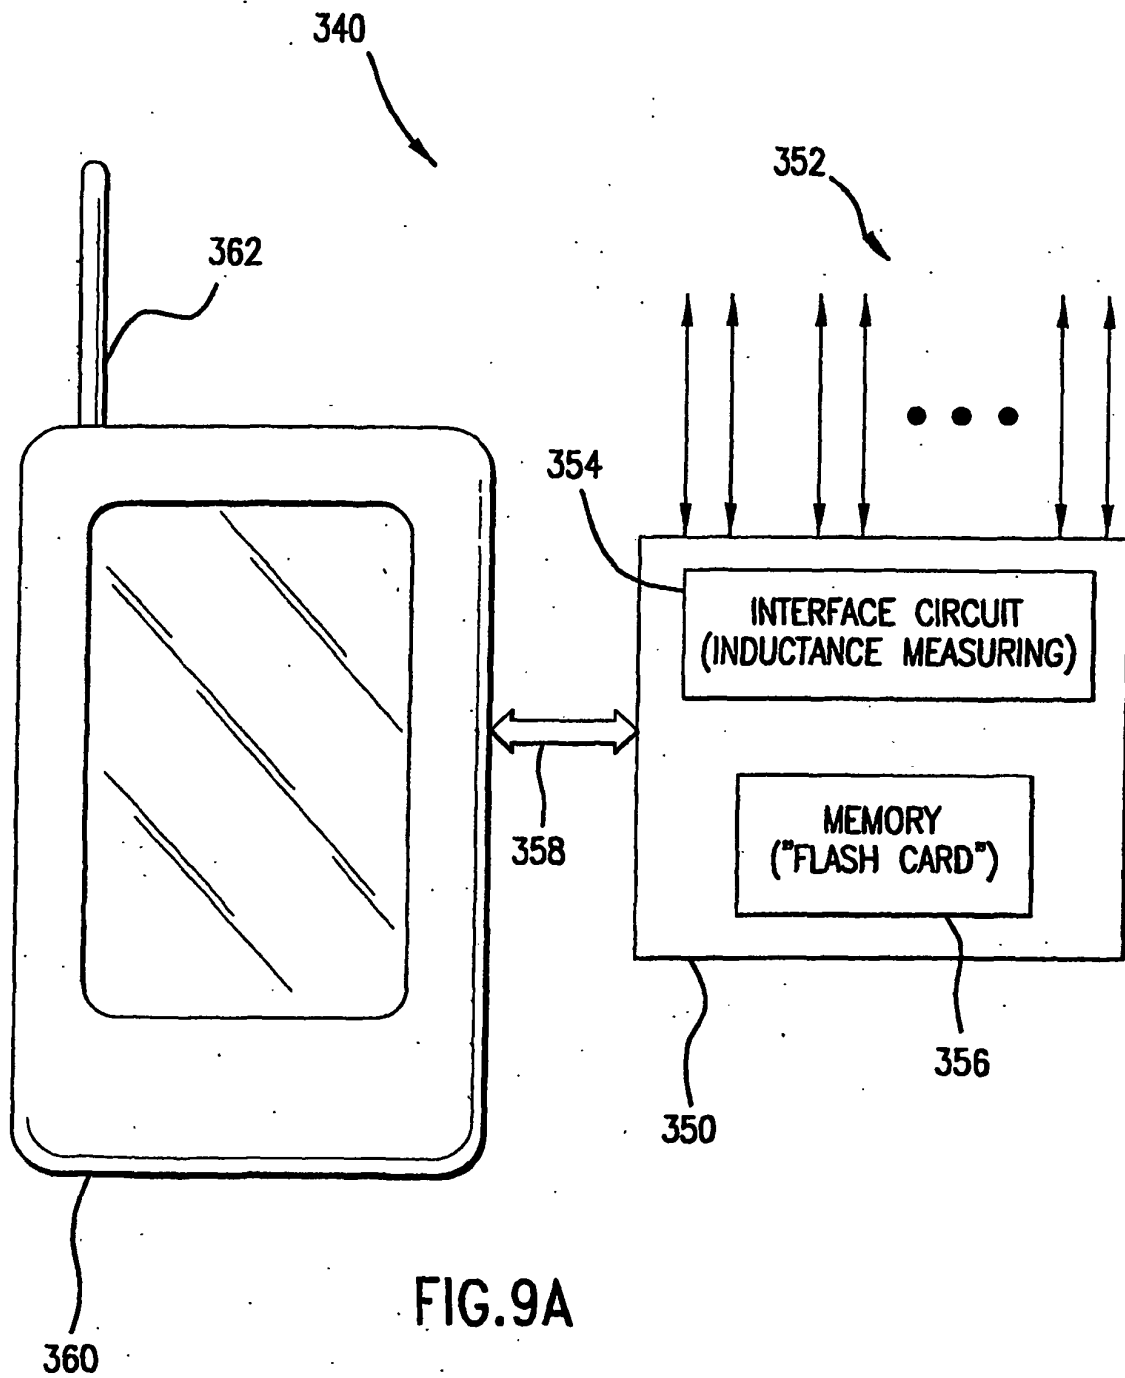


FIG.9A

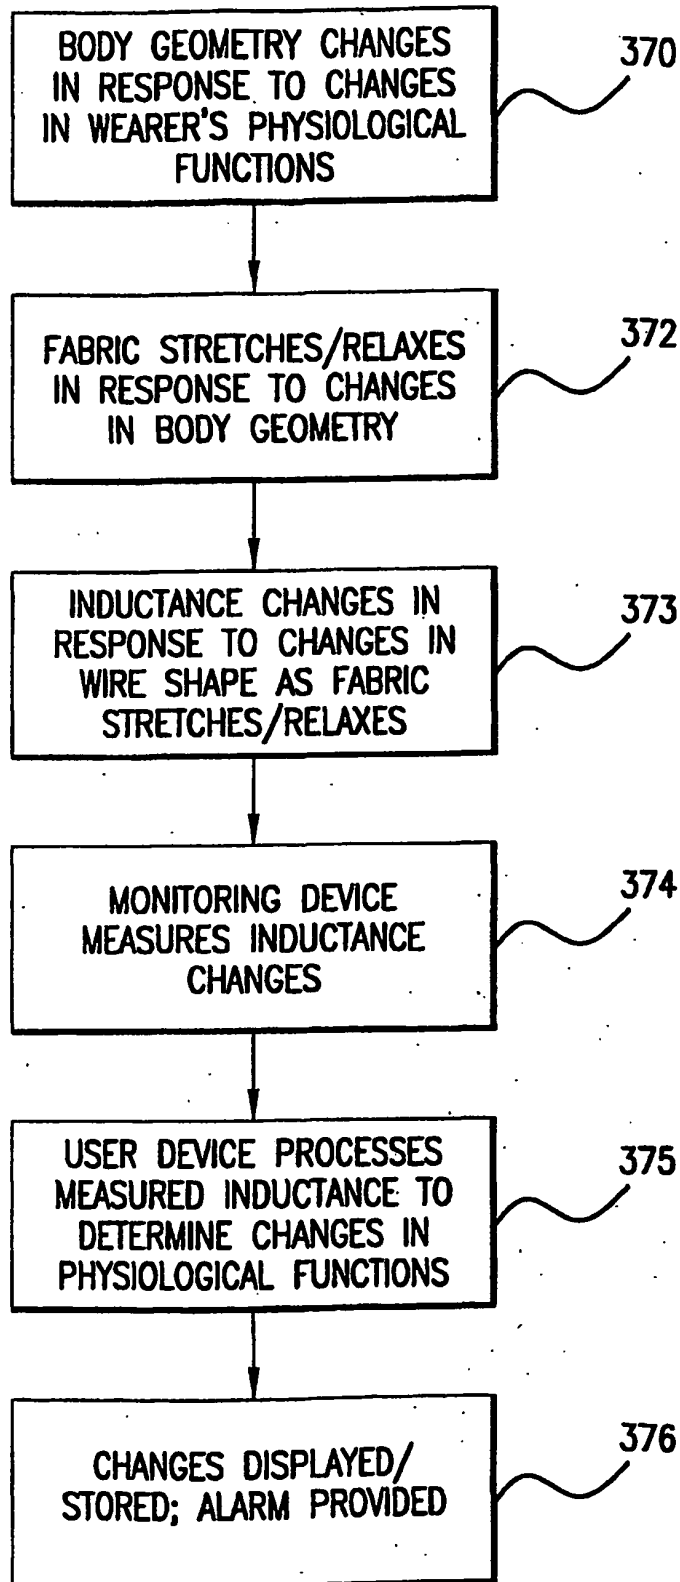


FIG.9B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 1596298 A [0005]
- US 4373534 A [0005]
- US 5331968 A [0005]
- US 4807640 A [0005]

专利名称(译)	用于生理监测服装的复合弹力和金属丝织物		
公开(公告)号	EP1404219A4	公开(公告)日	2008-07-02
申请号	EP2002704284	申请日	2002-01-30
[标]申请(专利权)人(译)	VIVOMETRICS		
申请(专利权)人(译)	VIVOMETRICS INC.		
当前申请(专利权)人(译)	VIVOMETRICS INC.		
[标]发明人	ISTOOK CYNTHIA L		
发明人	ISTOOK, CYNTHIA, L.		
IPC分类号	A61B5/113 A61B5/00 D04B1/14 D04B21/16 A61B5/04 D04B1/00		
CPC分类号	A61B5/0002 A61B5/1135 A61B5/6805 D04B21/18 D10B2403/02431 D10B2403/0311 H05K1/0283 H05K1/038 H05K3/103 H05K2201/0133 H05K2201/09263 H05K2201/10287		
优先权	09/774333 2001-01-31 US		
其他公开文献	EP1404219A2 EP1404219B1		
外部链接	Espacenet		

摘要(译)

用于用于对规定的身体功能进行生理监测的类型的服装的织物具有一个或多个弹性材料的细长带，其在纵向上是可拉伸的。每个这样的弹性带包括以弯曲图案固定或形成在其中的至少一根导线。用于对规定的身体功能进行生理监测的衣服和类型的系统包括这样的织物和监测所包括的导线的电参数的监测单元。