



(11) **EP 2 745 769 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
24.02.2016 Bulletin 2016/08

(51) Int Cl.:
A61B 5/00 (2006.01) B65D 81/00 (2006.01)
A61B 5/15 (2006.01) A61B 5/154 (2006.01)

(21) Application number: **14160750.7**

(22) Date of filing: **20.07.2005**

(54) **BLOOD COLLECTION ASSEMBLY**
BLUTENTNAHMEANORDNUNG
ENSEMBLE DE COLLECTE DE SANG

(84) Designated Contracting States:
DE ES FR GB IT

(30) Priority: **20.07.2004 US 589294 P**

(43) Date of publication of application:
25.06.2014 Bulletin 2014/26

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
05773670.4 / 1 816 947

(73) Proprietor: **Becton Dickinson and Company**
Franklin Lakes, NJ 07417-1880 (US)

(72) Inventor: **Swenson, Kirk, D.**
West Caldwell, New Jersey 07006 (US)

(74) Representative: **von Kreisler Selting Werner -**
Partnerschaft
von Patentanwälten und Rechtsanwälten mbB
Deichmannhaus am Dom
Bahnhofsvorplatz 1
50667 Köln (DE)

(56) References cited:
EP-A1- 0 364 777 EP-A1- 1 433 419
WO-A1-90/07903 WO-A2-2004/093938

EP 2 745 769 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present application claims priority to U.S. Provisional Application No. 60/589,294 filed on July 20, 2004.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0002] The present invention relates generally to a medical needle device and assembly for use in connection with blood collection procedures, such as a blood collection assembly that provides a snap fit connection between various components of the assembly.

2. Description of Related Art

[0003] Disposable medical needle devices having piercing elements are typically used for administering a medication or withdrawing a fluid, such as blood, from the body of the patient. Such piercing elements include blood collection needles, fluid handling needles and assemblies thereof. Current medical practice often requires that fluid collection containers and needle assemblies used in such devices be inexpensive and readily disposable. Often, existing blood collection devices employ some form of a durable reusable holder on which detachable and disposable needle assemblies and fluid collection containers are mounted. A blood collection system of this nature may be assembled prior to use and then disassembled after use.

[0004] Known blood collection systems typically include a double-ended needle assembly attached with a holder supporting the needle assembly, with the holder capable of accommodating an evacuated fluid collection tube therein. The double-ended needle assembly includes a hub having a bore therethrough, with a needle cannula extending through the bore of the hub. The hub of the needle assembly is received through an opening at one end of the holder and maintained therein, such that a first or distal end of the needle extends outward from the holder for puncturing the vein of a patient. At the opposite end, a non-patient end of the needle extends into the hollow body. To assemble the blood collection system, the needle assembly is inserted into the housing and the evacuated fluid collection tube is partially inserted through the open end of the hollow body. To draw a blood specimen from the patient using one of these systems, the distal exposed end of the needle is inserted into a patient's vein, and the collection tube is fully inserted into the holder until the second or proximal end of the needle pierces a puncturable stopper of the fluid collection tube, thereby allowing fluid communication between the interior of the fluid collection tube and the bore of the needle. Blood will then be drawn through the needle into the evacuated fluid collection tube based on the negative pressure therein. After drawing a specimen, the blood

collection tube is removed so that blood contained therein may be analyzed, and the needle assembly detached for disposal.

[0005] A prior art blood collection device known in the art is disclosed in U.S. Patent No. 5,066,287 to Ryan. This patent discloses a rear adapter assembly used as part of a blood collection set. The rear adapter assembly includes a rear blood tube holder and a male connector that is inserted into the holder. The male connector includes a ratcheted ramp with a plurality of ratchet teeth that engage with an annular internal ratchet located within the holder. In particular, the annular internal ratchet is provided on a holder ramp formed in the front wall of the holder. The ratcheting connection between the male connector and the holder provides a permanent connection between these two elements.

[0006] Another blood collection device known in the art is disclosed in U.S. Patent No. 5,117,837 to Wana-maker et al. The patent is directed to a blood collection device that is generally comprised of a needle assembly and a needle holder for use with an evacuated sample collection tube. The needle assembly includes a hub which is connected to the holder through an adapter. The adapter and hub are connected together by a threaded connection, and the adapter includes a crown defining a plurality of serrated teeth. The serrated teeth on the crown are adapted to cooperate with the serrated teeth formed on a lid, which covers the distal end of the holder. The adapter engages with the lid covering the distal end of the holder.

[0007] Yet another blood collection device known in the art is disclosed in U.S. Patent No. 5,066,286 to Ryan. This patent discloses a luer adapter assembly having a male connector and a rear blood tube holder. The rearward end of the male connector includes a hollow middle portion defining a groove, which snap-fits into the forward end of the holder such that the male connector is permanently installed in the rear blood tube holder. The connector and the holder have an interrupted contacting surface, which permits slight movement between the elements. The male connector also includes a plurality of longitudinally extending protrusions spread about the connector and terminates with a stop collar. The protrusions engage with respective longitudinal grooves in the holder in order to prevent unwanted rotation of the male connector relative to the rear tube holder.

[0008] WO 90/07903 discloses a cannula structure having a needle with forwardly and rearwardly extending needle ends surrounded by a central hub. The hub has a vertically extending key slot that engages with a key upon insertion of the hub into a receiving port of a holder housing.

[0009] EP 0 364 777 describes a cannula structure having a needle with forwardly and rearwardly extending needle ends surrounded by a central hub. The hub can be inserted into a receiving port of a holder housing and is secured within the receiving port by chuck teeth and a fastening ring axially slidably fitted over the hub.

[0010] EP 1 433 419 describes a cannula structure having a needle with forwardly and rearwardly extending needle ends surrounded by a central hub whereby the hub can be received by a receiving port of a holder housing. Thereby, the distal end of the hub is adapted for mating with the holder housing. As such, the holder housing comprises non-threaded mounting means with a combination of external rings and keyways to secure the hub in the receiving port.

[0011] Prior art devices such as those noted typically involve complex engagement systems between the hub and/or the male luer connector and the holder. Such devices are often difficult to align, engage and otherwise assemble due to the structural limitations of the fittings.

SUMMARY OF THE INVENTION

[0012] A need exists for a blood collection assembly that includes the requisite components, where these components are easily manufactured, engaged and assembled in a safe and efficient manner.

[0013] Accordingly, an embodiment of the present invention provides a blood collection assembly comprising a holder housing defining a receiving chamber and including a rearward end adapted to receive a sample collection tube within the chamber and a forward end including a receiving port extending into the chamber. The assembly further comprises a hub including a hub outer surface extending between a distal end and a proximal end, an internal opening extending therethrough and a puncturing element at the proximal end thereof. The hub is received within the receiving port of the holder housing such that at least a portion of the hub outer surface engages a corresponding interior surface of the receiving port. The hub is maintained within the receiving port through interfering structure extending substantially perimetrically between the hub outer surface and the interior surface of the receiving port. In this manner, a snap-fit engagement axially locks the hub to the holder housing with the puncturing element of the hub extending through the receiving port and into the chamber of the holder housing for contact with a sample collection tube received within the chamber. The engagement between the hub outer surface and the corresponding receiving port interior surface may provide support against torque applied to the distal end of the hub, preventing release of the snap-fit engagement established through the interfering structure between the hub outer surface and the receiving port interior surface.

[0014] The hub includes a needle cannula mounted through the internal opening of the hub. The needle cannula includes a forward intravenous end with a puncture tip extending from the distal end of the hub and a rearward non-patient end extending from the proximal end of the hub, with the non-patient end comprising the puncturing element. In an alternative configuration, the distal end of the hub may include a mating surface adapted to engage a medical device having a complimentary mating surface,

such as a luer adapter.

[0015] The hub includes an annular protrusion, such as an annular rib, extending substantially perimetrically about the hub outer surface at a location between the distal and proximal ends of the hub. The receiving port can include a corresponding annular groove extending perimetrically within the interior surface of the receiving port, for mating with the annular protrusion of the hub.

[0016] The hub outer surface comprises an anti-rotation element to prevent rotational movement of the hub within the receiving port. For example, the hub outer surface may include a nub extending from the outer surface at the proximal end, and the receiving port may be sized and shaped so as to receive and substantially abut the nub, such as through a notch portion configured to receive and substantially abut an outer surface of the nub. Moreover, the outer surface of the nub may be rounded and configured for ease of insertion within and abutment against a complimentary rounded internal surface of the notch portion of the receiving port.

[0017] In one particular embodiment, the hub includes a needle cannula having an intravenous end with a puncture tip extending from the distal end thereof, with the anti-rotation element providing a mechanism for properly aligning the hub within the receiving port of the holder so as to orient the puncture tip at the intravenous end of the needle cannula to a predetermined position, such as a bevel up orientation. Also, the rearward end of the holder housing may include a pair of flanges extending from opposing sides thereof and a bottom surface of the holder housing is configured to rest on the patient's skin. As such, the anti-rotation element may be adapted to align the bevel of the needle to a predetermined position with respect to the pair of flanges and the bottom surface of the holder housing.

[0018] It is further contemplated that the needle assembly may include shield in pivotable engagement with the hub and/or the holder housing, with the shield being adapted for pivotal movement to encompass the puncture tip of the needle cannula. A removable packaging cover may also cover the puncture tip of the needle cannula with the hub attached to the holder housing prior to use, and a rear cap element may be removably attached with the rearward end of the holder housing to seal the receiving chamber of the holder housing.

[0019] In a further embodiment, a blood collection assembly comprises a needle cannula having an intravenous end with a bevel puncture tip and a non-patient end mounted to a hub, the hub extending between a distal end and a proximal end and including an anti-rotation element extending from an outer surface thereof. A holder housing defines a receiving chamber, and includes a rearward end adapted to receive a sample collection tube within the chamber and a forward end including a receiving port extending therethrough and configured to receive at least a portion of the hub in a snap fit engagement therein. The receiving port includes structure corresponding to the anti-rotation element of the hub for en-

gagement therewith to limit or prevent rotational movement of the hub with respect to the holder housing about a longitudinal axis defining the blood collection assembly. The hub and the receiving port include interengaging structure for axially locking the hub with the holder housing with the anti-rotation element of the hub contacting the corresponding structure of the receiving port to align the hub and the needle cannula to a predetermined position and prevent rotation of the hub with respect to the holder housing about the longitudinal axis. For example, the hub may include a protrusion extending substantially perimetrically about the outer surface at the proximal end and the receiving port may include a groove extending substantially perimetrically within the receiving port, with the protrusion of the hub adapted for locking engagement within the groove.

[0020] The rearward end of the holder housing may include at least one flange for resisting rolling of the holder housing on a flat surface thereby defining an upper surface of the holder housing. In this manner, insertion of the anti-rotation element within the receiving port substantially aligns the bevel of the cannula with the upper surface of the holder housing. A shield may further be provided in pivotable engagement with the hub and/or the holder housing, for pivotal movement to encompass the intravenous end of the needle cannula.

[0021] Further details and advantages of the present invention will become apparent from the following detailed description read in conjunction with the drawings, wherein like parts are designated with like reference numerals.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

FIG. 1 is a perspective and exploded view of a blood collection assembly in accordance with an embodiment of the present invention.

FIG. 2 is a perspective view of a holder housing of the blood collection assembly of FIG. 1.

FIG. 3 is a further perspective view of the bottom of the holder housing of FIG. 2.

FIG. 4 is a perspective view of a hub of the blood collection assembly of FIG. 1.

FIG. 5 is a perspective view of a needle assembly engaged with a holder housing.

FIG. 6 is a side sectional view of the engaged assembly of FIG. 5.

FIG. 7 is a plan sectional view taken along lines 7-7 in FIG. 6.

FIG. 8 is a perspective view of an enclosure.

FIG. 9 is a side sectional view of the engaged enclosure surrounding the hub in FIG. 8.

FIG. 10 is a perspective view of a hub with a tapered mating surface in accordance with a further configuration.

FIG. 11 is an exploded perspective view of a blood

collection assembly and a pivotal shield in accordance with a further embodiment.

FIG. 12 is a perspective view of the hub, holder housing and pivotal shield of FIG. 11.

5 FIG. 13 is a side sectional view of the engaged structure of FIG. 12, together with a cap covering a portion of a needle.

FIG. 14 is the perspective view of the structure of FIG. 12, with the pivotal shield encompassing the needle.

10 FIG. 15 is a perspective view of a blood collection assembly in a further embodiment, with a protective cover.

15 FIG. 16 is an exploded perspective view of the assembly of FIG. 15.

DETAILED DESCRIPTION

[0023] For purposes of the description hereinafter, the terms "upper", "lower", "right", "left", "vertical", "horizontal", "top", "bottom", "lateral", "longitudinal" and derivatives thereof shall relate to embodiments of the invention as they are oriented in the drawing figures. However, it is to be understood that these embodiments may assume various alternative variations and step sequences, except where expressly specified to the contrary. It is also to be understood that the specific devices and processes illustrated in the attached drawings, and described in the following specification, are simply exemplary embodiments of the invention. Hence, specific dimensions and other physical characteristics related to the embodiments disclosed herein are not to be considered as limiting.

[0024] In the following description and accompanying drawings, the term "distal" refers to the forward or patient side of the device, and the term "proximal" refers to the rearward or the non-patient side of the device, respectively. These designations will become apparent from the following detailed description.

[0025] Referring generally to the figures, a blood collection assembly 10 in accordance with an embodiment of the present invention is illustrated. The blood collection assembly 10 may be used, for example, in phlebotomy (i.e., blood collection) procedures and is designed in such an instance to allow and facilitate easy and efficient connection between the various components and sub-components of the blood collection assembly 10, as discussed hereinafter.

[0026] Referring to FIGS. 1-9, one embodiment of the blood collection assembly 10 will be discussed. The principle of operation of the blood collection assembly 10 of FIGS. 1-7 is illustrative of all the embodiments of the blood collection assembly 10 to be discussed herein. The blood collection assembly 10 is generally comprised of a needle assembly 11 attached to a holder housing 22. The needle assembly 11 includes a hub 12, with the hub 12 having a distal end 14, a proximal end 16, a hub outer surface 18 and an internal opening 20 extending through the hub 12.

[0027] The hub 12 includes a puncturing element positioned near the proximal end 16 of the hub 12 for the passage of fluid therethrough, such as blood and the like. The puncturing element 32, in this embodiment, is adapted for contacting and piercing a sample collection tube during use, as will be discussed in more detail herein. Desirably, the needle assembly 11 includes a needle cannula 38 mounted through the internal opening 20 of the hub 12. The needle cannula 38 is generally a hollow needle structure having an internal lumen 40, and extends between a distal or forward end 42 establishing an intravenous or patient needle end having a puncture tip 44 and a proximal or rearward non-patient end 46. Desirably, the forward end 42 of the needle cannula 38 extends from the distal end 14 of the hub 12, and the proximal or rearward end 46 of the needle cannula 38 extends from the proximal end 16 of the hub 12. The rearward non-patient end 46 of the needle cannula 38 comprises the puncturing element 32 for contacting the sample collection tube. As shown in FIG. 6, the hub 12 may also include an elastomeric sleeve 82 extending from the proximal end 16 about the non-patient end 46 of the needle cannula 38. This elastomeric sleeve 82 acts as a valve for maintaining fluid within the needle cannula during use of the blood collection assembly 10, and is adapted to be pierced by the non-patient end 46 of the needle cannula 38 during use, as is known in the art.

[0028] The blood collection assembly 10 also includes a holder housing 22, which defines a receiving chamber 24. The holder housing has a rearward end 26 for receiving a sample collection tube (not shown) within the chamber 24, and a forward end 28 with a receiving port 30 extending therethrough, establishing a pathway through the holder housing 22 into the receiving chamber 24. The receiving port 30 is sized and shaped so as to receive at least a portion of the proximal end 16 of the hub 12 of the needle assembly 11 therein.

[0029] The blood collection assembly 10, in accordance with an embodiment of the present invention, includes interengaging structure 34 between the hub 12 and the holder housing 22. This interengaging structure 34 is used to axially lock the hub 12 with the holder housing 22. In particular, this interengaging structure 34 provides for a "snap fit" between the hub 12 and the holder housing 22, such that the hub 12 may be easily attached to the holder housing 22 through an axial attachment along the longitudinal axis of the blood collection assembly 10 as opposed to a threaded or screw-on type attachment as is common within the art, thereby facilitating easy alignment and manipulation, and in many instances without the need for additional structure. Desirably, the interengaging structure 34 extends substantially around contacting or mating surfaces between the hub 12 and the holder housing 22. This interengaging structure 34 is adapted to axially lock the hub 12 and the holder housing 22.

[0030] In particular, the hub 12 includes a protrusion 54 that extends substantially perimetrically about the hub

outer surface 18 at the proximal end 16 of the hub 12. The receiving port 30 of the holder housing 22 includes a corresponding surface 56 for mating with this protrusion 54 on the hub 12. Accordingly, when the protrusion 54 is engaged with the corresponding surface 56, the hub 12 is axially locked with respect to the holder housing 22. The corresponding surface 56 includes a groove 58 that extends substantially perimetrically within the receiving port 30. Therefore, the protrusion 54 is sized and shaped so as to lockably engage with this groove 58. For example, the protrusion 54 may be an annular rib 60, which mates with the groove 58.

[0031] The blood collection assembly 10 may also include structure that limits and, in some cases, prevents rotational movement of the hub 12 when positioned in the receiving port 30 of the holder housing 22. In a preferred embodiment, the hub outer surface 18 includes an anti-rotation element 64 positioned adjacent the proximal end 16 of the hub 12. In addition, the receiving port 30 of the holder housing 22 is sized and shaped so as to receive and substantially about the anti-rotation element 64 in an interference engagement which prevents rotational movement of the hub 12 within the receiving port 30 of the holder housing 22.

[0032] When used in connection with the above-discussed embodiment including a needle cannula 38 extending through the hub 12, the insertion of the anti-rotation element 64 within the receiving port 30 of the holder housing 22 aligns the hub 12. Accordingly, since the needle cannula 38 is fixed with respect to the hub 12, insertion of the anti-rotation element 64 also aligns the needle cannula 38 to a predetermined position with respect to the holder housing 22. In such an embodiment, insertion of the anti-rotation element 64 within the receiving port 30 occurs during the assembly process prior to the snap-fit engagement, thereby providing a mechanism for aligning the needle cannula 38 to the desired predetermined orientation before the hub 12 is snap fit into the holder housing 22.

[0033] In one preferred embodiment, the anti-rotation element 64 includes a nub 66 that extends generally longitudinally along the hub outer surface 18 from the proximal end 16 of the hub 12. In addition, the receiving port 30 includes a notch portion 68 for receiving and abutting against an outer surface 70 of the nub 66. The outer surface 70 of the nub 66 may be, for example, rounded for appropriate insertion within and abutment against a complimentary rounded internal surface 72 of the notch portion 68. Accordingly, the anti-rotation structure established through anti-rotation element 64 prevents rotation of the hub 12 with respect to the holder housing 22, as well as the assists in the alignment of the needle cannula 38. For example, in certain embodiments, the needle cannula 38 may include a bevel 74. It is oftentimes desirable to orient the bevel into an appropriate position during use of the blood collection assembly 10, such as in a "bevel up" orientation to assist in venipuncture. Desirably, the nub 66 extends from the hub 12 in longitudinal

alignment with this bevel 74, such that insertion of the nub 66 within the notch portion 68 aligns the bevel 74 to a predetermined position.

[0034] The nub 66 bisects annular rib 60 as shown in FIG. 4. In this manner, continuous contact is achieved perimetrically between the contacting surfaces of the hub 12 and the holder housing 22 establishing the axial lock and the rotational fixation therebetween.

[0035] The rearward end 26 of the holder housing 22 may also include a flange 76. This flange 76 resists rolling of the holder housing 22 on a flat surface, which thereby defines an upper surface 78 of the holder housing 22. Therefore, when the nub 66 of the holder 12 is inserted within the notch portion 68 of the holder housing 22, the bevel 74 of the needle cannula 38 is substantially aligned with the upper surface 78 of the holder housing 22. It is also envisioned that the rearward end 26 of the holder housing 22 includes a pair of flanges 76 that extend from opposing sides of the holder housing 22, such that a bottom surface 80 of the holder housing 22 may rest upon a patient's skin. In addition, with respect to the orientation of the bevel 74 of the needle cannula 38, the aforementioned arrangement may achieve a bevel orientation of between about 60 degrees and about 120 degrees from the flanges 76.

[0036] In another embodiment, the assembly 10 may include a cap element 86 that is removably attached with the rearward end 26 of the holder housing 22. Through the attachment of this cap element 86 with the holder housing 22, the receiving chamber 24 is sealed from the outside environment. The cap element 86 may be adhered or attached directly to the rearward end 26 of the holder housing 22, for example through an appropriate adhesive. It is further contemplated that the cap element 86 may be affixed at the rearward end 26 through a mechanical engagement, such as through interfering structure between the cap element 86 and the holder housing 22. For example, cap element 86 may include an annular rib which snap fits within a groove within the interior surface of the holder housing 22 at the rearward end thereof. Further, the blood collection assembly 10 may be hermetically sealed with an enclosure 88 after the hub 12 has been attached to the holder housing 22 through the interengaging structure 34. In this manner, blood collection assembly 10 can be provided as a completely assembled structure ready for use in a single prepackaged assembly.

[0037] It is envisioned that a tactile indication may be provided during insertion of the hub 12 into the holder housing 22, where this tactile indication provides indication that the hub 12 is axially locked with the holder housing 22 through the interengaging structure 34. Such an arrangement ensures that the holder housing 22 and the hub 12 are appropriately and effectively axially locked.

[0038] In another configuration, as illustrated in FIG. 10, the hub 12 may include a tapered mating surface 48 extending from the distal end 14 of the hub 12. This tapered mating surface 48 is adapted to engage a separate

medical device (not shown), which includes an interengaging and complimentary tapered mating surface. This arrangement is often referred to as a "luer" fitting, as is known in the art. Further, in this embodiment, the tapered mating surface 48 of the hub 12 may be removably lockable with the complimentary tapered mating surface of the medical device. Accordingly, either of the tapered mating surfaces of the hub 12 or the medical device would include appropriate structure to effect this locking arrangement.

[0039] In a further embodiment depicted in FIGS. 11-14, the blood collection assembly 10 may include a shield 84 configured to encompass the intravenous end 42 of the needle cannula 38. This shield 84 may be removably attached to the hub 12 and/or the holder housing 22, or may be permanently affixed thereto or formed therewith. Shield 84 is desirably a pivotal shield, which is adapted to pivot between an open position in which the intravenous end 42 of the needle cannula 38 is exposed, as shown in FIG. 12, and a closed position encompassing or shielding the intravenous end 42 of the needle cannula 38 therein, as shown in FIG. 14. In such an embodiment, enclosure 88 may also be provided for sealing the needle cannula 38 therein prior to use.

[0040] Assembly of the blood collection assembly 10 will now be described. It is contemplated that needle assembly 11 may be provided as a disposable assembly as shown in FIGS. 8-9 for attachment with holder housing 22, which may be separate structures which are assembled immediately prior to use and disassembled after use, as is common practice in the field. As shown in FIGS. 8-9, such a needle assembly 11 may be provided with enclosure 88 covering the intravenous end 42 and affixed or fitted to hub 12, and with a separate rear cover 87 fitted therewith, whereupon the rear cover 87 can be removed and hub 12 assembled into holder housing 22 immediately prior to use. In order to reduce the risk of disease transmission, however, it is preferable that needle assembly 11 and holder housing 22 are provided as a pre-assembled structure with the needle assembly 11 attached to the holder housing 22 during manufacturing and assembly and prior to packaging.

[0041] In any event, needle assembly 11 is provided including the needle cannula 38 having a bevel 74 at the forward intravenous end 42, as discussed hereinabove, mounted to the hub 12. The protrusion 54 in this instance is located on the hub 12 and extends substantially perimetrically around the outer surface 18 of the hub 12 at its proximal end 16. In addition, in this embodiment, the nub 66 extends from the outer surface 18 at the proximal end 16 of the hub 12 adjacent protrusion 54, and is in alignment with the bevel 74 of the needle cannula 38. The holder housing 22 is provided, and this holder housing 22 may be arranged as discussed hereinabove. In particular, the receiving port 30 includes an internal surface 56 for mating with the protrusion 54, and a notch portion 68 for engagement with the nub 66. The proximal end 16 of the hub 12 is inserted into the receiving port

30 of the holder housing 22 through the forward end 28 thereof, with the nub 66 aligned with the notch portion 68. The outer surface 70 of the nub 66 and the corresponding internal surface 72 of the notch portion 68 may act together to guide the hub 12 into the proper alignment with respect to the holder housing 22, in a predetermined position. Such alignment between the nub 66 and the notch portion 68 occurs during the assembly process prior to the snap-fit engagement between the hub 12 and the holder housing 22.

[0042] The protrusion 54 of the hub 12 thereafter engages the corresponding mating internal surface 56 of the receiving port 30 substantially around an entire contacting or mating surface therebetween. In particular, the protrusion 54 which extends around the outer perimeter of the hub outer surface 18 engages into the groove 58 extending perimetrically within the corresponding surface 56 of the receiving port 30 in an interfering manner providing a snap fit engagement, with the nub 66 also engaged with the notch portion 68. Accordingly, insertion of the hub 12 within the receiving port 30 aligns the hub 12, and therefore, the needle cannula 38 to a predetermined position, such as with bevel 74 in an upright position for effective use with a patient, and also axially locks the hub 12 with the holder housing 22, in a snap-fit engagement. The blood collection assembly 10 assembled as such may further be provided with enclosure 88 protectively surrounding the intravenous end 42, and may be packaged in this manner for later use.

[0043] During use, the forward intravenous end 42 of the needle cannula 38 is inserted through the skin of a patient to obtain a sample using known blood collection procedures. After use, the forward intravenous end 42 of the needle cannula 38 is removed from the patient, and the pivoting shield 84, if provided, can be pivoted thereabout to protectively shield the needle. Shield 84 may include structure therein for engaging with the needle cannula 38 when rotated or pivoted to a safety position encompassing intravenous end 42 thereof, such as a cannula lock mechanism, thereby preventing the shield 84 from pivoting out of the shielding position once it has been moved into the shielding position. After shielding, the blood collection assembly 10 can be appropriately discarded in a medical waste container.

[0044] A further embodiment is depicted in FIGS. 15-16. In such an embodiment, holder housing 22 with hub 12 attached thereto and, optionally, with shield 84 also present, can be protectively packaged or covered within a enclosure 89. Enclosure 89 differs from enclosure 88 described above in that enclosure 89 is designed so as to attach directly to the outer surface of the holder housing 22, encompassing intravenous end 42 of the needle cannula 38 as well as the pivoting shield 84. The pivoting shield 84 can be contained within enclosure 89 without lockingly engaging needle cannula 38, such that when enclosure 89 is removed, pivoting shield 84 can be moved out of the way for use, and then pivoted to a locking position with the needle cannula 38 to encompass

the puncture tip at the intravenous end 42 thereof. Also, a cap element 86 may be provided at the rearward end 26 of the holder housing 22, sealing the receiving chamber 24. In this manner, blood collection assembly 10 can be prepackaged and sterilized as a preassembled unit ready for use, without any assembly required by the phlebotomist prior to a procedure.

[0045] The blood collection assembly 10 of the present invention allows a needle assembly including a hub 12 to be "snap fit" with a holder housing 22. Therefore, in this manner, the structure of the blood collection assembly 10 of the present embodiment of the invention allows for a more efficient and easily engageable hub/holder housing assembly. Further, with the use of the anti-rotation element 64, both the holder housing 22 and the needle cannula 38, and in particular the bevel 74 of the cannula, may be appropriately aligned and also prevented from unwanted rotation. Also, the specific engagement of the interengaging structure between the hub 12 and the holder housing 22 provides support against torque applied to the hub to prevent disengagement. In particular, by providing the interengaging structure extending substantially perimetrically around the hub outer surface 18 and the surface 56 of the receiving port 30, such as annular rib 60 in interference engagement with groove 58 around the entire perimeter of the exterior of hub outer surface 18, continuous support is provided around the entire contacting surface. Also, the corresponding rounded profiles of the annular rib 60 and the groove 58 establish substantially continuous contacting surfaces between the hub 12 and the receiving port 30 at the point of interengagement therebetween. Moreover, with the annular rib 60 being located on the hub outer surface 18 between the distal end 14 and the proximal end 16, a portion of the hub outer surface 18 on either side of the annular rib 60 also provides a continuous contacting surface between the hub 12 and the receiving port 30, thereby providing further support against torque pressure. Such continuous contacting surfaces provide support at the point of engagement between the hub 12 and the annular rib 60 to retain the hub 12 secured to the holder housing 22 when torque forces are applied thereto. In particular, pivotal movement of the shield 84 to the shielding position to encompass the intravenous end 42 of the needle cannula 38 causes a torque force against needle cannula 38 which force is transferred to the distal end 14 of the hub 12. The continuous contacting surfaces, and in particular the interfering structure extending substantially perimetrically between the hub outer surface 18 and the receiving port 30 as described above, effectively retains the hub 12 secured to the holder housing 22 without risk of release of the snap-fit engagement therebetween.

[0046] While the assembly described is generally discussed herein in terms of several embodiments, the present disclosure is to be considered as exemplary of the principals of the invention and is not intended to limit the invention to the embodiments illustrated. Various modifications may be made by those of skilled in the art

without departing from the scope of the present invention.
[0047] The scope of the present invention is defined by the appended claims.

Claims

1. A blood collection assembly (10), comprising:

a needle assembly (11) comprising a needle cannula (38) having an intravenous end with a bevel (74) puncture tip (44) and a non-patient end (46) mounted to a hub (12), the hub (12) extending between a distal end (14) and a proximal end (16) and including an anti-rotation element (64) extending from an outer surface (18) thereof; and

a holder housing (22) defining a receiving chamber (24) and including a rearward end (26) adapted to receive a sample collection tube within the chamber (24) and a forward end (28) including a receiving port (30) extending there-through and configured to receive at least a portion of the hub (12), the receiving port (30) including structure corresponding to the anti-rotation element (64) of the hub (12) for engagement therewith to prevent rotational movement of the hub (12) with respect to the holder housing (22) about a longitudinal axis defining the blood collection assembly (10);

the hub (12) and the receiving port (30) including interengaging structure for axially locking the hub (12) with the holder housing (22) with the anti-rotation element (64) of the hub (12) contacting the corresponding structure of the receiving port (30) thereby aligning the hub (12) and the needle cannula (38) to a predetermined position and limiting rotation of the hub (12) with respect to the holder housing (22) about the longitudinal axis,

characterized in that

the interengaging structure of the hub (12) includes a locking protrusion (60) extending perimetrically about the hub (12) outer surface (18), axially locking the hub (12) with respect to the holder housing (22), and the anti-rotation element (64) bisects and contacts the locking protrusion (60).

2. The blood collection assembly of claim 1, wherein said hub (12) includes the protrusion (60) extending substantially perimetrically about said outer surface at said proximal end (16) and said receiving port (30) includes a groove (58) extending substantially perimetrically within said receiving port (30), said protrusion (60) of said hub (12) adapted for locking engagement within said groove (58).

3. The blood collection assembly of claim 2, wherein the protrusion comprises an annular rib (60).

4. The blood collection assembly of claim 1, wherein said rearward end (26) of said holder housing (22) comprises at least one flange (76) for resisting rolling of said holder housing (22) on a flat surface thereby defining an upper surface (78) of said holder housing (22).

5. The blood collection assembly of claim 1, wherein insertion of said anti-rotation element (64) within said receiving port (30) substantially aligns the bevel (74) puncture tip (44) of said cannula (38) to a predetermined range of angles with respect to said holder housing (22).

6. The blood collection assembly of claim 1, further comprising a shield (84) in pivotable engagement with at least one of the hub (12) and the holder housing (22) for pivotal movement to encompass the intravenous end of the needle cannula (38).

7. The blood collection assembly of claim 1, wherein engagement between the hub (12) outer surface (18) and a corresponding receiving port (30) interior surface provides support against torque applied to the distal end (14) of the hub (12), thereby preventing release of the engagement established through the interengaging structure between the hub (12) outer surface (18) and the receiving port (30) interior surface.

8. The blood collection assembly of claim 1, wherein the anti-rotation element (64) comprises a nub (66) extending from the hub (12) outer surface (18) at the proximal end (16) of the hub (12), and wherein the receiving port (30) includes a notch portion (68) configured to receive and substantially abut an outer surface of the nub (66).

9. The blood collection assembly of claim 8, wherein the outer surface of the nub (66) is rounded and configured for insertion within an abutment against a complimentary rounded internal surface of the notch portion (68) of the receiving port (30).

10. The blood collection assembly of claim 1, wherein the rearward end (26) of the holder housing (22) includes a pair of flanges (76) extending from opposing sides thereof and a bottom surface (80) of the holder housing (22) is configured to rest on the patient's skin and wherein insertion of the anti-rotation element (64) within the receiving port (30) aligns the bevel (74) puncture tip (44) to a predetermined position with respect to the pair of flanges (76) and the bottom surface (80) of the holder housing (22).

11. The blood collection assembly of claim 10, wherein insertion of the anti-rotation element (64) within the receiving port (30) aligns the bevel (74) puncture tip (44) between about 60 degrees and about 120 degrees from at least one of the pair of flanges (76).
12. The blood collection assembly of claim 1, wherein the hub (12) is received in the receiving port (30) of the holder housing (22) in a snap-fit engagement.

Patentansprüche

1. Blutaufnahmevorrichtung (10) mit:

einer Nadelvorrichtung (11) mit einer Nadelkanüle (38), die ein intravenöses Ende mit einer angeschliffenen (74) Punktierungsspitze (44) und ein an einem Ansatz (12) befestigtes, nicht patientenseitiges Ende (46) hat, wobei der Ansatz (12) sich zwischen einem distalen Ende (14) und einem proximalen Ende (16) erstreckt und ein Drehverhinderungselement (64) aufweist, das von einer Außenfläche (18) des Ansatzes absteht; und

einem Haltergehäuse (22), das eine Aufnahmekammer (24) bildet und ein hinteres Ende (26), welches zur Aufnahme eines Probenaufnahmeröhrchens in der Kammer (24) in der Lage ist, und ein vorderes Ende (28) mit einem Aufnahmedurchlass (30) aufweist, der durch dieses Ende hindurch verläuft und zur Aufnahme mindestens eines Teils des Ansatzes (12) konfiguriert ist, wobei der Aufnahmedurchlass (30) eine dem Drehverhinderungselement (64) des Ansatzes (12) entsprechende Struktur zum Zusammengriff mit dem Ansatz aufweist, um eine Drehbewegung des Ansatzes (12) relativ zu dem Haltergehäuse (22) um eine die Blutaufnahmevorrichtung (10) definierende Längsachse zu verhindern;

wobei der Ansatz (12) und der Aufnahmedurchlass (30) eine Zusammengriffsstruktur zum axialen Verriegeln des Ansatzes (12) mit dem Haltergehäuse (22) aufweist, wobei das Drehverhinderungselement (64) des Ansatzes (12) die entsprechende Struktur des Aufnahmedurchlasses (30) kontaktiert, wodurch der Ansatz (12) und die Nadelkanüle (38) in eine vorbestimmte Position ausgerichtet werden und eine um die Längsachse herum erfolgende Drehung des Ansatzes (12) relativ zu dem Haltergehäuse (22) begrenzen,

dadurch gekennzeichnet, dass

die Zusammengriffsstruktur des Ansatzes (12) einen Verriegelungsvorsprung (60) aufweist, der sich umfangsmäßig um die Außenfläche (18) des Ansatzes (12) erstreckt, wodurch er

den Ansatz (12) relativ zu dem Haltergehäuse (22) axial verriegelt, und das Drehverhinderungselement (64) den Verriegelungsvorsprung (60) zweiteilt und kontaktiert.

2. Blutaufnahmevorrichtung nach Anspruch 1, bei der der Ansatz (12) einen Vorsprung (60) aufweist, der sich im Wesentlichen umfangsmäßig um die genannte Außenfläche an dem proximalen Ende (16) herum erstreckt, und der Aufnahmedurchlass (30) eine Nut (58) aufweist, die sich im Wesentlichen umfangsmäßig in dem Aufnahmedurchlass (30) erstreckt, wobei der Vorsprung (60) des Ansatzes (12) zum Verriegelungseingriff in die Nut (58) in der Lage ist.
3. Blutaufnahmevorrichtung nach Anspruch 2, bei der der Vorsprung eine ringförmige Rippe (60) aufweist.
4. Blutaufnahmevorrichtung nach Anspruch 1, bei der das hintere Ende (26) des Haltergehäuses (22) mindestens einen Flansch (76) aufweist, um zu verhindern, dass das Haltergehäuse (22) auf einer ebenen Fläche rollt, wodurch eine obere Fläche (78) des Haltergehäuses (22) definiert ist.
5. Blutaufnahmevorrichtung nach Anspruch 1, bei der durch die Einführung des Drehverhinderungselements (64) in den Aufnahmedurchlass (30) die angeschliffene (74) Punktierungsspitze (44) der Kanüle (38) im Wesentlichen auf einen vorbestimmten Bereich von Winkeln relativ zu dem Haltergehäuse (22) ausgerichtet wird.
6. Blutaufnahmevorrichtung nach Anspruch 1, ferner mit einem Schutzteil (84), das sich in Schwenkverbindung mit mindestens dem Ansatz (12) oder dem Haltergehäuse (22) befindet und zu einer Schwenkbewegung zwecks Umschließens des intravenösen Endes der Nadelkanüle (38) in der Lage ist.
7. Blutaufnahmevorrichtung nach Anspruch 1, bei der der Zusammengriff zwischen der Außenfläche (18) des Ansatzes (12) und der entsprechenden Innenfläche des Aufnahmedurchlasses (30) einen Widerhalt gegen eine auf das distale Ende (14) des Ansatzes (12) aufgebrachte Drehkraft bildet, wodurch ein Lösen des Eingriffs, der durch die zwischen der Außenfläche (18) des Ansatzes (12) und der Innenfläche des Aufnahmedurchlasses (30) vorgesehene Eingriffsstruktur besteht, verhindert wird.
8. Blutaufnahmevorrichtung nach Anspruch 1, bei der das Drehverhinderungselement (64) eine Noppe (66) aufweist, die an dem proximalen Ende (16) des Ansatzes (12) von der Außenfläche (18) des Ansatzes (12) absteht, und bei der der Aufnahmedurchlass (30) einen Einbuchtungsabschnitt (68) aufweist,

welcher derart konfiguriert ist, dass er eine Außenfläche der Noppe (66) aufnimmt und im Wesentlichen an dieser anliegt.

9. Blutaufnahmevorrichtung nach Anspruch 8, bei der die Außenfläche der Noppe (66) gerundet und zur Einführung in eine komplementäre gerundete Innenfläche des Einbuchtungsabschnitts (68) des Aufnahmedurchlasses (30) und zur Anlage gegen diese Innenfläche konfiguriert ist. 5 10
10. Blutaufnahmevorrichtung nach Anspruch 1, bei der das hintere Ende (26) des Haltergehäuses (22) ein Paar von Flanschen (76) aufweist, die von einander gegenüberliegenden Seiten dieses Endes abstehen, und eine Bodenfläche (80) des Haltergehäuses (22) zur Anlage an der Haut des Patienten konfiguriert ist, und bei der durch die Einführung des Drehverhinderungselements (64) in den Aufnahmedurchlass (30) die Punktierungsspitze (44) des Schliffs (74) in eine vorbestimmte Position relativ zu dem Paar von Flanschen (76) und der Bodenfläche (80) des Haltergehäuses (22) ausgerichtet ist. 15 20
11. Blutaufnahmevorrichtung nach Anspruch 10, bei der durch die Einführung des Drehverhinderungselements (64) in den Aufnahmedurchlass (30) die Punktierungsspitze (44) des Schliffs (74) in einem Bereich von ungefähr 60 Grad bis ungefähr 120 Grad von mindestens einem Flansch des Paares von Flanschen (76) ausgerichtet ist. 25 30
12. Blutaufnahmevorrichtung nach Anspruch 1, bei der der Ansatz (12) durch Schnappeingriff in dem Aufnahmedurchlass (30) des Haltergehäuses (22) aufgenommen ist. 35

Revendications

1. Ensemble de prélèvement de sang (10), comprenant : 40
- un ensemble d'aiguille (11) comprenant une canule d'aiguille (38) ayant une extrémité intraveineuse avec une pointe de ponction (44) à biseau (74) et une extrémité du côté opposé au patient (46) montée sur un raccord (12), le raccord (12) s'étendant entre une extrémité distale (14) et une extrémité proximale (16) et comportant un élément anti-rotation (64) s'étendant à partir d'une surface externe (18) de celui-ci ; et un boîtier support (22) définissant une chambre de réception (24) et comportant une extrémité arrière (26) adaptée pour recevoir un tube de prélèvement d'échantillon dans la chambre (24) et une extrémité avant (28) comportant un orifice de réception (30) s'étendant à travers celle-ci et 45 50 55

configuré pour recevoir au moins une partie du raccord (12), l'orifice de réception (30) comportant une structure correspondant à l'élément anti-rotation (64) du raccord (12) pour un engagement avec celui-ci afin d'empêcher un mouvement de rotation du raccord (12) par rapport au boîtier support (22) autour d'un axe longitudinal définissant l'ensemble de prélèvement de sang (10) ;

le raccord (12) et l'orifice de réception (30) comportant une structure d'interconnexion pour verrouiller axialement le raccord (12) avec le boîtier support (22) avec l'élément anti-rotation (64) du raccord (12) en contact avec la structure correspondante de l'orifice de réception (30) alignant ainsi le raccord (12) et la canule d'aiguille (38) à une position prédéterminée et limitant la rotation du raccord (12) par rapport au boîtier support (22) autour de l'axe longitudinal,

caractérisé en ce que

la structure d'interconnexion du raccord (12) comporte une saillie de verrouillage (60) s'étendant sur le périmètre autour de la surface externe (18) du raccord (12), verrouillant axialement le raccord (12) par rapport au boîtier support (22), et l'élément anti-rotation (64) coupe en deux la saillie de verrouillage (60) et entre en contact avec celle-ci.

2. Ensemble de prélèvement de sang de la revendication 1, dans lequel ledit raccord (12) comporte la saillie (60) s'étendant essentiellement sur le périmètre autour de ladite surface externe au niveau de ladite extrémité proximale (16) et ledit orifice de réception (30) comporte une rainure (58) s'étendant essentiellement sur le périmètre dans ledit orifice de réception (30), ladite saillie (60) dudit raccord (12) étant adaptée pour un engagement de verrouillage dans ladite rainure (58). 30 35
3. Ensemble de prélèvement de sang de la revendication 2, dans lequel la saillie comprend une nervure annulaire (60). 40
4. Ensemble de prélèvement de sang de la revendication 1, dans lequel ladite extrémité arrière (26) dudit boîtier support (22) comprend au moins une bride (76) pour résister au roulement dudit boîtier support (22) sur une surface plane définissant ainsi une surface supérieure (78) dudit boîtier support (22). 45 50
5. Ensemble de prélèvement de sang de la revendication 1, dans lequel l'insertion dudit élément anti-rotation (64) dans ledit orifice de réception (30) aligne essentiellement la pointe de ponction (44) à biseau (74) de ladite canule (38) à une plage prédéterminée d'angles par rapport audit boîtier support (22). 55

6. Ensemble de prélèvement de sang de la revendication 1, comprenant en outre un élément de protection (84) en engagement pivotant avec au moins l'un du raccord (12) et du boîtier support (22) pour un mouvement de pivotement afin d'entourer l'extrémité intraveineuse de la canule d'aiguille (38). 5
7. Ensemble de prélèvement de sang de la revendication 1, dans lequel l'engagement entre la surface externe (18) du raccord (12) et une surface interne d'orifice de réception (30) correspondante fournit un support contre le couple appliqué à l'extrémité distale (14) du raccord (12), empêchant ainsi la libération de l'engagement établi à travers la structure d'interconnexion entre la surface externe (18) du raccord (12) et la surface interne d'orifice de réception (30). 10
15
8. Ensemble de prélèvement de sang de la revendication 1, dans lequel l'élément anti-rotation (64) comprend une protubérance (66) s'étendant à partir de la surface externe (18) du raccord (12) au niveau de l'extrémité proximale (16) du raccord (12), et où l'orifice de réception (30) comporte une partie d'encoche (68) configurée pour recevoir une surface externe de la protubérance (66) et pour venir en butée essentiellement contre celle-ci. 20
25
9. Ensemble de prélèvement de sang de la revendication 8, dans lequel la surface externe de la protubérance (66) est arrondie et est configurée pour être insérée dans une butée contre une surface interne arrondie complémentaire de la partie d'encoche (68) de l'orifice de réception (30). 30
35
10. Ensemble de prélèvement de sang de la revendication 1, dans lequel l'extrémité arrière (26) du boîtier support (22) comporte une paire de brides (76) s'étendant à partir de côtés opposés de celui-ci et une surface inférieure (80) du boîtier support (22) est configurée pour reposer sur la peau du patient et où l'insertion de l'élément anti-rotation (64) dans l'orifice de réception (30) aligne la pointe de ponction (44) à biseau (74) à une position prédéterminée par rapport à la paire de brides (76) et la surface inférieure (80) du boîtier support (22). 40
45
11. Ensemble de prélèvement de sang de la revendication 10, dans lequel l'insertion de l'élément anti-rotation (64) dans l'orifice de réception (30) aligne la pointe de ponction (44) à biseau (74) entre environ 60 degrés et environ 120 degrés par rapport à au moins l'une de la paire de brides (76). 50
12. Ensemble de prélèvement de sang de la revendication 1, dans lequel le raccord (12) est reçu dans l'orifice de réception (30) du boîtier support (22) dans un engagement par encliquetage. 55

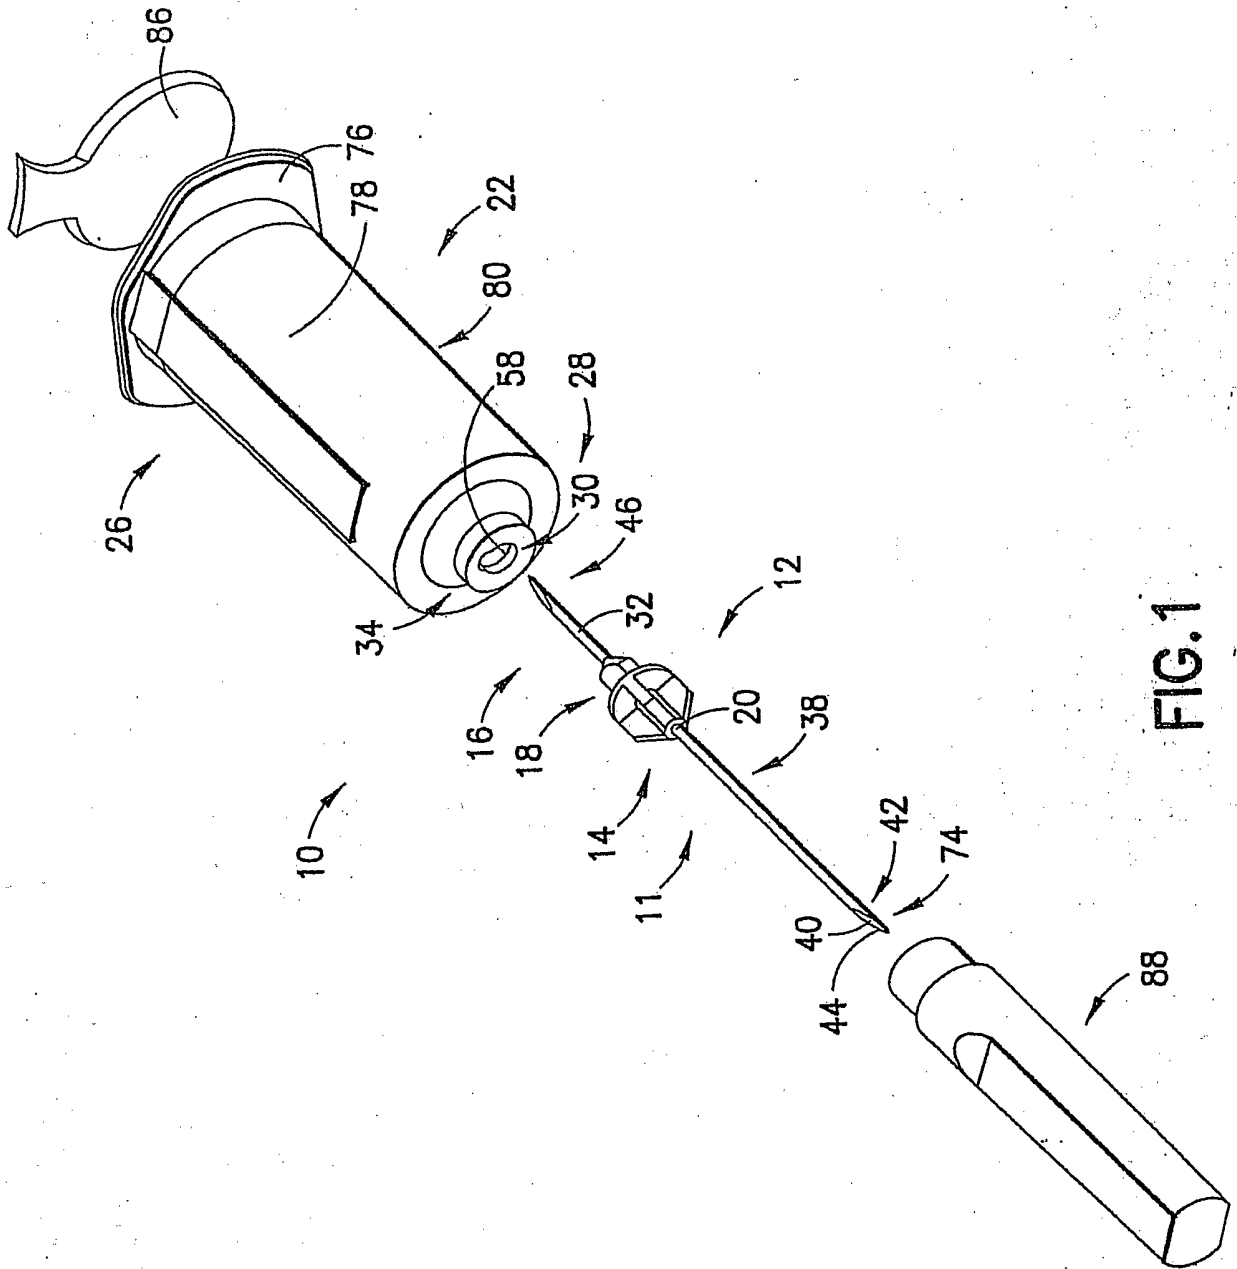


FIG. 1

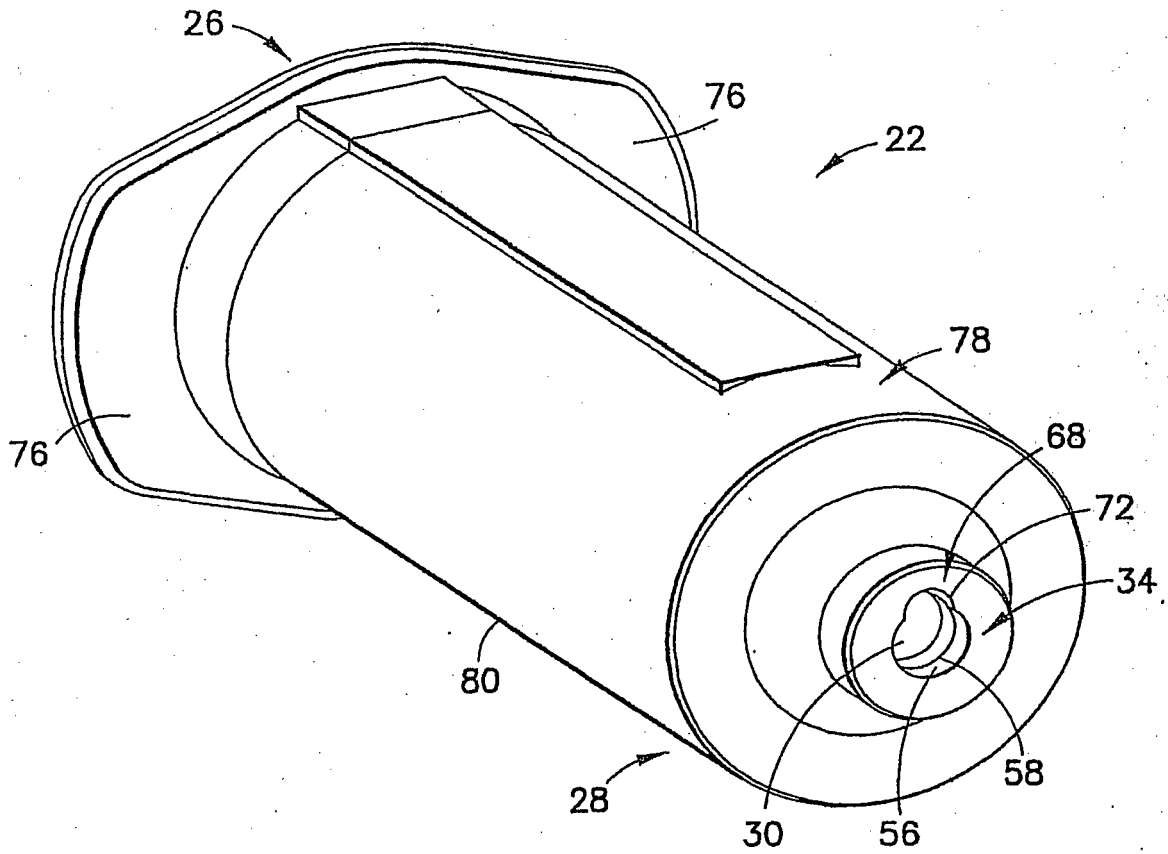


FIG.2

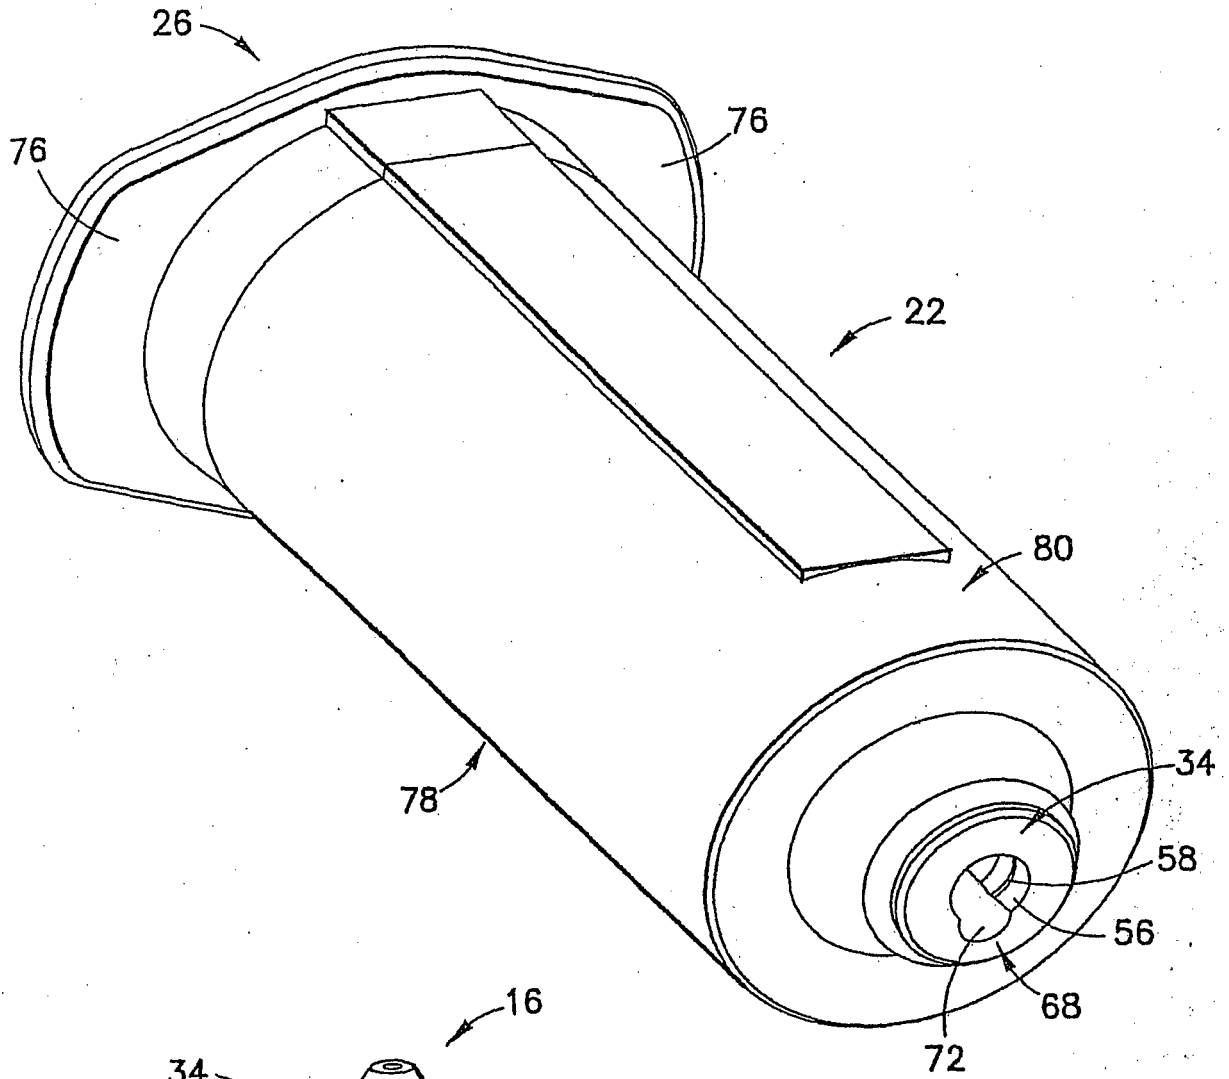


FIG. 3

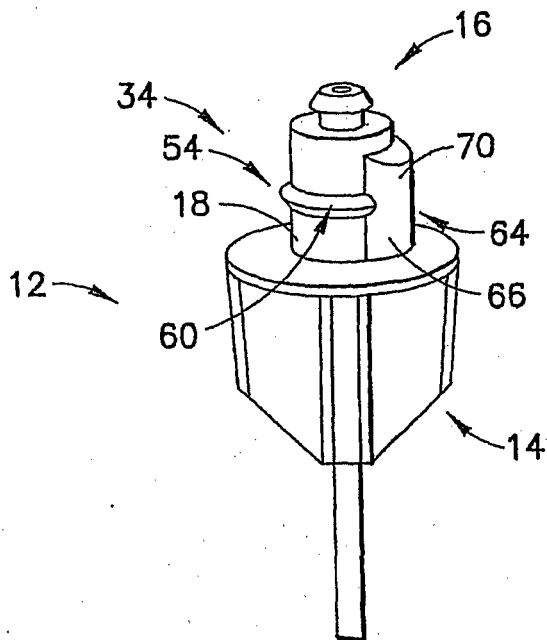


FIG. 4

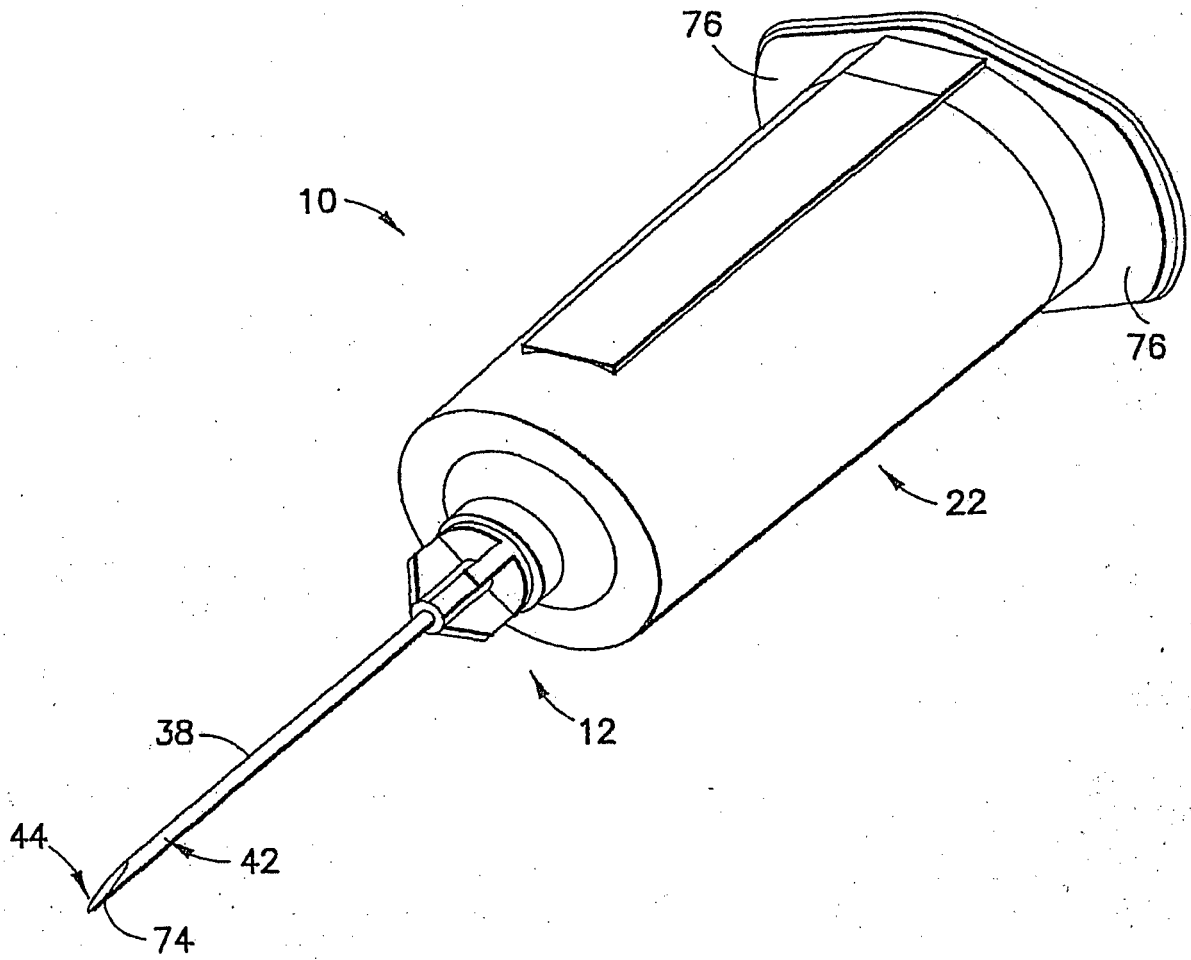


FIG. 5

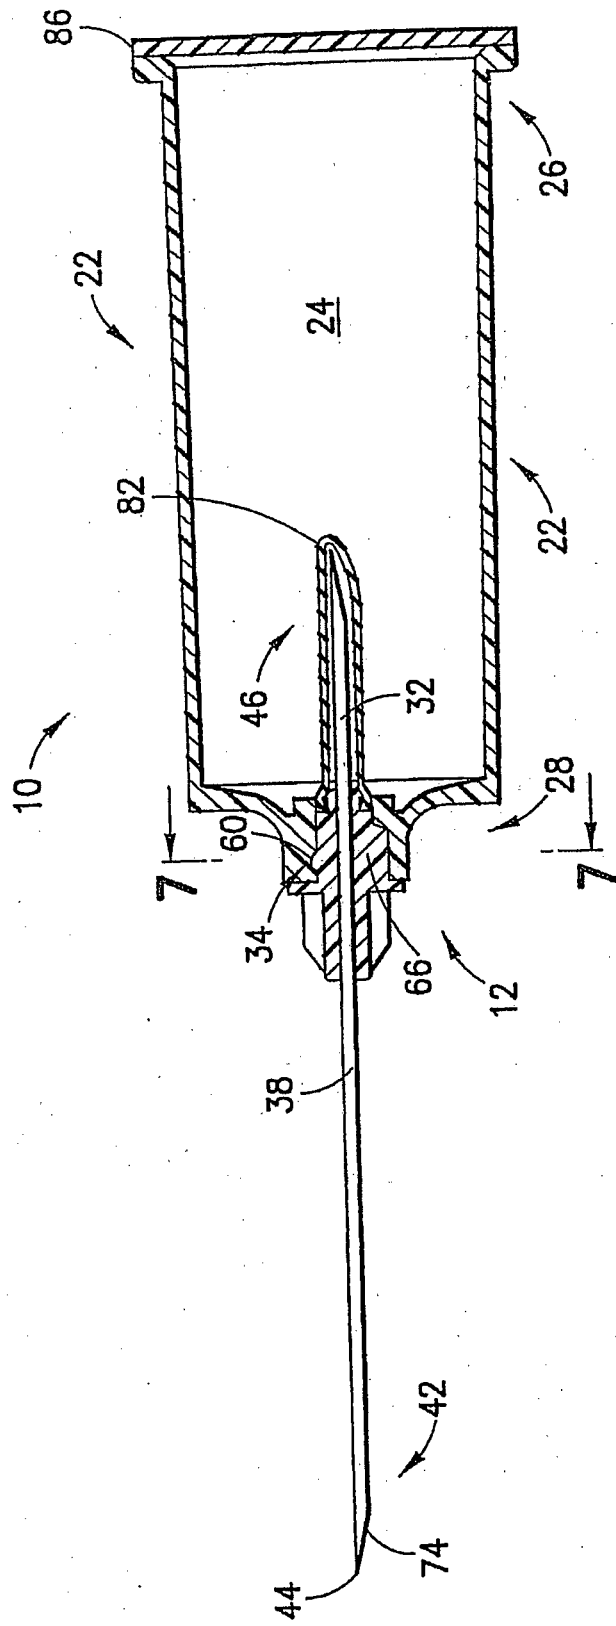


FIG. 6

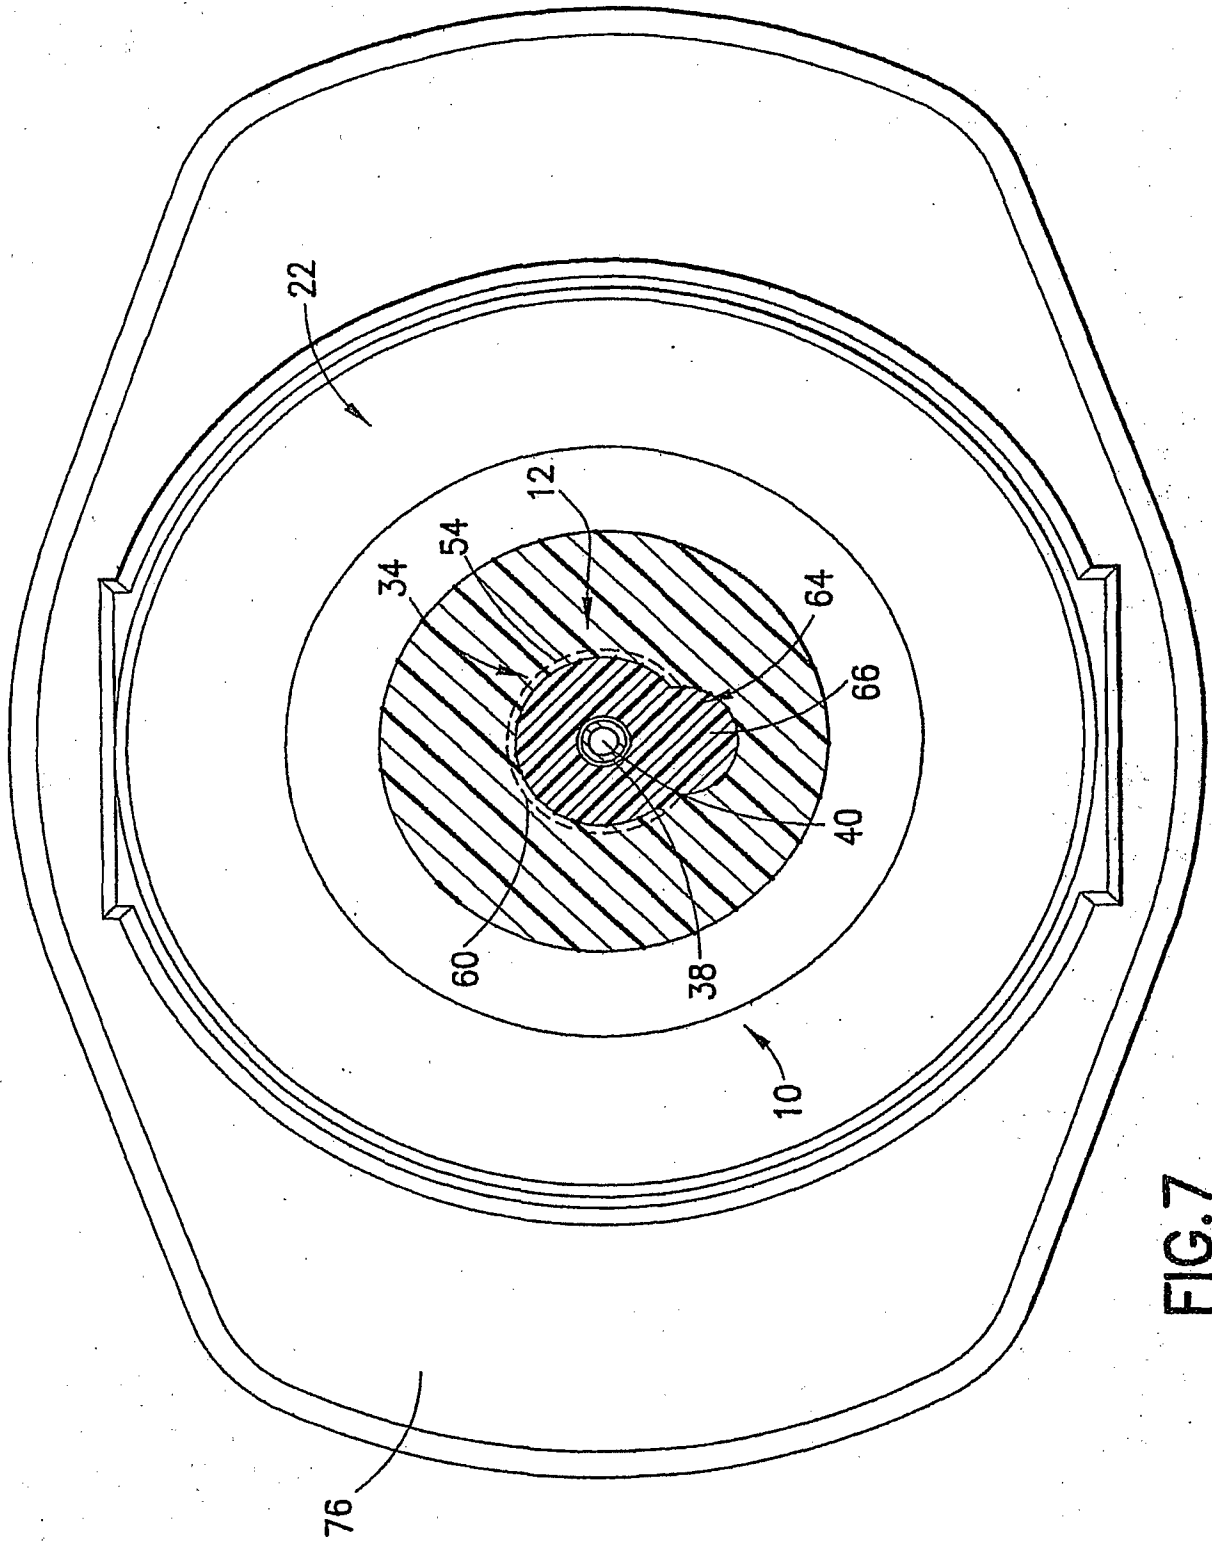


FIG.7

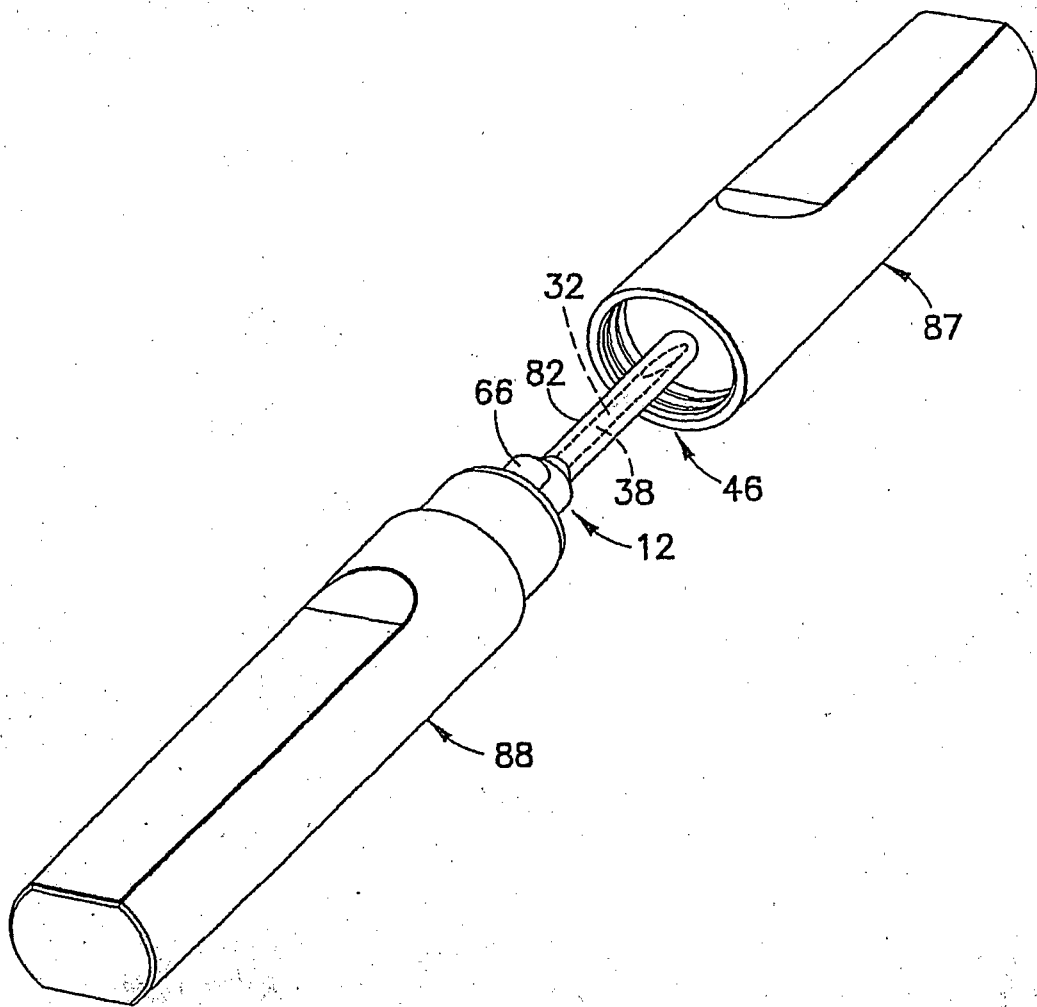


FIG.8

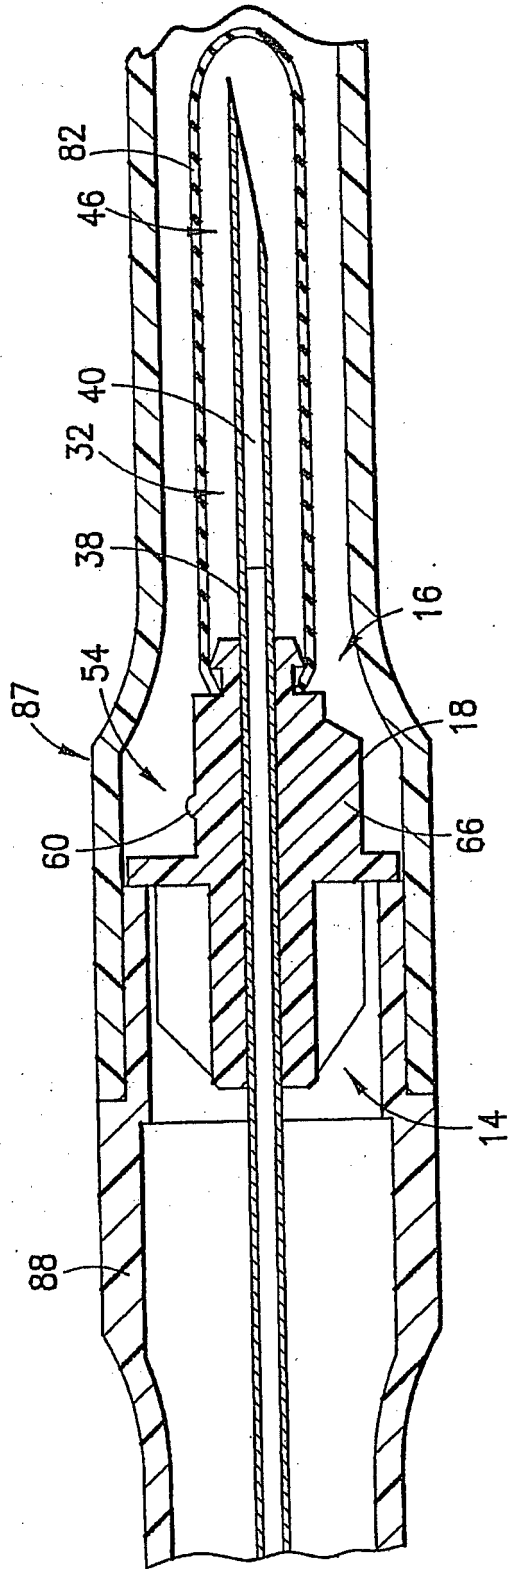


FIG.9

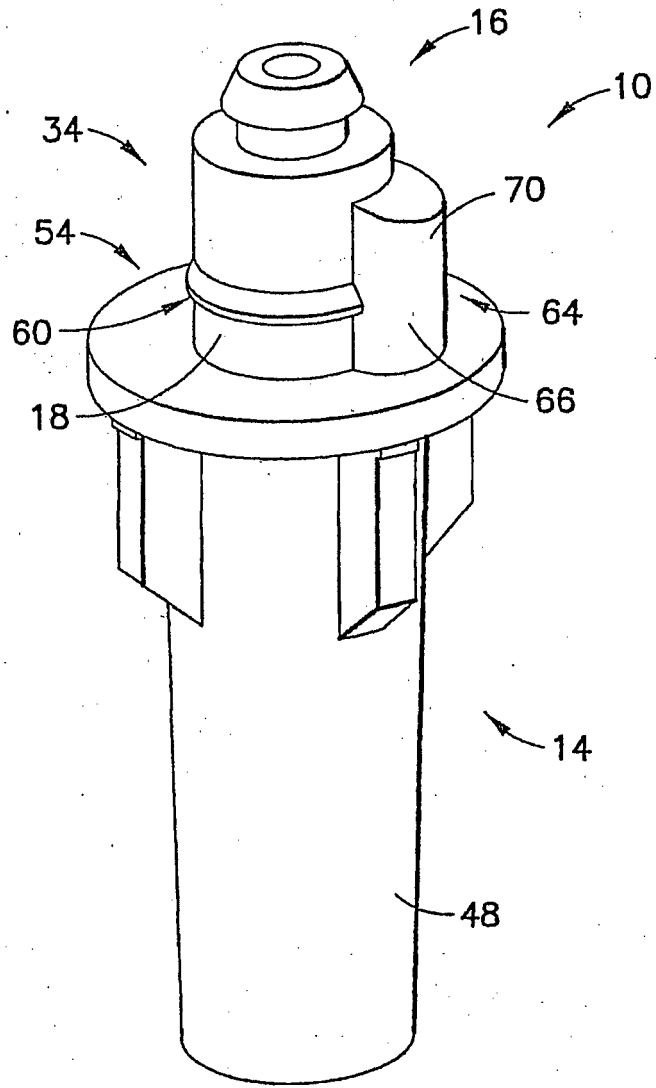
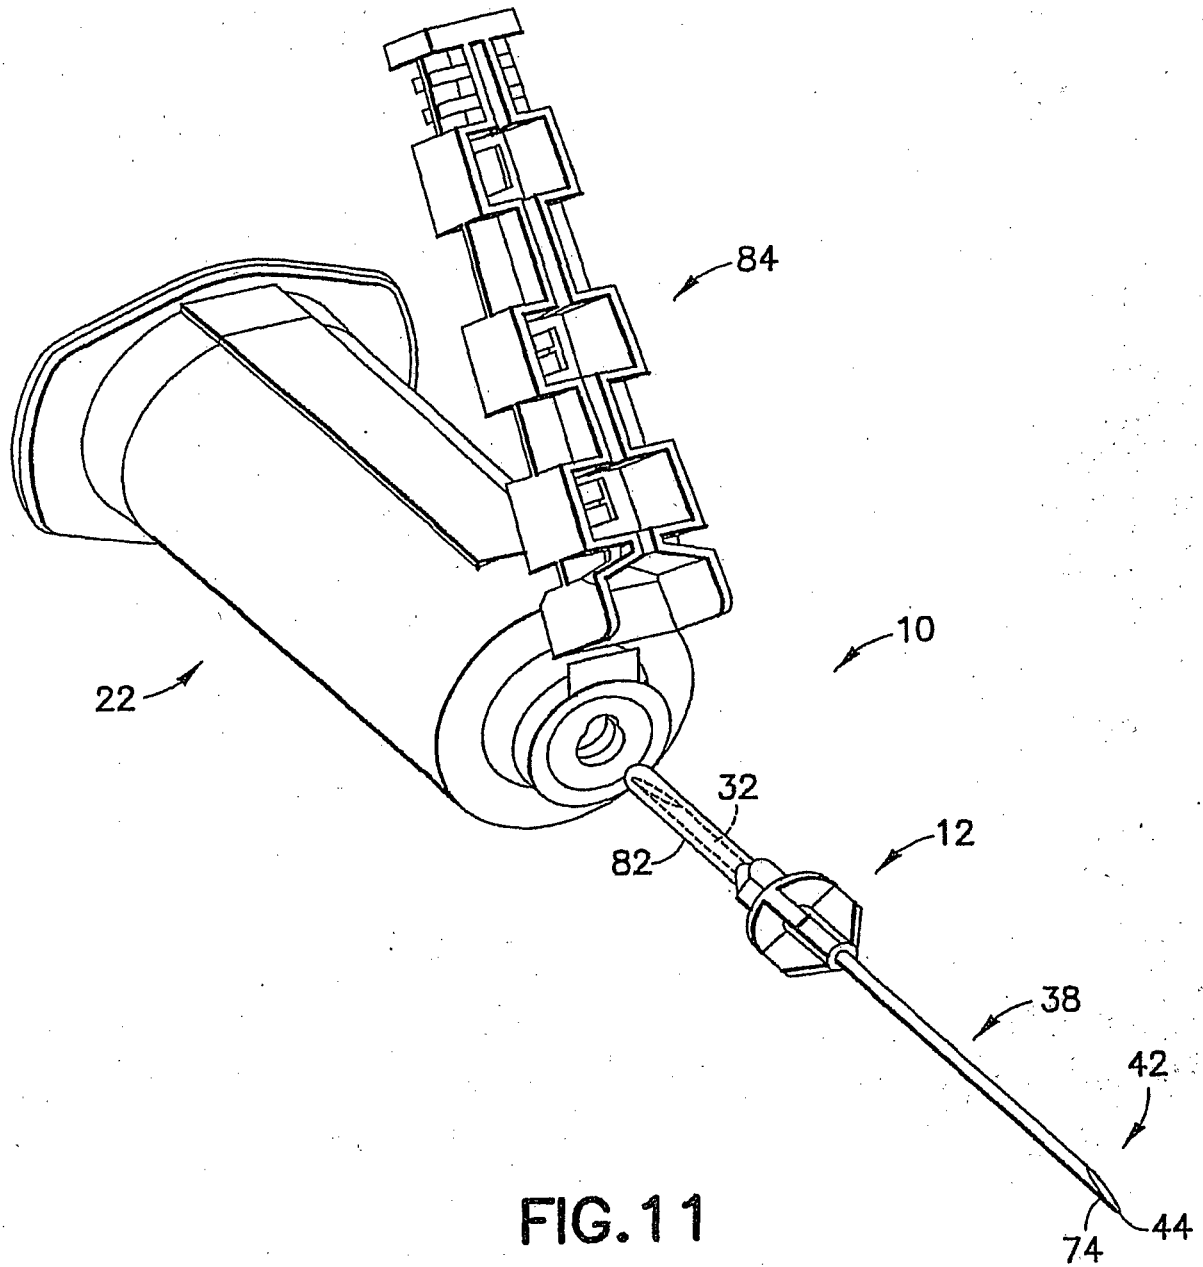


FIG. 10



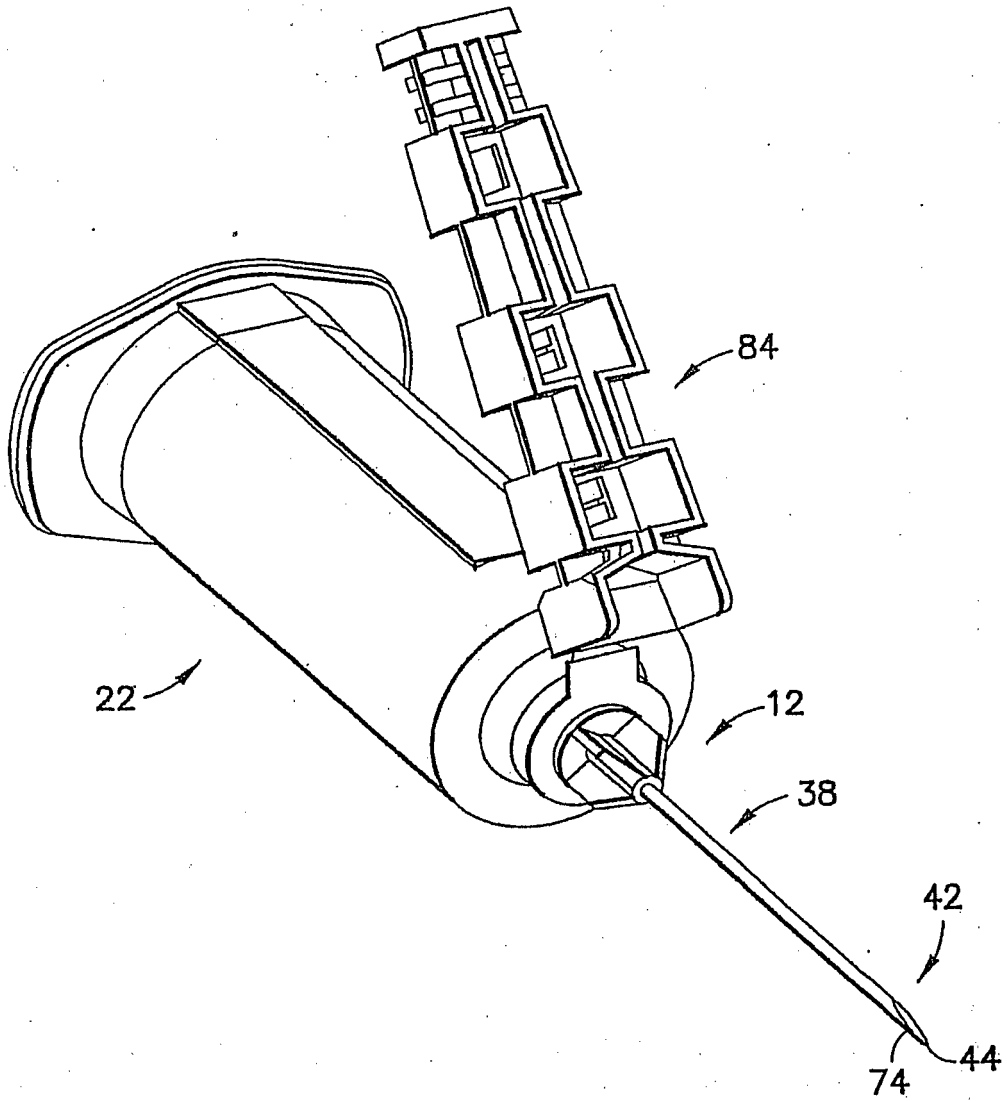


FIG.12

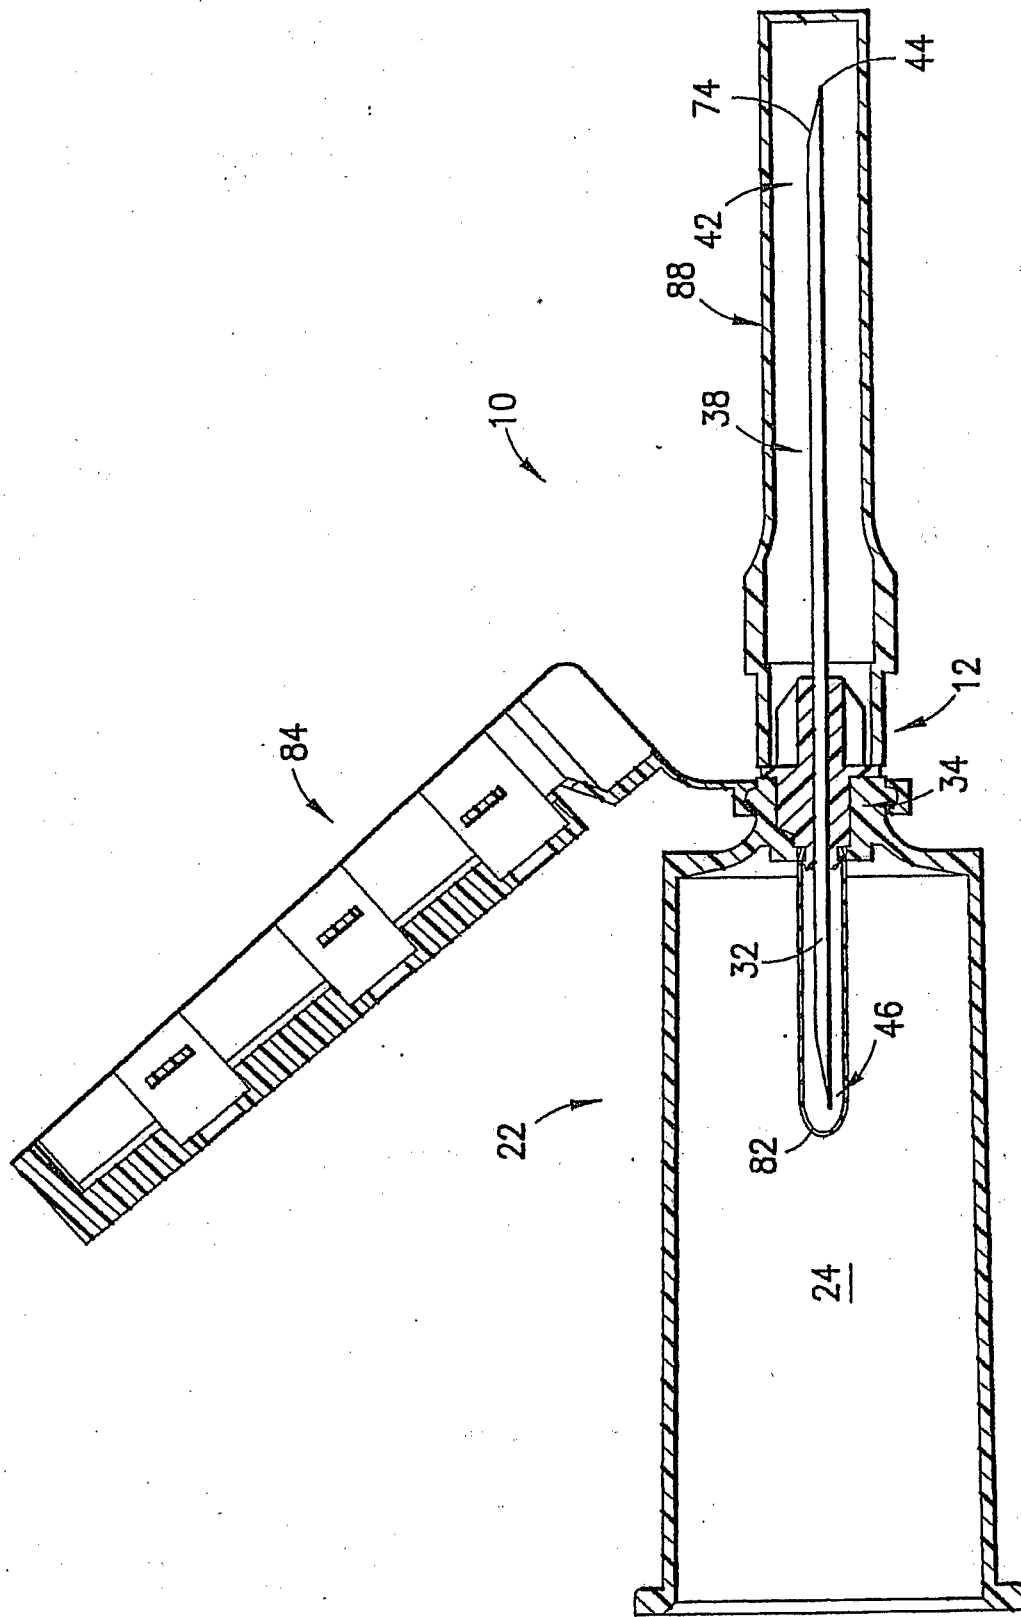


FIG.13

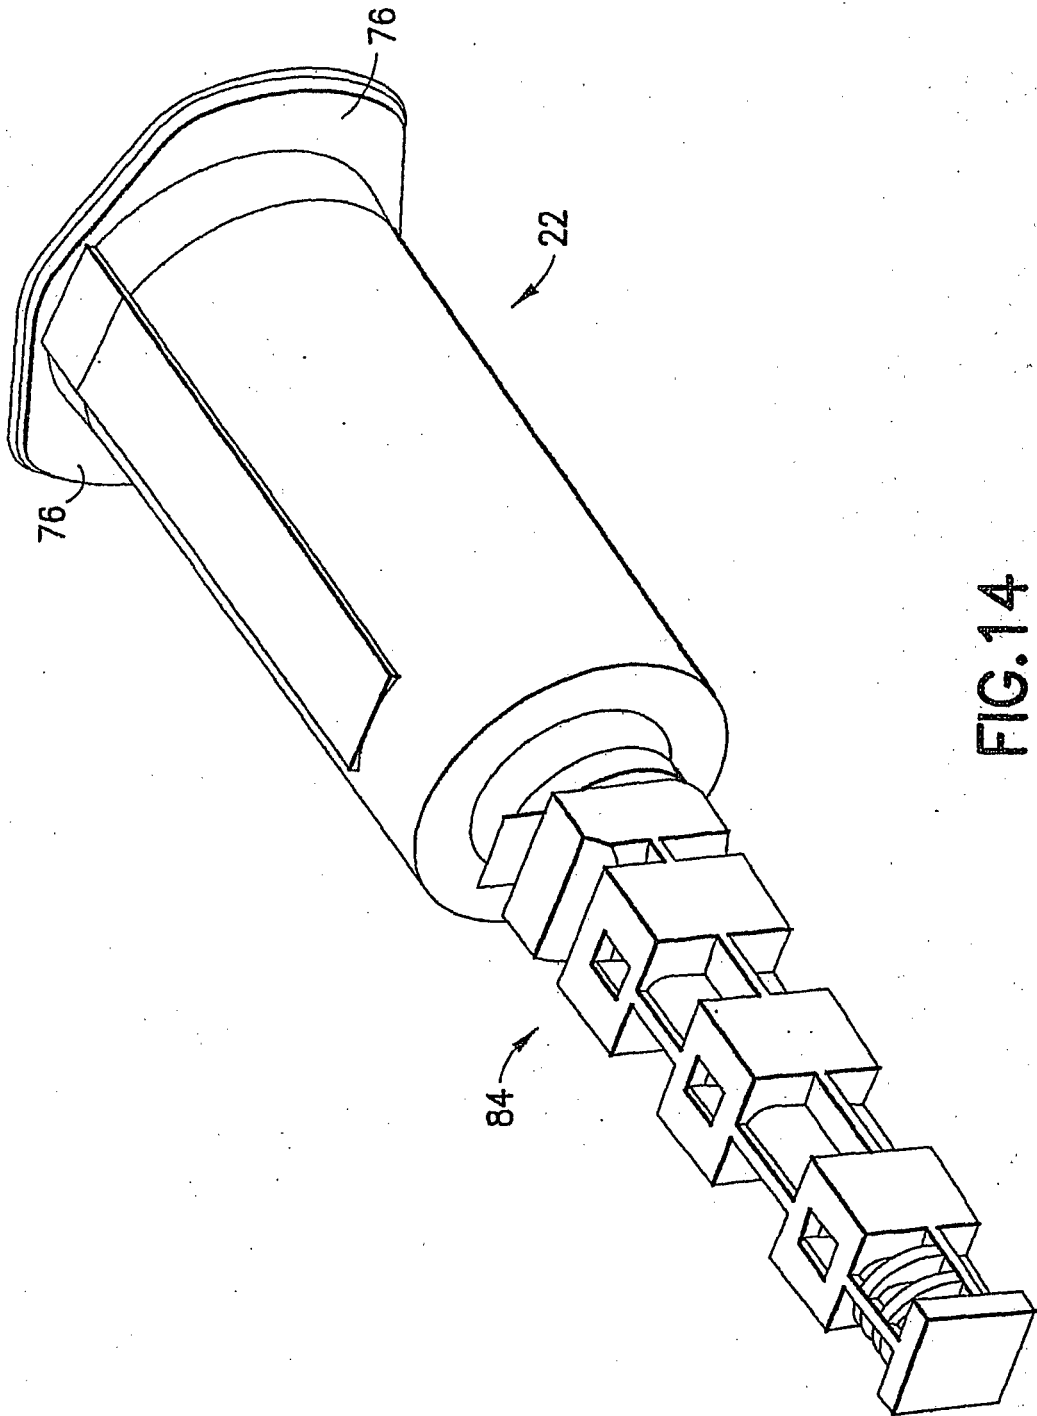


FIG.14

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 58929404 P [0001]
- US 5066287 A, Ryan [0005]
- US 5117837 A, Wanamaker [0006]
- US 5066286 A, Ryan [0007]
- WO 9007903 A [0008]
- EP 0364777 A [0009]
- EP 1433419 A [0010]

专利名称(译)	血液采集组件		
公开(公告)号	EP2745769B1	公开(公告)日	2016-02-24
申请号	EP2014160750	申请日	2005-07-20
[标]申请(专利权)人(译)	贝克顿·迪金森公司		
申请(专利权)人(译)	碧迪公司		
当前申请(专利权)人(译)	流式细胞Dickinson公司		
[标]发明人	SWENSON KIRK D		
发明人	SWENSON, KIRK, D.		
IPC分类号	A61B5/00 B65D81/00 A61B5/15 A61B5/154		
CPC分类号	A61B5/15003 A61B5/150267 A61B5/150396 A61B5/150496 A61B5/150572 A61B5/150633 A61B5/150671 A61B5/150732 A61B5/150778 A61B5/150816 A61B5/154 A61M5/348 A61M2205/6045 Y10T29/49826		
优先权	60/589294 2004-07-20 US		
其他公开文献	EP2745769A1		
外部链接	Espacenet		

摘要(译)

血液采集组件 (10) 包括鞘 (12)，鞘 (12) 具有远端 (14)，近端 (16)，鞘外表面 (18) 和穿过其延伸的内部开口 (20)。该组件还包括保持器壳体 (22)，其限定容纳腔室并具有适于在腔室内接收样品收集管的后端 (26) 和包括延伸到腔室中的接收端口 (30) 的前端 (28)。其中接收端口在其中接收鞘的近端的一部分 (54)。鞘的内部开口在其近端容纳穿刺元件 (38)，用于提供穿过其中的流体通道，并且穿刺元件接触样品收集管。轮毂和保持器壳体包括相互接合的结构 (60)，该结构基本上在其周围延伸，用于将轮毂与保持器壳体轴向锁定。

