



(19) **United States**

(12) **Patent Application Publication**
Kocis et al.

(10) **Pub. No.: US 2010/0057490 A1**
(43) **Pub. Date: Mar. 4, 2010**

(54) **METHODS, SYSTEMS, AND COMPUTER PROGRAM PRODUCTS FOR EVALUATING A PATIENT IN A PEDIATRIC INTENSIVE CARE UNIT**

(86) PCT No.: **PCT/US2007/012736**

§ 371 (c)(1),
(2), (4) Date: **Nov. 13, 2009**

Related U.S. Application Data

(75) Inventors: **Keith C. Kocis**, Chapel Hill, NC (US); **Daniel Joseph Kocis, JR.**, Manorville, NY (US)

(60) Provisional application No. 60/809,283, filed on May 30, 2006.

Publication Classification

Correspondence Address:
JENKINS, WILSON, TAYLOR & HUNT, P. A.
Suite 1200 UNIVERSITY TOWER, 3100 TOWER BLVD.,
DURHAM, NC 27707 (US)

(51) **Int. Cl.**
G06Q 50/00 (2006.01)
A61B 5/00 (2006.01)

(52) **U.S. Cl.** **705/2; 600/301**


(57) **ABSTRACT**

(73) Assignee: **THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL**, Chapel Hill, NC (US)

Methods, systems, and computer program products for evaluating a patient in a pediatric intensive care unit (PICU) are disclosed. According to one aspect, a method may include collecting physiological data associated with a patient upon admission to a PICU and at least once after admission to the PICU. The physiological data may be associated with a statistical model, and a risk of mortality of the patient may be continually determined.

(21) Appl. No.: **12/302,008**

(22) PCT Filed: **May 30, 2007**

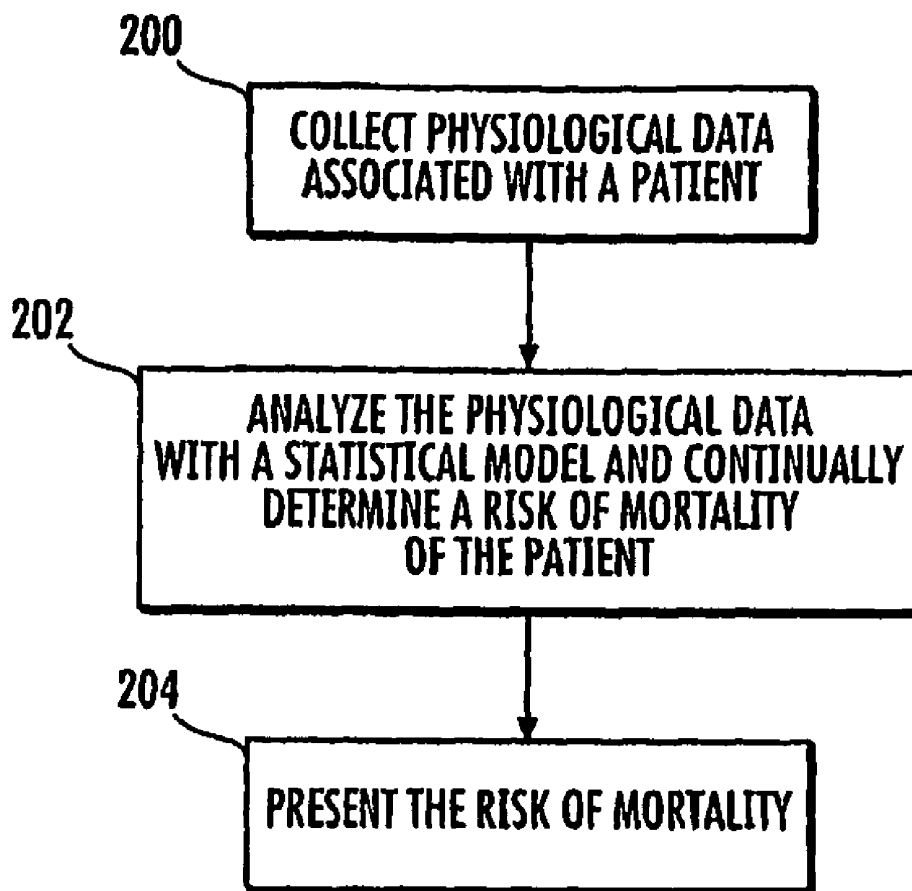

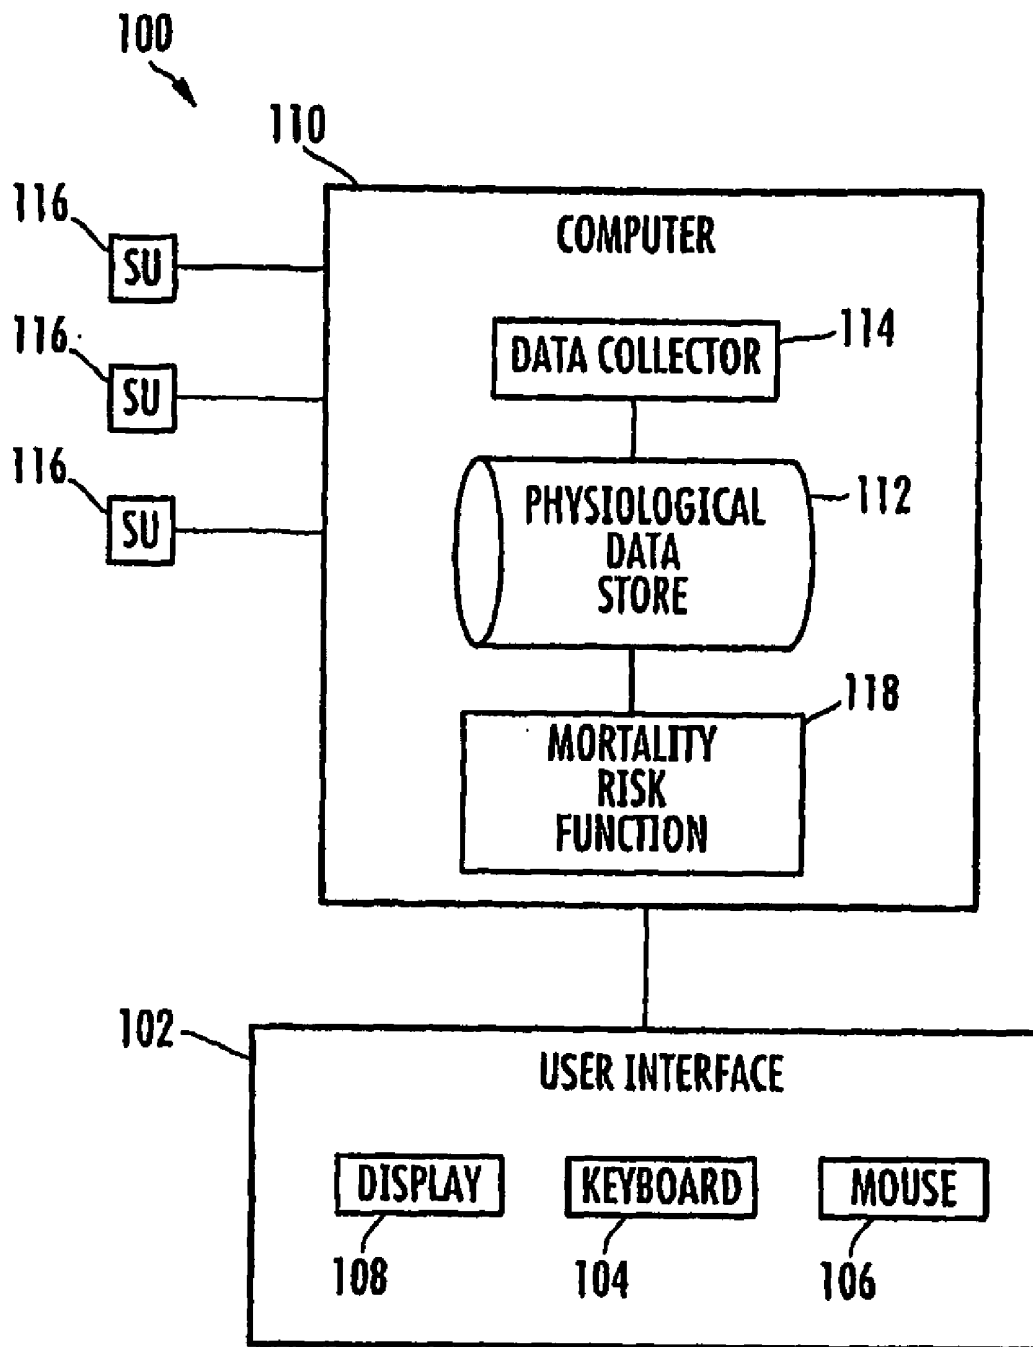
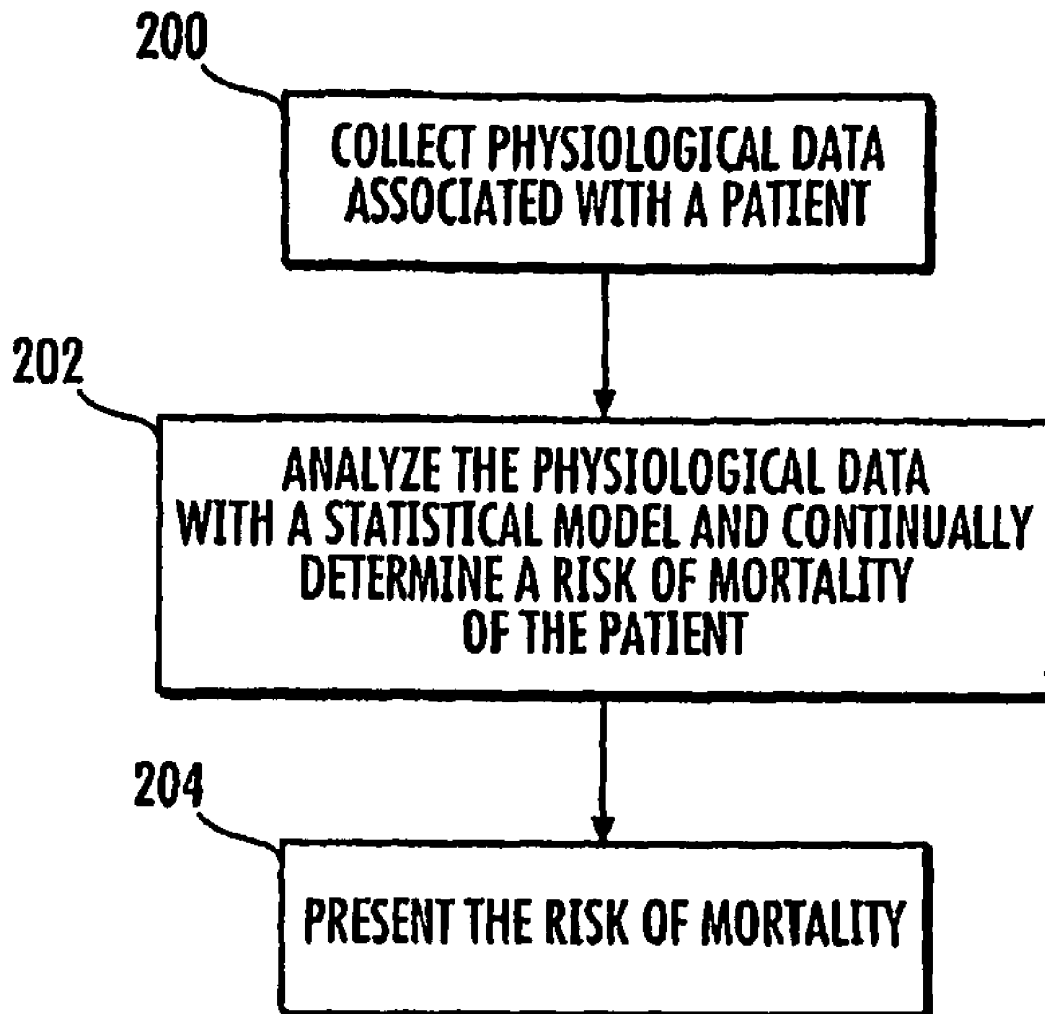


FIG. 1

**FIG. 2**

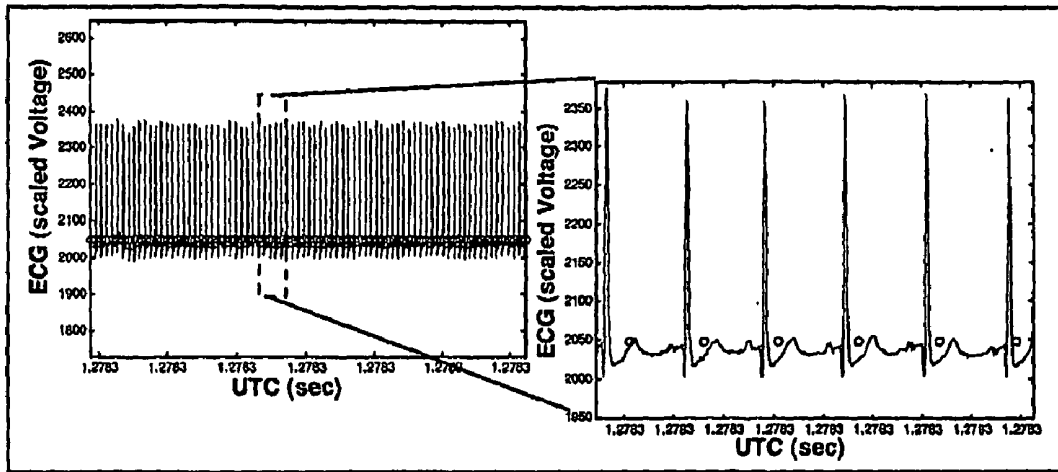


FIG. 3

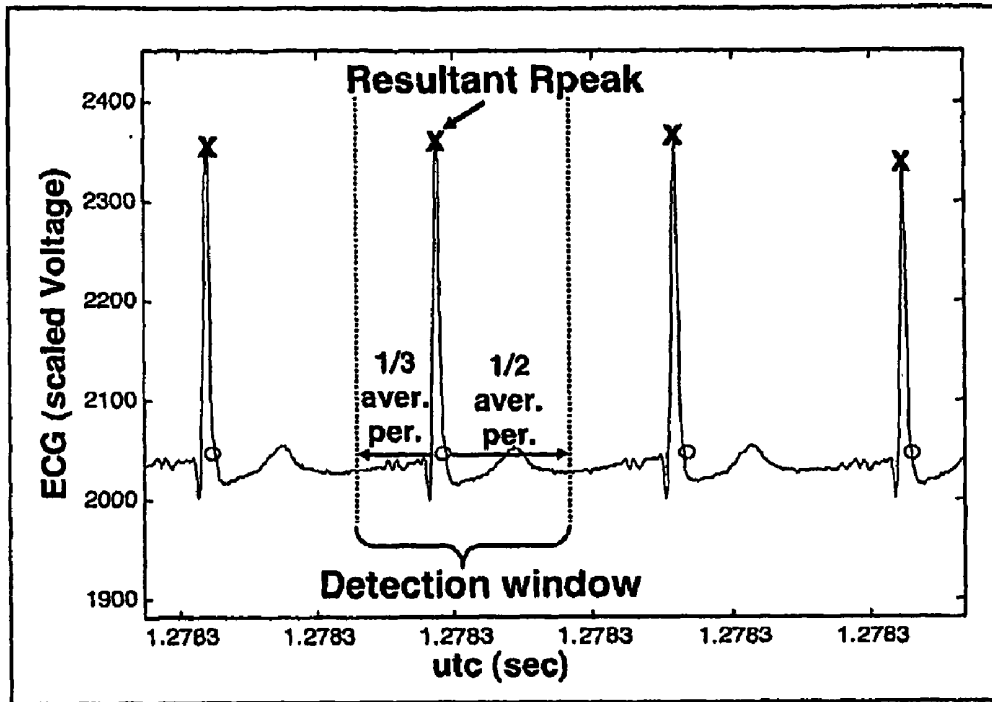


FIG. 4

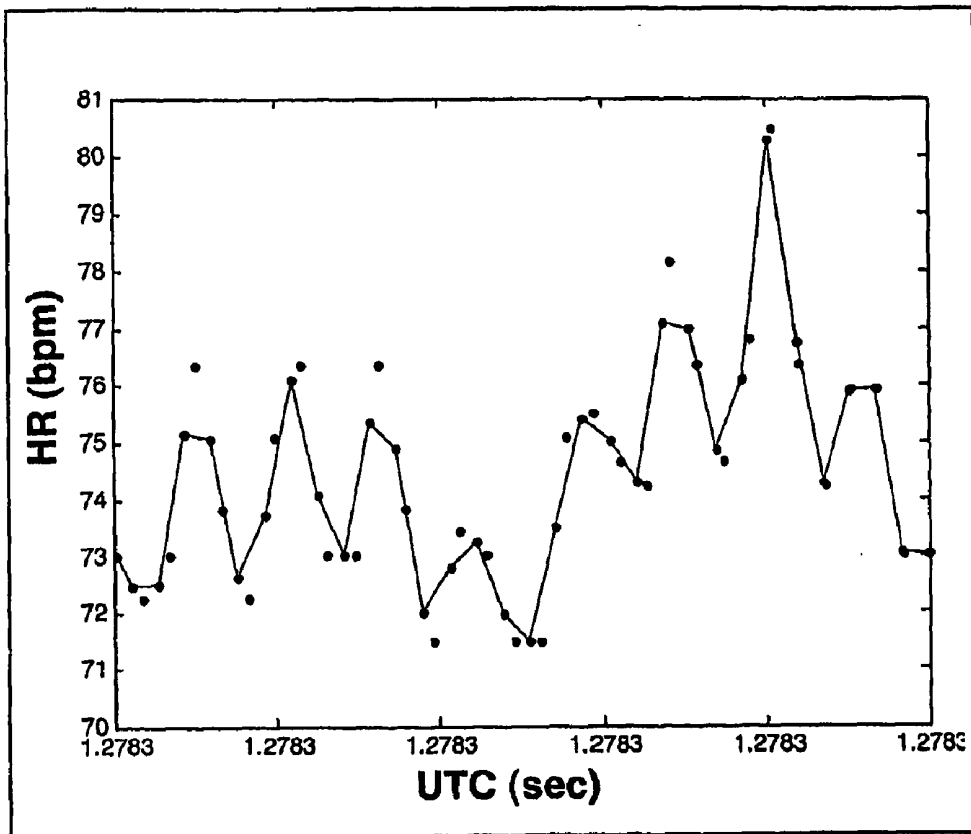


FIG. 5

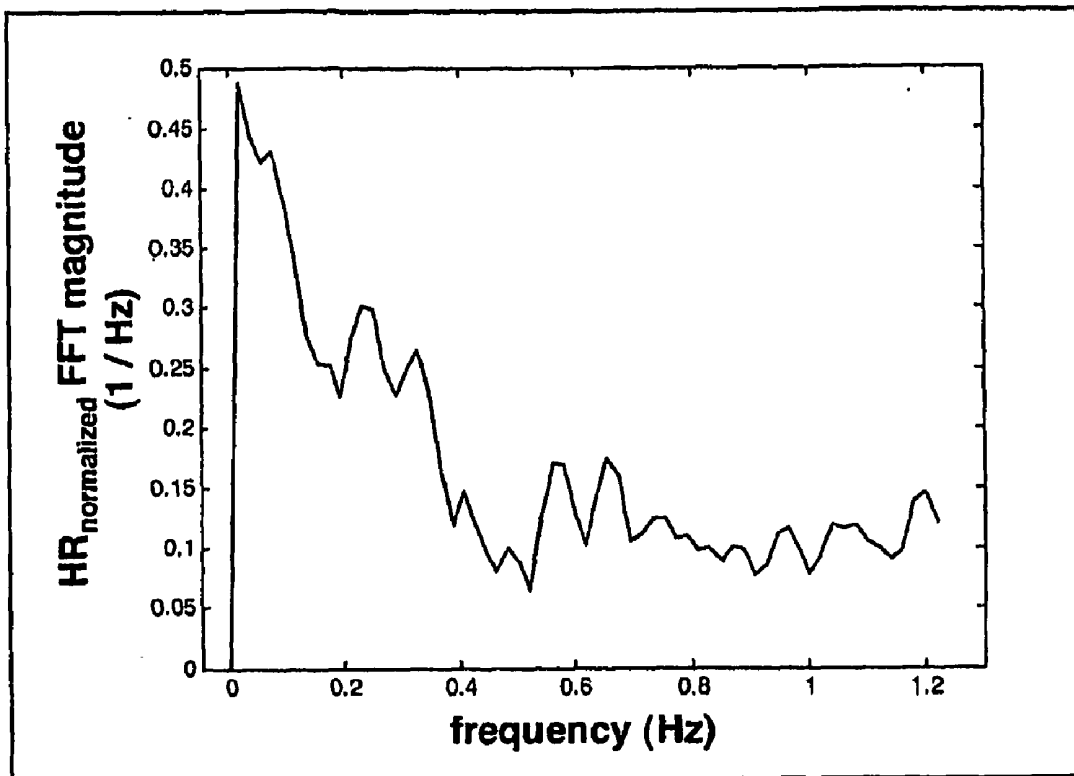


FIG. 6

QIMS INTERVALS AND THEIR CODED VARIABLES OF PROJECT CHART THAT HAVE RESPONSE RATES SIGNIFICANTLY HIGHER OR LOWER (WITH 95% CONFIDENCE) THAN THE OVERALL RESPONSE RATE--20%

QIMS CODED	VARIABLE-- ORIGINAL INTERVAL	NO. OF SOLICITED	NO. OF RESPS.	--RESPONSE-- RATE	INDEX	INDEX OF THE 95% CONFIDENCE INTERVAL'S CLOSEST POINT TO THE OVERALL RESPONSE RATE
D1	PUPILS 1-2	315	315	100.00	182	182
D2	TEMP 30.9-35.1	138	137	99.28	181	178
D3	EPI 1	551	544	98.73	180	176
D4	GCS 3	470	442	94.04	171	167
D5	TEMP 35.2-36	167	155	92.81	169	162
D6	GLUCOSE 143-146	37	35	94.59	172	159
D7	GLUCOSE 139-142	33	31	93.94	171	156
D8	GLUCOSE 134-138	34	31	91.18	166	149
D9	DOPAMINE 1	570	475	83.33	152	146
D10	PIO2 0.45-0.58	193	162	83.94	153	144
D11	GLUCOSE 148-155	33	28	84.85	155	132
D12	OTHER 1	392	298	76.02	139	131
D13	GCS 12-15	333	126	37.84	69	78
D14	GCS 4-7	237	84	35.44	65	76
D15	GCS 10-11	420	150	35.05	64	72
D16	GLUCOSE 217-367	19	4	21.05	38	72
D17	SYSTOLIC 82-98	56	15	26.79	49	70
D18	EPI 0	1189	416	34.99	64	69
D19	SYSTOLIC 74-80	59	15	25.42	46	67
D20	TEMP 37.4-36	152	44	28.95	53	66
D21	PIO2 0.22-0.26	223	66	29.60	54	65
D22	TEMP 38.1-39.6	68	14	20.59	38	55 *

FIG. 7

QTMS V3.2		INTERPRETATION OF THE FACTOR STRUCTURE COMPLETENESS OF THE FACTOR SOLUTION: 82.54					
FACTOR #	% VARIANCE EXPLAINED	VARIABLE	HIGHEST LOAD	COMMUNALITY	100%-->	SECOND HIGHEST LOAD & FACTOR	
1	17.7	D2 (TEMP: 30.9-35.1)	0.77881	83.2	*****	-0.39056 2	
		D4 (GCS:3)	0.77471	81.4	*****	0.36515 2	
		D3 (EPI:1)	0.76815	88.1	*****	0.34739 4	
		D9 (DOPAMINE:1)	0.70872	72.9	*****	0.22993 4	
		D18 (EPI:0)	-0.70414	83.9	*****	-0.38040 4	
		D1 (PUPILS:1 - 2)	0.65118	78.7	*****	0.51098 2	
		D10 (FI02: 0.45 - 0.58)	0.60700	60.3	*****	0.36033 10	
2	6.7	D5 (TEMP: 35.2-36)	0.87249	81.5	*****	0.19786 1	
3	6.0	D13 (GCS: 12-15)	0.78088	81.4	*****	-0.32036 1	
		D15 (GCS: 10-11)	-0.73772	86.6	*****	-0.34306 1	
4	5.8	D6 (GLUCOSE: 143-146)	0.84874	77.9	*****	0.12862 5	
5	5.6	D14 (GCS: 4-7)	0.93248	90.9	*****	0.12046 4	
6	5.3	D17 (SYSTOLIC 82-98)	0.88893	82.5	*****	-0.12746 6	
		D21 (FI02: 0.22-0.28)	0.53395	64.3	*****	0.46545 6	
7	5.3	D7 (GLUCOSE: 139-142)	0.91441	86.6	*****	-0.09886 4	
8	5.2	D19 (SYSTOLIC: 74-90)	0.91189	86.1	*****	-0.08747 6	
9	5.1	D20 (TEMP: 37.4-30)	0.92235	88.8	*****	-0.11226 12	
		D12 (OTHER: 1)	-0.44887	77.5	*****	-0.36680 12	
10	5.1	D11 (GLUCOSE: 148-155)	0.93431	88.0	*****	0.06530 1	
11	5.0	D8 (GLUCOSE: 134-138)	0.96953	94.6	*****	-0.04281 4	
12	4.9	D22 (TEMP: 38.1-39.6)	0.90260	87.5	*****	0.13483 13	
13	4.7	D22 (GLUCOSE: 217-367)	0.94567	92.9	*****	0.11763 12	

FIG. 8

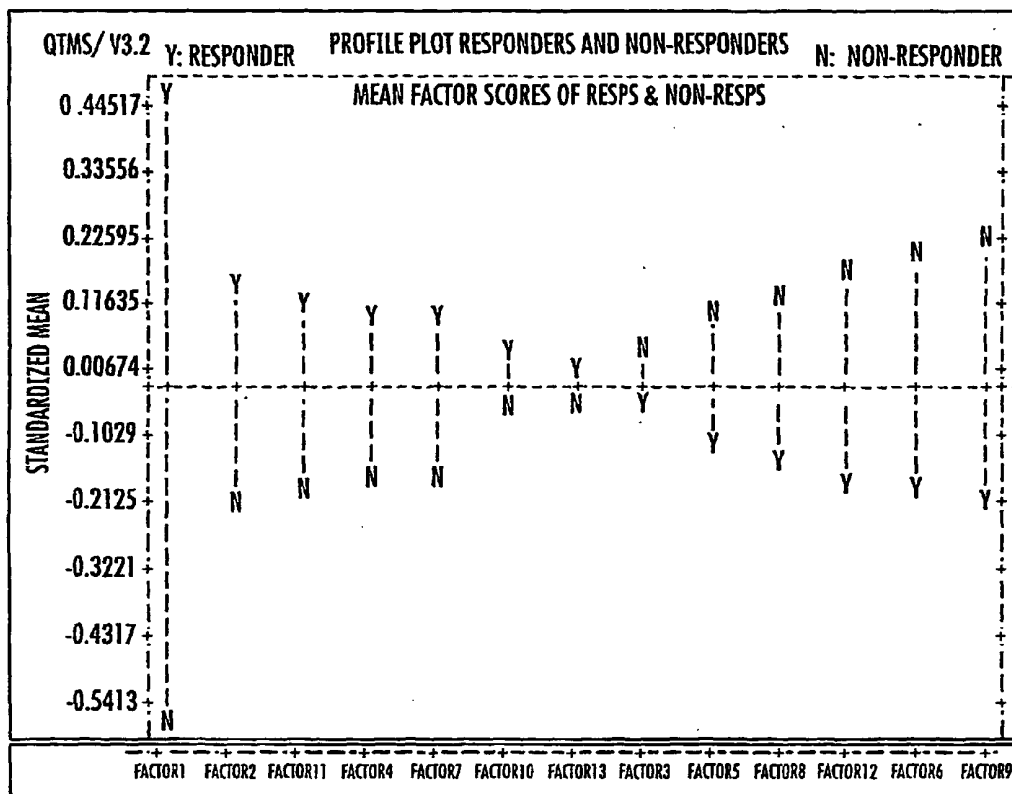


FIG. 9

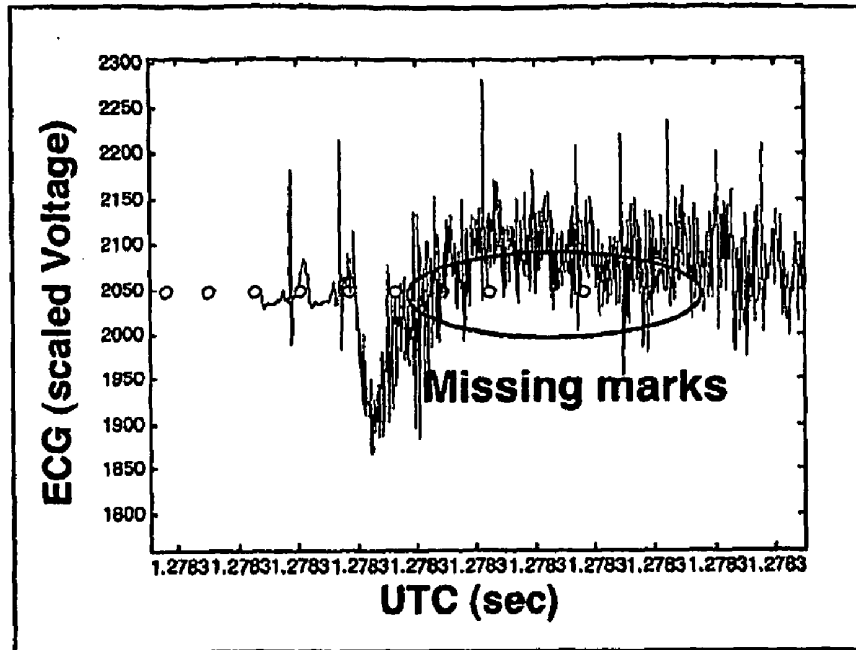


FIG. 10A

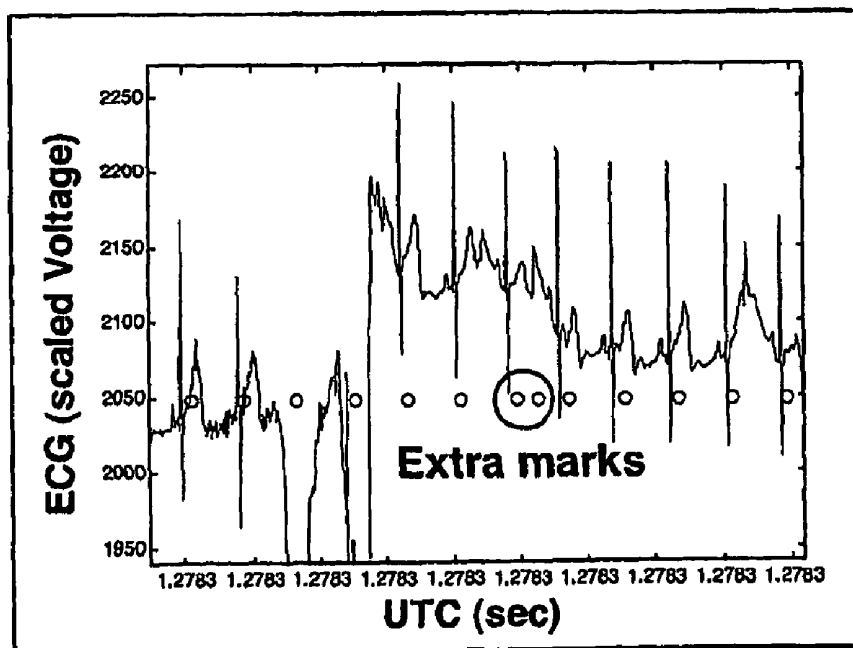


FIG. 10B

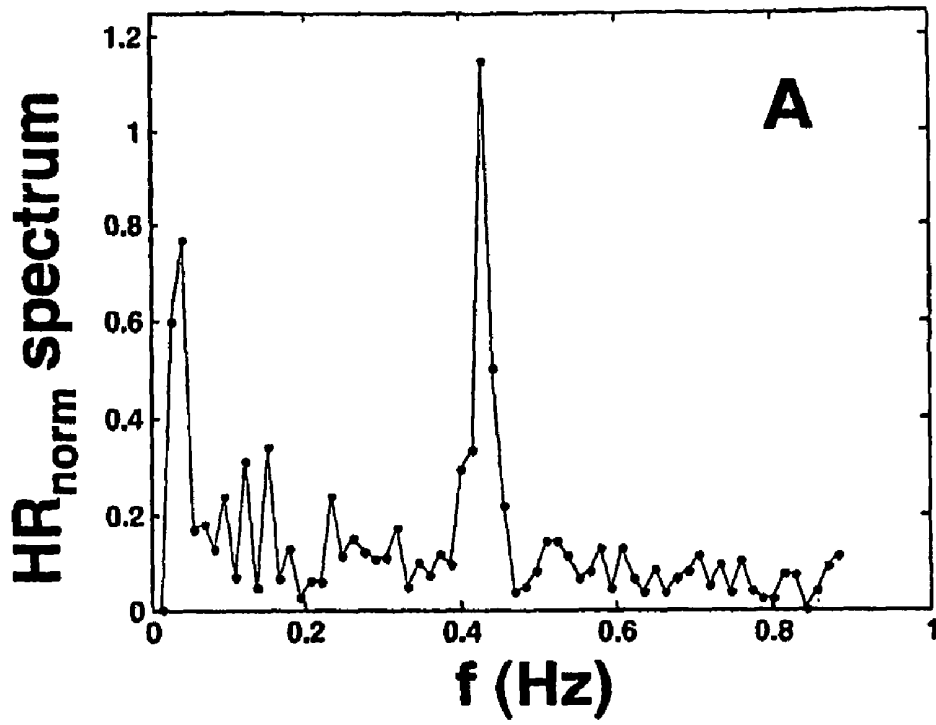


FIG. 11A

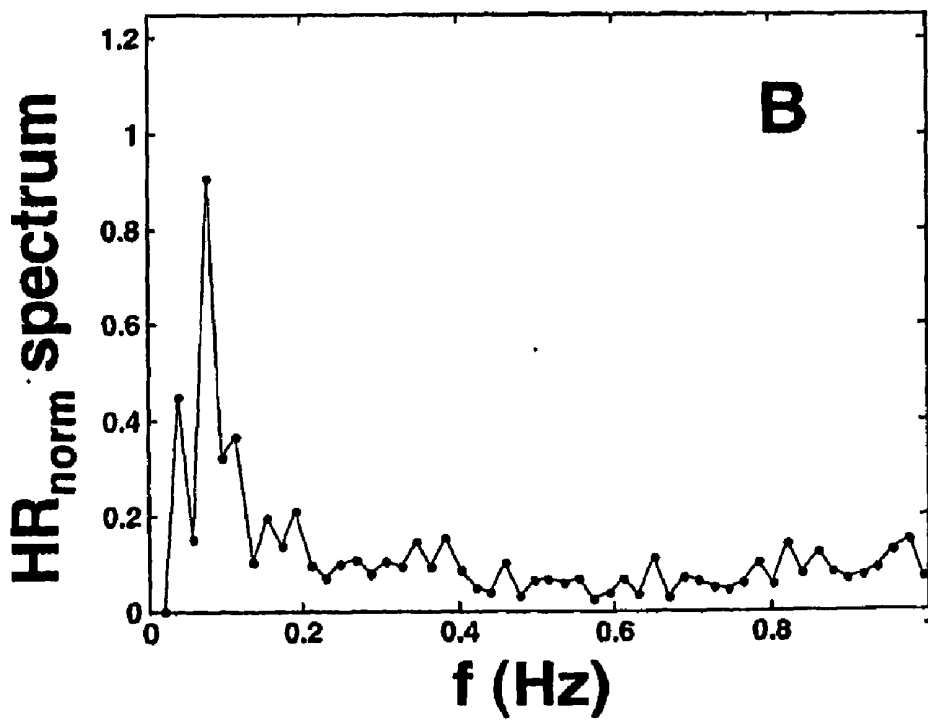


FIG. 11B

SINGLE FACTOR SCAN TYPE IS "CONTINUOUS"		BASE BALANCE			RESULT			QTMAC V3.2	
#	INTERVAL	NO. OF SOLICITED RESPONDERS	NO. OF RESPONSE RATE	CHISQ	PROB.	RESPONSE INDEX			
1	-21.6--6.5	91	86.813	4.006	0.0433	125 *****			
2	-6.4--4.4	93	91.898	6.525	0.0106	192 *****			
3	-4.3--2.9	96	78.723	1.193	0.2746	114 *****			
4	-2.8--1.5	91	70.833	0.031	0.8606	102 *****			
5	-1.8--0.2	94	58.242	1.617	0.2036	84 **			
6	0.3--1.8	91	65.957	0.155	0.6936	95 *****			
7	1.9--8.7	92	69.231	0.000	0.9900	100 *****			
8	3.8--6.1	91	88.208	2.765	0.0963	80 *			
9	6.2--9.7	96	54.348	2.982	0.0842	78 *			
10	9.8--19.8	72	61.111	0.703	0.4017	88 ****			
		910	631	18.979	0.0180	100			




FIG. 12

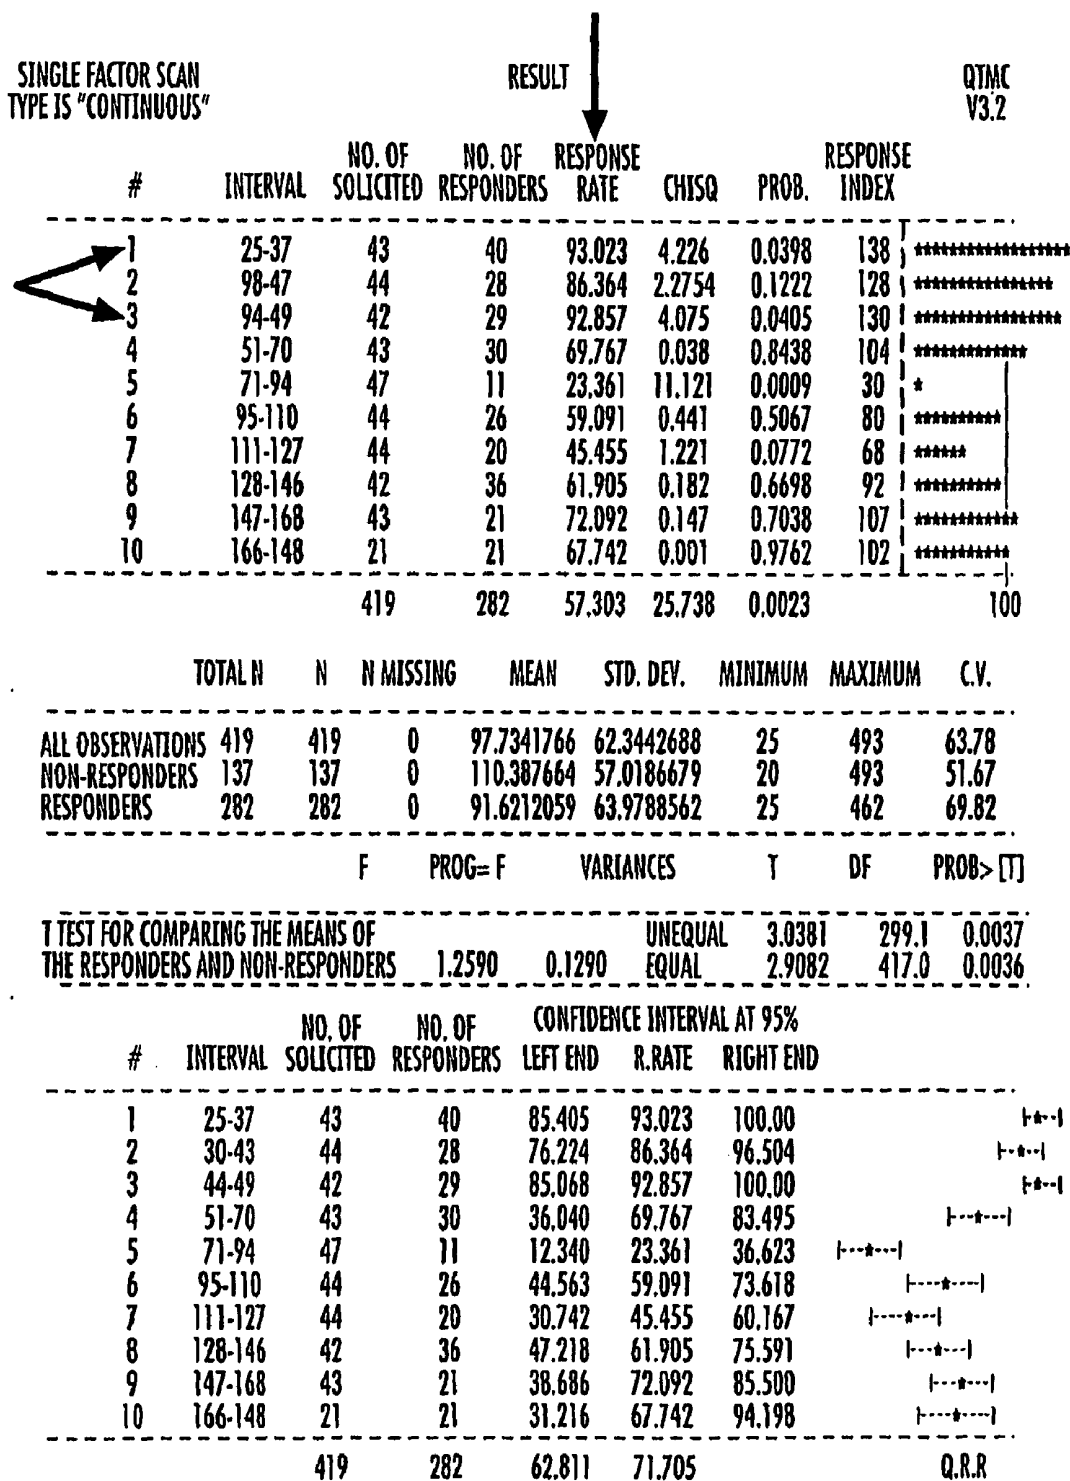


FIG. 13

DATE	TIME	FiO2	GCS	Pupils	glucose	Urine output	temperature	Dopamine	Epi	other
12/16/2005	20:00	0.6	3	2	138	464	38.9	0	1	0
12/16/2005	21:00	0.4	3	2	143	25		0	1	0
12/16/2005	22:00	0.3	3	2	136	30	39.1	0	1	0
12/16/2005	23:00	0.3	3	2		7	38.7	0	1	0
12/16/2005	0:00	0.3	3	2		10	38.1	0	1	0
12/17/2005	1:00	0.3	3	2	137	20	37.8	0	1	0
12/17/2005	2:00	0.3	3	2		30	37.2	0	1	0
12/17/2005	3:00	0.25	3	2		60	37	0	1	0
12/17/2005	4:00	0.25	3	2	139	60	36.5	0	1	0
12/17/2005	5:00	0.25	3	2			35.8	0	1	0
12/17/2005	6:00	0.25	3	2		125	35.6	0	1	0
12/17/2005	7:00	0.25	3	2			35.6	0	1	0
12/17/2005	8:00	0.25	3	2	137	105	36.2	0	1	0
12/17/2005	9:00	0.25	3	2		21	36.7	0	1	0
12/17/2005	10:00	0.25	3	2		100	37.3	0	1	0
12/17/2005	11:00	0.25	3	2		45	37.3	0	0	0
12/17/2005	12:00	0.25	3	2		40	37.2	0	0	0
12/17/2005	13:00	0.25	3	2	137		37.1	0	0	0
12/17/2005	14:00	0.25	3	2	141	125		0	0	0

FIG. 14

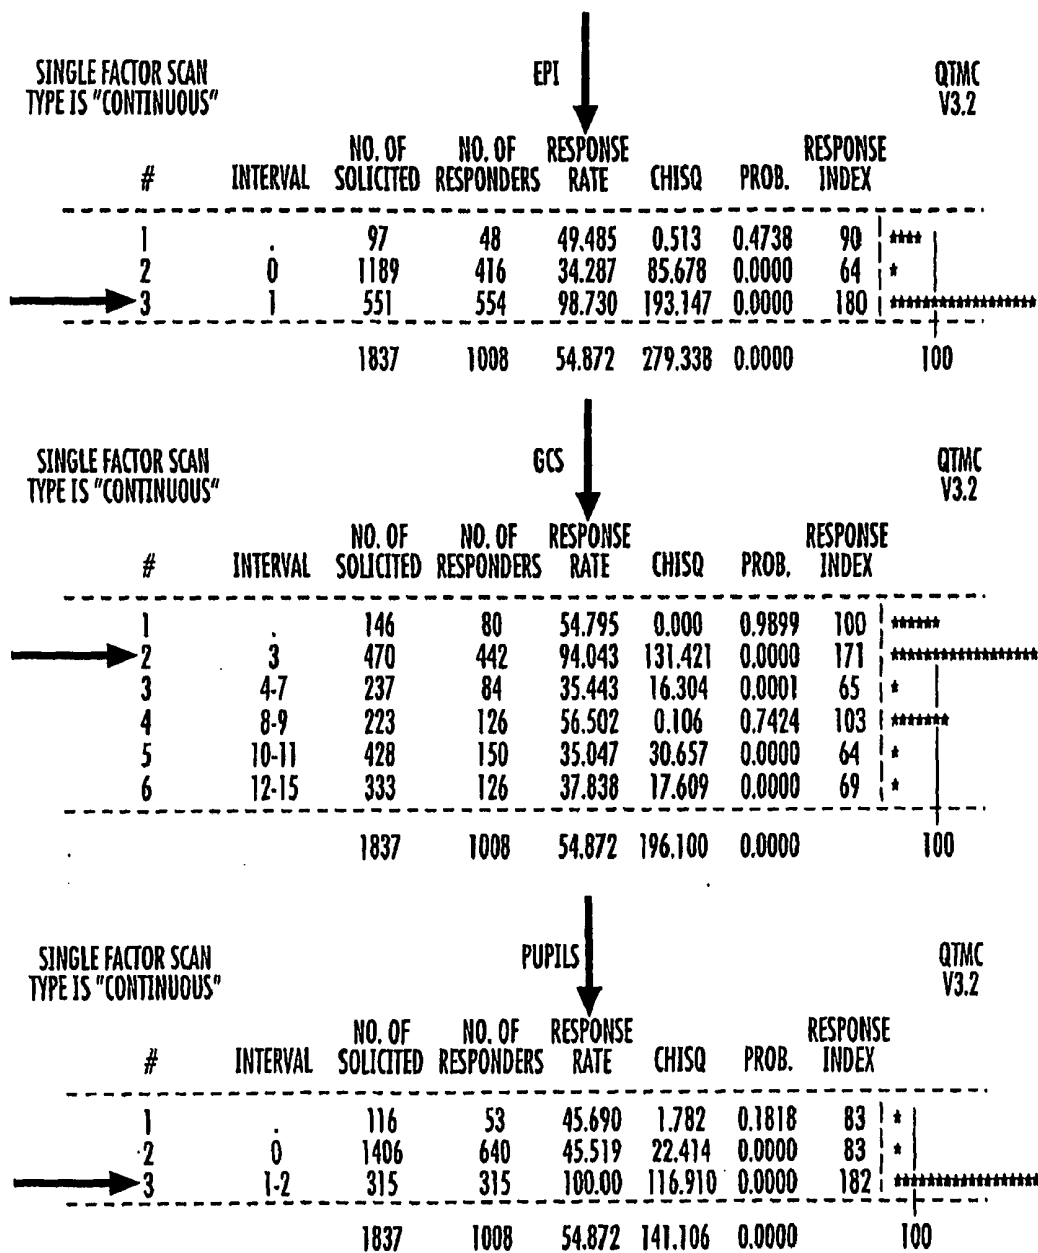


FIG. 15

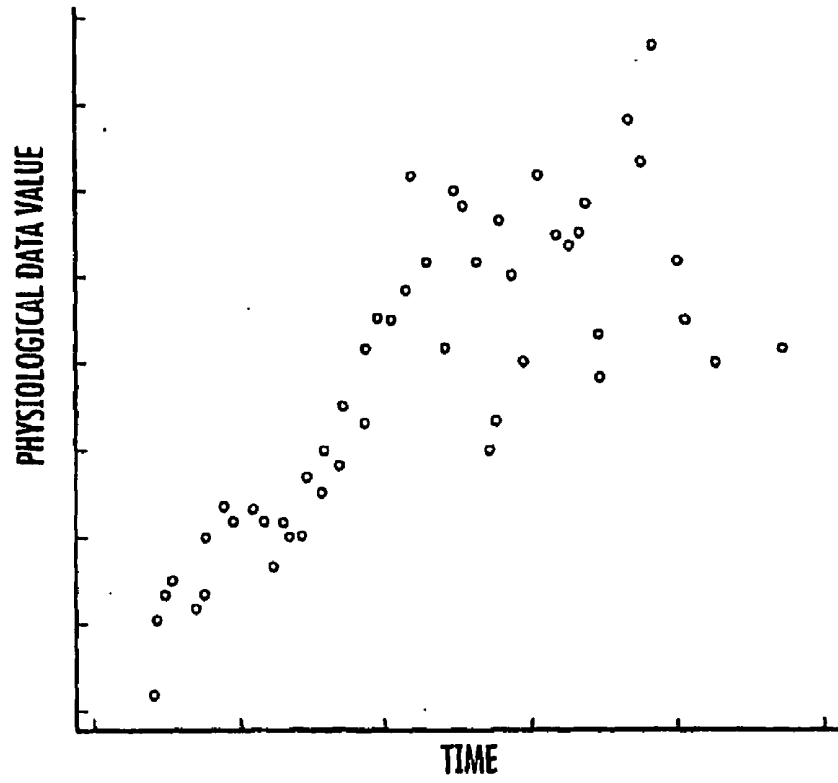


FIG. 16A

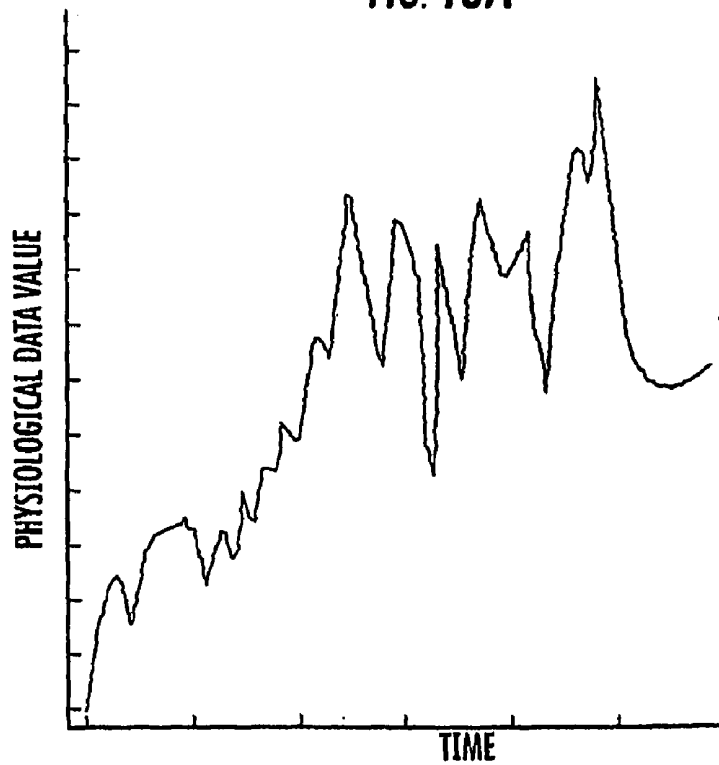
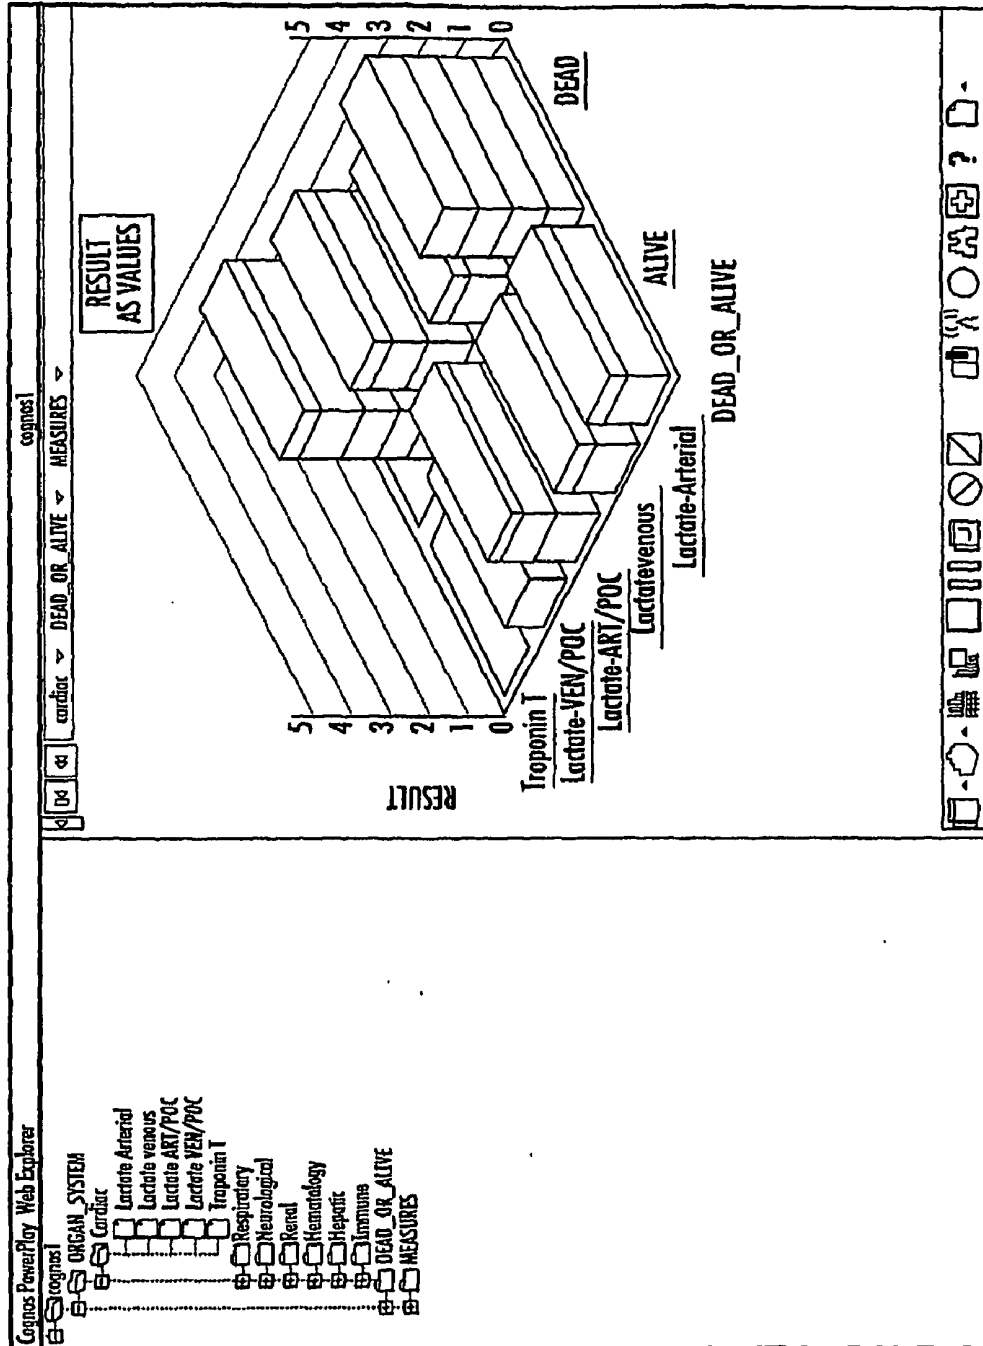
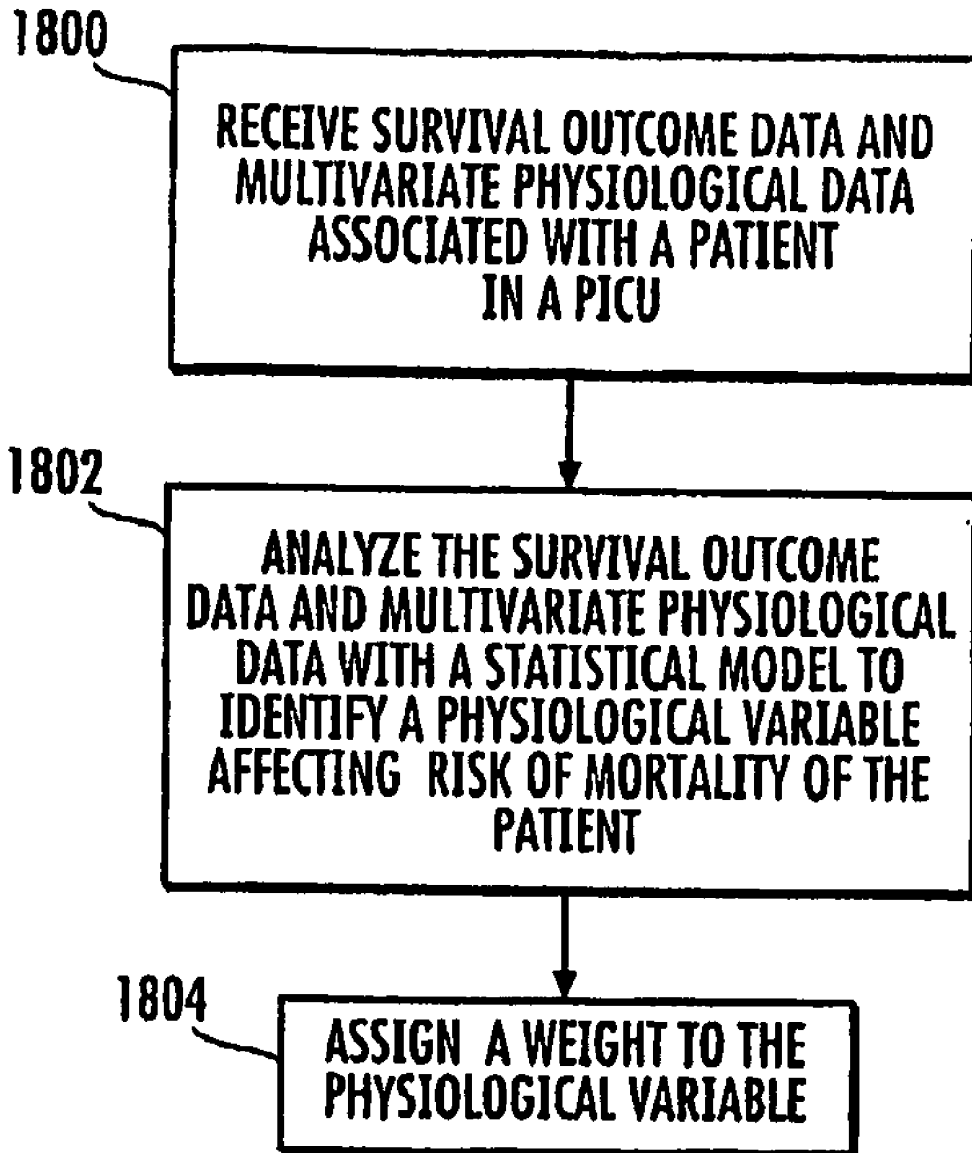


FIG. 16B



**FIG. 18**

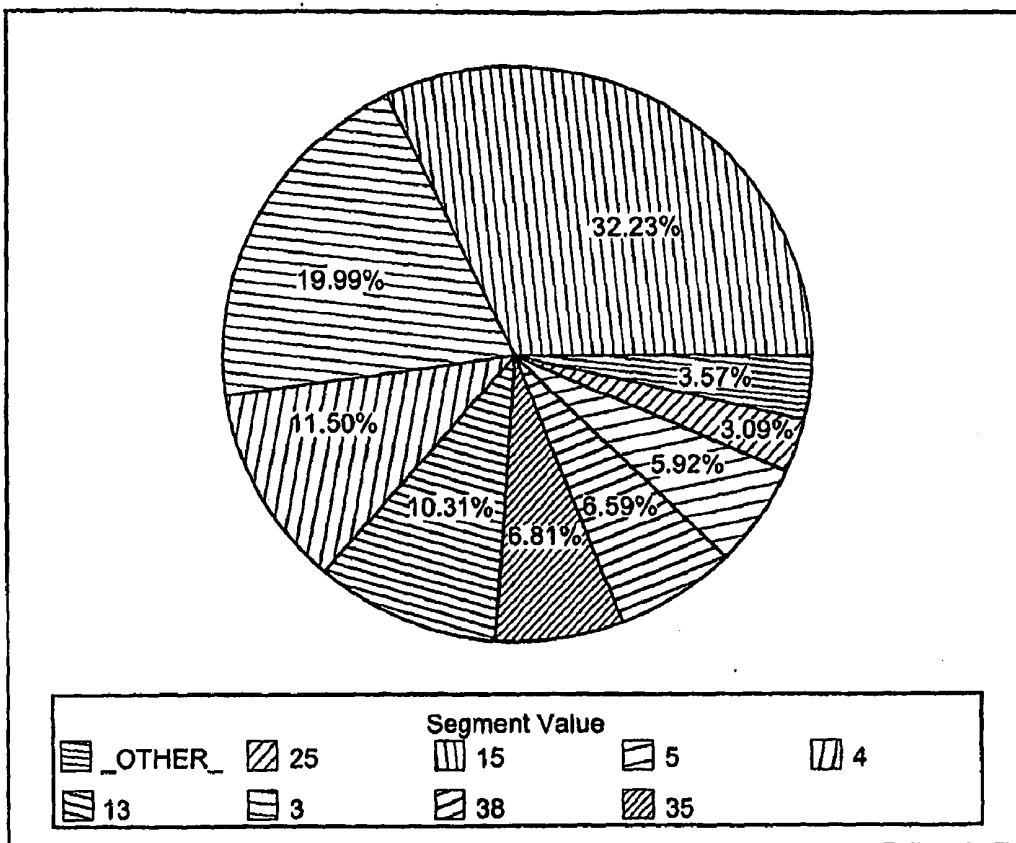


FIG. 19

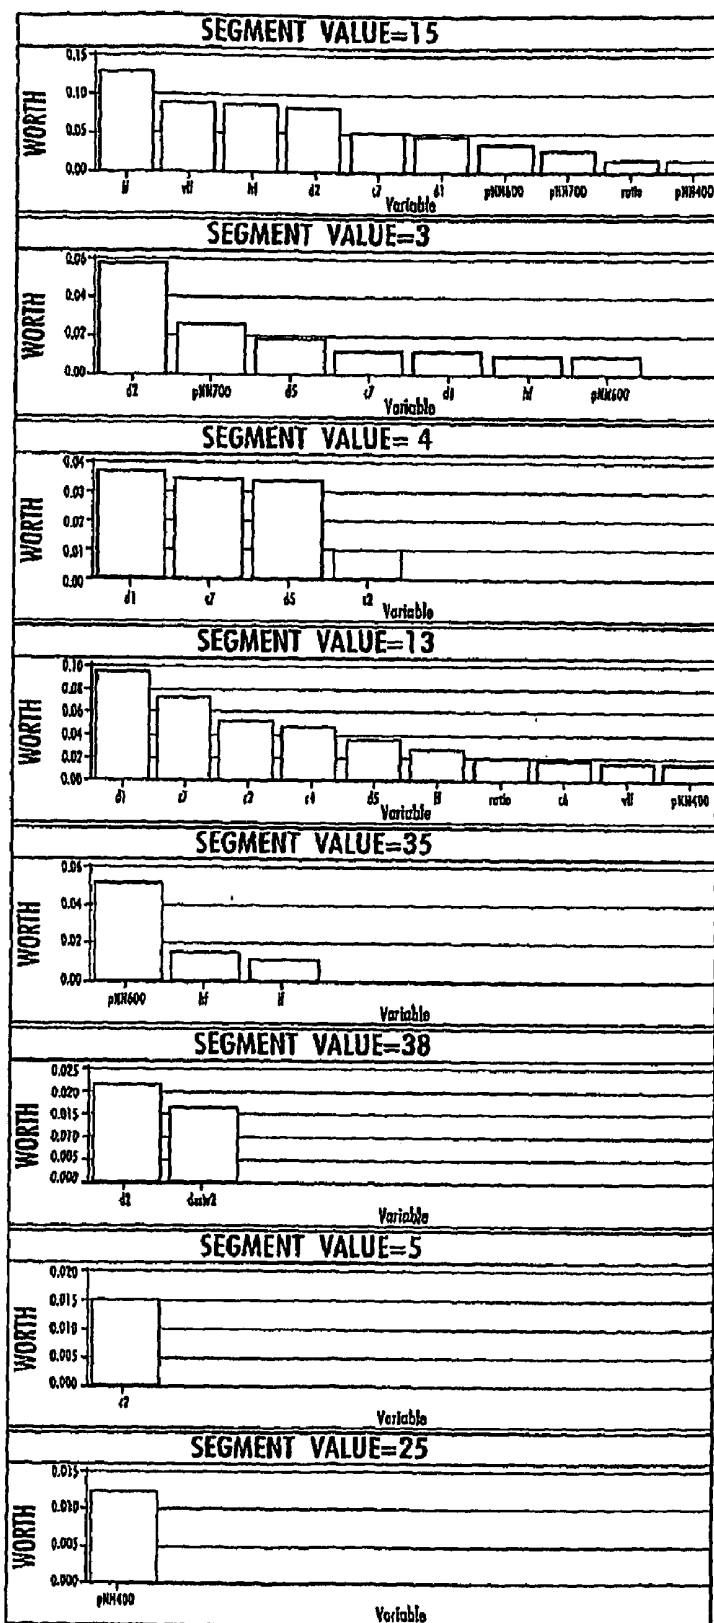


FIG. 20

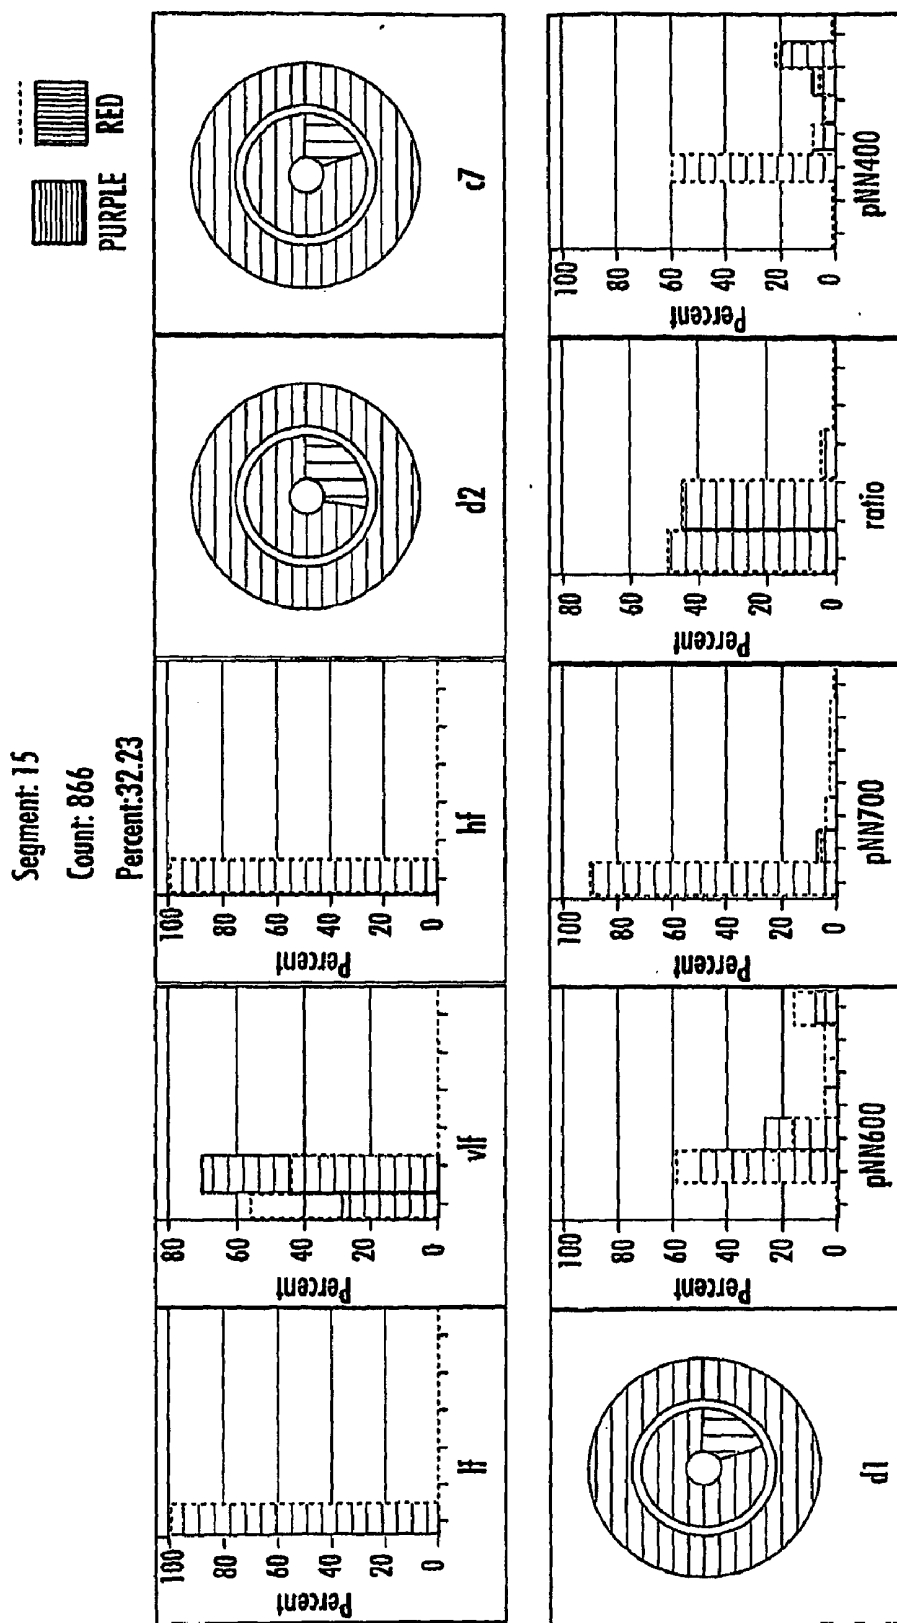


FIG. 21A

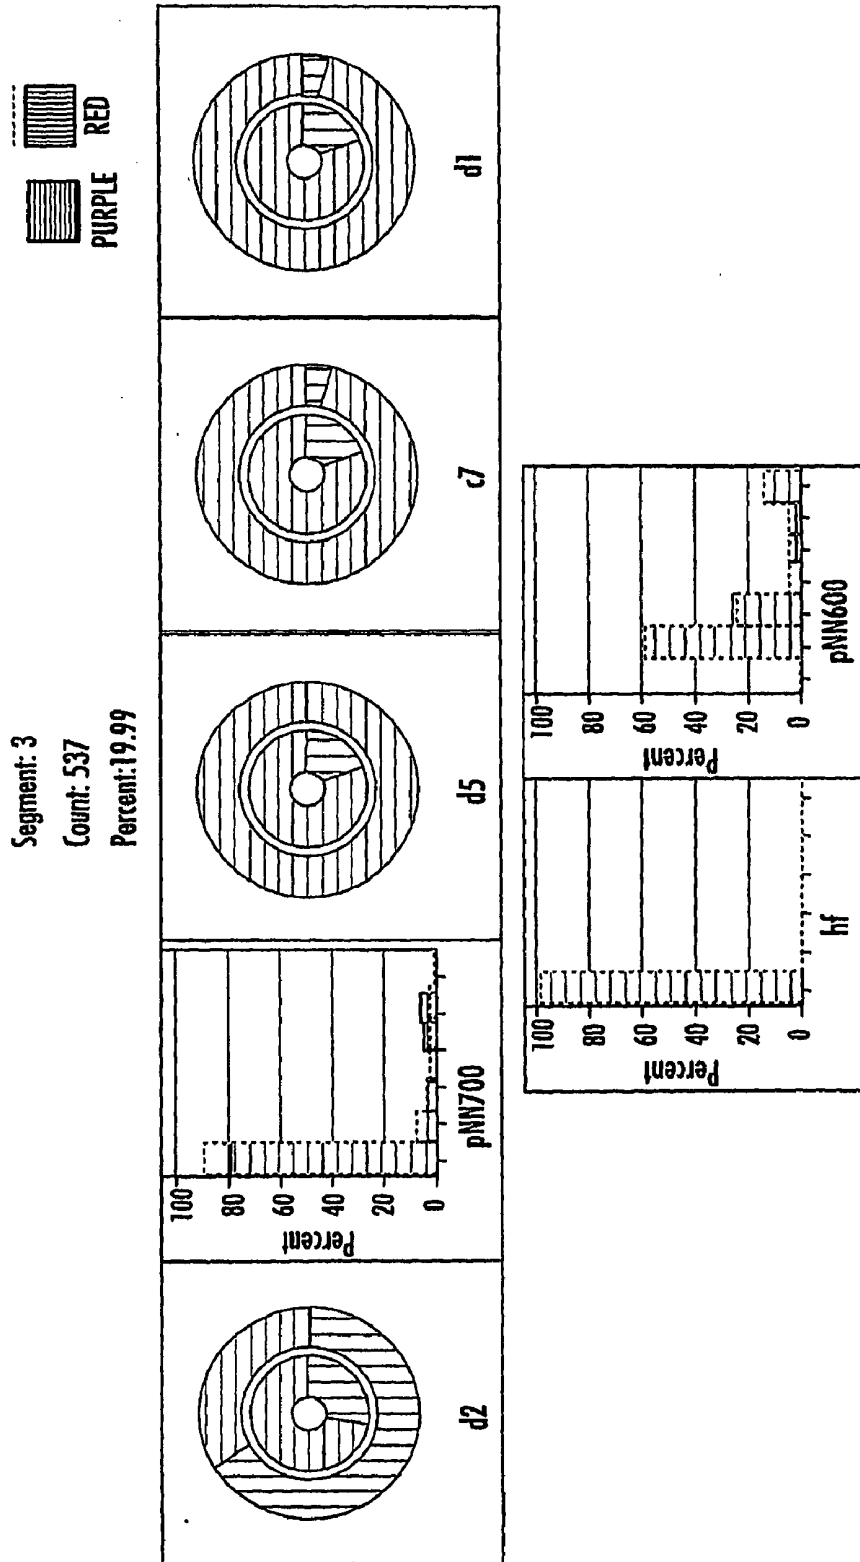


FIG. 21B

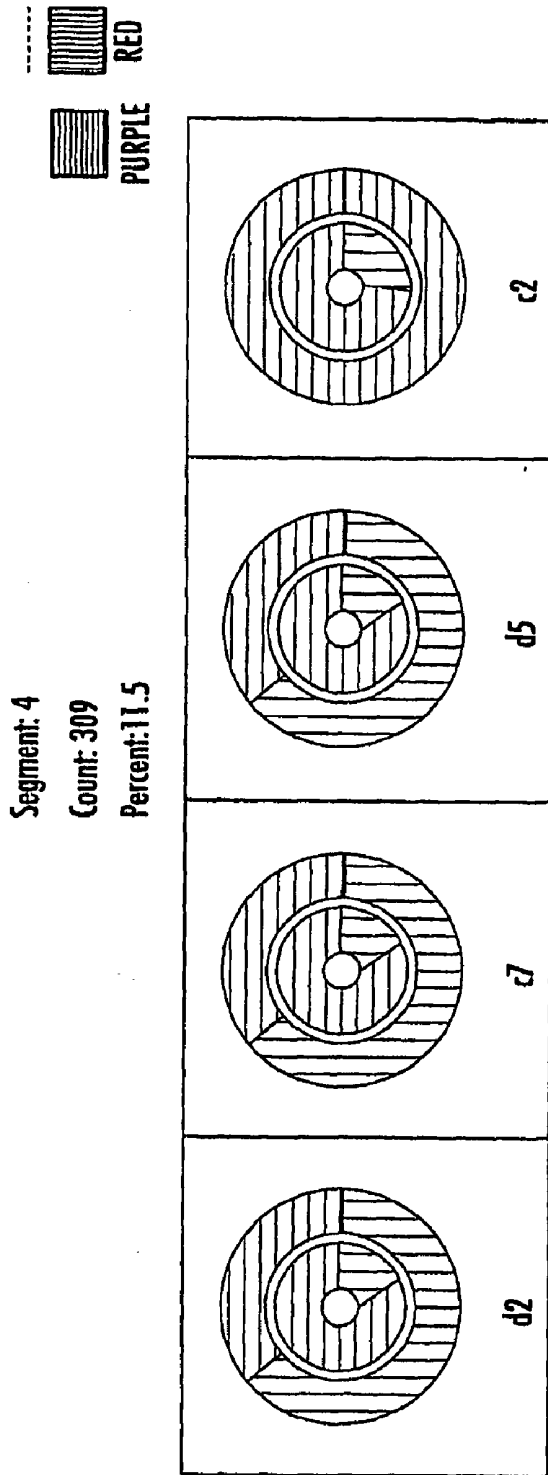


FIG. 21C

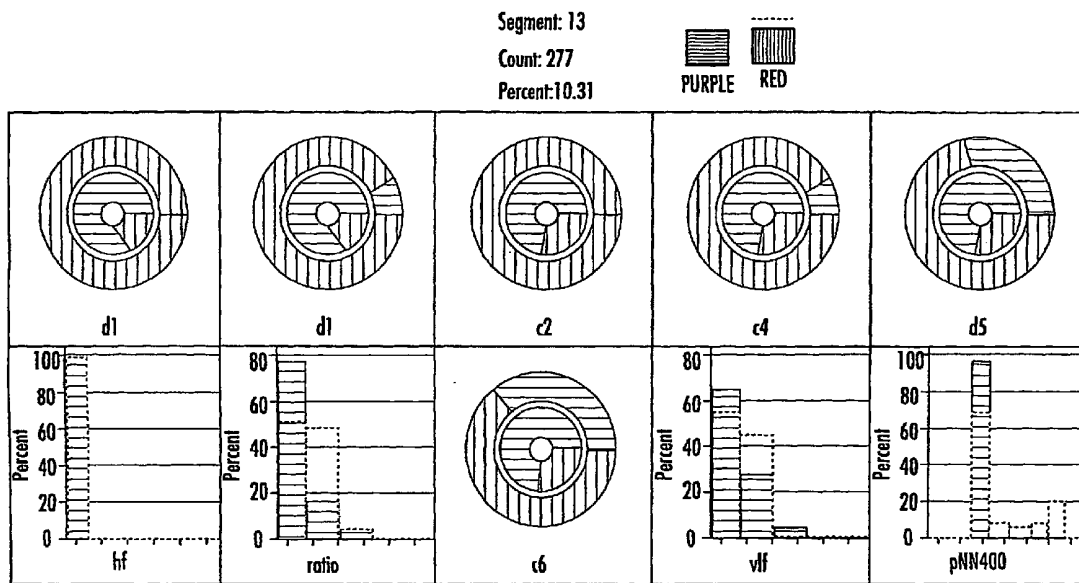


FIG. 21D

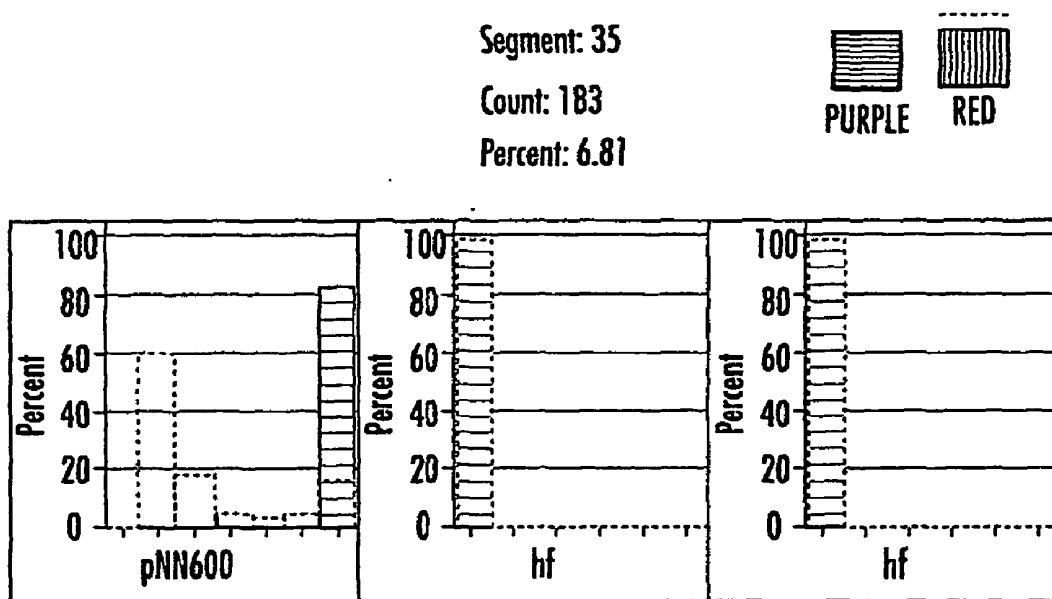


FIG. 21E

Segment: 38
Count: 177
Percent: 6.59

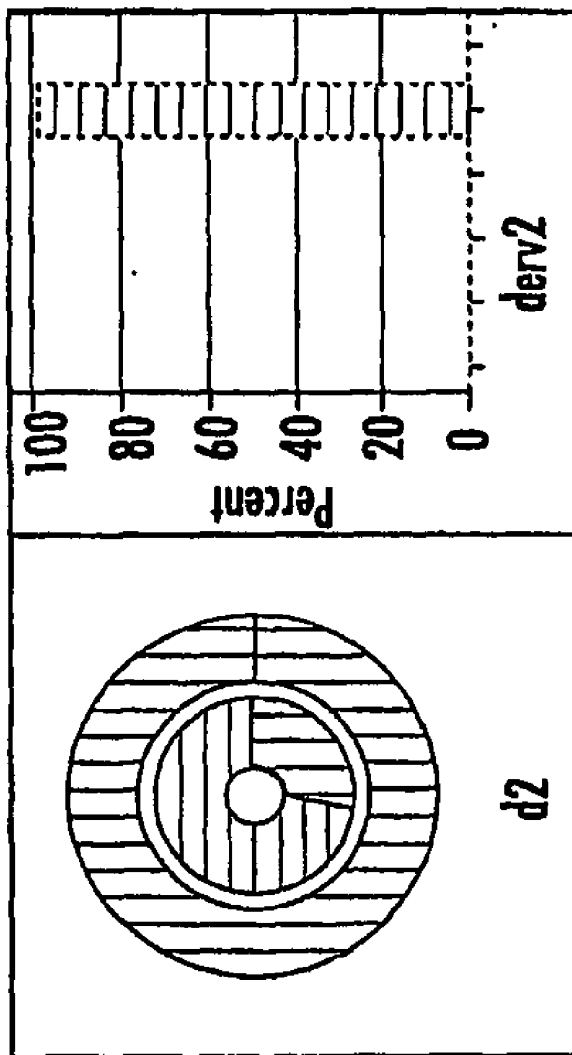



FIG. 21F

Segment: 5
Count: 159
Percent: 5.92

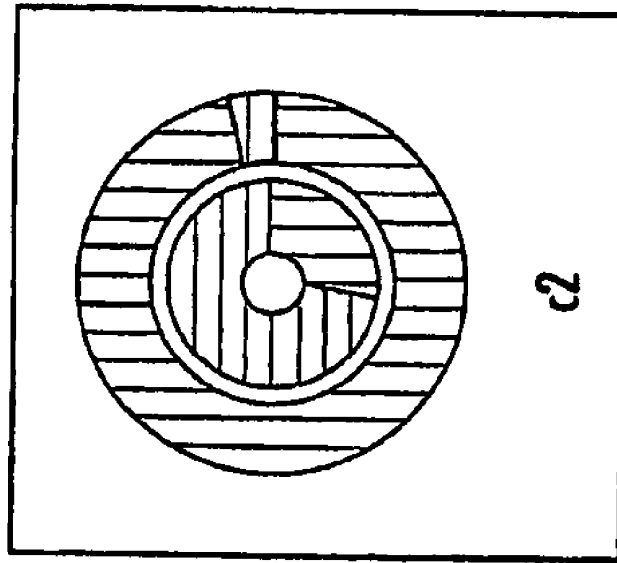


FIG. 216

Segment: 25
Count: 83
Percent: 3.09

 PURPLE

 RED

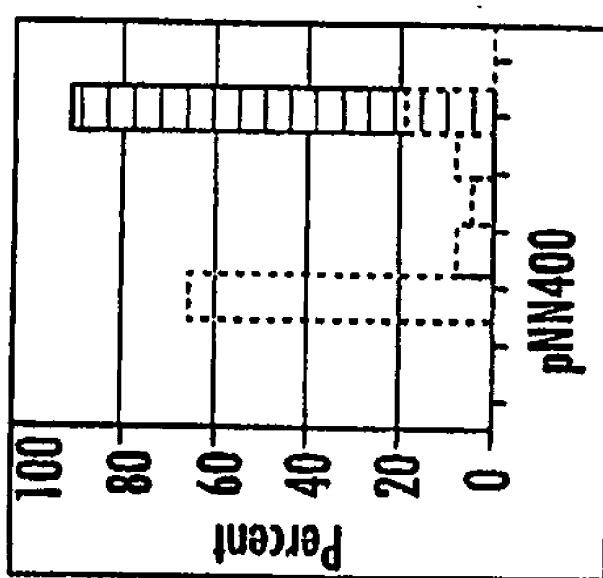


FIG. 21H

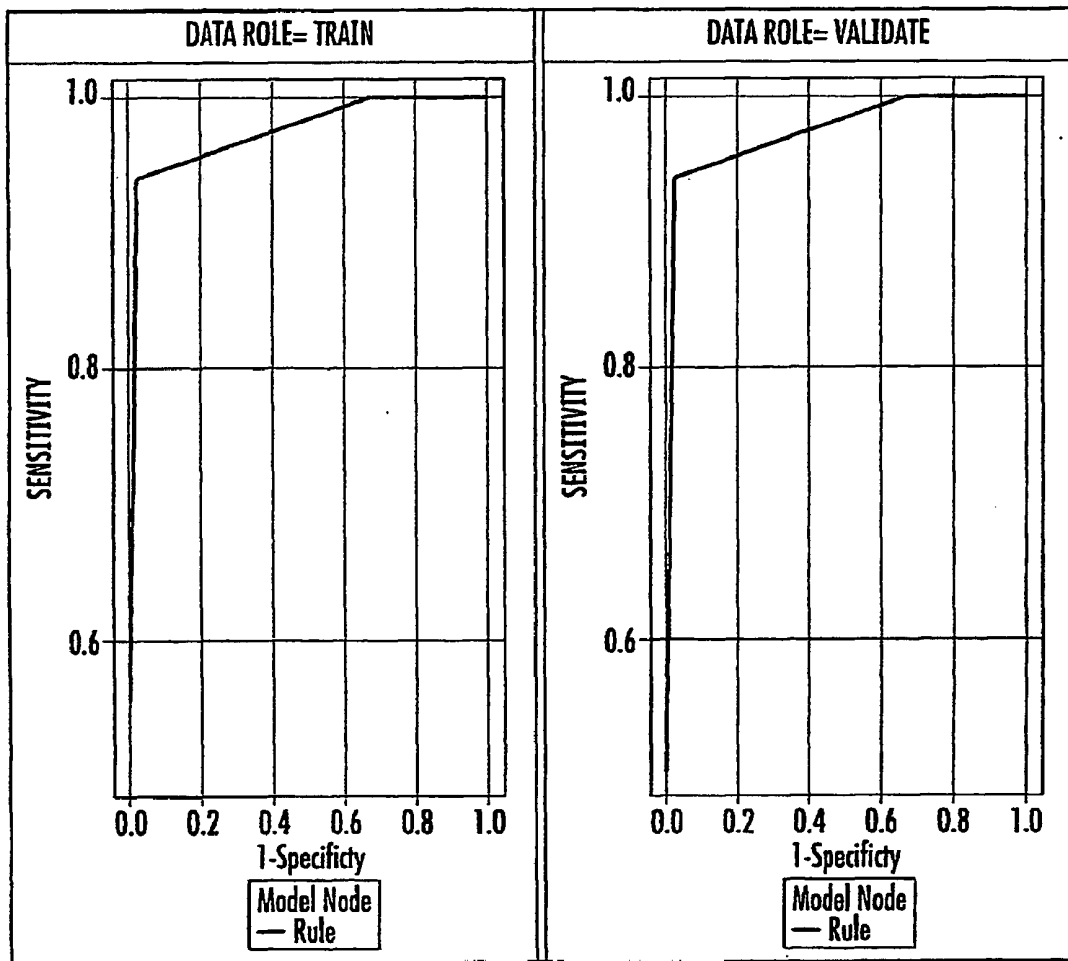


FIG. 22

**METHODS, SYSTEMS, AND COMPUTER
PROGRAM PRODUCTS FOR EVALUATING A
PATIENT IN A PEDIATRIC INTENSIVE CARE
UNIT**

RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Patent Application Ser. No. 60/809,283, filed May 30, 2006, the disclosure of which is incorporated herein by reference in its entirety.

GOVERNMENT INTEREST

[0002] This presently disclosed subject matter was made with U.S. Government support under Grant No. 1R41HD049935-01 awarded by the National Institutes of Health (NIH). Thus, the U.S. Government has certain rights in the presently disclosed subject matter.

TECHNICAL FIELD

[0003] The subject matter disclosed herein relates generally to patient evaluation. More particularly, the subject matter disclosed herein relates to evaluating a patient in a pediatric intensive care unit (PICU).

BACKGROUND

[0004] Intensive care units (ICUs) commonly include patient monitoring systems for monitoring patient status and condition. Typical patient monitoring systems include a monitor having one or more detectors attached to a patient for detecting parameters, such as electrocardiogram (ECG) signals, blood pressure, blood oxygen, blood glucose, and temperature. The output from the detectors is sent to a system processor, which subsequently processes the measured values. These values may then be displayed on a display screen or stored for later analysis. Data representing the measured physiological parameters can be displayed as waveforms and/or numerical values. ICUs provide advanced monitoring capabilities for enabling medical practitioners to evaluate the clinical status of patients and track their response to a wide range of interventions.

[0005] One of the important functions of an ICU is to provide advanced monitoring capabilities to evaluate the clinical status of patients and to track their responses to a wide range of interventions. Morbidity and mortality have diminished dramatically in PICUs across the United States due to advancements in medical and surgical therapeutics, life saving pharmaceuticals, and training of medical practitioners. Standard monitoring systems present physiological data such as intermittent or continuous core temperature, invasive arterial blood pressure, continuous invasive central venous pressure, continuous pulsed oximetry, and continuous end tidal carbon dioxide concentrations. However, current monitoring systems do not present these data in a format that fosters understanding of the complex dynamic changes occurring instantaneously or over time in a biological system. Simple, time domain measures of heart rate and respiratory rate are typically displayed as: 3-5 second mean values; mean values of parameters plotted against time; or alarms for out of range values determined by manufacturers or modified by medical practitioners. These values are often not scaled to reflect age or diagnosis adjusted norms for children. For these reasons, the need for advancement of monitoring devices is great.

[0006] A variety of advanced organ specific monitoring devices have emerged over recent years with mixed utility and acceptance in the PICU. Measurements made with these devices include: continuous cardiac output measurements; thoracic electrical bioimpedance continuous cardiac output; continuous in vivo arterial blood gas analysis; continuous pulmonary mechanics and ventilator parameters; continuous venous oxygen saturation measurement; and continuous processed electroencephalographic analysis. These measurements have provided additional information to the bedside clinician, but most have failed to demonstrate improvement in patient morbidity or mortality. Each of these monitoring devices provides a unidimensional time domain appraisal of a specific organ function that must be assimilated, interpreted, and acted upon by the bedside physician, nurse, or allied health care worker. It is desirable to provide improvements for presenting this information and analysis of this information to medical practitioners.

[0007] As mentioned above, some PICU monitoring equipment generates alarms when patient physiological data falls outside of an expected range. However, because these alarms are often based on individual parameters and not based on accurately weighted groups of parameters, false positives often occur. Because of the high frequency of false positives, alarms generated based on individual physiological measurements are often ignored by PICU staff.

[0008] Software tools are available for evaluating a patient's risk of mortality. However, conventional tools only evaluate a patient's risk of mortality based on parameters collected upon admission to the PICU. There is no updating of the risk of mortality based on physiological measurements after the patient has been admitted to PICU. As a result, conventional tools do not provide any post care evaluation of a patient's risk of mortality.

[0009] Accordingly, there exists a long felt need for methods, systems, and computer program products for evaluating a patient in a PICU.

SUMMARY

[0010] According to one aspect, the subject matter described herein comprises systems, methods, and computer program products for evaluating a patient in a PICU. One method may include collecting physiological data associated with a patient upon admission to a PICU and at least once after admission to the PICU. The physiological data may be analyzed with a statistical model. Further, a risk of mortality of the patient can be continually determined.

[0011] According to another aspect, the subject matter described herein comprises systems, methods, and computer program products for selecting a physiological variable for use in evaluating risk of mortality of a patient in a PICU. One method may include receiving survival outcome data and multivariate physiological data associated with a patient in a PICU. The survival outcome data and the multivariate physiological data may be analyzed with a statistical model to identify a physiological variable affecting risk of mortality of the patient.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Exemplary embodiments of the subject matter will now be explained with reference to the accompanying drawings, of which:

[0013] FIG. 1 is an exemplary block diagram of a patient monitoring system for evaluating a patient in a PICU according to an embodiment of the subject matter described herein;

[0014] FIG. 2 is a flow chart of an exemplary process for evaluating a patient in a PICU in accordance with an embodiment of the subject matter described herein;

[0015] FIG. 3 is a graph of an example of an ECG signal with approximations of a fiducial point obtained by a monitoring system according to an embodiment of the subject matter described herein;

[0016] FIG. 4 is a graph of an R wave of an ECG signal;

[0017] FIG. 5 is a graph of an example of sample interpolations of heart rate data points;

[0018] FIG. 6 is a graph illustrating an example of heart rate FFT magnitude spectrum averaged from 12 individual 128 beat segments;

[0019] FIG. 7 is a chart of 22 intervals obtained from 11 raw variables in accordance with an embodiment of the subject matter disclosed herein;

[0020] FIG. 8 are results of an orthogonized list of the data shown in the chart of FIG. 7;

[0021] FIG. 9 is a graphical representation of the ability of the factors as a standardized difference between Y and N outcome groups;

[0022] FIGS. 10A and 10B are graphs of an unfiltered ECG signals with an R peak estimation;

[0023] FIGS. 11A and 11B are graphs of heart rate spectral curves for a surviving child and a child who died, respectively;

[0024] FIG. 12 is a chart profiling derogatory segments within variable (base excess) with a single factor scan;

[0025] FIG. 13 is a chart profiling extreme derogatory ranges within a battery of laboratory tests;

[0026] FIG. 14 is a chart of an example of intermittent physiologic parameters and clinical signs;

[0027] FIG. 15 includes charts profiling examples of intermittent physiologic parameters and clinical signs evaluated through QTMS with selected best results;

[0028] FIGS. 16A and 16B are graphs of intermittent original data and interpolated data in 2 minute increments, respectively;

[0029] FIG. 17 is a screen display of an example of several cardiac variables for living and dead patients;

[0030] FIG. 18 is a flow chart of an exemplary process for selecting a physiological variable for use in evaluating risk of mortality of a patient in a PICU according to an embodiment of the subject matter described herein;

[0031] FIG. 19 is a pie chart of cluster sizes determined using a rule induction method;

[0032] FIG. 20 includes bar graphs of a profile report for several clusters;

[0033] FIGS. 21A-21H includes graphs and charts detailing the ability of each cluster to differentiate between living and dead; and

[0034] FIG. 22 includes graphs of receiver operator curves for the rule induction model.

DETAILED DESCRIPTION

[0035] The subject matter disclosed herein is directed to systems, methods, and computer program products for evaluating a patient in a PICU. Particularly, a patient evaluation may include continually determining a risk of mortality of a PICU patient based on physiological data associated with the patient. The physiological data may be collected upon admission to the PICU and at least once after admission to the PICU. Further, the physiological data may be analyzed with a statistical model, and the risk of mortality of the patient may be continually determined. The risk of mortality may be continuously updated and presented to a medical practitioner via a user interface. By presenting up-to-date information regarding the risk of mortality and the physiological data contributing to that risk, patient outcomes are expected to improve.

[0036] According to one aspect, systems, methods, and computer program products disclosed herein may be utilized for selecting a physiological variable for use in evaluating mortality risk of a patient in a PICU. A method may include receiving survival outcome data and multivariate physiological data associated with a patient in a PICU. The survival outcome data and the multivariate physiological data can be analyzed with a statistical model to identify a physiological variable affecting mortality risk of the patient. A weight may be assigned to the physiological variable for use with the statistical model in determining a risk of mortality of the patient.

[0037] The risk of mortality may be determined by collecting physiological data from various sources, by integrating or combining the data from the various sources, and by analyzing the data as disclosed herein. Physiological signals encode information which characterizes the spectrum from normal to disease conditions in living systems. Physicians are trained to recognize diagnostic patterns in these signals. Signal processing methodologies enhance diagnostic capabilities through either detection of information not otherwise perceptible, or quantification of physiological measures leading to diagnostic differentiation of sickness from health. Such signal processing methodologies may be used to detect or identify physiological data for use in determining a risk of mortality. Signal processing techniques may be broadly categorized as spectral and time series methodologies, while wavelets span the two approaches. Time series methods may be linear or non-linear, stationary or non-stationary, and/or parametric or non-parametric. Signal processing methods presume stationarity, while non-linear methods, such as bispectral analysis, may be applied to diagnostics.

[0038] Neural networks may be trained to recognize patterns derived from physiological signals using characteristics derived from any signal processing methodology, which are linked to health and disease states, or trends toward either. Applications of bispectral methods may be used to detect nonlinear trends in critically ill patients. Heart rate variability using linear signal processing techniques may be used for real time analysis of spectral bands which characterize autonomic activity. This approach provides a quantitative measure of autonomic activity as a trend as patients progress toward health or disease. Detection of trends may be enhanced using cross spectral quantification of interactions between physiological signals determined continuously in real time. This

technique may be applied for determining signal artifact (noise) from significant changes in clinical state (signal).

[0039] Data mining is another technique useful to collect physiological data for use in determining a risk of mortality. Data mining is an extension of statistical hypothesis testing. Neural networks and data intensive mining may be used together for sorting and analyzing physiological data for evaluation of a patient as disclosed herein. A goal of data mining is to construct a mathematical algorithm that captures viable representations of existing phenomena hidden with a database. Different classes of algorithms may include standard regression, rule induction, and neural networks. In addition, a model comparison module can provide a cross comparison among multiple models based upon receiver operator curve (ROC) characteristics.

[0040] Physiological data may be collected from patient charts, laboratory tests, and monitoring equipment. Real time continuous physiological signals, such as electrocardiogram (ECG) signals (e.g., invasive arterial blood pressure and invasive central venous pressure), may be collected and analyzed. Further, an analysis can be performed to determine advanced measures of the variability of continuous physiological signals. For example, a spectral analysis (also referred to as power spectral analysis or auto spectral analysis) may be performed on the ECG signals. Other physiological data that may be collected includes measures of organ function, such as serum glucose and the like, and their variability.

[0041] Spectral analysis of heart rate variability may be used in determining a risk of mortality. In both adults and children, spectral analysis of heart rate variability may be used to quantify the dynamic, physiologic changes occurring in a wide variety of critical illnesses, such as shock, severe head trauma, post operative congenital heart disease, acute myocardial infarction, and diabetes. The concept is that healthy biological systems are in a natural state of "chaos" and when critical illness develops, this natural variability is lost. Analysis of the low frequency and high frequency spectral content of heart rate variability with calculation of a ratio of these two areas may be used as a predictor of mortality in children. Particularly, these measurements can be indicators of sympathetic and parasympathetic neuromodulation of the heart. Coupling these measurements into a multivariate predictor of mortality as disclosed herein may improve the predictive capability of continuous physiologic monitoring. As a result, this predictive information may improve the outcome of critically ill patients in ICU.

[0042] Another predictor of risk of mortality includes power spectral analyses of arterial blood pressure. Blood pressure modulates both stroke volume and heart rate through the baroreflexes, which are modulated by respiration, reflecting the integrity of the brain stem control of cardio-reflexes. Variability analysis of continuously measured invasive arterial blood pressure may be used for determining patient outcome such as, for example, in relation to heart rate and respiratory variability. Trends of increasing power in low frequency and very low frequency bands in both heart rate and blood measurements may be used for predicting mortality or instability in critically ill patients.

[0043] Other exemplary physiological data that may be used in determining risk of mortality includes demographic data and diagnosis related predictors of mortality. Examples of demographic and diagnosis related predictors of mortality include patient age and sex, any of various general diagnostic groups, and pre-ICU risk factors. Other diagnostic group

predictors include chromosomal abnormality, oncologic disease, acute diabetic complication, and nonoperative cardiovascular disease. Pre ICU risk factors include previous PICU admission for current hospitalization, pre ICU cardiopulmonary resuscitation, transfer from inpatient unit, and post operative status (within 24 hours). Other predictors include presence of cyanotic heart disease and presence of permanent or temporary cardiac pacing.

[0044] Additional examples of physiological data that may be used in determining risk of mortality include one or more physiological measurements such as a temperature measurement (e.g., continuous, periodic, and aperiodic), a heart rate measurement, a blood pressure measurement, a central venous pressure measurement, a pulsed oximetry measurement, a carbon dioxide concentration measurement, a respiratory rate measurement (e.g., respiratory plethysmograph, pulse oximetry, and end tidal carbon dioxide concentrations), an oxygen saturation measurement, and the like.

[0045] A variety of advanced organ specific monitoring devices or sensors for use in the PICU can be streamed to a bedside monitor and used as physiological data in systems and methods in accordance with the subject matter disclosed herein. Exemplary devices include: continuous cardiac output measurements (e.g., PICCO devices, available from Pulson Medical Systems AG, of Munich, Germany, or Swan-Ganz catheter (available from Baxter Healthcare Corporation, of Deerfield, Ill.); thoracic electrical bioimpedance continuous cardiac output (e.g., BIOZ® devices, available from Cardiodynamics International Corporation, of San Diego, Calif., and TEBCO® devices, available from Hemo Sapiens Inc., of Sedona, Ariz.); continuous in vivo arterial blood gas analysis (e.g., pH, PCO₂, PO₂, HCO₃, base excess, and oxygen saturation analysis) (e.g., the VIA LVM monitor, available from Metracor Technologies, Inc., of San Diego, Calif.); continuous pulmonary mechanics and ventilator parameters (e.g., the Servo I device, available from Siemens AG, of Munich, Germany); continuous venous oxygen saturation measurement (e.g., devices available from Baxter Healthcare Corporation); continuous processed electroencephalographic analysis (e.g., the A2000 Bispectral Index monitoring system, Aspect Medical Systems Inc., of Natick, Me.), and continuous intracranial pressure measurements (CAMINO® ICP monitors, available from Camino Laboratories Inc., of San Diego, Calif.).

[0046] By use of one or more elements of physiological data, a real time, continuously updated risk of mortality score may be determined after analysis with a statistical model. The risk of mortality results may be displayed to a medical practitioner for use in patient treatment. Particularly, the results may be useful in treating PICU patients:

Evaluation of a Patient for Risk of Mortality

[0047] According to one aspect, a system for evaluating a patient in a PICU may be implemented as hardware, software, and/or firmware components executing on or with one or more modules of a patient monitoring system operable to collect physiological data. FIG. 1 is a diagram illustrating an exemplary patient monitoring system generally designated **100** for evaluating a patient in a PICU according to an embodiment of the subject matter described herein. System **100** may be any suitable system for collecting and analyzing physiological data. The physiological data may be in a digital format or any other suitable format for analysis by a computer system. System **100** may execute software suitable for col-

lecting physiological data, storing the data, and analyzing the data for continually determining a risk of mortality of the patient.

[0048] System **100** may include a user interface **102** by which a user inputs data and information is presented to the user. For example, user interface **102** may include a keyboard **104** and a mouse **106** by which data and commands are input. Further, user interface may include any suitable input device such as a keypad, a touch screen interface or the like. The user can input commands into user interface **102** to initiate and manage collection of patient physiological data. User interface **102** may also include a display **108** for displaying information to the user. For example, display **108** may display collected physiological data and a risk of mortality of a patient. User interface **102** may also include one or more alarm indicators, such as a speaker or displayable icon, for indicating a predetermined level of the physiological data and/or a risk of mortality of the patient.

[0049] Further, system **100** may include a computer **110** having a physiological data store **112** configured for storing, at least temporarily, collected physiological data. Data store **112** may be a part of a memory of computer **110**. The memory may include any suitable type of data storage in the form of devices, tapes, or disks. The memory may also include any suitable type of physical memory, such as computer chips capable of storing data. Physical memory can also include a computer's main memory or random-access memory (RAM), read-only memory (ROM), programmable read-only memory (PROM), erasable programmable read-only memory (EPROM), and electrically erasable programmable read-only memory (EEPROM). Computer **110** may include a processor configured for executing instructions stored in the memory and interfacing with user interface **102**.

[0050] A data collector **114** may be hardware, software, and/or firmware components configured to collect physiological data associated with a patient upon admission to a PICU and at least once after admission to the PICU in accordance with the subject matter disclosed herein. The physiological data may be collected from one or more medical sensor units **116**, each of which may be configured to sense or measure one or more physiological parameters of a patient. In response to sensing or measuring a physiological parameter, sensor unit **116** may generate an electrical signal representative of a physiological parameter and communicate the electrical signal to computer **110**. The collected physiological data may be received and conditioned by computer **110** and stored in data store **112**.

[0051] Additionally, the memory may store computer executable instructions configured for implementing the subject matter described herein. The subject matter described herein can be implemented as any suitable computer program product comprising computer executable instructions embodied in a computer readable medium. Exemplary computer readable media suitable for implementing the subject matter described herein include disk memory devices, chip memory devices, application specific integrated circuits, programmable logic devices, and downloadable electrical signals. In addition, a computer program product that implements the subject matter described herein may be located on a single device or computing platform. Alternatively, the subject matter described herein can be implemented on a computer program product that is distributed across multiple devices or computing platforms.

[0052] A mortality risk function **118** may include computer executable instructions for analyzing physiological data associated with a patient with a statistical model and continually determining a risk of mortality of the patient. Function **118** may receive collected physiological data from data store **112** and analyze the data with a statistical model as disclosed herein: Based on the analysis, a risk of mortality of the patient may be determined. For example, the risk of mortality may be determined at admittance of the patient to PICU and continually following admittance. The risk may be updated post-treatment so that the effects of the treatment on the risk of mortality can be analyzed. The analysis may result in a mortality risk score that may be displayed via display **108**. A medical practitioner may use the displayed risk of mortality for evaluating the clinical status of the patient and tracking the patient's response to a wide range of interventions. The score or other indicator of risk may be used for other purposes, such as PICU staffing or bed assignment. For example, a patient with a risk of mortality that exceeds a threshold may be assigned additional staff for more frequent monitoring and/or treatment.

[0053] FIG. 2 is a flow chart illustrating an exemplary process for evaluating a patient in a PICU in accordance with an embodiment of the subject matter described herein. This exemplary process is described with reference to system **100** shown in FIG. 1. Referring to FIGS. 1 and 2, in block **200**, physiological data associated with a patient is collected. The data may be collected upon admission of the patient to the PICU and continuously or at one or more intervals after admission to the PICU. Initial demographic and observational data may be collected when the patient is admitted. Further, the demographic and observational data may be input to computer **110** by user interface **102**, file transfer, and any other suitable technique. The physiological data may initially be collected in raw form and later recoded into multiple optimized derogatory indicators for use in assessing the patient's risk of mortality. The data may be stored in data store **112**.

[0054] Continuous digital data streams carrying continuous physiological signals may be written by data collector **114** to data store **112** in an SQL database structure. For example, streams of physiological data may be received from sensing units **116**. The signals may be written at regular intervals, such as every 8 seconds. The stored data may include information detailing which patient the data is streaming from, UTC time stamps, and individual physiological data elements. SQL commands may be written to copy this stored data to a research SQL database via a direct network connection.

[0055] In an example of collecting physiological data, ECG signals may be captured at bedside and streamed into a data file of data store **112**. For example, ECG signals may be acquired in an analog format on an ULTRAVIEW® 1700 monitor (available from Spacelabs Healthcare, Inc., of Issaquah, Wash.) and sampled at 896 Hz. The digitized signal may be down sampled and stored at 224 Hz in an SQL database with a UTC time stamp and patient ID number. An anti-aliasing filter may be used for minimizing signal distortion.

[0056] FIG. 3 is a graph illustrating an example of an ECG signal with approximations of a fiducial point (R wave (tall peak)) obtained by a monitoring system. An algorithm may be applied to the signal for detecting the exact location of the fiducial point from which the RR interval (i.e., time between

R peaks), heart period, and heart rate time series are derived. FIG. 4 is a graph illustrating an R wave of an ECG signal. From generated vicinity marks, the exact R wave may be detected. Further, the R—R interval may be measured to generate a heart period time series for use in determining a risk of mortality.

[0057] ECG signal data may be processed for identification of peaks within the signal flow. For example, the signal data may be processed by a suitable software package such as MATLAB® software available from The MathWorks, Inc., of Natick, Me. Spectral-dimensions may be calculated using a voltage reading associated with a time stamp. A data file may be created from the identified signal flow peaks and the calculated spectral-dimensions. The data file follows a multi-hierarchical structure. Sets of time domain variables and frequency domain variables may be generated and uniquely stored in data store 112. The time domain variables identify the peak of each beat and its exact time. Frequency domain variables use beats per minute units.

[0058] Time-domain based transformations may be generated by sizing the lag between contiguous heart peaks and aggregating them into percents within tenth-of-a-second groups. Streaming heart peak information may be lagged and new transformed variables created by binning their time differences. First and second derivatives may be calculated and trended for indicating condition change. Using R-R interval data, the following data may be calculated: standard deviation of the consecutive normal sinus intervals (SDNN), root mean square successive difference (RMSSD), number of NN intervals with differences greater than 50 ms (NN50), the proportion of NN50 intervals divided by the total NN intervals (pNN50), pNNx series (where x=time>0 ms), NN range, coefficient variation, and the minimum/maximum heart period for each 128 beat minor time epoch.

[0059] The following software code provides an example of sizing the lag between contiguous heart peaks and aggregating them into percents within tenth-of-a-second groups. The variable “nn_interval” represents the lag time between continuous heart peaks. In the code, 12 new transformed variables are created by binning their time differences.

```
nn_interval=rpeakttime_stamp-lag1(rpeakttime_stamp);
if nn_interval >0 and nn_interval <=0.05 then NN50=1;
if nn_interval >0.05 and nn_interval <=0.10 then NN100=1;
if nn_interval >0.10 and nn_interval <=0.20 then NN200=1;
if nn_interval >0.20 and nn_interval <=0.30 then NN300=1;
if nn_interval >0.30 and nn_interval <=0.40 then NN400=1;
if nn_interval >0.40 and nn_interval <=0.50 then NN500=1;
if nn_interval >0.50 and nn_interval <=0.60 then NN600=1;
if nn_interval >0.60 and nn_interval <=0.70 then NN700=1;
if nn_interval >0.70 and nn_interval <=0.80 then NN800=1;
if nn_interval >0.80 and nn_interval <=0.90 then NN900=1;
if nn_interval >0.90 and nn_interval <=1.0 then NN1000=1;
if nn_interval >1.0 and nn_interval <=3.0 then NN1000P=1;
```

[0060] Frequency-domain transformations may be generated by grouping bands of frequencies and by calculating ratios and variance terms within the bands. The following software code provides an example of grouping bands of frequencies and by calculating ratios and variance terms within the bands. The variable “frequency” represents heart rate frequency, the variable “1-ULF” represents ultra low frequency, the variable “2-VLF” represents very low frequency, the variable “2-LF” represents low frequency, and the variable “4-HF” represents high frequency. Other suitable non-linear transformations may be used.

```
freq_type="";
if frequency >=0 and frequency <=0.003 then freq_type='1-ULF';
if frequency >=0.0031 and frequency <=0.040000 then freq_type='2-VLF';
if frequency >=0.040001 and frequency <=0.150 then freq_type='3-LF';
if frequency >=0.150001 then freq_type='4-HF';
if freq_type="" then delete;
constant=(1/(128*2));
if frequency=1 then
heart_rate_spectra_inter=((heart_rate_spectra_inter)*2)+constant);
if frequency >0 then
heart_rate_spectra_inter=((heart_rate_spectra_inter)*2)+(constant*2)); run;
```

As shown in this code, two calculated variables, “frequency” and “heart_rate_spectra_inter,” may be grouped into four frequency bands. In particular, frequency may be grouped into one of 1-ULF, 2-VLF, 3-LF, and 4-HF. Another variable can include low frequency divided by high frequency (LF/HF). Typical values for the LF/HF power ratio are greater than 1 for normal resting state and may increase to much larger values when sympathetic activity increases (e.g., during standing or exercise). A lowered ratio of LF activity to HF activity is typically associated with critical illness.

[0061] Heart rate time series may be interpolated to achieve a uniform sampling interval. FIG. 5 is a graph illustrating an example of sample interpolations of heart rate data points. The interpolated heart rate data set is normalized to mean zero and variation from the mean, such that direct comparison of variation of heart rate, irrespective of mean heart rate, may be made between patients, as well as within a patient over time.

[0062] An amplitude spectrum may be generated using the fast Fourier transform (FFT) to display the spectral bands which characterize autonomic activity and other physiological mechanisms involved in heart rate control. The amplitude spectrum may be used for determining a risk of mortality in accordance with the subject matter disclosed herein. FIG. 6 is a graph illustrating an example of heart rate FFT magnitude spectrum averaged from 12 individual 128 beat segments. The power spectrum derived from the amplitude spectra may be used to determine frequency band specific variance of the heart rate time series for statistical tests of significance for equal variance of a specific band. Sequential records of power spectra may be generated once every 128 beats (approximately every 1-2 minutes in children). From each spectrum, frequency bands may be integrated to generate a parameter for each band proportional to the variance in the time-domain data which contributes to the band. The frequency bands include ultra low frequency (ULF) of about 0 to 0.003 Hz, very low frequency (VLF) of about 0.003 to 0.04 Hz, low frequency (LF) of about 0.04 to 0.15 Hz, and high frequency (HF) of greater than about 0.15 Hz. The generated data is available for further ratio analysis, which have been shown to be sensitive to changes in the underlying processes governing heart rate (e.g., level of sympathetic and parasympathetic activity).

[0063] The sequential spectrograms may be presented progressively with time such that power versus frequency as a function of time is visualized. Power ratios may also be processed as a time function. The results of the data processing may be formatted in an open database connectivity (ODBC) compliant database for data storage and subsequent integra-

tion with the statistical and neural network software. The output data includes a universal time code (UTC) time tag, frequency and power level values. Test signals with known spectral content may be used to validate the signal processing techniques used in heart rate variability analyses.

[0064] Statistical analyses in the time domain and/or the frequency domain may be applied to any physiological signal that is acquired in a time-continuous manner. Any one or more of such physiological signals can be analyzed in a similar manner described above with respect to ECG signals for use in application to a statistical model for predicting a risk of mortality.

[0065] Systemic blood arterial pressure (SAP) is an example of a time-continuous physiological signal. SAP is predominantly regulated through the carotid arch and carotid sinus baroreceptor reflexes with efferent influence on the sinus and atrioventricular nodes via the cardiac nerves. This reflex control mechanism has a time constant of approximately 10 seconds with a frequency band of interest in the region of 0.1 Hz. SAP variability may be determined from a time series of peak pressure points in the invasive blood pressure waveform. Dynamic SAP may be associated with heart rate variability (HRV) at the LF band, the HF band, and/or the VLF band. The pressure variability time series (PV) may be generated as the inverse of peak pressure period. As with the HRV series, the PV may be normalized by mean rate and the deviation from the mean to generate the normalized PV time series for spectral analysis. Cross spectral analysis between HRV and PV may be performed in the vicinity of the LF, the VLF, and/or the HF bands to uncover activity between these two interacting signals.

[0066] Another example of a time-continuous physiological signal that may be used in determining a PICU patients risk of mortality is respiratory rate. A consistent marker in the respiratory cycle (onset of respiration) may be detected in a set of patients with the end tidal CO₂ monitor and from the respiratory plethysmograph. The respiratory period may be converted to respiratory rate, interpolated to a constant sample interval, normalized and respiratory rate variability analyzed. Cross spectral analysis of the respiratory spectrum with the heart rate spectrum is highly correlated (high coherence) at the respiratory frequency (0.2 to 0.3 Hz in adults) in healthy patients. A fall in cross spectral power or a diminished coherence between these spectra may indicate a progression of disease state, thus it may be used as a predictor of a risk of mortality. The cross spectral band of interest may be established from the mean respiratory rate and variance in children.

[0067] Laboratory tests may be administered and the results may be entered into system 100 for use in determining a risk of mortality. Exemplary laboratory tests include the following: cardiac such as oscillometric blood pressure and lactate level (hourly systolic and diastolic); respiratory such as arterial blood gas determination (pH, PCO₂, PO₂, HCO₃, and calculated O₂ saturation) and fractional inspired oxygen concentration (hourly); neurologic such as Glasgow coma score (hourly) and papillary reactions (equal and/or reactive) (hourly); fluid, electrolytes, and renal function such as levels of sodium, potassium, glucose, urea nitrogen, creatinine concentrations, ionized calcium, whole blood glucose measurements (Dextrostick), and urine output (hourly); hematologic such as hemoglobin, platelet count, prothrombin time INR, partial thromboplastin time, and D-dimers; hepatic such as bilirubin (total, direct, and indirect), transaminases (AST and

ALT), albumin, and total protein); and immunologic such as temperature (hourly if not captured continuously), white cell count (total) absolute neutrophil count, absolute lymphocyte count, and c reactive protein.

[0068] In one experiment, laboratory tests were administered to 10 patients. Table 1 below shows results of tests that were obtained at different intervals.

TABLE 1

Laboratory Test Results		
Short Name	Frequency	Percentage
ALT	61	0.7382
APTT	128	1.5491
AST	62	0.7503
Albumin	52	0.6293
BUN	184	2.2268
BaseBal	493	5.9664
Bicarb	433	5.2402
Bili-total	74	0.8956
Bili-unconj	6	0.0726
Bili-conj	8	0.0968
CRP	6	0.0726
Calcium	496	6.0027
Creatine Kinase	6	0.0726
Creatinine	201	2.4325
D Dimers	6	0.0726
Glucose	666	8.0600
HCT	243	2.9408
HGB	612	7.4065
INR	121	1.4644
Lactate	452	5.4702
Lymphabs	66	0.7987
O2Sat	431	5.2160
PCO2	489	5.9179
PCO2-ven	10	0.1210
PH	489	5.9179
PH-ven	10	0.1210
PO2	488	5.9058
PO2-ven	10	0.1210
PT	98	1.1860
Platelet	199	2.4083
Potassium	675	8.1689
Sodium	702	8.4957
Tprotein	9	0.1089
Troponin	11	0.1331
WBC	199	2.4083
neutroabs	67	0.8108
	8263	100.0000

Each test was processed using Quantitative Target Modeling System (QTMS) (available from SAS Institute Inc., of Cary, N.C.), which binned the total distribution into deciles identifying "significant intervals" within each variable which demonstrates higher than or lower than mortality rates when compared to the total. Once accomplished, selecting indexes greater than 120 resulted in Table 2 below.

TABLE 2

Mortality Index			
Obs	Title	Interval	Mortality
1	ALT	34-47	130
2	ALT	142-365	130
3	APTT	39.5-41.9	125
4	APTT	42.2-45.1	125
5	AST	167-347	129
6	AST	835-1841	129
7	ALBUMIN	1.5-1.6	141

TABLE 2-continued

<u>Mortality Index</u>			
Obs	Title	Interval	Mortality
8	ALBUMIN	3.1-3.4	141
9	BUN	78-107	188
10	BILL_TOT	4.6-8.5	130
11	BILL_TOT	37.8-40	130
12	BILL_TOT	40.5-42.6	130
13	BILL_TOT	43.5-47.9	130
14	BILL_UN	11.2	200
15	BILL_UN	11.3	200
16	BILL_CON	0.7	200
17	BILL_CON	0.9	200
18	CALCIUM	5.53-16.23	147
19	CREATKIN	66	150
20	CREATKIN	103	150
21	CREATKIN	132	150
22	CREATKIN	2416	150
23	CREATINE	1.4-2.4	183
24	CREATINE	2.7-3.8	183
25	DDIMER	.	600
26	HCT	46-52.8	166
27	INR	2-2.2	122
28	INR	2.3-3.6	122
29	LACTATE	7.4-12.4	147
30	LACTATE	12.5-23	147
31	LYMPHABS	7.5	200
32	PT	8.7-10.5	129
33	PT	29-51.5	129
34	PLATELET	18-60	154
35	PLATELET	61-75	154
36	PLATELET	76-89	154
37	PLATELET	90-107	154
38	PLATELET	108-131	154
39	SODIUM	150-157	153
40	SODIUM	158-165	153
41	TPROTEIN	4.4	225
42	TPROTEIN	7.9	225
43	TPROTEIN	8.1	225
44	TPROTEIN	0.029	550
45	O2SAT	76.3-84.9	148
46	HGB	15.2-19.2	148
47	PO2	42-48	144
48	LACTATE	4.4-7.3	141
49	PLATELET	133-165	147
50	PO2	16-36	141
51	BASEBAL	-11.1	140
52	BASEBAL	-3	140
53	BICARB	10.5-17.5	149
54	PH	6.91-7.25	137
55	SODIUM	144-149	140
56	BICARB	17.7-20.2	146
57	HCT	.	150
58	HGB	13.7-15.1	135
59	O2SAT	37.4-68.8	134
60	LYMPHABS	3.2-6.1	175
61	BUN	33-48	161
62	PO2	37-41	128
63	NEUTROAB	8.7-10.3	169
64	PH	7.33-7.34	126
65	CALCIUM	5.25-5.51	125
66	WBC	21.7-31.8	131
67	PH	7.26-7.32	126
68	BICARB	20.3-21.3	134
69	O2SAT	68.9-76.1	127
70	BASEBAL	-1.4	124
71	CREATINE	1-1.1	151
72	CALCIUM	.	120
73	WBC	11.6-12.3	126
74	O2SAT	99.8-100	123
75	CREATINE	1.2-1.3	148
76	PCO2	20-34	121
77	WBC	17.1-20.9	123
78	HGB	6.2-8.6	121
79	GLUCOSE	83-91	121

TABLE 2-continued

<u>Mortality Index</u>			
Obs	Title	Interval	Mortality
80	HCT	41.2-45.6	126
81	CREATINE	0.4	136
82	HCT	38.2-41	122
83	LYMPHABS	1.7-2.1	143
84	NEUTROAB	10.8-11.4	141
85	NEUTROAB	11.6-13.6	141
86	BUN	49-73	122
87	LYMPHABS	1.4-1.6	125
88	TROPONIN	0.063-0.088	275

Table 3 below shows 95 intervals that assist in excluding a predicted fatal outcome.

TABLE 3

<u>Mortality Predictors</u>			
Obs	Title	Interval	Mortality
1	INR	1.4	79
2	INR	1.5-1.6	77
3	PT	16-16.8	77
4	PT	18.5-19.9	77
5	BILL_TOT	0.3-0.9	74
6	APTT	25.1-28.6	68
7	APTT	29.4-34.5	68
8	LACTATE	1.6-1.9	78
9	BASEBAL	7.9-14.2	78
10	SODIUM	1.6-1.9	80
11	PO2	137-138	76
12	AST	42-56	65
13	ALBUMIN	2.6-2.7	70
14	ALBUMIN	3.8	70
15	BASEBAL	-2	75
16	CALCIUM	4.58-4.75	73
17	O2SAT	97.6-98.2	74
18	HCT	18.4-28.4	80
19	HGB	10-10.5	71
20	GLUCOSE	111-119	73
21	HGB	9.4-9.9	70
22	PO2	109-127	69
23	LACTATE	1-1.2	67
24	BASEBAL	5.3-7.8	67
25	BICARB	24.2-25.5	72
26	PH	7.41-7.43	66
27	ALBUMIN	2.2-2.5	60
28	CREATINE	0.7-0.9	78
29	HGB	10.6-11.3	65
30	CALCIUM	4.34-4.57	63
31	O2SAT	98.8-99.2	62
32	SODIUM	121-134	63
33	BICARB	26.9-29.1	66
34	BUN	19-30	75
35	BICARB	29.2-32.1	61
36	SODIUM	139-140	56
37	O2SAT	94.4-97.5	55
38	HCT	30.6-32	58
39	HCT	32.1-34.2	58
40	LACTATE	0.3-0.9	51
41	ALT	24-32	43
42	AST	18-41	43
43	BILL_TOT	1-1.4	43
44	NEUTROAB	4.6-5.7	66
45	NEUTROAB	5.9-6.7	66
46	WBC	2.8-6.9	49
47	PLATELET	167-212	46
48	BUN	10-Aug	55
49	NEUTROAB	1.8-4.5	56
50	NEUTROAB	7.1-7.4	56
51	CREATINE	0.5	48

TABLE 3-continued

Mortality Predictors			
Obs	Title	Interval	Mortality
52	BUN	.	47
53	SODIUM	.	38
54	PO2	68-89	36
55	LYMPHABS	1-1.3	44
56	GLUCOSE	.	31
57	HCT	28.5-30.5	29
58	BUN	5-Feb	28
59	PLATELET	216-316	23
60	CREATINE	0.6	20
61	LYMPHABS	318-441	20
62	CREATINE	.	14
63	PLATELET	318-441	8
64	BILL_UN	12.8	0
65	BILL_UN	13.7	0
66	BILL_CON	0.1	0
67	BILL_CON	0.2	0
68	CRP	.	0
69	CRP	1.4	0
70	CRP	6.3	0
71	CRP	14.7	0
72	CRP	15.5	0
73	CREATKIN	49	0
74	CREATKIN	53	0
75	DDIMER	375	0
76	DDIMER	445	0
77	DDIMER	471	0
78	DDIMER	1565	0
79	DDIMER	1718	0
80	PCO2_VEN	51	0
81	PH_VEN	7.31	0
82	PO2_VEN	43	0
83	PLATELET	447-913	0
84	TPROTEIN	.	0
85	TPROTEIN	5.1	0
86	TPROTEIN	6.1	0
87	TPROTEIN	7.7	0
88	TPROPONIN	.	0
89	TPROPONIN	0.033	0
90	TPROPONIN	0.035	0
91	TPROPONIN	0.036	0
92	TPROPONIN	0.045	0
93	TPROPONIN	0.05	0
94	TPROPONIN	0.056	0
95	TPROPONIN	0.058	0

The exemplary mortality index and predictors shown in Tables 2 and 3 above may be utilized in a statistical model for determining a risk of mortality of a patient in accordance with the subject matter disclosed herein. The mortality column in the tables provides a weight associated with the corresponding row. The weight assigns the level at which the associated physiological variable impacts the risk of mortality of the patient.

[0069] Patient chart data may be used in the statistical model described herein for determining the risk of mortality of a patient. Upon admittance, one or more raw variables may be collected from chart data. For example, FIG. 7 is a chart illustrating 22 significant intervals obtained from 11 raw variables in accordance with an embodiment of the subject matter disclosed herein. These candidate intervals may be recorded as new binary variables labeled with an appropriate range that identifies it as a significant interval. Next, this list may be "orthogonalized" using an anchored factor analysis. The results are shown in the chart illustrated in FIG. 8. The result includes 13 factors explaining 83% of the variance. These factors were analyzed for identifying the factors according to their ability to differentiate between dead and live patients.

FIG. 9 is a graphical representation showing the ability of the factors as a standardized difference between Y and N outcome groups. This data may be used in a statistical model for determining a risk of mortality of a patient.

[0070] Physiological data may be collected at different rates. For example, ECG data may be collected at millisecond intervals and processed into time domain information at sub-second intervals. Frequency domain information may be collected in increments that vary about 128 beats and then interpolated into strict 128 beats that vary along an approximate one minute interval. Laboratory and chart information may be collected repeatedly as requested. Demographic information may be collected once at admittance. A common time frame is required to join this information. The information may be taken and different time intervals and re-aggregated into strict fixed time intervals. In one example, a two minute time frame may be used, although any other suitable time frame may be used.

[0071] Once all data is re-aggregated into two minute increments, first and second derivatives may be calculated and monitored for trending and changes. After each of the resultant files are calibrated into two minute packages of equal intervals, the files may be merged to identify common collection time frames across all information. Trending and change information may be used in a statistical model for determining a risk of mortality of the patient.

[0072] Referring to FIGS. 1 and 2, at block 202, the physiological data is analyzed with a statistical model and a risk of mortality continually determined. A statistical model may include a scoring algorithm containing a checklist of known derogatory indicators. The derogatory indicators may be constantly updated and fed into computer 110. In one example, the data may be sourced from a real-time stream of information coming from an ECG monitor. Every 128 beats may produce a set of frequency data. The data is aggregated into intervals along with the time difference percentages flowing out from the time domain sourced data. The packets may then be scored and a predicted segment-outcome calculated. The predicted outcome may be accumulated over the first four hours of admittance. Based upon the dominance of the predicted outcome, a clinical classification may be made. The classification may be monitored for changes over time. The risk of mortality may be represented by a risk of mortality score, which is continually updated for real-time monitoring of the risk of mortality. In one example of presenting data, the risk of mortality and physiological data may each be classified by color, where green represents a normal condition, yellow represents an unstable condition, and red represents a not normal condition.

[0073] In one example of model building, the SAS® Enterprise Miner™ 5.1 and Quantitative Target Modeling System (QTMS) (available from SAS Institute Inc.) may be used for statistical model building. In this example, the following different classes of input variables are used: real time continuous physiological signals, advanced measures of heart rate variability, physiological based indices of organ function and their variability, demographic and diagnosis related predictors of mortality. These variables may be transformed and composite variables generated. The variables may be scanned and summarized via a multivariate algorithm of QTMS for calculating a variety of statistics for each variable including lift from base, t-tests, chi-square analysis, indices, missing data, and confidence intervals. Significant intervals within each variable are selected depending on a specified lift from

base criteria. Binary recoding of individual intervals found within each predictor can then be performed.

[0074] A statistical model may be developed by examining the covariation of all variables in response to a primary outcome (e.g., death versus survival). After each variable is scanned, a summary sheet is produced that rank orders all high/low intervals. These variables are factor analyzed to organize a selection of orthogonal explanation variables and then rank ordered according to their ability to differentiate between the target definitions. This process investigates a large pool of potential independent variables, identifies significant intervals within each variable distribution, reduces the pool into orthogonal factors, introduces pre-screened variables into a multivariate scoring technique, and calculates the performance of the model on both the estimation sample and hold out validation samples. Exemplary statistical models include a linear regression model, an autoneural network model, a logistic regression model, a DMneural model, a decision tree model, a neural network model, a minimum Bayes-risk (MBR) model, and a rule induction model.

[0075] At block 204, the risk of mortality may be presented via user interface 102. For example, the risk of mortality may be a value displayed as a number or graphically on display 108. Further, the physiological data such as the variables used for determining the risk of mortality may be presented via user interface 102. Variables may be displayed as being within a normal range (adjusting for age, sex, and diagnosis) or derogatory. A time series analysis of each variable, including the first and second derivative of the variable may be presented. Drill downs may also be presented by user selection.

Experimentation

[0076] In one experiment, a sample of twenty-eight pediatric patients, matched on age, sex, and diagnosis, from a PICU was selected as an analytic set for providing proof of concept principles of the subject matter disclosed herein. The experiment differentiated between children who die (14 of the patients) from those matched survivors (14 of the patients) using the following four classes of variables: real time continuous physiological signals (i.e., heart rate); advanced measures of variability of the physiological signals (i.e., spectral analysis); physiological based measures of organ function (i.e., serum glucose) and their variability; and demographic (i.e., age) and diagnosis related (i.e., post operative status) predictors of pediatric mortality. Since this experiment is a case control analysis, the mortality rate from this sample is 50%.

[0077] Streaming ECG data was captured at 224 data points per second tagged with a UTC millisecond time stamp provided by an ICU monitoring system. The R peaks of the ECG signal were estimated by an analog process and improved upon by an algorithm which identified and corrected errors and artifacts using a running average technique. FIGS. 10A and 10B are graphs illustrating an unfiltered ECG signals with an R peak estimation.

[0078] With an accurate fiducial point, the RR interval was measured in order to create time-domain variables. For the frequency domain metrics of the heart rate variability, sufficient frequency resolution was required while maintaining a time segment which was clinically relevant and in near real time. A 128 point fast Fourier transformation was chosen as the standard. Sixty-four (64) estimated points were provided over the positive frequency range and a data time segment less

than 2 minutes long for the ranges of heart rates commonly found in children. Since the heart rate data was normalized, the mean is zero, and the sum of the power in the frequency bands is directly proportional to the variance. Therefore, ratios of power between bands (i.e., low/high frequency) are equal to variance ratios. The units of power are beats per minute (bpm)²/bpm² (unit less) as opposed to ms², because of the use of the normalized heart rate data and not the heart beat period time series. The value for power reported within each frequency band varies but the ratios of interest were not affected. FIGS. 11A and 11B are graphs illustrating heart rate spectral curves for a surviving child and a child who died, respectively.

[0079] Physiological based measures of organ function were defined by a battery of laboratory tests collected during the patients' PICU stay and a series of clinical signs and parameters (i.e., infusion of epinephrine) recorded by bedside PICU nurses. These tests were collected based upon clinical need which varied by patient and varied over time within each patient. A series of derogatory biomarkers were created to address the inclusion of this information with a reasonable patient-to-variable ratio and to manage an inter-correlation between tests. Only tests having identifiable segments with a high index for predicting mortality were included. This objective was achieved using a single factor scan procedure. FIG. 12 is a chart profiling derogatory segments within variable (base excess) with a single factor scan. The chart demonstrates that for patients with a base excess value of -4.4 to -6.4, there is an increase in mortality by 32% (response index=132). FIG. 13 is a chart profiling extreme derogatory ranges within a battery of laboratory tests. FIG. 14 is a chart illustrating an example of intermittent physiologic parameters and clinical signs. Further, FIG. 15 includes charts profiling examples of intermittent physiologic parameters and clinical signs evaluated through QTMS with selected best results.

[0080] This experiment was an accumulation of multiple variables collected continuously, intermittently, or only once during a PICU stay. Thus, units of time for each class of variables were different. To link the 4 classes of variables, a common time frame of two minutes was utilized. The time series was combined with different frequencies using various interpolative methods. FIGS. 16A and 16B are graphs illustrating exemplary intermittent original data and interpolated data in 2 minute increments, respectively.

[0081] The first four hours of data from the 28 matched patients were partitioned out for analyses and outcome (i.e., dying patients versus surviving patients) recorded. This resulted in an analytic data set of 3360 records (1680 survive packets and 1680 died packets). Each patient thus produced 120 records for the first four hours at two minute intervals. A common time hierarchy file was analyzed using SAS® Enterprise Miner™ 5.1, which implemented 8 different modeling techniques using 80% of the PICU admission data packets. The different modeling techniques included a linear regression model, an autoneural network model, a logistic regression model, a DMneural model, a decision tree model, a neural network model, a minimum Bayes-risk (MBR) model, and a rule induction model. A random 20% hold out sample of packets were used to test a PICU admission model. In this experiment, the rule induction model most successfully classified patients who later survived or died based on the initial four hours of data after PICU admission.

[0082] Five clusters from the rule induction model that resulted in a risk of mortality score (between 0 and 100) were based on the segments of variables shown in Table 4 below.

TABLE 4

Individual Variable Segments Used in the Rule Induction Model				
Cluster 1	Cluster 2	Cluster 3	Cluster 4	Cluster 5
O2Sat Art	pNN400	Ionized Calcium	EPI	pNN600
Sodium	pNN500	PO2 <=57		
Base Balance	2nd Derivative	O2Sat Art <=85.6		
PCO2	NN_Interval			
PO2	Ionized Calcium	pNN400		
Bicarbonate	O2Sat (Art)			
Base Balance <=-4.4	Sodium			
Bicarbonate <=20.4				
Ionized Calcium				

Table 5 below shows the success of the model in relating the risk of mortality score (ranging between 0 and 100) to individual and cumulative mortality in training and validation PICU admission datasets.

TABLE 5

Risk of Mortality Score Associated with Mortality for Training and Validation Datasets					
Training			Validation		
Risk of Mortality Score	Percent Mortality	Cumulative Mortality	Risk of Mortality Score	Percent Mortality	Cumulative Mortality
5	100.0000	100.0000	5	100.0000	100.0000
10	100.0000	100.0000	10	100.0000	100.0000
15	100.0000	100.0000	15	100.0000	100.0000
20	100.0000	100.0000	20	100.0000	100.0000
25	100.0000	100.0000	25	100.0000	100.0000
30	100.0000	100.0000	30	100.0000	100.0000
35	100.0000	100.0000	35	100.0000	100.0000
40	98.5870	99.8230	40	96.4340	99.5540
45	97.9620	99.6170	45	96.1540	99.1760
50	87.7480	98.4300	50	80.7100	97.3300
55	6.2110	90.0460	55	14.7060	89.8190
60	6.2110	83.0600	60	13.4820	83.4570
65	2.7900	76.8850	65	0.0000	77.0370
70	0.1180	71.4020	70	0.0000	71.5350
75	0.0000	66.6420	75	0.0000	62.5930
80	0.0000	62.4770	80	0.0000	62.5930
85	0.0000	58.8020	85	0.0000	58.9110
90	0.0000	52.6120	90	0.0000	55.6380
95	0.0000	52.6120	95	0.0000	52.7100
100	0.0000	49.9810	100	0.0000	50.0740

The table shows that for risk of mortality scores between 0 and 35, 100% of the patients die. For risk of mortality scores between 75 and 100, no patients die.

[0083] The predictive capabilities of the rule induction model are demonstrated in Tables 6 and 7 below, where the sensitivity of the model is 98.44% with a specificity of 98.88% in the training and validation datasets. In the training dataset, in 2687 two minute packets which were obtained in the first four hours after PICU admission, less than 3% were classified incorrectly (false positive rate=1.12% and false

negative rate=1.56%). Similar results were found in the admission dataset, where sensitivity is 97.03% with a specificity of 98.21%.

TABLE 6

Training Dataset Actual Patient Outcome			
	Survivor	Died	Total
Predicted to Survive	1329	21	1350
Predicted to Die	15	1322	1337
Total	1344	1343	2687

TABLE 7

Validation Dataset Actual Patient Outcome			
	Survivor	Died	Total
Predicted to Survive	330	10	340
Predicted to Die	6	327	333
Total	336	337	673

[0084] Data obtained during the entire PICU length of stay (LOS) in the 28 patients has been analyzed. This data represents about 57,000 risk of mortality scores ranging from 0.29 to 12.73 days with a cumulative length of stay of 79.41 days for all patients. The predictive capabilities of the rule induction model are demonstrated in Table 8 below, where the model's sensitivity is 82.92% with a specificity of 71.32%.

TABLE 8

Classification for Total PICU LOS Actual Patient Outcome			
	Survivor	Died	Total
Predicted to Survive	17,248	5,636	22,884
Predicted to Die	6,936	27,354	34,290
Total	24,184	32,990	57,174

Six of the 14 survivors had 100% of the risk of mortality scores correct during the entire PICU LOS, while an additional 3 had greater than 80% correct risk of mortality predictions for this entire time period. Four of the 14 patient deaths had 100% of the risk of mortality scores correct during the entire PICU LOS, while an additional 6 had greater than 80% correct risk of mortality predictions for this entire time period. The incorrect predictions were either an error or a change in the physiological state of the patient such that during the specific two minute period, ultimate survivors appeared to be dying or ultimate deaths appeared to be improving.

[0085] Further, the data obtained during the final 4 hours in the PICU was analyzed in the 28 matched patients. The predictive capabilities of the rule induction model are demonstrated in Table 9 below.

TABLE 9

	Classification for End of PICU Stay		
	Actual Patient Outcome		
	Survivor	Died	Total
Predicted to Survive	1174	222	1396
Predicted to Die	506	1458	1964
Total	1680	1680	3360

Three of the 14 survivors had 100% of the risk of mortality scores correct during the final 4 hours, while an additional 5 had greater than 80% correct risk of mortality predictions for this time period. Seven of the 14 patient deaths had 100% of the risk of mortality scores correct during the final 4 hours, while an additional 4 had greater than 80% correct risk of mortality predictions from this time period.

[0086] An additional 16 survivors were analyzed during their entire PICU LOS. This data represents about 25,000 risk of mortality scores with LOS ranging from 0.23 to 6.36 days with 35.4 total patient days. The predictive capabilities of the rule induction model are demonstrated in Table 10 below.

TABLE 10

	Classification for 16 Survivors During PICU LOS		
	Actual Patient Outcome		
	Survivor	Died	Total
Predicted to Survive	20,080	0	20,080
Predicted to Die	5,411	0	5,411
Total	25,491	0	25,491

Two of the 16 survivors had 100% of the risk of mortality scores correct during the entire PICU LOS, while an additional 9 had greater than 80% correct risk of mortality predictions for this entire time period.

[0087] Software available from Cognos Incorporated, of Ottawa, Canada, was used for displayed the overall risk of mortality score and a color code of the score in 3 levels of risk of mortality. The color code includes red representing high risk, yellow representing medium risk, and green representing low risk. The individual variable were organized into 7 categories based on organ system with a drill down feature such that the individual variables contributing to the level of risk may be viewed in real time with updates every 2 minutes. FIG. 17 is a screen display illustrating an example of several cardiac variables (x-axis) for alive and dead patients (y-axis).

Selecting Physiological Variables

[0088] Evaluation of a patient may be improved by diversifying and expanding the physiological variables used in predicting a risk of mortality. According to an aspect of the subject matter disclosed herein, physiological variables with respect to risk of mortality may be selected for use in evaluating a risk of mortality of a patient in a PICU. A weight may be assigned to the physiological variable for use with a statistical model for determining a risk of mortality of the patient.

[0089] FIG. 18 is a flow chart illustrating an exemplary process for selecting a physiological variable for use in evaluating risk of mortality of a patient in a PICU according to an

embodiment of the subject matter described herein. This exemplary process is described with reference to system 100 shown in FIG. 1. Referring to FIGS. 1 and 18, survival outcome data and multivariate physiological data associated with a patient in a PICU are received (block 1800). Survival outcome data may include data indicating whether one or more PICU patients survived or died while in the PICU. Multivariate physiological data may include the one or more patient's PICU heart rate data, blood pressure data, temperature, and/or any of the other types of physiological data disclosed herein. Data collector 114 may be configured to receive the survival outcome data and multivariate physiological data.

[0090] At block 1802, the survival outcome data and the multivariate physiological data are analyzed with a statistical model to identify a physiological variable affecting risk of mortality of the patient. For example, a rule induction model or any other suitable statistical model may be applied to the survival outcome data and the multivariate physiological data for identifying a physiological variable affecting the risk of mortality. One or more of the multivariate physiological data and/or trends of the physiological data may be determined to affect the risk of mortality. Mortality risk function 118 may be configured to analyze the data with the statistical model to identify a physiological variable affecting risk of mortality of the patient.

[0091] At block 1804, a weight may be assigned to the physiological variable for use with the statistical model for determining a risk of mortality of the patient. For example, heart rate variation in a particular range may be highly predictive of the risk of mortality of the patient. In this case, heart rate variation in the range may be assigned a large weight in the statistical model. Additional variables may be determined to affect the risk of mortality. Weights may be assigned to these variables based on their affect on the risk of mortality. Other variables may be assigned a weight of 0 if they do not affect the risk of mortality. Mortality risk function 118 may be configured to assign the physiological variable for use with the statistical model for determining a risk of mortality of the patient.

[0092] The SAS® Enterprise Miner™ 5.1 software may be used to calculate several multivariate models. A rule induction method may provide good replicated ROC using a 20% hold out sample. The rule induction method uses a neural clustering, which creates clusters based upon an orthogonal set of variables used to define each of them.

[0093] An example of 8 cluster sizes are presented in the chart illustrated in FIG. 19. Each segment value is uniquely defined. The percentages shown in the chart correspond to the sizes of the segment values. Approximately 96% of all data may be categorized into the 8 clusters.

[0094] FIG. 20 includes bar graphs of a profile report for each cluster (in descending order of size). The data of FIG. 20 is associated with the data shown in FIG. 19. The profile report details the different set of variables used to define itself as a cluster.

[0095] FIGS. 21A-21H are graphs and charts detailing the ability of each cluster to differentiate between living and dead. The data of FIGS. 21A-21H is associated with the data shown in FIGS. 19 and 20. Referring to FIGS. 21A-21H, each graphic details the distributional characteristics between each cluster and the total sample. The inner circle in the pie charts represent the total sample, and the portions surrounding the inner circle represents the cluster characteristics for the pie

charts. The outlined portion of the bar charts (represented by "red") represents the total sample. Segment "Other," which does not have a graphic shown in FIGS. 21A-21H, has a count 96 and a percentage of 3.57.

[0096] FIG. 22 includes graphs of receiver operator curves for the rule induction model. Software code of a report summary detailing each cluster is provided below.

1				
2				
3				
4				
5				
6				
7				
8				
9				
10	Variable Summary			
11				
12	ROLE	LEVEL		COUNT
13				
14	ASSESS	NOMINAL		1
15	CLASSIFICATION	NOMINAL		2
16	INPUT	BINARY		10
17	INPUT	INTERVAL		9
18	PREDICT	INTERVAL		4
19	REJECTED	INTERVAL		1
20	SEGMENT	INTERVAL		1
21	TARGET	BINARY		1
22	TEXT	NOMINAL		1
23				
24	Frequencies	NOMINAL		1
25				
26				
27	Segment		Frequency	Percent of
28	Variable	Segment Value	Count	Total Frequency
29				
30	NODE	15	866	32.2293
31	NODE	3	537	19.9851
32	NODE	4	309	11.4998
33	NODE	13	277	10.3089
34	NODE	35	183	6.8106
35	NODE	38	177	6.5873
36	NODE	5	159	5.9174
37	NODE	25	83	3.0889
38	NODE	25	96	3.5728
39				
40	Variable: NODE Segment: 15 Count: 866			
41	Decision Tree Importance Profiles			
42				
43	Variable	Worth		Rank
44				
45	If	0.12647		1
46	vlf	0.08865		2
47	hf	0.08692		3
48	d2	0.08223		4
49	c7	0.04926		5
50	d1	0.04657		6
51	pNN600	0.03478		7
52	pNN700	0.02705		8
53	ratio	0.01498		9
54	pNN400	0.01374		10
55				
56	Variable: NODE Segment: 3 Count: 537			
57	Decision Tree Importance Profiles			
58				
59	Variable	Worth		Rank
60				
61	d2	0.058262		1
62	pNN700	0.026174		2
63	d5	0.019032		3
64	c7	0.012895		4
65	d1	0.012859		5
66	hf	0.011065		6

-continued

67	pNN600	0.010174		7
68				
69	Variable: NODE Segment: 4 Count: 309			
70	Decision Tree Importance Profiles			
71				
72	Variable	Worth		Rank
73				
74	d1	0.037565		1
75	c7	0.034932		2
76	d5	0.034219		3
77	c2	0.010501		4
78				
79	Variable: NODE Segment: 13 Count: 277			
80	Decision Tree Importance Profiles			
81				
82	Variable	Worth		Rank
83				
84	d1	0.094825		1
85	c7	0.071454		2
86	c2	0.052342		3
87	c4	0.046255		4
88	d5	0.035796		5
89	If	0.028111		6
90	ratio	0.019307		7
91	c6	0.018488		8
92	vlf	0.015437		9
93	pNN400	0.015101		10
94				
95	Variable: NODE Segment: 35 Count 183			
96	Decision Tree Importance Profiles			
97				
98	Variable	Worth		Rank
99				
100	pNN600	0.051863		1
101	hf	0.014300		2
102	If	0.010793		3
103				
104	Variable: NODE Segment: 38 Count: 177			
105	Decision Tree Importance Profiles			
106				
107	Variable	Worth		Rank
108				
109	d2	0.021924		1
110	deriv2	0.017044		2
111				
112	Variable: NODE Segment: 5 Count: 159			
113	Decision Tree Importance Profiles			
114				
115	Variable	Worth		Rank
116				
117	c2	0.015177		1
118				
119	Variable: NODE Segment: 25 Count: 83			
120	Decision Tree Importance Profiles			
121				
122	Variable	Worth		Rank
123				
124	pNN400	0.012530		1
125				

[0097] Systems, methods, and computer program products disclosed herein may employ advanced computerized signal processing, statistical analyses, and neural network techniques to provide a continuously updated risk of mortality score in critically ill children. The score may serve as an early warning to changes in patient condition. Further, the score may guide the care of critically ill children. As a result, the mortality may be decreased and risk assessment of patients at admission may be improved. Further, medical practitioners may make more timely decisions about the rapid initiation or withdrawal of costly and risky therapeutic interventions.

[0098] Hospital costs may be reduced by better matching expensive and limited medical practitioner resources and hospital facilities to the changing needs of critically ill children.

For example, services provided by physicians and nurses may be efficiently allocated. Further, for example, hospital liability risk may be lowered.

[0099] Other non-commercial benefits of the subject matter disclosed herein are provided to academic medical centers and society. For example, many PICUs are areas where physicians and nurses in training develop their clinical skills and complete their academic requirements. Systems and methods disclosed herein may assist them in recognizing impending death and learn how the initiation and withdrawal of therapies can return these children to health.

[0100] It will be understood that various details of the presently disclosed subject matter may be changed without departing from the scope of the presently disclosed subject matter. Furthermore, the foregoing description is for the purpose of illustration only, and not for the purpose of limitation.

What is claimed is:

1. A method for evaluating a patient in a pediatric intensive care unit (PICU), the method comprising:

collecting physiological data associated with a patient upon admission to a PICU and at least once after admission to the PICU; and

analyzing the physiological data with a statistical model and continually determining a risk of mortality of the patient.

2. The method of claim 1 wherein collecting physiological data includes collecting the physiological data upon admission of the patient to a PICU and multiple intervals after admission of the patient to the PICU.

3. The method of claim 2 wherein continually determining the risk of mortality includes updating the risk of mortality at about the multiple intervals.

4. The method of claim 3 wherein updating the risk of mortality includes updating the risk of mortality at about two minute intervals.

5. The method of claim 1 wherein collecting physiological data includes collecting data from charts, laboratory tests, and monitoring equipment associated with the patient.

6. The method of claim 1 wherein collecting physiological data includes collecting physiological data from medical sensor units.

7. The method of claim 1 wherein collecting physiological data includes collecting one or more physiological measurements from the group consisting of: an electrocardiogram (ECG) measurement, a temperature measurement, a heart rate measurement, a blood pressure measurement, a central venous pressure measurement, a pulsed oximetry measurement, a carbon dioxide concentration measurement, a respiratory rate measurement, and an oxygen saturation measurement.

8. The method of claim 1 wherein collecting physiological data includes receiving physiological measures associated with the patient, and wherein analyzing the physiological data includes recoding the physiological measures into derogatory indicators associated with the risk of mortality of the patient.

9. The method of claim 1 wherein analyzing the physiological data includes calculating derivatives of the physiological data and analyzing the derivatives for trends and changes.

10. The method of claim 1 comprising presenting the risk of mortality via a user interface.

11. The method of claim 10 comprising determining a risk of mortality classification based on the determined risk of

mortality, and wherein presenting the risk of mortality includes displaying the risk of mortality classification via the user interface.

12. The method of claim 1 comprising communicating an alert when the risk of mortality of the patient is at a predetermined level.

13. A method for selecting a physiological variable for use in evaluating risk of mortality of a patient in a pediatric intensive care unit (PICU), the method comprising:

receiving survival outcome data and multivariate physiological data associated with a patient in a PICU;

analyzing the survival outcome data and the multivariate physiological data with a statistical model to identify a physiological variable affecting risk of mortality of the patient; and

assigning a weight to the physiological variable for use with the statistical model for determining a risk of mortality of the patient.

14. The method of claim 13 wherein receiving multivariate physiological data includes receiving physiological data from charts, laboratory tests, and monitoring equipment associated with the patient.

15. The method of claim 13 wherein receiving multivariate physiological data includes receiving physiological data from medical sensor units.

16. The method of claim 13 wherein receiving multivariate physiological data includes receiving physiological data one or more physiological measurements from the group consisting of: an electrocardiogram (ECG) measurement, a temperature measurement, a heart rate measurement, a blood pressure measurement, a central venous pressure measurement, a pulsed oximetry measurement, a carbon dioxide concentration measurement, a respiratory rate measurement, and an oxygen saturation measurement.

17. A system for evaluating a patient in a pediatric intensive care unit (PICU), the system comprising:

a data collector configured to collect physiological data associated with a patient upon admission to a PICU and at least once after admission to the PICU; and

a mortality risk function configured to analyze the physiological data with a statistical model and configured to continually determine a risk of mortality of the patient.

18. The system of claim 17 wherein the data collector is configured to collect the physiological data upon admission of the patient to a PICU and multiple intervals after admission of the patient to the PICU.

19. The system of claim 18 wherein the data collector is configured to update the risk of mortality at about the multiple intervals.

20. The system of claim 19 wherein the data collector is configured to update the risk of mortality at about two minute intervals.

21. The system of claim 17 wherein the data collector is configured to collect data from charts, laboratory tests, and monitoring equipment associated with the patient.

22. The system of claim 17 wherein the data collector is configured to collect physiological data from medical sensor units.

23. The system of claim 17 wherein the data collector is configured to collect one or more physiological measurements from the group consisting of: an electrocardiogram (ECG) measurement, a temperature measurement, a heart rate measurement, a blood pressure measurement, a central venous pressure measurement, a pulsed oximetry measure-

ment, a carbon dioxide concentration measurement, a respiratory rate measurement, and an oxygen saturation measurement.

24. The system of claim **17** wherein the data collector is configured to receive physiological measures associated with the patient, and wherein the mortality risk function is configured to recode the physiological measures into derogatory indicators associated with the risk of mortality of the patient.

25. The system of claim **17** wherein the mortality risk function is configured to calculate derivatives of the physiological data and analyze the derivatives for trends and changes.

26. The system of claim **17** comprising a user interface configured to present the risk of mortality.

27. The system of claim **26** wherein the mortality risk function is configured to determine a risk of mortality classification based on the determined risk of mortality, and wherein the user interface is configured to display the risk of mortality classification.

28. The system of claim **17** wherein the mortality risk function is configured to communicate an alert when the risk of mortality of the patient is at a predetermined level.

29. A system for selecting a physiological variable for use in evaluating risk of mortality of a patient in a pediatric intensive care unit (PICU), the system comprising:

a data collector configured to receive survival outcome data and multivariate physiological data associated with a patient in a PICU; and

a mortality risk function configured to:

analyze the survival outcome data and the multivariate physiological data with a statistical model to identify a physiological variable affecting risk of mortality of the patient; and

assign a weight to the physiological variable for use with the statistical model for determining a risk of mortality of the patient.

30. The system of claim **29** wherein the data collector is configured to receive physiological data from charts, laboratory tests, and monitoring equipment associated with the patient.

31. The system of claim **29** wherein the data collector is configured to receive physiological data from medical sensor units.

32. The system of claim **29** wherein the data collector is configured to receive one or more physiological measurements from the group consisting of: an electrocardiogram (ECG) measurement, a temperature measurement, a heart rate measurement, a blood pressure measurement, a central venous pressure measurement, a pulsed oximetry measurement, a carbon dioxide concentration measurement, a respiratory rate measurement, and an oxygen saturation measurement.

33. A computer program product comprising computer-executable instructions embodied in a computer-readable medium for performing steps comprising:

collecting physiological data associated with a patient upon admission to a PICU and at least once after admission to the PICU; and

analyzing the physiological data with a statistical model and continually determining a risk of mortality of the patient.

34. The computer program product of claim **33** wherein collecting physiological data includes collecting the physi-

ological data upon admission of the patient to a PICU and multiple intervals after admission of the patient to the PICU.

35. The computer program product of claim **34** wherein continually determining the risk of mortality includes updating the risk of mortality at about the multiple intervals.

36. The computer program product of claim **35** wherein updating the risk of mortality includes updating the risk of mortality at about two minute intervals.

37. The computer program product of claim **33** wherein collecting physiological data includes collecting data from charts, laboratory tests, and monitoring equipment associated with the patient.

38. The computer program product of claim **33** wherein collecting physiological data includes collecting physiological data from medical sensor units.

39. The computer program product of claim **33** wherein collecting physiological data includes collecting one or more physiological measurements from the group consisting of: an electrocardiogram (ECG) measurement, a temperature measurement, a heart rate measurement, a blood pressure measurement, a central venous pressure measurement, a pulsed oximetry measurement, a carbon dioxide concentration measurement, a respiratory rate measurement, and an oxygen saturation measurement.

40. The computer program product of claim **33** wherein collecting physiological data includes receiving physiological measures associated with the patient, and wherein analyzing the physiological data includes recoding the physiological measures into derogatory indicators associated with the risk of mortality of the patient.

41. The computer program product of claim **33** wherein analyzing the physiological data includes calculating derivatives of the physiological data and analyzing the derivatives for trends and changes.

42. The computer program product of claim **33** comprising presenting the risk of mortality via a user interface.

43. The computer program product of claim **42** comprising determining a risk of mortality classification based on the determined risk of mortality, and wherein presenting the risk of mortality includes displaying the risk of mortality classification via the user interface.

44. The computer program product of claim **33** comprising communicating an alert when the risk of mortality of the patient is at a predetermined level.

45. A computer program product comprising computer-executable instructions embodied in a computer-readable medium for performing steps comprising:

receiving survival outcome data and multivariate physiological data associated with a patient in a PICU;

analyzing the survival outcome data and the multivariate physiological data with a statistical model to identify a physiological variable affecting risk of mortality of the patient; and

assigning a weight to the physiological variable for use with the statistical model for determining a risk of mortality of the patient.

46. The computer program product of claim **45** wherein receiving multivariate physiological data includes receiving physiological data from charts, laboratory tests, and monitoring equipment associated with the patient.

47. The computer program product of claim **45** wherein receiving multivariate physiological data includes receiving physiological data from medical sensor units.

48. The computer program product of claim **45** wherein receiving multivariate physiological data includes receiving physiological data one or more physiological measurements from the group consisting of: an electrocardiogram (ECG) measurement, a temperature measurement, a heart rate mea-

surement, a blood pressure measurement, a central venous pressure measurement, a pulsed oximetry measurement, a carbon dioxide concentration measurement, a respiratory rate measurement, and an oxygen saturation measurement.

* * * * *

专利名称(译)	用于评估儿科重症监护病房中的患者的方法，系统和计算机程序产品		
公开(公告)号	US20100057490A1	公开(公告)日	2010-03-04
申请号	US12/302008	申请日	2007-05-30
[标]申请(专利权)人(译)	北卡罗来纳大学查珀尔希尔分校		
申请(专利权)人(译)	教堂山北卡罗来纳大学		
当前申请(专利权)人(译)	教堂山北卡罗来纳大学		
[标]发明人	KOCIS KEITH C KOCIS JR DANIEL JOSEPH		
发明人	KOCIS, KEITH C. KOCIS, JR., DANIEL JOSEPH		
IPC分类号	G06Q50/00 A61B5/00		
CPC分类号	G06F19/345 G06F19/3431 G06Q50/22 G06F19/00 G16H40/63 G16H50/20 G16H50/30		
优先权	60/809283 2006-05-30 US		
其他公开文献	US10163174		
外部链接	Espacenet USPTO		

摘要(译)

公开了用于评估儿科重症监护病房 (PICU) 中的患者的方法，系统和计算机程序产品。根据一个方面，一种方法可以包括在进入PICU时收集与患者相关联的生理数据，并且在进入PICU之后收集至少一次。生理数据可以与统计模型相关联，并且可以连续地确定患者的死亡风险。

