



US 20130053655A1

(19) **United States**

(12) **Patent Application Publication**  
**CASTELLANOS**

(10) **Pub. No.: US 2013/0053655 A1**

(43) **Pub. Date: Feb. 28, 2013**

(54) **MOBILE VASCULAR HEALTH EVALUATION DEVICES**

*A61B 5/0402* (2006.01)

*A61B 5/02* (2006.01)

(76) Inventor: **ALEXANDER F. CASTELLANOS**,  
Templeton, CA (US)

(52) **U.S. Cl. .... 600/301; 600/481; 600/454; 600/440**

(21) Appl. No.: **13/598,371**

(57) **ABSTRACT**

(22) Filed: **Aug. 29, 2012**

**Related U.S. Application Data**

(60) Provisional application No. 61/528,518, filed on Aug. 29, 2011.

A mobile measurement device comprising a computing device; one or more sensors that are coupled to the computing device using one or more corresponding compatible digital interfaces; and logic encoded with instructions which when executed perform determining and storing vascular function information and one or more of: values of metrics or parameters; physiological analysis of the parameters and the vascular function information; recommendations for actions that an individual or healthcare provider should take in response to the recommendations or parameters. Embodiments further include processes for using vascular function information collected from a mobile measurement device to generate the parameters, analysis, and recommendations.

**Publication Classification**

(51) **Int. Cl.**  
*A61B 8/06* (2006.01)  
*A61B 5/00* (2006.01)

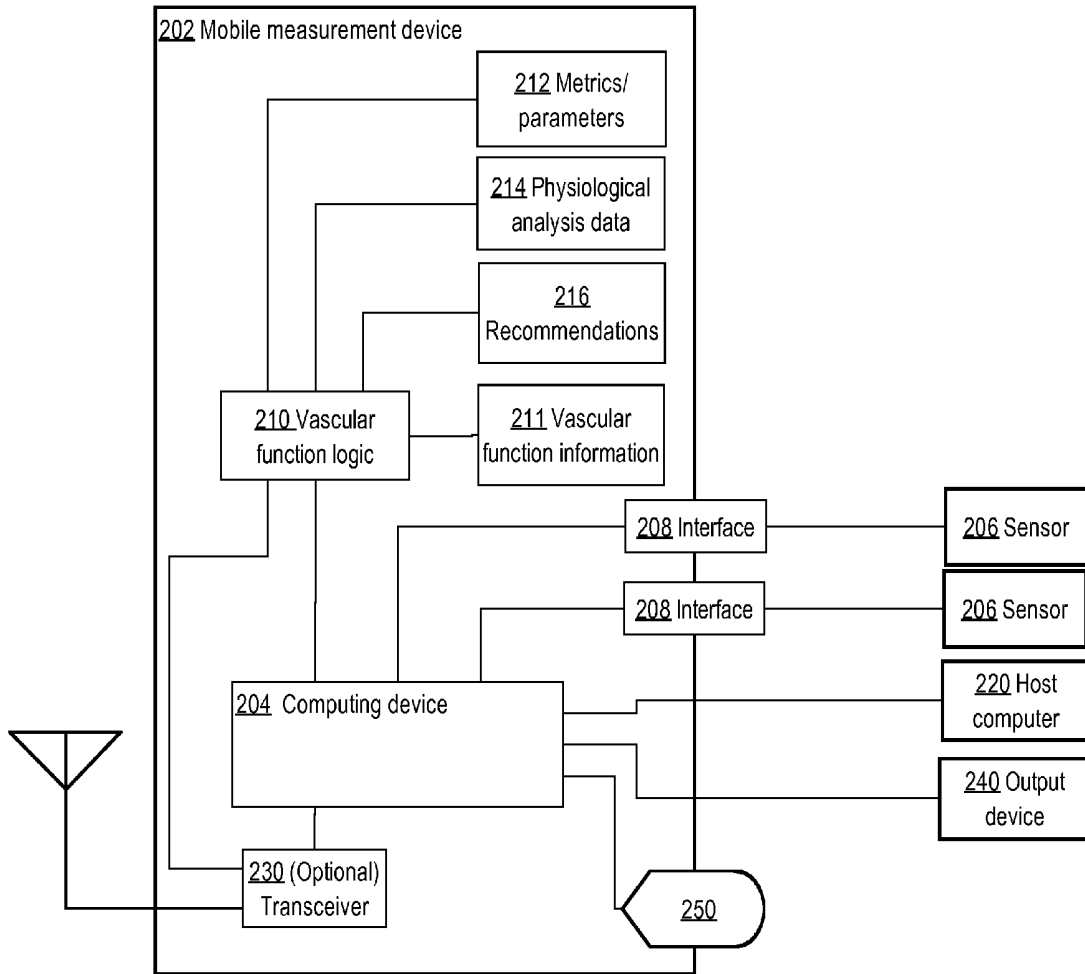


FIG. 1



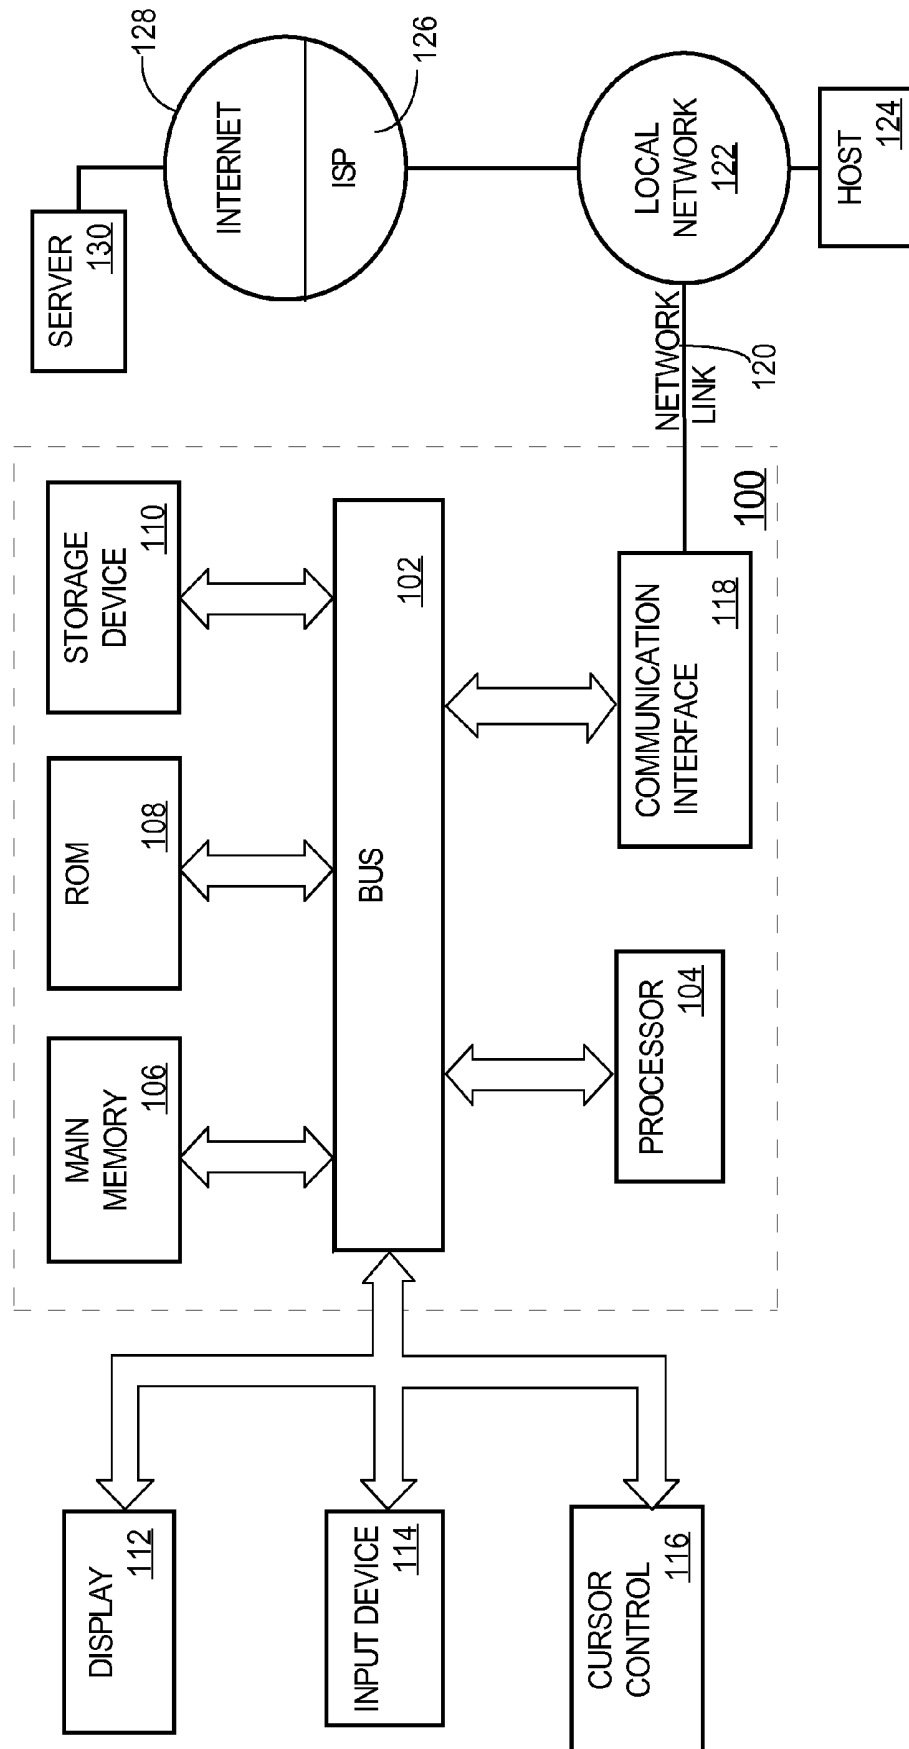


FIG. 2



**FIG. 3**

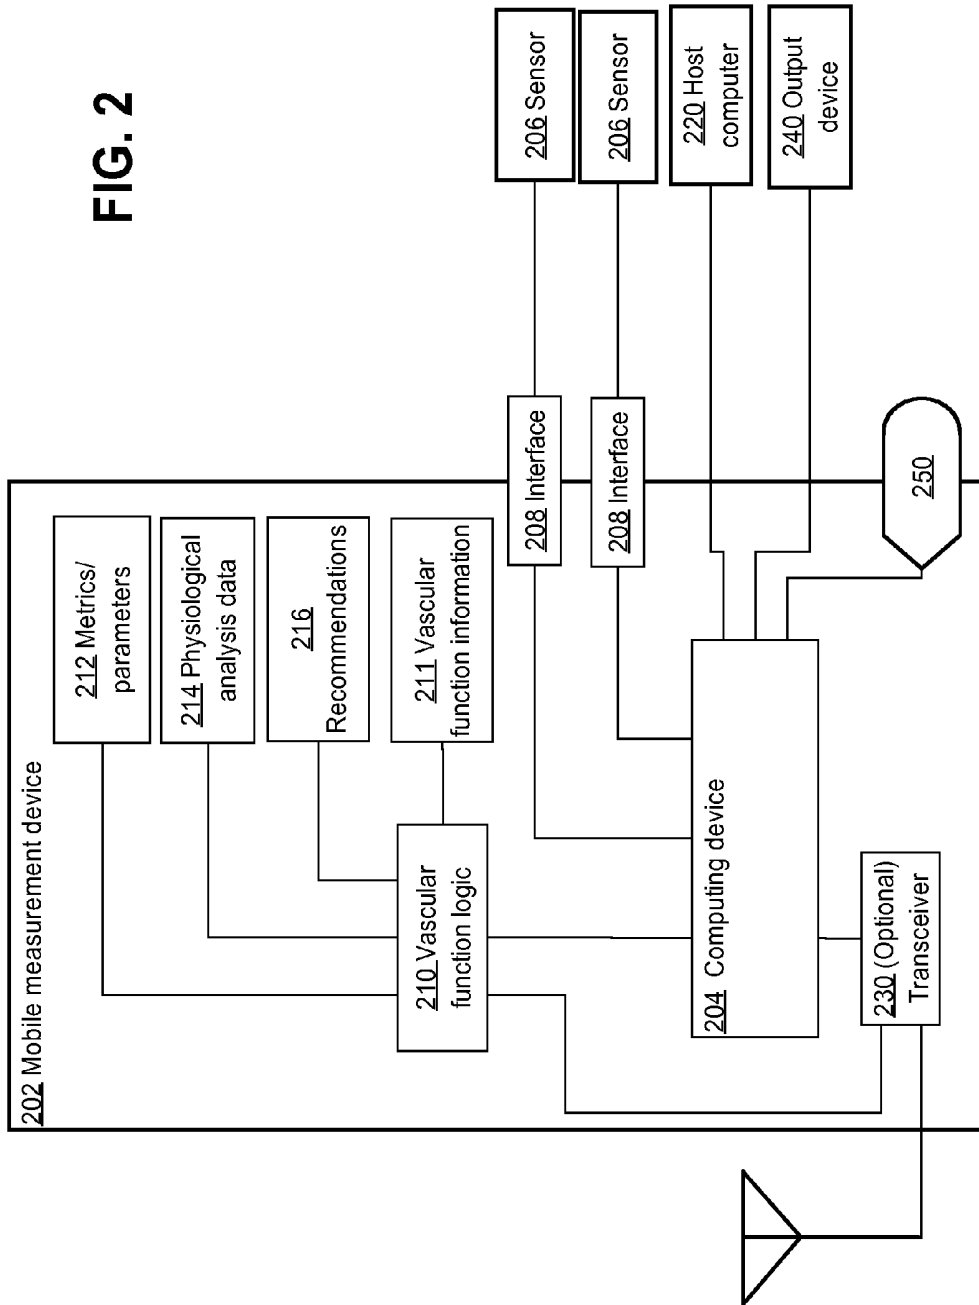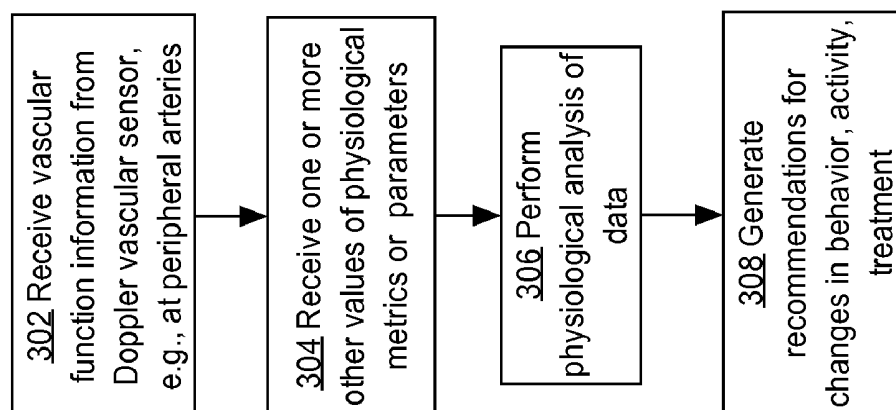

## MOBILE VASCULAR HEALTH EVALUATION DEVICES

### CROSS-REFERENCE TO RELATED APPLICATIONS; BENEFIT CLAIM

[0001] This application claims the benefit under 35 U.S.C. §119(e) of provisional application 61/528,518, filed Aug. 29, 2011, the entire contents of which is hereby incorporated by reference as if fully set forth herein.

### FIELD OF THE INVENTION

[0002] The present disclosure generally relates to medical devices and medical diagnostic methods, and more specifically relates to devices and techniques for assessing health conditions of elements of the vascular system.

### BACKGROUND

[0003] The approaches described in this section are approaches that could be pursued, but not necessarily approaches that have been previously conceived or pursued. Therefore, unless otherwise indicated, it should not be assumed that any of the approaches described in this section qualify as prior art merely by virtue of their inclusion in this section.

[0004] In humans, negative vascular condition has been associated with or is known to be symptomatic with a variety of serious diseases including coronary artery disease and diabetes. For example, reduced elasticity of the coronary arteries may indicate the presence of plaque on the walls of the arteries and may contribute to myocardial infarction. Vascular function information also may be useful in early recognition of sepsis, hypertension, hypotension, or respiratory dysfunction. Accurate measurements of the elasticity, thickness, and mechanical performance of blood vessels in conducting blood flow may permit better evaluation of diseases that are associated with negative vascular health and recommendation of a variety of therapies.

[0005] However, in the state of the art, vascular measurements typically require elaborate equipment and can only be performed in a clinical setting on a periodic basis. For example, one typical method involves using Doppler sonography systems to obtain acoustic readings from the peripheral principal arteries from one or more body locations, such as the ankles. The systems are large, expensive, and normally capable of use only in a medical office. Further, these systems normally are not integrated with other valuable measures of personal health.

[0006] Devices are available that measure vital signs, blood glucose, gases in the body, respiratory activity, and other aspects of physiology. For example, smartphone applications or “apps” are available to enable an individual to take their pulse using a smartphone, and other apps can take pictures of food and provide readouts of food contents and calories. However, these measurements and apps may be incapable of integrating with other valuable health information or providing a global assessment of healthy or unhealthy status.

### SUMMARY OF THE INVENTION

[0007] The appended claims may serve as a summary of the invention.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The present invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements and in which:

[0009] FIG. 1 is a block diagram that illustrates a computer system upon which an embodiment of the invention may be implemented.

[0010] FIG. 2 illustrates an example mobile measurement device.

[0011] FIG. 3 illustrates an example process of generating recommendations based at least in part on vascular function information.

## DESCRIPTION OF EXAMPLE EMBODIMENTS

[0012] In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, that the present invention may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring the present invention.

[0013] Overview of Example Mobile Measurement Devices

[0014] In an embodiment, a mobile measurement device is configured to process information from the environment and human physiology and anatomy. FIG. 2 illustrates an example mobile measurement device. In an embodiment, the mobile measurement device 202 comprises: a computing device 204; one or more sensors 206 that are coupled to the computing device using one or more corresponding compatible digital interfaces 208; and vascular function logic 210 encoded with instructions which when executed perform determining and storing vascular function information 211 and one or more of: values of metrics or parameters 212; physiological analysis 214 of the parameters and the vascular function information; recommendations 216 for actions that an individual or healthcare provider should take in response to the recommendations or parameters.

[0015] In various embodiments, the computing device 202 comprises any of: a smartphone; a tablet computer; a laptop computer or other personal computer; a workstation; a watch computer; a ring-mounted computer; an active steering wheel of a motor vehicle; a hat-mounted computer; a helmet-mounted computer; an eyewear-mounted computer. In other embodiments, the computing device 202 comprises or is integrated with any of: a body garment such as a short, swimsuit, vest, shorts or shoes.

[0016] In various embodiments, the sensors 206 comprise at least one of the following: an ultrasound sensor configured to acoustically measure structure, performance or other metrics associated with a blood vessel or other element of the vascular system and to cooperate with the program logic to provide output waveform data representing acoustic measurements of blood flow in a blood vessel, and provide vascular structure or performance metrics 212 based on bidirectional vascular waveform analysis. In an embodiment, one of the sensors 206 or the vascular function logic 210 perform bidirectional waveform Doppler ultrasound analysis that can measure or indicate the elasticity of one or more blood ves-

sels. In an embodiment, the vascular function information **211** comprises or is based on the bidirectional waveform Doppler ultrasound analysis.

[0017] In various embodiments, the sensors **206** comprise one or more of any of the following: an infrared, crystal technology, or light-based physiological monitor; a blood pressure sensor; a pulse sensor; a respiratory rate sensor comprising, for example, one or more chest patches, wrist patches, and/or chest straps; a body temperature sensor; an oxygen absorption sensor; a carbon dioxide sensor; a nitric oxide sensor; a blood glucose sensor; a sensor of electrolytes, nutrients in the circulation, or other metrics; one or more contact lenses configured to measure capillary blood flow; a flow meter; a spirometer; a mouthpiece. In an embodiment, at least one of the sensors **206** is configured to sense and store at least one measurement relating to vascular structure, status or performance. Thus, as alternatives to using ultrasound as a form of energy for sensing, in some embodiments sensors that use infrared spectroscopy, auto-fluorescence, GLASS technology and other forms of energy or radiation may be used to obtain vascular waveforms for analysis.

[0018] In various embodiments, the vascular function logic **210** comprises one or more of any of the following: non-volatile random access memory (NVRAM); flash memory; an application-specific integrated circuit (ASIC); a field programmable gate array; read-only memory (ROM) including any of electrically erasable ROM (EEROM) or electrically programmable ROM (EPROM); disk storage; any of which may be configured with stored program instructions that are arranged to perform the processes that are further described herein. Wireless devices such as wireless probes may be used as sensors **206**.

[0019] In various embodiments, the vascular function information **211** provides metrics, reports, or values that indicate overall health attributes of blood vessels or other components of the vascular system, or particular attributes of blood vessels or other components of the vascular system. Examples of attributes include elasticity of vascular walls; thickness of vascular walls; and an indication of whether a heart pulse cycle results in one, two, or three elastic responses of the vascular walls; presence or amount of plaque formation on the vascular walls.

[0020] In various embodiments, the vascular function information **211** may be used to generate, using vascular function logic **210** or other program logic, one or more reports, recommendations **216**, or protocols based on the vascular function information. Recommendations **216** may collectively and broadly represent reports and protocols as well as recommendations. In various embodiments, the reports, recommendations or protocols may comprise any of the following: a status report on vascular function; a list of options for medical intervention in the patient based on medical standards of practice based on one or more medical indications represented in the vascular function information; reports or recommendations suggesting sepsis, hypertension, hypotension, respiratory dysfunction, kidney function, heart rhythm, hydration level; a protocol for exercise; a protocol for sports performance; a protocol for patient lifestyle or changes in lifestyle; a protocol for patient stress management; a report of recommendations, or the expected effects of, any of several aspects of treatment including but not limited to hydration, nutrition, exercise, supplements, and medications.

[0021] In various embodiments, the device **202** may be configured to directly generate the vascular function informa-

tion **211**, and the one or more reports, recommendations, or protocols based on the vascular function information. Alternatively, the device **202** may be activated or used in a clinical setting such as an emergency room, hospital ward or medical office. The device **202** also may be used or activated in non-clinical settings such as during driving a car, during exercise, during sleep, and during other activities. For example, in any of these embodiments, the device **202** may internally generate the vascular function information **211** and also provide logic for interfacing with an external host computer **220** to download the vascular function information; on the host computer, stored program logic may be configured to generate the one or more reports, recommendations, or protocols based on the vascular function information.

[0022] In this manner, the device **202** provides a useful interface between the patient and the medical office; the device may be used to collect a variety of physiological metrics from an individual, including at least one measurement of vascular structure, status or performance, which are then downloaded from the device to the host computer **220**. After downloading, program logic on the host computer **220** may be used to generate the one or more reports, recommendations, or protocols based on the vascular function information. Data collected over time can be used to better understand factors influencing the cardiovascular system.

[0023] Alternatively, after downloading data from the device **202**, an independent measurement of at least one measurement of vascular structure, status or performance is performed in association with the host computer. For example, in one approach, an individual uses the device **202** to monitor any of the physiological metrics described above, then downloads the metrics and transfers or provides the metrics to a healthcare provider via host computer **220**. In a clinical setting or quasi-clinical setting, the healthcare provider may use a conventional Doppler vascular sensor to capture an acoustic profile of the vascular performance of the same individual; for example, the healthcare provider could perform a Doppler vascular test of the peripheral arteries or arteries at other body locations at which a Doppler vascular signal can be obtained. The resulting acoustic waveform data may be combined with the metrics that have been downloaded from the patient's monitoring device **202** and, under control of program logic at the host computer **220**, used to generate the one or more reports, recommendations, or protocols. In various embodiments, the patient may transfer or provide the metrics to the healthcare provider by any of the following: connecting the device **202** to a personal computer that is owned or operated by the patient, downloading a data file from the device, and streaming, e-mailing or uploading the data file to the healthcare provider; going to the premises of the healthcare provider, connecting the device to a host computer that is owned or operated by the healthcare provider, downloading a data file from the device to the host computer.

[0024] In various embodiments, the sensors **206** may comprise units that can detect activity of the nervous system either centrally or peripherally. For example, waveform data from an electroencephalogram (EEG) unit may reveal brain activity that can be correlated to vascular waveform data to identify progress in therapeutic goals and/or the condition of the vasculature.

[0025] In various embodiments, the data from sensors **206** may be combined with results or detections of blood test measurements for substances such as cortisol, cholesterol, triglycerides, epinephrine, asymmetrical dimethyl arginine.

In various embodiments, the data from sensors 206 may be combined with results or detections of urinalysis to identify blood glucose, proteins, ketone, or blood in the urine, and specific gravity of urine. Values obtained from any of the foregoing measurements or units can be correlated to vascular waveform data to identify progress in therapeutic goals and/or the condition of the vasculature.

[0026] Unlike prior approaches, the integration of physiological monitoring metrics with information about vascular function, obtained either in a clinical setting or directly from the monitoring device, enables generating improved overall health assessments or health status information. Further, reports in the embodiments herein provide an explanation of the effect of all the measured physiological functions on vascular health, or overall health. Embodiments typically integrate and incorporate at least one vascular study or vascular analysis, so that an evaluation of vascular health is an integral aspect of the reporting and recommendations herein.

[0027] FIG. 3 illustrates an example process of generating recommendations based at least in part on vascular function information. At step 302, vascular function information is received from at least one Doppler vascular sensor that is used, for example, at the peripheral arteries, such as at the ankles or wrists. One of the sensors 206 typically is a Doppler vascular sensor in an embodiment and obtains the vascular function information 211, which may be received at step 302 and stored in the form of raw sensor data or as a rendered waveform or in any other form suitable for later analysis.

[0028] At step 304, the process receives one or more other values of physiological metrics or parameters. In an embodiment, values at step 304 are received through one or more other sensors 206 and may include, for example, values for one or more vital signs such as pulse, blood pressure, oxygenation, etc.

[0029] At step 306, the process performs a physiological analysis of the data that was received at steps 302, 304. Step 306 may include determining trend values (“increasing,” “decreasing,” etc.) based on prior measurements from the same device, or whether the current magnitude of a particular value has crossed a particular threshold that is associated with a particular physiological condition or change or is associated with a particular qualitative or quantitative descriptor or condition, for example, “elevated”, “normal”, “baseline”, “exceptional”, “average”, “severe,” etc.

[0030] At step 306, the process generates one or more recommendations for changes in behavior, activity, or treatment. Recommendations may comprise reports or protocols and may be based on stored tables that map the values obtained at step 302, step 304 to particular recommendations, reports, or protocols. Step 306 also may include computation such as determining whether a particular value is greater or less than values stored in the tables, and/or comparing particular trend values to corresponding trend indicators stored in the tables. Data representations other than tables may be used.

[0031] Overview of Example Uses

[0032] For the purposes of illustrating clear examples, in various embodiments, the wireless or mobile measurement device 202 described herein may be used in one or more of the following ways. The examples refer to certain input parameters, algorithms and resulting recommendations. In one embodiment, each algorithm may be implemented using one or more computer programs or other software elements, or other computer logic, and may implement the clinical state of the art reflecting the current standard of care. However, unlike

past approaches, each algorithm receives as an input at least one element of digital vascular waveform data. Thus, the approaches herein can use vascular analysis as a contributing parameter in determining a resulting recommendation. Further, the integration of vascular analysis data means that a healthcare provider can correlate the other parameter values to the vascular data to result in a better assessment of the overall health of the individual, or to provide a better clinical judgment of responsive treatment that should be considered.

[0033] In particular, an improvement provided herein is in the contribution of vascular analysis data, obtained for example from a bidirectional Doppler ultrasound measurement of the peripheral arteries, in a health assessment with other biomedical parameters. The vascular analysis data is usable in individuals who are in a health state or an unhealthy state, to recognize responses of the vasculature to the individual's health state, activity or environment. The vascular analysis data may be used to recommend personal interventions and determine how other parameter values, or the responses or interventions, may be affecting vascular structure or performance. For example, the vascular analysis data might indicate only two instances of dynamic activities of arteries, which are reflected as two “bounces” in a waveform obtained from the vascular analysis. In response, a healthcare provider might recommend a relaxation exercise, breathing exercises, increasing hydration, specific aerobic exercises, and/or self-administer a supplement or medication. A subsequent vascular analysis performed shortly thereafter might reveal that the individual has achieved three (3) “bounces”, indicating improved vascular performance resulting from the relaxation exercise or other intervention as stated above.

[0034] Although some embodiments are described with reference to measuring vascular activity at peripheral arteries of the extremities, other embodiments may use measurements taken at the neck, chest wall, or other body part or location at which a Doppler vascular signal may be obtained.

[0035] The vascular analysis data may be used in combination with other apparatus such as ultrasound units that measure heart chamber activity or blood flow measurement apparatus.

[0036] Alternatively, a clinician may observe that a subject individual has elevated body temperature arising, for example, from heat exhaustion. With the availability of the vascular analysis data for the individual in addition to body temperature data, the clinician may be able to observe the effect of heat exhaustion on the vascular system. Further, the accumulation of data values from all other parameters may help explain anomalies that are seen in the waveform reflecting the vascular analysis. The combination of the vascular analysis data with other parameter values therefore permits a better global assessment of the individual and a better explanation of the individual's vascular response.

[0037] 1. Use of Mobile Measurement Device to Motivate Change from Sedentary Behavior

[0038] John, a sedentary individual, is sprawled upon the couch in his living room, wearing or using a mobile monitoring device. Fortunately, in his view, his favorite television show has just begun. Based on data collected from the mobile monitoring device, John's first hour of enjoyable viewing corresponds to a reasonably normal vitality condition. However, after ingesting a rather fatty meal and continuous television viewing for three more hours, John's vitality signals begin to decline, as measured by the mobile monitoring device 202 as follows:

Parameters:	1 <sup>st</sup> Hour:	4 <sup>th</sup> Hour:
Blood Pressure	Normal	Elevated
Pulse	Normal	Elevated
Respiration	Normal	Elevated
Oxygenation	Normal	Decreased
Nitric Oxide	Normal	Increased
Doppler Vascular Waveform	Moderately Severe	More Severe

[0039] The sensors 206 process these physical changes in real-time. During hour 4, John decides to connect his mobile monitoring device 202 to his tablet computer (an example of host computer 220). In an embodiment, John couples a universal serial bus (USB) cable from his tablet computer to the mobile monitoring device 202. The mobile monitoring device 202 contains a diagnostic computer program, which is automatically downloaded to the tablet computer and begins running as part of standard USB connection operations. During execution, based on the amount of change that the sensors detected in the 3-hour period, the diagnostic program generates and displays a report (an example of recommendations 216) to recommend a beneficial change in life activity as follows:

Algorithm Implementation & Recommendation:
1. 20 minute walking activity 2. 8 fl oz. water consumption 3. 2 tablet aspirin intake to relieve blood pressure 4. Utilize inhaler to increase oxygenation

[0040] In response, John ceases his laziness and follows the step by step process. He continues to use or wear the mobile monitoring device 202, and then re-connects it to his tablet computer. The diagnostic program reports the following changes in metrics or parameters:

Parameters:	Decline:	Ascent:
Blood Pressure	Elevated	Normal
Pulse	Elevated	Normal
Respiration	Elevated	Normal
Oxygenation	Decreased	Normal
Nitric Oxide	Increased	Normal
Waveform	More Severe	Baseline

Results:
The individual's blood pressure steadily returns to normal after the intake of aspirin. The recommended use of an inhaler returns his Oxygenation and Nitric Oxide levels to stable. Drinking water decreases the flow viscosity in his vascular system. Most importantly, the waveform velocity reaches its healthy baseline value.

[0041] 2. Use of Mobile Measurement Device in Hospital Intensive Care Unit (ICU)

[0042] John was recently been admitted to the ICU. Upon arrival, healthcare providers are perplexed by John's symptoms. However, for the past day, John had been using his mobile monitoring device 202 and has it with him. One of the healthcare providers connects the mobile monitoring device 202 to a host computer 220 in the ICU, downloads or streams data from the mobile monitoring device, and uses program

logic on the host computer to generate a report of the following historical parameter values that the mobile monitoring device had captured:

Parameters:	5 hrs prior to Arrival:	Point of Arrival:
Blood Pressure	Normal	Major Drop
Nitric Oxide	Normal	Normal
Respiration	Normal	Increasing
Temperature	Normal	Increasing
Pulse	Normal	Increasing
Waveform	Baseline	Increasing Velocity

[0043] Based on the collected data, the host program provides the following recommendation

Algorithm Assessment:	
1. Body Inflammatory State 2. Potential Diagnosis: Sepsis	
Action	Skin infection diagnosis and treatment. Perform blood cultures. Increase antibiotics.

[0044] The healthcare provider evaluates the assessment and recommended action, and decides to perform the recommended actions. As a result, the following physiological effects are observed:

Results:
Patient temperature returns to normal. Nitric oxide returns to normal. Pulse returns to normal. Blood Pressure becomes normalized. Temperature cools down. Waveform velocity returns to normal.

[0045] 3. Use of Mobile Measurement Device in Athletics

[0046] Alice, marathon runner, regularly uses her mobile monitoring device 202, which stores a data file indicating the following baseline parameters and goals:

Parameters:	Baseline:	Goal:
Weight	Average	Exceptional
Blood Pressure	Average	Above Average
Pulse	Average	Above Average
Respiration	Average	Above Average
Nitric Oxide	Average	Exceptional
Oxygen	Average	Exceptional
Waveform	Average	Exceptional

[0047] Over a training period of six months, Alice periodically downloads data from her mobile measurement device 202 to her laptop computer and reviews the data using program logic on the laptop. The program logic reports that, based on the data from the mobile measurement device, her body has met her goals. She is now prepared for the big race.

[0048] During the marathon, Alice continues to use her mobile measurement device 202. The mobile measurement device 202 comprises a near-field radio transceiver 230, such as a Bluetooth transceiver, that communicates with host computers having compatible transceivers that are located at way-

points on the race route. At various waypoints, Alice's team members, healthcare providers or race officials download data from Alice's mobile measurement device 220 to laptop computers at the waypoints. Host programs on the laptop computers periodically generate reports of Alice's performance. Additionally or alternatively, the mobile measurement device 220 comprises internal program logic that can display, on a wrist-mounted display, eyewear-mounted display or other output device 240, a brief report or indication of the following results. In either alternative, the vitality sensors remain intact to ensure Alice's physical condition is suitable to continue racing:

Distance:	Health:
1 <sup>st</sup> Mile	Ok
2 <sup>nd</sup> Mile	Ok
3 <sup>rd</sup> Mile	Ok
4 <sup>th</sup> Mile	Ok
5 <sup>th</sup> Mile	Decline

Parameters:	Status:
Blood Pressure	Dropped below baseline
Pulse	Slight Increase
Body Temperature	Slight Increase
Waveform	Slight Increase

Algorithm Assessment:	
1. Individual's bodily temperature increased	
2. Blood pressure is dropping	
3. Pulse is increasing	

Algorithm Recommendation:	
Subject is tending towards dehydration. Take more time at water stations. Consume more carbohydrates to replenish energy. Resume Running and decrease rate of pace slightly.	

[0049] In this example, one or more of the values indicated above for Health, Status, Algorithm Assessment and Algorithm Recommendation may be represented in stored data that is maintained in the mobile monitoring device 202, but not displayed or reported to Alice. Alternatively, one or more of the metrics may be reported to Alice or using the laptop computer at the waypoints; the alternatives are design choices that may depend, for example, on the size of display that is available on Alice's device. For example, if Alice is using a wrist-mounted computer or other output device 240 that has a liquid crystal display (LCD) having limited display capability, then the metrics may be reported in more limited form. Alternatively, if Alice's mobile monitoring device 202 comprises a smartphone with a high-resolution color graphics display 250, then more elaborate reporting may be provided.

[0050] Continuing with the example, assume that Alice takes heed of the recommendations of the mobile monitoring device 202 and changes her running behavior. Thereafter, the mobile monitoring device 202 collects data indicating the following:

Distance:	Health:
6 <sup>th</sup> Mile	Improved!
7 <sup>th</sup> Mile	Ok

-continued

8 <sup>th</sup> Mile	Ok
9 <sup>th</sup> Mile	Ok
10 <sup>th</sup> Mile	Ok

Algorithm Assessment:	
1. Vital signs are normal and stable	
2. Body is adequately hydrated	

Algorithm Recommendation	
The body may continue further exertion!	

[0051] Alice continues to review reports or indications from her mobile monitoring device 202 as she enters later stages of the race. The mobile monitoring device 202 collects data indicating the following:

Distance:	Health:
11 <sup>th</sup> Mile	Ok
12 <sup>th</sup> Mile	Ok
13 <sup>th</sup> Mile	Ok
14 <sup>th</sup> Mile	Ok
15 <sup>th</sup> Mile	Ok
16 <sup>th</sup> Mile	Ok
17 <sup>th</sup> Mile	Ok
18 <sup>th</sup> Mile	Declining
19 <sup>th</sup> Mile	Declining
20 <sup>th</sup> Mile	Sharp Decline

Algorithm Assessment:		
1. Health parameters started falling after the 18 <sup>th</sup> Mile.		
2. Experienced a sharp decline after the 20 <sup>th</sup> Mile.		
3. Further analysis of parameters required:		

Parameters:	18 <sup>th</sup> Mile:	20 <sup>th</sup> Mile
Blood Pressure	Moderate	Severe
Pulse	Moderate	Severe
Respiration	Moderate	Severe
Body Temperature	Moderate	Severe
Waveform	Moderate	Severe

Ambient Temperature	Sharp decrease in humidity
---------------------	----------------------------

Algorithm Assessment:	
1. All Parameters are experiencing a sharp decline.	
2. Further Decline is hazardous.	
3. Individual is severely dehydrated.	

Algorithm Recommendation:	
1. Halt running immediately.	
2. Consume water and carbs to replenish body.	
3. Continue walking until vitality signals increase.	

Results:	
Because it was much hotter towards the end of the race, our athlete experienced severe dehydration at her 20 <sup>th</sup> mile. Without her vitality sensors, there would be no way to accurately determine her state of condition and hydration.	

[0052] In each of the preceding examples, the metric "Waveform" represents data obtained from at least one vascular sensor 206 and is based on bidirectional waveform analysis. "Bidirectional" refers to the fact that in normal circulation, blood is pumped and flows in a first direction

through a blood vessel, then briefly reverses direction, and then is pumped and flows again in the first direction. For example, a miniaturized Doppler vascular sensor may be used as one of the sensors **206** to generate and store data representing an acoustic waveform based on detecting the flow of blood in one or more blood vessels. This data is indicative of the elasticity of the blood vessels, among other metrics; for example, a wider waveform is observed to indicate greater elasticity of the walls of the blood vessels, larger volume of blood flow, or a thinner waveform is observed to indicate lesser volume and less elasticity, at least at the measurement site, and greater elasticity is associated with reduced risk of certain major diseases such as CVD, diabetes and respiratory ailments. Through data collection, observation of velocity and volume of waveform of the first, second, third, and sometimes a fourth waveform, the processes herein will be able to correlate more accurately the status of physiological responses. The inventor fundamentally has recognized that combining vascular function information **211** representing vascular condition with one or more other physiological metrics **212** will provide a better capability for evaluating overall health of an individual and for providing recommendations for activity or treatment. Further, the integration of vascular bidirectional waveform analysis data representing vascular condition with a plurality of other physiological metrics will provide a superior capability for evaluating overall health of an individual and for providing recommendations for activity or treatment. Still further, having multiple examples of vascular data available over a long period of time can provide better environmental information on which health assessments may be based.

#### Hardware Overview

**[0053]** According to one embodiment, the techniques described herein are implemented by one or more special-purpose computing devices. The special-purpose computing devices may be hard-wired to perform the techniques, or may include digital electronic devices such as one or more application-specific integrated circuits (ASICs) or field programmable gate arrays (FPGAs) that are persistently programmed to perform the techniques, or may include one or more general purpose hardware processors programmed to perform the techniques pursuant to program instructions in firmware, memory, other storage, or a combination. Such special-purpose computing devices may also combine custom hard-wired logic, ASICs, or FPGAs with custom programming to accomplish the techniques. The special-purpose computing devices may be desktop computer systems, portable computer systems, handheld devices, networking devices or any other device that incorporates hard-wired and/or program logic to implement the techniques.

**[0054]** For example, FIG. 1 is a block diagram that illustrates a computer system **100** upon which an embodiment of the invention may be implemented. Computer system **100** includes a bus **102** or other communication mechanism for communicating information, and a hardware processor **104** coupled with bus **102** for processing information. Hardware processor **104** may be, for example, a general purpose micro-processor.

**[0055]** Computer system **100** also includes a main memory **106**, such as a random access memory (RAM) or other dynamic storage device, coupled to bus **102** for storing information and instructions to be executed by processor **104**. Main memory **106** also may be used for storing temporary

variables or other intermediate information during execution of instructions to be executed by processor **104**. Such instructions, when stored in non-transitory storage media accessible to processor **104**, render computer system **100** into a special-purpose machine that is customized to perform the operations specified in the instructions.

**[0056]** Computer system **100** further includes a read only memory (ROM) **108** or other static storage device coupled to bus **102** for storing static information and instructions for processor **104**. A storage device **110**, such as a magnetic disk or optical disk, is provided and coupled to bus **102** for storing information and instructions.

**[0057]** Computer system **100** may be coupled via bus **102** to a display **112**, such as a cathode ray tube (CRT), for displaying information to a computer user. An input device **114**, including alphanumeric and other keys, is coupled to bus **102** for communicating information and command selections to processor **104**. Another type of user input device is cursor control **116**, such as a mouse, a trackball, or cursor direction keys for communicating direction information and command selections to processor **104** and for controlling cursor movement on display **112**. This input device typically has two degrees of freedom in two axes, a first axis (e.g., x) and a second axis (e.g., y), that allows the device to specify positions in a plane.

**[0058]** Computer system **100** may implement the techniques described herein using customized hard-wired logic, one or more ASICs or FPGAs, firmware and/or program logic which in combination with the computer system causes or programs computer system **100** to be a special-purpose machine. According to one embodiment, the techniques herein are performed by computer system **100** in response to processor **104** executing one or more sequences of one or more instructions contained in main memory **106**. Such instructions may be read into main memory **106** from another storage medium, such as storage device **110**. Execution of the sequences of instructions contained in main memory **106** causes processor **104** to perform the process steps described herein. In alternative embodiments, hard-wired circuitry may be used in place of or in combination with software instructions.

**[0059]** The term "storage media" as used herein refers to any non-transitory media that store data and/or instructions that cause a machine to operation in a specific fashion. Such storage media may comprise non-volatile media and/or volatile media. Non-volatile media includes, for example, optical or magnetic disks, such as storage device **110**. Volatile media includes dynamic memory, such as main memory **106**. Common forms of storage media include, for example, a floppy disk, a flexible disk, hard disk, solid state drive, magnetic tape, or any other magnetic data storage medium, a CD-ROM, any other optical data storage medium, any physical medium with patterns of holes, a RAM, a PROM, and EPROM, a FLASH-EPROM, NVRAM, any other memory chip or cartridge.

**[0060]** Storage media is distinct from but may be used in conjunction with transmission media. Transmission media participates in transferring information between storage media. For example, transmission media includes coaxial cables, copper wire and fiber optics, including the wires that comprise bus **102**. Transmission media can also take the form of acoustic or light waves, such as those generated during radio-wave and infra-red data communications.

[0061] Various forms of media may be involved in carrying one or more sequences of one or more instructions to processor 104 for execution. For example, the instructions may initially be carried on a magnetic disk or solid state drive of a remote computer. The remote computer can load the instructions into its dynamic memory and send the instructions over a telephone line using a modem. A modem local to computer system 100 can receive the data on the telephone line and use an infra-red transmitter to convert the data to an infra-red signal. An infra-red detector can receive the data carried in the infra-red signal and appropriate circuitry can place the data on bus 102. Bus 102 carries the data to main memory 106, from which processor 104 retrieves and executes the instructions. The instructions received by main memory 106 may optionally be stored on storage device 110 either before or after execution by processor 104.

[0062] Computer system 100 also includes a communication interface 118 coupled to bus 102. Communication interface 118 provides a two-way data communication coupling to a network link 120 that is connected to a local network 122. For example, communication interface 118 may be an integrated services digital network (ISDN) card, cable modem, satellite modem, or a modem to provide a data communication connection to a corresponding type of telephone line. As another example, communication interface 118 may be a local area network (LAN) card to provide a data communication connection to a compatible LAN. Wireless links may also be implemented. In any such implementation, communication interface 118 sends and receives electrical, electromagnetic or optical signals that carry digital data streams representing various types of information.

[0063] Network link 120 typically provides data communication through one or more networks to other data devices. For example, network link 120 may provide a connection through local network 122 to a host computer 124 or to data equipment operated by an Internet Service Provider (ISP) 126. ISP 126 in turn provides data communication services through the world wide packet data communication network now commonly referred to as the "Internet" 128. Local network 122 and Internet 128 both use electrical, electromagnetic or optical signals that carry digital data streams. The signals through the various networks and the signals on network link 120 and through communication interface 118, which carry the digital data to and from computer system 100, are example forms of transmission media.

[0064] Computer system 100 can send messages and receive data, including program code, through the network (s), network link 120 and communication interface 118. In the Internet example, a server 130 might transmit a requested code for an application program through Internet 128, ISP 126, local network 122 and communication interface 118.

[0065] The received code may be executed by processor 104 as it is received, and/or stored in storage device 110, or other non-volatile storage for later execution.

[0066] In the foregoing specification, embodiments of the invention have been described with reference to numerous specific details that may vary from implementation to implementation. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense. The sole and exclusive indicator of the scope of the invention, and what is intended by the applicants to be the scope of the invention, is the literal and equivalent scope of the set of

claims that issue from this application, in the specific form in which such claims issue, including any subsequent correction.

What is claimed is:

1. A mobile measurement device comprising:  
a computing device;

one or more sensors that are coupled to the computing device using one or more corresponding compatible digital interfaces;

logic encoded with instructions which when executed perform determining and storing vascular function information and one or more of:

values of metrics or parameters;

physiological analysis of the parameters and the vascular function information;

recommendations for actions that an individual or healthcare provider should take in response to the recommendations or parameters.

2. The device of claim 1 wherein the computing device comprises any of: a smartphone; a tablet computer; a laptop computer or other personal computer; a workstation; a watch computer; a ring-mounted computer; an active steering wheel of a motor vehicle; a hat-mounted computer; a helmet-mounted computer; an eyewear-mounted computer.

3. The device of claim 1 wherein the sensors comprise at least one ultrasound sensor configured to acoustically measure structure, performance or other metrics associated with a blood vessel or other element of the vascular system and to cooperate with the program logic to provide output waveform data representing acoustic measurements of blood flow in a blood vessel, and provide vascular structure or performance metrics based on bidirectional vascular waveform analysis.

4. The device of claim 3 wherein the sensor or the program logic perform bidirectional waveform Doppler ultrasound analysis that can measure or indicate the elasticity of one or more blood vessels.

5. The device of claim 3 wherein the vascular function information comprises or is based on the bidirectional waveform Doppler ultrasound analysis.

6. The device of claim 1 wherein the sensors comprise one or more of an infrared, crystal technology, or light-based physiological monitor; a blood pressure sensor; a pulse sensor; a respiratory rate sensor comprising, for example, one or more chest patches, wrist patches, and/or chest straps; a body temperature sensor; an oxygen absorption sensor; a carbon dioxide sensor; a nitric oxide sensor; a blood glucose sensor; a sensor of electrolytes, nutrients in the circulation, or other metrics; one or more contact lenses configured to measure capillary blood flow; a flow meter; a spirometer; a mouth-piece. In an embodiment, at least one of the sensors is configured to sense and store at least one measurement relating to vascular structure, status or performance.

7. The device of claim 1 wherein the logic comprises one or more of non-volatile random access memory (NVRAM); flash memory; an application-specific integrated circuit (ASIC); a field programmable gate array; read-only memory (ROM) including any of electrically erasable ROM (EEPROM) or electrically programmable ROM (EPROM); disk storage.

8. The device of claim 1 wherein the vascular function information provides metrics, reports, or values that indicate overall health attributes of blood vessels or other components of the vascular system, or particular attributes of blood vessels or other components of the vascular system.

9. The device of claim 1 wherein the vascular function information is used to generate, using other program logic, one or more reports, recommendations, or protocols based on the vascular function information.

10. The device of claim 1 wherein the reports, recommendations or protocols may comprise any of: a status report on vascular function; a list of options for medical intervention in the patient based on medical standards of practice based on one or more medical indications represented in the vascular function information; reports or recommendations suggesting sepsis, hypertension, hypotension, or respiratory dysfunction; a protocol for exercise; a protocol for sports performance; a protocol for patient lifestyle or changes in lifestyle; a protocol for patient stress management; a report of recommendations, or the expected effects of, any of several aspects of treatment including but not limited to nutrition, exercise, supplements, and medications.

11. A mobile measurement device comprising:

a computing device;

a radio-frequency transceiver coupled to the computing device;

a computer display unit coupled to the computing device; one or more sensors that are coupled to the computing device using one or more corresponding compatible digital interfaces;

logic encoded with instructions which when executed perform determining and storing:

vascular function information;

one or more of: values of metrics or parameters; physiological analysis of the parameters and the vascular function information; recommendations for actions that an individual or healthcare provider should take in response to the recommendations or parameters.

12. The device of claim 11 wherein the computing device comprises a smartphone; a tablet computer; a laptop computer or other personal computer; a workstation; a watch computer; a ring-mounted computer; an active steering wheel of a motor vehicle; a hat-mounted computer; a helmet-mounted computer; an eyewear-mounted computer.

13. The device of claim 11 wherein the sensors comprise at least one ultrasound sensor configured to acoustically measure structure, performance or other metrics associated with a blood vessel or other element of the vascular system and to cooperate with the program logic to provide output waveform data representing acoustic measurements of blood flow in a blood vessel, and provide vascular structure or performance metrics based on bidirectional vascular waveform analysis.

14. The device of claim 13 wherein the sensor or the program logic perform bidirectional waveform Doppler ultrasound analysis that can measure or indicate the elasticity of one or more blood vessels.

15. The device of claim 13 wherein the vascular function information comprises or is based on the bidirectional waveform Doppler ultrasound analysis.

16. The device of claim 11 wherein the sensors comprise one or more of an infrared, crystal technology, or light-based physiological monitor; a blood pressure sensor; a pulse sensor; a respiratory rate sensor comprising, for example, one or more chest patches, wrist patches, and/or chest straps; a body temperature sensor; an oxygen absorption sensor; a carbon dioxide sensor; a nitric oxide sensor; a blood glucose sensor; a sensor of electrolytes, nutrients in the circulation, or other metrics; one or more contact lenses configured to measure capillary blood flow; a flow meter; a spirometer; a mouth-

piece. In an embodiment, at least one of the sensors is configured to sense and store at least one measurement relating to vascular structure, status or performance.

17. The device of claim 11 wherein the logic comprises one or more of non-volatile random access memory (NVRAM); flash memory; an application-specific integrated circuit (ASIC); a field programmable gate array; read-only memory (ROM) including any of electrically erasable ROM (EEPROM) or electrically programmable ROM (EPROM); disk storage.

18. The device of claim 11 wherein the vascular function information provides metrics, reports, or values that indicate overall health attributes of blood vessels or other components of the vascular system, or particular attributes of blood vessels or other components of the vascular system.

19. The device of claim 11 wherein the vascular function information is used to generate, using other program logic, one or more reports, recommendations, or protocols based on the vascular function information;

wherein the reports, recommendations or protocols may comprise any of: a status report on vascular function; a list of options for medical intervention in the patient based on medical standards of practice based on one or more medical indications represented in the vascular function information; reports or recommendations suggesting sepsis, hypertension, hypotension, or respiratory dysfunction; a protocol for exercise; a protocol for sports performance; a protocol for patient lifestyle or changes in lifestyle; a protocol for patient stress management; a report of recommendations, or the expected effects of, any of several aspects of treatment including but not limited to nutrition, exercise, supplements, and medications.

20. The device of claim 11 further comprising detecting elevated levels of one or more of blood pressure, pulse, respiration; detecting increased nitric oxide as measured in blood or respiration; detecting a severe Doppler vascular waveform; in response, generating recommendations for exercise, water consumption, and aspirin consumption.

21. A data processing system comprising:

a portable physiological measuring device configured for temporary attachment to a human body for receiving and storing data representing one or more physiological parameters of the body;

one or more Doppler vascular sensors configured for temporary attachment to peripheral artery locations of the body and a portable Doppler vascular signal measuring device coupled to the Doppler vascular sensors;

a mobile computing device configured to interface to the Doppler vascular signal measuring device and to the physiological measuring device;

a network interface in the mobile computing device configured to couple to a data network for communication of patient data from the physiological measuring device and the one or more Doppler vascular sensors to a data collection computer;

logic in the data collection computer encoded with instructions which when executed perform:

determining values of patient physiological metrics or parameters based on data received from the portable physiological measuring device;

determining vascular function information for the patient based on data received from the Doppler vascular signal measuring device;

determining medical condition data indicating one or more medical conditions of the patient based on analysis and correlations of the vascular function information and the patient physiological metrics;

generating and providing output records specifying one or more of: recommendations for actions that an individual or healthcare provider should take in response to the recommendations or parameters; or one or more reports, animations or figures.

**22.** The system of claim **21** wherein the mobile computing device comprises any of: a smartphone; a tablet computer; a laptop computer or other personal computer; a workstation; a watch computer; a ring-mounted computer; an active steering wheel of a motor vehicle; a hat-mounted computer; a helmet-mounted computer; an eyewear-mounted computer.

**23.** The system of claim **21** wherein the sensors comprise at least one ultrasound sensor configured to acoustically measure structure, performance or other metrics associated with a blood vessel or other element of the vascular system and to cooperate with the program logic to provide output waveform data representing acoustic measurements of blood flow in a blood vessel, and provide vascular structure or performance metrics based on bidirectional vascular waveform analysis.

**24.** The system of claim **23** wherein the sensor or the program logic perform bidirectional waveform Doppler ultrasound analysis that can measure or indicate the elasticity of one or more blood vessels.

**25.** The system of claim **24** wherein the vascular function information comprises or is based on the bidirectional waveform Doppler ultrasound analysis.

**26.** The system of claim **21** wherein the sensors comprise one or more of any of the following: an infrared, crystal technology, or light-based physiological monitor; a blood pressure sensor; a pulse sensor; a respiratory rate sensor comprising, for example, one or more chest patches, wrist patches, and/or chest straps; a body temperature sensor; an oxygen absorption sensor; a carbon dioxide sensor; a nitric oxide sensor; a blood glucose sensor; a sensor of electrolytes, nutrients in the circulation, or other metrics; one or more contact lenses configured to measure capillary blood flow; a flow meter; a spirometer; a mouthpiece. In an embodiment, at least one of the sensors is configured to sense and store at least one measurement relating to vascular structure, status or performance.

**27.** The system of claim **21** wherein the one or more Doppler vascular sensors are configured for temporary attachment to a body part.

**28.** The system of claim **21** wherein the vascular function information provides metrics, reports, or values that indicate overall health attributes of blood vessels or other components of the vascular system, or particular attributes of blood vessels or other components of the vascular system.

**29.** The system of claim **21** wherein the vascular function information is used to generate, using other program logic, one or more reports, recommendations, or protocols based on the vascular function information.

**30.** The system of claim **21** wherein the output records comprise any of: a status report on vascular function; a list of options for medical intervention in the patient based on medical standards of practice based on one or more medical indications represented in the vascular function information; reports or recommendations suggesting sepsis, hypertension, hypotension, or respiratory dysfunction; a protocol for exercise; a protocol for sports performance; a protocol for patient lifestyle or changes in lifestyle; a protocol for patient stress management; a report of recommendations, or the expected effects of, any of several aspects of treatment including but not limited to nutrition, exercise, supplements, and medications.

**31.** The system of claim **21** wherein the output records comprise any of: Protocols for disease intervention, Protocols for nutrition, Protocols for exercise, Protocols for sports performance, Protocols for patient lifestyle or changes, Protocols for stress management, Protocols for patient lifestyle or changes, Protocols for supplements/medications.

**32.** The system of claim **21** wherein the output records comprise assessments of vascular circulation based on stored indication data that correlates particular Doppler vascular signals with any one or more of heart failure, cardiac myopathy, cardiac hypertrophy; enlarged heart, or use of ventricular assisted devices.

**33.** The system of claim **21** wherein the output records comprise assessments of cardiac arrhythmia, extra beats or premature ventricular contractions.

**34.** The system of claim **21** wherein the physiological measuring device comprises an electrocardiogram (ECG) apparatus and wherein the correlation comprises correlating ECG data with Doppler vascular data.

\* \* \* \* \*

专利名称(译)	移动血管健康评估装置		
公开(公告)号	<a href="#">US20130053655A1</a>	公开(公告)日	2013-02-28
申请号	US13/598371	申请日	2012-08-29
[标]申请(专利权)人(译)	CASTELLANOS ALEXANDER F		
申请(专利权)人(译)	CASTELLANOS , ALEXANDER F.		
当前申请(专利权)人(译)	CASTELLANOS , ALEXANDER F.		
[标]发明人	CASTELLANOS ALEXANDER F		
发明人	CASTELLANOS, ALEXANDER F.		
IPC分类号	A61B8/06 A61B5/00 A61B5/0402 A61B5/02		
CPC分类号	A61B8/06 A61B8/4427 A61B8/485 A61B5/0205 A61B8/565 A61B5/0022 A61B5/02007 A61B8/488 G16H40/67		
优先权	61/528518 2011-08-29 US		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

一种移动测量设备，包括计算设备；使用一个或多个相应的兼容数字接口耦合到计算设备的一个或多个传感器；以及用指令编码的逻辑，所述指令在执行时执行确定和存储血管功能信息以及一个或多个：度量或参数的值；生理分析参数和血管功能信息；针对个人或医疗保健提供者响应建议或参数而应采取的行动的的建议。实施例还包括用于使用从移动测量设备收集的血管功能信息以生成参数，分析和推荐的过程。

