



(19) **United States**

(12) **Patent Application Publication**  
**Imran**

(10) **Pub. No.: US 2013/0116512 A1**  
(43) **Pub. Date: May 9, 2013**

(54) **MOUTHPIECE FOR MEASUREMENT OF BIOMETRIC DATA OF A DIVER AND UNDERWATER COMMUNICATION**

(52) **U.S. Cl.**  
CPC ..... **A61B 5/0002** (2013.01)  
USPC ..... **600/301**

(76) Inventor: **Mir Imran**, Los Altos Hills, CA (US)

(57) **ABSTRACT**

(21) Appl. No.: **13/457,456**

Embodiments of the invention provide a system, apparatus and methods for measurement of biometric data of a diver. In many embodiments, the system includes a mouthpiece having a sensor device comprising a light emitter and detector configured to emit and detect light at a wavelength having an absorbance correlated with a level of a blood gas saturation e.g., oxygen, nitrogen, CO<sub>2</sub>. The emitter is positioned to emit light onto oral tissue of the diver and the detector positioned to detect light which is received from the oral tissue either by transmittance of light through the oral tissue or by reflection of light from the tissue. The target oral tissue can include one or both of gum or buccal tissue. Such embodiments allow data to be collected without having to wear additional sensors or measurement devices and allow for measurement of blood gas levels as the diver breaths through their mouthpiece.


(22) Filed: **Apr. 26, 2012**

**Related U.S. Application Data**

(60) Provisional application No. 61/479,265, filed on Apr. 26, 2011.

**Publication Classification**

(51) **Int. Cl.**  
**A61B 5/00** (2006.01)

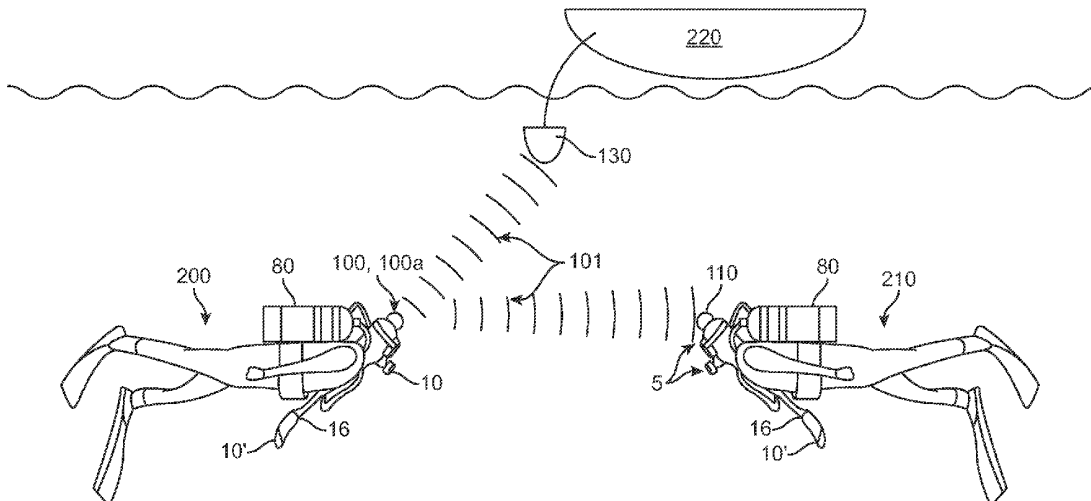

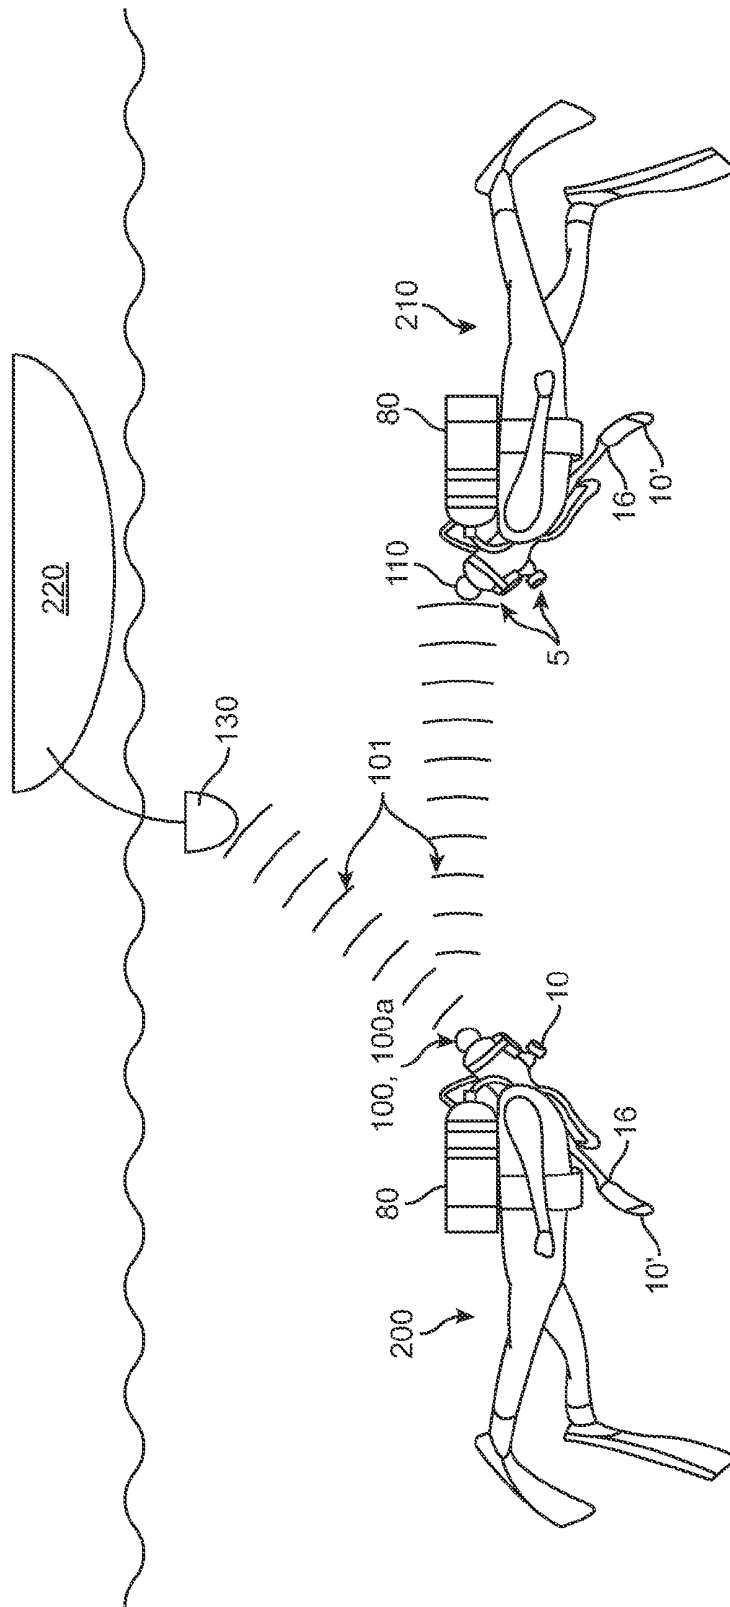


FIG. 1

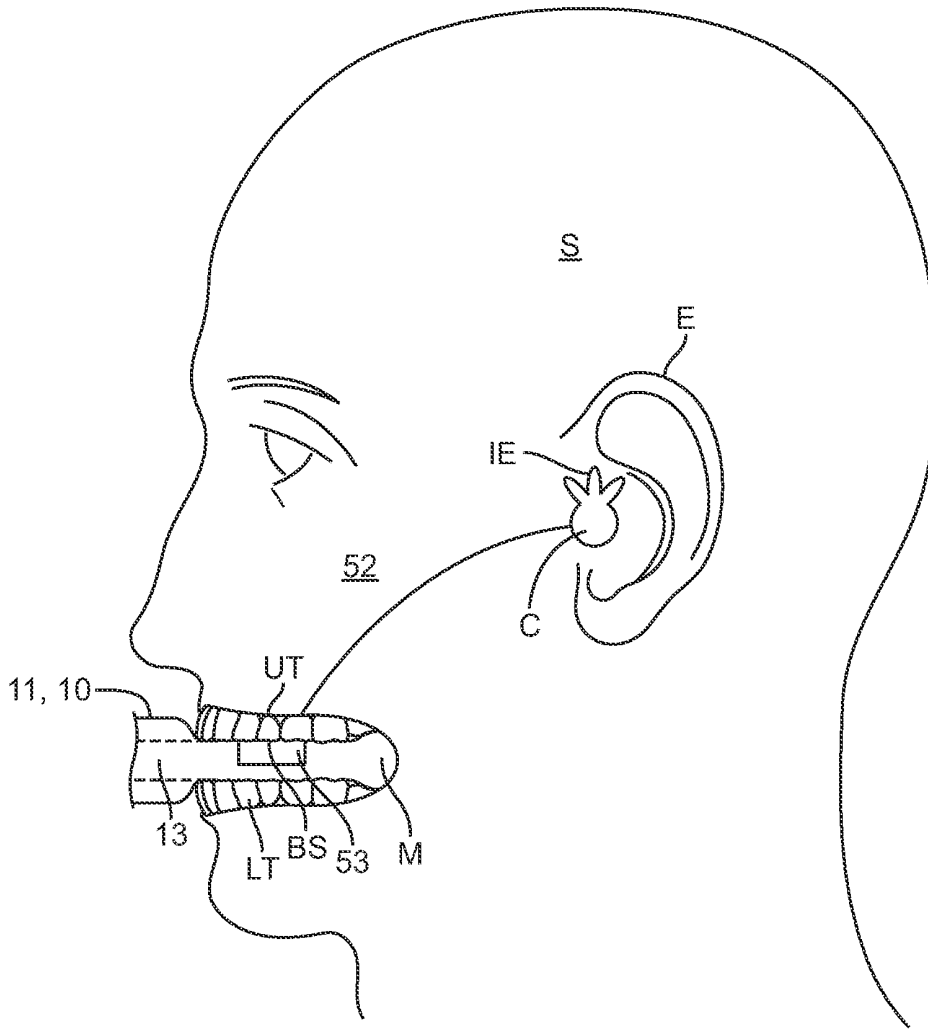


FIG. 1a

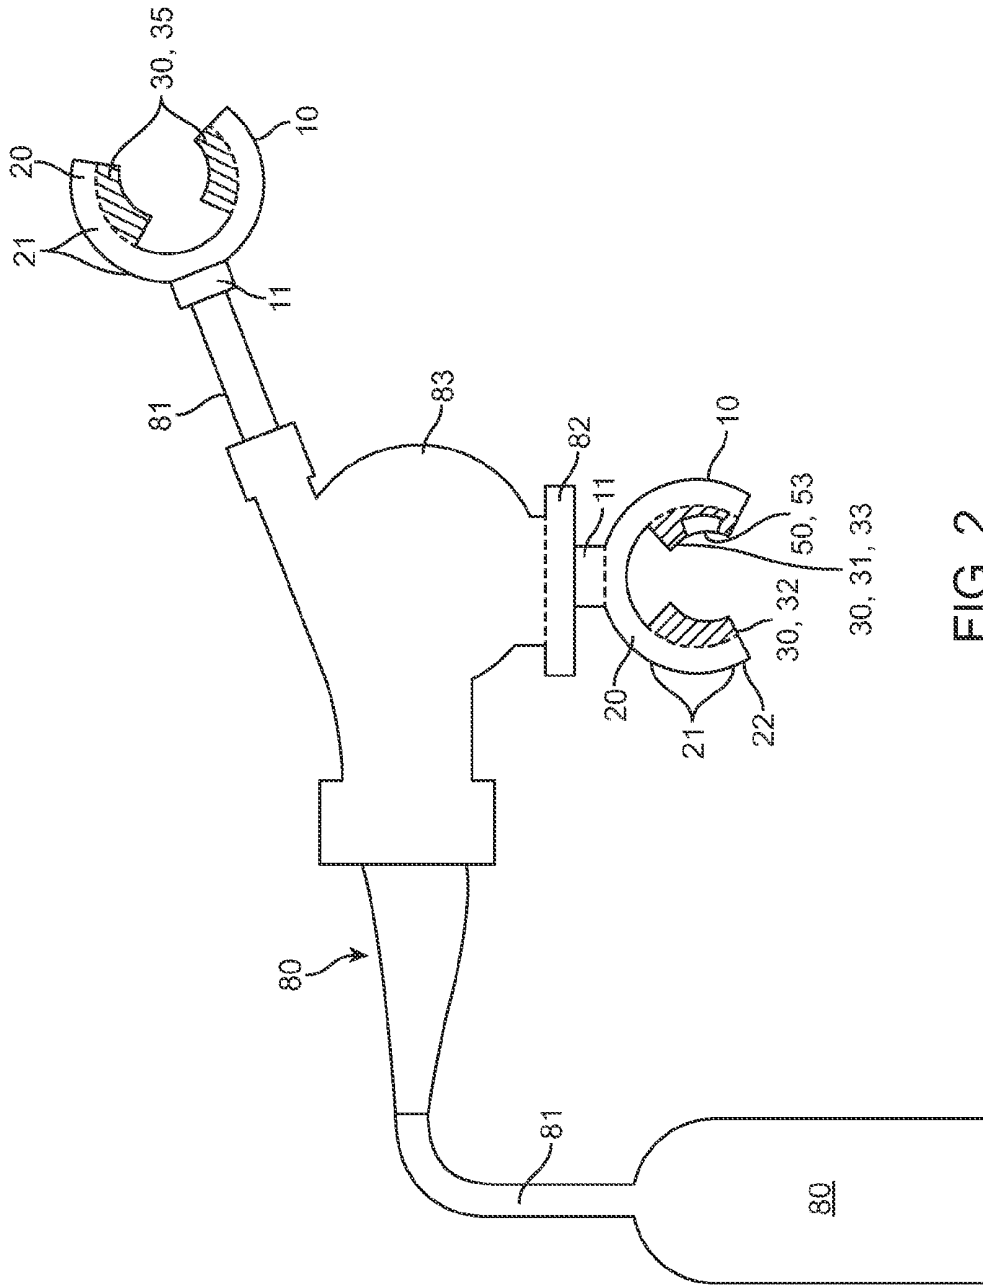


FIG. 2



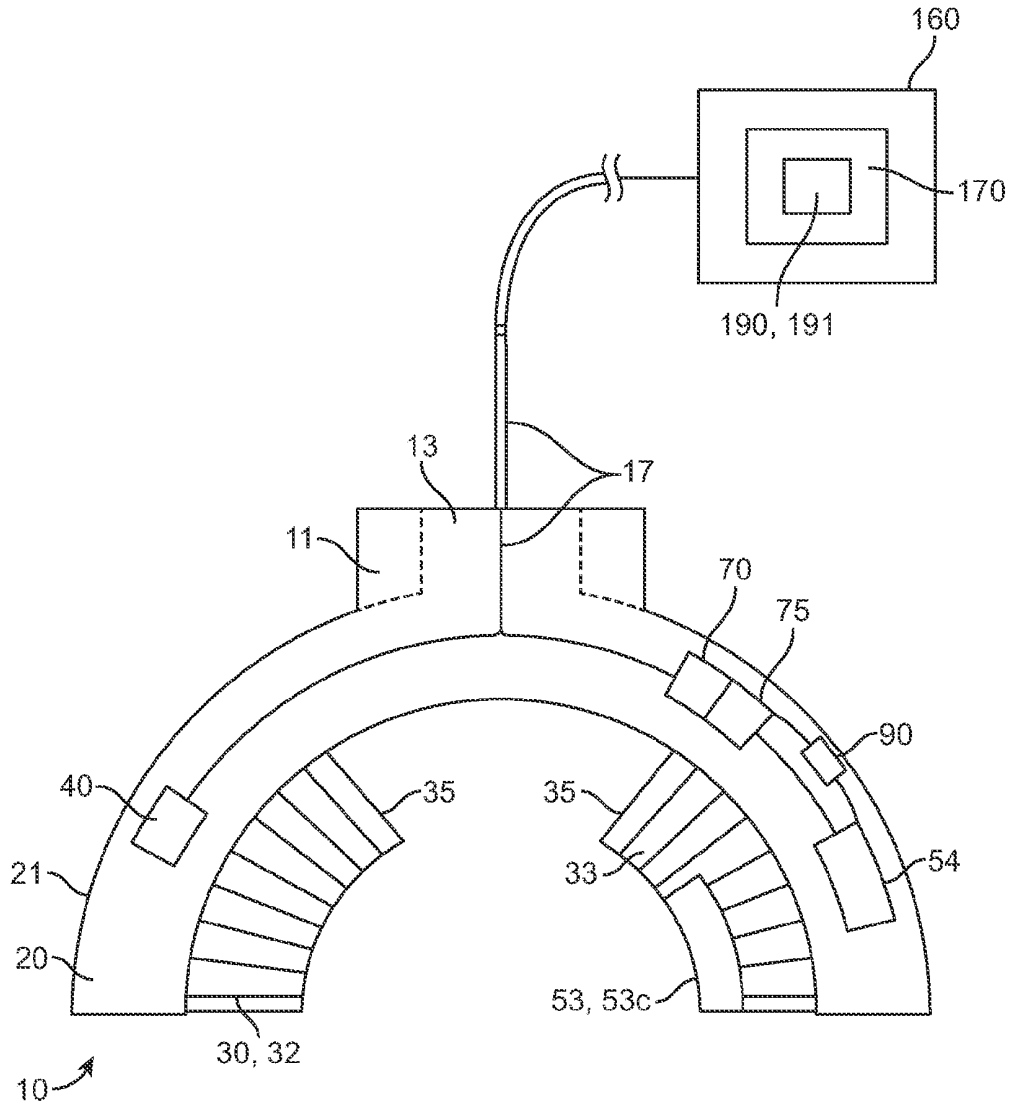


FIG. 4

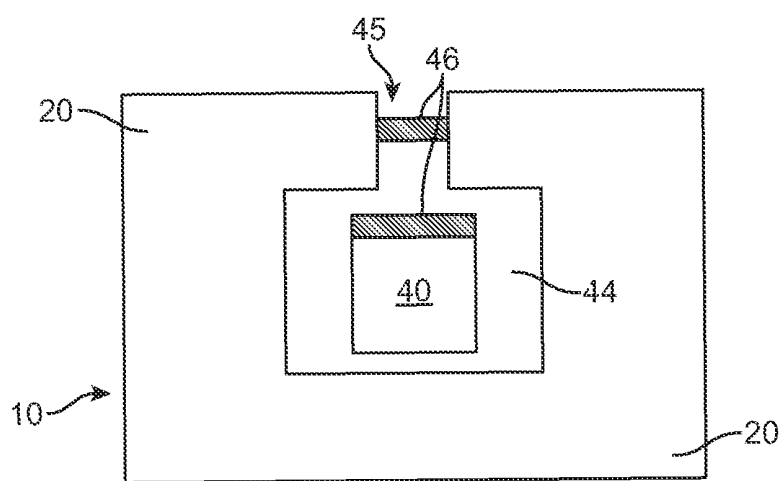


FIG. 5a

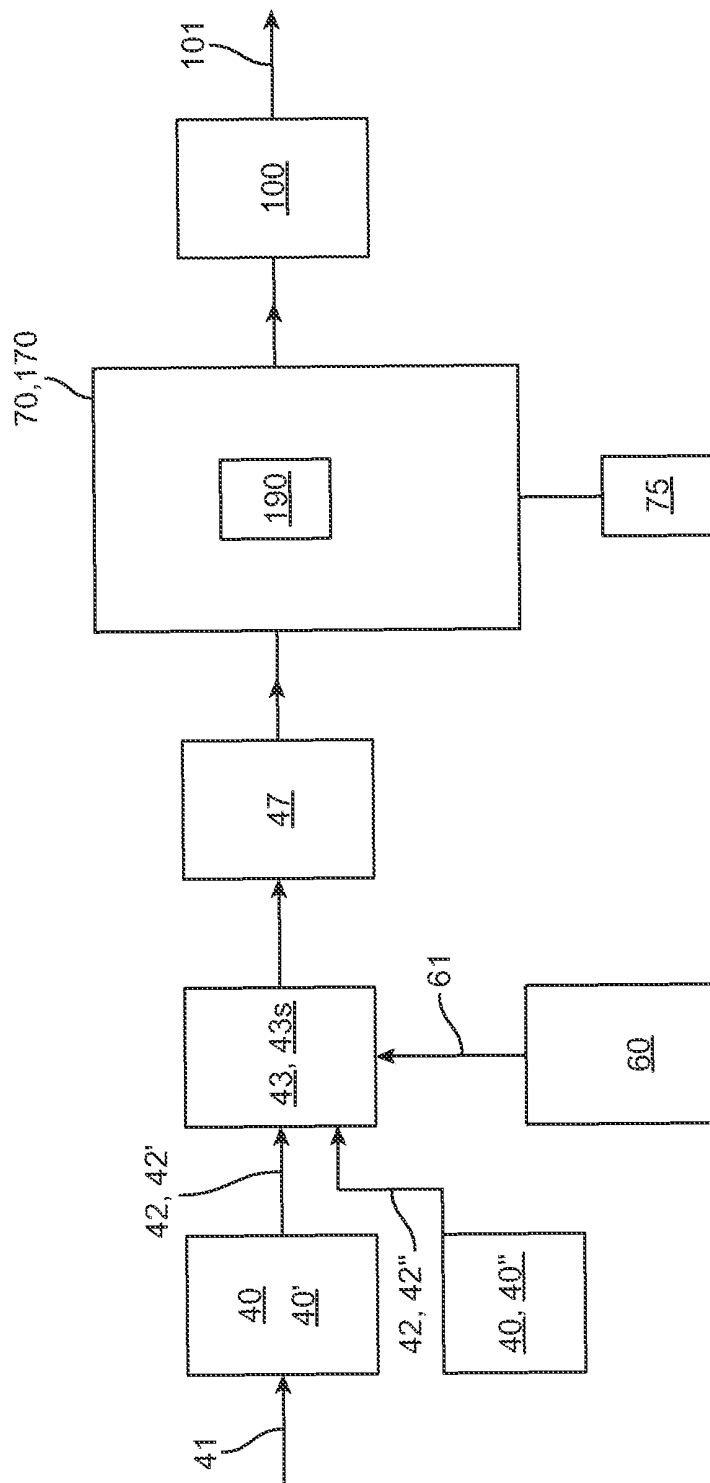


FIG. 5b

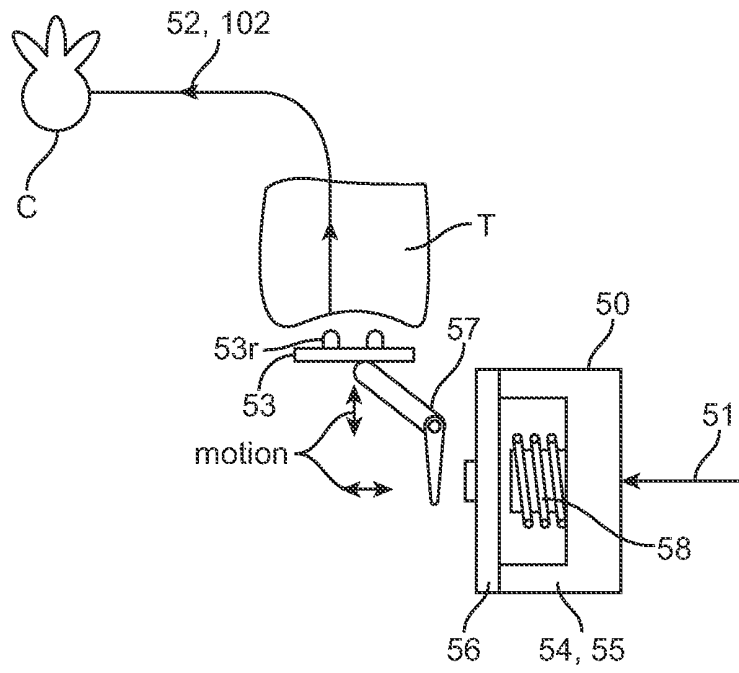


FIG. 6a

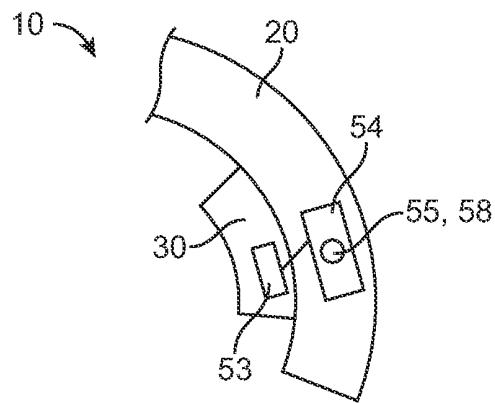


FIG. 6b

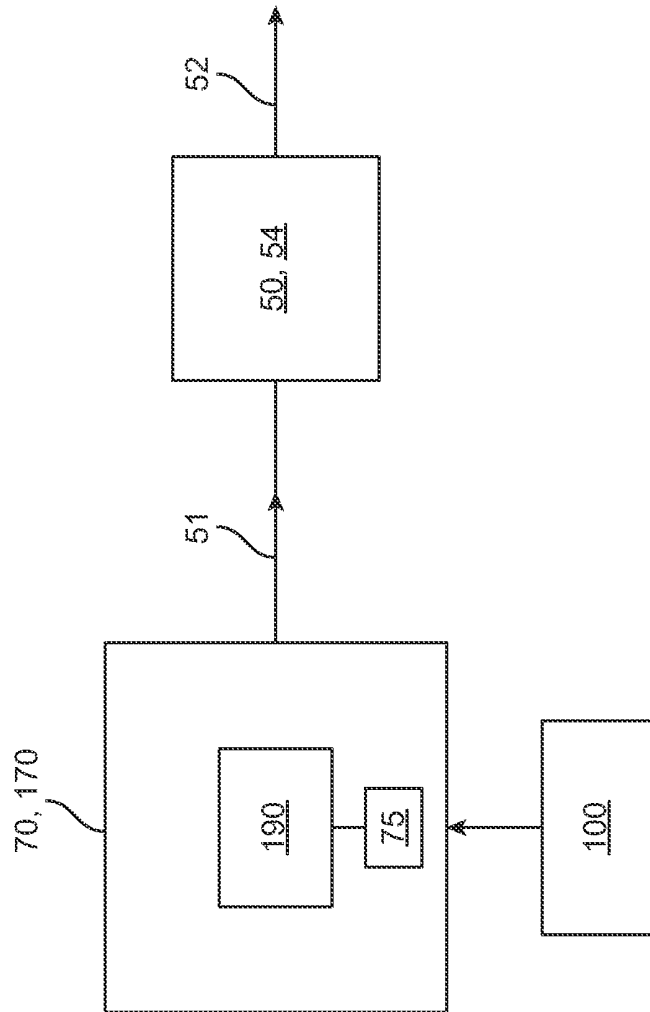


FIG. 6c

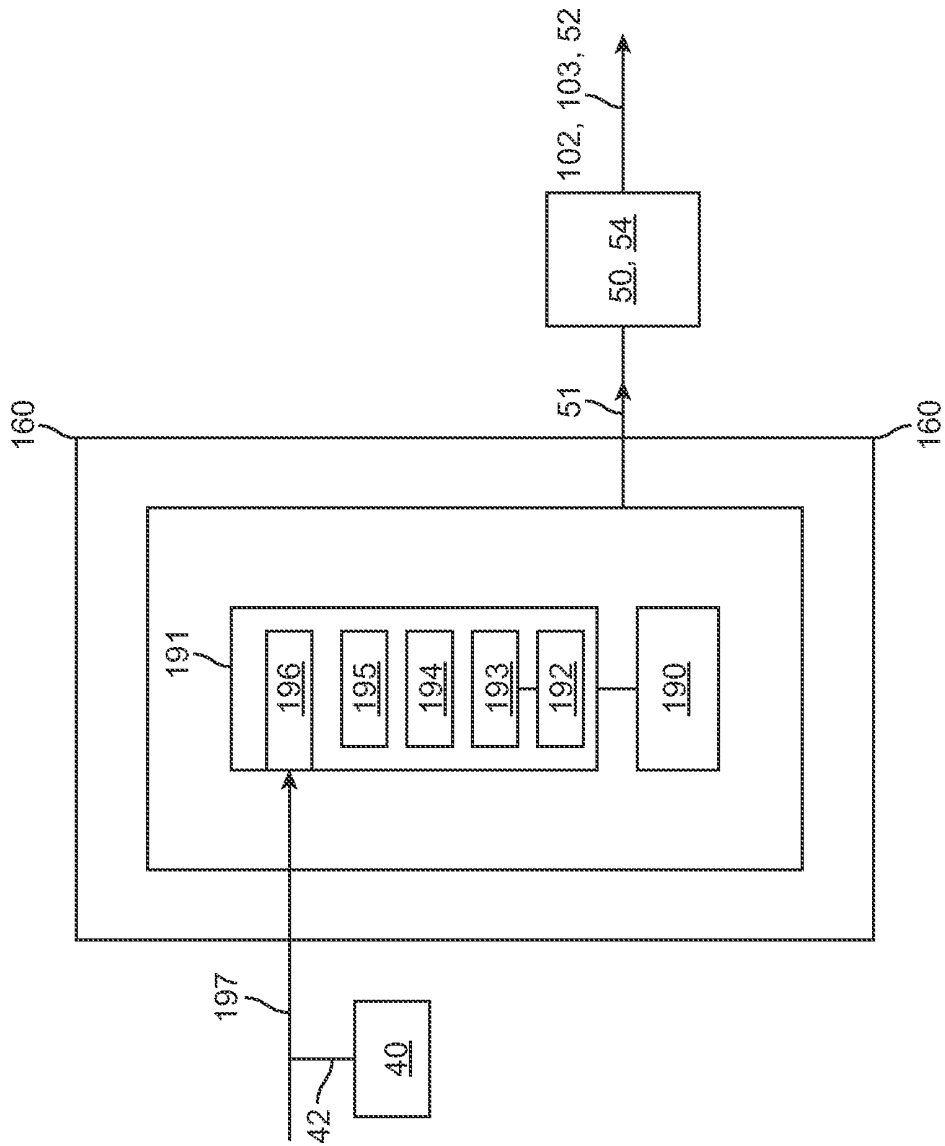

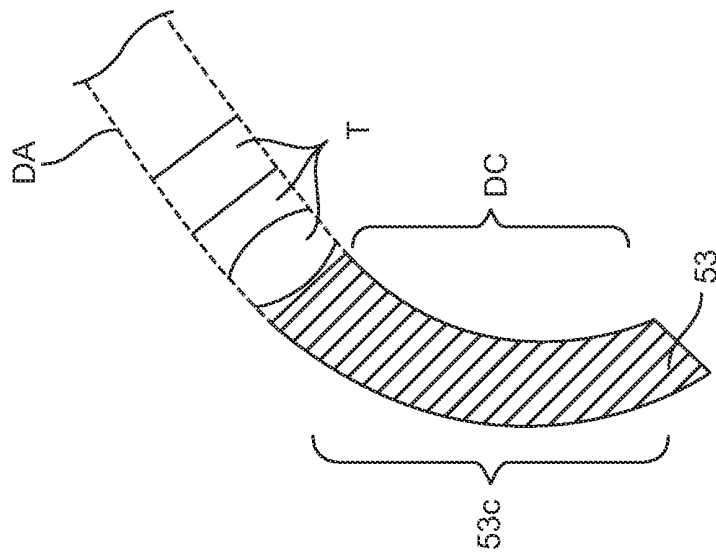


FIG. 6d



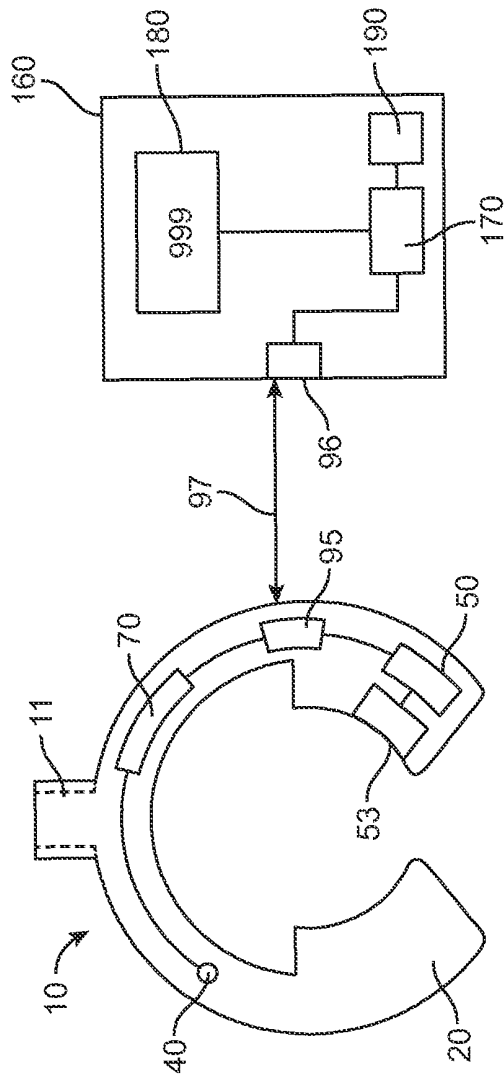


FIG. 8

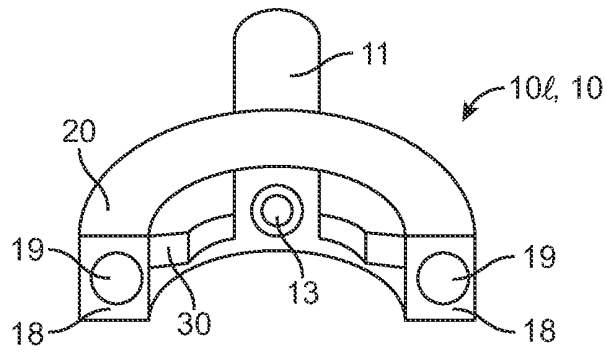


FIG. 9a

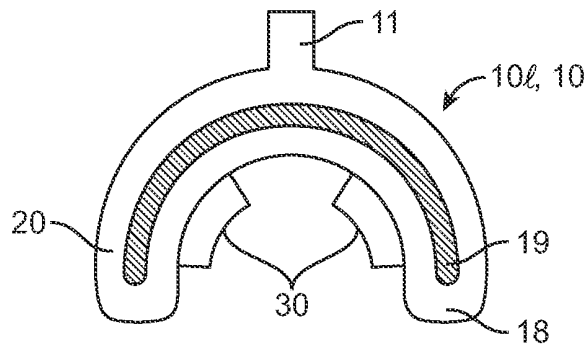


FIG. 9b



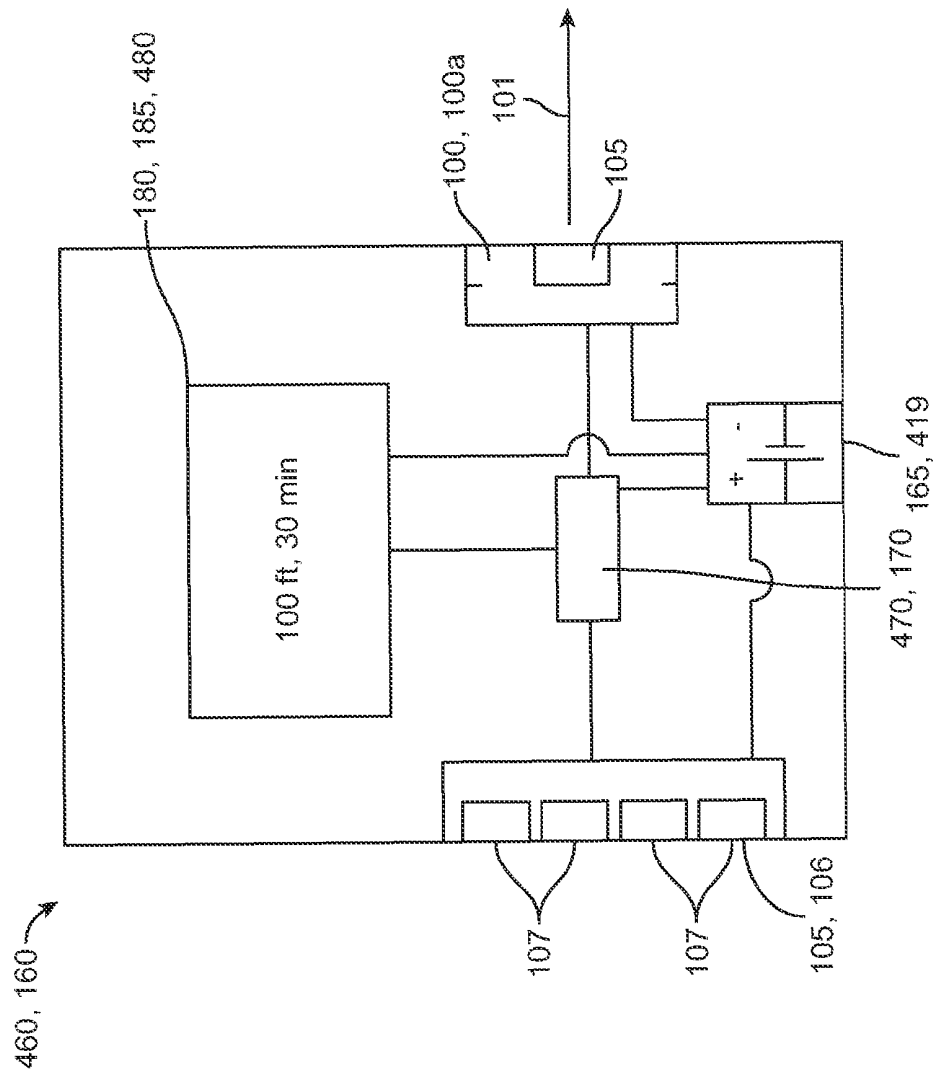


FIG. 11

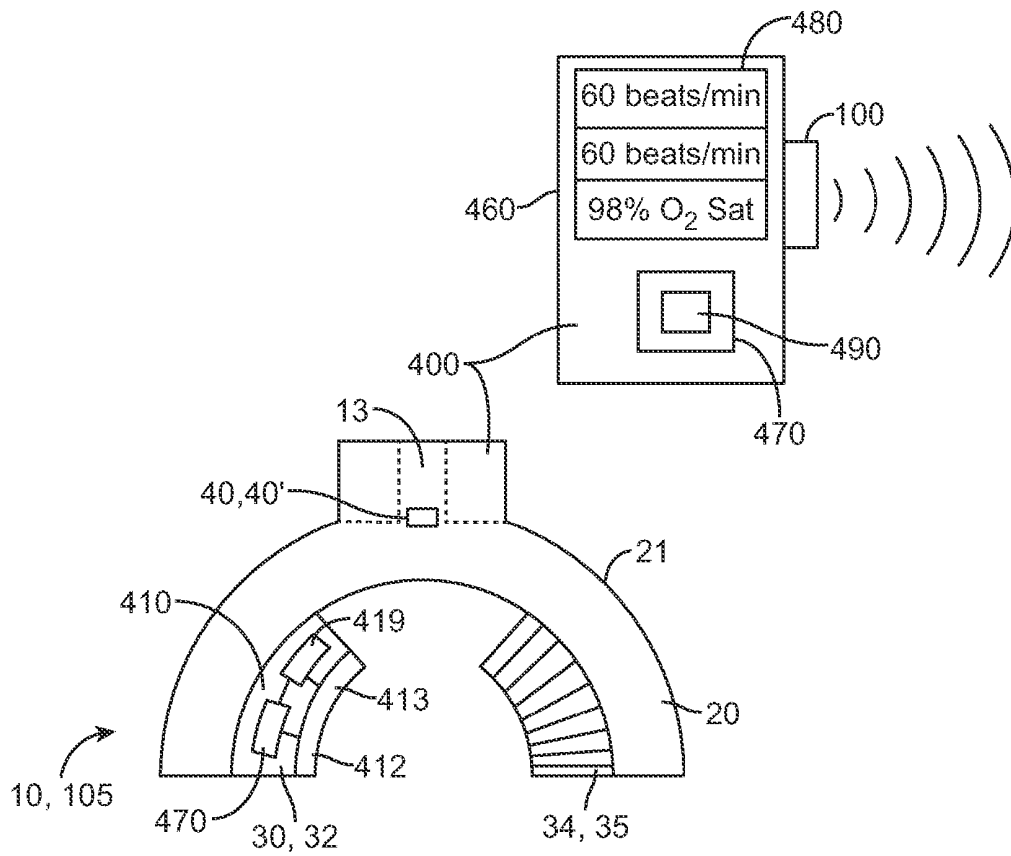


FIG. 12

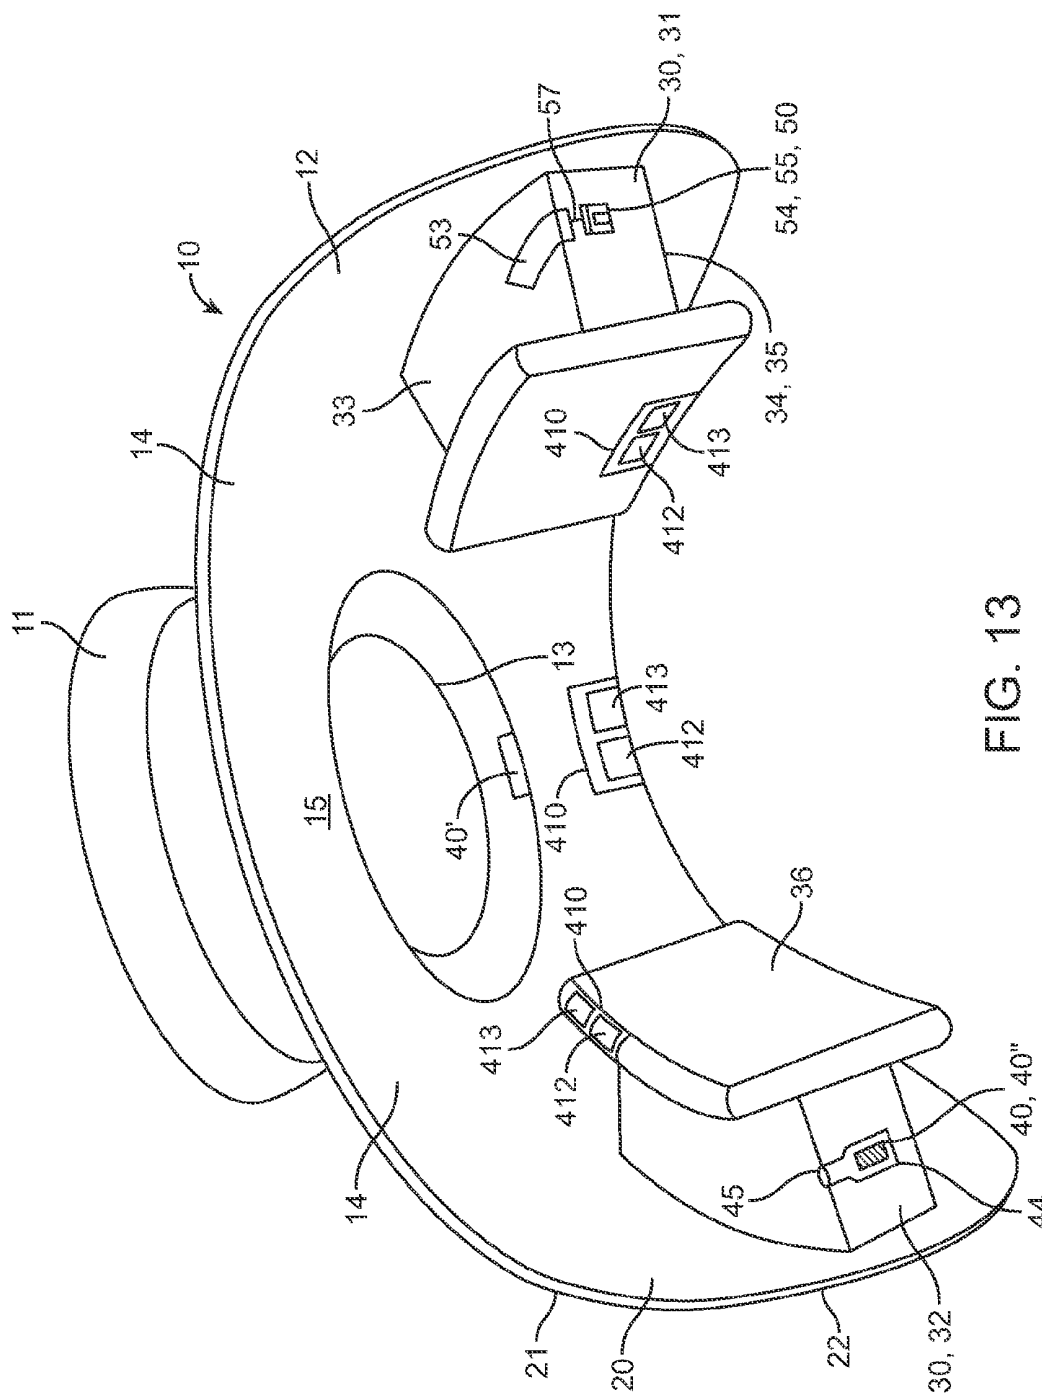


FIG. 13

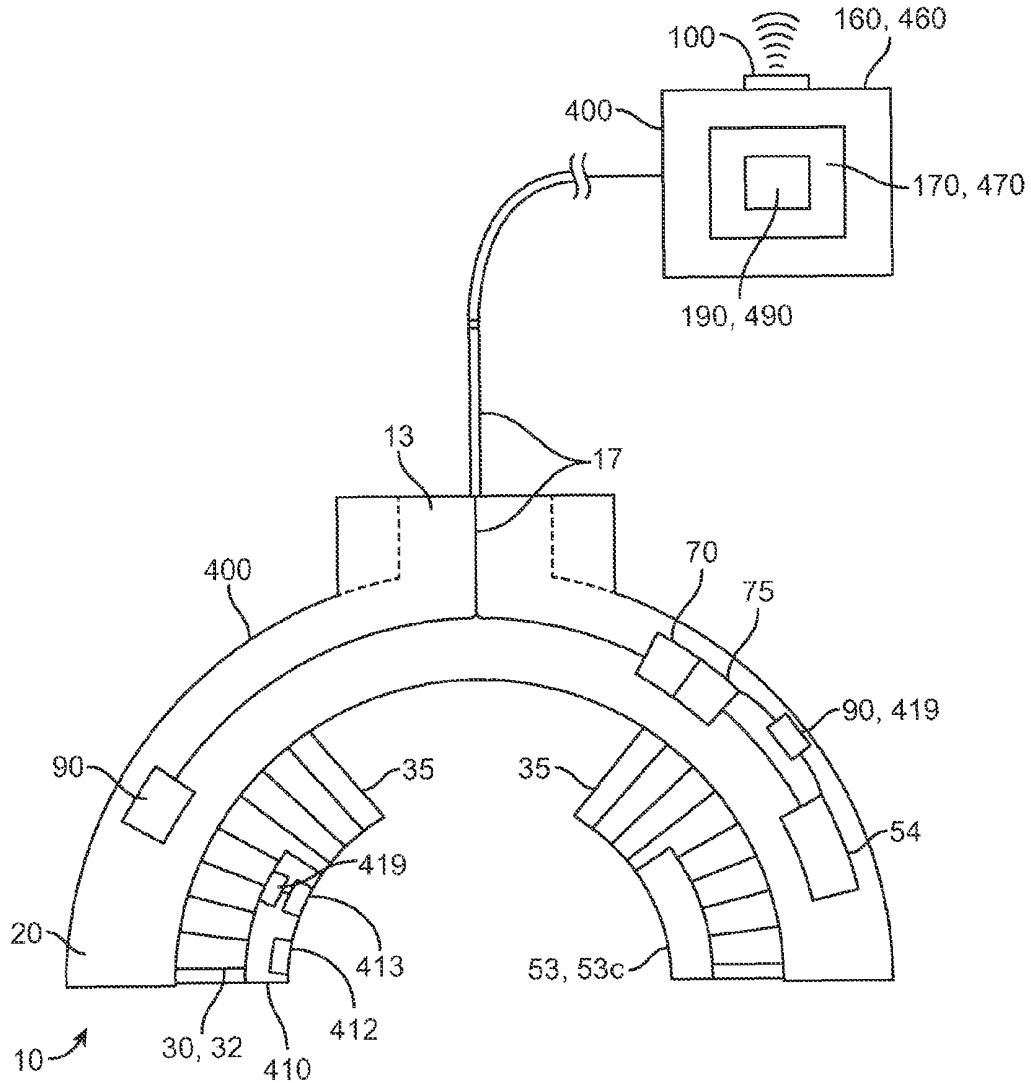


FIG. 14

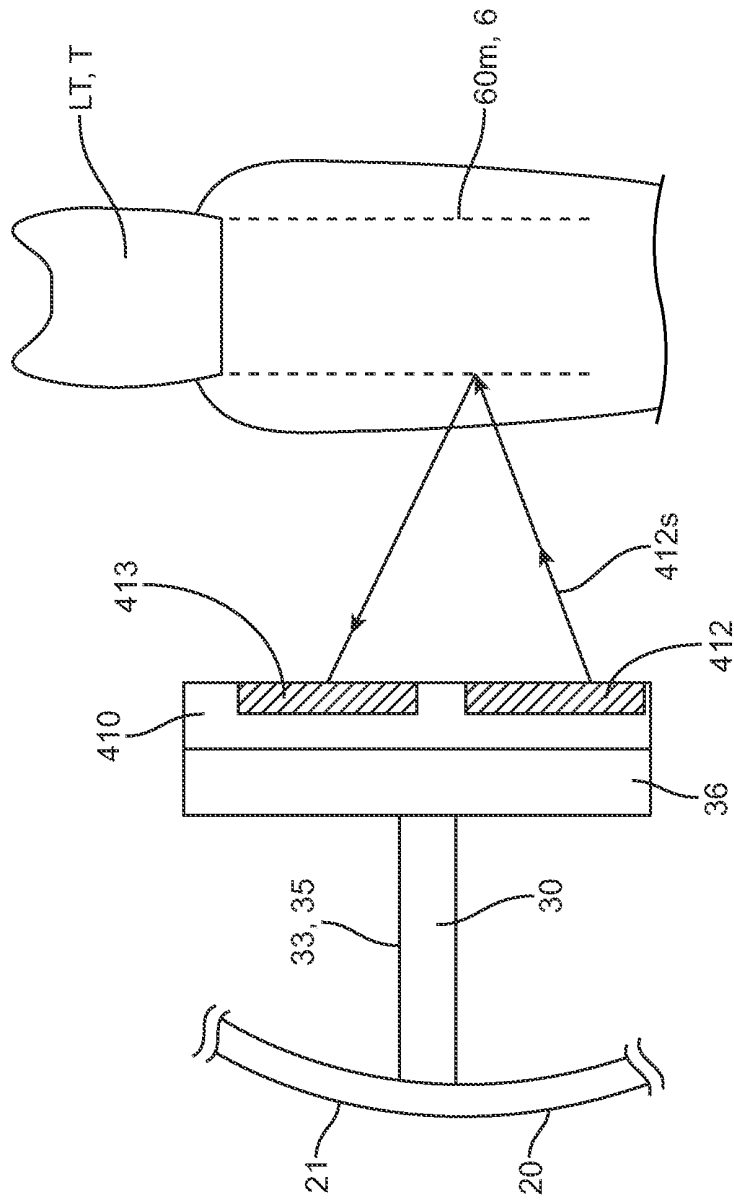


FIG. 15

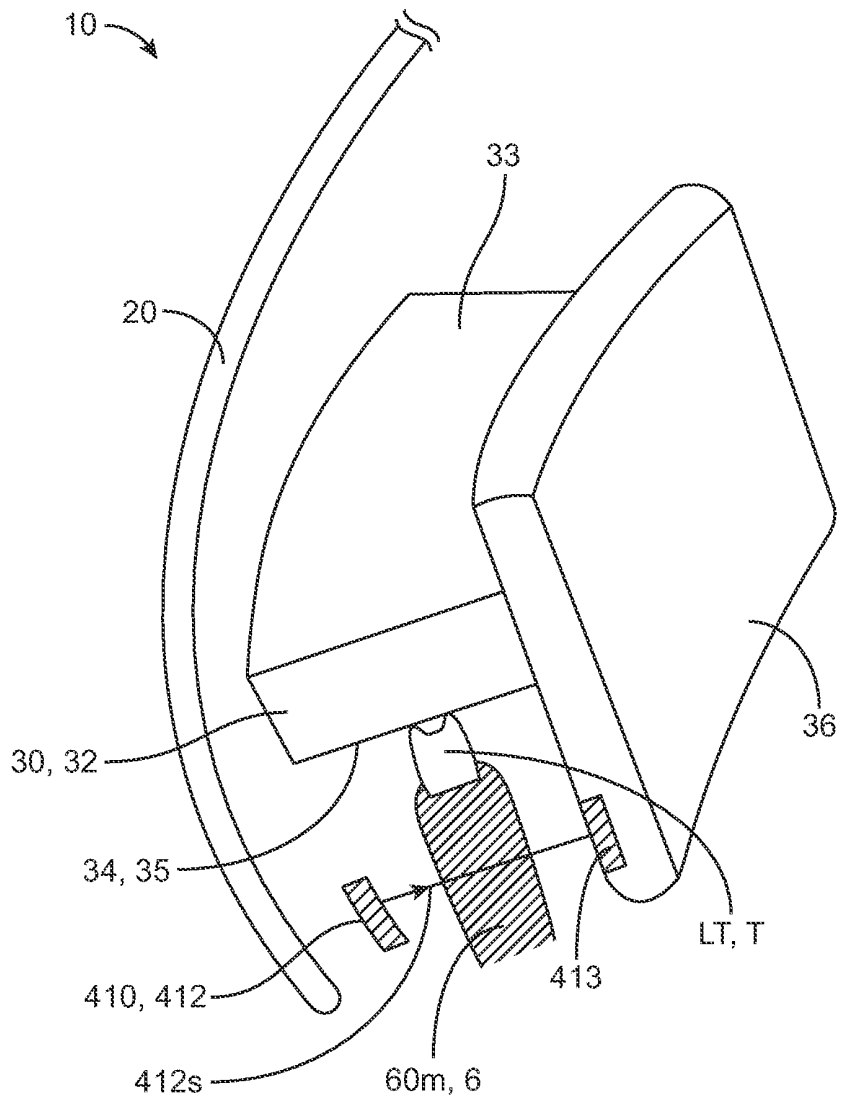


FIG. 16

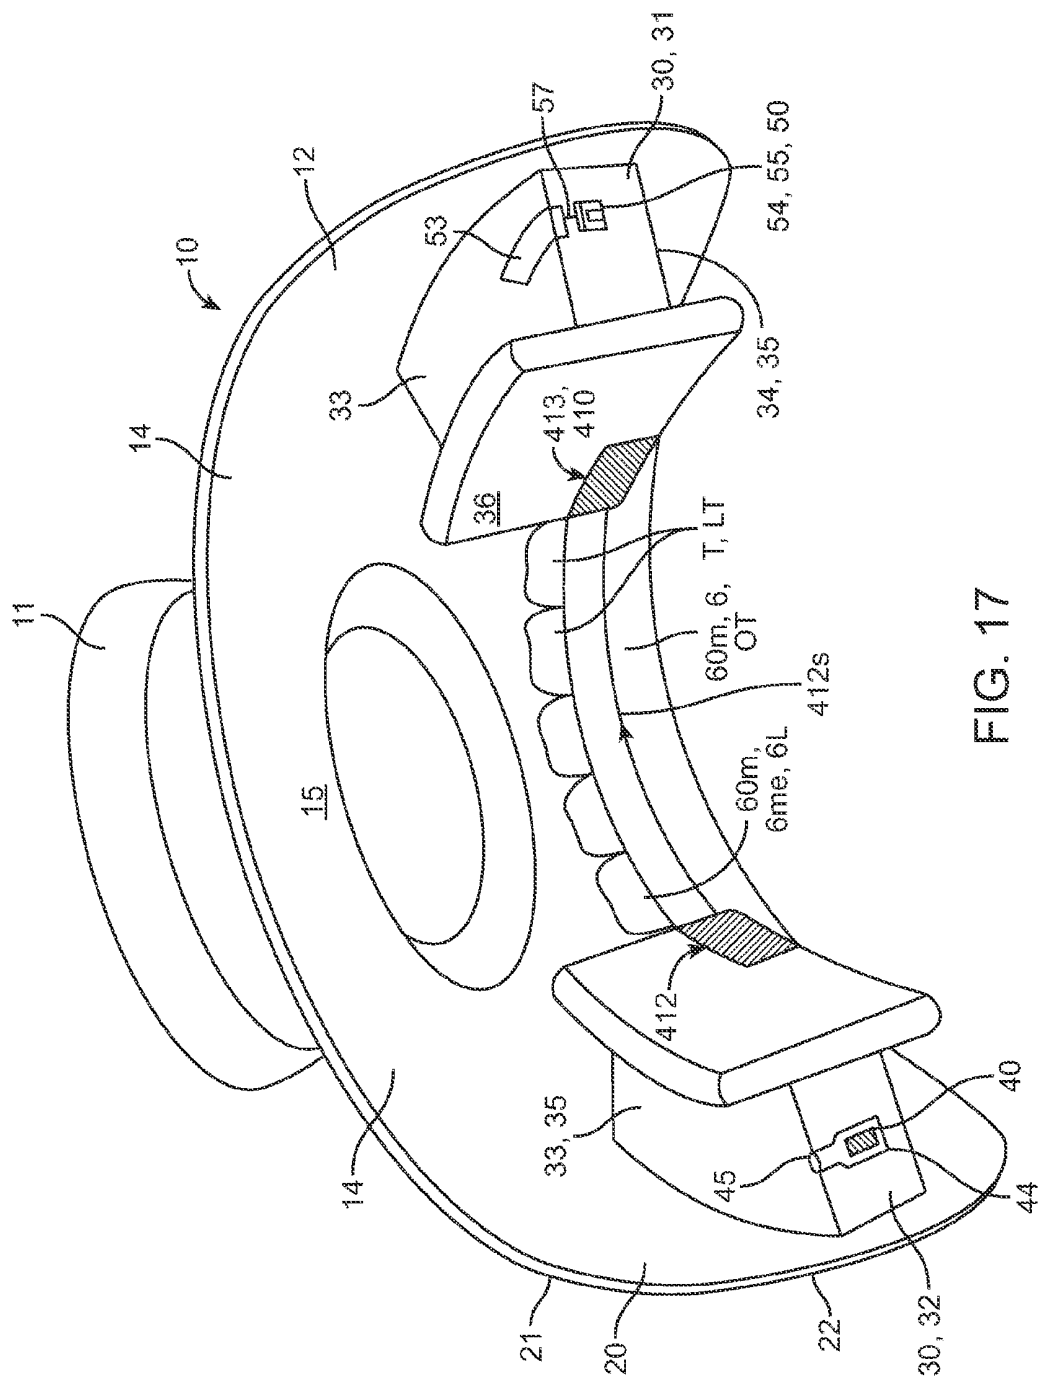


FIG. 17

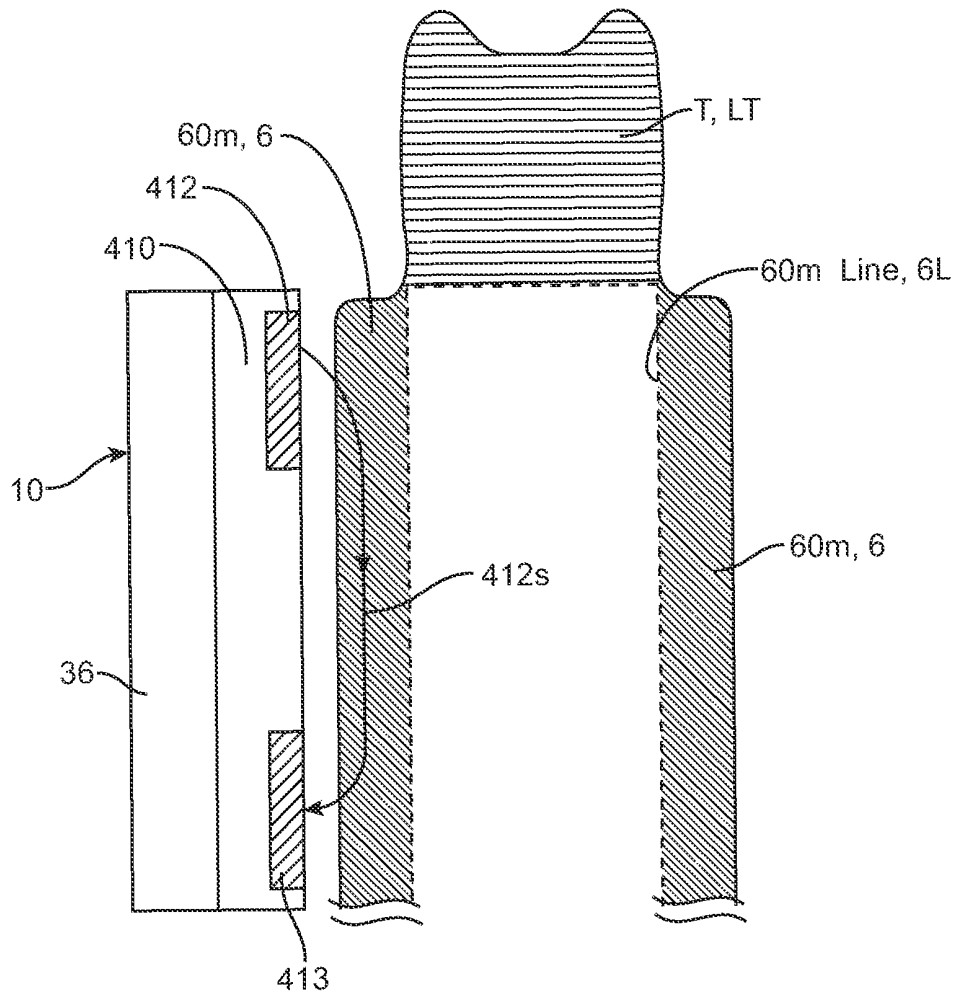


FIG. 18

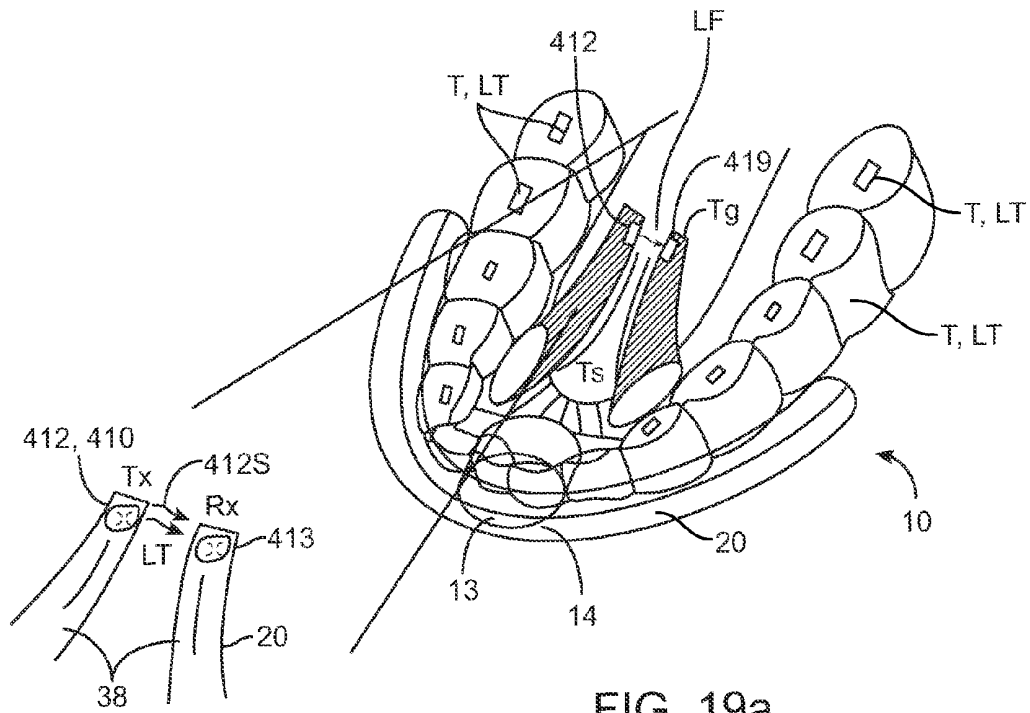


FIG. 19a

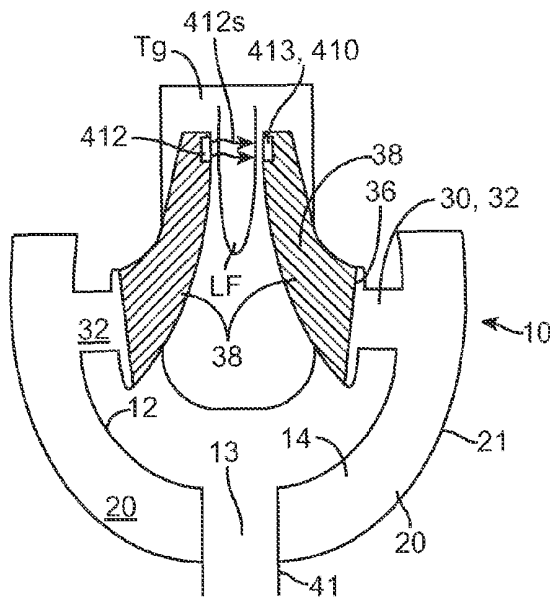


FIG. 19b

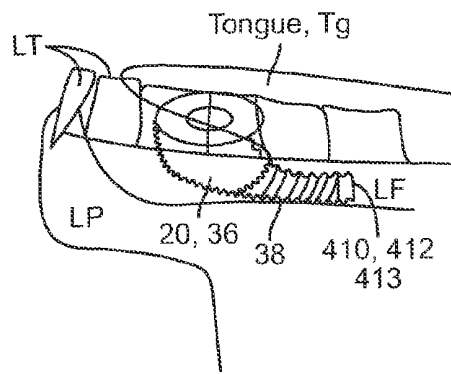


FIG. 19c

## MOUTHPIECE FOR MEASUREMENT OF BIOMETRIC DATA OF A DIVER AND UNDERWATER COMMUNICATION

### RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Patent Application No. 61/479,265 filed Apr. 26, 2011, entitled "MOUTHPIECE FOR MEASUREMENT OF BIOMETRIC DATA OF A DIVER AND UNDERWATER COMMUNICATION", which is fully incorporated by reference for all purposes. This application also claims priority to U.S. patent application Ser. No. 13/237,912, filed Sep. 20, 2011, entitled, "DEVICE, SYSTEM AND METHOD FOR MONITORING AND COMMUNICATING BIOMETRIC DATA OF A DIVER", which is fully incorporated by reference for all purposes

[0002] This application is related to U.S. patent application Ser. No. 13/231,881, filed Sep. 13, 2011, entitled, "SELF-PROPELLED BUOY FOR MONITORING UNDERWATER OBJECTS"; U.S. patent application Ser. No. 13/352,249 filed Jan. 17, 2012, entitled, "APPARATUS, SYSTEM AND METHOD FOR UNDERWATER VOICE COMMUNICATION BY A DIVER"; and U.S. patent application Ser. No. 13/398,718, filed Feb. 16, 2012, entitled "APPARATUS, SYSTEM AND METHOD FOR UNDERWATER SIGNALING OF AUDIO MESSAGES TO A DIVER"; all of the aforementioned applications are hereby incorporated in their entirety by reference herein for all purposes.

### FIELD OF THE INVENTION

[0003] Embodiments described herein relate to a system for underwater voice communication. More specifically, embodiments described herein relate to an apparatus, system and method for underwater communication by a diver, such as a SCUBA (Self Contained Underwater Breathing Apparatus) or skin diver.

### BACKGROUND

[0004] Since the early days of SCUBA diving with Jacques Cousteau, communication between SCUBA divers has been an issue. This is due to the fact that i) the use of the SCUBA breathing apparatus (including a mouth piece worn by the diver precludes voice direct voice communication, and ii) because of risks of the underwater environment, divers have a critical need to communicate a variety of safety related messages to their fellow divers, e.g., communicating the amount of air they have remaining (a maxim of diving is to never dive alone, but instead always go with at least one other diver known as a "dive buddy"). As a result, a series of hand signs have been developed but these only cover a very limited number of messages and cannot quickly get the other divers attention in critical situations. Various underwater graphical display devices have also been developed, but these have the same limitation. These devices which are worn on the diver's wrist or arm require the diver to divert his or her attention from what they are doing to look at the display. Typically, divers dive with their head up to see where they are going and their arms at their sides to reduce water resistance. So, the diver's natural diving position is not conducive to monitoring a visual alert on their wrist or elsewhere (e.g., arm or waist). This is even true for visual alerts on the divers face mask since the diver attention is more focused on what is in front of them and not their face mask.

[0005] Acoustic alarm systems have been developed but they are not voice based and can only communicate a limited number of messages which require the diver to understand an alarm code. Also, none of these devices provide for communication between divers and a surface craft such as the dive boat (the boat which supports the divers). Further none of these devices provides for communication between divers who are not in very close proximity. What is needed is an approach allowing for voice communication between divers while they are underwater as for voice communication between divers and a surface craft.

### BRIEF DESCRIPTION OF THE INVENTION

[0006] Embodiments of the invention provide a wearable mouthpiece and system for measurement and communication of biometric data of a diver and/or for underwater voice communication by the diver to other divers and/or surface ships. Embodiments also provide underwater voice communication between a diver and an underwater electronic device which generates voice messages for the diver. In many embodiments, the system includes a dive computer or like device having the ability to generate audio messages, a mouthpiece having an acoustic transducer that conducts sound via conduction through the diver's teeth and skull to the cochlea, so as to allow the diver to hear the audio messages and other sounds, and a microphone for sensing the diver's voice. The mouthpiece is adapted to be easily attached to portions of a SCUBA or other underwater breathing apparatus. It may also be attached to or integrated with a snorkel or similar apparatus. One or both of the mouthpiece and the dive computer may include circuitry for amplifying higher frequency components of the audio messages or other sounds to account for reduced level of conduction of such frequencies by bone.

[0007] Embodiments of the invention allow the diver to speak and have two way voice communication with other divers and surface ships without having to remove their mouthpiece and without having any other specialized equipment. Embodiments of the invention also allow the diver to hear audio messages such as acoustic alarms, voice messages and prompts from a portable dive computer or other underwater electronic device. In use, such embodiments allow the diver to perform various tasks while receiving a variety of information including voice prompts and commands without having to look at a display or gauge. This enables the divers to stay focused on their task and/or their underwater environment, thereby improving the divers' safety and diving experience. Still other embodiments of the invention allow divers to hear music, radio or other audio input while they are underwater. Other embodiments provide a diver with an acoustic input of sounds from the body of water in which he or she is diving to allow the diver to hear the sounds of underwater marine life as well as the sounds of surface crafts.

[0008] In one embodiment, the invention provides a mouthpiece apparatus for measuring biometric data of a diver such as oxygen or other blood gas saturation level. The apparatus comprises a flexible mouthpiece having an exterior coupling element for coupling to an air hose or other conduit of a SCUBA (or other underwater breathing apparatus) and an interior portion coupled to the coupling element and worn in the diver's mouth. The coupling element may be coupled directly to the air hose or to a fitting on the air hose. The coupling element and interior portion can include a lumen for the passage of respired air by the diver. The interior portion

has a curved shaped corresponding to a shape of the diver's mouth and has attached right and left bite structures. The bite structures include upper and lower surfaces for engaging a bite surface of the diver's upper and lower teeth. One or both of the bite structures may include a retaining flange (e.g., which can be perpendicular) to a bite surface of the bite structure for retaining the mouthpiece in the diver's mouth. The bite structure may also include a tongue flap or flange which lies partially underneath the back portion of the tongue. The tongue flap can include at least one pair of emitters and detectors configured to emit and detect light at a wave length having an correlated with a level of blood gas saturation as is described above.

**[0009]** The mouthpiece may also include a sensor device comprising a light emitter and a light detector configured to emit and detect light at a wave length having an absorbance correlated to a level of a blood gas saturation. In many embodiments, the emitted light is selected to measure blood oxygen saturation using a ratio of the intensity of the emitted light to the detected light. The emitter is positioned to emit light onto oral tissue of the diver and the detector is positioned to detect light which is received from the oral tissue either by transmittance of light through the oral tissue or by reflection of light from the tissue. The target oral tissue used for the blood gas measurements can include one or both of the divers gum tissue or the buccal (e.g., cheek tissue). Accordingly, the emitter and detector may be positioned in a number of locations in or on the mouthpiece to make such measurements including the interior surface of the mouthpiece as well as the left or right bite structure, the retaining flange, and in a preferred embodiment on the tongue flap. They may also be positioned on the surface of the mouthpiece or embedded within the mouthpiece. In other embodiments, the emitter and detector may be recessed within the mouthpiece while still having direct exposure to the diver's oral tissue (cheek or gum) or partially covered by an optically transparent layer used as moisture guard. According to many embodiments, the mouthpiece is sufficiently flexible to conform to the contour of the diver's oral tissue (e.g., the cheek and/or gum) and also sufficiently resilient to maintain contact with the oral tissue when that tissue moves due to movement of the divers mouth, jaw, teeth, etc. Owing to the flexibility and resilience of the mouthpiece and the positioning of the emitter and detector, the mouthpiece is able to maintain substantial physical and/or optical contact between the diver's oral tissue and the emitter and detector during movement of one or more of the divers mouth, jaw, teeth, cheek, etc. In use, these and related embodiments allow the mouthpiece to maintain such physical and/or optical contact so as to be able to continue to make blood gas measurements when the diver inhales, exhales, cough, speaks or makes any vocal sound and to do so without impeding the diver's breathing. In use, such embodiments also allow for the measurement of blood oxygen or other blood gas level without the diver having to wear or otherwise be encumbered by any other sensor device.

**[0010]** In some embodiments, an acoustic transducer is positioned on the top surface of at least one of the left or right bite structures of the mouthpiece. The acoustic transducer is configured to transduce an electrical signal input (e.g., from another communication device) into an acoustic output and to acoustically couple to the diver's upper teeth. The acoustic transducer may conduct the acoustic output from the diver's upper teeth through the skull to generate audible sound in at least one of the diver's ears when the diver is wearing the

mouthpiece. The sounds may be used to communicate to the diver various biometric measurements made, for example, by the mouthpiece (e.g., blood oxygen saturation, pulse, etc.) as well as when those measurements cross a threshold (e.g., when blood oxygen levels fall below e.g., 95%). Typically, the acoustic transducer is positioned to engage the upper (e.g., maxillary) back teeth of the diver's mouth, but may positioned to engage any tooth or group of teeth in the diver's mouth. Also, the transducer properties can be tuned or otherwise adjusted according to a diver's preference or for efficiency and/or effectiveness. A microphone may also be positioned in or on the mouthpiece for detecting the diver's voice and for generating an electrical output signal when the diver is wearing the mouthpiece. The microphone may be recessed or otherwise positioned to reduce breathing sounds. This microphone output can be sent to an underwater communication device for underwater transmission to another diver(s) or to a surface ship. In other embodiments, the communication device may correspond to an ultrasonic or other acoustical transmission device which transduces the electrical output signal into an acoustic signal so that it may be transmitted by the acoustical transmission device. Also, in various embodiments, one or both of the communication device or microphone may include a filter (e.g., high pass, low pass, etc.) for filtering out breath and related sounds of the diver from his or her spoken words.

**[0011]** In an exemplary embodiment of using the invention, the diver attaches an embodiment of the mouthpiece to a fitting on a regulator or other component of his or her SCUBA gear. For embodiments having electrical couplings on the mouthpiece, the diver may then connect them to the underwater communication device. He or she may perform a few quick tests to assure that the communication system is working. Such tests can include putting in the mouthpiece and saying some test phrases (e.g., "testing 1, 2, 3," etc.) while looking at a display on or coupled to the communication device to assure that a signal from the microphone is being received by the communication device. The test for the acoustic transducer can comprise putting in the mouthpiece and pressing a test signal button on the communication device which then sends a test signal to the acoustical transducer, which converts the electrical signal to an audio signal conducted through his teeth and skull, and which the diver then listens for. For either test, the diver can move the mouthpiece around in his or her mouth to find a position of the mouthpiece in his or her mouth which yields the best audio input and/or electrical output signal from the microphone. The diver may perform a similar procedure for embodiments of the mouthpiece used in a snorkel. Having found that position, the diver may select a particular acoustic frequency or range of frequencies (e.g., akin to a channel) to use for input (hearing) and output (verbal speech). The diver may choose to use the system underwater for voice communication with other divers as well as surface ship. Depending upon the frequencies available, the diver may then select/assign a distinct acoustic frequency or frequency range for a particular diver as well as for a surface craft. In many embodiments, the system will allow for separate frequency and/or frequency range to minimize cross talk from diver to diver as well as diver to surface ship communication. These and other aspects, embodiments and features are described in detail in the body of specification.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 is a schematic view of an embodiment of an underwater voice communication system for a diver.

[0013] FIG. 1a shows an embodiment of a voice communication mouthpiece apparatus worn in the mouth and its use in the conduction of sound to the inner ear through the skull.

[0014] FIG. 2 is a lateral view illustrating embodiments of the mouthpiece coupled to an underwater breathing apparatus such as a SCUBA.

[0015] FIG. 3 is a perspective view showing various features of an embodiment of the mouthpiece.

[0016] FIG. 4 is a lateral view showing an embodiment of the mouthpiece having an electrical connection means such as a wire for coupling to PWE devices such as a dive computer.

[0017] FIG. 5a is a side cut-away view showing an embodiment of the mouthpiece having a cavity and a microphone positioned in the cavity.

[0018] FIG. 5b is a block diagram illustrating the configuration and operation of an embodiment of the microphone.

[0019] FIG. 6a is a side cut-away view showing an embodiment of the acoustic transducer comprising an electromagnetic driver, acoustical plate and connecting lever.

[0020] FIG. 6b is a top down view showing an embodiment of the acoustic transducer positioned in/on the mouth piece.

[0021] FIG. 6c is a block diagram showing the configuration and operation of an embodiment of the acoustical transducer.

[0022] FIG. 6d is a block diagram showing the configuration and operation of an embodiment of a communication system for generating voice prompts and other messages that are delivered to the diver by embodiments of the acoustical transducer.

[0023] FIG. 7a is a top down view illustrating an embodiment of the acoustic plate having a curved shape corresponding to curvature of the diver's dental arches.

[0024] FIG. 7b is a side view illustrating an embodiment of the acoustical plate having conducting ridges.

[0025] FIG. 8 illustrates an embodiment of the mouthpiece having a wireless communication device such as an RF communication chip for communicating with a diver computer or other PWE device.

[0026] FIG. 9a is a cut away perspective view illustrating an embodiment of a multilayer mouthpiece having a rigid core and softer outer layer.

[0027] FIG. 9b is a cut away top down view illustrating an embodiment of a multilayer mouthpiece having a rigid core and softer outer layer.

[0028] FIG. 10 is a schematic view illustrating the configuration and operation of an embodiment of the communication device for use with embodiments of the voice communication mouthpiece apparatus.

[0029] FIG. 11 is a schematic view illustrating the configuration and operation of an embodiment of a PWE device (such as a dive computer) including a communication device for use with embodiments of the voice communication mouthpiece apparatus.

[0030] FIG. 12 is a lateral view of an embodiment of a system for measuring and communicating biometric data of a diver.

[0031] FIG. 13 is a perspective view of an embodiment of the mouthpiece including a sensor device having one or more emitters and detectors for optically measuring a blood gas saturation of a diver such as blood oxygen saturation.

[0032] FIG. 14 is a top down view of an embodiment of the mouthpiece including a sensor having one or more emitters and detectors for optically measuring blood oxygen or other blood gas of a diver.

[0033] FIG. 15 is a lateral view of an embodiment of the sensor device for measuring blood oxygen using reflectance oximetry.

[0034] FIG. 16 is a lateral view of an embodiment of the sensor device for measuring blood oxygen using absorbance oximetry.

[0035] FIG. 17 is a lateral view of an embodiment of a mouthpiece including a sensor device for measuring blood oxygen using absorbance oximetry where the emitter and detector are positioned on opposite sides of the mouthpiece and below the gum line for transmittance of light through the gum tissue.

[0036] FIG. 18 is a lateral view of an embodiment of a mouthpiece including a sensor device for measuring blood oxygen using absorbance oximetry where the emitter and detector are positioned on the same side of the mouthpiece and below the gum line for transmittance of light through the gum tissue.

[0037] FIG. 19a is a perspective view of an embodiment of a mouthpiece including a sensor device for measuring blood oxygen using absorbance oximetry where the mouthpiece includes a flap for positioning of the emitter and detector beneath the tongue.

[0038] FIG. 19b is a bottom view of the embodiment of FIG. 19a showing the positioning of flaps underneath the tongue and on either side of the Lingual Frenulum.

[0039] FIG. 19c is a lateral view of the embodiment of FIG. 19a showing the positioning of the flap on either side of the tongue and Lingual Frenulum.

## DETAILED DESCRIPTION OF THE INVENTION

[0040] Referring now to FIGS. 1-19, an embodiment of a communication system 5 for voice communication from a first diver 200 to one or more other divers 210 or surface ships 220 comprises a mouthpiece apparatus 10 (herein mouthpiece 10) and an underwater communication device 100. In various embodiments, communication system 5 also provides for communication of computer generated voice messages to the diver from a portable underwater device. Mouthpiece 10 is worn in the diver's mouth and is configured to attach to a regulator 82 or other fitting 83 of a SCUBA or other underwater diving apparatus 80. System 5, including mouthpiece 10, is configured to allow voice or other communication between a first underwater communication device 100 carried by diver 200 and a second underwater communication device 110 carried by other diver(s) 210 as well as between communication device 100 and a communication device 130 used by a ship 220. In one embodiment, communication device 130 can be incorporated into a buoy or array towed by ship 220. With regard to communication device 100 (and 110), it can be positioned on a variety of locations on the diver and/or on Scuba 80. In one embodiment, it may be positioned on the diver's head and can be attached using a band or strap or it may be coupled to the hood of the diver's wetsuit. In many embodiments, communication device 100 may be incorporated into a portable watertight electronic device 160 carried or worn by the diver as is described herein.

[0041] In addition to communication with another diver 210 having a separate SCUBA 80, in various embodiments, system 5 and mouthpiece 10 can also be adapted for commu-

nication with another mouthpiece 10' connected to a buddy breathing line 16 connected to same SCUBA 80 as used by diver 200 as is shown in the embodiment of FIG. 1. In such embodiments, mouthpieces 10 and 10' can be configured to both be operatively connected to the same communication device 100 or they may be configured to be directly connected to each other without the use of communication device 100. In use, such embodiments allow quick and ready communication between the diver 200 and the buddy breather without the need for any communication device or any set up procedure.

[0042] The mouthpiece 10 includes a coupling element 11, an interior portion 20 coupled to the coupling element 11, a microphone 40 and an acoustic transducer 50. Coupling element 11, couples the mouthpiece 10 to SCUBA 80. In various embodiments, coupling element 11 may be configured to couple directly to an air hose 81 of SCUBA 80 or a regulator 82 or other fitting 83 of SCUBA 80. The coupling element 11 and interior portion 20 include a lumen 13 for the passage of respired air by the diver.

[0043] One or both of the microphone 40 and the acoustic transducer 50 may be powered by a battery 90 which is incorporated into the mouthpiece 10 or coupled to the mouthpiece 10, for example, by an electrical wire 17 or other electrical connection means 17. Battery 90 may comprise various lithium buttons or other miniature batteries known in the art. Battery 90 may also be shaped to have a form factor which readily fits into mouthpiece 10. For example, in one embodiment, battery 90 may have curved shape which corresponds to the curvature of the diver's dental arches DA. Battery 90 may also be used to power a processor 70 that may also be contained in the mouthpiece 10 and described in more detail herein.

[0044] Wire(s) 17 may also be configured to couple both the microphone 40 and the transducer 50 (as well as electrical components of mouthpiece 10) to various electrical devices that are part of SCUBA 80 or are otherwise worn or carried by the diver, such as communication device 100 and/or dive computer 160. Wire(s) 17 may be insulated sufficiently to withstand depths of several hundred feet or more. A portion of the wires 17 may be embedded in the mouthpiece 10 and/or connected to the mouthpiece 10 by an electrical connector configured for underwater conditions. Wire 17 can include at least a first and second wire for connection to the microphone 40 and the acoustic transducer 50. In some embodiments, a section of wire 17 may pass through lumen 13 of coupling element 11 so as to connect to one or more electrical devices that are part of SCUBA 80 or are otherwise worn or carried by the diver. In such embodiments, wire 17 is sufficiently thin or otherwise configured so as to not interfere or impede the passage of respired air through lumen 13.

[0045] In alternative or additional embodiments, one or both of the microphone 40 and the transducer 50 may be operatively coupled to communication device 100 and/or dive computer 160 via use of a wireless communication device 95, such as an RF communication chip 95 which may be embedded in the mouthpiece 10. RF communication chip 95 may correspond to an active or passive RF transceiver and may be embedded in the mouthpiece 10. The frequency and power levels for use with such an RF communication chip 95 can be adapted for underwater use to allow communication of signals 97 between an RF communication chip 95 in the mouthpiece 10 and a corresponding chip 96 in communication device 100 and/or dive computer 160 carried by the diver. In use, such embodiments allow the diver to readily couple the

mouthpiece 10 to communication device 100 and/or computer 160 without having to make any electrical connections. It also allows the diver to verify that the mouthpiece 10 is operating properly before getting into the water through the use of one or more diagnostic software modules 190 resident within dive computer 160 which can be configured to interrogate mouthpiece 10 for proper operation. In one embodiment, this may consist of the diver being prompted to speak several test phrases with the mouthpiece in place. Further in various embodiments, communication chip 95 and/or memory chip or other memory resources 75 coupled to chip 95 may contain various diver specific information (e.g., name, weight, health data, dive history, etc.) which can be signaled to dive computer 160 allowing the dive computer to uniquely identify the mouthpiece 10 as belonging to a particular diver and then upload that data into the dive computer. The process may also be facilitated by use of a processor 70, such as microprocessor 70, which controls the handshake and other communication between communication chip 95 and chip 96. Processor 70 may also contain or be coupled to memory resources 75. In particular embodiments, such a configuration can be implemented through use of an ASIC (application specific integrated circuit) containing processor 70, memory resources 75 and even battery 90.

[0046] The interior portion 20 of the mouthpiece 10 has a curved shape 21 corresponding to a shape of the diver's dental arches DA and has attached right 31 and left 32, bite structures 30. The curved shape 21 may be fabricated by taking a dental impression or image of the diver's mouth and then using that impression or image to construct a mold for making the mouthpiece and/or using stereolithography techniques known in the art. The bite structures 30 include upper 33 and lower 34 surfaces 35 (also called bite surfaces 35) for engaging a bite surface BS of the diver's teeth T, such as upper teeth, UT (also called maxillary) and lower teeth, LT. Bite structures 30 may be positioned and arranged to contact at least the back teeth of the diver, but may contact the front teeth as well (or other teeth or groups of teeth). The bite structures 30 may also be configured to be acoustically isolated from each other by fabricating all or a portion of the bite structures from various acoustically insulating materials known in the art.

[0047] In various embodiments, one or both of the bite structures 30 may include a retaining flange 36 for retaining the mouthpiece in the diver's mouth M by contacting an inside surface of the diver's teeth. Typically, flange 36 will be oriented perpendicular to bite surfaces 35, but other orientations are also contemplated (e.g., an acute angle). Also, flange 36 may have a curved shape or profile 37 which corresponds to the curvature of the diver's dental arches DA.

[0048] In various embodiments, mouthpiece 10 may be fabricated from elastomeric polymers such as silicone, polyurethane, copolymers thereof and other elastomers known in the art. The mouthpiece 10 may have a unitary construction and or may be fabricated from separate components which are joined. It may be fabricated using various methods known in the polymer processing arts, including molding and stereolithography methods. Also, molding may be done with the microphone 40 and/or acoustical transducer 50 in place, or they may be added to cavities created in the mouthpiece 10 for positioning of microphone 40 and/or transducer 50. The polymeric materials for the mouthpiece 10 may be selected for several different mechanical and acoustical properties. For example the material can be selected to achieve a desired durometer for the mouthpiece 10. The durometer of the mate-

rial may be selected to maintain the shape of the mouthpiece 10, but at the same time, reduce the bite force required for the diver to hold the mouthpiece 10 in place. Suitable lower durometer embodiments, include the range of 20 to 50, more preferably, 30 to 40. In use, such lower durometer embodiments allow the diver to keep the mouthpiece 10 in their mouth for extended periods (e.g., hours) without excessive discomfort or fatigue of their jaw muscles, particularly while speaking. The properties of the polymers used for the mouthpiece 10 can also be selected to obtain a desired amount of acoustical insulation so as to minimize the transmission of sound from transducer 50 to microphone 40 by reducing or preventing feedback between the two components.

[0049] In some embodiments, a mouthpiece 10 having a lower durometer can be achieved by two ply and/or other multilayer configurations of the mouthpiece 10 where at least a portion of the mouthpiece 10 comprises a lower durometer tooth contacting surface layer 18 (also referred to as a liner) that fits over a higher durometer (e.g., more rigid), underlying core structure 19. The latter provides sufficient rigidity for holding the shape of the mouthpiece 10 in the diver's mouth, while the former provides a soft comfortable tooth contacting surface. Liner 18 may also be configured to provide acoustical insulation/dampening properties so as to reduce feedback between microphone 40 and transducer 50 by reducing the transmission of sound from transducer 50 and microphone 40. In use, such two ply or other multilayer embodiments of the mouthpiece 10 provide a more comfortable mouthpiece that minimizes or reduces feedback from the transducer 50 and microphone 40, while maintaining the overall shape of the mouthpiece. In related embodiments, mouthpiece 10 can have a three or even a four ply construction to provide additional amounts of acoustic insulation.

[0050] Microphone 40 is positioned in or on mouthpiece 10 and is configured to detect the sound 41 (herein voice sounds 41) from the diver's voice with the mouthpiece 10 in place and to generate an electrical output 42. Microphone 40 may comprise various miniature microphones known in the art and may comprise various electric microphones known in the art. The microphone 40 may include or be coupled to a preamplifier 47 as well as a filter device 43 for filtering out the diver's breath sounds or other non-speech related sounds (e.g., bubble and cavitation sounds). In various embodiments, filter 43 may correspond to one or more of a high pass, low pass or band pass filter. Filter 43 may also be programmable, so as to allow the user to select various acoustic criteria for filtering out breathing sounds. Such criteria may include a particular frequency range, duration of sound and/or amplitude of sound that is filtered. Filter 43 may also be configured to filter out acoustic signals 52 (discussed below) generated by acoustical transducer 50 so as to minimize feedback from transducer 50 and microphone 40. In an alternative or additional embodiment, filter 43 may also be configured as or include a switching device 43s that shuts off the generation of signals 42 by microphone 40 when the diver is receiving signal acoustic signals 52 from transducer 50. In use, such embodiments provide another approach and means for minimizing or eliminating feedback between microphone 40 and acoustic transducer 50.

[0051] In some embodiments, microphone 40 may be placed in a variety of different locations in or on the mouthpiece 10. In one or more embodiments, microphone 40 is positioned on an opposite side 22 of the mouthpiece as the side containing acoustic transducer 50 so as to minimize

feedback between the microphone and acoustic transducer 50 (side 22 being defined by the divers left and right). In other embodiments, the microphone is placed on an opposite bite structure 30 from that of acoustic transducer 50. In such embodiments, bite structure 30 is configured to dampen or attenuate any vibrations coming from acoustical transducer 50. Also, microphone 40 may be placed on the surface 12 of mouthpiece 10, but is more preferably recessed within the mouthpiece so as to attenuate breath sounds as well as reduce the likelihood of exposure to liquids in the diver's mouth. In other embodiments, microphone 40 is configured and positioned to actually detect breath sounds so that the diver's respiration rate can be determined (by detecting repeating breath sounds 41) as well as other respiratory characteristics such as depth or shallowness of respiration. The latter two qualities may be determined by the duration and amplitude of output signal 42 generated by microphone 40. In some embodiments, the microphone 40 may be positioned near or at the front section of the mouthpiece 10 in order to more effectively detect a diver's breath sounds.

[0052] In one embodiment, mouthpiece 10 can include a first and a second microphone 40' and 40'' where the first microphone 40' is positioned for optimizing the detection of breath sounds (e.g., in the front section 14 of the mouthpiece) and the second microphone 40'' is positioned at another location on the mouthpiece where the amplitude breath sounds will be reduced or a minimum. For example, the second microphone 40'' may be positioned on either side of the mouthpiece or recessed below the surface of the mouthpiece. In some embodiments, the output signal 42' from microphone 40' can be used for a two-fold purpose. First, it can be used for the detection of respiration rates and other respiratory characteristics (e.g., tidal volume, depth of respiration, etc.). Second, it can also be used to attenuate the noise or interference from the diver's breaths sounds on the diver's voice sounds by subtracting all or a selected portion of output signal 42' from output signal 42'' (e.g., noise cancellation). Other signal processing operations on output signal 42'' using output signal 42' are also contemplated (e.g., averaging, use of first order, second order equations, Laplace transformations, etc.). In this way, microphones 40' and 40'' can allow a single mouthpiece 10 to be used for both voice communication and for sensing and communicating biometric data such as respiration characteristics.

[0053] In some embodiments where the mouthpiece 10 has a recessed microphone 40, the mouthpiece 10 can include a cavity 44 in which the microphone 40 is placed. The cavity may include a small aperture 45 or opening to the mouthpiece surface 12 to allow for acoustical conduction to the mouthpiece 10. The diameter of aperture 45 can be selected to minimize the entry of fluids into the cavity, and in various embodiments, can be in the range of 0.001 to 0.00001 inches (0.00254 to 2.54e-005 centimeter), more preferably, 0.0005 to 0.0008 inches (0.00127 to 0.002032 centimeter) with a specific embodiment of 0.0007 inches (0.001778 centimeter). One or both of aperture 45 and microphone 40 may include a waterproof layer 46, which may correspond to a porous material such as an expanded PTFE material. In other embodiments, the microphone 40 may also be potted or positioned within cavity 44 with a sound insulating material, such as one or more curable polymers having sound insulating properties (e.g., silicone). In use, such embodiments having a potted microphone 40 provide a means for reducing feedback between microphone 40 and acoustic transducer 50 as well as

dampening of other unwanted sounds (e.g., from the diver clenching his jaw on the mouthpiece), which may be conducted through mouthpiece 10.

**[0054]** An acoustic transducer 50 is positioned on the upper surface 33 of at least one of the left or right bite structure 30. The acoustic transducer 50 is configured to transduce an electrical signal input 51 (encoding or corresponding to an acoustic signal) received by the diver's communication device 100 into an acoustic output signal 52. Input signal 51 can be from one or more of another communication device 100 (either from another diver's device or from a surface ship), a dive computer, a music player (e.g., an MP3 player) or other related devices. In particular embodiments, input signal 51 can be generated and/or conditioned by a processor 170 (described herein) or other signal conditioning device or circuitry of communication device 100 or a processor 70 resident within mouthpiece 10. Processor 70 or 170 may correspond to a microprocessor and can be configured to generate and/or condition signal 51, as well as condition signal 42 from microphone 40. Such signal conditioning in either case can include one or more of amplification, filtering, conversion, matching and isolation.

**[0055]** Transducer 50 is also configured to acoustically couple to the diver's upper teeth UT to conduct the acoustic output 52 from the diver's upper teeth through the skull S to the cochlea in order to generate audible sound in at least one of the diver's ears E when the diver is wearing mouthpiece 10. In many embodiments, the transducer 50 comprises an acoustical plate 53 (also described as a vibrating plate 53) coupled to a driver 54. The plate 53 is configured to engage and acoustically couple to the surface of the diver's teeth and be vibrated by the driver 54 responsive to electrical signal 51. Vibration of the plate 53 produces acoustical signal output 52 which is acoustically conducted to the divers teeth and then through the bones in his or her skull to the inner ear IE, including cochlea C where they are perceived as sound. Plate 53 can be fabricated from ceramic, metal, polymeric material such as a resilient polymer, and can have a size and shape to acoustically couple to one or more of the diver's teeth. In particular embodiments, plate 53 may have a curved horizontal shape 53c corresponding in part to the curvature of the diver's dental arches DA to facilitate the plate contacting multiple teeth. Plate 53 may also have one or more ridges or other raised feature 53r configured to enhance acoustical coupling and conduction to the diver's teeth. In particular embodiments, ridges 53r can be positioned to contact the center depressions in the diver's teeth.

**[0056]** In particular embodiments, plate 53 can be configured to have an acoustical impedance approximating or otherwise matched in some fashion (e.g., proportional, inversely proportional, etc.) to that of the diver's teeth (e.g., one or more of the upper teeth). Such embodiments can be achieved by fabricating plate 53 from one or more dental ceramics or other material having similar properties as the diver's teeth. Other acoustic properties can also be matched, such as the resonant frequency of the plate and the teeth. Such matching of acoustic properties can be configured to minimize acoustic losses from plate 53 to the teeth or otherwise enhance conduction of acoustic signal 52 through the diver's skull to the inner ear including the cochlea.

**[0057]** In various embodiments, driver 54 comprises an electromagnetic driver 55, which can be directly or indirectly coupled to plate 53. In the latter embodiments, driver 54 comprises electromagnetic driver 55, a movable diaphragm

56 sitting atop or otherwise coupled to the driver 55, and a lever or other connecting means 57 coupling diaphragm 56 to plate 53. Electromagnetic driver 55 can comprise various electromagnetic drivers known in the speaker or earphone arts and can comprise a miniature magnet 58 which may correspond to a core or coil. One or more of driver 55, movable diaphragm 56, lever 57 and magnet 58 can be fabricated from mems-based components either separately or as a single structure. In alternative embodiments, driver 55 may be configured to be directly coupled to plate 53 without diaphragm 56 and/or lever 57.

**[0058]** typically, acoustic transducer 50, including plate 53, is positioned to engage the upper (e.g., maxillary) back teeth of the diver's mouth M, but may be positioned to engage any tooth or group of teeth in the diver's mouth, such as the front upper or lower teeth. As an addition or alternative embodiment, transducer 50 including plate 53 may also be configured to engage and be acoustically coupled to the diver's upper palate (the hard palate). In such embodiments, the plate 53 can have a curved shape matched to at least a portion shape of the upper palate (also known as the roof of the mouth). Such embodiments allow for larger surface area of acoustical conduction to the diver's skull and do not require the diver to bite down on the mouthpiece when speaking.

**[0059]** In various embodiments, mouth piece 10 can include a sensor 60 which is configured to detect the diver's breath and generate an output signal 61 which is used to switch off microphone 40 and/or attenuate or gate the output signal 42 coming from the microphone to communication device 100 during a time period of the diver's respiration. In the first configuration (where the microphone is switched off), the output signal 61 can be fed into microphone switching device 43s, and in the second signal 61 can be sent to communication device 100 including processor 170. In some embodiments, sensor 60 can correspond to a miniature flow/velocity sensor for detecting a flow rate and/or velocity of the diver's breath moving through the mouth. When the velocity or flow exceeds a threshold value, corresponding to flow or velocity of a diver's breath, the microphone 40 can be configured to shut off, and/or output signal 42 can be attenuated or gated by processor 170. The threshold value for flow and/or velocity can be selected so as to be able to distinguish between a velocity or flow rate when the diver is speaking or breathing, the former being lower than the latter. In various embodiments, processor 170 and/or microphone 40 may include logic for shutting of the microphone 40 and/or attenuating or gating signal 42 or 51. In specific embodiments, such logic for attenuating or gating signal 42 or 51 can be incorporated into one or more modules 190, described herein.

**[0060]** For embodiments where sensor 60 comprises a flow sensor, the sensor can be positioned in a variety of locations on mouthpiece 10 for detecting the diver's breath. In one embodiment, flow/velocity sensor 60 is placed toward the front section 14 of the mouthpiece 10 (e.g., near the front teeth), preferably in the center 15 of the front section 14, so as to be in a location in the diver's mouth having the greatest velocity/flow rate (for example, at the peak of a velocity profile such as a velocity profile for poiseuille flow). Such profiles can be determined using standard measurement methods known in the art for a standard mouth shape, size and tidal volume (or other related respiratory measurement), with adjustments made for a particular diver with a particular shaped mouthpiece 10.

[0061] Communication device 100 can employ a variety of communication modalities including, without limitation, electromagnetic, such as RF, magnetic, optical, acoustical and/or combinations thereof. Referring now to FIG. 10, in some embodiments, the communication device 100 can correspond to an ultrasonic or other acoustical transmission device 100a which transduces the electrical output signal 42 into an acoustic signal 101, which is transmitted by the acoustical transmission device 100. In such embodiments, communication devices 100 can comprise one or more acoustical transducers 105 which transmit and/or receive acoustical energy at a selected frequency or range of frequencies. Selected frequencies can be in the range of 10 to 40 kHz, 30 to 40 kHz, 100 to 200 kHz and 150 to 200 kHz. This frequency can be adjusted for one or more of the depth, salinity and temperature conditions of the water. Acoustical transducers 105 may correspond to one or more ultrasonic transducers 106, which can comprise various piezo-electric materials, such as piezo-electric ceramic materials. The particular acoustical transducer 105 and acoustical frequency can be selected based on the desired acoustical transmission range, acoustical sensitivity, bandwidth, maximum diving depth, temperature and salinity conditions and related parameters.

[0062] Also, acoustical transducers 105 may be configured as both acoustical transmitters and receivers so as to send and receive acoustical signals. In many embodiments, transducers 105 can be arranged as an array 107 of transducers which may include a phased array formation. Array 107 can be configured to optimize one or more of the transmission range, sensitivity and bandwidth of communication device 100. In various embodiments, the frequency, power settings and sensitivities of transducers 106 and/or array 107 can be selected to enable underwater transmission ranges for communication device 100 up to 1500 feet (457.2 meters) and more preferably, up to 2500 feet (762 meters) with even great transmission ranges contemplated. Also, communication device 100 can include signal generation and selection circuitry to allow for communication over multiple selectable acoustic frequency ranges, herein after channels. Communication device 100 may also include a multiplexing device (not shown) coupled to at least one of the transceiver or signal processing circuitry so as to allow for the transmission of multiple signals. The multiplexing device may be configured for one or more of time division, frequency division or code division multiplexing. In alternative embodiments communication device 100 can comprise an RF based device and can even include RF communication chip 95 described above. In these and related embodiments, RF communication chip 95 is configured to have a selected power and frequency to enable underwater communication with other divers 210 and ship 220.

[0063] Referring now to FIG. 11, in many embodiments, communication device 100 can be incorporated into a portable watertight electronic (PWE) device 160. PWE device 160 will typically comprise a PDA (Personal Digital Assistant) device 160 (or other similar devices) that is worn or carried by diver 200. PWE device 160 may also comprise or be integrated into a dive watch, dive computer or other device or equipment carried by the diver (e.g., a flash light, depth gauge, regulator, etc.). For ease of discussion, PWE device 160 will now be referred to as a dive computer 160; however, other embodiments are equally applicable. Dive Computer 160 includes a processor 170, display 180, user input means 185 and an electrical power source 165. Power source 165

may correspond to a portable battery such as a lithium or lithium ion battery or other battery chemistry known in the art. User input means 185 may correspond to a touch screen which may be separate or integral with display 180. Processor 170 includes one or more modules 190 including software programs or other logic for controlling various operations of device 160 including those of communication device 100. For example, in various embodiments, module 190 can comprise a program for distinguishing between when a diver is speaking versus when the diver is breathing by using an output 61 from sensor 60 and then gating or attenuating microphone output 42 and/or transducer output 51 accordingly.

[0064] In other embodiments, module 190 can comprise a program or other logic instruction set for generating and sending various voice commands and other voice messages 102 to the diver to alert them of various conditions, etc. and/or assist them in the performance of one or more tasks. In one embodiment, module 190 can comprise a program for enabling a controlled ascent for a diver. The program may send voice prompts to the diver telling him or her how long to remain at a particular depth before he or she can ascend to the next depth so as to avoid the bends or other related conditions. The program can be configured to send the prompts in response to one or more inputs such as those from an electronic depth gauge, electronic timer, SCUBA tank pressure or related gauge or sensor. Other inputs can include various messages from other divers 120 as well as the dive boat or other surface ships.

[0065] The processor 170 will typically correspond to one or more microprocessors known in the art and can be selected for increased durability, fault tolerance and pressure resistance for underwater operation, using various MIL-SPEC criteria known in the military/naval equipment arts. Processor 170 will typically include one or more modules or algorithms 190 for generating, conditioning and controlling signals sent to and from the mouthpiece 10, including signals 102 corresponding to voice messages as well as controlling other operations to allow two way voice communication by diver 200. Modules 190 may also be configured for computing, monitoring and communicating various physiological data of the diver, including for example, heart rate, respiration rate, blood pressure, blood oxygen saturation and other blood gas measurements (e.g., blood nitrogen). In many embodiments modules 190 are configured to calculate blood oxygen saturation or other blood gas saturation using output from optical detector 413 and oxymetry methods known in the art. Module 190 can also include algorithms to calculate the divers pulse rate based on variations in the diver's blood oxygen saturation using methods known in the art.

[0066] Processor 170 may also include other modules 190 which use such data to determine if the diver is in a state of physiologic stress (e.g., such as stress caused by low blood oxygen levels, "hypoxia" or out gassing of nitrogen, causing the "bends," etc.) or a precursor state which precedes or is otherwise predictive of a state of physiological stress. When such a stress state or precursor state of stress is detected, it may be communicated by the first communication device 100 to a second communicative device 110 to allow other individuals (such as those on the dive boat or even those onshore) to monitor the diver(s) and alert them when it is time to ascend and/or if diver requires assistance.

[0067] In particular embodiments, PWE device 160 can comprise a dive computer 160 or a related device that is carried or worn by the diver and is configured to provide the

diver various voice messages **102** (also referred to as spoken messages **102**) including alerts, prompts and commands using mouthpiece **10** and acoustic transducer **50**. This can be achieved through the use of processor **170**, audio signal generator **176**, and one or more modules **190** that are configured to generate and signal voice messages to the diver in response to one or more conditions and/or as part of a voice instruction set to the diver.

[0068] Referring now to FIGS. **6d** and **10**, in various embodiments, modules **190** can include a speech synthesizer module **191** which generates audio signals **51** corresponding to voices messages **102**. In use, such embodiments allow the diver to perform a number of tasks and activities, including various mission critical tasks without having the distraction of having to look at an instrument.

[0069] Speech synthesis module **191** can comprise various speech synthesis algorithms known in the art. Additionally in various embodiments, speech synthesis module **191** is configured to generate audio signals **52**, which correspond to a selected spoken voice **103**. Spoken voice **103** can include for example, the diver's own voice, or another person's voice similar that used in aircraft navigation and control systems. One or both of modules **190** and **191** can include the capability for the diver **100** to record specific messages **102** in their own voice or that of another individual to allow module **191** to output those messages to the diver **100** or another diver **110**. Further, modules **190** and **191** may also include the capability for the diver to record a sufficient number of vocalizations (in their own voice or that of another individual) to allow module **191** to generate any spoken message **102** and not just those spoken by the diver or other individual. The techniques for generating voices **103** from such vocalizations can include various algorithms known in the speech synthesis arts, for example, various concatenation routines **192** using stored speech units **193** derived from the speaker's (e.g., the divers) vocalizations. Such routines can be embedded within the programming of module **191** or they may be external.

[0070] In an additional or alternative embodiment, modules **190** and **191** can also include the ability for the diver to fine tune the voice **103** to have selected acoustic properties (e.g., pitch, volume, etc. to their liking). Such voice selection capability can be achieved by the use of one or more algorithms incorporated into module **191** such as a pitch variation algorithm **194**, rate variation algorithm **195** (and other adjustment algorithms known in the speech synthesis arts), which adjust audio signals **51** to produce the desired voice **103**. In use, such embodiments allow the diver to select a voice that they are most comfortable with and can mostly easily hear, particularly underwater. In the latter case, device **160** and modules **190**, and **191** can include the capability to allow the diver to fine tune voice **103** while they are underwater with the mouthpiece **10** in place. Accordingly, in various embodiments device **160** can include various user input devices or other means **185** (e.g., knobs, touch screens, etc.) for making such adjustments.

[0071] In addition to manual adjustment of voice **103**, in various embodiments device **160** can also include means for varying the acoustical characteristics of voice **103** depending upon variations in one or more conditions experienced by the divers so as to maintain the diver's ability to hear messages **102** spoken by voice **103**. Such conditions can include ambient noise levels, the diver's depth, water pressure and other like conditions. Accordingly modules **191** can include one or more control algorithms **196** (e.g., PI, PID, etc.) which oper-

ate using an input **197**. In various embodiments, input **197** may comprise one or more of depth, pressure, ambient noise, etc. For the case of ambient noise levels, the input **197** can comprise signals **42** from microphone **42** or microphones coupled to device **160**. In use, such embodiments allow the diver to continue to hear commands **102** from voice **103** during changes in their depth and in ambient noise levels (e.g., from a passing boat) which may otherwise drown out or reduce the acoustic fidelity of the voice **103**. Module **191** can also adjust voice **103** as well depending on the particular type of SCUBA **80**, mask and mouthpiece used by the diver to account for variations in acoustical conduction and other acoustical characteristics.

[0072] Modules **191** can also be configured to modulate or otherwise adjust voice **103** to account for reduced levels of conduction by bone at higher acoustic frequencies. This can be accomplished, for example, through the use of pitch variations routines **195** which shifts the pitch of all or a portion of the frequency components of voice **103** to lower frequencies (e.g., make voice **103** sound deeper). In other embodiments, conduction through the bone of the higher frequency components of voice message **102** or other acoustic signals **52** may also be improved by using high pass signal routines implemented in hardware (e.g., a high pass filter coupled to op amp device) or in software by a module **198** running on one or both of processor **170** and **70**. Such an approach (either in hardware or software) amplifies the higher frequency components of voice **103** or other acoustic signal **52** by a selected gain which can vary depending upon the frequency (e.g., more gain for higher frequencies). In one embodiment, the amount of the gain can be determined by doing sound conduction readings through the diver's skull and/or taking bone density readings using one or more bone densitometer instruments known in the art.

[0073] Device **160** can send signals **51** to mouthpiece **10** using a variety of modalities. For example, in various embodiments, device **160** can send audio signals **51** containing modulated or otherwise encoded voice messages **102** to mouthpiece **10** via wires **17**, or alternatively may do so wireless using an RF other wireless communication device **96**. In another embodiment, a second device **160'** that is not directly coupled to mouthpiece **10** can be used to acoustically signal voice messages **102** to device **160** which is operatively coupled to mouthpiece **10** either via wires **17** or through use of RF communication devices **95** and **96**.

[0074] As described above, various embodiments, which generate spoken messages **102** (for example, using device **160**), allow the diver to perform a number of tasks and activities, including various mission critical tasks without being distracted by having to look at gauge or other instruments. Further, messages **102** can include not just data such as depth, remaining air, etc., but can include prompts for performing one or more operations or tasks. For example, in one or more embodiments, messages **102** can include spoken directions for reaching a desired location, such as a dive site, or the location of a dive boat or that of other divers. Specific commands in such embodiments can include without limitation, "swim up," "swim down," "bear to the right," "bear to the left," etc. This allows the diver to navigate to such locations while looking at their surroundings and/or when there is minimal lighting.

[0075] In one or more exemplary embodiments, dive computer **160** and communication system **5** can be configured to provide the diver with voice messages **102** in the form of

prompts for making a controlled ascent to the surface so as to avoid the bends. Specifically, the dive computer **160** may provide voice prompts directing the diver with various instructions, such as how long to remain at a particular depth during the ascent, what depth he or she is at, how long he or she has been at the depth, and how soon before he or she can ascend to the next depth. The computer **160** may also provide the diver with voice updates, which provide information such as the diver's ascent rate or whether they need to stay longer or shorter at a particular depth depending on various conditions. In addition to prompts and updates, the dive computer **160** may also provide voice instructions of the entire ascent plan in advance of the actual ascent in order to allow the diver to get a sense of the entire plan.

[0076] While in many embodiments, mouthpiece **10** is configured for use with a SCUBA **80**, in other embodiments, the mouthpiece can also be configured for used with a snorkel or like apparatus, allowing a snorkeler to have two way voice communication with another snorkeler, diver **210** or ship **220**. In such embodiments, the entire system **5**, including communication device **100** can be contained in the mouthpiece **10**. Further, in such embodiments, the connecting portion **11** can be sized and shaped to detachably connect to a standard sized snorkel, allowing the diver to attach the mouthpiece **10** to an off the shelf commercial snorkel and have a skin diving version of underwater communication system **5**. In other embodiments, mouthpiece **10** and system **5** can be adapted for use with virtually any breathing apparatus, such as those used by fire and mine rescue personnel, so as to allow two way voice communications with such apparatus.

[0077] Referring now to FIGS. **12-19**, various embodiments of mouthpiece **10** can also include a measurement device **410** (also described herein as sensor device **410**) and methods for measuring various biometric data of a diver, such as blood oxygen saturation or that of another gas (e.g., nitrogen). Such measurements can then be converted into an acoustic signal for transmission to an acoustical communication device, such as communication device **100**, described herein. Collectively, sensor device **410**, mouthpiece **10** and one or more of communication device **100** (or other communication device described herein) and a monitoring device **460** may comprise a system **400** for measuring and communicating biometric data about a diver as is shown in the embodiment of FIG. **12**. In these and related embodiments, mouthpiece **10** comprises a support **10s** in or on which sensor device **410** is placed or otherwise disposed. Other supports **10s** are also contemplated which fit into the mouth of the diver and may, for example, be configured to be retained between the diver's cheek and gum so as to be in optical contact with one or both of these types of oral tissue. Monitoring device **460** can be one in the same as device **160** and may include a display **480**, which may be the same as display **180** of a communication device **100** as described herein. System **400** may also include a power supply **419** and a processor **470**. The processor **470** may be one in the same as processor **70** or processor **170** for embodiments using a monitoring device **460/160**. Processor **470** can include one or more modules **490** for calculating blood oxygen saturation (or other blood gas saturation, e.g., nitrogen) based on input from sensor device **410** and using absorbance equations known in the art. The module **490** can also be used to generate and control various aspects of sensor **410** including both input and outputs from the sensor. For example, in embodiments where sensor device **410** includes an optical emitter **412** and detector **413** module

**490** may include various algorithms for adjusting or calibrating the optical output of emitter **412** for variations in one or more of water temperature, depth or other dive condition, variations in the location of the emitter and detector in mouthpiece **10** as well as the particular type of optical measurement (e.g., absorbance vs. reflectance for oximetry embodiments of system **400**). Further, the module **490** may include algorithms to adjust the output of emitter **412** and/or that of detector **413** for motion artifact or other optical interference from movement of the mouthpiece e.g., due to movement diver's mouth and/or breathing. Module **490** may also include algorithms for calculating the diver's a pulse rate based on variations in the diver's blood oxygen saturation.

[0078] In one or more embodiments of mouthpiece **10** having a system **400** for measurement of biometric data, the system may include an optical or other sensor **410** for measurement of the diver's blood gases. Embodiments of a mouthpiece **10** having a sensor device **410** for making blood gas measurements are shown in FIGS. **13** and **14**. In these and related embodiments, sensor device **410** includes an optical emitter **412** and optical detector **413** that are selected and arranged to emit and detect light which having an absorbance or other optical property which is correlative to a blood gas saturation such as, oxygen, nitrogen, carbon dioxide, etc. Emitter **412** may correspond to one more LED's of the same or different wavelengths, though other optical emitters are also contemplated such as lasers. Detector **413** may correspond to one or more photodiodes, phototransistor, CCDs or like devices

[0079] In some embodiments, the emitter and detector of sensor device **410** are configured for measurement of blood oxygen saturation using oximetry methods. In various embodiments employing oximetry methods, adjustments can be made for the highly vascularized nature of the oral tissue OT such as buccal or gum tissue. Such adjustments can include, for example, reduction in the light intensities used for emitter **412** since the incident beam does not have to penetrate as much tissue as normal skin before encountering blood contained in the vascularized tissue within oral tissue OT. Typically, vascularized tissue or oral tissue OT lacks pigment so that it is fairly translucent relative to normal skin. Reductions in intensity in the range of 5% to 90%, with specific embodiments of 10%, 20%, 30%, 40% and 50%, relative to external skin oximetry measurements may be employed. Adjustments may also be made for reflection of light from tooth enamel underlying gum tissue. Sensor device **410** may employ wavelengths not absorbed by oxy-hemoglobin or hemoglobin so as to account for reflection occurring from the tooth enamel. Reduced intensities may be employed, relative to typical reflectance oximetry, due to the reflectance from tooth enamel. Reductions in intensity in the range of 5% to 50%, with specific embodiments of 10%, 20%, 30% and 40% relative to external skin oximetry measurements may be employed. Alternatively, increased intensities may be employed.

[0080] Emitter **412** and detector **413** are positioned in the mouthpiece **10** to emit light onto the diver's oral tissue OT, which can include either the gums or the inner cheek (i.e., buccal tissue), and then to sense light that is transmitted or reflected by the oral tissue as result of the emitted light. The emitter and detector **412** and **413** may be waterproofed and configured to withstand the pressures of the dive, e.g., withstand the pressure at depths of 200 to 300 feet (60.96 to 91.44 meters). This can be achieved through the use of various mill

spec/marine quality components known in the art. The sensor device **410** can also include its own electrical power source **419**, such as a lithium button battery or other miniature battery known in the art, or power may be supplied from an external source.

**[0081]** The emitter and detector **412** and **413** can have a number of arrangements and configurations within mouthpiece **10** to achieve various objectives, for example to maintain substantial physical and/or optical contact with the diver's oral tissue OT. In various embodiments, they may be placed on the surface **12** of the mouthpiece **10** or embedded within the mouthpiece either directly or by being placed in a cavity and then potted over. In the latter two cases, the mouthpiece and/or potting material are translucent (at least to the selected wavelengths) to allow light to be transmitted through the mouthpiece to reach the diver's oral tissue and then be transmitted back. In use, such embodiments allow the conformable surface of the mouthpiece **10** or other support **10s** to establish and maintain substantial physical and/or optical contact (e.g., of emitter **412** and detector **413**) with the diver's oral tissue, including for example, when the diver is breathing through the piece or otherwise moving the mouth piece in their mouth. As used herein, the terms "substantial physical" and/or "substantial optical contact" means either that greater than about 75% of the area of the mouthpiece including the emitter and detector is continuously in physical and/or optical contact with the divers oral tissue, more preferably greater than 90% of said area and still more preferably greater than about 95% of said area; and/or ii) said area is in physical and/or optical contact with the diver's oral tissue more than about 51% of the time when the diver has the mouthpiece in their mouth, more preferably, greater than about 75% of the time, still more preferably, greater than about 95% of the time. Such embodiments reduce the likelihood of an air bubble, liquid or both from optically obscuring or interfering with light going to or from emitter **412** or detector **413** so that there is no substantial effect on the measurement of blood oxygen saturation or other blood gas saturation. As used herein in the context of blood oxygen or other blood gas saturation measurement, the term "no substantial effect" or "without substantial effect" means an effect of preferably less than 10%, more preferably less than 5% and still more preferably less than 2.5% with even lower amounts contemplated (e.g., less than 1%). Maintenance of substantial physical and/or optical contact emitter **412** or detector **413** may also be enhanced through the use of conformable materials for all or a portion of mouthpiece **10** so that mouthpiece can: i) conform to the contour of the contacted oral tissue OT; and ii) bend and flex with movement of the diver's mouth and/or mouthpiece to maintain said contact. In particular embodiments the section(s) of the mouthpiece **10** containing emitter **412** and/or detector **413** (e.g., flange **36**) can be fabricated from materials more conformable than the remainder of mouthpiece **10**.

**[0082]** In other embodiments for achieving substantial physical and/or optical contact with divers oral tissue, the emitter and detector may be placed on the surface **12** of the mouthpiece **10** so as to make direct contact with the diver's oral tissue. In such embodiments, the surfaces of one or both of the emitter **412** and detector **413** are desirably coated with a waterproof material and the housings for one or both can be made from conformable polymers so as to conform to the contour of the contacted oral tissue OT. In some embodiments, the emitter **412** and detector **413** may be recessed

below the surface of the mouthpiece **10** a selected amount while still having direct exposure to the inside of the diver's mouth. In these and related embodiments, the emitter **412** and detector **413** may also be angled a selected amount toward the surface of the target oral tissue with the angle chosen depending upon various factors such as where the sensor device **410** is positioned on the mouthpiece (e.g., front or back of the mouth) and/or the wavelengths selected and/or the desired accuracy and precision. In various embodiments, the angle can be in the range of 1 to 90 degrees with particular embodiments of 15, 30, 45 and 60 degrees.

**[0083]** In other embodiments, multiple emitters and detectors **412** and **413** can be used for sensor **410** and may be arranged in a distributed pattern or array on or beneath the surface **12** of mouthpiece **10**. Such an arrayed pattern provides for improved accuracy and precision of the oximetry measurement because the measurement is being made at multiple locations within the divers mouth so as to average out of any anomalous measurements due to, for example, motion artifact (e.g., of the diver's mouth or the mouthpiece) and/or sections of the diver's mouth being temporarily compressed against the mouthpiece and thus having reduced blood.

**[0084]** In addition to the various configurations described above, the emitter **412** and detector **413** may also be arranged and configured depending upon the particular type of method employed for measurement of the desired blood gas (e.g., reflectance or transmittance type oximetry for measurement of blood oxygen levels). For example, if sensor device **410** uses reflectance type oximetry, the emitter(s) and detector(s) may be placed proximate with each other on the same side of the mouthpiece **10** (whether embedded, recessed or on the surfaces), as shown in the embodiment of FIG. **15**. In such embodiments, the detector **413** is detecting emitted light which is reflected from the diver's oral tissue. Also, for reflectance type embodiments, the emitter **412** and detector **413** can be positioned to make measurement for either gum G, or buccal tissue. For gum measurements, the emitter **412** and detector **413** can be positioned on the inside surface of the mouthpiece, while for buccal measurements, they can be positioned on the outside surface. Also, for buccal measurements, the intensity and wavelengths of the emitted light can be adjusted to account for reflectance of light off of the enamel of the tooth below the gum line, GL. For, example, the intensity of the emitted light can be reduced due to the increased reflectance of light off of the tooth enamel (which for normal skin would not occur resulting in a greater degree of absorbance by the deeper layers in the skin). In use, such embodiments can reduce the power requirement for making oximetry measurements and thus prolong battery life.

**[0085]** For embodiments using transmittance-type oximetry, the emitter **412** and detector **413** will typically be placed on opposite sides of the mouthpiece **10**, as is shown in the embodiment of FIG. **16**. However, several different embodiments are contemplated using absorbance type oximetry where the emitter **412** and detector **413** need not necessarily be on opposite sides of the mouthpiece. In an embodiment shown in FIG. **17**, the emitter **412** and detector **413** are positioned on opposite sides of mouthpiece **10** and are further positioned to be below the diver's gum line GL such that light is transmitted through the divers gum tissue (e.g., light is transmitted from one side of the gum to the other). Sufficient intensity can be used to allow for transmission of light through gaps below the gum portion of diver's teeth. Multiple emitters and detectors can be used to accomplish this as well.

In another embodiment shown in FIG. 18, the emitter 412 and detector 413 can be positioned on the same side of the mouthpiece, but at different vertical positions. The different vertical positions can be selected to allow for the transmittance of the emitted light from a location just below the gum line of the lower teeth (a location several mm's or more lower where the light is being transmitted through the layer of gum tissue covering the tooth (teeth)) with concurrent absorbance by oxygenated blood within this tissue layer.

[0086] In yet another embodiment shown in FIGS. 19a-19c, mouthpiece 10 can include flaps 38 which project between the tongue Tg and the lower palate LP, allowing for emitter 412 and detector 413 to be positioned on either side of the tongue so that light transmittance and absorbance can occur through the tissue at the base of the tongue Tg, known as the Lingual Frenulum, LF. This is a desirable area to make oximetry measurements, particularly for a diver since this area is highly vascularized and less likely to experience vasoconstriction (e.g., due to the diver's exposure to colder water), which may reduce the amount of blood contained in the tissue to be sampled.

[0087] In various embodiments, the intensity and other optical characteristics of the light emitted by emitter 412 can be modulated or otherwise adjusted for various underwater conditions, such as depth, water temperature, or optical property of the water the diver is in (e.g., turbidity, etc.) so as to maintain the accuracy and precision of the blood gas saturation measurement and/or otherwise reduce error, variation or signal noise caused in whole or part by the underwater condition. For example, the intensity can be modulated with respect to the diver's depth (e.g., by means of an electronic depth gauge that is operatively coupled to device 410 and/or PDA 460). The modulation or other adjustment can be done by logic circuitry coupled to emitter 412 and/or device 410 and/or a processor such as processor 70, 170 or 470 operatively coupled to emitter 412 and/or device 410. Higher intensities can be used for deeper depths due to fact that the higher water pressures at deeper depths may cause blood that is normally present in the upper layers of the skin to be forced away from the skin surface into deeper tissue. Thus, a stronger intensity may be needed to penetrate deeper into the skin and subjacent tissue where sufficient blood is present to make an oximetry measurement. Correlations can be developed between required intensity strength and diving depth using known mathematical modeling and/or laboratory testing and models. In various embodiments, the intensity of light from emitter 412 can be adjusted linearly, logarithmically or other manner with respect to depth (e.g., in a first, second order or other manner). A similar situation may occur for colder water temperatures, where due to vasoconstriction of the skin from colder temperatures, blood is shunted away from the skin, requiring higher intensities. Also, higher intensities can be used to compensate for losses in intensity of the incident or reflected/transmitted light from the skin due to the presence of water in the diver's mouth and various particulate matter in the water (e.g., due to scattering, reflectance etc.). In this latter case, a calibration signal may be sent to compensate for the presence of water, e.g., before emitter 412 emits an optical signal 412s used for measurement of blood oxygen saturation. Alternatively, a dual beam approach can be used for optical signal 412s with one beam directed at the diver's skin the other into any water near the diver's skin.

## CONCLUSION

[0088] The foregoing description of various embodiments of the invention has been presented for purposes of illustration and description. It is not intended to limit the invention to the precise forms disclosed. Many modifications, variations and refinements will be apparent to practitioners skilled in the art. For example, various embodiments of mouthpiece 10 and system 5 can be adapted for salt and fresh water environments, as well as deep dives (e.g., 60 to 200 meters (196.9 to 656.2 feet)) and cold water environments. Also various embodiments of mouthpiece 10 and system 400 can be adapted for other blood gases besides oxygen, such as nitrogen, CO<sub>2</sub>, etc.

[0089] Elements, characteristics, or acts from one embodiment can be readily recombined or substituted with one or more elements, characteristics or acts from other embodiments to form numerous additional embodiments within the scope of the invention. Moreover, elements that are shown or described as being combined with other elements, can, in various embodiments, exist as standalone elements. Hence, the scope of the present invention is not limited to the specifics of the described embodiments, but is instead limited solely by the appended claims.

What is claimed is:

1. A mouthpiece apparatus for measuring biometric data of a diver, the mouthpiece comprising:
  - a flexible mouthpiece configured to be worn in the mouth of the diver; the mouthpiece including a light emitter and a light detector configured to emit and detect light at a wave length having an absorbance correlated with a level of a blood gas saturation, the light emitter positioned to emit light onto oral tissue of the diver and the light detector positioned to detect light which is received from the oral tissue and generate an output signal correlated to the detected light.
  2. The mouthpiece apparatus of claim 1, wherein the blood gas saturation is oxygen saturation.
  3. The mouthpiece apparatus of claim 1, wherein the wavelength includes at least a first and second wavelength.
  4. The mouthpiece apparatus of claim 1, wherein the light emitter and the light detector are positioned to detect light transmitted through the oral tissue.
  5. The mouthpiece apparatus of claim 1, wherein the light emitter and the light detector are positioned to detect light transmitted through a lingual frenulum portion of the tongue.
  6. The mouthpiece apparatus of claim 1, wherein at least one of the light emitter or the light detector is positioned on a surface of the mouthpiece.
  7. The mouthpiece apparatus of claim 1, wherein at least one of the light emitter or the light detector is recessed below a surface of the mouthpiece.
  8. The mouthpiece apparatus of claim 1, wherein at least one of the light emitter or the light is embedded below a surface of the mouthpiece.
  9. The mouthpiece apparatus of claim 1, wherein the mouthpiece is configured to conform to a contour of the diver's oral tissue to maintain substantial optical contact between the diver's oral tissue and the light emitter and the light detector during movement of the diver's mouth, cheek, jaw or teeth.
  10. The mouthpiece apparatus of claim 9, wherein the mouthpiece is configured to maintain substantial optical con-

tact between the diver's oral tissue and the light emitter and the light detector during said movement, without impeding the diver's respiration.

**11.** The mouthpiece apparatus of claim **1**, further comprising:

a processor coupled to the light emitter and light detector for controlling a characteristic of the emitted light and receive and convert an output signal from the detector into a blood gas saturation level.

**12.** The mouthpiece apparatus of claim **11**, wherein the characteristic is at least one of an intensity, duration or wavelength of the emitted light.

**13.** The mouthpiece apparatus of claim **11**, wherein the processor includes logic for modulating the characteristic of the emitted light in response to a diving condition to maintain an accuracy of a blood gas saturation measurement based on the output signal.

**14.** The mouthpiece apparatus of claim **13**, wherein the diving condition is a diving depth, water temperature or an optical property of the water surrounding the diver.

**15.** The mouthpiece apparatus of claim **1**, further comprising:

a power source for powering at least one of the light emitter or the light detector.

**16.** The mouthpiece apparatus of claim **1**, wherein the mouthpiece is adapted for connection and use with a self-contained underwater breathing apparatus (SCUBA).

**17.** The mouthpiece apparatus of claim **1**, wherein at least a portion of the mouthpiece comprises an elastomer, silicone or polyurethane.

**18.** The mouthpiece apparatus of claim **1**, wherein the light emitter and the light detector comprise an array of emitters and detectors configured to increase an accuracy of a blood gas level measurement using the apparatus.

**19.** The mouthpiece apparatus of claim **1**, further comprising:

an acoustic transducer positioned on the mouthpiece, the transducer configured to transduce an electrical signal input into an acoustic output and acoustically couple to the diver's upper teeth to conduct the acoustic output from the diver's upper teeth through the skull to generate audible sound in at least one of the diver's ears when the diver is wearing the mouthpiece.

**20.** A system for measuring and communicating biometric data of a diver, the system comprising:

the apparatus of claim **19**; and

a portable device configured to send audio inputs to the acoustic transducer, the audio inputs corresponding to spoken messages for the diver; wherein the acoustic transducer converts the audio inputs into spoken messages which are conducted through the diver's skull and heard by the diver.

**21.** The system of claim **20**, wherein the portable device comprises a dive computer or a dive watch.

**22.** A method for monitoring blood oxygen saturation levels of a diver, the method comprising:

positioning a mouthpiece in the mouth of the diver, the mouthpiece including a light emitter and a light detector; emitting light onto the diver's oral tissue at least one frequency of the light having an absorbance correlated with a blood oxygen saturation level, the intensity of the light modulated for an underwater condition;

detecting an intensity of light received from the diver's oral tissue in response to the emitted light; and

determining a blood oxygen saturation of the diver utilizing the detected intensity.

**23.** The method of claim **22**, wherein the mouthpiece comprises the mouthpiece apparatus of claim **1**.

**24.** The method of claim **22**, wherein the emitter and the light detector are positioned in the mouthpiece to detect light transmitted through the diver's oral tissue.

**25.** The method of claim **24**, wherein the emitter and the light detector are positioned in the mouthpiece to detect light transmitted through the gum tissue or the lingual frenulum portion of the tongue.

**26.** The method of claim **22**, wherein the emitter and the light detector are positioned in the mouthpiece to detect light reflected from the oral tissue.

**27.** The method of claim **22**, wherein the diving condition is a depth of the diver, a water temperature or an optical property of water surrounding the diver.

**28.** The method of claim **22**, wherein the intensity of the emitted light is modulated responsive to a presence of water in the diver's mouth.

**29.** The method of claim **22**, wherein the mouthpiece is configured to maintain substantial optical contact between the diver's oral tissue and the emitter and the detector during movement of the diver's jaw, mouth or teeth, the method further comprising:

determining the blood oxygen saturation of the diver during movement of the diver's jaw, mouth or teeth, wherein the determination is not substantially effected by the movement.

**30.** The method of claim **22**, wherein the mouthpiece is configured to maintain substantial optical contact between the diver's oral tissue and the emitter and the detector during a period of respiration of the diver, the method further comprising:

determining the blood oxygen saturation of the diver during the period of diver respiration wherein the determination is not substantially effected by movement of the mouthpiece or the diver's oral tissue during the period of respiration.

**31.** The method of claim **22**, further comprising: alerting the diver when the blood oxygen saturation is below a threshold level.

**32.** The method of claim **30**, wherein the threshold level is about 95% saturation.

**33.** The method of claim **22**, further comprising: generating an acoustical signal encoding information on the blood oxygen saturation level, the acoustical signal configured to be transmitted underwater.

**34.** The method of claim **33**, further comprising: transmitting the acoustical signal from a first communication device proximate the diver to a second communication device.

**35.** A method for monitoring blood oxygen saturation levels of a diver, the method comprising:

positioning a measurement device in the mouth of the diver mouthpiece in the mouth of the diver, the measurement device including a light emitter and a light detector positioned on a support; the measurement device configured to maintain substantial optical contact with the diver's oral tissue during movement of one or more of the diver's mouth, jaw or teeth and to do so without impeding the diver's breathing;

emitting light onto the diver's oral tissue at least one frequency of the light having an absorbance correlated with

a blood oxygen saturation level, the intensity of the light modulated for an underwater condition;  
detecting an intensity of light received from the diver's oral tissue in response to the emitted light; and  
determining a blood oxygen saturation of the diver utilizing the detected intensity.

**36.** The method of claim **35**, wherein the support comprises a flexible mouthpiece worn by the diver.

**37.** The method of claim **35**, wherein the diving condition is a depth of the diver, a water temperature or an optical property of water surrounding the diver.

\* \* \* \* \*

专利名称(译)	用于测量潜水员和水下通信的生物特征数据的喉舌		
公开(公告)号	<a href="#">US20130116512A1</a>	公开(公告)日	2013-05-09
申请号	US13/457456	申请日	2012-04-26
[标]申请(专利权)人(译)	IMRAN MIR		
申请(专利权)人(译)	IMRAN , MIR		
当前申请(专利权)人(译)	IMRAN , MIR		
[标]发明人	IMRAN MIR		
发明人	IMRAN, MIR		
IPC分类号	A61B5/00		
CPC分类号	A61B5/0816 A61B5/14551 A61B5/6803 A61B5/0002 A61B2562/0204 A61B2562/0238 A61B5/682 B63C11/186 B63C11/26		
优先权	61/479265 2011-04-26 US		
其他公开文献	US9795296		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

本发明的实施例提供了用于测量潜水员的生物特征数据的系统，设备和方法。在许多实施例中，该系统包括具有传感器装置的接口管，该传感器装置包括光发射器和检测器，该检测器配置成发射和检测波长的光，该波长具有与血气饱和度水平相关的吸光度，例如氧气，氮气，CO<sub>2</sub>。发射器定位成将光发射到潜水员的口腔组织上，并且检测器定位成检测通过口腔组织的光透射或通过来自组织的光的反射从口腔组织接收的光。目标口腔组织可包括口香糖或口腔组织中的一种或两种。这样的实施例允许收集数据而不必佩戴额外的传感器或测量装置，并且允许在潜水员通过其吹嘴呼吸时测量血气水平。

