


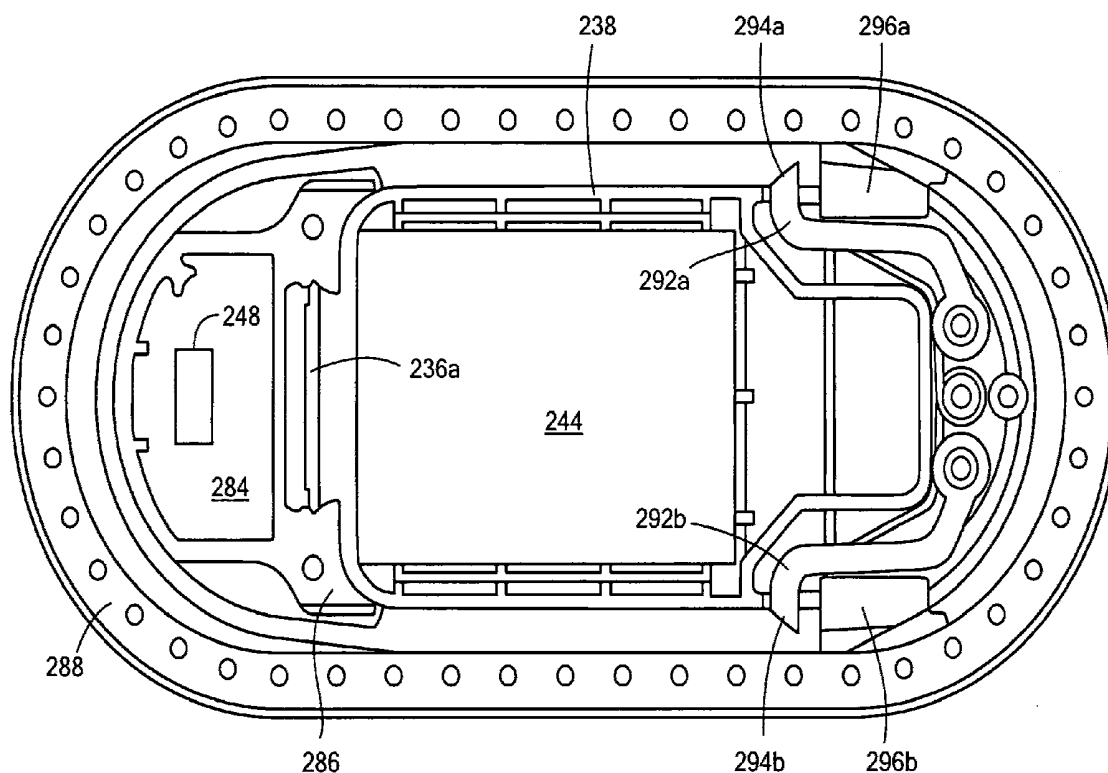


US 20120078127A1

(19) **United States**(12) **Patent Application Publication**  
**McDonald et al.**(10) **Pub. No.: US 2012/0078127 A1**(43) **Pub. Date: Mar. 29, 2012**(54) **PHYSIOLOGICAL STATUS MONITORING  
SYSTEM**(52) **U.S. CL.** ..... 600/508; 600/301(76) **Inventors:** **David McDonald**, Medway, MA  
(US); **Craig D. Mielcarz**,  
Somerville, MA (US); **Sergey**  
**Nikiforenko**, Ayer, MA (US);  
**Vernon A. Gambetta**, Sarasota, FL  
(US)(57) **ABSTRACT**

A load score system includes a metabolic sensor such as a heart rate sensor for a subject is configured to output metabolic data for the subject. A biomechanical load sensing subsystem for the subject is configured to output biomechanical load data. A speed sensor subsystem for the subject is configured to output speed data. One or more databases store zones and a weighting factor for each zone for metabolic data, biomechanical load data, and speed data. A performance module is responsive to the metabolic data, the biomechanical load data, and the speed data and the one or more databases and is configured to calculate a metabolic load score for the subject. A biomechanical load score for the subject and a speed load score for the subject are also calculated. An output module displays the subject's calculated metabolic, biomechanical, and speed load scores.

(21) **Appl. No.: 12/924,241**(22) **Filed: Sep. 23, 2010****Publication Classification**(51) **Int. Cl.**  
**A61B 5/02** (2006.01)  
**A61B 5/00** (2006.01)

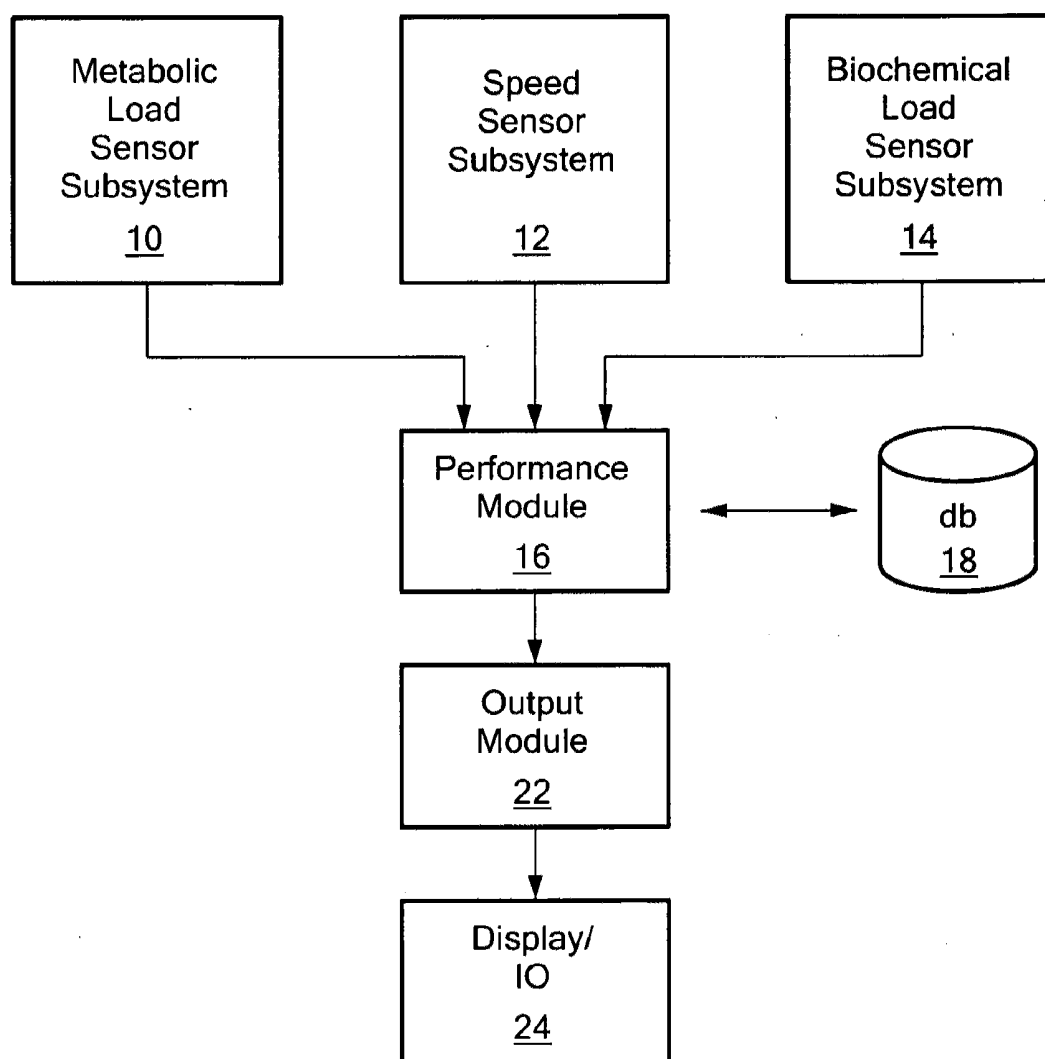**FIG. 1**

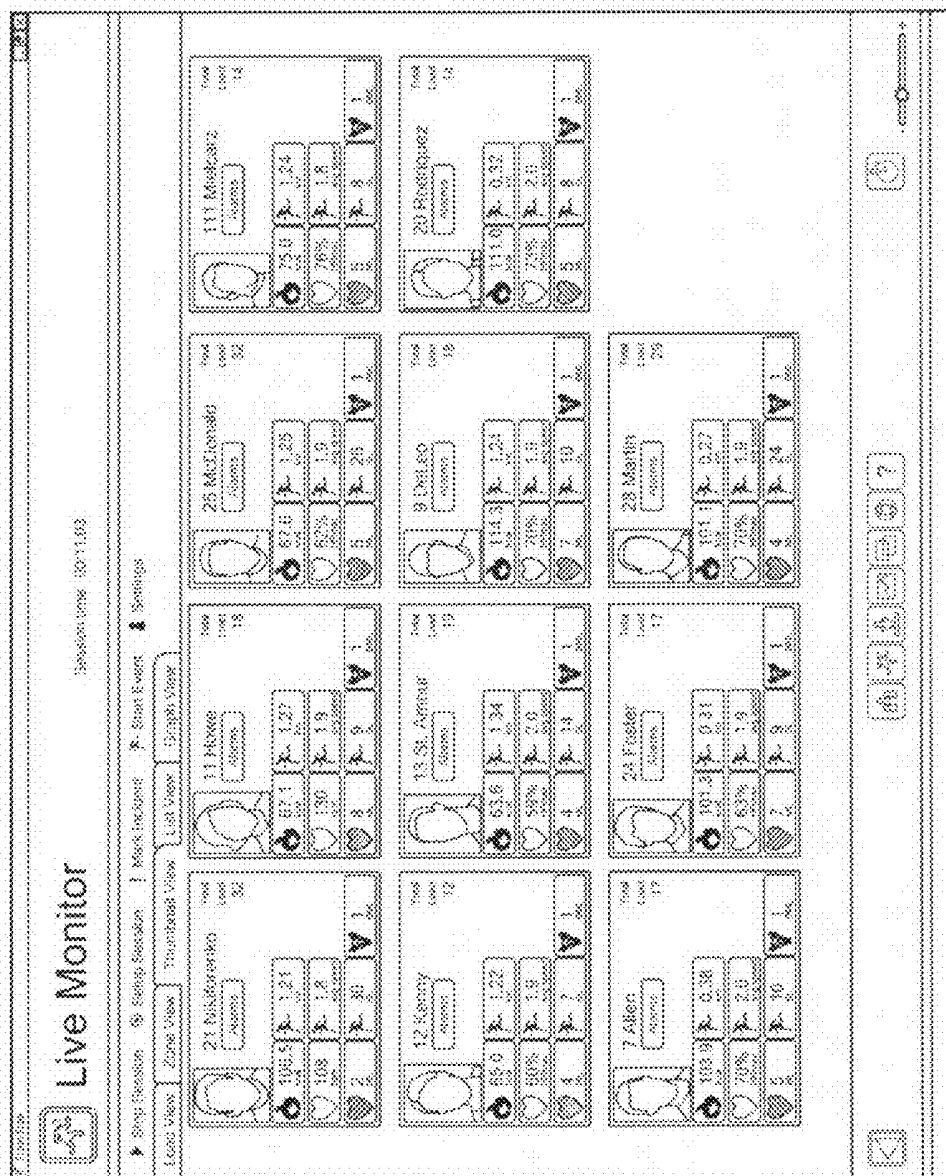


FIG. 2




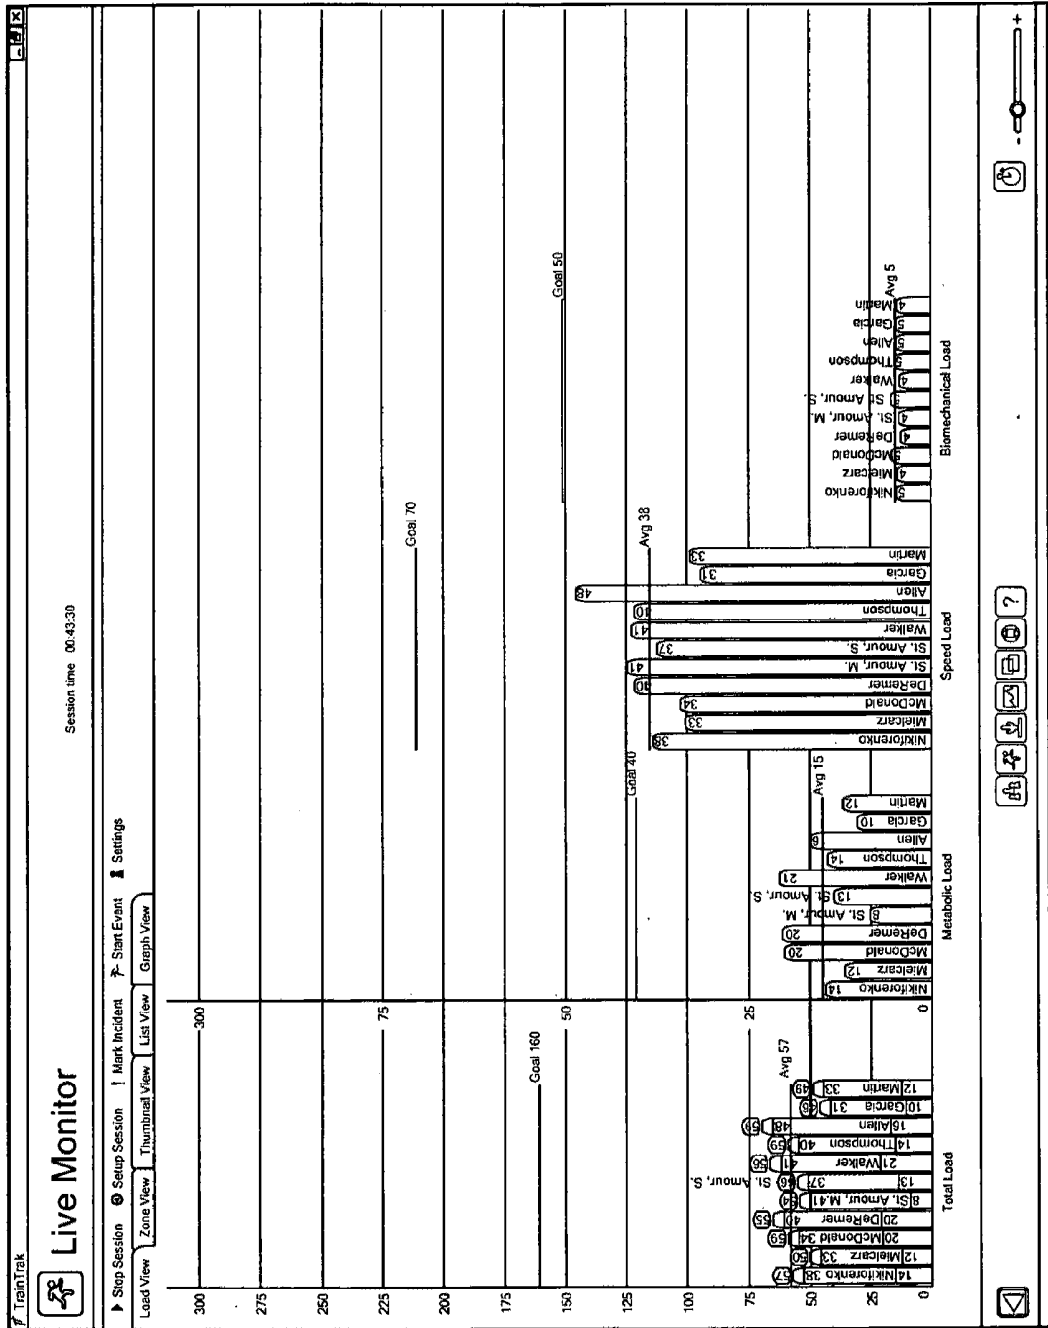


FIG. 3

***FIG. 4***

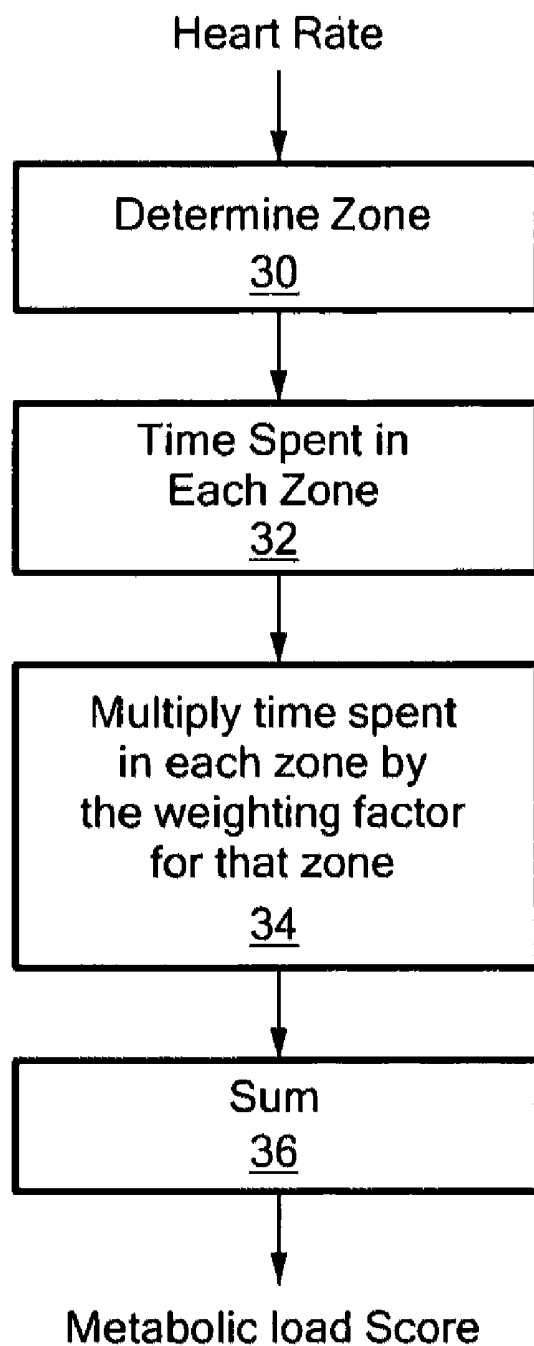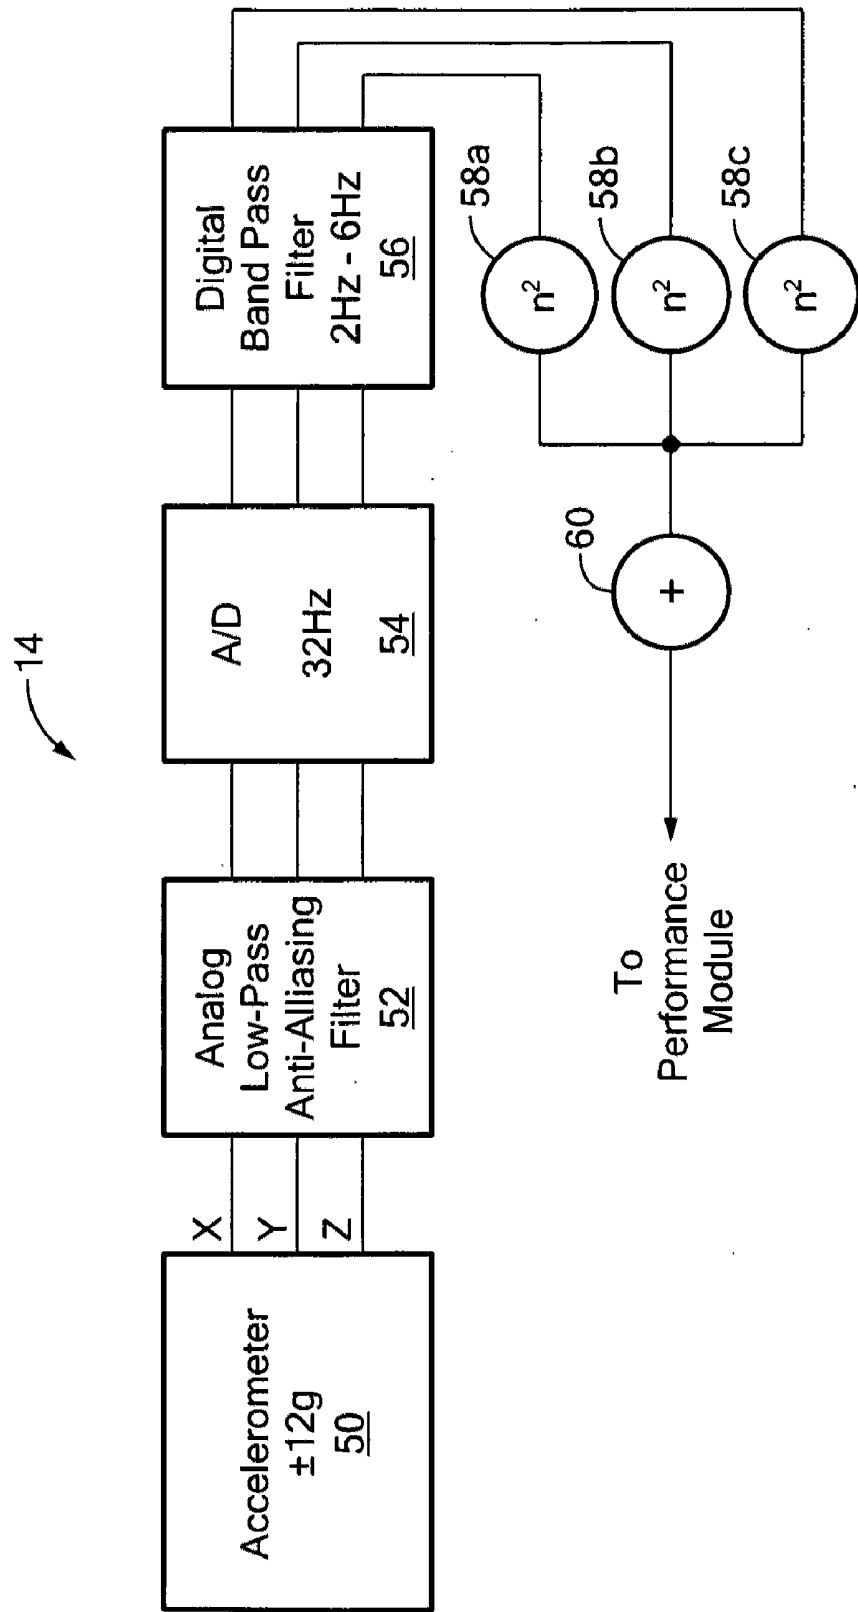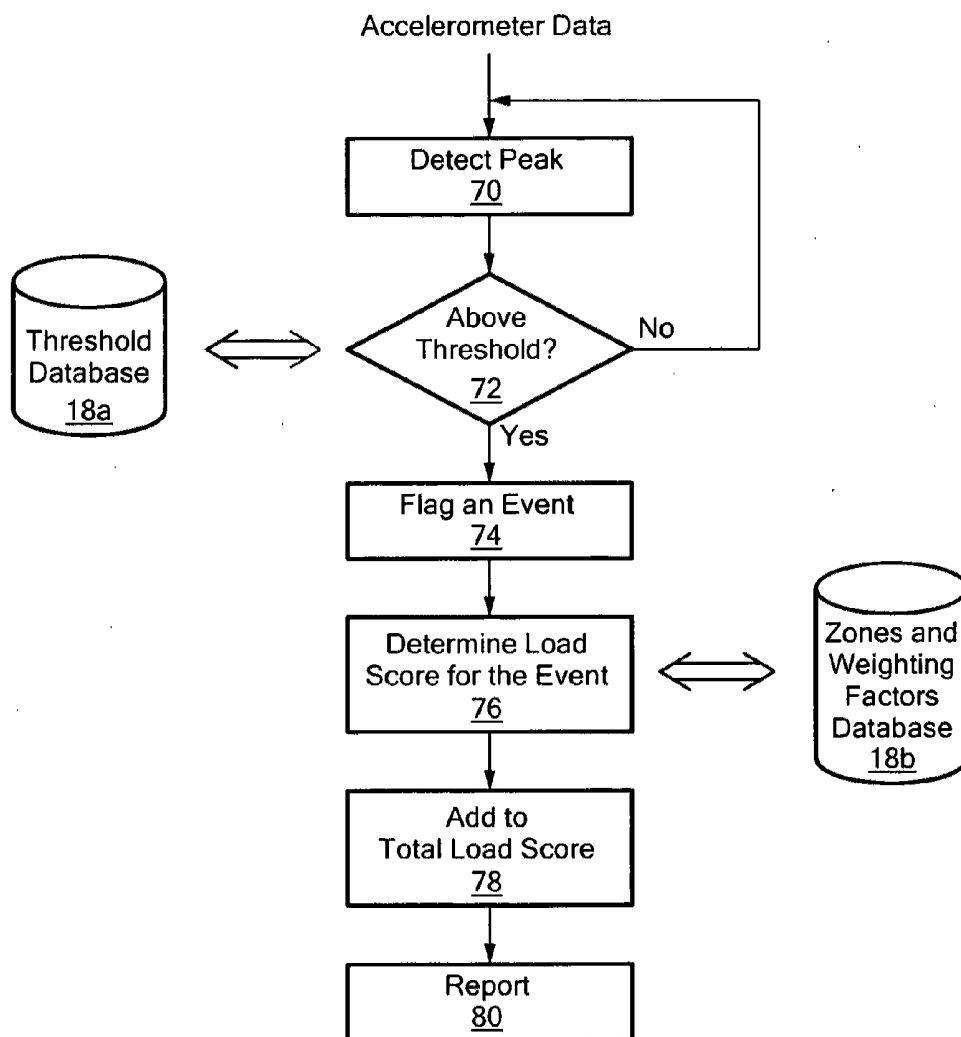

**FIG. 5**

**FIG. 6**

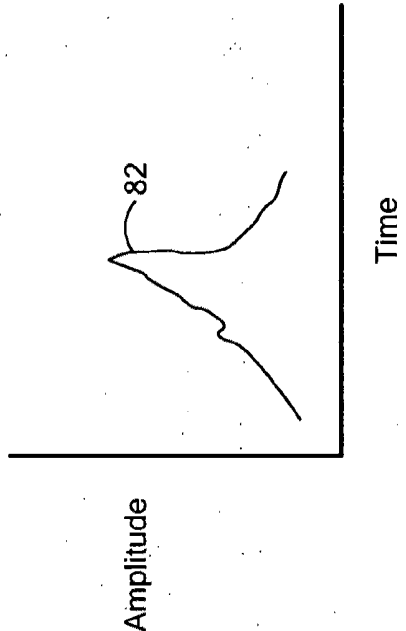


FIG. 7




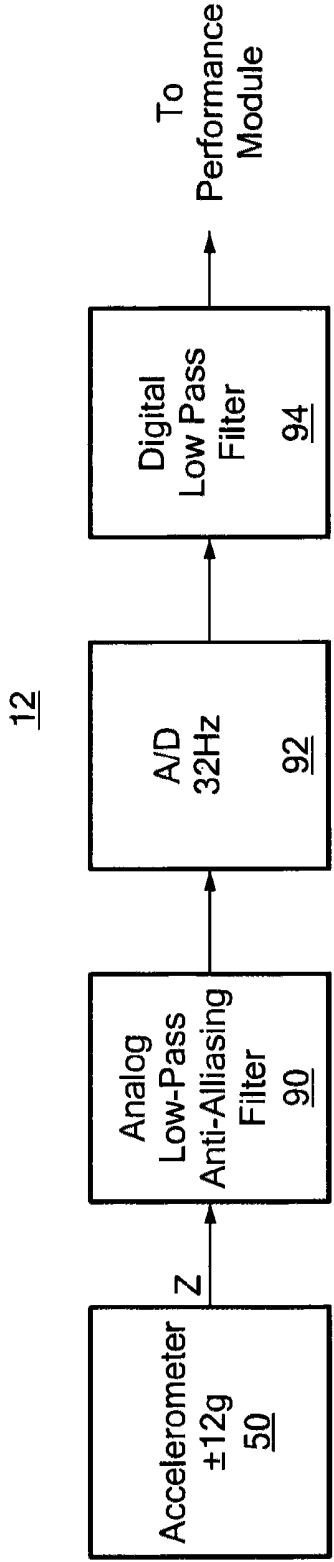


FIG. 8


**FIG. 9**

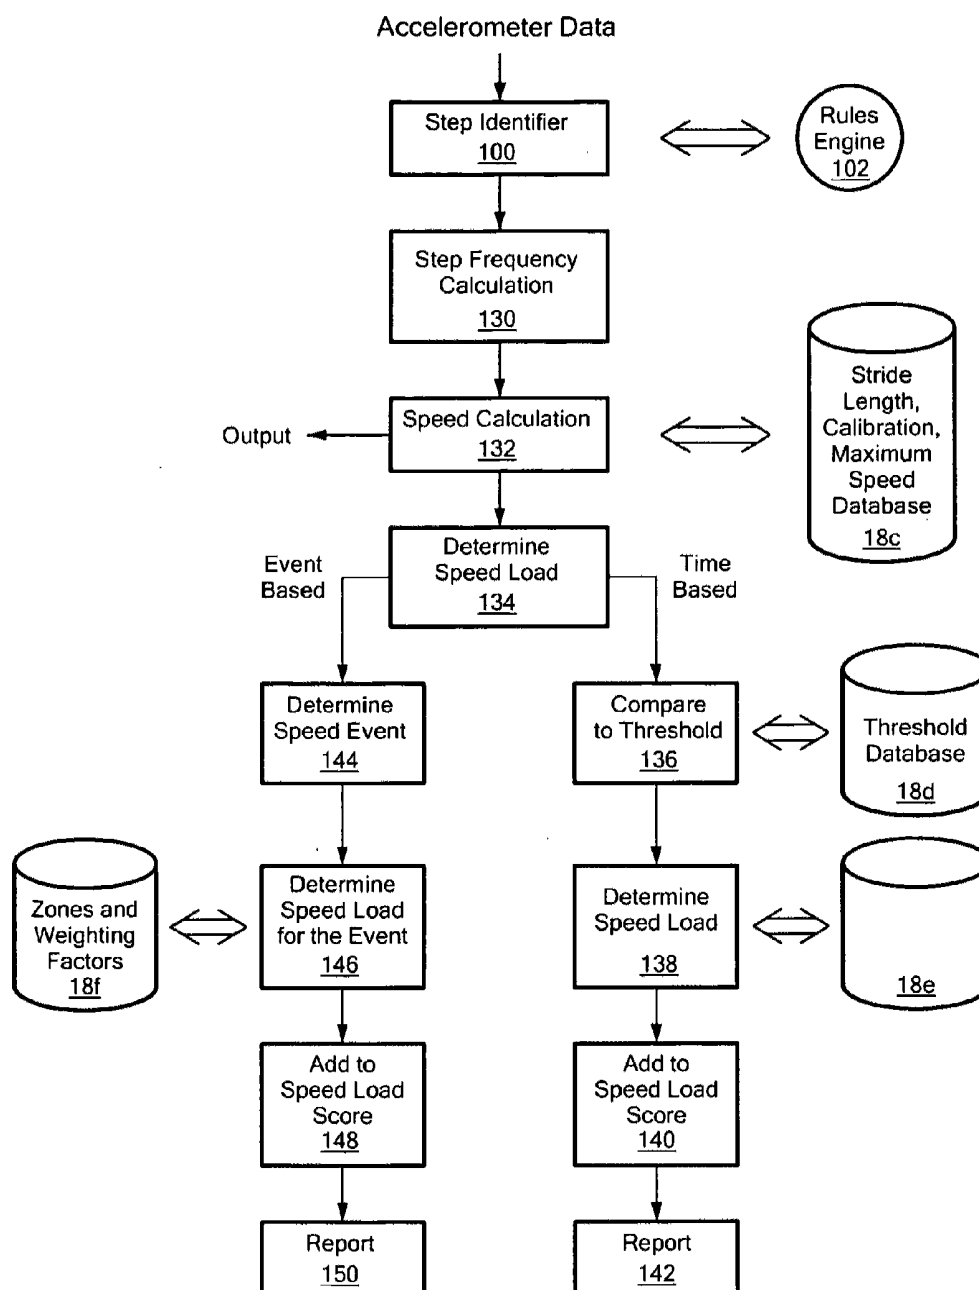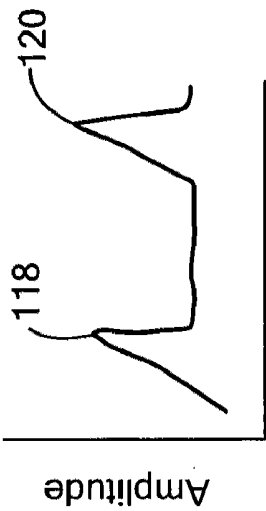


**FIG. 10A**

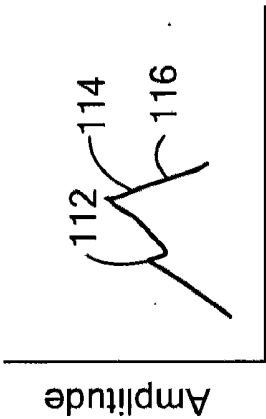


**FIG. 10B**

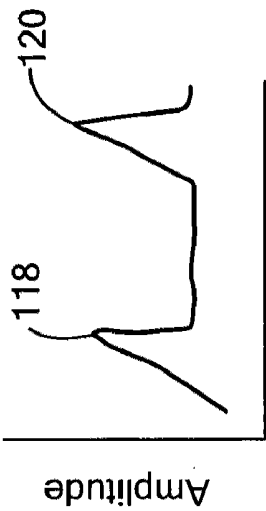


**FIG. 10C**

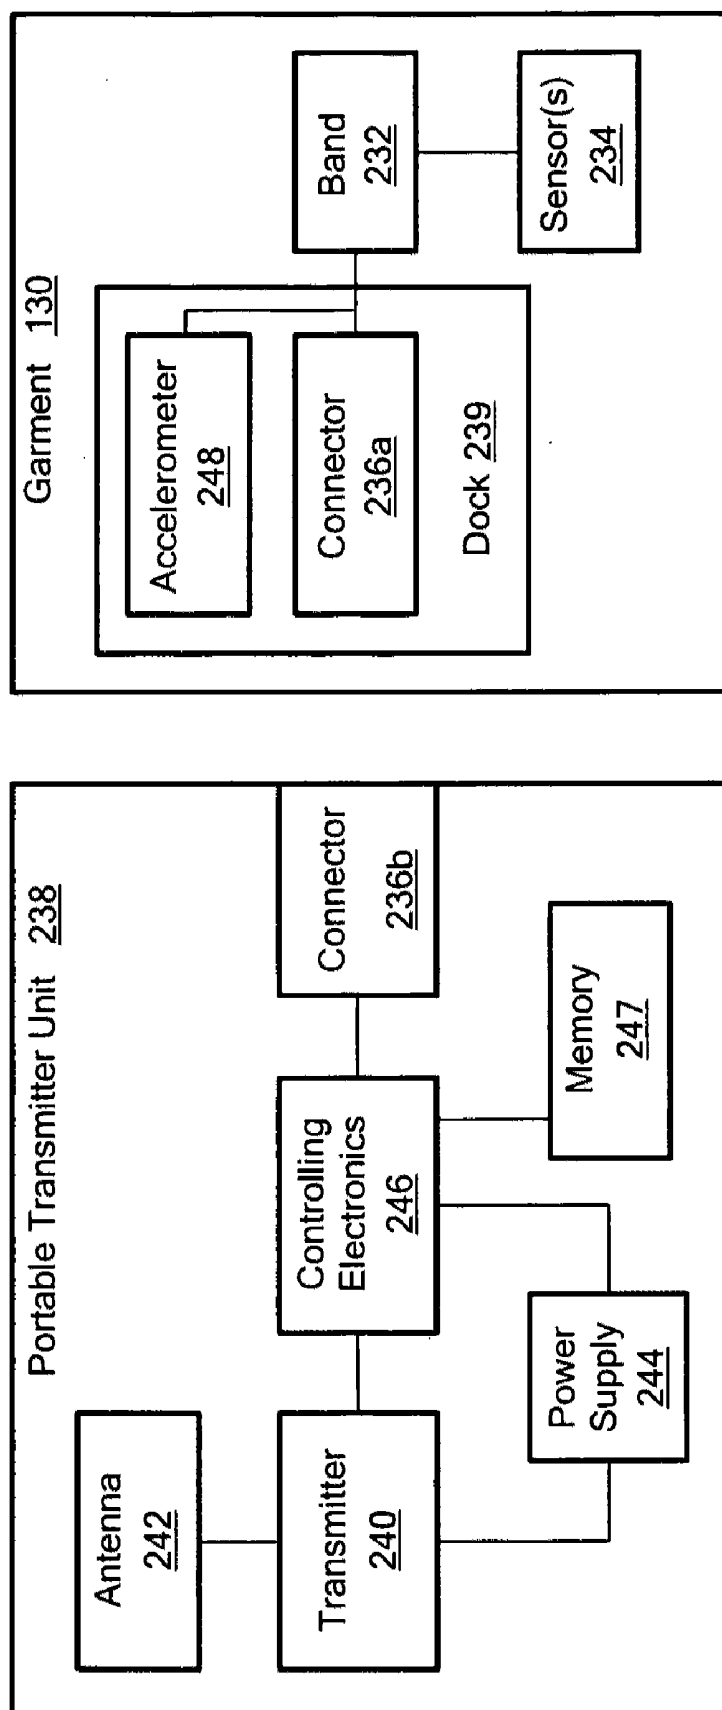


**FIG. 11**

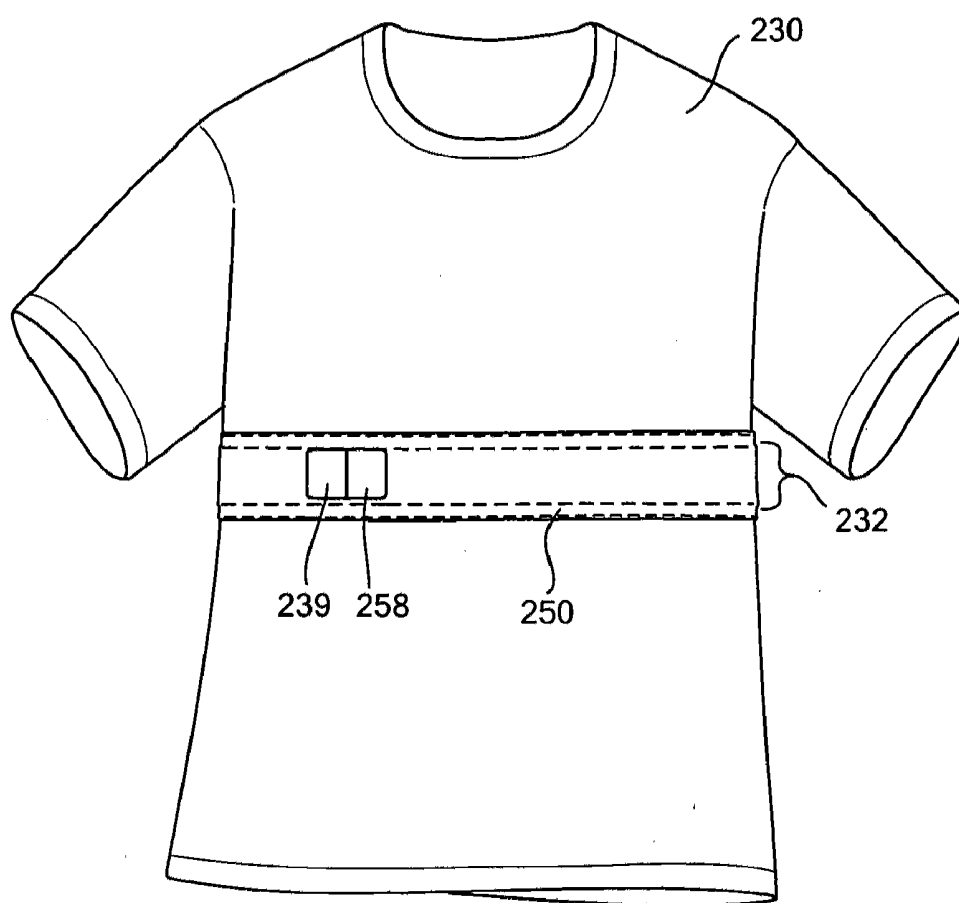


**FIG. 12**

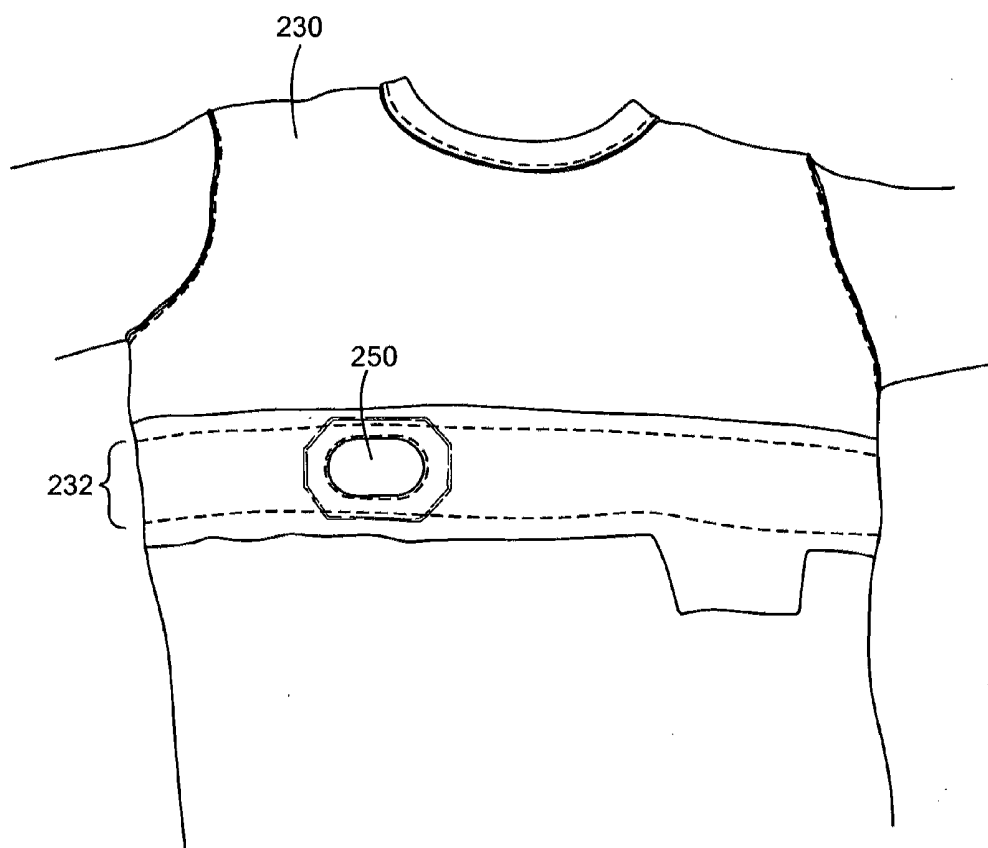


**FIG. 13**

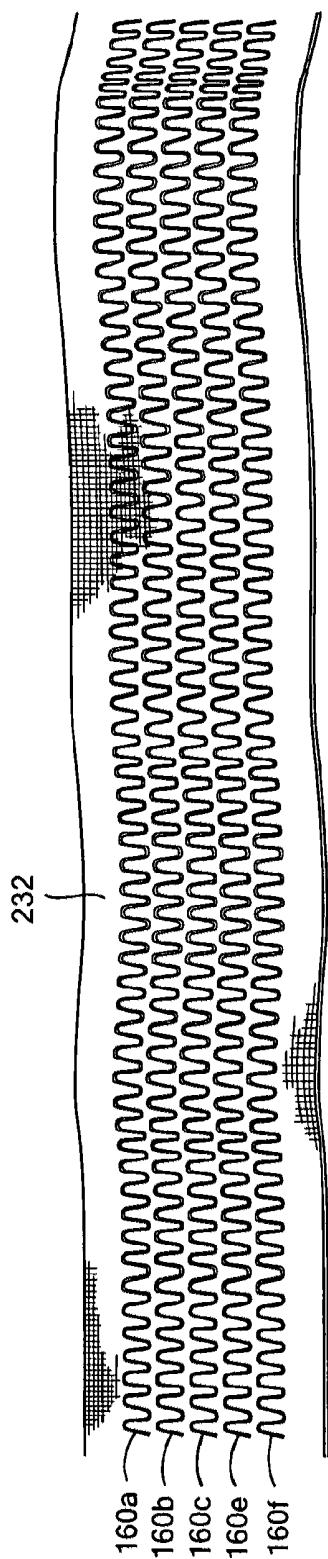


**FIG. 14**

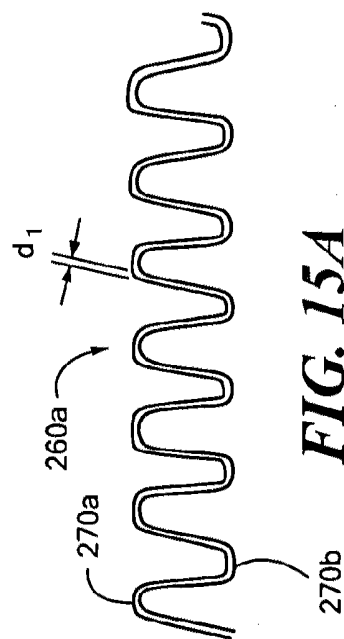


**FIG. 15A**

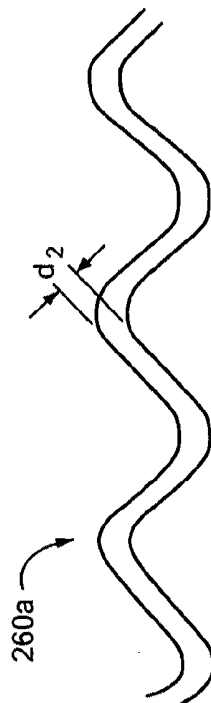


**FIG. 15B**

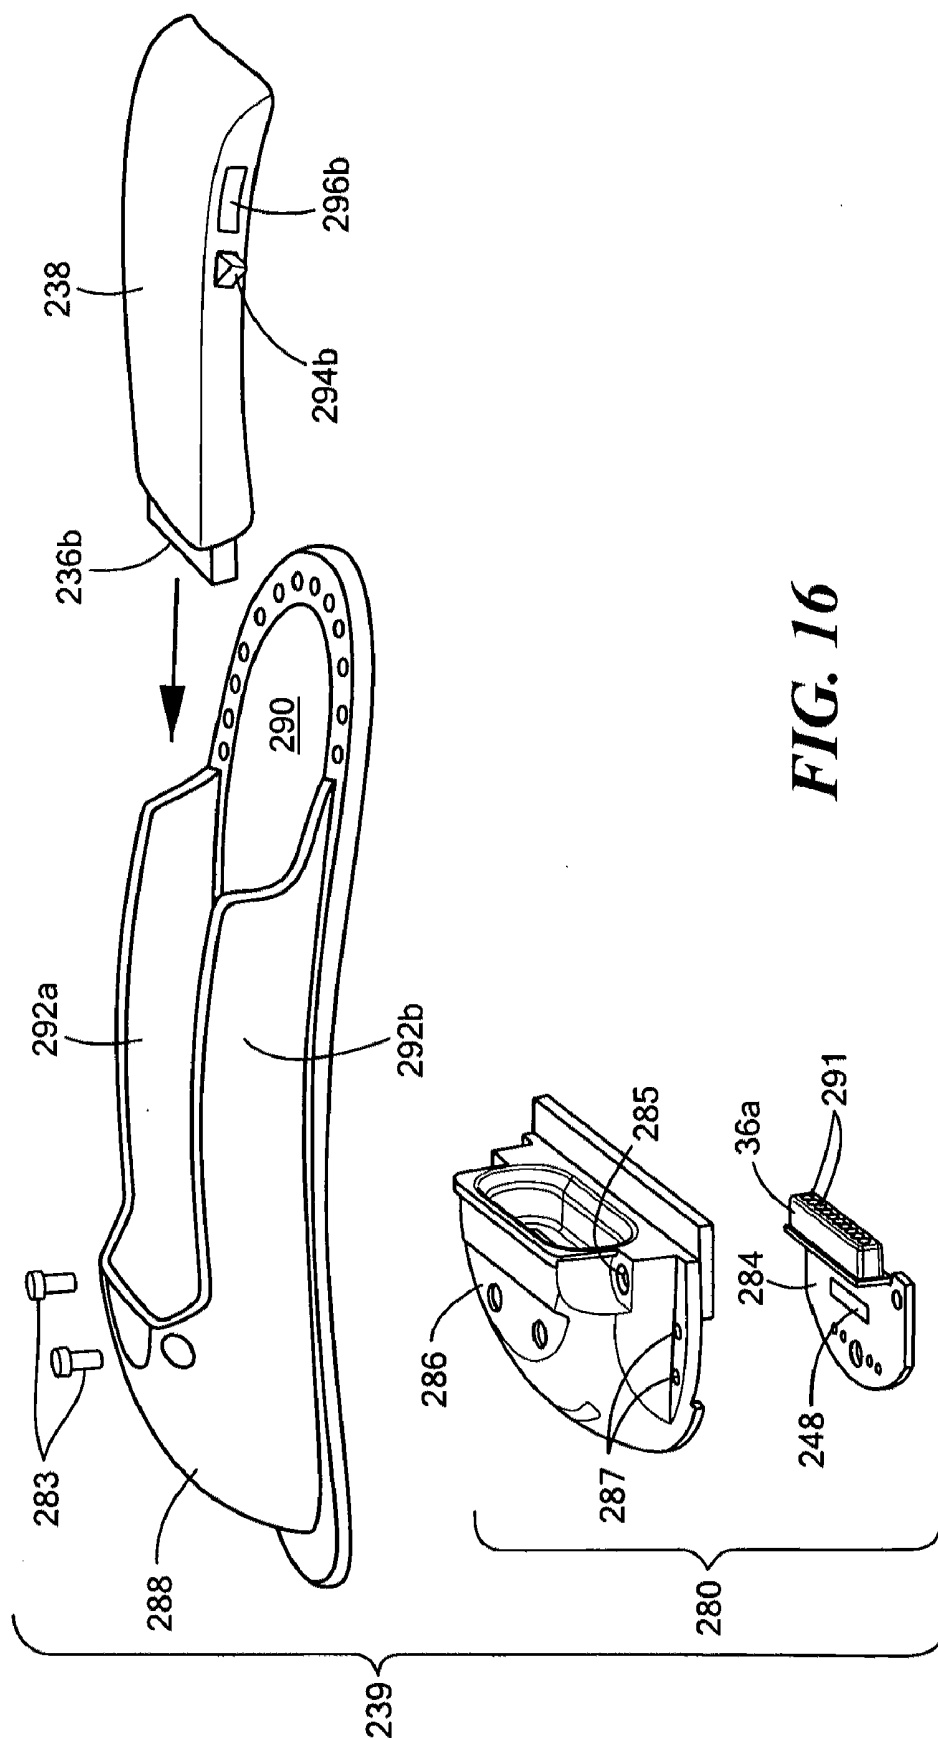

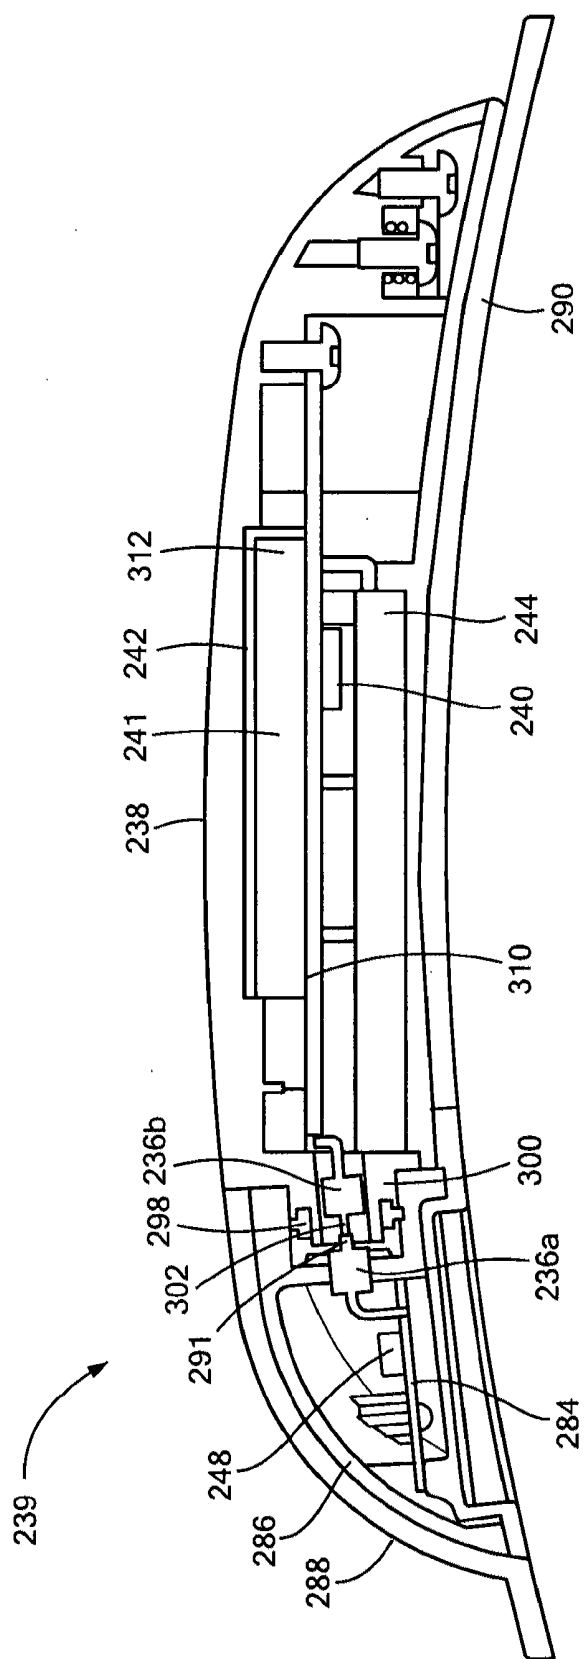

**FIG. 17**

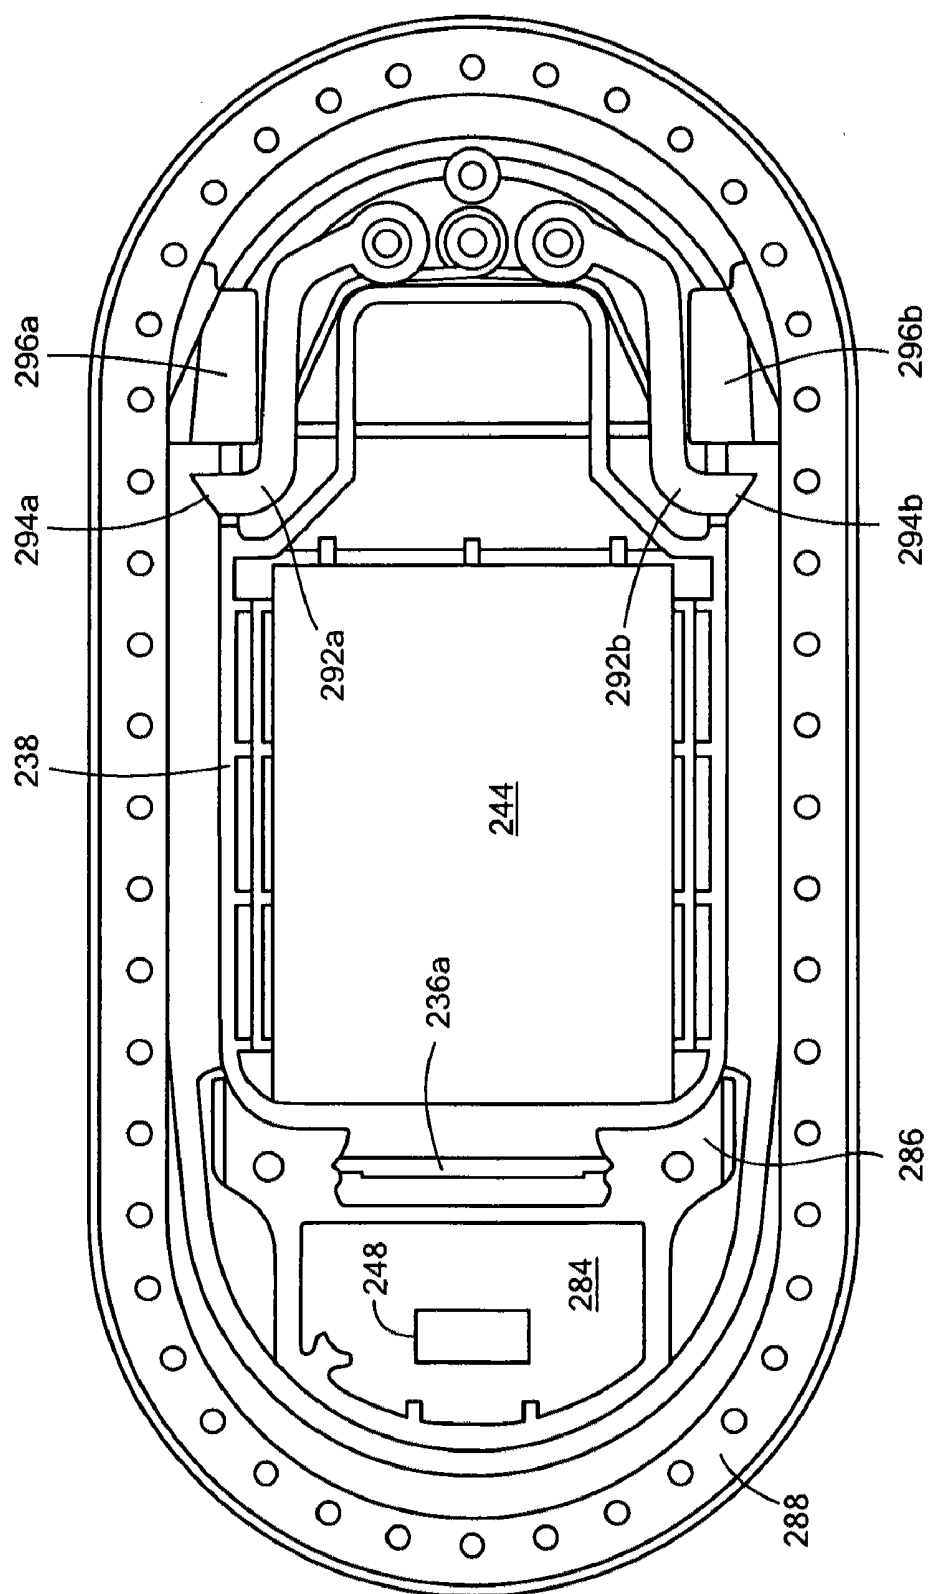

**FIG. 18**

## PHYSIOLOGICAL STATUS MONITORING SYSTEM

### FIELD OF THE INVENTION

**[0001]** The subject invention relates to physiological monitoring systems.

### BACKGROUND OF THE INVENTION

**[0002]** Various physiological monitoring systems have been proposed. Some determine only speed and distance. Others monitor the heart rate, respiration rate, and the like of an athlete, soldier, or first responder. Polar U.S.A., offers a Team<sup>2</sup> product in which athletes wear a chest strap equipped with a heart rate monitor and a transmitter which transmits heart rate data to a wristwatch worn by each athlete and also to a base station connected to a personal computer monitored by a coach and/or trainer. It is also known to display a person's heart rate and to relate the heart rate to minimums, maximums, percentages of the maximum, and the like. See, for example, U.S. Pat. No. 7,076,291 incorporated herein by this reference. Zones (e.g., maximum, performance, fat burning, warm up, and the like) are also known, and they are typically based on percentages of a person's maximum heart rate. See, for example, U.S. Pat. No. 5,769,755 incorporated herein by this reference.

### BRIEF SUMMARY OF THE INVENTION

**[0003]** Coaches and trainers, as discovered by the applicant hereof, are most desirous of knowing their athletes heart rate and speed and also the biomechanical load experienced by each athlete. In a given workout, two athletes may raise their heart rates to about the same level but one athlete may be working harder than the other because he is moving faster and/or is experiencing higher loads.

**[0004]** Thus, heart rate data alone may not tell the whole story. The subject invention provides a novel method of providing coaches and trainers with the data they desire most. A new physiological monitoring system is provided which is ergonomic in design. Such a system allows coaches, trainers, and athletes to monitor various loads experienced by athletes in training, practice, and games.

**[0005]** The subject invention results from the realization, in part, that, in one example, a better physiological monitoring system includes a performance module, implemented in software, that calculates various loads experienced by an athlete (e.g., metabolic load, speed load, and biomechanical load) where each load is a function of a sensed parameter, various zones, and a weighting factor for each zone in order to arrive at a total load score which can be compared with a target load score so a coach or trainer can tailor practices and even change a practice schedule during a given practice in order to reach a desired target load for each athlete and/or for the team as a whole.

**[0006]** The subject invention features a load score system comprising a metabolic sensor for a subject configured to output metabolic data for the subject, a biomechanical load sensing subsystem for the subject configured to output biomechanical data, and a speed sensor subsystem for the subject configured to output speed data. One or more databases include zones and a weighting factor for each zone for metabolic data, biomechanical load data, and speed data. A performance module is responsive to the metabolic data, the biomechanical load data, and the speed data and the one or

more data bases and is configured to calculate a metabolic load score for the subject, calculate a biomechanical load score for the subject, and calculate a speed load score for the subject. An output module is configured to display the subject's calculated metabolic, biomechanical, and speed load scores.

**[0007]** In one version, the biomechanical load sensing subsystem and the speed sensor subsystem include an accelerometer such as a three axis accelerometer. The biomechanical load sensing subsystem includes means for processing the outputs of the three axis accelerometer and the speed sensor subsystem includes means for processing one output of the three axis accelerometer.

**[0008]** In one example, the performance module is configured to detect peaks in the biomechanical load data above a threshold, detect events based on the peaks, and for each event determine a zone for an a weighting factor to be applied to biomechanical load data to output a biomechanical load score for the subject. The speed sensor subsystem may be configured to identify steps and their frequency to determine speed data. The performance module is typically configured to determine a zone for and a weighting factor to be applied to the speed data to output a speed load score for the subject. The performance module is typically configured to determine a zone for and a weighting factor to be applied to the metabolic data to output a metabolic load score for the subject. In one preferred example, the metabolic sensor is a heart rate sensor.

**[0009]** Also, the performance module may include a clustering function configure to increase a load score by a predetermined factor if a predetermined number of load events occur within a predetermined time period.

**[0010]** The system may further include a garment and a band integrated with the garment including respiration sensing conductors and one or more additional conductors connected to a heart rate sensor. A dock is attached to the garment and the dock includes a receptacle with a cover secured to the band. A printed circuit board is associated with the cover and includes an accelerometer for the biomechanical load sensing subsystem and the speed sensor subsystem. A first connector component is electrically connected to the respiration sensing conductors and the at least one additional conductor. A housing is attached to the garment and receives the receptacle therein. A portable transmitting unit is removeably received in the dock and includes a second connector component mateable with the first connector component. In this way, the load scores can be transmitted to a base unit.

**[0011]** The subject invention also features a physiological monitoring method comprising determining heart rate data of a person, the person's speed data, and a biomechanical load data experienced by the person. A set of zones is established for metabolic load, speed load, and biomechanical load. Each zone has an upper threshold, a lower threshold, and a weighting factor. Based on the determined heart rate data, the time spent in each metabolic load zone is determined which is then multiplied by the weighting factor for each load zone and by the time spent in each zone to determine a metabolic load score. Based on the speed data, the determined speed data is allocated amongst the various speed zones based on the thresholds for each zone and the weighting factor for each zone is applied to determine a speed load score. Based on the biomechanical load data, the determined biomechanical load data is allocated amongst the various biomechanical load zones based on the threshold for each zone and the weighting factor is applied for each zone to determine a biomechanical

load score. A total load score is based on the metabolic load score, the speed load score, and the biomechanical load score.

[0012] One physiological monitoring system in accordance with the invention features a metabolic sensor configured to output metabolic data for a subject, a biomechanical load sensing subsystem for the subject configured to determine a biomechanical load event, and a speed sensor subsystem for the subject configured to determine a step event and to calculate speed data based on step events and the time between step events. One or more databases store zones and a weighting factor for each zone for metabolic data, biomechanical load, and speed data. A performance module is responsive to the metabolic data, biomechanical load, and speed data and the one or more databases and is configured to calculate a metabolic load score for the subject by determining, for metabolic data, a zone for the metabolic data and a weighting factor for the metabolic data and, based on the zone and weighting factor, to determine a metabolic load score. A speed load score for the subject is calculated by determining, for speed data, a zone for the speed data and a weighting factor for the speed data, and based on the zone and weighting factor, to determine the speed load score. A biomechanical load score for the subject is calculated by determining, for biomechanical load event, a zone for the biomechanical load event and a weighting factor for the biomechanical load event, and based on said zone and said weighting factor, to determine a biomechanical load score.

[0013] One load scoring system in accordance with the invention features a first sensor configured to output a first type of data for a subject and a second sensor configured to output a second type of data for the subject. One or more databases store zones and a weighting factor for each zone for the first and second types of data. A performance module is responsive to the first and second types of data, the zones, and the weighting factors and is configured to calculate a first load score for the first type of data, and calculate a second load score for the second type of data. An output module is configured to display a subject's first and second load scores.

[0014] The subject invention, however, in other embodiments, need not achieve all these objectives and the claims hereof should not be limited to structures or methods capable of achieving these objectives.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0015] Other objects, features and advantages will occur to those skilled in the art from the following description of a preferred embodiment and the accompanying drawings, in which:

[0016] FIG. 1 is a highly schematic block diagram showing the primary components associated with an example of a physiological monitoring system in accordance with the subject invention;

[0017] FIG. 2 is a depiction of the display shown in FIG. 1 displaying various data for several athletes during a practice in accordance with an example of the subject invention;

[0018] FIG. 3 is a depiction of the display shown in FIG. 1 showing various loads scores for the athletes;

[0019] FIG. 4 is a flow chart depicting how the performance module shown in FIG. 1 determines a metabolic load score for a subject in accordance with an example of the invention;

[0020] FIG. 5 is a block diagram showing the primary components associated with an example of the biomechanical load sensor subsystem shown in FIG. 1;

[0021] FIG. 6 is a flow chart depicting the primary steps carried out by the performance module shown in FIG. 1 to determine a subject's biomechanical load score in accordance with an example of the invention;

[0022] FIG. 7 is a graph showing how peaks are detected in order to flag events in accordance with the processing depicted in FIG. 6;

[0023] FIG. 8 is a block diagram showing the primary components associated with an example of a speed sensor subsystem shown in FIG. 1;

[0024] FIG. 9 is a flow chart depicting, in one example, the primary steps associated with a speed sensor subsystem and/or the performance module shown in FIG. 1 for determining a subject's speed load score;

[0025] FIGS. 10A-C are graphs depicting how steps are identified during the processing depicted in FIG. 9;

[0026] FIG. 11 is a block diagram depicting the primary components associated with an example of a physiological monitoring system in accordance with the subject invention;

[0027] FIG. 12 is a schematic front view of an example of a physiological monitoring shirt in accordance with the subject invention;

[0028] FIG. 13 is a schematic front view of the inside of the shirt shown in FIG. 12;

[0029] FIG. 14 is a schematic front top view of one embodiment of a stretchable band integrated into the shirt shown in FIGS. 12 and 13;

[0030] FIG. 15A is a highly schematic depiction showing conductors in the stretchable band of FIG. 14 when the band is in its relaxed state;

[0031] FIG. 15B is a highly schematic view similar to FIG. 15A except that now the distance between the conductors in the band has changed because the band is in its expanded state;

[0032] FIG. 16 is a schematic exploded front view showing the primary components associated with an example of a docking station attached to the shirt shown in FIGS. 12 and 13 for a portable transmitting unit shown;

[0033] FIG. 17 is a schematic cross-sectional side view of a portable transmitting unit in accordance with the subject invention inserted into the docking station on the garment; and

[0034] FIG. 18 is a schematic cross-sectional top view of the subassembly shown in FIG. 17.

#### DETAILED DESCRIPTION OF THE INVENTION

[0035] Aside from the preferred embodiment or embodiments disclosed below, this invention is capable of other embodiments and of being practiced or being carried out in various ways. Thus, it is to be understood that the invention is not limited in its application to the details of construction and the arrangements of components set forth in the following description or illustrated in the drawings. If only one embodiment is described herein, the claims hereof are not to be limited to that embodiment. Moreover, the claims hereof are not to be read restrictively unless there is clear and convincing evidence manifesting a certain exclusion, restriction, or disclaimer.

[0036] FIG. 1 shows an example of one preferred physiological monitoring system including metabolic load sensor subsystem 10 typically including a heart rate sensor and/or respiration rate sensor. Speed sensor subsystem 12 and biomechanical load sensor subsystem 14 may share the same accelerometer. In one embodiment, the sensors are worn by

the athlete and the data from the sensors is transmitted wirelessly to a base station and/or personal computer which is programmed with software associated with metabolic load sensor subsystem **10**, speed sensor subsystem **12**, and biomechanical load sensor subsystem **14**. Each such subsystem may also include signal processing software and/or hardware as necessary.

[0037] Performance module **16** may be embodied in software running on a base station and/or a personal computer. Performance module **16** interfaces with one or more databases **18** populated with zone data, weighting factors, and, typically, calibration and other data. For example, athlete's names, ages, maximum heart rates, fastest speeds, maximum jump heights, and the like may be stored in database **18**. Alternatively, performance module **16** and database **18** may be embodied in software operating on a controller or processor which is a component of the physiological sensor system worn or carried by the athlete. Or, certain calculations performed by performance module **16** may be carried out on the worn subsystem while other calculations are performed on the base station.

[0038] Output module **22** configures the athlete's metabolic, speed, and biomechanical load scores for display/IO section **24**. Various views of the data can be selected via input module **20**. Typically, display/IO and output module **22** are associated with a base station monitored by a coach.

[0039] FIG. 2 shows an example of a report generated on display **24**, FIG. 1, wherein data for each athlete is displayed including the player's name, heart rate, average speed, metabolic load score (ML), speed load score (SL), and biomechanical load score (BML) as well as the athlete's total load score at any given time in the practice session. FIG. 3 shows each athlete's total load score, metabolic load score, speed load score, and biomechanical load score graphically displayed in relation to the other athletes' scores, an average, and a goal as set by the coach or trainer.

[0040] Typically, the metabolic zones include five individual zones each having a weighting factor as follows:

TABLE 1

METABOLIC LOAD % MaxHR			
Zone	Lower Threshold	Upper Threshold	Weighting Factor
5	95%	100%	1.75
4	85%	95%	1.4
3	75%	85%	.875
2	65%	75%	.4375
1	50%	65%	.175

[0041] These zone, thresholds, and weighting factors are stored in database **18**, FIG. 1.

[0042] Similarly, the speed and biomechanical zones may be established in database **18** as follows:

TABLE 2

SPEED LOAD m/sec			
Zone	Lower Threshold	Upper Threshold	Weighting Factor
5	8	—	8
4	6	8	5

TABLE 2-continued

SPEED LOAD m/sec			
Zone	Lower Threshold	Upper Threshold	Weighting Factor
3	5	6	2
2	3	5	1
1	1	3	0

TABLE 3

BIOMECHANICAL LOAD Gs			
Zone	Lower Threshold	Upper Threshold	Weighting Factor
5	8	—	9
4	5	8	6
3	3	5	3
2	2	3	2
1	1	2	1

[0043] The zones and weighing factors will vary depending on a number of factors including the type of sport, the coach's settings, and the like.

[0044] Performance module **16** is configured to determine, based on the data output of metabolic load sensor subsystem **10**, the time spent in each metabolic load zone of Table 1 and multiply the weighting factor for each zone by the time spent in each zone to determine a metabolic load score. Referring to Table 2, performance module **16** allocates the determined speed data amongst the various speed zones of Table 2 based on the thresholds for each zone and applies a weighting factor for each zone to determine a speed load score. An event based technique may also be used.

[0045] Performance module **16** also allocates the determined biomechanical load data against the various biomechanical load zones of Table 3 based on the thresholds for each zone and applies the weighting factor of Table 3 for each zone to determine a biomechanical load score. A running total of each load score is calculated and displayed. A total load score is also calculated based on the metabolic load score, the speed load score, and the biomechanical load score. In one example, the total load score is a summation of all the individual load scores. In other examples, the individual load scores can be weighted before calculating the total score.

[0046] In one example, suppose athlete A's heart rate monitor (**10**, FIG. 1) outputs data indicating athlete A, during a given practice, spends five minutes in zone five, five minutes in zone four, five minutes in zone three, twenty-five minutes in zone two, and thirty-minutes in zone one. Applying the weighting factors for each of these zones, athlete A's metabolic load for that practice, as determined by performance module **16**, is 37.1875 calculated thus:

ZONE	TIME	WEIGHT	SCORE
5	5 minutes	1.75	8.75
4	5 minutes	1.4	7.00

-continued

ZONE	TIME	WEIGHT	SCORE
3	5 minutes	.875	4.375
2	25 minutes	.4375	10.9375
1	35 minutes	.175	6.125
			37.1875

**[0047]** FIG. 4 depicts how performance module 16, FIG. 1 determines the metabolic load score of a person. Based on heart rate data from metabolic load sensor subsystem 10, FIG. 1, the zone is determined, step 30. For example, a heart rate which is 87% of a person's maximum heart rate is determined to be zone 4 based on the data stored in database 18, FIG. 1. The person's stored maximum heart rate can be a fixed number, a heart rate based on age, or a heart rate based on the person's actual heart rate either entered manually via input module 20 or detected automatically via metabolic load sensor subsystem 10 when the person is required to perform some task which will raise his heart rate in a prescribed way in order to calculate the maximum heart rate.

**[0048]** In step 32, FIG. 2, the time in each zone is calculated and in step 34, the time spent in each zone is multiplied by the weighting factor of each zone. Summing these calculations, step 36, results in a metabolic load score. Performance module 16 adds this score to the speed load score and the biomechanical load score to determine a total load score.

**[0049]** Output module 22, FIG. 1 stores and/or displays all the load scores on display 24, for example, a base station wirelessly receiving data from the sensors worn by the person and/or a personal computer or handheld device linked to the base station. The software discussed herein may reside on a base station, PDA, or personal computer and/or may be split amongst the various platforms.

**[0050]** The software also typically allows for set ups of team and player data, live monitoring of physiological data for each player, the ability to download and database data, and the ability to provide an analysis, reports, and assistance. A team set up screen allows the coach or trainer to name the sport adjusted time, weighting of load scores based on the sport or activity being monitored, and adjust the positions played by each athlete, and player status. In a team member screen, rosters can be imported, pictures can be associated with each team player, and each player's number, name, date of birth, weight, height, maximum heart rate, resting heart rate, academic year or year on the team, maximum speed, and the like can be entered and edited. Alarms can be included and can be activated based on a player by player basis. All of the alarms can be set to sound an alert if a maximum or a minimum quantity is reached. Settable alarms can include providing an output if one or more goals are not reached or are projected to be exceeded by a predetermined amount, alarms for each load score, and the like. Zone alarms and cumulative alarms are also possible. A planning module allows coaches to plan practices and drills and the ability to add a session name, and then define events in the sessions each with variables in the fields of cumulative targets, conditions, cumulative alarms, zone alarms, and positions. A calibration module allows coaches to measure maximum heart rate, resting heart rate, and respiration volume. Step frequency at walking, running, and sprinting speeds can also be measured and calculated. For biomechanical load, the calibration module allows

the coach to measure a maximum force achieved during a vertical jump and during an acceleration/de-acceleration event.

**[0051]** A live monitor screen output allows a coach to start a session, set up a session, mark an incident, start an event, and the like. Goals for the players can be set including goals for metabolic load, speed load, biomechanical load, total load, time, distance, calories, and the like. Numerous different outputs are possible in accordance with the subject invention including a load view where the coach is able to view the load score for each player in the categories of total load, metabolic load, speed load, and biomechanical load. In a zone view, the current performance of all players in percentage of maximum heart rate, maximum speed, calories per minute, respiration rate, and the like can be viewed. A coach is able to view each of the players statistics for time above the target, heart rate, time above the target respiration rate, time above the target speed, total distance, total calories, number of sprints, the time in a sprint zone, the time in a run zone, metabolic load, speed load, biomechanical load, total load, and number of biomechanical events. Team averages for each parameter, position averages, and the like can also be displayed. In a graph mode, a selectable number of players, positions, or the entire teams can be viewed via graphs relating to heart rate, speed, calories per minute, respiration rate, metabolic load, speed load, biomechanical load, and total load. In the analysis mode, results can be reviewed and compared with previous results, players can be compared with each other, players workouts can be compared with each other, and various graphs over time can be established showing a plot of the total load, metabolic load, speed load, and/or biomechanical load viewed by intervals such as monthly, every three-months, every six-months, or a custom length of time. An analysis can also be performed for single events, or trends over time. The analysis can be linked to a reporting function for storing reports saved in the analysis segment of the software.

**[0052]** The result is a highly versatile system enabling a coach or trainer to change a practice as necessary and compare real time player performance versus goals established, view one players performance in view of the rest of the team's performance, and to analyze a player in one position on the team with other players in that same position.

**[0053]** The system can also be used to monitor an athlete rehabilitating after an injury. The player's loads at each practice or training session can be controlled per a prescribed schedule, and comparisons can be made to the athlete's pre-injury status thus indicating whether he is ready return to play.

**[0054]** Event based clustering awards are also possible. For example, suppose that three significant biomechanical load events happen in a very short time frame. In such case, performance module 16, FIG. 1 can detect such a cluster and increase the overall score by some predetermined factor such as 50%. For collisions, as determined by performance module 16 based on the output of biomechanical load sensor subsystem 14, performance module 16 may detect a collision (for example, any accelerometer output greater than 10 gs) and provide an identification of a collision event and also enable an increased score factor.

**[0055]** FIG. 5 shows an example of a biomechanical load sensor subsystem 14 including three axis accelerometer 50. The outputs of accelerometer 50 are passed through analog low-pass anti-aliasing filter 52 and converted to digital signals at 32 Hz A/D converter 54. These digital signals are filtered

via digital band pass filter **56** (2 Hz-6 Hz) and each filtered signal is squared as shown as **58a-58c** and added together as shown at **60**. This signal is then input to performance module **16**, FIG. **1**.

**[0056]** Software, (typically operating on a microcontroller or equivalent) then detects any peaks, step **70**, FIG. **6**. If the peak is above the thresholds stored in database **18a**, as shown at step **72**, then a biochemical load event is flagged, step **74**, when the signal crosses the threshold on the down slope. The load score for that event is then determined, step **76**, based on the zones and weighting factors for each zone (see Table 3 above) using the data stored in database **18b**. The load score for each event is then added to the current total biomechanical load score, step **78**, which is reported, step **80** (e.g., via output module **22**, FIG. **1** for display on display **24** as shown in FIG. **3**).

**[0057]** For example, suppose an athlete has a present biomechanical load score of 10 and then he jumps resulting in signal output at **60**, FIG. **5** which looks like that shown in FIG. **7**. Peak **82** is detected and it is above the threshold stored in data base **18a**. Peak **82** is flagged as an event. The amplitude of peak **82** is in zone 3 of Table 3. Applying the weighting factor (step **76**, FIG. **6**) results in a biomechanical load score of 3 for this event and now the athlete's total biomechanical load score is 13.

**[0058]** In one example, speed sensor subsystem **12**, FIG. **8** uses the Z axis output of accelerometer **50** which is passed through analog low-pass anti-aliasing filter **90** and 32 Hz A-D converter **92**. After filtering this digital signal in digital low pass filter **94**, the output is used to identify steps, step **100**, FIG. **9**. A rules engine **102** can be used to identify steps as shown.

**[0059]** For example, a peak **110**, FIG. **10A**, which is below a threshold (e.g., 1G) is not considered to be a step event. A peak above the threshold as shown at **112** (FIG. **10B**) followed by a higher peak **114** followed by a drop off **116** greater than or equal to one-half of peak **114** is characterized as a step (i.e., peak **112** is likely a heel strike and peak **114** is likely a toe strike). Another possible rule is that peaks **118** and **120**, separated by too long a time as shown in FIG. **10C**, do not constitute a step.

**[0060]** Step frequency calculator **130**, FIG. **9** then determines the time between steps and speed calculator **132** determines speed. This data may be output for each athlete as shown in FIG. **2** and the athletes speed may also be averaged as shown. Distance may also be calculated based on the elapsed time. Speed calculator **132** may use data stored in data base **18c** (e.g., stride length for that athlete, an average stride length, a maximum speed for the athlete, calibration data, and the like) since speed is a function of step frequency and one or more parameters such as stride length. Typically, steps **100**, **130** and **132** are performed in software implemented in speed sensor subsystem **12**, FIG. **1**.

**[0061]** Once an athlete's speed has been determined, performance module **16** calculates the speed load. Again, software is typically used. The speed load, step **134**, FIG. **9**, is then determined using an event based routine and/or a time based routine. For time based criteria, a given speed counts toward a load score when it is above a minimum preset threshold, step **136**, stored in database **18d**. The speed load is determined, step **138**, for example, using Table 2 above (stored in database **18e**). The speed load is then added to the present load score, step **140**, and reported, step **142**.

**[0062]** For event based speed load determinations, a speed event is determined, step **144**, based on the speed over a given stored time interval. For that speed event, the speed load is determined, step **146**, using the zones and weighting factors (see Table 2) stored in database **18f**. The present speed load score is added to the athlete's total speed load score, step **148**, and reported, step **150**. Reported speed load scores for each athlete are shown in FIG. **2-3**.

**[0063]** For example, suppose an athlete has a current speed load score of 30. Speed load calculator **132**, FIG. **9** determines the athlete is running at nine meters per second and at step **144** this event last for ten seconds. So, a speed event is detected. At step **146**, the athlete's speed load score for that event is determined to be 8 applying the weighting factor of Table 2 for a speed event in zone 5. The athletes speed load score is now 38.

**[0064]** For speed load calculations based on time in zone, assume a subject spends the following time in each zone:

ZONE	TIME	WEIGHT/MINUTES	SCORE
5	0:45	8	6
4	2:15	5	11.25
3	8:45	2	17.5
2	16:15	1	16.25
1	27:30	0	0
			68.5

**[0065]** The time in minutes is multiplied by the score weight for that zone. Then the total for each zone is summed for speed load score.

**[0066]** Another possible feature includes clustering, wherein, for example, an athlete's load score is increased by some factor (e.g., 50%) for events which occur within a short pre-determined period of time. For example, if an athlete experiences three biomechanical load events in zone three all within six seconds, then the calculated biomechanical load score can be automatically increased by 50%.

**[0067]** A new physiological monitoring system in accordance with the subject invention may include, in one example, a garment (e.g., a shirt) **230**, FIG. **11** including a band **232** associated therewith. The band may include sensing means and/or may be attached and/or electrically connected to one or more sensors **234**. See U.S. patent application Ser. No. 11/807,449 incorporated herein by this reference. The band includes conductors which are connected to connector **236a** of dock **239**. Dock **239** typically includes accelerometer **248**. Accelerometer **248** is included to provide data indicative of the users speed and/or the load experienced by the user. Connector **236a** may include conductive pads, for example.

**[0068]** Portable transmitting unit **238**, removeably received in dock **239**, includes connector **236b** which mates with connector **236a** of dock **239** to receive the signals transmitted by the conductors in band **232** and the signals from accelerometer **248**. Connector **236b** may include pogo pins, for example, which mate with the conductive pads of connector **236a** when portable transmitting unit **238** is located in dock **239**. Portable transmitting unit **238** is configured to wirelessly transmit signals via transmitter **240** and antenna **242** to a base unit or the like. Performance data can be stored in memory **247** for later transmission. Portable transmitting unit **238** is typically small, has a low profile, and is removed from the garment so that the garment can be washed. Portable transmitting unit **238** also typically includes power supply **244**

providing power to transmitter **240** and controlling electronics **246** which receives and processes signals from connector **236b** and controls transmitter **240** accordingly. Other signal processing components such as A/D converters, signal processing circuitry, and the like are not shown in FIG. 11. Controlling electronics **246** may include the subsystems shown in FIG. 1, for example metabolic load sensor subsystem **10**, speed sensor subsystem **12**, biomechanical load sensor subsystem **14**, performance module **16**, and the like.

[0069] An easily washable shirt **230**, FIG. 12 can be made of any fabric (e.g., cotton) but typically is made of a “compression” fabric often including Lycra material (e.g., the POLARTEC® material available from Malden Mills). For additional comfort, moisture management and the like, shirt **230** may include fabric fibers of variable loft, thickness or density placed to coincide with preferred body locations where desired. Sewn or bonded to the inside (or outside) of this or any conventional shirt is a stretchable circumferential band the outline of which is shown in FIG. 12 at **232**. The result in one version is a shirt free of any atypical seams or the like. The band includes an integrated respiration detection subsystem, sensors, signal transmission conductors for the sensors, and a connection subsystem. Cover **250**, if used, also typically made of compression or plush material, may be sewn and/or bonded over the band. The band **232** may include an integrated respiration detection subsystem, one or more sensors, and signal transmission conductors for the sensors. Portable transmitting unit **238** is received in dock **239** attached to shirt **230**. This electronics module wirelessly transmits respiration and other (e.g., ECG) physiological status signals to a remote unit where the wearer’s ECG, respiration rate, skin temperature, heart rate, speed, and activity level or load may be displayed and/or recorded.

[0070] FIG. 13 shows the inside of shirt **230** and again the outline of the circumferential band can be seen at **232**. FIG. 13 also shows one exposed ECG electrode **250a** inside the shirt for monitoring the wearer’s heart rate. Additional exposed ECG electrodes may be attached to band **232**. See U.S. patent application Ser. No. 11/807,449. Other sensors may be added and may be integrated with the band or connected to it. Examples include thoracic bioimpedance sensors or biomechanical sensors, one or more temperature sensors connected to the signal transmission elements of the band.

[0071] Note the lack of any loose wires inside or outside the shirt. Other than the electrodes, and/or any sensors or an optional cover, only shirt material touches the wearer’s skin. Except for electronics module **238**, FIG. 12 and the slight outline of the band, shirt **230** looks just like a normal shirt. Shirt **234** is thus comfortable, aesthetically pleasing, quickly donnable and doffable, and easy to use. It can be worn under other clothing, it is easily cleaned, it can wick away body perspiration, and it does not interfere with the activities of or duties carried out by the wearer. Physiological parameters measured are more accurate because the portion of the shirt including the stretchable band can hold sensors in more intimate contact with the wearer’s body. Also, the sensors are located away from the module so as the module moves with the movement of the wearer the sensors are not impacted, resulting in less motion artifact and further increased accuracy of measurements.

[0072] Stretchable band **232** is shown alone in FIG. 14. Integrated with the fabric of band **232** are conductors (typically insulated wires) in a flexible configuration typically in-plane nested pairs as shown at **260a-260f**. The nested pairs

may be sinusoidal as shown, or any other suitable configuration such as triangle wave or zig-zag (not shown). One conductor pair **260a** is shown more clearly in FIGS. 15A-15B and can be used as a component of a respiration sensing subsystem. When the band is relaxed because the wearer has exhaled, the distance between wires **270a** and **270b** is  $d_1$ , FIG. 15A. When the band is stretched because the wearer has inhaled, the distance between wires **270a** and **270b** is  $d_2$ , FIG. 15B. In this way, by configuring band **232**, FIG. 14 to be circumferential about the wearer’s chest and snug thereabout in the relaxed configuration, when the wearer breathes, any nested conductor pair in the band can be used as a respiration detector.

[0073] An electronics module includes a circuit which detects changes in, for example, capacitance as the adjacent nested circumferential conductors move away from and towards each other as stretchable band **232**, FIG. 14 expands and contracts as shown in FIGS. 15A-15B. That change in impedance (e.g. capacitance) is thus indicative of respiration rate, indicating frequency of breaths taken by the wearer, as well as the depth or volume of each breath. In a plot of impedance and time, peak to peak distance is indicative of breathing rate or frequency.

[0074] Other conductor pairs can also be used for sensing respiration but typically at least a few conductors are reserved for signal transmission from sensors such as the ECG electrodes to an electronics module and possibly between the electronics module and these and other sensors or processing units which may be included on or electrically connected to the band.

[0075] FIG. 16 shows an example of dock **239** which is attached to shirt **230**, FIG. 12. Dock **239** includes receptacle **280** which includes printed circuit board **284** encapsulated (potted) in cover **286**. Cover **286** is secured (e.g., sewn and/or glued) to band **232**, FIGS. 12-14. Holes **287** can be used to sew cover **286** to the band. Conductors in the band and/or conductors connected those conductors extend through board **284** where they may be sealed against water ingress and then routed to connector **236a**. Connector **236a** may include conductive pads **291** or female connectors, or the like. Board **284** may also include accelerometer **248** (typically a three axis accelerometer) the output of which is routed via printed circuit board **284** to connector **236a**. Associating accelerometer **248** with dock **239** instead of portable transmitting unit **238** has several advantages. Dock **239** moves in a way more closely related to the user’s movements. Also, portable transmitting unit **238** can now be made smaller, and it is rendered less expensive and less complex.

[0076] Dock **239** can be attached at any location on the garment and stretchable bands are used to electrically connect dock **239** to sensors located elsewhere on the garment and/or to a respiration sensing band as disclosed above. Cover **286** may be sealed (e.g., ultrasonically welded) to board **284**. Fasteners **283** secure cover **286** to housing **288** via bosses (e.g., boss **285**) in cover **286**.

[0077] Housing **288** is attached (e.g., sewn and/or glued) to shirt **230**, FIG. 12 and receives the portable transmitting unit **238**, FIGS. 16-17 therein. Portable transmitting unit **238** includes connector **236b** which mates with connector **236a** of dock **239** when portable transmitting unit **238** is slid into dock **239**. In this way, the portable transmitting unit receives respiration, heart rate, and accelerometer data from the shirt and records the data via memory **247**, FIG. 11 and/or transmits it to a base station for the monitoring of a person wearing the

shirt (e.g., by a coach, trainer, commander, or the like) via transmitter 240. The components shown in FIG. 16-17 may be made of plastic.

[0078] In this preferred example, housing 288 includes tongue member 290, FIGS. 16-17 and side rails 292a and 292b, FIG. 16 upstanding from tongue member 290 receiving portable transmitting unit 238, FIGS. 16-17 therebetween. Rails 292a and 292b, FIG. 16 curve inwardly over tongue member 290 to retain the portable transmitting unit in place forming a dovetail-like interlock between the portable transmitting unit and the dock. Portable transmitting unit 238, FIG. 18 also includes a latch mechanism engaging the portable transmitting unit in housing 288. The latching mechanism shown in FIG. 18 includes spaced spring loaded fingers 292a and 292b releasably received in indents 294a and 294b, respectively, in housing 288. Buttons 296a and 296b, when pushed, disengage fingers 292a and 292b from indents 294a and 294b to allow portable transmitting unit 238 to be removed from housing 288.

[0079] When portable transmitting unit 238 is in housing 288, the combination is typically no larger than 4 inches wide, 8 inches long, and 3 inches high. A prototype unit measured 4 inches long, 2 inches wide and 0.6 inches high. As shown in both FIGS. 16 and 17, housing 288 has a concave conforming shape and portable transmitting unit 238 is shaped to fit the shape of the housing. The result is a low profile, small, conforming unit which can be used by athletes, soldiers, or even animals. Padding may be added behind substrate 282 as well as over housing 288 for additional comfort and safety.

[0080] O-ring seal 298, FIG. 17 about connector 236b housing 300 of portable transmitting unit 238 helps insure a watertight connection between portable transmitting unit 238 and cover 286. Connector 236b typically includes pogo pins such as pogo pin 302 received in a port of connector 236a or otherwise disposed to contact a trace or pad associated with connector 236a or conductive element 291 as shown.

[0081] FIGS. 17 and 18 also show portable transmitting unit 238 antenna 242, power supply (e.g., a lithium battery) 244, and main printed circuit board 310 (for controlling electronics 246 and transmitter 240, FIG. 11). Included may be a microprocessor for processing signals from the accelerometer, respirator, heart rate sensor, and any other sensors for transmission by the transmitter of portable transmitting unit 238. Double sided tape 241 may be placed between antenna 242 and printed circuit board 310. Transmitter 240 is also shown in FIG. 17 as is accelerometer 248. PCB 310 acts as a ground plane for the antenna and decouples the wearer's body from RF energy transmitted via antenna 242 increasing the transmission range. Battery 244 is behind antenna 242 so no RF energy is blocked. Preferably, no conductive components block antenna 242.

[0082] In accordance with one aspect of the subject invention, a new physiological monitoring system is provided which, in one specific version, is more ergonomic than prior systems. Various other embodiments are within the scope of the subject invention.

[0083] The subject invention features, in one example, a physiological monitoring system comprising a garment such as a shirt, a band integrated with the garment including respiration sensing conductors and one or more additional conductors, and a heart rate sensor integral with the garment electrically connected to an additional conductor. A dock is attached to the garment and includes a receptacle comprising a printed circuit board including an accelerometer and a first

connector component electrically connected to said respiration sensing conductors and the additional conductor(s) and a cover over said printed circuit board. A housing is attached to the garment and receives the receptacle therein. A portable transmitting unit is removeably received in the dock and includes a second connector component mateable with the first connector component. The portable transmitting unit is configured to wirelessly transmit respiration, heart rate, and accelerometer data to a base unit.

[0084] Padding may be included behind the receptacle and/or over the housing for comfort. Preferably, the housing has a concave shape. Fasteners may secure the receptacle inside the housing. One preferred housing includes a tongue member and side rails upstanding therefrom receiving the portable transmitting unit therebetween. Typically, the rails curve inwardly over the tongue member. Also, the portable transmitting unit may include a latch mechanism releasably engaging the portable transmitting unit in the housing. The latch mechanism may include spaced spring loaded fingers releasably received in indentations in the housing.

[0085] In one version, the dock with the portable transmitting unit received therein is no larger than 8 inches wide, 4 inches long, and 3 inches high.

[0086] The second connector component may include pogo pins and then the first connector component includes conductors for the pogo pins. A seal member may be included about the first connector component. Typically, the cover is sewn and/or glued to the band. A typical portable transmitting unit further includes a printed circuit board, a battery under the printed circuit board, and an antenna over the printed circuit board acting as a ground plane for the antenna.

[0087] The subject invention also features a physiological monitoring system comprising a sensor subsystem worn by a person including at least a heart rate sensor, a dock associated with the sensor subsystem including a first connector component electrically connected to the heart rate sensor, and a portable transmitting unit received in the dock including a transmitter and a connector component removeably mateable with the dock connector component to route heart rate data to the transmitter. The preferred sensor subsystem includes a flexible band integrated with a shirt including at least one conductor extending between the heart rate sensor and the dock. The band may include a pair of conductors configured for sensing respiration.

[0088] One typical physiological monitoring system in accordance with the subject invention features a sensor subsystem worn by a person including at least one sensor (e.g., a heart rate sensor). A dock is associated with the sensor subsystem and includes a receptacle comprising a printed circuit board including a dock connector component electrically connected to the sensor and a cover over the printed circuit board, and a housing receiving the receptacle therein. A portable transmitting unit is received in the dock and includes a transmitter and a connector component removeably mateable with the dock connector component to route sensor data to the transmitter.

[0089] Although specific features of the invention are shown in some drawings and not in others, this is for convenience only as each feature may be combined with any or all of the other features in accordance with the invention. The words "including", "comprising", "having", and "with" as used herein are to be interpreted broadly and comprehensively and are not limited to any physical interconnection.

Moreover, any embodiments disclosed in the subject application are not to be taken as the only possible embodiments.

[0090] In addition, any amendment presented during the prosecution of the patent application for this patent is not a disclaimer of any claim element presented in the application as filed: those skilled in the art cannot reasonably be expected to draft a claim that would literally encompass all possible equivalents, many equivalents will be unforeseeable at the time of the amendment and are beyond a fair interpretation of what is to be surrendered (if anything), the rationale underlying the amendment may bear no more than a tangential relation to many equivalents, and/or there are many other reasons the applicant can not be expected to describe certain insubstantial substitutes for any claim element amended.

[0091] Other embodiments will occur to those skilled in the art and are within the following claims.

What is claimed is:

1. A load score system comprising:
  - a metabolic sensor for a subject configured to output metabolic data for the subject;
  - a biomechanical load sensing subsystem for the subject configured to output biomechanical load data;
  - a speed sensor subsystem for the subject configured to output speed data;
  - one or more databases storing zones and a weighting factor for each zone for metabolic data, biomechanical load data, and speed data;
  - a performance module responsive to the metabolic data, the biomechanical load data, and the speed data and the one or more data bases and configured to:
    - calculate a metabolic load score for the subject,
    - calculate a biomechanical load score for the subject, and
    - calculate a speed load score for the subject; and
  - an output module configured to display the subject's calculated metabolic, biomechanical, and speed load scores.
2. The system of claim 1 in which the biomechanical load sensing subsystem and the speed sensor subsystem include an accelerometer.
3. The system of claim 2 in which the accelerometer is a three axis accelerometer.
4. The system of claim 3 in which biomechanical load sensing subsystem includes means for processing the outputs of the three axis accelerometer.
5. The system of claim 3 in which the speed sensor subsystem includes means for processing one output of the three axis accelerometer.
6. The system of claim 1 in which the performance module is configured to detect peaks in the biomechanical load data above a threshold, detect events based on the peaks, and for each event determine a zone for and a weighting factor to be applied to biomechanical load data to output a biomechanical load score for the subject.
7. The system of claim 1 in which speed sensor subsystem is configured to identify steps and their frequency to determine speed data.
8. The system of claim 7 in which the performance module is configured to determine a zone for and a weighting factor to be applied to the speed data to output a speed load score for the subject.
9. The system of claim 1 in which the performance module is configured to determine a zone for and a weighting factor to be applied to the metabolic data to output a metabolic load score for the subject.
10. The system of claim 1 in which the metabolic sensor is a heart rate sensor.
11. The system of claim 1 in which the performance module includes a clustering function configured to increase a said load score by a predetermined factor if a predetermined number of load events occur within a predetermined time period.
12. The system of claim 12 further including:
  - a garment;
  - a band integrated with the garment including respiration sensing conductors and one or more additional conductors connected to a heart rate sensor;
  - a dock attached to the garment, the dock including:
    - a receptacle comprising:
      - a cover secured to the band,
      - a printed circuit board associated with the cover and including an accelerometer for the biomechanical load sensing subsystem and the speed sensor subsystem and a first connector component electrically connected to said respiration sensing conductors and said at least one additional conductor;
    - a housing attached to the garment and receiving the receptacle therein; and
    - a portable transmitting unit removeably received in the dock and including a second connector component mateable with the first connector component.
13. A physiological monitoring method comprising:
  - determining heart rate data of a person, the person's speed data, and a biomechanical load data experienced by the person;
  - establishing a set of zones for metabolic load, speed load, and biomechanical load, each zone having an upper threshold, a lower threshold, and a weighting factor;
  - based on the determined heart rate data, determining the time spent in each metabolic load zone and multiplying the weighting factor for each load zone by the time spent in each zone to determine a metabolic load score;
  - based on the speed data, allocating the determined speed data amongst the various speed zones based on the thresholds for each said zone and applying the weighting factor for each said zone to determine a speed load score; and
  - based on the biomechanical load data, allocating the determined biomechanical load data amongst the various biomechanical load zones based on the threshold for each said zone and applying the weighting factor for each said zone to determine a biomechanical load score.
14. The method of claim 12 further including the step of determining a total load score based on the metabolic load score, the speed load score, and the biomechanical load score.
15. A physiological monitoring system comprising:
  - a metabolic sensor configured to output metabolic data for a subject;
  - a biomechanical load sensing subsystem for the subject configured to determine a biomechanical load event;
  - a speed sensor subsystem for the subject configured to determine a step event and to calculate speed data based on step events and the time between step events;
  - one or more databases storing zones and a weighting factor for each zone for metabolic data, biomechanical load, and speed data; and
  - a performance module responsive to the metabolic data, biomechanical load, and speed data and the one or more databases and configured to:

calculate a metabolic load score for the subject by determining, for said metabolic data, a zone for the metabolic data and a weighting factor for the metabolic data and, based on the zone and weighting factor, to determine a metabolic load score,

calculate a speed load score for the subject by determining, for said speed data, a zone for the speed data and a weighting factor for the speed data, and based on the zone and weighting factor, to determine the speed load score, and

calculate a biomechanical load score for the subject by determining, for a said biomechanical load event, a zone for said biomechanical load event and a weighting factor for the biomechanical load event, and based on said zone and said weighting factor, to determine a biomechanical load score.

**16.** The system of claim **15** in which the biomechanical load sensing subsystem and the speed sensor subsystem include an accelerometer.

**17.** The system of claim **16** in which the accelerometer is a three axis accelerometer.

**18.** The system of claim **17** in which biomechanical load sensing subsystem includes means for processing the outputs of the three axis accelerometer.

**19.** The system of claim **17** in which the speed sensor subsystem includes means for processing one output of the three axis accelerometer.

**20.** The system of claim **15** in which the performance module is configured to detect peaks in the biomechanical load data above a threshold, detect biomechanical load events based on the peaks, and for each biomechanical event, determine a zone for and a weighting factor to be applied to output a biomechanical load score for the subject.

**21.** The system of claim **15** in which speed sensor subsystem is configured to identify steps and their frequency to determine speed data.

**22.** The system of claim **21** in which the performance module is configured to determine a zone for and a weighting factor to be applied to the speed data to output a speed load score for the subject.

**23.** The system of claim **15** in which the performance module is configured to determine a zone for and a weighting factor to be applied to the metabolic data to output a metabolic load score for the subject.

**24.** The system of claim **15** in which the metabolic sensor is a heart rate sensor.

**25.** The system of claim **15** in which the performance module includes a clustering function configured to increase a said load score by a predetermined factor if a predetermined number of load events occur within a predetermined time period.

**26.** A load score system comprising:

a first sensor configured to output a first type of data for a subject;

a second sensor configured to output a second type of data for the subject;

one or more databases storing zones and a weighting factor for each zone for the first and second types of data; and  
a performance module responsive to the first and second types of data, the zones, and the weighting factors and configured to:

calculate a first load score for the first type of data,

calculate a second load score for the second type of data,

and

an output module configured to display a subject's first and second load scores.

\* \* \* \* \*

专利名称(译)	生理状态监测系统		
公开(公告)号	<a href="#">US20120078127A1</a>	公开(公告)日	2012-03-29
申请号	US12/924241	申请日	2010-09-23
[标]申请(专利权)人(译)	MCDONALD DAVID MIELCARZ CRAIG D NIKIFORENKO SERGEY GAMBETTA弗农		
申请(专利权)人(译)	MCDONALD DAVID MIELCARZ CRAIG D. NIKIFORENKO SERGEY GAMBETTA VERNON A.		
当前申请(专利权)人(译)	奎奈蒂克公司北美公司.		
[标]发明人	MCDONALD DAVID MIELCARZ CRAIG D NIKIFORENKO SERGEY GAMBETTA VERNON A		
发明人	MCDONALD, DAVID MIELCARZ, CRAIG D. NIKIFORENKO, SERGEY GAMBETTA, VERNON A.		
IPC分类号	A61B5/02 A61B5/00		
CPC分类号	A61B5/0015 A61B5/6805 A61B5/11 A61B5/112 A61B5/1135 A61B5/4866 A61B5/6823 A61B5/6831 A61B5/7225 A61B5/7235 A61B5/7264 A61B2503/10 A61B2560/0431 A61B2560/045 A61B2560/0456 A61B5/0816		
其他公开文献	US8585606		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

负载得分系统包括代谢传感器，例如用于受试者的心率传感器，被配置为输出受试者的代谢数据。用于受试者的生物力学负载感测子系统被配置为输出生物力学负载数据。用于受试者的速度传感器子系统被配置为输出速度数据。一个或多个数据库存储区域和用于代谢数据，生物力学负荷数据和速度数据的每个区域的加权因子。性能模块响应于代谢数据，生物力学负荷数据以及速度数据和一个或多个数据库，并且被配置为计算受试者的代谢负荷评分。还计算受试者的生物力学负荷得分和受试者的速度负荷得分。输出模块显示主体的计算代谢，生物力学和速度负荷得分。

