



(19) **United States**

(12) **Patent Application Publication**  
**Boege et al.**

(10) **Pub. No.: US 2013/0211272 A1**  
(43) **Pub. Date: Aug. 15, 2013**

(54) **ECG HAND-HELD DEVICE**

**Publication Classification**

(75) Inventors: **Henning Boege**, Braunschweig (DE);  
**Meinhard Schilling**, Wolfenbuettel  
(DE); **Martin Oehler**, Braunschweig  
(DE)

(51) **Int. Cl.**  
*A61B 5/0404* (2006.01)  
*A61B 5/044* (2006.01)  
*A61B 5/00* (2006.01)  
(52) **U.S. Cl.**  
CPC ..... *A61B 5/0404* (2013.01); *A61B 5/0006*  
(2013.01); *A61B 5/044* (2013.01)  
USPC ..... **600/523**; 600/509

(73) Assignee: **Capical GmbH**, Braunschweig (DE)

(21) Appl. No.: **13/814,628**

(22) PCT Filed: **Aug. 10, 2011**


(86) PCT No.: **PCT/EP2011/004000**

§ 371 (c)(1),  
(2), (4) Date: **Mar. 20, 2013**

(30) **Foreign Application Priority Data**

Aug. 12, 2010 (DE) ..... 10 2010 034 192.4

(57) **ABSTRACT**  
The invention relates to an ECG device (1) designed as a portable handheld device, with a housing (2) which has a grip area (3) and/or grip elements, wherein the grip area (3) and/or the grip elements are designed to allow the ECG device (1) to be held by an operator, and the ECG device (1) has a sensor area (4), which is arranged outside the grip area (3) and the grip elements and in which a plurality of ECG sensors (5) in the form of capacitive electrodes is provided. Here, the ECG sensors (5) are at least partially embedded in a foam block (6) secured on the housing (2), and the ECG sensors (5) are held by the foam block (6) and supported elastically therein.

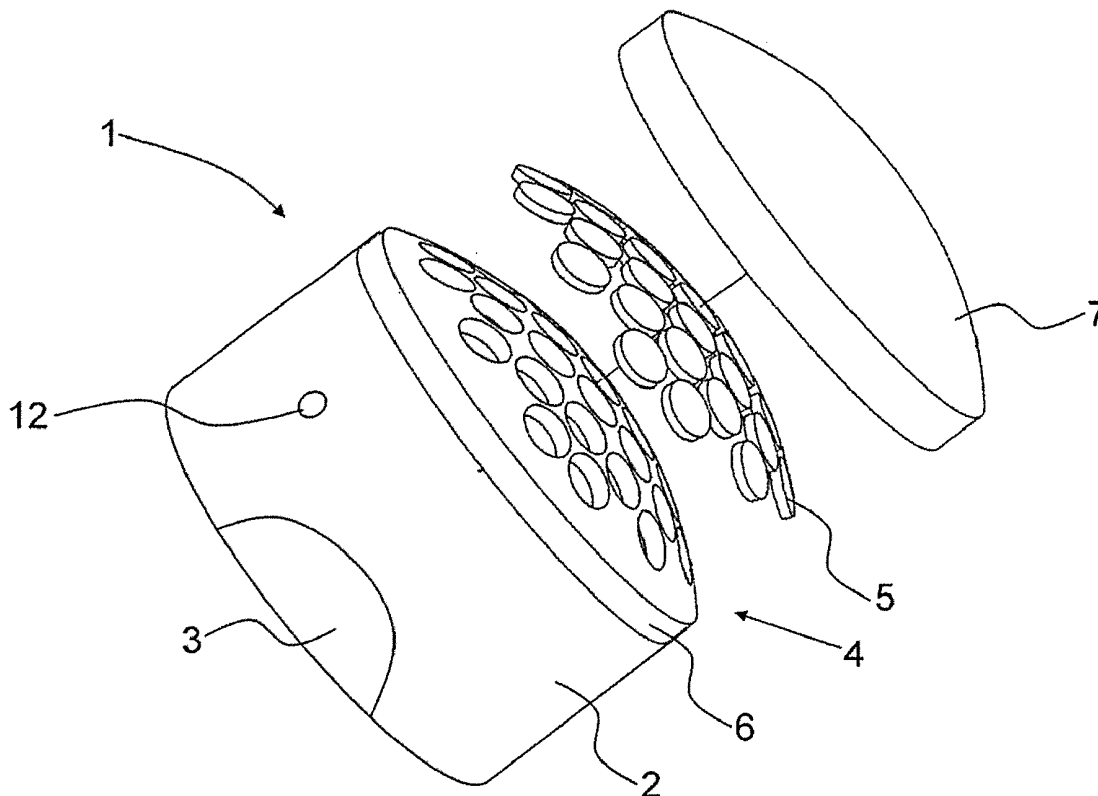

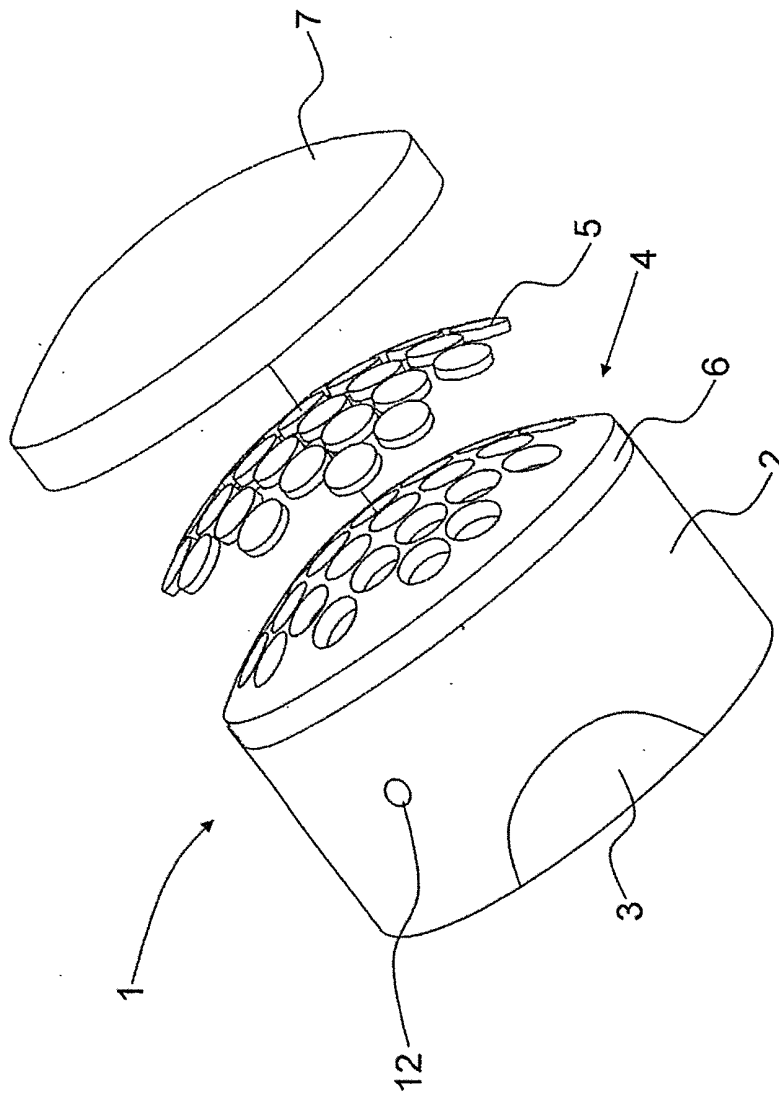


Fig. 1

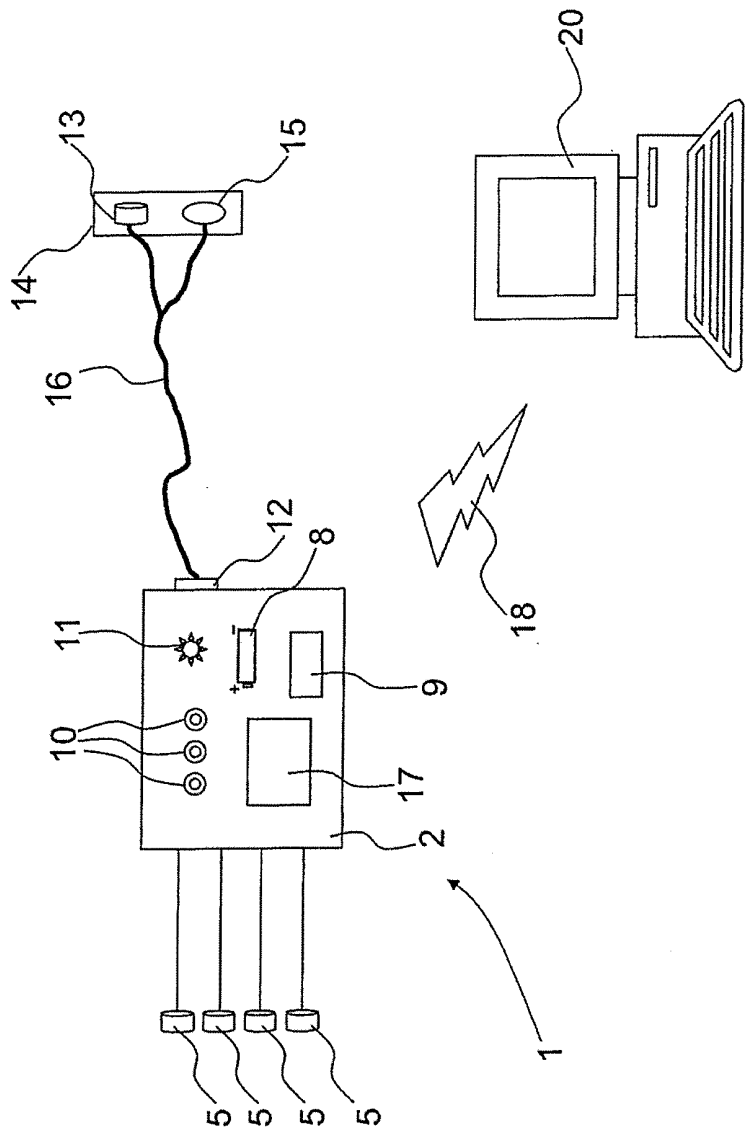


Fig. 2

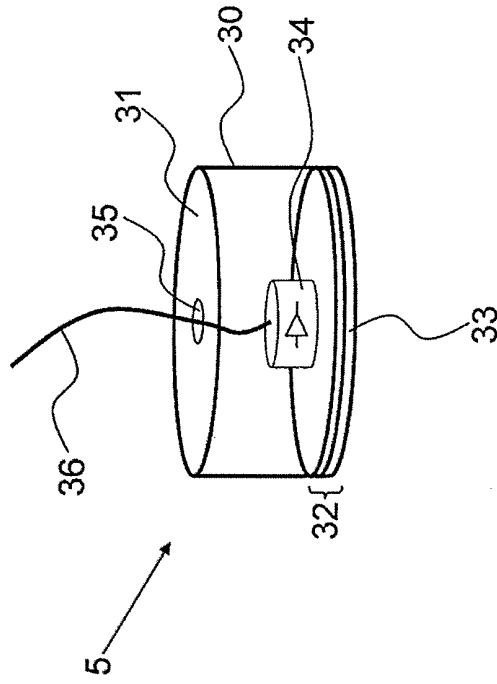


Fig. 3

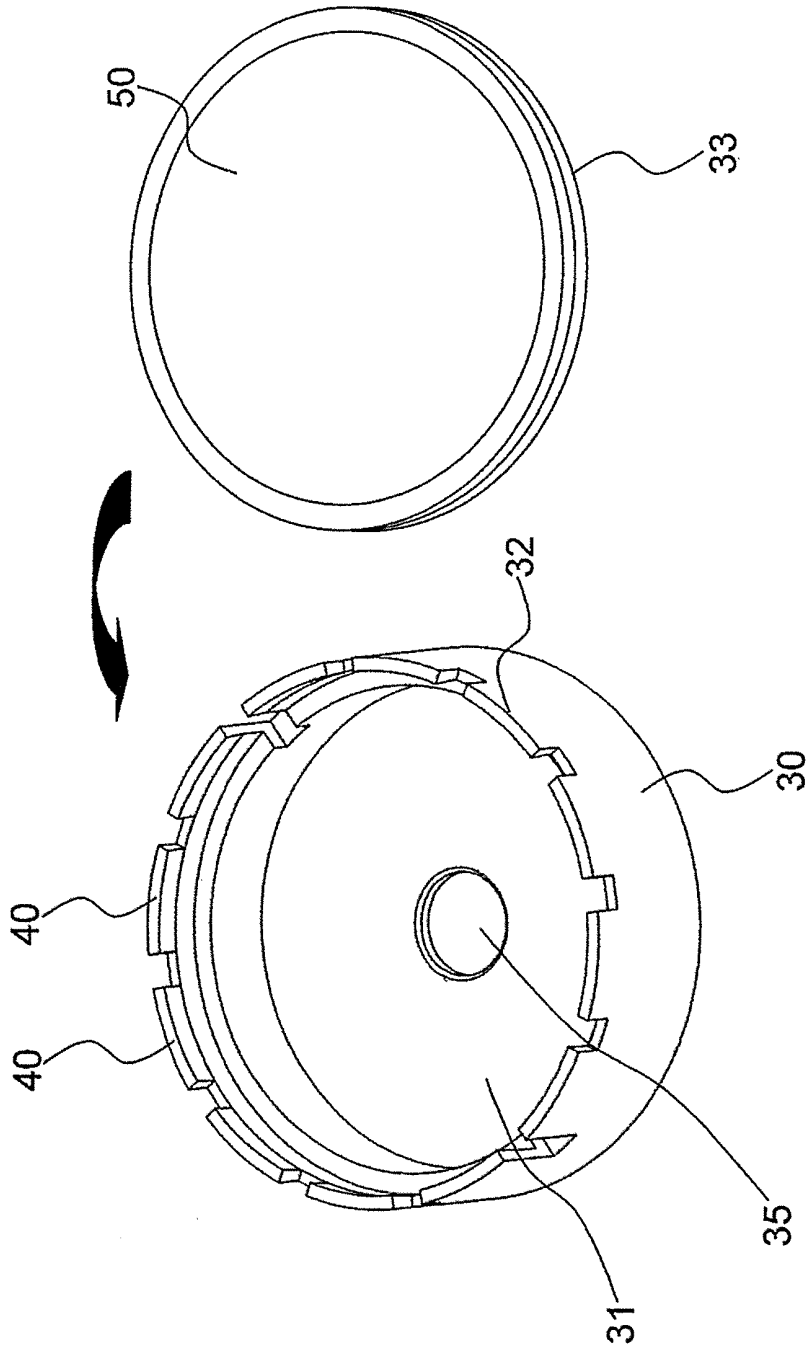


Fig. 4

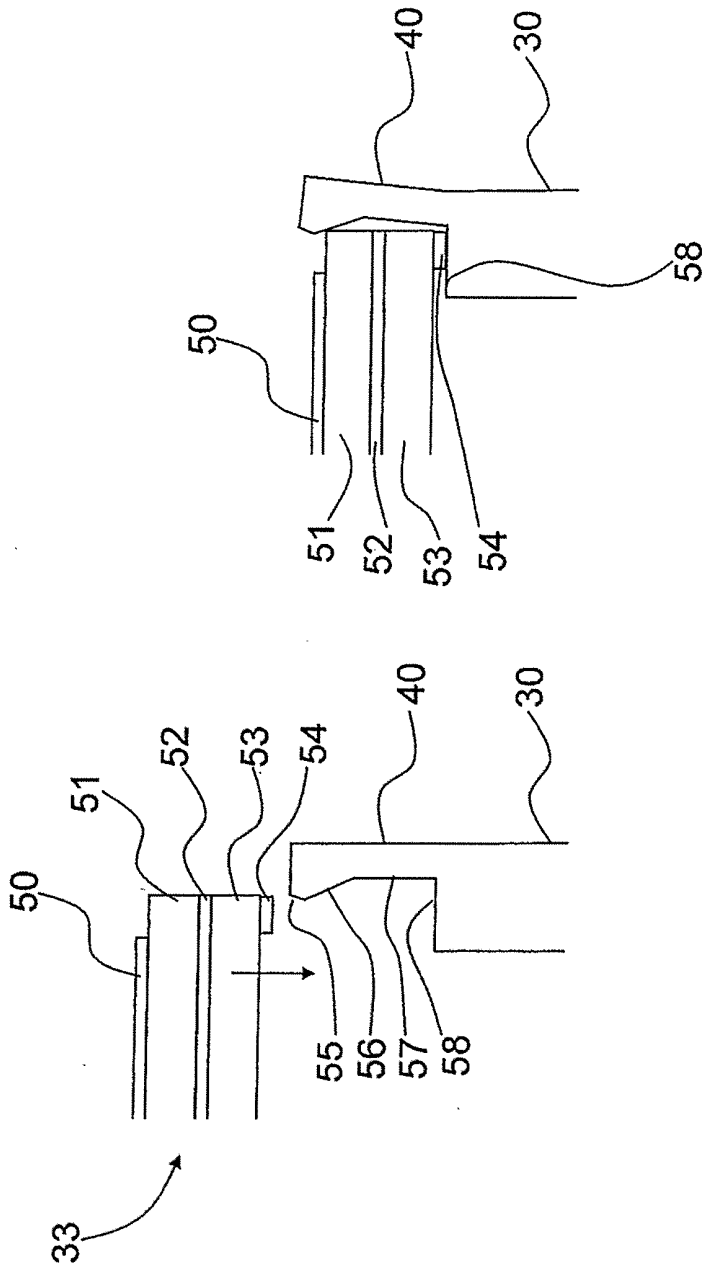


Fig. 5

Fig. 6

### ECG HAND-HELD DEVICE

**[0001]** The invention relates to an ECG device designed as a portable handheld device in accordance with the preamble of Claim 1.

**[0002]** The invention relates generally to the recording of electrocardiograms (ECG) using ECG sensors in the form of capacitive electrodes. Capacitive electrodes permit measurement of an electrocardiogram with the same results as with conventionally used galvanic electrodes. The advantage of capacitive electrodes is that no direct contact with the skin is necessary, and therefore measurements can even be carried out through clothing.

**[0003]** A capacitive ECG system for measuring standard leads and for body surface potential maps is already known from the publication by Martin Oehler, Meinhard Schilling and Hans Dieter Esperer, Biomed Tech 2009; 54:329-335.

**[0004]** The object of the present invention is to improve the ECG device described in the aforementioned publication so that it is practical for everyday medical use.

**[0005]** This object is achieved by the invention set forth in Claim 1. Advantageous developments of the invention are set forth in the dependent claims.

**[0006]** The invention relates generally to an ECG device designed as a portable handheld device. Such a handheld device has the advantage that it is easy to handle and can be used everywhere, and in particular can also be transported to accident sites. Such a handheld device also has the advantage that, with a suitably compact design, it can be carried around permanently by physicians or in ambulances and emergency medical vehicles.

**[0007]** According to the invention, a portable handheld device of this kind is developed in the sense that the ECG sensors, which are provided in the form of capacitive electrodes, are at least partially embedded in a foam block secured on the housing. The ECG sensors are held by the foam block and supported elastically therein. It has been found that, by using a foam block of this kind, it is possible to solve a number of problems associated with a particularly practical design of an ECG device with capacitive electrodes. Thus, the foam first of all provides the desired mutual insulation of the electrodes. Moreover, the electrodes are already fixed and thus held in place by being embedded in the foam block, such that there is no need for further securing elements, which could impair the function and measuring accuracy of the capacitive electrodes. Moreover, the foam block is a simple and elegant way of providing elastic support of the ECG sensors, making them highly conformable to the shape of the human chest.

**[0008]** By contrast, the ECG device known from the aforementioned publication had capacitive electrodes mounted individually in a housing via helical springs, which arrangement proved unfavorable in practice, since the conformability of the electrode array to the human chest was inadequate, and since the spring mechanism also often caused jamming between the electrodes and the surrounding housing part.

**[0009]** All of these problems can now be solved in an inexpensive and elegant way by the invention according to Claim 1.

**[0010]** The foam block can be arranged in a recess of the housing, e.g. in a housing cutout. According to an advantageous development of the invention, the foam block is secured on a housing surface of the ECG device. This permits simple securing of the foam block on the housing, without

large cutouts in the housing. Only a small opening is needed in the housing for the passage of the connection cable for the ECG sensors.

**[0011]** According to an advantageous development of the invention, the ECG sensors are arranged on the side of the foam block directed away from the housing. This has the advantage of minimizing the distance between the sensors and the human chest area that is to be recorded, and this leads to improved signal detection.

**[0012]** The ECG sensors can be embedded completely in the foam block, or only partially so, i.e. protruding slightly from the foam block. If the ECG sensors are embedded completely in the foam block, the ECG sensors can also be covered by a layer of foam.

**[0013]** According to an advantageous development of the invention, the ECG sensors are not covered by the material of the foam block, i.e. they are so to speak visible from the outside in a plan view of the foam block. This has the advantage of maximizing the detection sensitivity of the ECG sensors.

**[0014]** According to an advantageous development of the invention, the ECG sensors, on the side of the foam block directed away from the housing, are arranged at approximately the same distance to the surface of the foam block directed away from the housing. In this way, it is possible to ensure uniform signal detection across the plurality of the ECG sensors.

**[0015]** The surface of the foam block directed away from the housing can be flat, for example.

**[0016]** According to an advantageous development of the invention, the foam block, on its side directed away from the housing, has a convex shape. The convex shape of the foam block on its side directed away from the housing can be produced, for example, by a suitably convex shaping of the securing surface on the housing of the ECG device that serves for the attachment of the foam block. It is equally possible for the foam block itself to be correspondingly convexly shaped.

**[0017]** According to another advantageous development of the invention, the ECG sensors are arranged along a convexly shaped surface, in particular along the same convex shape of the foam block on its side directed away from the housing.

**[0018]** The convex shape advantageously permits improved conformability of the sensor area of the ECG device to differently shaped chest areas in humans. In particular, this permits conformability to concave chest shapes and, with a suitably soft configuration of the foam, also to convex chest shapes.

**[0019]** According to an advantageous development of the invention, a protective sleeve which is impermeable to liquid, washable and can be disinfected by wiping is stretched over the foam block and the ECG sensors arranged in the latter. This has the advantage that the ECG sensors and the foam are protected from liquids which, for example, are used for cleaning and disinfecting. Moreover, the protective sleeve permits easy cleaning and disinfecting of the ECG device. Advantageously, the protective sleeve can be disinfected by wiping, i.e. it can be disinfected in accordance with the medical requirements simply by wiping it with a disinfectant.

**[0020]** The protective sleeve can be made of a textile material, e.g. a woven or a nonwoven, or of leather, or of a pore-free, closed synthetic material. Suitable materials for the protective sleeve are, for example, Latex, microfibers or Goretex.

**[0021]** According to an advantageous development of the invention, the protective sleeve is made of a non-statically

chargeable synthetic material. This has the advantage of reliably avoiding undesired effects on the signals of the ECG sensors as a consequence of static charges. The protective sleeve can be made of a polyurethane film, for example. It has been found that plaster material, which is also used for wound plaster, is well suited for this purpose.

**[0022]** The invention therefore also relates to the use of a polyurethane film as a protective sleeve for protecting the foam block of an ECG device.

**[0023]** According to an advantageous development of the invention, the protective sleeve can be secured on the housing of the ECG device by means of releasable adhesive and/or Velcro tape. For this purpose, the protective sleeve and/or the housing can have corresponding adhesive points or adhesive strips.

**[0024]** According to an advantageous development of the invention, the protective sleeve is designed as a disposable article that can be used just once. This has the advantage that rapid change of protective sleeve is possible and no cleaning is necessary.

**[0025]** In principle, any desired flexible foam can be used for the foam block, e.g. PE foam. It is possible to use soft foam materials and also harder foam materials. With harder foam materials, the required elasticity and flexibility, which is needed for a necessary adaptation of the ECG sensor area to different human chest shapes, can be obtained, for example, by making cuts or slits in the foam material.

**[0026]** According to an advantageous development of the invention, the foam block has a compressive strength in the range from 2 to 30 RG. In this way, the foam block is soft enough for flexible adaptation to different human chest shapes, and yet the foam block is stable enough to safely hold and support the ECG sensors.

**[0027]** According to an advantageous development of the invention, the foam block has an overall density in the range from 25 to 45 kg/m<sup>3</sup>. This permits the use of sufficiently stable yet flexible foam materials.

**[0028]** According to an advantageous development of the invention, the foam block is made completely or partially of viscoelastic foam. Latex can be used, for example, as viscoelastic material. The use of visco-elastic foam has the advantage that the foam block can conform well to the shape of a patient's body and, because of the special properties of the viscoelastic foam and on account of the body heat, it maintains the adopted shape for quite a long time and thus conforms adaptively to the shape of the body. This has the advantage that the ECG device is easier to handle and, after suitable shaping of the viscoelastic foam, can be held on the patient with less force being applied. In addition, viscoelastic foam is easy to work, in particular at low temperatures.

**[0029]** The ECG device can already be equipped with input means and display means, e.g. to input necessary settings and to display the ECG signals. However, it has been found that this can make the ECG device quite heavy and unwieldy, and therefore, for use as a portable handheld device, it is advantageous to design the ECG device simply as an ECG signal detector without its own display unit for showing the recorded ECG signals. In this case, the ECG device can be operated wirelessly and has an integrated power supply. This permits the greatest possible flexibility of use and handling of the ECG device in practical medical application.

**[0030]** According to an advantageous development of the invention, the ECG device has a wireless data interface via which the recorded ECG data can be transferred to a separate

evaluation computer or a separate display unit. For example, the ECG device can be equipped with a memory that permits storage of the recorded ECG signals for an entire ECG recording. Subsequent to the recording, the stored ECG data are then transferred to an evaluation computer or to a separate display unit, e.g. via the wireless data interface or a cable. In this case, an evaluation of the recorded ECG signals can be performed at a later stage on the evaluation computer or on the separate display unit. According to an advantageous development of the invention, the ECG device is set up for wireless data transfer of the recorded ECG data via the wireless data interface during the ECG recording. This allows the recorded ECG data to be displayed on a separate evaluation computer or separate display unit contemporaneously with the recording, i.e. in real time.

**[0031]** According to an advantageous development of the invention, the housing, on the side directed away from the ECG sensors, has at least one control element and/or a signal indicator element, which is not configured for the ECG signal display. The signal indicator element can, among other things, inform the operator as to whether the ECG device is correctly set up for an ECG recording on a human chest. The signal indicator element can be designed, for example, in the form of a light-emitting diode or several light-emitting diodes, e.g. light-emitting diodes in different colors, via which an operator is informed, for example on the basis of a red/green difference, as to whether the ECG device is correctly set up for an ECG recording on a human chest. The signal indicator element can also be an alphanumeric LCD display. The control element can be a switch or a button, for example, via which certain settings can be adjusted, such as sensitivity or mode of presentation.

**[0032]** According to an advantageous development of the invention, one, some or all of the ECG sensors has/have a cylindrical cup-shaped metal part with a substantially closed bottom and, directed away from the bottom, an end area designed like a crown with snap-fit fastening elements. Moreover, a sensor plate which has at least three mutually insulated conductor track levels is provided and can be inserted or snapped into the cup-shaped metal part.

**[0033]** Moreover, the invention also relates to an ECG sensor in the form of a capacitive electrode with the above-described advantageous structure.

**[0034]** Such a structure of an ECG sensor has the advantage that the sensor can be manufactured in a simple and efficient way and is in particular suitable for inexpensive mass production.

**[0035]** According to an advantageous development of the invention, the sensor plate, on its side directed toward the inside of the cup, i.e. toward the inside of the cup-shaped metal part, has a ring-shaped conductor track via which an electrical contact between the sensor plate and the cup-shaped metal part is produced after the sensor plate has been snapped into the cup-shaped metal part. The cup-shaped metal part serves here as a screen against external interference signals.

**[0036]** This has the advantage that the electrical contact, required for the screening, between the sensor plate and the cup-shaped metal part can also be produced easily and quickly, namely by simply snapping the sensor plate into the cup-shaped metal part. In this way, mass production of the ECG sensor can be further optimized.

**[0037]** According to an advantageous development of the invention, the ECG device has at least one electrical connect-

ing element for the connection of at least one external ECG sensor. The electrical connecting element can be designed, for example, as a socket for receiving an electric plug. This has the advantage that the ECG device can be expanded, in terms of its function, by external ECG sensors. The external ECG sensor can, for example, be designed as a capacitive electrode or as a conventional galvanic electrode.

**[0038]** According to an advantageous development of the invention, the ECG device has at least one electrical connecting element for the connection of an external clamp electrode. By means of the clamp electrode, it is possible, for example, to establish a potential equalization between a patient, on whom an ECG is to be recorded, and the ECG device.

**[0039]** According to an advantageous development of the invention, the clamp electrode has both a potential equalization contact and also an external ECG sensor. The external ECG sensor and the potential equalization electrode can be connected to the ECG device via a common multi-wire connection cable. This permits an expansion of the function of the ECG device via an external ECG sensor and the potential equalization electrode, without a large number of connection cables having to be connected. In this way, it is possible to avoid cables becoming entangled.

**[0040]** The invention also covers an external clamp electrode which has both a potential equalization electrode and also an external ECG sensor. The external ECG sensor is advantageously likewise designed as a capacitive electrode.

**[0041]** According to an advantageous development of the invention, at least one external ECG sensor is connected permanently to the ECG device via a cable. The housing of the ECG device contains a roll-up mechanism for the cable. This permits simple and rapid stowage of the cable, if appropriate together with the external ECG sensor, in the housing of the ECG device. In this way, the ECG device, when not in use, is maneuverable and easy to transport. A further advantage is that the external ECG sensor and the connection cable are always carried around with the device and cannot get forgotten.

**[0042]** According to an advantageous development of the invention, at least one satellite electrode arrangement can be connected to the ECG device and has a plurality of ECG sensors in the form of capacitive electrodes. It is possible, for example, to use the capacitive electrodes according to the embodiments explained above. For this purpose, the ECG device has a connection that is configured for contacting the plurality of ECG sensors of the satellite electrode arrangement. The satellite electrode arrangement has the advantage of creating a kind of external sensor pathway which provides additional possibilities of ECG signal detection, in particular with additional flexibility in the handling and arrangement of the satellite electrode arrangement. The satellite electrode arrangement can be designed similarly to the ECG sensors arranged in the sensor area of the ECG device, e.g. on a housing of a satellite electrode arrangement, embedded in a foam block secured on the latter. Advantageously, the structure of the satellite electrode arrangement is slightly smaller than the ECG device.

**[0043]** The invention is explained in more detail below on the basis of illustrative embodiments and with reference to drawings, in which:

**[0044]** FIG. 1 shows an exploded view of an ECG device,

**[0045]** FIG. 2 shows a schematic view of another embodiment of the ECG device and an evaluation computer,

**[0046]** FIG. 3 shows an ECG sensor, and

**[0047]** FIGS. 4-6 show details of the structure of the ECG sensor.

**[0048]** In the figures, the same reference signs are used for elements corresponding to one another.

**[0049]** FIG. 1 shows a perspective view of an ECG device 1 designed as a portable handheld device. The ECG device 1 has a housing 2 with a grip area 3. A sensor area 4 is provided on a side of the housing outside the grip area 3. A foam block 6 is arranged in the sensor area 4. The foam block 6 is secured on the housing 2, on a surface of said housing 2 directed away from the grip area. A plurality of ECG sensors 5 is embedded in the foam block 6, e.g. in the manner of a matrix. As can be seen, the foam block 6 bulges away from the housing 2, i.e. has a convex shape. A protective sleeve 7 is stretched over the foam block 6 and over the electrodes 5 embedded in the latter.

**[0050]** The housing 2 already accommodates all the components needed to record ECG signals via the ECG sensors 5, e.g. evaluation electronics, an interface for data transfer, in particular a wireless interface, and a power supply. A side wall of the housing 2 is also provided with an electrical connecting element 12, e.g. a connecting socket, via which the external components, e.g. an external ECG sensor, can be connected to the ECG device 1.

**[0051]** FIG. 2 shows another embodiment of the ECG device 1 in a schematic view in the manner of a block diagram. The ECG device 1 according to FIG. 2 furthermore has the same structure as the ECG device 1 according to FIG. 1. In FIG. 2, the ECG sensors 5 are depicted schematically and merely by way of example on the basis of four sensors.

**[0052]** The ECG device 1 according to FIG. 2 has an integrated power supply 8, e.g. an accumulator. The accumulator can be charged via a charging connection arranged on the housing 2. Alternatively, it is possible to charge the accumulator 8 instead via a separate charging connection by inductive coupling of electrical energy into the housing 2. In this case, an induction receiver coil is provided in the housing 2.

**[0053]** An evaluation circuit 17 and a wireless interface module 9 are also provided in the housing 2. The evaluation circuit 17 evaluates the signals of the ECG sensors 5 and transfers the evaluated information via the wireless interface module 9 to an evaluation computer 20 over a wireless data transfer path 18. The wireless interface module 9, which can be designed as a Bluetooth module for example, permits bidirectional transfer of data between the ECG device 1 and the external evaluation computer 20. Thus, for example, recorded ECG signals can be transferred from the ECG device 1 to the external evaluation computer 20, and, for example, measurement settings can be transferred from the external evaluation computer 20 to the ECG device 1. The received ECG data can then be displayed graphically on the evaluation computer 20 by means of suitable software.

**[0054]** The ECG device 1 also has an indicator element 11, arranged on the rear face of the housing for example, and three control elements 10, for example in the form of buttons. Certain settings can be made on the ECG device 1 via the buttons 10. Certain operating states of the ECG device can be shown by the indicator element 11, e.g. readiness for operation, insufficiently charged accumulator 8, or the correct orientation of the electrodes 5 on a patient.

**[0055]** The ECG device 1 can also have a larger graphics display, which is arranged on the rear face, for example, and on which the recorded ECG signals can be shown directly. The display can advantageously be part of a tablet PC which is arranged on the rear face of the ECG device 1 and which, in

addition to displaying the ECG signals, also permits extended possibilities as regards setting the ECG device.

**[0056]** The ECG device 1 according to FIG. 2 also has the electrical connecting element 12. FIG. 2 shows how an external clamp electrode 14 is connected to the connecting element 12 via a multicore electric line 16. The clamp electrode 14 has an external ECG sensor 13, which can be configured similarly to the ECG sensors 5, and also a potential equalization electrode 15.

**[0057]** The satellite electrode arrangement described at the outset can be connected to the ECG device 1 via an electric line in a manner similar to the above-described clamp electrode 14. For this purpose, the electrical connecting element 12 additionally has electrical contacts for contacting the plurality of ECG sensors of the satellite electrode arrangement.

**[0058]** FIG. 3 shows the structure of an ECG sensor 5 in the form of a capacitive electrode with further details. The ECG sensor 5 is composed of a cup-shaped metal part 30 and a sensor plate 33. Here, the sensor plate 33 is inserted into the cup-shaped metal part 30 by being secured with a snap fit in an end area 32 of the cup-shaped metal part 30. On its side arranged inside the cup-shaped metal part 30, the sensor plate 33 has a signal processing circuit 34 which contains, for example, an impedance converter, an amplifier and a filter circuit. The signal processing circuit 34 is connected to the evaluation circuit 17 in the housing 2 via a connection cable 36, which is routed through an opening 35 arranged in a bottom 31 of the cup-shaped metal part 30.

**[0059]** FIG. 4 shows the cup-shaped metal part 30 of the ECG sensor 5, and also the sensor plate 33 before its insertion into the cup-shaped metal part 30. As can be seen, the cup-shaped metal part 30 is designed with a substantially closed bottom 31, in which the through-opening 35 is provided for passage of the cable 36. In an end area 32, the cup-shaped metal part 30 has snap-fit fastening elements 40, which are arranged circumferentially like a crown in the end area 32. The sensor plate 33 has an electrode layer 50 which faces outward, i.e. not toward the inside of the cup-shaped metal part 30, and which, for example, can be provided with an insulation. The electrode layer 50 serves here as the sensor surface of the capacitive ECG sensor. The cup-shaped metal part 30 serves as a screening housing against external interference fields.

**[0060]** FIGS. 5 and 6 show in more detail both the snap-fit mechanism and also the exact structure of the sensor plate 33. In FIGS. 5 and 6, the sensor plate 33 and the side wall of the cup-shaped metal part 30 are shown in sectional views.

**[0061]** As can be seen in FIG. 5, the sensor plate 33 has an at least five-layer structure. Starting from the top face of the sensor plate 33, facing outward after placement in the cup-shaped metal part 30, the sensor plate 33 has the electrode layer 50, below this a first insulating layer 51, below the latter an electrically conductive screening layer 52, below the latter a second insulating layer 53, and below the latter, finally, an electrically conductive contacting layer 54. The sensor plate 33 can, for example, be produced particularly inexpensively as a circuit board formed with three conductor track levels. In this case, the layers 50, 52, 53 are formed as conductor track levels of the circuit board, the insulating layers 51, 53 as levels made from the circuit board material, e.g. of glass-fiber-reinforced epoxy.

**[0062]** The signal processing circuit 34, which is not shown in FIGS. 5 and 6, can be formed directly on the underside of

the second insulating layer 53 with further conductor tracks and corresponding electronic components arranged thereon.

**[0063]** The electrode layer 50 is connected to the signal processing circuit 34 by means of plated-through holes. The screening layer 52 is similarly connected to the contacting layer 54 by plated-through holes. The contacting layer 54 is advantageously formed as a ring-shaped conductor track which surrounds the elements of the signal processing circuit 34 that lie in between.

**[0064]** FIG. 5 also shows the basic configuration of the snap-fit elements 40. Starting from the open face of the cup-shaped metal part 30 into which the sensor plate 33 is inserted, the snap-fit element 40 first has a short beveled area 55, the bevel pointing to the inside of the cup. This area is followed by a second beveled area 56, which has a bevel pointing in the opposite direction and which, in the direction of insertion of the sensor plate 33, is slightly longer than the first beveled area 55. There then follows a spring area 57, in which the wall thickness of the snap-fit element is approximately constant. However, this is not essential. The important thing is that the wall thickness in the spring area 57 is sufficiently small to ensure a sufficient spring action for the snap-fit effect of the sensor plate 33. The spring area 57 is followed by an approximately horizontal abutment face 58.

**[0065]** FIG. 6 shows the cup-shaped metal part 30 with the sensor plate 33 inserted. As can be seen, the snap-fit fastening element 40 is bent slightly outward by the snap-fit action and is thus under the effect of a pretensioning by which the sensor plate 33 is held in the cup-shaped metal part 30. Here, the sensor plate 33 bears on the abutment face 58, which provides a defined abutment for the sensor plate 33. As a result of the way in which the contacting layer 54 is arranged, this contacting layer 54 at the same time produces an electrical contact between the screening layer 52 and the cup-shaped metal part 30 via the abutment face 58. In this way, the screening layer 52 is electrically connected to the cup-shaped metal part 30. In this way, a Faraday cage is in practice formed around the signal processing circuit 34.

1. ECG device (1) designed as a portable handheld device, with a housing (2) which has a grip area (3) and/or grip elements, wherein the grip area (3) and/or the grip elements are designed to allow the ECG device (1) to be held by an operator, and the ECG device (1) has a sensor area (4), which is arranged outside the grip area (3) and the grip elements and in which a plurality of ECG sensors (5) in the form of capacitive electrodes is provided, characterized in that a foam block (6) is secured on the housing (2) in the sensor area (4), and the ECG sensors (5) are secured on or in the foam block (6) and are supported elastically by means of the foam block (6).

2. ECG device according to claim 1, wherein the foam block (6) is secured on a housing surface of the ECG device (1).

3. ECG device according to claim 1, wherein the ECG sensors (5) are arranged on a side of the foam block (6) directed away from the housing (2).

4. ECG device according to claim 3, wherein the ECG sensors (5), on the side of the foam block (6) directed away from the housing (2), are not covered by the material of the foam block (6).

5. ECG device according to claim 1, wherein the foam block (6), on its side directed away from the housing (2), has a convex shape.

6. ECG device according claim 1, wherein a protective sleeve (7) which is impermeable to liquid, washable and can

be disinfected by wiping is stretched over the foam block (6) and the ECG sensors (5) arranged in the latter.

7. ECG device according to claim 1, wherein a protective sleeve (7) which is made of a non-statically chargeable synthetic material is stretched over the foam block (6) and the ECG sensors (5) arranged in the latter.

8. ECG device according to claim 7, wherein the protective sleeve (7) is made of a polyurethane film.

9. ECG device according to claim 6, wherein the protective sleeve can be secured on the housing (2) by means of releasable adhesive and/or Velcro tape.

10. ECG device according to claim 1, wherein the foam block (6) has a compressive strength in the range from 1.5 to 5 kPa.

11. ECG device according to claim 1, wherein the foam block (6) has an overall density in the range from 10 to 45 kg/m<sup>3</sup>.

12. ECG device according to claim 1, wherein the foam block is made completely or partially of viscoelastic foam.

13. ECG device according to claim 12, wherein the foam block has a layer of viscoelastic foam on the side of the foam block directed away from the housing.

14. ECG device according to claim 1, wherein the ECG device has a wireless data interface (9) via which the recorded ECG data can be transferred to a separate evaluation computer (20) or a separate display unit.

15. ECG device according to claim 14, wherein the ECG device (1) is designed as a simple ECG signal detector which does not have its own display unit for showing the recorded ECG signals and which can be operated wirelessly and has an integrated power supply (8).

16. ECG device according to claim 1, wherein the housing (2), on the side directed away from the sensor area (4), has at least one control element (10) and/or a signal indicator element (11), which is not configured for the ECG signal display.

17. ECG device according to claim 1, wherein one, some or all of the ECG sensors (5) has/have a cylindrical cup-shaped

metal part (30) with a bottom (31) and, directed away from the bottom (31), an end area (32) designed like a crown with snap-fit fastening elements (40), and a sensor plate (33) which has at least three conductor track levels (50, 52, 54), separated from one another by insulation layers, and which can be inserted or snapped into the cup-shaped metal part (30).

18. ECG device according to claim 17, wherein the sensor plate (33), on its side directed toward the inside of the cup, has a ring-shaped conductor track (54) via which an electrical contact between the sensor plate (33) and the cup-shaped metal part (30) is established after the sensor plate (33) has been snapped into the cup-shaped metal part (30).

19. ECG device according to claim 1, wherein the ECG device (1) has at least one electrical connecting element (12) for the connection of at least one external ECG sensor (13).

20. ECG device according to claim 1, wherein the ECG device (1) has at least one electrical connecting element (12) for the connection of at least one potential equalization electrode (15).

21. ECG device according to claim 20, wherein potential equalization electrode (15) and an external ECG sensor (13) can be connected in the form of a clamp electrode (14), and the external ECG sensor (13) and the potential equalization electrode (15) can be connected to the ECG device (1) via a common multi-wire connection cable (16).

22. ECG device according to claim 1, wherein at least one external ECG sensor (13) is connected permanently to the ECG device (1) via a cable (16), the housing (2) of the ECG device (1) containing a roll-up mechanism for the cable (16).

23. ECG device according to claim 1, wherein at least one satellite electrode arrangement can be connected to the ECG device and has a plurality of ECG sensors in the form of capacitive electrodes.

24. Use of a polyurethane film as protective sleeve (7) for protecting the foam block (6) of an ECG device according to claim 1.

\* \* \* \* \*

专利名称(译)	心电图手持设备		
公开(公告)号	<a href="#">US20130211272A1</a>	公开(公告)日	2013-08-15
申请号	US13/814628	申请日	2011-08-10
[标]申请(专利权)人(译)	boege亨宁 SCHILLING迈因哈德 奥勒尔MARTIN		
申请(专利权)人(译)	BOEGE, HENNING 林女士迈因哈德 奥勒尔, MARTIN		
当前申请(专利权)人(译)	CAPICAL GMBH		
[标]发明人	BOEGE HENNING SCHILLING MEINHARD OEHLER MARTIN		
发明人	BOEGE, HENNING SCHILLING, MEINHARD OEHLER, MARTIN		
IPC分类号	A61B5/0404 A61B5/044 A61B5/00		
CPC分类号	A61B5/04085 A61B2562/0209 A61B5/044 A61B5/0006 A61B5/0404 A61B2562/046 A61B5/04284		
优先权	102010034192 2010-08-12 DE		
其他公开文献	US8831715		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

本发明涉及一种设计为便携式手持设备的ECG设备(1)，其具有壳体(2)，壳体(2)具有抓握区域(3)和/或抓握元件，其中抓握区域(3)和/或抓握元件设计用于允许ECG设备(1)由操作者握持，并且ECG设备(1)具有传感器区域(4)，该传感器区域布置在握持区域(3)和握持元件的外部并且其中提供了多个电容电极形式的ECG传感器(5)。这里，ECG传感器(5)至少部分地嵌入固定在壳体(2)上的泡沫块(6)中，并且ECG传感器(5)由泡沫块(6)保持并弹性地支撑在其中。

