



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0101146 A1**

Laitinen et al. (43) **Pub. Date: May 27, 2004**

(54) **PERSONALIZED INFORMATION DISTRIBUTION SYSTEM**

(30) **Foreign Application Priority Data**

Apr. 11, 2001 (FI)..... 20010767

(76) Inventors: **Arvo Laitinen**, Nurmijarvi (FI); **Jyrki Petsalo**, Espoo (FI); **Jarkko Vuori**, Jyvaskyla (FI)

Publication Classification

(51) **Int. Cl.⁷** **H04B 3/00**; H04R 27/00

(52) **U.S. Cl.** **381/77**; 381/82

Correspondence Address:
YOUNG & THOMPSON
745 SOUTH 23RD STREET 2ND FLOOR
ARLINGTON, VA 22202

(57) **ABSTRACT**


The invention relates to an information distribution system, especially to an audio information distribution system including one or more local systems, each being intended for personal use or for the use of a small group. In order for the system to be adapted as well as possible to the current state of the user, the user is connected as a part of the system so that his or her current state affects the way information is supplied to him/her. Thus, the user is part of the system and part of the control circuit which affects the information flow. The state of the user is evaluated by measuring at least one somatic phenomenon from him/her, and the content of the information and/or presentation parameters are changed on the basis of the measurements.

(21) Appl. No.: **10/679,443**

(22) Filed: **Oct. 7, 2003**

Related U.S. Application Data

(63) Continuation of application No. PCT/FI02/00300, filed on Apr. 10, 2002.

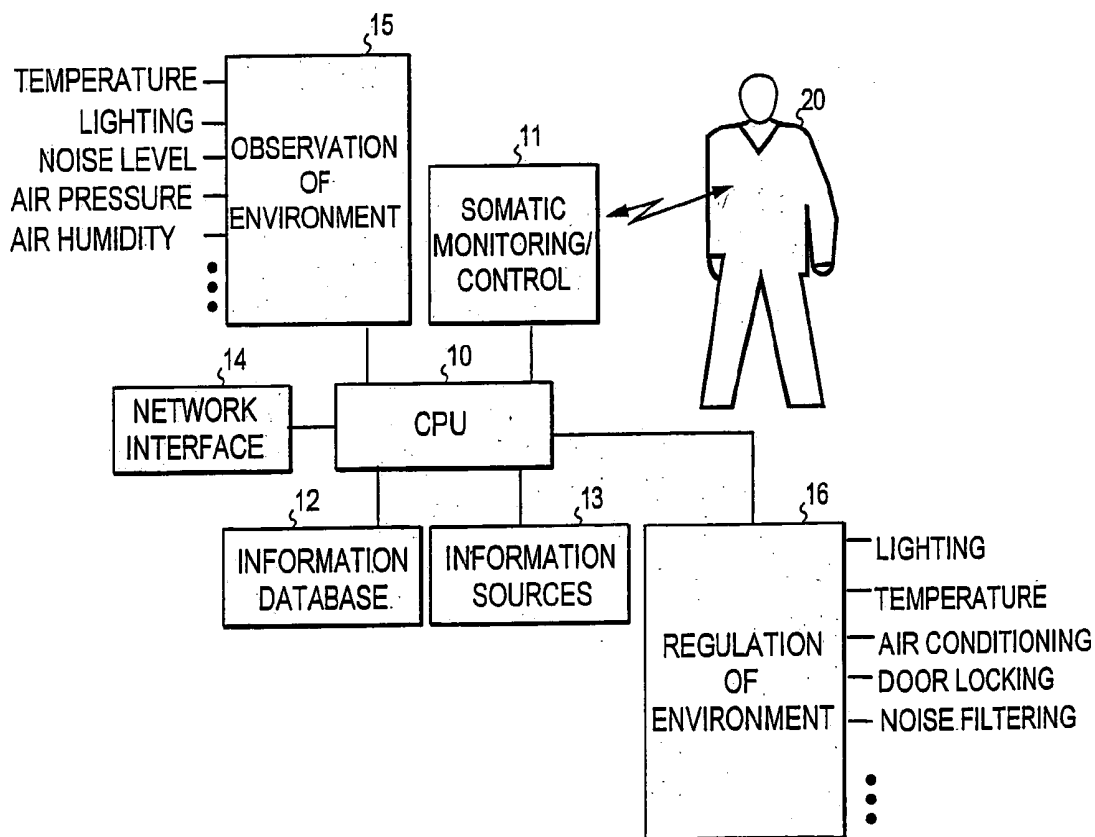

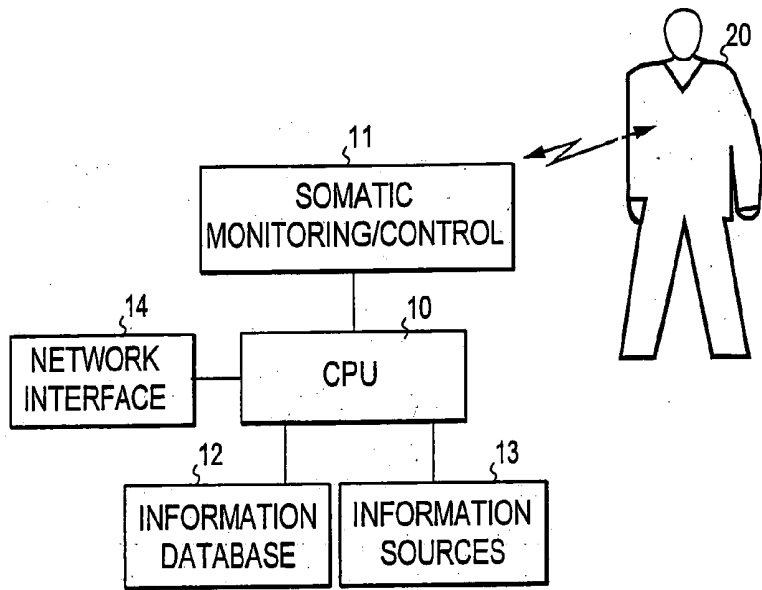


FIG. 1

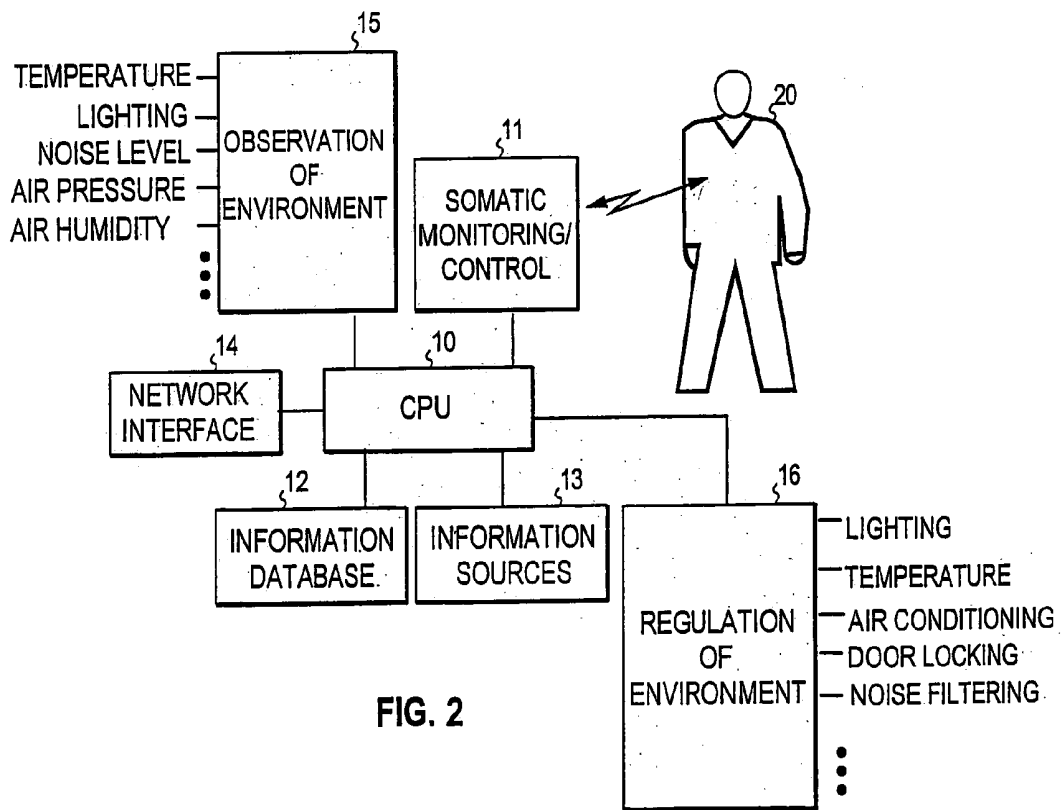


FIG. 2

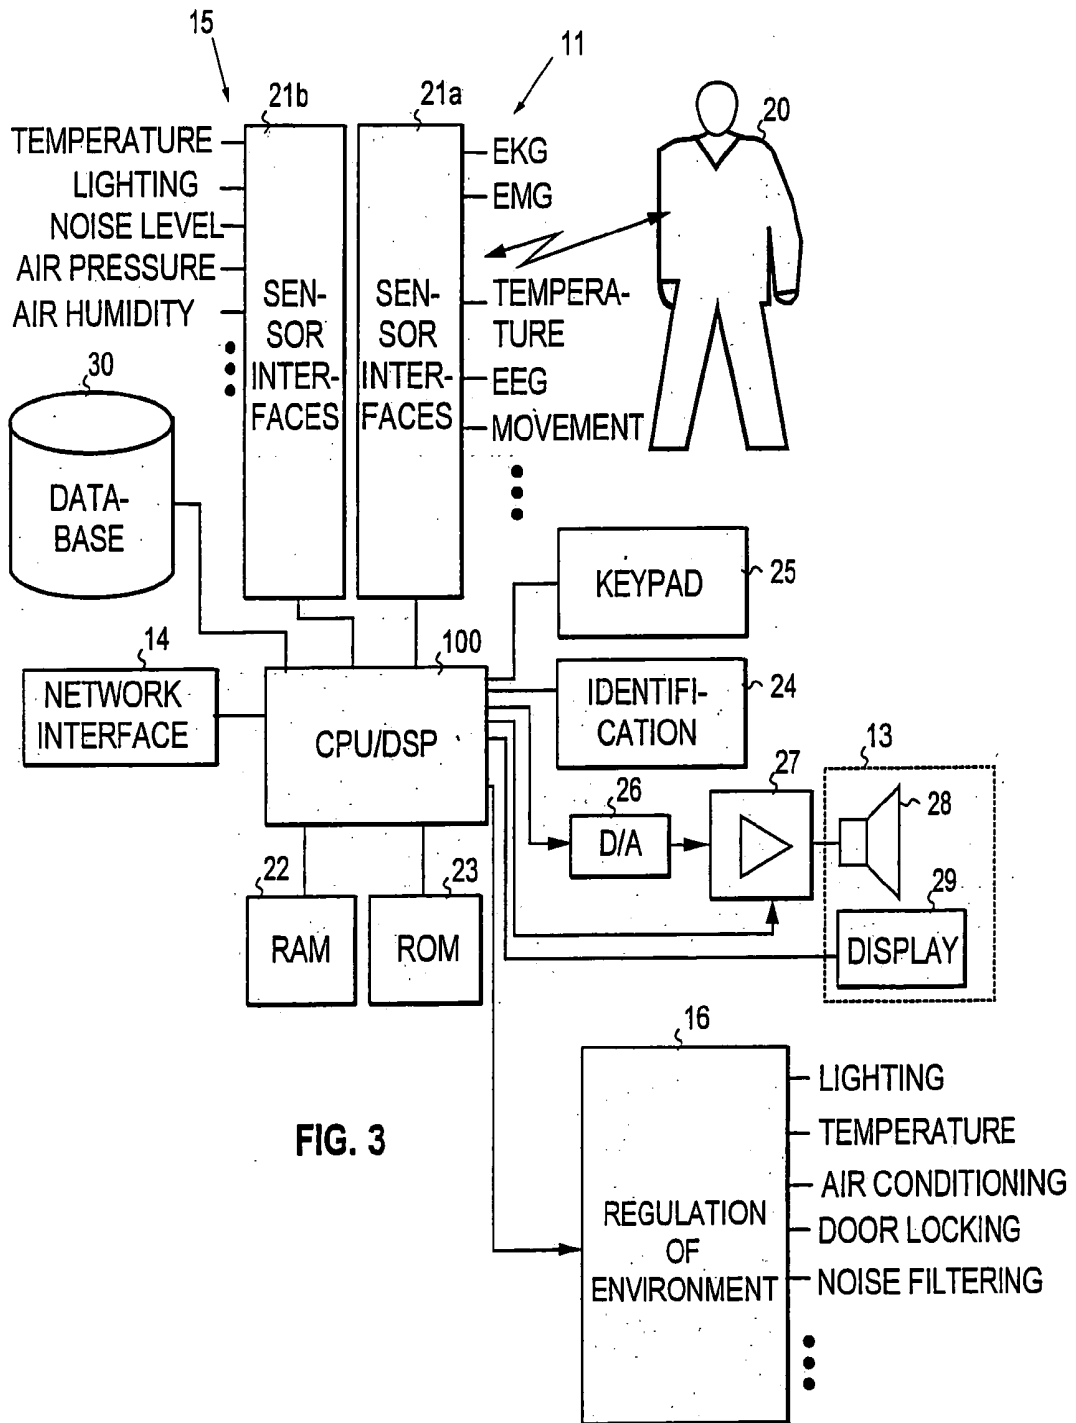
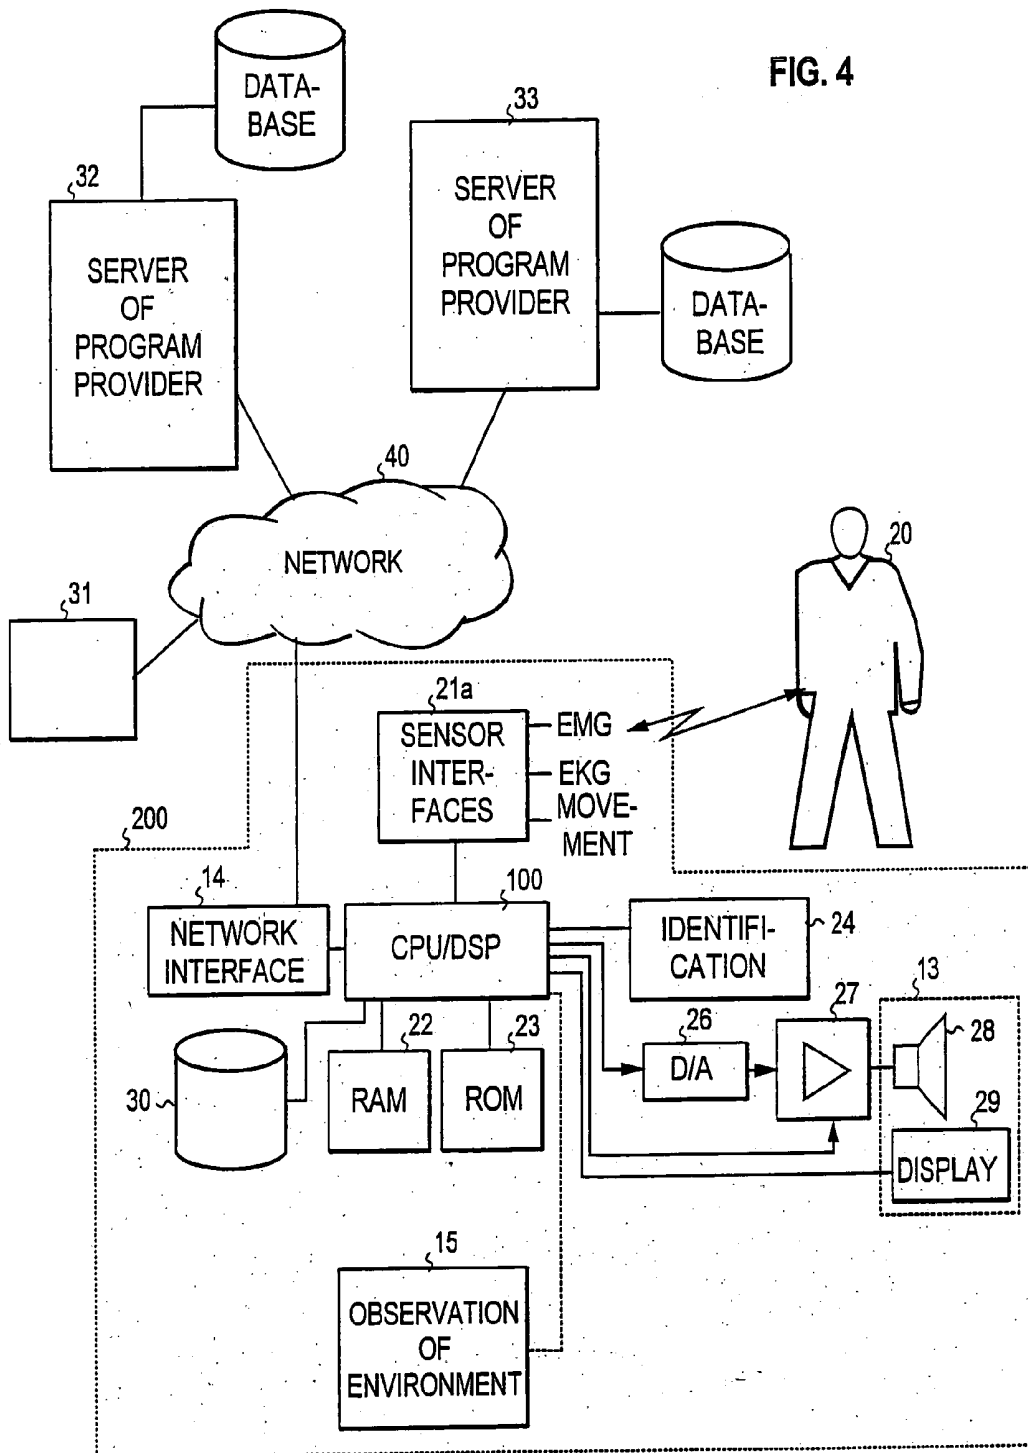


FIG. 3

FIG. 4



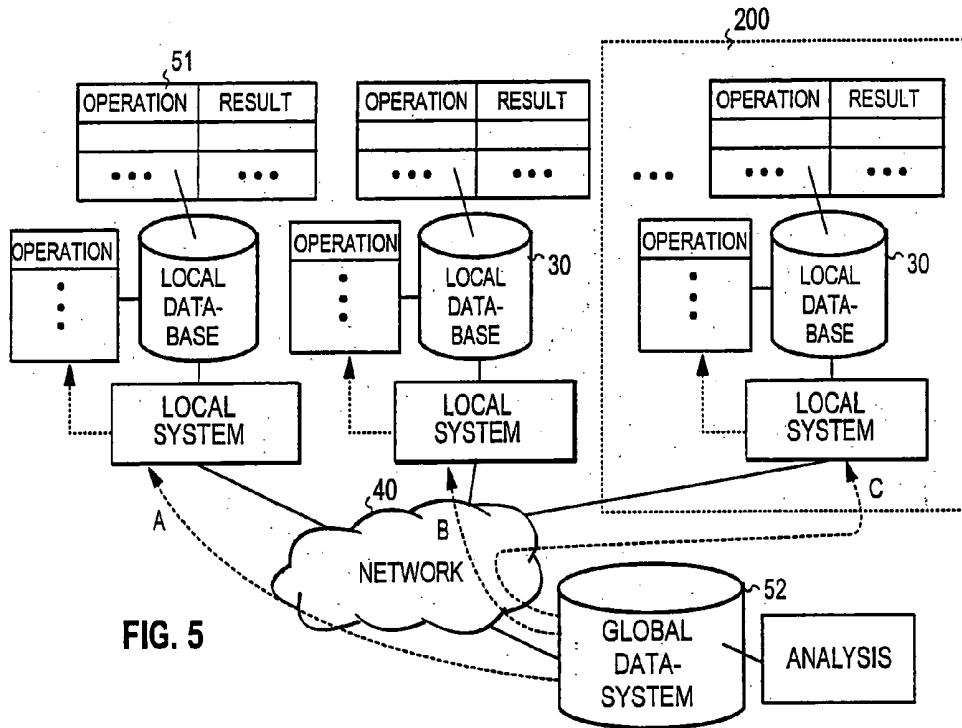


FIG. 5

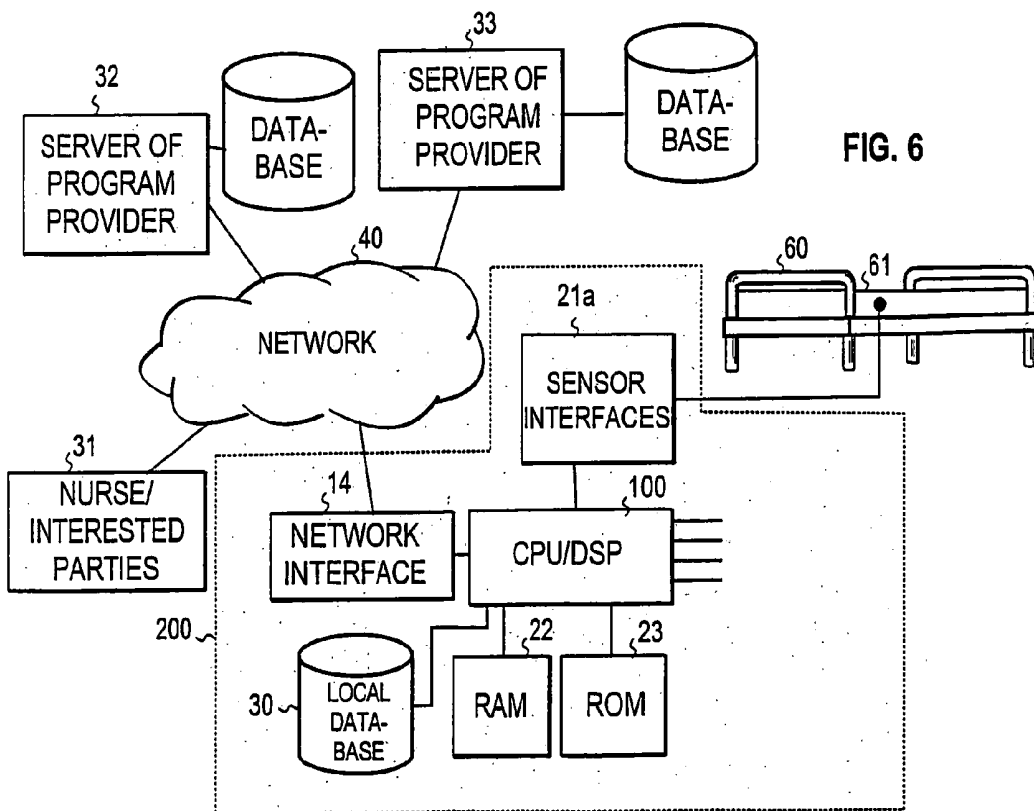


FIG. 6

PERSONALIZED INFORMATION DISTRIBUTION SYSTEM

FIELD OF THE INVENTION

[0001] The invention relates generally to intelligent information distribution systems, particularly to audio systems in which audio messages are given to users. In particular, the invention relates to information systems where an individual person or at most a small group of persons is simultaneously within the coverage of the information source.

BACKGROUND OF THE INVENTION

[0002] So-called intelligent sound reproduction systems in which the content of the information to be transmitted or the quality of the sound can be changed in accordance with environmental factors, for example, are intended for large, usually public spaces, where each loudspeaker unit is located in a different part of the space, such as a shop, shopping center, etc.

[0003] U.S. Pat. No. 5,576,685 (Saito) discloses a system where loudspeakers located in a public space are controlled on the basis of the conditions prevailing in the space. The objective is to improve systems which always reproduce a certain piece of music with the same volume, tone, and tempo. For this, the system includes at least one sensor which can measure background noise, temperature, brightness or another corresponding feature and which controls, based on the measurement, the sound sequence transmitted by the loudspeakers, and the characteristics of the sound sequence, such as its volume.

[0004] U.S. Pat. No. 6,091,826 (Laitinen et al.) in turn discloses a sound reproduction system for large spaces, in which the presence of people or their behavior, for example, can be monitored, in addition to the environmental conditions at each loudspeaker. The detection of the presence can be combined with detection of the identity of the person. Based on the monitoring, information dependent on the result of the monitoring is supplied from the loudspeaker. In this way individually targeted information, such as instructions or commercials, can be transmitted to different parts of the system, on the basis of how the listeners are located in the space, how they move in the space, and/or who they are.

[0005] On the other hand, small personal sound reproduction systems are passive and only obey the instructions given to them through a keypad. Examples of these are different portable players, such as MP3 players, or traditional radio receivers.

[0006] A drawback of the above known sound reproduction systems is that systems capable of adapting to the listener in real time cannot be implemented by them. This is because in these systems the state or ability of the listener cannot be taken into account; the listener affects the system only through his or her active choices and/or through predetermined parameters. Two persons approaching a loudspeaker in a similar manner thus cause a similar response (audio message), even though their current states and abilities for receiving the said audio message might be completely different.

[0007] The main objective of the invention is to accomplish an intelligent information distribution system which can adapt to the personal and real-time ability of the user as

well as possible and on that basis dynamically adjust the information flow and the manner it is presented so that they are as appropriate as possible for the recipient.

SUMMARY OF THE INVENTION

[0008] An objective of the invention is to devise an information distribution system which is suitable for personal use and can adapt to the current state of the user as well as possible, depending on the current cognitive, physical, mental and/or social performance of the user.

[0009] This objective is achieved with the solution defined in the independent patent claims.

[0010] The idea of the invention is to connect the user so that: the user becomes a part of the system and his or her current state and abilities affect the information content and/or the manner in which the information is supplied to him/her. Thus the user is part of the system and of the control circuit affecting the information stream. The system of the invention includes sensors through which signals are obtained from the user, signals describing various somatic phenomena directly associated with the user. The phenomena may be biophysiological and/or psychophysical. How the information is supplied to the user, how the supply and possibly other parameters are adjusted during the process, is determined on the basis of these signals. In this way the information flow is made as appropriate as possible for the user. In other words, when the state of the user is better known, the message given to him or her can be made more effective than before.

[0011] In a preferred embodiment of the invention, additional environmental monitoring supporting the actual measurement is performed in order to be able to evaluate the effect of the environmental conditions on the measurement signals. Additional measurements of this kind, which support the decision-making, can include measurements of the environmental temperature or air humidity, for example.

[0012] A further objective of the invention is to make the system suitable for different kinds of environments. For this purpose, another preferred embodiment of the invention includes regulation means for regulating the state of the environment (the presentation space and conditions) when necessary in order to render the response of the message as efficient as possible. Such control means can be included in the system even though it does not include the above-mentioned means for monitoring the environment. However, the system preferably includes both monitoring and regulating means. Different system alternatives are described in more detail below.

[0013] The system can be used for many different purposes, either as such or combined with other systems. Applications to be mentioned here are research (for example, medical), education, rehabilitation, therapy, systems based on virtual reality in which a tailored audio space is part of the system, or entertainment, such as games played via a network. The system can also be used together with other systems, for example, for selecting the most suitable channels from a large group of radio and TV channels. The system can also form an ergonomic man-machine system.

[0014] The core of the system can comprise a sound reproduction device like an MP3 player, and thus the system can form a future evolution version of the MP3 player.

[0015] Depending on the nature of the system, the control of the audio information can only take place locally, but the control can also be implemented as a higher-level control, in which case each local system is controlled individually based on the measurement data obtained from a plurality of distinct local systems.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] In the following, the invention and its preferred embodiments are described more closely with reference to the examples shown in FIGS. 1 to 6 in the appended drawings, wherein:

[0017] FIG. 1 shows the general principle of the system of the invention in its basic embodiment,

[0018] FIG. 2 shows the general principle of the system of the invention in an enlarged embodiment,

[0019] FIG. 3 shows a more detailed implementation of a system of the invention,

[0020] FIG. 4 illustrates the use of the system of the invention in remote rehabilitation,

[0021] FIG. 5 illustrates a system utilizing a higher-level control, and

[0022] FIG. 6 illustrates the use of the system of FIG. 5 for rehabilitation of bed patients.

DETAILED DESCRIPTION OF THE INVENTION

[0023] FIG. 1 illustrates the basic principle of the system according to the invention. The core of the system is formed by a central unit 10, which controls the operation of the system. A separate monitoring unit 11 measuring somatic phenomena associated with a user 20 is connected to the central unit. Based on these measurements, the central unit selects the information to be presented to the user and/or the manner the information is presented. The control of the manner of presentation refers generally to different ways of presenting the same content, and it can include the control of different presentation parameters, such as volume, tone, tempo, number of repetitions, etc., and the use of spatial sound, for example, so that the sound can be heard from the desired part of the listening space. The information available (e.g. the programs), from which the selection is made on the basis of the measurements, is stored, for example, in an information database 12, which is typically on a hard disk but it may also be in a component memory, for example. Alternatively, the programs can be downloaded through a network interface 14 from the network, or a wireless interface can be implemented for them as a WLAN/Bluetooth implementation in the 2.4 GHz license free band, for example. The information is presented through the information sources 13, which typically include at least a loud-speaker unit, as described below. The basic idea of the invention is to connect a human being as a part of the system by measuring a somatic/physiologic phenomenon from her/him and by selecting, based on the measurement, the content of the information to be presented and/or the manner of presentation so that it is as suitable as possible with respect to the current state of the user.

[0024] The idea behind the system according to the invention is that a human being subconsciously and consciously

observes his or her environment and his or her state therein. The current state or capability of a human being consists of his or her physical, cognitive, mental, and social performance. These vary individually in accordance with time, health, and state of activeness, among other factors, and they can be independent of each other. Modern brain research (including new imaging techniques) has in turn proved that the sense of hearing also functions subconsciously outside the active will of the person. When walking down a street, for example, a person can recognize his or her name as part of the sound environment. The long memory trace of sound and a strong coupling to emotion and imagination are a huge resource as such. The behavior and performance of an individual can be significantly affected by sound messages. By means of the system according to the invention, the behavior of a person and his or her current physical, mental, cognitive, or social performance, or all these factors, can be evaluated by measuring one or more parameters correlating with at least one such factor. Instead of, or in addition to, the measurement of absolute values, the relative state of an individual as compared to himself/herself or to a certain reference can be evaluated.

[0025] Thus one or more somatic phenomena correlating in the above-described manner with one of the said performances can be monitored by the monitoring unit 11. These phenomena can be divided into biophysical phenomena, which can indicate events at the tissue or cell level, and into phenomena associated with behavior or the nature of movements described by psychomotor quantities. Different alternatives for the measurements are listed in the following. Already today many of these measurements can be performed non-invasively and wirelessly.

[0026] The following are examples of biophysiological phenomena to be monitored.

[0027] EMG (Electromyography) measures the electric activity caused by muscular contractions. This measurement can indicate tension of muscles, fatigue, or physical work (movement), for example. EMG can be used, for example, in rehabilitation by presenting a rehabilitation program for the patient corresponding to his or her current condition. An EMG measurement is also suitable for management of stress and pain, for example, whereby the (audio)information and its presentation parameters are selected according to the current stress or pain status of the user.

[0028] An EKG measurement can be used mainly for monitoring the pulse. The pulse reflects the physical performance and/or the degree of physical load, state of activity, or tension, for example.

[0029] EEG (ElektroEnkefaloGrafia), i.e. brain wave registration, can be used for evaluation of the state of activity or power of concentration, for example, whereby it can be used as an aid in education to select ideal content/duration/repetition for the study session.

[0030] Electric conductivity of the skin can be used for evaluation of stress or psychic tension, for example.

[0031] Temperature measurement in a desired part of the body can also be used to evaluate stress, tension, muscle motoric work, or health, for example. Temperature can be measured non-invasively by an infrared heat camera, for example. In this way also the temperature differences in various parts of the body can be monitored simultaneously.

[0032] Measurements relating to respiration (e.g. rhythm) can in turn correlate with physical performance or strain, for example.

[0033] Blood pressure can also reflect strain, at least if other information, such as the normal blood pressure of the user, is available.

[0034] Similar to measurements of tissue or cell level, also measurements of hormone levels and microbiological quantities can be performed. The system can include micro-sensors, which control the supply of a measurement substance to the human system, the response in the system being measured dynamically. Thus somatic monitoring can extend to a control which in some way concerns the somatic operation of the user. On the one hand, the control can support measurement, for example, measurement of certain factors can require the supply of a measurement substance etc. in order for the measurement to be performed. On the other hand, the control may be needed in order to move the person to the operation range of the control loop of the system.

[0035] As mentioned above, also parameters directly related to the physical behavior, such as the eye movements or other movements of the user. The former can indicate attentiveness and the latter haste, for example. Both can be measured by a video camera, for example, and the movements of the user can also be measured by acceleration transducers or a gyroscope, for example.

[0036] Speech recognition can be used for evaluation of tension and social activity. In addition, less sophisticated equipment can be used to evaluate certain parameters from speech without recognition, such as pitch, number of pauses, speed of speech, which can adequately characterize the psychophysical state of the speaker.

[0037] It is to be noted that the above-described measurements do not necessarily correspond to measurements made in a laboratory, in which absolute values are obtained, but it is enough if changes relating to the same user can be solved by the measurements. Thus, the user himself/herself acts as a reference, and only a change is of significance.

[0038] Movement information obtained from the user (from his/her eyes, for example) can be used, for example, in museums or corresponding exhibition spaces for supplying suitable information according to the movements of the user. When the user moves with determination (according to an acceleration transducer, for example), the information can be more general and can change automatically according to the location (the location can be concluded by means of a DGPS receiver or by integrating the data received from the acceleration transducer). Stops made by the user automatically increase the information content and the depth of the content. If the acceleration sensor is of a 3D type, turning the eyes to the ceiling, for example, can direct a description of a ceiling fresco or the like to the earpieces. The nature of the movements of the user can thus be an indication of his or her state (for example wishes/intentions), the nature being described by signals obtained from equipment carried by the user himself/herself, by means of which equipment the user is connected as a part of the control loop.

[0039] The user can be connected to the system through a wireline connection or wirelessly. The sensors have traditionally been based on a wireline connection, but the por-

tion of wireless sensors will increase as wireless short-range communication becomes more common in all kinds of electronic equipment. The wireless sensors can utilize a short-range RF technique or a Bluetooth technique, for example. Biosensor technology will also develop quickly. For example, at the moment there are sensors on the market based on wireless escort memories, the sensors being readable from within a nearby distance. It has also been possible to attach a sensor part to these sensors so that temperature, pressure, etc. can be measured by them. The said sensors can be used for wireless measurement, for example, from the surface of the skin or even from within the skin as an implant.

[0040] The measurements on the user can also be made so that the sensor is not attached to the user, but a physiological quantity, such as pulse or respiration is measured from the mechanical movement of a bed or a chair, for example, by means of a foil which converts mechanical movement to an electrical signal.

[0041] FIG. 2 illustrates three other embodiments of the system in accordance with the invention. In addition to the units mentioned above, the system can namely include observation means 15 for monitoring the environment of the user, regulation means 16 for regulating the environmental conditions, or both the observation means and the regulation means (three embodiments).

[0042] The observation means 15 can be used to monitor desired parameters or phenomena relating to the environment where the user is. The quantities measured from the environment vary typically according to which quantities are measured directly from the user, in order to take into account the effect of the environmental conditions on the actual physiological measurement. For example, the temperature of the environment may be an important piece of information in order to be able to evaluate the state of the user by means of a body temperature measurement or a skin conductivity measurement on the user. Similarly, the brightness of the lighting can affect the EEG, for example, or air humidity can affect skin conductivity. Air pressure, in turn, can affect pulse and the frequency of respiration, for example.

[0043] By means of the regulation means 16 a quantity is controlled, whose control boosts the effect of the response of the information given to the user. As the quantity to be controlled can even be such that it does not relate to the somatic control but otherwise boosts the response, the regulation means can belong to the system even if there are no observation means 15 in the system. The locking of doors or lighting can be mentioned as an example of such, provided that a quantity is measured from the user which does not correlate with the intensity of the lighting.

[0044] The quantities to be measured from the environment are such that they indicate whether a control has to be performed by the regulation means in order to enhance the response, and if so, how the control has to be performed. An example of this is a measurement of the noise in the environment, as a result of which an active noise cancellation can be initiated based on an opposite-phase signal, for example.

[0045] It is yet to be noted that FIG. 2 discloses examples of quantities/items which can be controlled or monitored in

the systems according to the invention. Thus the monitoring or control of all quantities items does not have to be incorporated into the same system.

[0046] FIG. 3 shows a more detailed structure of one system in accordance with the invention. The core of the system is formed by a CPU or a signal processor unit **100**, which is termed "a processor unit" below. Sensor interface units **21a** and **21b** are connected to the processor unit, the sensors being connected to the sensor interface units either via wireline connections or wirelessly. Sensor interface unit **21a** is for the measurements made on the user, i.e. for somatic control, and sensor interface unit **21b** is for monitoring the environment, although all the sensors can be connected to the same interface unit.

[0047] Sensor interface unit **21a** can also include a camera interface, if a camera is used for monitoring. A program memory **23** and a data memory **22** (RAM or DRAM) are associated with the processor unit, the program memory to store the software used by the processor and the data memory to store the data used by the processor. The program memory can in practice consist of so-called Flash memory cards. The software can also be downloaded or updated through a network interface. Efficient processing algorithms or fuzzy logic inference can be implemented by the processor unit. The information to be presented can thus be modified flexibly by the processor unit using, for example, different kinds of filters, and the environmental factors can be regulated in a desired way in order to enhance the response.

[0048] A database **30** can further be associated with the processor unit, the database storing intelligence for the apparatus, such as rules and measured responses of previous information deliveries, or control values according to which the selection of the programs and their presentation parameters occur.

[0049] The information source **13** includes typically a loudspeaker **28** whose task is to convert the electrical signal into an acoustic signal. The processor unit controls the loudspeaker through a D/A converter **26** and an amplifier unit **27**. In addition to the loudspeaker, the information source can also include a display unit **29**, for example, for displaying graphic or textual information. The display unit can even replace the loudspeaker, if there is no need to send audio information.

[0050] The apparatus preferably also includes an identification device **24**, which identifies the user of the apparatus. The identification can take place using any known technique, for example, a smart card and a card reader. Each user then has a smart card of his or her own, which stores user-specific information. Using this information, the program collection belonging to the application associated with the user, and possibly other information relating to the application, such as control information, can be retrieved through the network, for example. Different users can in this way utilize the system for different purposes.

[0051] The apparatus can further include a keypad **25** which can be used to control the system and to measure the reaction time of the user, for example, if it is needed for the evaluation of the state of the user.

[0052] Audio information downloaded from the network can be stored into the mass memory **30**. Depending on the

application, this information can be in the form of ready-made programs or as logic audio sequences, of which each can form one record, for example. The message contained by a logic audio sequence includes one logic entity. The records to be stored can be formed so that certain words, sentences, or parts of sentences are stored only once, and the processor combines the records sequentially so that they form the desired message.

[0053] Through a system provided with regulation means **16**, it is possible to implement ergonomic man-machine systems for different purposes. As an example can be mentioned the incorporation of the system into a car, for monitoring the fatigue of the driver and for giving audio warnings. These audio warnings can be enhanced, for example, by means of regulation means which open the window or the radio, cause vibration of the seat, etc. The regulation means can also be incorporated into intelligent clothing, for example, which is provided with a massage function for enhancing the response of the audio message. In man-machine systems like these, the information can also be delivered, in addition to, or instead of, loudspeakers, through glasses, which are put on, or through micro displays, whereby the processor can modify the video information to be presented similarly to the audio information.

[0054] The regulation means can also include different kinds of mechanisms whereby the desired conditions or a desired (imaginary) situation are simulated in order to enhance the response. These can be, for example, mechanisms whereby desired weather, climate, or movement conditions, or scents corresponding to the desired situation, for example, are produced in the space where the information is delivered.

[0055] FIG. 4 shows an example of one system in accordance with the invention, the system being in this example used for personal rehabilitation through a communication network. In the rehabilitation, EMG and EKG signals and movement can be measured of the user, for example. Several different content providers can be in the network **40** which produce programs for one or more applications. Let us assume that there are at least two content providers for the rehabilitation, the servers being denoted with reference numerals **32** and **33**. The rehabilitator or other expert rehabilitating the user first downloads at his or her own server or terminal **31** suitable start programs and initial parameters from the database of one or more service providers to the mass memory, such as the hard disk of the system of the user. Alternatively, the rehabilitator can store a software profile in the smart card of the user, whereby the process unit downloads the said programs after it has verified the identity of the user with the identification device **24**.

[0056] During the rehabilitation event the above-described measurements (and possibly also monitoring of the environment) are performed and the rehabilitation instructions given through the loudspeaker **28** are controlled, e.g. their content, level of difficulty, duration, and/or number of repetitions.

[0057] Control instructions can be downloaded to the apparatus or smart card along with the start programs, the control being performed in accordance with the instructions on the basis of varying measurement results.

[0058] In accordance with the progress of the user, new programs are downloaded to the apparatus. The rehabilita-

tion staff can also allow the user to access the program data of different service providers as the rehabilitation proceeds. For this purpose the rehabilitation staff can retrieve measurement data for its terminal or server from the user equipment in order to evaluate the progress of the person and to give new instructions. The rehabilitation staff can also (automatically) get reports or warning-like information of different events from the system.

[0059] The same equipment can also be used for different applications and thus the apparatus can be used for some other purpose after the rehabilitation session, for example, for entertainment, whereby also the objectives (and the measurements) change automatically.

[0060] In an individual local system **200** the use of sound information is analyzed and optimized locally. At the local level the operation is developed and maintained for activating the customers. At the local level it is also observed most quickly, what type of activities (games, etc.) are the best ones for obtaining the best result. Moreover, the local level generally offers the best point of view of in which direction the activities should be developed in order to improve the results. The RAI index, for example, can be used as a meter for the activity of the customers, in which case a clear scalar quantity is obtained for the activity and ability.

[0061] Although the local level generally offers the best point of view of how the existing services should be developed, creating completely new activities at the local level is generally difficult. This is why the system can in some cases include a higher-level control, by means of which methods found to be good at the local level can be analyzed and combined. In this case dependencies "action→improvement of RAI index" can be obtained from all local systems.

[0062] In order for reasonable operation models to be beneficial also at other local sites, there must be a connection between them. This connection is the higher-level control implemented through network **40**, one or more servers in the network **40** participating in the control. The objective of the control is to combine the causal connections detected in the local systems **200** and to control the local systems on the basis of this combined information. **FIG. 5** illustrates this principle. A relation database **51**, for example, is created in the system at each local level, the database to comprise certain operations performed at the local level and the locally measured results to correspond to the operations. These results are transferred through the network **40** to a higher-level system **52**, where the desired analysis is performed for the operation/RAI-index pairs in question. The local systems are controlled on the basis of the analysis results (arrows A, B, and C). The response of the sound programs can thus be seen as changes in the resulting parameters of the quantities measured from the people. The results are collected to the higher-level system for analysis.

[0063] For example, sound information can be classified in different categories on the basis of the information content. There should be as many of these categories as possible, and it does not matter if these overlap. Also the activation operations of the customers are classified, in respect to the number of interactions, sound information classes and/or question/answer pairs, for example. The number of activation operation classes is not restricted either; generally the more classifications there are, the better it is.

[0064] The higher-level control system can be implemented in many different ways. In the control, the following items can be utilized, for example:

[0065] statistical analysis,

[0066] multiple variable control,

[0067] neural computation, e.g. self-organizing maps.

[0068] The use of a self-organizing map is preferable in the sense that not much knowledge about the process to be controlled is required. The number of parameters and their interdependencies are completely open. In the high-level control a self-organizing map (SOM) is constructed of the classes of sound information and operations and of their effect on the results measured from the customers. The parameters of the activation operation classes form an N dimensional map, the effects of the operation (which are positive or negative) being input as a point on the map. In this way the components whose effect is generally strong can be selected from the operations found to be good at the local level. In addition, high-level control combinations of operations ascertained as good at the lower level can be found by means of the self-organizing map, the combinations being better than the operations separately. In this way those acting locally can be directed to take more into consideration operations used at other sites. The self-organizing map efficiently finds statistical dependencies between different operations.

[0069] The operation classes can be as follows, for example:

[0070] query/answer type game

[0071] the questions include current information

[0072] the number of activation events is 20 in an hour

[0073] the number of activation events is 40 in an hour

[0074] music at least every 10 minutes.

[0075] These classifications are in use in all local systems. When a new operation program is created, it is classified according to the classes in use. If necessary, new classes can be created, whereby these new classes are immediately communicated to the other sites.

[0076] Let us assume that in one system a new query/answer type game has been developed. It has been classified and its effect on the RAI index has been analyzed in the local system: it has increased the average activity index by +3. The self-organizing map of the global data system **52** is informed of this information. In another local system it has been discovered that it is beneficial to play music to customers every 10 minutes. In this case the music has increased the activity index by +1. Now a denser area is formed for these classes on the map. It can be seen that the above operations effectively increase the index. Information about this can be supplied to the local level, whereby the activating possibility of a certain type of music is noticed in one local system and the beneficial effect of the query/answer type game in another. Thus, by means of the high-level control both systems can learn from the results of other local systems.

[0077] FIG. 6 illustrates the use of a system according to FIGS. 4 and 5 for rehabilitation of bed patients. In this case the system can be based only on the local control; however, it is preferably a system according to FIG. 5, which is based on a higher-level control, whereby the global data system comprises server 33 of a service provider, the self-learning system of the above kind, for example, being created in the server on the basis of the measurement data collected from the local systems 200.

[0078] The rehabilitator can construct at his or her terminal 31 a modular rehabilitation program for the person or group on the basis of the knowledge obtained from the local data system.

[0079] In the example of FIG. 6 a person is placed in bed 60, which is provided with sensors. These can be, for example, located in the sensor mattress 61 in the bed of the person to be rehabilitated, similarly to the description in the WO 98/34540 publication, for example. In this way factors such as movements, pulse, and respiration can be measured as a function of time, as well as changes in the weight of the person.

[0080] The said parameters can be used, for example, in the physical rehabilitation of persons who have been in long-term bed care. By measuring movement (and pulse and respiration) variables from different sectors of the mattress, the sound-implemented rehabilitation instruction can be adjusted as controlled by the measurement parameters. For example, the agility and response of a person in turning exercises and the muscular shape (the response as a force) can be set to control the presentation speed, duration and repetitions of the physical exercises. Prior development and background skills can be obtained from local database 30, when the identification of the person has been made by means of the escort memory in the wristband, for example.

[0081] The presentation information, the environmental parameters, and the responses measured from the person are transferred to the global data system (32 or 33) from which the values of the presentation parameters are obtained. The presentation of the programs can occur either on-line or offline.

[0082] In an application of the above kind a possibility can also be given for interested parties involved with the person in care to follow the results of the rehabilitation or sleep and its parameters, for example, over the network either from a local database 30 or from a global database 52.

[0083] Instead of a bed, a chair can also be used in geriatrics, for example, whereby the chair includes mattress sensor elements in locations such as the hand grips, the back rest, and/or the lumbar region. These elements act in the above-described manner as an information collecting unit which collects data for the local data system. A loudspeaker or a similar information source can be integrated with the chair, for example, with the raised back rest of the chair, the information content being presented through the information source. In other respects a system provided for a chair can be as described above.

[0084] A local system 200 according to the invention can be implemented, for example, in one portable player which is preferably based on a SOC solution (System-On-Chip), such as the current MP3 player.

[0085] Although the invention was described above with reference to the examples shown in the appended drawings, it is obvious that the invention is not limited to these, but may be modified within the idea of the invention disclosed in the appended patent claims. For example, the system can be combined with other systems, such as systems where the information to be presented is ready. As an example can be mentioned the reception of (digital) radio and television transmissions, whereby the system can suggest, having made measurements of the above kind, the most suitable channels from the dozens or hundreds of channels available, in accordance with the current state of the user. The information source of the system can thus be a part of another system. The system can also be a part of the known audio systems described in the beginning, which are intended for large spaces. Also the quantities to be controlled, such as content, volume of sound, tone, tempo, reverberation, repetition of the same content, etc. depend on the application used. The use of spatial sound, so that the sound can be heard from the desired part of the listening space, can be included in the quantities to be controlled. The system can also be connected to external systems, such as building automation systems, whereby intelligent building automation for regulating the temperature, lighting, locking of doors, access control etc. is incorporated into the system, in which case no extra means are needed for observation and regulation of the environment. When combined with building automation, the system can report information concerning the house or room by sound and give instructions to the user or via the network also to other parties (for example the so-called call center service). A small group can also use the system according to the invention at the same time, especially if the group is homogenous enough. In this case the selections can be made on the basis of the averages of results obtained from the users, or utilizing the so-called fuzzy logic.

1. Information distribution system, comprising

at least one presentation device (13) for presenting information to a user,

control means (10, 100, 52) for controlling the operation of said at least one presentation device (13), and

monitoring means (11) for obtaining measurements in the system, the control means being responsive to the monitoring means for controlling the operation of the presentation device on the basis of the measurements, and the monitoring means (11) including measurement means for measuring somatic phenomena directly from the user,

characterized in that

the control means are adapted to control the content and/or the manner of presentation of the information transmitted via the presentation device dependent on the current state of the user, the current state being indicated by the measurement means.

2. A system according to claim 1, characterized in that the measurement means are adapted to measure at least one biophysiological phenomenon directly from the user.

3. A system according to claim 2, characterized in that the measurement means are adapted to make at least one type of measurement from a group including measurements of the

EMG, EEG, and EKG type, and measurements indicating skin conductivity, temperature, blood pressure and frequency of respiration.

4. A system according to claim 1, characterized in that the monitoring means further include observation means (15) for measuring the state of the environment of the user, whereby the control means are also responsive to the observation means.

5. A system according to claim 1 or 4, characterized in that it further includes regulation means (16) for regulating the state of the environment of the user, whereby the control means are adapted to control the regulation means.

6. A system according to claim 1, characterized in that it further includes adjusting means for adjusting the somatic operation of the user.

7. A system according to claim 1, characterized in that the measurement means comprise sensors located on the user, the sensors being adapted to measure the nature of movements of the user.

8. A system according to claim 1 or 7, characterized in that it is incorporated into a portable player.

9. A system according to claim 1, characterized in that the control means comprise

local control means (10, 100), operatively connected to control the presentation device, and

global control means (52), operatively connected to control the local control means via a communication network (40).

10. A system according to claim 9, characterized in that the global control means are adapted to control several different local control means which are separate from each other.

11. A method for implementing a personal information distribution system, the method comprising the steps of:

presenting the information to the user via at least one presentation device (13),

controlling the operation of said at least one presentation device by control means (10, 100),

performing measurements in the system by monitoring means (11) to which said control means are responsive, the monitoring means being adapted to measure at least one somatic phenomenon from the user,

characterized in that

the controlling step includes selecting, on the basis of the measurements made by the monitoring means, the content and/or the manner of presentation of the information to be transmitted through the presentation device.

12. A method according to claim 11, characterized by measuring at least one biophysiological phenomenon from the user by the monitoring means.

13. A method according to claim 11, characterized by further performing environmental measurements on the state of the environment of the user in the system, whereby the control of the operation of the presentation device occurs based on both said at least one somatic phenomenon and the environmental measurements.

14. A method according to claim 13, characterized by further regulating the state of the environment of the user.

15. A method according to claim 11, characterized by further including the step of adjusting the somatic operation of the user.

16. A method according to claim 11, characterized by fitting the monitoring means on the user and measuring the nature of the movements of the user by said means.

17. A method according to claim 11, characterized by

implementing the control means as several local control means (10, 100) and as global control means (52), whereby each local control means (100) is adapted to control the presentation device corresponding to said means, and the global control means (52) are adapted to communicate with the local control means through a communication network (40),

transferring measurement data from the local control means to the global control means, the measurement data being obtained from the monitoring means, and

defining control information for the local control means in the global control means, whereby the control of the local control means occurs on the basis of the control information defined.

* * * * *

专利名称(译)	个性化信息发布系统		
公开(公告)号	US20040101146A1	公开(公告)日	2004-05-27
申请号	US10/679443	申请日	2003-10-07
[标]申请(专利权)人(译)	莱蒂宁ARVO petabalo Jyrki VUORI雅柯·		
申请(专利权)人(译)	莱蒂宁ARVO PETSALO JYRKI VUORI雅柯·		
当前申请(专利权)人(译)	AUDIO RIDERS OY		
[标]发明人	LAITINEN ARVO PETSALO JYRKI VUORI JARKKO		
发明人	LAITINEN, ARVO PETSALO, JYRKI VUORI, JARKKO		
IPC分类号	A61B5/00 A61B5/01 A61B5/022 A61B5/0402 A61B5/0488 A61B5/05 A61B5/18 G06F3/01 H04R27/00 H04B3/00		
CPC分类号	H04R27/00 A61B5/0022 A61B5/002		
优先权	2001000767 2001-04-11 FI		
外部链接	Espacenet USPTO		

摘要(译)

本发明涉及一种信息分发系统，尤其涉及一种包括一个或多个本地系统的音频信息分配系统，每个本地系统用于个人使用或用于小组。为了使系统尽可能地适应用户的当前状态，用户作为系统的一部分被连接，使得他或她的当前状态影响向他/她提供信息的方式。因此，用户是系统的一部分，并且是影响信息流的控制电路的一部分。通过测量来自他/她的至少一个体细胞现象来评估用户的状态，并且基于测量值改变信息和/或呈现参数的内容。

