



US 20040210165A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0210165 A1**

Marmaropoulos et al.

(43) **Pub. Date: Oct. 21, 2004**

(54) **SELECTIVELY APPLIED WEARABLE MEDICAL SENSORS**

(76) Inventors: **George Marmaropoulos**, Thessaloniki (GR); **Clive van Heerden**, London (GB)

Correspondence Address:
PHILIPS INTELLECTUAL PROPERTY & STANDARDS
P.O. BOX 3001
BRIARCLIFF MANOR, NY 10510 (US)

(21) Appl. No.: **10/842,380**

(22) Filed: **May 10, 2004**

Related U.S. Application Data

(63) Continuation of application No. 10/043,380, filed on Oct. 26, 2001, now Pat. No. 6,755,795.


Publication Classification

(51) **Int. Cl.⁷** **A61B 5/103; A61B 5/04**

(52) **U.S. Cl.** **600/587; 600/300; 600/388; 600/386; 73/379.01; 128/897**

(57) **ABSTRACT**

A wearable garment includes medical sensor devices of well-known design that are selectively pressed against the skin of the wearer when it is desired to obtain medical readings, such as heart rate or temperature, or to apply treatment such as electrical pulses for defibrillation purposes. The garment incorporates one or more bands of flexible material that circumscribe portions of the wearer's body, with at least one sensor device positioned on the garment between the band and the wearer's body. To assure the comfort of the wearer, the circumference of the band can be shortened selectively from a first dimension, which loosely circumscribes a desired portion of the wearer's body, to a second, lesser dimension, which more tightly circumscribes the wearer's body and presses the sensor securely into contact with the wearer's skin. In one embodiment of the invention, the circumscribing band has the form and function of a drawstring loop, with ends adapted to be drawn in opposite directions so as to tighten the loop about the circumscribed portion of the user's body. In another embodiment, the band is a continuous loop of material, incorporated into the structure of the garment, and formed of material such as Shape Memory Alloy wire, or any similar material, that has the characteristic of shortening in axial length in response to the application of electrical current. Such materials are well-known in various fields, such as robotics, for example, where they are identified as "muscle wires" or "Nitinol".

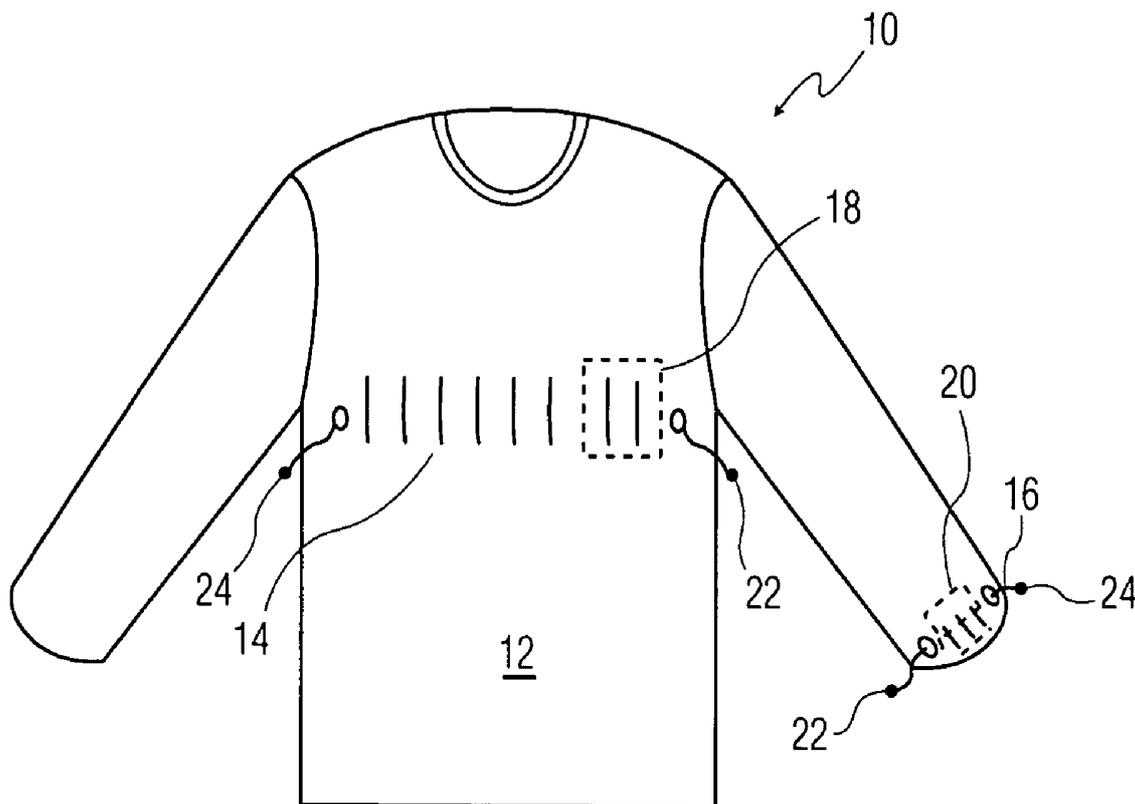

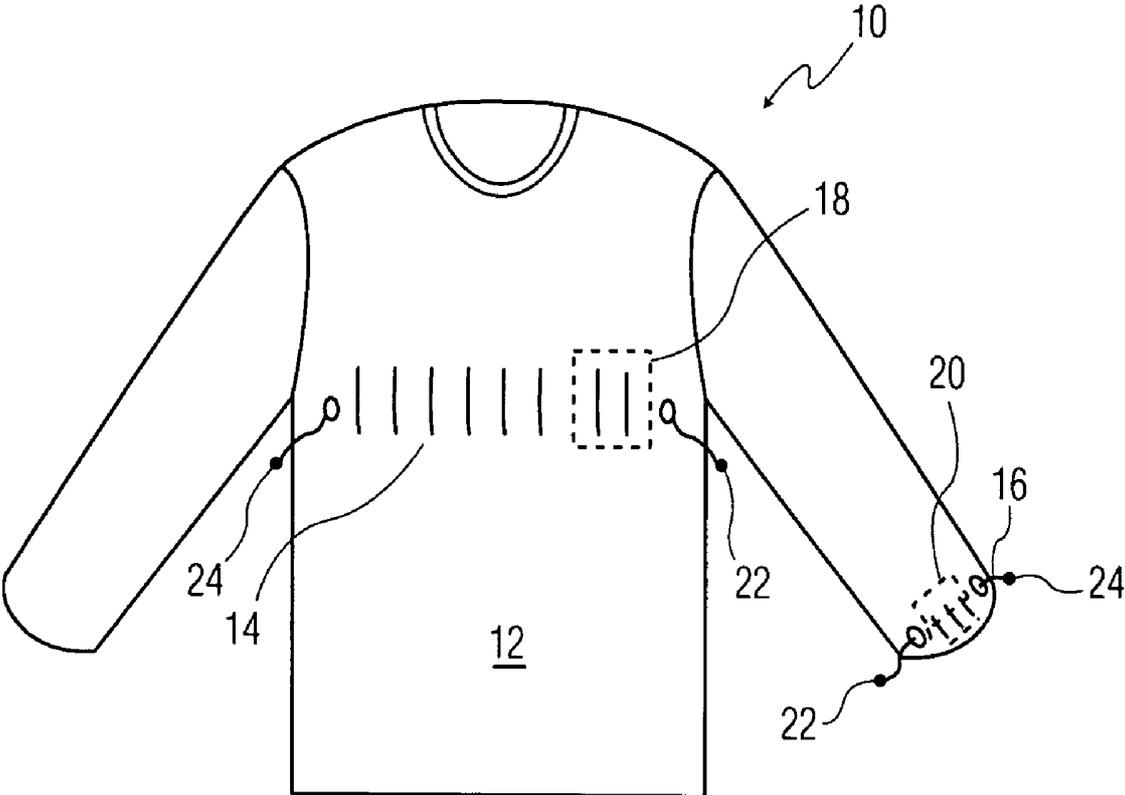


FIG. 1

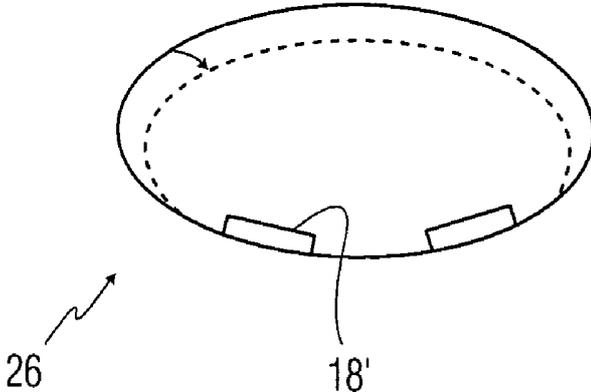


FIG. 2

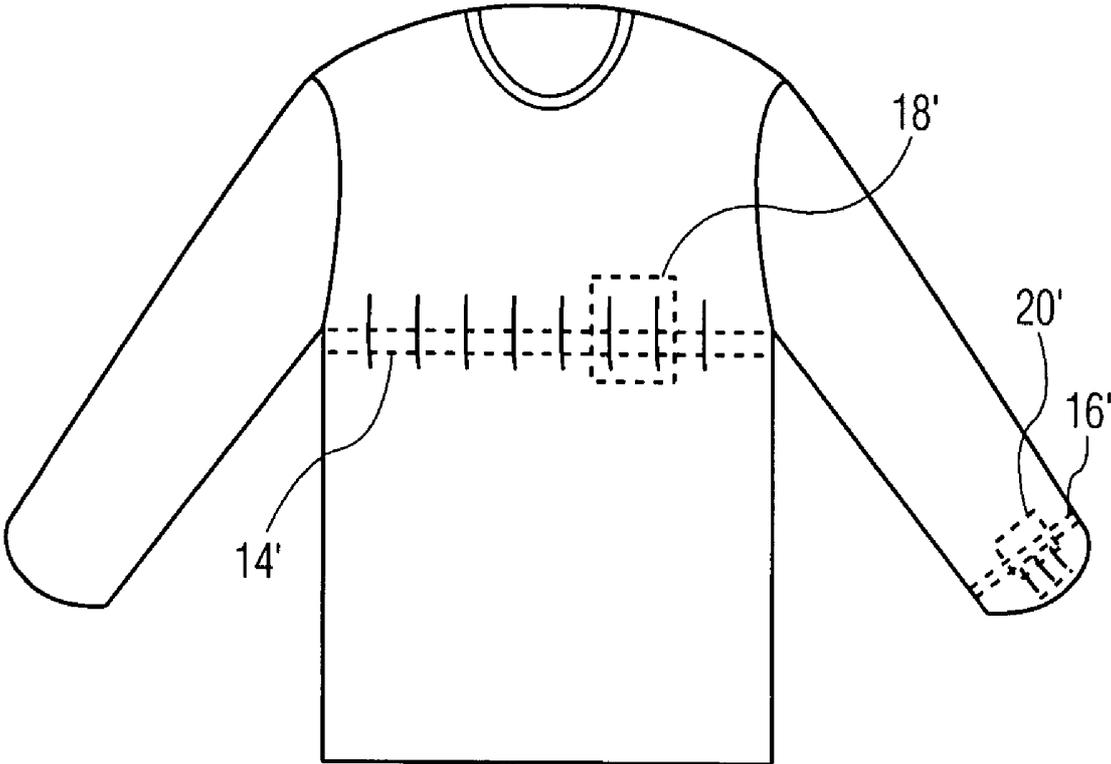


FIG. 3

SELECTIVELY APPLIED WEARABLE MEDICAL SENSORS

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] This invention relates to sensors used in the electrical treatment and monitoring of human and animal bodies. More specifically, the invention relates to wearable garments that allow sensor devices to be pressed selectively against the skin of the wearer when it is desired to obtain medical information or to apply treatment by contact with the surface of the skin.

[0003] 2. Description of the Invention

[0004] Sensing and treatment devices for contacting the surface of the skin are well-known in the art. It is also well-known that such devices require tight-fitting, e.g. elevated unit pressure, contact with the skin. However, the incorporation of such sensors into wearable garments that provide for applying sensors to the skin of a wearer with selective and/or variable pressure, is not well-known.

[0005] In the prior art, sensors are either adhered directly to the skin of the wearer using well-known types of adhesive materials or, they are tightly strapped to the user's body using suitable straps or bands having buckles or other clasp mechanisms adapted to the purpose. Such prior art apparatus for affixing sensors to the skin of a user do not take the user's comfort into consideration by allowing the pressure of the sensor against the skin to be increased easily only when the sensor is in use.

[0006] The present invention overcomes these problems and limitations of the prior art by allowing sensors to be pressed against the skin of a wearer selectively, only when needed or desired. The sensors are mounted on the inside of a wearable garment, and the garment incorporates circumscribing bands that can be reduced in diameter, selectively, to press the sensors against the skin of one wearing the garment.

SUMMARY OF THE INVENTION

[0007] The present invention discloses a wearable garment that incorporates one or more skin-contacting sensor devices positioned to contact the skin surface of a user wearing the garment. The wearable garment of this invention incorporates one or more bands of flexible material that circumscribe portions of the wearer's body with at least one sensor device positioned between the band and the wearer. The circumference of the band can be shortened from a first dimension, which loosely circumscribes the desired portion of the wearer's body, to a second, lesser dimension, which securely presses the sensor into contact with the wearer's skin.

[0008] In accordance with this invention, the band may be tightened about the wearer's body either by drawing the ends of a loop about the body in the nature of a drawstring or by shrinking the overall length of the material of a continuous loop as by passing an electrical current through a continuous loop made of shape Memory Alloy Wire. In this regard, the band may be loosely incorporated into the body of the garment in the well-known manner of a drawstring or, the band may be integrated into the body of the

garment as by forming a desired portion of the fabric material from different fibers such as fibers comprising Shape Memory alloy. To utilize the electrically responsive shrinkage characteristics of shape-memory alloy material in a convenient manner, the garment may be provided with means for supporting or otherwise carrying with it, a portable electrical power supply such as a battery.

[0009] Further in accordance with this invention, it may be noted that any treatment or monitoring equipment that relies upon the sensors carried by the wearable garment, may incorporate internal features such as a programmable micro-processor to activate a band formed of shape memory alloy, at a predetermined rate or in accordance with a predetermined schedule.

[0010] These and other and further features and advantages of this invention will be made more apparent to those having skill in this art, by reference to the following specification considered in conjunction with the accompanying drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is a front plan view of a wearable garment in accordance with this invention, incorporating two separate drawstrings positioned to apply two separate sensors to the skin of a wearer;

[0012] FIG. 2 is a pictorial representation of an alternative embodiment of an electrically activatable band usable in accordance with this invention in lieu of the drawstring of FIG. 1; and,

[0013] FIG. 3 is a front plan view of an alternative embodiment of a wearable garment in accordance with this invention, incorporating constriction bands formed of a shape-memory material that is constrictable in response to the flow of electricity therethrough.

DETAILED DESCRIPTION OF THE DISCLOSED EMBODIMENT

[0014] In the following description, for purposes of explanation rather than limitation, specific details are set forth such as the particular architecture, interfaces, techniques, etc., in order to provide a thorough understanding of the present invention. For purposes of simplicity and clarity, detailed descriptions of well-known devices, circuits, and methods are omitted so as not to obscure the description of the present invention with unnecessary detail.

[0015] Referring now to FIG. 1 of the drawings, a wearable shirt garment 10 in accordance with this invention may be seen to comprise a wearable body structure 12 having a first constriction band 14 coupled to the body 12 in the form of a drawstring circumscribing the chest area of a wearer, and a second constricting drawstring 16 circumscribing a wrist area. Shown in dotted lines representing a position on the interior (invisible) surface of garment 10, a first sensor device 18 is positioned so that it will lie between the band 14 and the chest skin of one wearing the garment 10. A second sensor 20 is similarly positioned to lie between band 16 and the wrist skin of a wearer.

[0016] It should be understood readily by those having skill in this art, that the number and positioning of the bands 14, 16 and the sensors 18, 20 is illustrative only, and other

or different sensors, or different number of sensors, in other or different locations may be incorporated into this or any differently shaped garment without departing from the spirit and scope of this invention. For example, in the absence of any desire for a sensor in a wrist area, the garment may be made essentially sleeveless in form, if desired. Similarly, the garment may assume other forms, such as, for example, trousers rather than a shirt or vest, or even, perhaps, a simple wrist or arm band.

[0017] Bands **14**, **16** define loops positioned so as to substantially circumscribe desired portions of the anatomy of the wearer of the garment **10** in a loose-fitting loop, and they are configured to have a first circumferential loop dimension that circumscribes the wearer's body in a loose, non-confining fit. In the embodiment illustrated in **FIG. 1**, bands **14**, **16** are coupled to the body structure **12** in the manner of a drawstring that is looped around the anatomy of a wearer when the body structure is being worn. Further, the bands are provided with free ends **22**, **24**, that can be drawn in opposite directions to reduce the circumferential dimension of the loop from a first value to a second value that is less than the first. When the circumferential dimension of the loop is reduced in this way, the corresponding band constricts the body of the wearer of garment **10**, and presses the corresponding sensor device **18**, **20** against the wearer's skin.

[0018] As mentioned earlier herein, **FIG. 2** illustrates an alternative form of constriction band **26**, having the form of a continuous, or closed, loop formed of shape memory alloy fibers having a first loose-fitting circumferential dimension. In the well-known manner of shape memory alloy materials, the first circumferential dimension of loop **26** may be reduced to a lesser second dimension so as to constrict an interposed sensor device **18'** into contact with a wearer's body in accordance with this invention, by passing an electrical current, from a battery [not shown] for example, through the material of the loop. If desired, this embodiment of the invention may incorporate a suitable microprocessor [not shown] coupled with a source of electrical power such as a battery, to control the application of electrical current to the band. In this manner, constriction of the band **26** may be made to take place periodically or in association with any desired external activity, such as the activation of an apparatus associated with use of sensors such as sensor **18'**, shown in **FIG. 3**.

[0019] The fabric of the garment body structure **12** may be any suitable material usable for garments, consistent with the requirements of the embodiments of the invention described herein. Similarly, the material of the bands **14**, **16** may be any suitable flexible material consistent with this disclosure.

[0020] While the preferred embodiments of the present invention have been illustrated and described, it will be understood by those skilled in the art that various changes and modifications may be made, and equivalents may be

substituted for elements thereof without departing from the true scope of the present invention. In addition, many modifications may be made to adapt to a particular situation and the teaching of the present invention without departing from the central scope. Therefore, it is intended that the present invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out the present invention, but that the present invention include all embodiments falling within the scope of the appended claims.

1-11. Cancelled

12. A garment for selectively applying at least one sensor against the skin of a wearer, said garment comprising:

a wearable structure;

a sensor mounted to said wearable structure in position to contact a desired portion of the anatomy of a wearer of said structure;

a band of flexible material incorporated into said wearable structure in position to circumscribe a desired portion of the wearer's anatomy with said sensor device being positioned to lie between said band and the wearer's anatomy;

said band of flexible material defining a loop having a first circumferential dimension, and having a shape memory alloy that reduces in axial length in response to the passage of electrical current therethrough, wherein said shape memory alloy is capable of reducing said first circumferential dimension to a second circumferential dimension less than said first circumferential dimension so as to constrict the anatomy of a wearer of said garment and press said sensor against said anatomy.

13. The garment of claim 12, wherein said flexible material of said band is axially elastic.

14. The garment of claim 12, wherein said shape memory alloy is Nitinol.

15. The garment of claim 12, wherein said wearable body structure has the shape of a shirt.

16. The garment of claim 15, wherein said sensor is positioned to contact the chest of a wearer.

17. A method of selectively applying at least one sensor against the anatomy of a subject, said method comprising the steps of:

positioning said sensor adjacent a desired portion of the anatomy of said subject;

surrounding said sensor and said subject with a constrictable band of flexible material; and

selectively constricting said constrictable band to press said sensor into contact with the anatomy of said subject by passing electric current through a shape memory alloy material which forms a component of said constrictable band.

* * * * *

专利名称(译)	有选择地应用可穿戴医疗传感器		
公开(公告)号	US20040210165A1	公开(公告)日	2004-10-21
申请号	US10/842380	申请日	2004-05-10
[标]申请(专利权)人(译)	MARMAROPOULOS GEORGE •范•希尔顿克莱夫.		
申请(专利权)人(译)	MARMAROPOULOS GEORGE •范•希尔顿克莱夫.		
当前申请(专利权)人(译)	皇家飞利浦电子N.V.		
[标]发明人	MARMAROPOULOS GEORGE VAN HEERDEN CLIVE		
发明人	MARMAROPOULOS, GEORGE VAN HEERDEN, CLIVE		
IPC分类号	A41D13/00 A41D1/00 A61B A61B5/00 A61B5/0205 A61B5/024 A61B5/04 A61B5/0408 A61B5/103 A61B5/117 A61N1/04		
CPC分类号	A61B5/02055 A61B5/02438 A61B5/6804		
其他公开文献	US7211053		
外部链接	Espacenet USPTO		

摘要(译)

可穿戴服装包括众所周知的设计的医疗传感器装置，当希望获得医疗读数（例如心率或温度）时，选择性地按压穿戴者的皮肤，或者施加诸如电脉冲之类的治疗用于除颤目的。该服装包括一个或多个柔性材料带，其围绕穿着者身体的一部分，至少一个传感器装置位于该带和穿着者身体之间的衣服上。为了确保穿着者的舒适性，可以从第一维度选择性地缩短带子的周长，第一维度松散地围绕穿着者身体的期望部分，到第二较小尺寸，其更紧密地围绕穿着者的身体。佩戴者的身体并将传感器牢固地按压到佩戴者的皮肤上。在本发明的一个实施例中，外接带具有束带环的形式和功能，其端部适于沿相反方向拉伸，以便围绕使用者身体的外接部分收紧环。在另一个实施例中，带是连续的材料环，结合到服装的结构中，并且由诸如形状记忆合金线或任何类似材料形成，其具有响应于轴的长度缩短的轴向长度的特性。施加电流。这些材料在各种领域中是众所周知的，例如机器人技术，其中它们被识别为“肌肉线”或“镍钛诺”。

